



中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

Applicant name : SHANTOU CITY CHENGHAI DISTRICT HAOJUN TOYS CO., LTD
Applicant address : BUILDING 1, LANE 1, XIAJIAO JIAO NEI INDUSTRIAL ZONE,
CHENGHUA STREET, CHENGHAI DISTRICT, SHANTOU CITY, CHINA
Manufacturer name : SHANTOU CITY CHENGHAI DISTRICT HAOJUN TOYS CO., LTD
Manufacturer address : BUILDING 1, LANE 1, XIAJIAO JIAO NEI INDUSTRIAL ZONE,
CHENGHUA STREET, CHENGHAI DISTRICT, SHANTOU CITY, CHINA

Sample Description : REMOTE CONTROL CAR
Model No. : 8817
Client Specified Age Grade : 6+
Tested Age Grade : --
Sample received date : 15 FEB. 2020
Testing completed date : 21 FEB. 2020

Tests conducted: For compliance with application, refer to attached page(s) for details.

Assess standard used:	Conclusion
FCC Part 15, Subpart C, Section 15.249	PASS

Note: "--" is represent for blank. "N/A" means not applicable.

Tested by: Glory

Reviewed by: Fly Liang

Approved by: Grzegorz Jane
Position: Technical Supervisor
Date: 2020-02-21



This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

TABLE OF CONTENTS

1 Test Standards3
2 Summary3
2.1 General remarks.....	.3
2.2 Final assessment.....	.3
3 Equipment Under Test.....	.3
3.1 Short description of the Equipment Under Test (EUT).....	.3
3.2 EUT configuration.....	.4
3.3 Description of test modes.....	.4
4 Test Environment.....	.5
4.1 Address of the test laboratory5
4.2 Test facility.....	.5
4.3 Environmental conditions5
4.4 Statement of the measurement uncertainty6
4.5 Test types and results6
5 Test Conditions and Results.....	.6
5.1 Radiated emission6
5.2 20dB bandwidth.....	.19
5.3 Antenna requirements22
6 Test Equipment.....	.23
7 Manufacturer/ Approval holder Declaration24

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajttesting.com Email: info@ajttesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

1 Test Standards

The tests were performed according to following standards:
FCC Part 15, Subpart C, Section 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz
ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2 Summary

2.1 General remarks

Date of receipt of test sample	15 FEB. 2020
Testing commenced on	15 FEB. 2020 ---- 21 FEB. 2020
Testing concluded on	21 FEB. 2020

2.2 Final assessment

Test content:	Assessment
The RF requirements pertaining to the technical standards and tested operation modes are	Fulfilled
The equipment under test	Fulfilled the RF requirements

3 Equipment Under Test

3.1 Short description of the Equipment Under Test (EUT)

EUT Name:	REMOTE CONTROL CAR
FCC ID:	2AVTA-8817
Model No.:	8817
Number of tested samples:	1
Serial number:	--
Power supply voltage	DC 4.5V
Operating Mode	TX Mode
Operation frequency	2410-2473MHz
Number of Channel	1
Modulation	GFSK
Antenna Type	Integral Antenna
Antenna Gain	0dBi

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

3.2 EUT configuration

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurement:

Not Applicable

EUT

3.3 Description of test modes

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on Y axis for radiated emission. The EUT was tested under the following mode.

EUT configure mode	Applicable to				Description		
	RE < 1G	RE ≥ 1G	PLC	BW	DC 6V from battery		
A	√	√	N/A	√			

Where RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
RE≥1G: Radiated Emission above 1GHz
BW: 20dB bandwidth

Following channel(s) was (were) selected for the test as listed below.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410	18	2427	35	2444	52	2461
2	2411	19	2428	36	2445	53	2462
3	2412	20	2429	37	2446	54	2463
4	2413	21	2430	38	2447	55	2464
5	2414	22	2431	39	2448	56	2465
6	2415	23	2432	40	2449	57	2466
7	2416	24	2433	41	2450	58	2467
8	2417	25	2434	42	2451	59	2468
9	2418	26	2435	43	2452	60	2469
10	2419	27	2436	44	2453	61	2470
11	2420	28	2437	45	2454	62	2471
12	2421	29	2438	46	2455	63	2472
13	2422	30	2439	47	2456	64	2473
14	2423	31	2440	48	2457		
15	2424	32	2441	49	2458		
16	2425	33	2442	50	2459		
17	2426	34	2443	51	2460		

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajttesting.com Email: info@ajttesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

Channel list

Channel	Frequency (MHz)
The lowest channel	2410
The middle channel	2442
The highest channel	2473

Note: The more detailed channel, please refer to the product specifications

4 Test Environment

4.1 Address of the test laboratory

Test site:	1/F YIFENG BUILDING, CHENGHUA INDUSTRIAL ZONE, CH
Tel:	86-754-85860999
Fax:	86-754-86984098

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:	
CNAS Accreditation NO.:	L4735
A2LA Accreditation NO.:	5443.01
Designation Number:	CN1263
Test Firm Registration Number:	127385
Industry Canada site registration number:	25345
FCC Registration NO.:	0028094555

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:	
Temperature	15~30°C
Humidity	20~75%

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. Furthermore, component and process variability of devices are similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Uncertainty (Standard: ETSI TR 100 028)	
Conducted emissions	±2.14dB
Radiated Emission below 1GHz	±4.88dB
Radiated Emission above 1GHz	±4.65dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Test types and results

Standard: FCC PART 15, SUBPART C (SECTION 15.249)		
Standard section	Test Type	Result
§15.209 & §15.249(a)	Radiated Emission	PASS
§15.215(c)	20dB Bandwidth	PASS
§15.207(a)	Conducted Emission	N/A
§15.203	Antenna Requirement	PASS
§15.205	Restricted Band Around Fundamental Frequency	PASS

5 Test Conditions and Results

5.1 Radiated emission

For test instruments and accessories used see section 6

5.1.1 Test procedures

- (1) The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com



Test Report


No.: AJT200215017E-1

- (5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- (6) For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- (7) If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported
4. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

5.1.2 Test setup

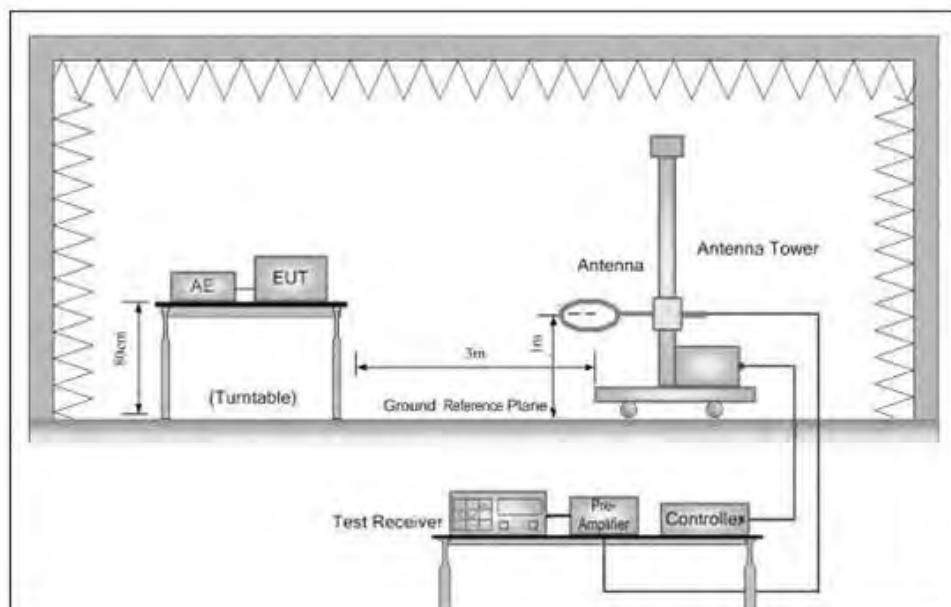

Below 30MHz

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.



AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com



Test Report

No.: AJT200215017E-1

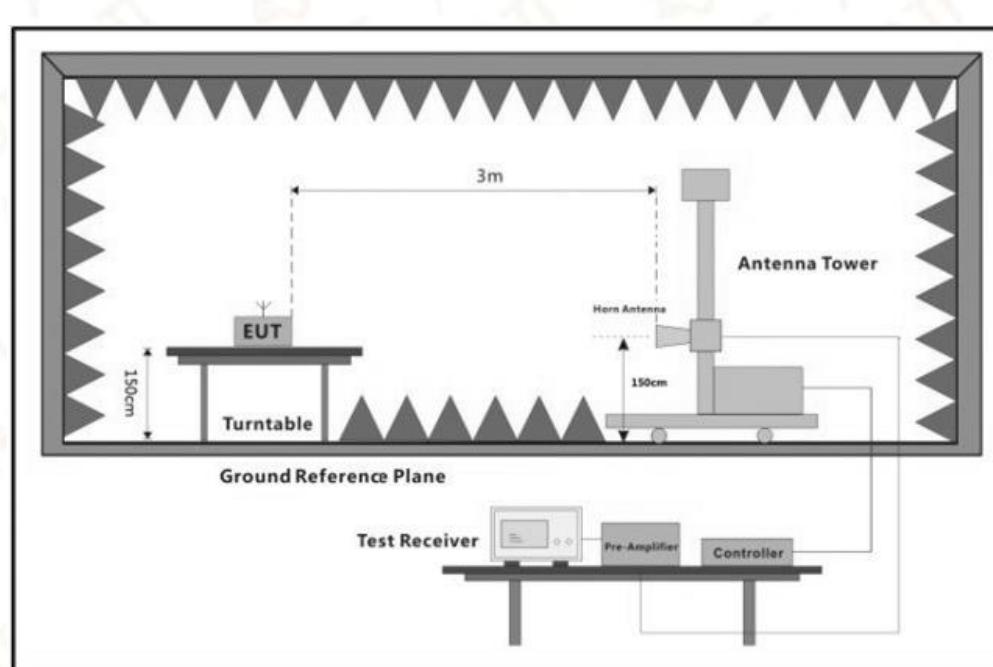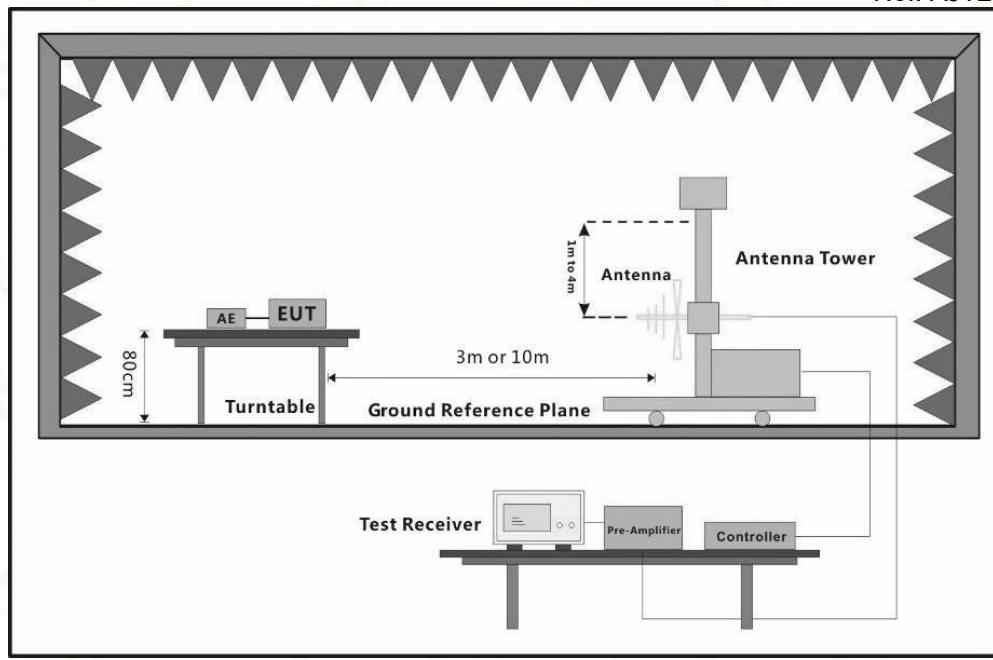

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajttesting.com Email: info@ajttesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

5.1.3 Test limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Filed strength of fundamental(milli-volts/meter)	Field strength of harmonics (micro- volts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~5875 MHz	50	500
24.0 ~24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Emission from 9kHz to 30MHz is more than 20dB below the limit.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report


No.: AJT200215017E-1

5.1.4 Test results

5.1.4.1 Radiated emissions test (below 1GHz)

Test point	Operation mode	Result
Horizontal	TX mode (The worst channel: 2410MHz)	PASS

EUT	REMOTE CONTROL CAR
Operating Condition	DC 4.5V
Test Condition	Ambient Temperature: 17°C Humidity: 51%RH

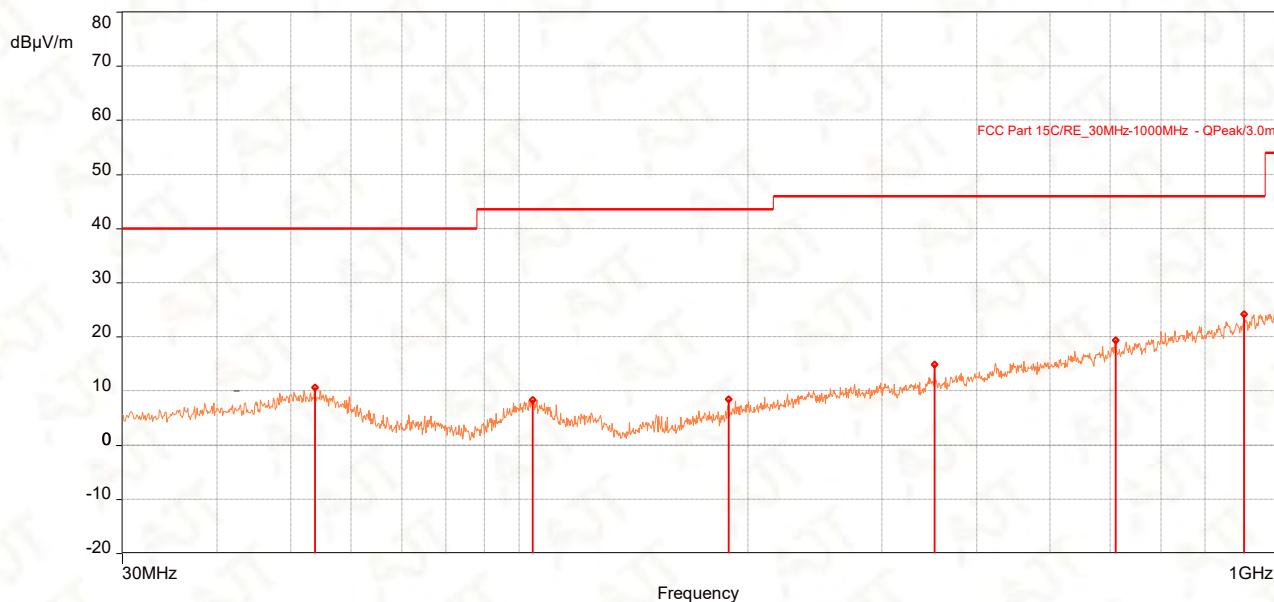

Frequency (MHz)	Peak (dB μ V/m)	QP (dB μ V/m)	QP Lim. (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarization	Correction (dB)
53.862	10.67	--	40.00	29.33	94.00	1.00	Horizontal	-12.43
104.205	8.33	--	43.50	35.17	56.00	1.00	Horizontal	-14.19
188.595	8.47	--	43.50	35.03	6.00	1.00	Horizontal	-15.76
352.04	14.81	--	46.00	31.19	56.00	1.00	Horizontal	-9.61
609.381	19.31	--	46.00	26.69	169.00	1.00	Horizontal	-3.69
900.09	24.18	--	46.00	21.82	306.00	1.00	Horizontal	1.07

Note:

1.QP and Avg. are abbreviations of Quasi-Peak and Average

2.Emission Level = Read Level + Correction Factor

3.Correction Factor = Antenna Factor + Cable Loss - Preamplifier Gain

4.Margin = Limit Value - Emission Level

5.The emission levels of other frequencies were more than 20dB margin against the limit

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajttesting.com Email: info@ajttesting.com






中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

Test point	Operation mode	Result
Vertical	TX mode (The worst channel: 2410MHz)	PASS

EUT	REMOTE CONTROL CAR
Operating Condition	DC 4.5V
Test Condition	Ambient Temperature: 17°C Humidity: 51%RH

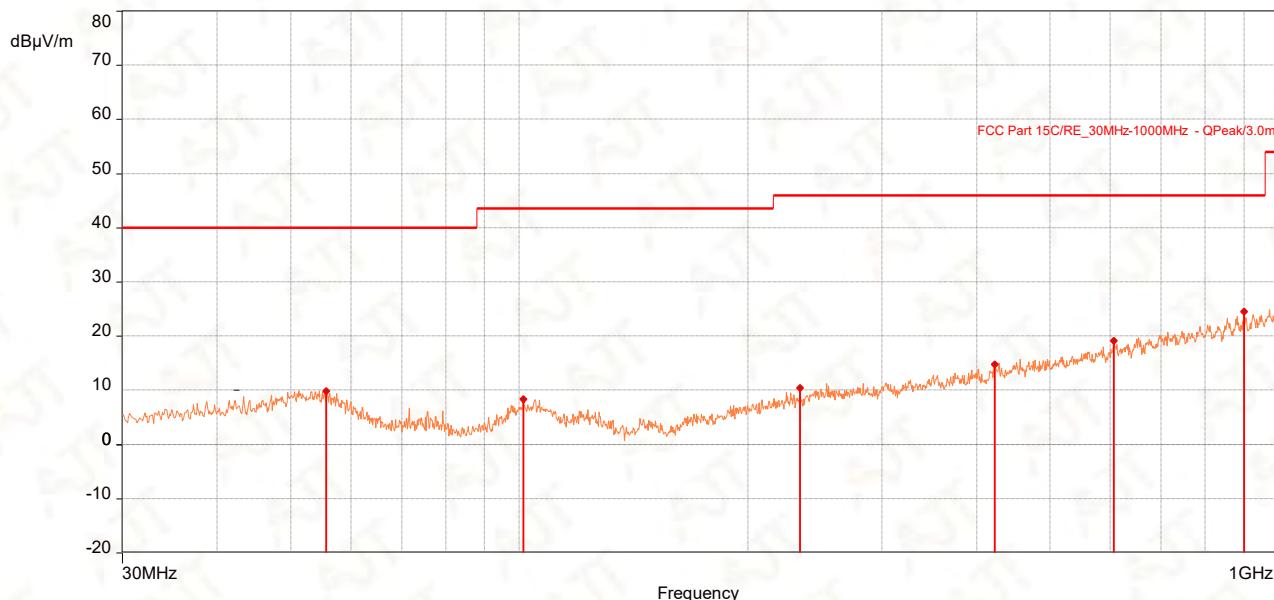

Frequency (MHz)	Peak (dB μ V/m)	QP (dB μ V/m)	QP Lim. (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarization	Correction (dB)
55.705	9.86	--	40.00	30.14	248.00	1.00	Vertical	-12.88
101.295	8.31	--	43.50	35.19	101.00	1.00	Vertical	-14.56
234.185	10.45	--	46.00	35.55	129.00	1.00	Vertical	-13.25
423.044	14.77	--	46.00	31.23	122.00	1.00	Vertical	-7.93
607.053	19.16	--	46.00	26.84	124.00	1.00	Vertical	-3.69
899.993	24.54	--	46.00	21.46	5.00	1.00	Vertical	1.07

Note:

1.QP and Avg. are abbreviations of Quasi-Peak and Average

2.Emission Level = Read Level + Factor

3.Correction Factor = Antenna Factor + Cable Loss - Preamplifier Gain

4.Margin value = Limit Value - Emission Level

5.The emission levels of other frequencies were more than 20dB margin against the limit

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

5.1.4.2 Radiated emissions test (above 1GHz)

EUT	REMOTE CONTROL CAR						
Channel	The lowest channel (2410MHz)		Detector function		Peak (PK) Average (AV)		
Frequency range	above 1GHz		Result		PASS		

Antenna Polarity & Test Distance: Horizontal At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle ($^{\circ}$)	Polarization	Correction (dB)	Detector
2390.04	15.38	54.00	38.62	1.98	68.00	Horizontal	-24.54	Average
2400	18.71	54.00	35.29	1.98	276.00	Horizontal	-24.54	Average
*2410.08	56.44	94.00	37.56	1.98	224.00	Horizontal	-24.54	Average
4819.925	15.99	54.00	38.01	1.48	332.00	Horizontal	-24.54	Average
7229.85	20.11	54.00	33.89	1.48	299.00	Horizontal	-24.54	Average
2390.04	39.92	74.00	34.08	1.98	68.00	Horizontal	-3.50	Peak
2400	43.25	74.00	30.75	1.98	276.00	Horizontal	-3.27	Peak
*2410.08	80.98	114.00	33.02	1.98	224.00	Horizontal	-3.28	Peak
4819.925	40.53	74.00	33.47	1.48	332.00	Horizontal	1.96	Peak
7229.85	44.65	74.00	29.35	1.48	299.00	Horizontal	10.30	Peak
Antenna Polarity & Test Distance: Vertical At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle ($^{\circ}$)	Polarization	Correction (dB)	Detector
2390.04	15.2	54.00	38.8	1.99	11.00	Vertical	-24.54	Average
2400	16.19	54.00	37.81	1.00	65.00	Vertical	-24.54	Average
*2410.08	53.09	94.00	40.91	1.99	126.00	Vertical	-24.54	Average
4819.925	10.99	54.00	43.01	1.50	112.00	Vertical	-24.54	Average
7229.85	19.04	54.00	34.96	1.50	318.00	Vertical	-24.54	Average
2390.04	39.74	74.00	34.26	1.99	11.00	Vertical	-3.30	Peak
2400	40.73	74.00	33.27	1.00	65.00	Vertical	-3.07	Peak
*2410.08	77.63	114.00	36.37	1.99	126.00	Vertical	-3.08	Peak
4819.925	35.53	74.00	38.47	1.50	112.00	Vertical	1.80	Peak
7229.85	43.58	74.00	30.42	1.50	318.00	Vertical	10.19	Peak

Remarks:

1. Emission level (dB μ V/m) = Raw Value (dB μ V) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The emission levels of other frequencies were more than 20dB margin against the limit.
4. Margin value = Limit value - Emission level.
5. " * ": Fundamental frequency.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com






中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report


No.: AJT200215017E-1

Band Edge Plot

2410MHz Horizontal

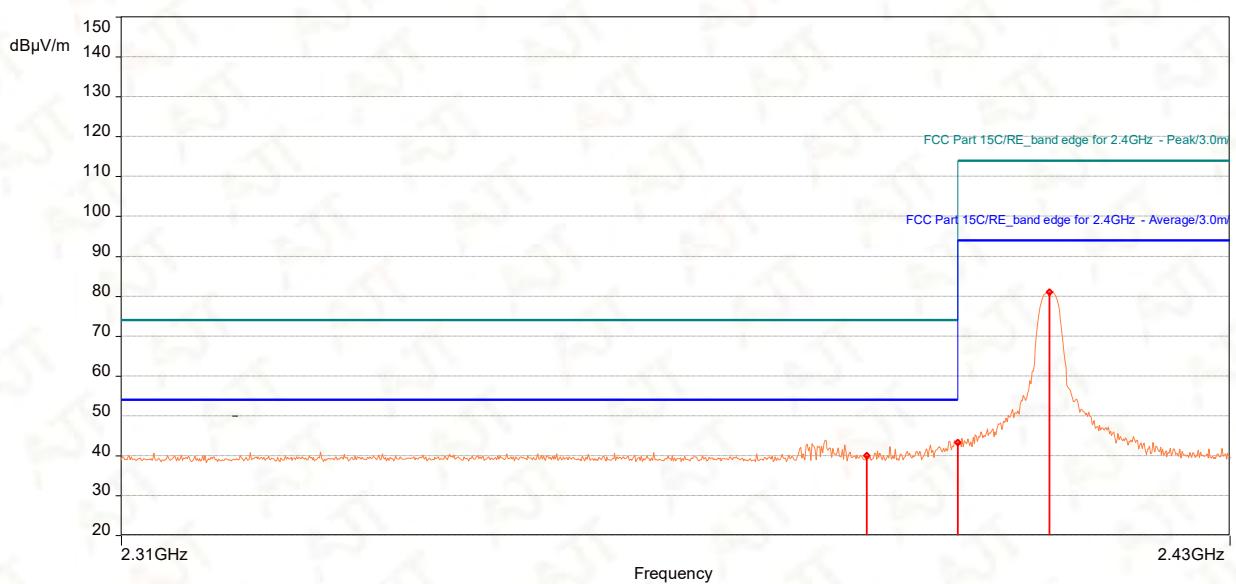

2410MHz Vertical

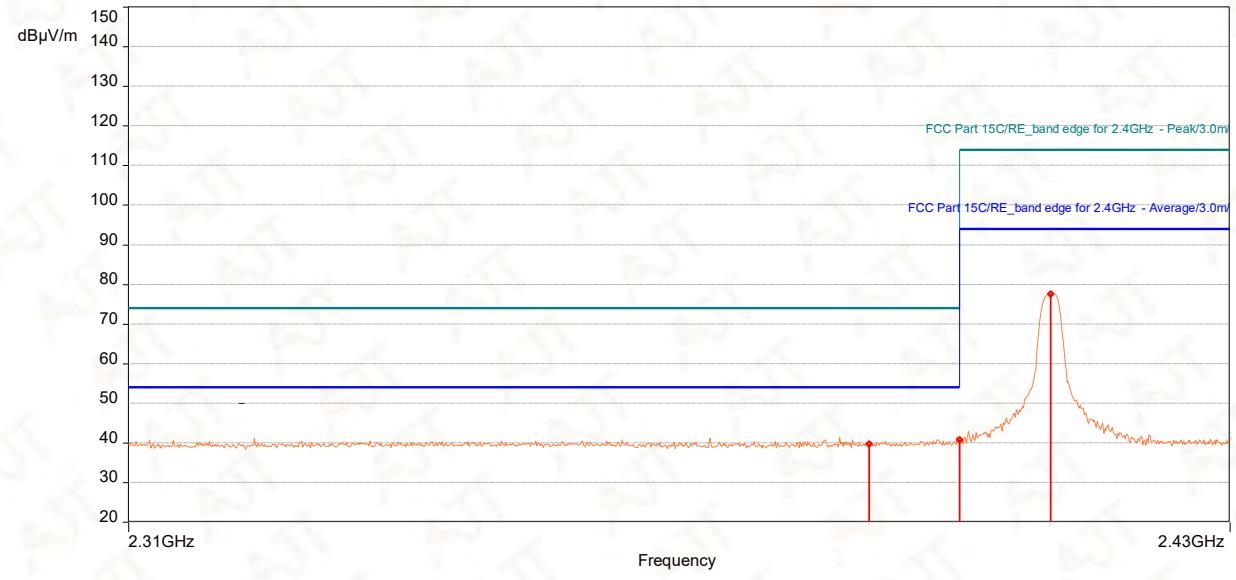

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

EUT	REMOTE CONTROL CAR						
Channel	The middle channel (2442MHz)			Detector function		Peak (PK) Average (AV)	
Frequency range	above 1GHz			Result		PASS	

Antenna Polarity & Test Distance: Horizontal At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2442.0005	56.25	94.00	37.75	1.99	222.00	Horizontal	-24.54	Average
4884.55	13.57	54.00	40.43	1.51	326.00	Horizontal	-24.54	Average
7326.2	18.96	54.00	35.04	1.51	359.00	Horizontal	-24.54	Average
*2442.0005	80.79	114.00	33.21	1.99	222.00	Horizontal	-3.20	Peak
4884.55	38.11	74.00	35.89	1.51	326.00	Horizontal	1.48	Peak
7326.2	43.50	74.00	30.50	1.51	359.00	Horizontal	10.28	Peak
Antenna Polarity & Test Distance: Vertical At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2442.0005	52.14	94.00	41.86	1.99	133.00	Vertical	-24.54	Average
4884.55	10.52	54.00	43.48	1.50	282.00	Vertical	-24.54	Average
7326.2	18.98	54.00	35.02	1.50	354.00	Vertical	-24.54	Average
*2442.0005	76.68	114.00	37.32	1.99	133.00	Vertical	-3.00	Peak
4884.55	35.06	74.00	38.94	1.50	282.00	Vertical	1.31	Peak
7326.2	43.52	74.00	30.48	1.50	354.00	Vertical	10.25	Peak

Remarks:

1. Emission level (dB μ V/m) = Raw Value (dB μ V) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The emission levels of other frequencies were more than 20dB margin against the limit.
4. Margin value = Limit value - Emission level.
5. " * ": Fundamental frequency.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

EUT	REMOTE CONTROL CAR							
Channel	The highest channel (2473MHz)			Detector function			Peak (PK)	Average (AV)
Frequency range	above 1GHz			Result			PASS	

Antenna Polarity & Test Distance: Horizontal At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2473.5	55.42	94.00	38.58	2.00	234.00	Horizontal	-24.54	Average
2483.5	16.78	54.00	37.22	2.00	279.00	Horizontal	-24.54	Average
4946.825	15.74	54.00	38.26	1.50	319.00	Horizontal	-24.54	Average
7419.025	20.36	54.00	33.64	1.50	26.00	Horizontal	-24.54	Average
*2473.5	79.96	114.00	34.04	2.00	234.00	Horizontal	-3.23	Peak
2483.5	41.32	74.00	32.68	2.00	279.00	Horizontal	-3.10	Peak
4946.825	40.28	74.00	33.72	1.50	319.00	Horizontal	1.76	Peak
7419.025	44.90	74.00	29.10	1.50	26.00	Horizontal	10.39	Peak

Antenna Polarity & Test Distance: Vertical At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2473.35	52.67	94.00	41.33	1.00	237.00	Vertical	-24.54	Average
2483.5	16.52	54.00	37.48	1.00	212.00	Vertical	-24.54	Average
4945.65	10.35	54.00	43.65	1.50	263.00	Vertical	-24.54	Average
7419.025	19.48	54.00	34.52	1.50	100.00	Vertical	-24.54	Average
*2473.35	77.21	114.00	36.79	1.00	237.00	Vertical	-3.03	Peak
2483.5	41.06	74.00	32.94	1.00	212.00	Vertical	-2.90	Peak
4945.65	34.89	74.00	39.11	1.50	263.00	Vertical	1.56	Peak
7419.025	44.02	74.00	29.98	1.50	100.00	Vertical	10.43	Peak

Remarks:

1. Emission level (dB μ V/m) = Raw Value (dB μ V) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The emission levels of other frequencies were more than 20dB margin against the limit.
4. Margin value = Limit value - Emission level.
5. " * ": Fundamental frequency.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com






中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report


No.: AJT200215017E-1

Band Edge Plot

2473MHz Horizontal

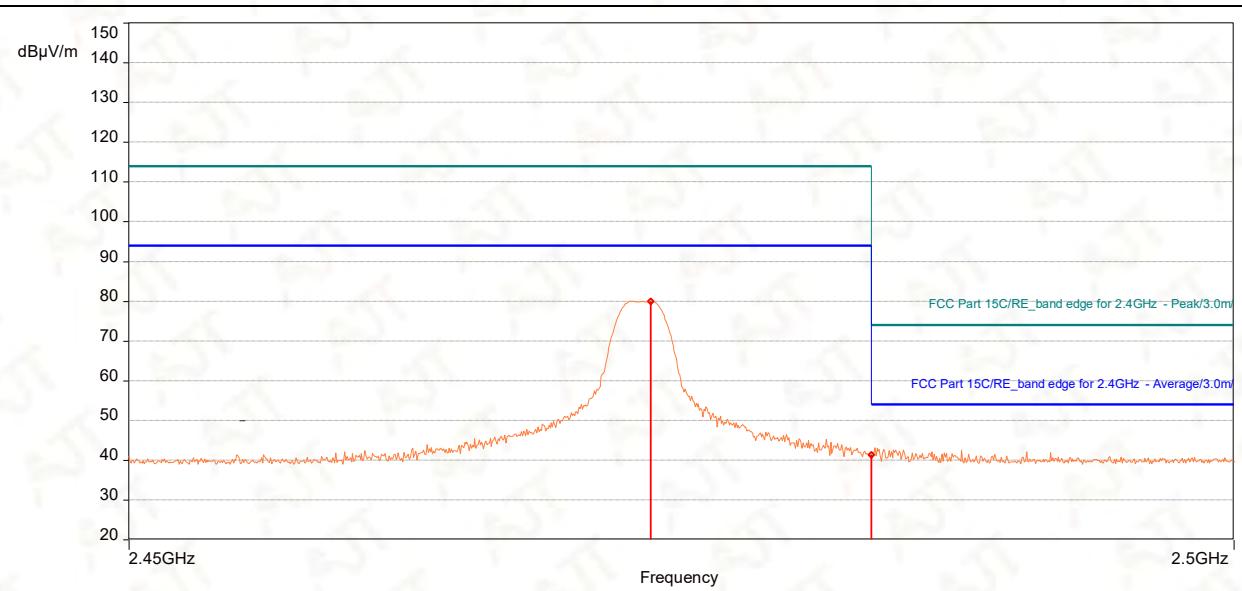

2473MHz Vertical

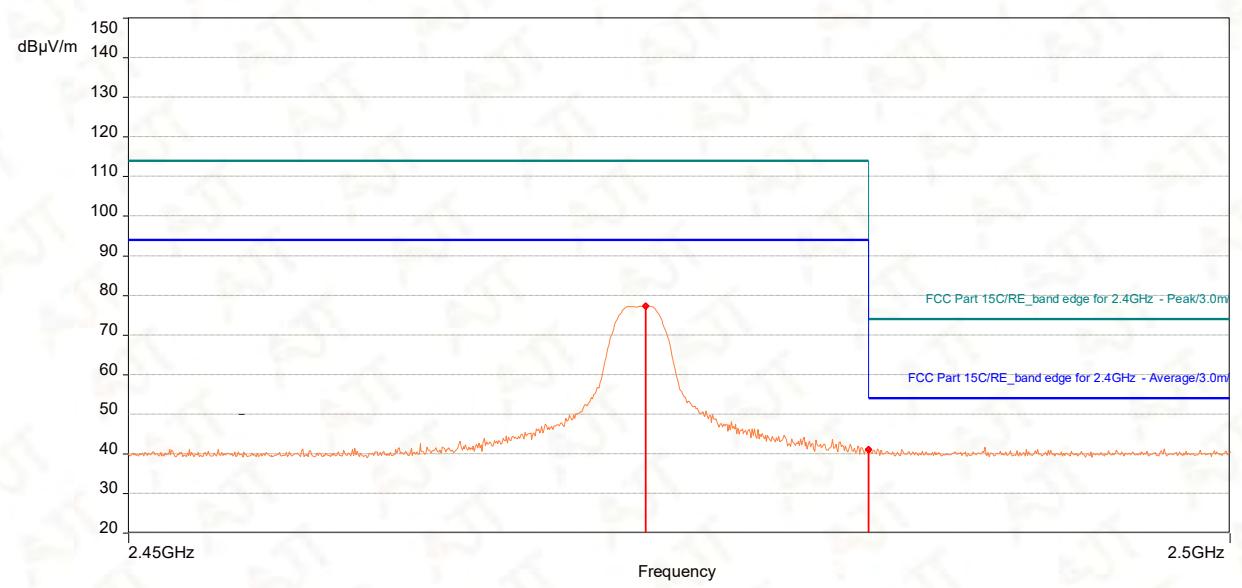

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

5.1.4.3 Calculation of Average Factor


Effective period of the cycle =0.71ms

The duration of one cycle =11.97ms

Duty Cycle = 0.71ms / 11.97ms =5.93%

Averaging factor in dB = $20 \log (\text{duty cycle}) = 20 \log (5.93\%) = -24.54$

Duty Cycle_100ms

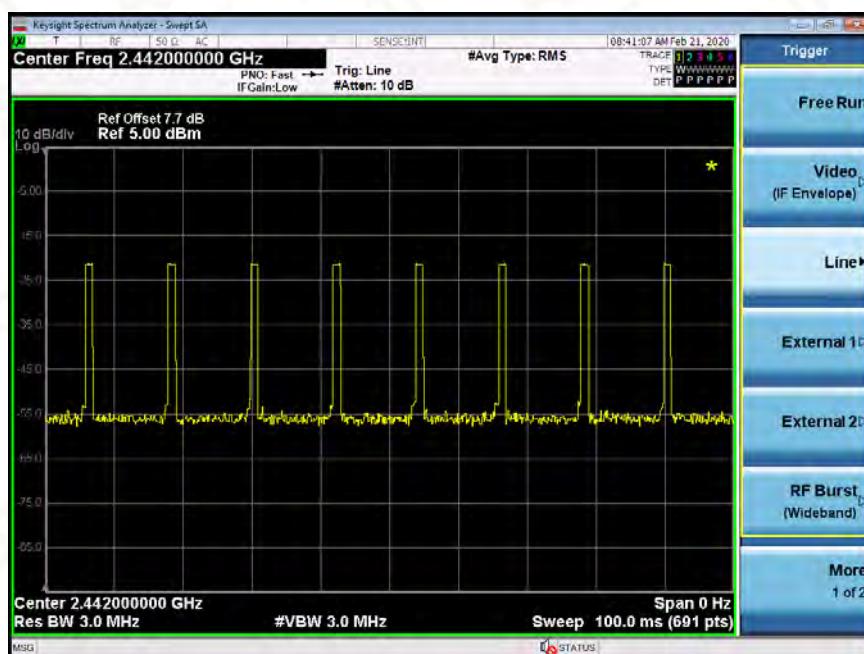

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com






中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

Effective period of the cycle

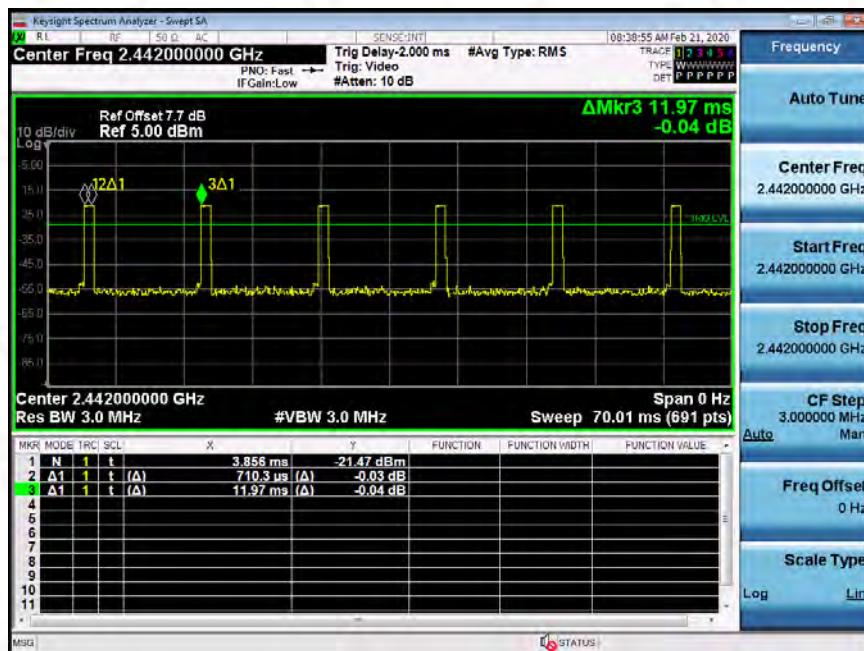

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

5.2 20dB bandwidth

For test instruments and accessories used see section 6

5.2.1 Test procedures

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

5.2.2 Test setup



5.2.3 Test limits

According to FCC 15.215(c), must be designed to ensure that the 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.2.4 Test results

Channel	frequency (MHz)	F_L (MHz)	F_H (MHz)	20dB Bandwidth (MHz)
The lowest channel	2410	2409.508	2410.700	1.192
The middle channel	2442	2441.500	2442.676	1.176
The highest channel	2473	2472.320	2473.820	1.500

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com



Test Report

No.: AJT200215017E-1



2410MHz



2442MHz

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1



2473MHz

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

5.3 Antenna requirements

Test Standard:
FCC Part 15, Subpart C 15.203

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user. but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi. Antenna location: Refer to Appendix (Internal photos).

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

6 Test Equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	Keysight	N9010A	MY51120099	2019/07/17	2020/07/17
2	JS0806-2 RF Control Unit	Tonscend	JS0806-2	188060124	2019/12/12	2020/12/12
3	Broadband Preamplifier	SCHWARZBECK	BBV 9743B	00067	2019/04/15	2020/04/15
4	Broadband Preamplifier	SCHWARZBECK	BBV 9718B	00062	2019/04/15	2020/04/15
5	EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102452	2019/07/15	2020/07/15
6	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	9163-1127	2019/06/04	2020/06/04
7	Horn Antenna	SCHWARZBECK	BBHA 9120D	01829	2019/06/04	2020/06/04
8	DC power supply	MAISHENG	MP5030D	2018121557	2019/08/26	2020/08/26
9	Vector Signal Generator	Keysight	N5172B-506	MY53052255	2019/06/03	2020/06/03
10	EXG Analog Signal Generator	Keysight	N5171B-506	MY53051692	2019/05/31	2020/05/31
11	Constant temperature humidity chamber	REALE	RHP-225L	R2017032031 1	2019/07/05	2020/07/05
12	Temperature And Humidity Indicator	JianDaRenKe	Cos-03	0612058	2019/07/31	2020/07/31
13	BAT-EMC Testing (Test Software)	NEXIO	BAT-EMC	Version: 3.16.0.74	N/A	N/A
14	JS1120-3 Test System (Test Software)	Tonscend	JS1120-3	Version: 2.5.77.0418	N/A	N/A
15	Double Ridge Guide Horn Antennas	A.H.Systems	SAS-574	588	2019/06/06	2020/06/06
16	Active loop antenna	BeiJing DaZe technology co. LTD	ZN30900C	15015	2019/03/10	2020/03/10

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajtesting.com Email: info@ajtesting.com





中国认可
国际互认
检测
TESTING
CNAS L4735

Test Report

No.: AJT200215017E-1

7 Manufacturer/ Approval holder Declaration

The following identical model(s):

8811, 8812, 8813, 8815, 8816, 8818, 8819, 8830, 8831, 8832, 8833, 8834, 8835, 8836, 8837, 8838, 8839, 8840, 8841, 8842, 8843, 8844, 8845, 8846, 8847, 8848, 8849, 8850, 8851, 8852, 8853, 8855, 8856, 8857, 8858, 8859, 8860, 8861, 8862, 8863, 8864, 8865, 8866, 8867, 8868, 8880, 8881, 8882, BZR6, BZR7, BZR10, BZR11, BZR16, BZR17, BZR18

Belong to the tested device:

Product description: REMOTE CONTROL CAR
Model No.: 8817

END OF TEST REPORT

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1F & 2F Yifeng Building, Chenghua Industrial Zone, Chenghai District, Shantou, Guangdong, China 515800.
Tel: 86-754-85860999 Fax: 86-754-86984098 Website: www.ajttesting.com Email: info@ajttesting.com

