TEST REPORT

Application No.:	GZEM2002010592CR
Applicant:	Logistics and Supply Chain MultiTech R&D Centre Limited
Address of Applicant:	Units 1101-1105 and 1109, Level 11 Cyberport 2, 100 Cyberport Road, Hong Kong
Manufacturer:	The same as applicant
Address of Manufacturer:	The same as applicant
Factory:	Jetta (China) Industries Co., Ltd.
Address of Factory:	333 Cai Xin Lu, Lan He Zhen, Nan Sha Qu, Guangzhou, China
Equipment Under Test (EUT):	
EUT Name:	Sensing Monitoring
Model No.:	Router
Trade Mark:	LSCM
Standard(s):	47 CFR Part 15, Subpart C 15.247
Date of Receipt:	2020-03-09
Date of Test:	2020-03-16 to 2020-04-02
Date of Issue:	2020-05-18
Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian
EMC Laboratory Manager

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2020-05-18		Original

Authorized for issue by:				
Tested By		Kevin Zhang **Kevin_Zhang /Project Engineer**		2020-03-16 to 2020-04-02 **Date**
Checked By		 **Jerry_Chan /Reviewer**		2020-05-18 **Date**

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	**Standard**	**Method**	**Requirement**	**Result**
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	**Pass**

Radio Spectrum Matter Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

3 Contents

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power Supply:	DC5V (USB-A or micro-usb) powered by AC/DC adapter refer to section 4.2
Test Voltage:	AC 120V 60Hz
Cable:	USB-A port for 5V power supply
	micro-USB for 5V power supply
Antenna Gain	0dBi
Antenna Type	Integrated Antenna
Channel Spacing	5MHz
Modulation Type	O-QPSK
Number of Channels	16
Operation Frequency	2405MHz to 2480MHz

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Apple	A1357 W010A051	REF. No.SEA0500
Laptop	Lenovo	T430u	REF. No.SEA1800
Micro USB Cable	PHILIPS	SWR2101	REF. No.SEA0700

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	±5.5 x 10^{-8}
2	Duty cycle	±0.57%
3	Occupied Bandwidth	±3%
4	RF Conducted power	±0.68dB
5	RF Power Density	±1.50dB
6	Conducted Spurious Emissions	±1.04dB
7	RF Radiated Power	±4.5dB (below 1GHz)
		±4.8dB (above 1GHz)
8	Radiated Spurious Emission Test	±4.5dB (30MHz-1GHz)
		±4.8dB (1GHz-18GHz)
9	Temperature	±0.4℃
10	Humidity	±1.3%
11	Supply Voltages	±1.5%
12	Time	±3%

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,

198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

- **Industry Canada (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-10449 and T-11179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584，G-10449 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Netwok	Rohde & Schwarz	ENV216	EMC0118	2020-01-10	2021-01-09
LISN	Rohde & Schwarz	ENV216	EMC2135	2019-09-16	2020-09-15
EMI Test Receiver	Rohde & Schwarz	ESCS30	EMC0506	2019-11-18	2020-11-17
Coaxial Cable	HangTianXing	2m	EMC0107	2018-09-20	2020-09-19
Voltage Probe	SGS-EMC	N/A	EMC0106	2019-05-10	2021-05-09
Conical Metal Housing	SGS-EMC	N/A	EMC0167	2018-04-19	2020-04-18
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A

Minimum 6dB Bandwidth					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-12	2020-04-12
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Conducted Peak Output Power					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-12	2020-04-12
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Power Spectrum Density					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-12	2020-04-12
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Conducted Band Edges Measurement					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-12	2020-04-12
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Conducted Spurious Emissions					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-12	2020-04-12
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Radiated Emissions which fall in the restricted bands					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2020-01-10	2021-01-09
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2020-01-10	2021-01-09
Chamber cable	HangTianXing	N/A	EMC0542	2019-06-28	2021-06-27
Trilog Broadband Antenna 25MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	EMC2174	2018-09-06	2021-09-05
Bi-log Type Antenna	Schaffner Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna	SCHWARZBECKMESS-ELEKTRONIK	BBHA 9120D	EMC2016	2019-09-25	2022-09-24
Horn Antenna 1GHz-18GHz	Rohde & Schwarz	HF906	EMC0518	2018-09-02	2021-09-01
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2020-01-10	2021-01-09
Amplifier	HP	8447F	EMC2065	2019-05-29	2020-05-28
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2019-11-18	2020-11-17
Active Loop Antenna	EMCO	6502	EMC0523	2018-03-05	2021-03-04
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2020-01-10	2021-01-09
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2020-01-10	2021-01-09
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-12-19	2020-12-18
MXE EMI Receiver	Keysight	N9038A	EMC2139	2019-11-18	2020-11-17
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2019-11-18	2020-11-17

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

Radiated Spurious Emissions					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2020-01-10	2021-01-09
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2020-01-10	2021-01-09
Chamber cable	HangTianXing	N/A	EMC0542	2019-06-28	2021-06-27
Trilog Broadband Antenna 25MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	EMC2174	2018-09-06	2021-09-05
Bi-log Type Antenna	Schaffner Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna	SCHWARZBECKMESS-ELEKTRONIK	BBHA 9120D	EMC2016	2019-09-25	2022-09-24
Horn Antenna 1GHz-18GHz	Rohde & Schwarz	HF906	EMC0518	2018-09-02	2021-09-01
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2020-01-10	2021-01-09
Amplifier	HP	8447F	EMC2065	2019-05-29	2020-05-28
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2019-11-18	2020-11-17
Active Loop Antenna	EMCO	6502	EMC0523	2018-03-05	2021-03-04
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2020-01-10	2021-01-09
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2020-01-10	2021-01-09
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-12-19	2020-12-18
MXE EMI Receiver	Keysight	N9038A	EMC2139	2019-11-18	2020-11-17
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2019-11-18	2020-11-17
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
DMM	Fluke	73	EMC0006	2019-07-16	2020-07-15
DMM	Fluke	73	EMC0007	2019-07-16	2020-07-15

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

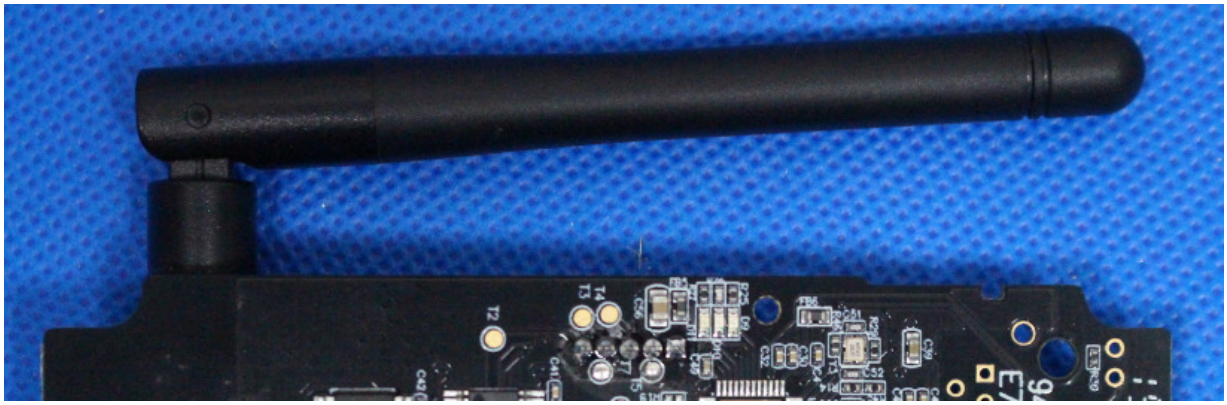

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.1.2 Test Setup Diagram

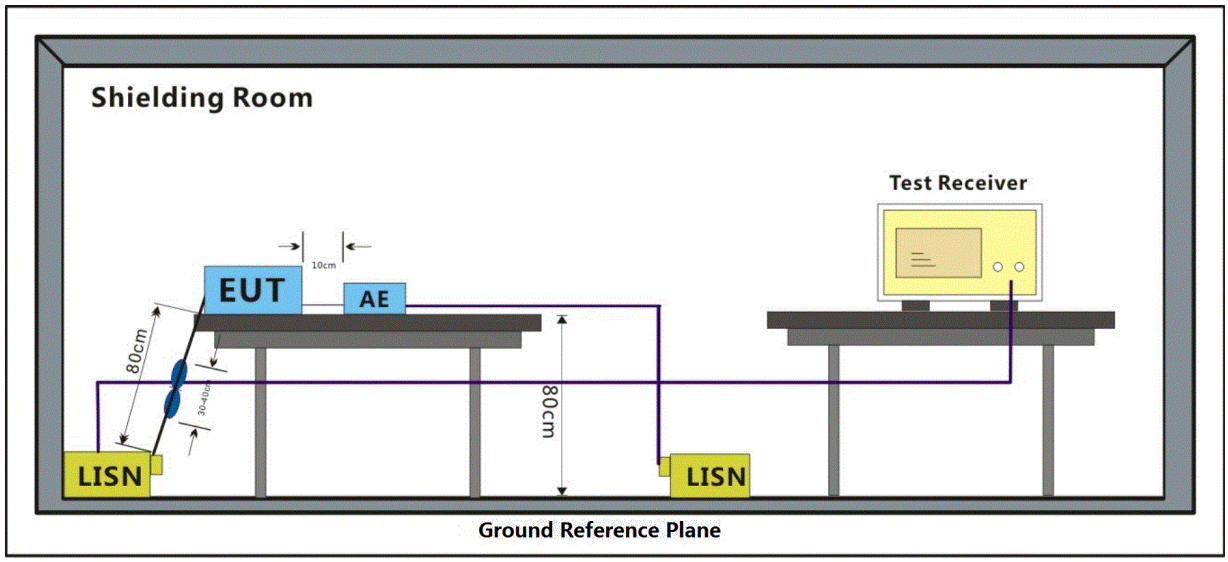

7.1.3 Measurement Procedure and Data

1) The mains terminal disturbance voltage test was conducted in a shielded room.

2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:a; Line:Live Line

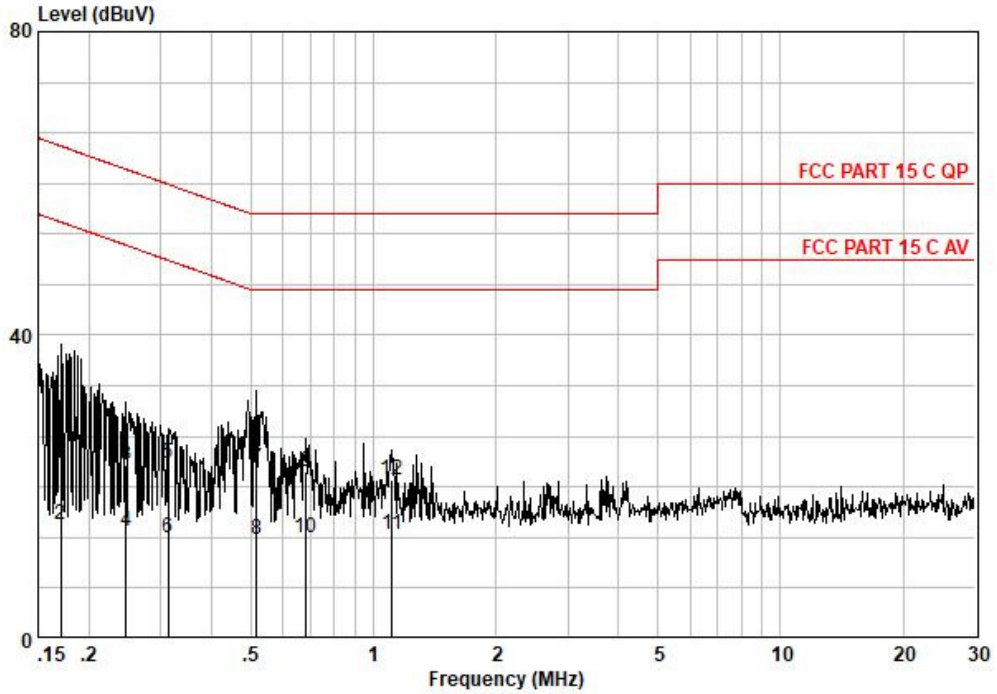

Pol :LIVE
No :
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0.17	17.68	0.10	9.66	27.44	64.94	-37.50	QP
0.17	5.22	0.10	9.66	14.98	54.94	-39.96	AVERAGE
0.25	13.09	0.10	9.67	22.86	61.86	-39.00	QP
0.25	4.41	0.10	9.67	14.18	51.86	-37.68	AVERAGE
0.31	13.38	0.10	9.67	23.15	59.88	-36.74	QP
0.31	3.46	0.10	9.67	13.23	49.88	-36.66	AVERAGE
0.52	12.73	0.10	9.67	22.50	56.00	-33.50	QP
0.52	3.33	0.10	9.67	13.10	46.00	-32.90	AVERAGE
0.68	12.33	0.10	9.67	22.10	56.00	-33.90	QP
0.68	3.62	0.10	9.67	13.39	46.00	-32.61	AVERAGE
1.11	3.99	0.10	9.68	13.77	46.00	-32.23	AVERAGE
1.11	11.11	0.10	9.68	20.89	56.00	-35.11	QP

Mode:a; Line:Neutral Line

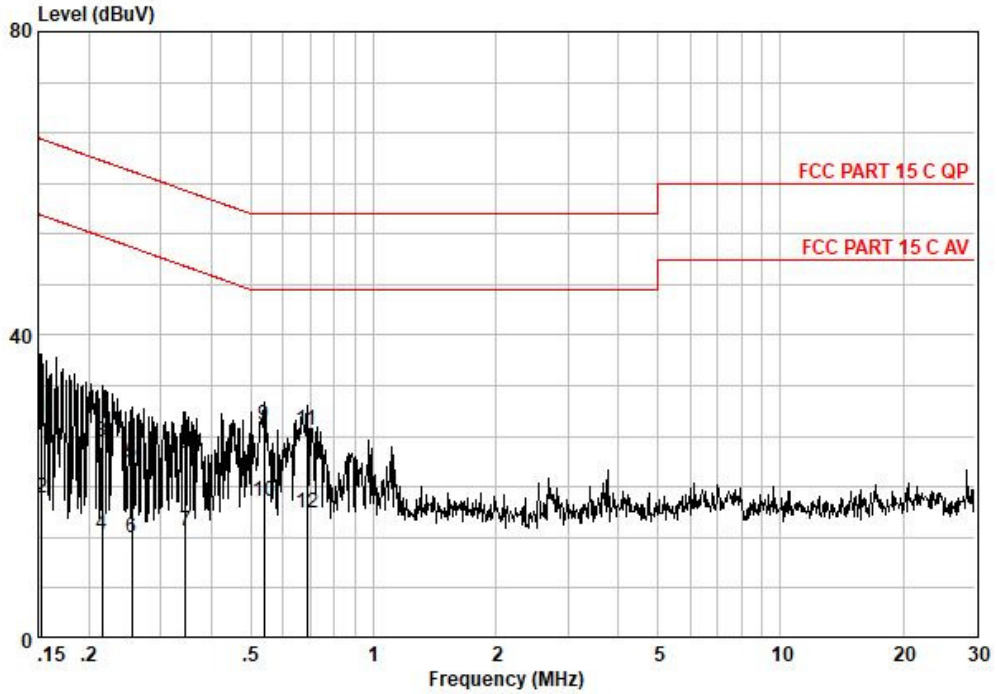

Pol :NEUTRAL
No :
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0.15	19.34	0.10	9.58	29.02	65.82	-36.80	QP
0.15	8.95	0.10	9.58	18.63	55.82	-37.19	AVERAGE
0.22	16.20	0.10	9.60	25.90	63.01	-37.11	QP
0.22	3.96	0.10	9.60	13.66	53.01	-39.35	AVERAGE
0.25	13.47	0.10	9.59	23.16	61.60	-38.44	QP
0.25	3.51	0.10	9.59	13.20	51.60	-38.40	AVERAGE
0.34	4.58	0.10	9.59	14.27	49.09	-34.82	AVERAGE
0.34	14.63	0.10	9.59	24.32	59.09	-34.77	QP
0.54	18.43	0.10	9.60	28.13	56.00	-27.87	QP
0.54	8.43	0.10	9.60	18.13	46.00	-27.87	AVERAGE
0.69	17.75	0.10	9.60	27.45	56.00	-28.55	QP
0.69	6.86	0.10	9.60	16.56	46.00	-29.44	AVERAGE

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥500 kHz

7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 24.7 °C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.2.2 Test Setup Diagram

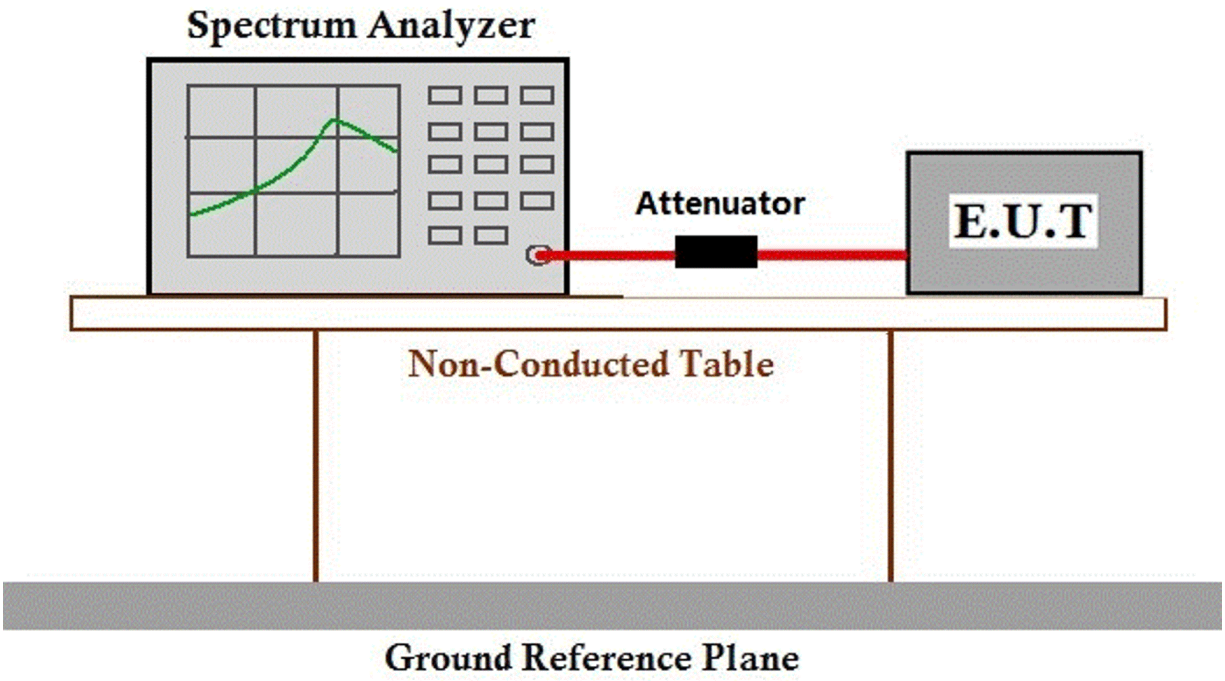

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1
Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥50 hopping channels
	0.25 for 25≤ hopping channels <50
	1 for digital modulation
2400-2483.5	1 for ≥75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.3.2 Test Setup Diagram

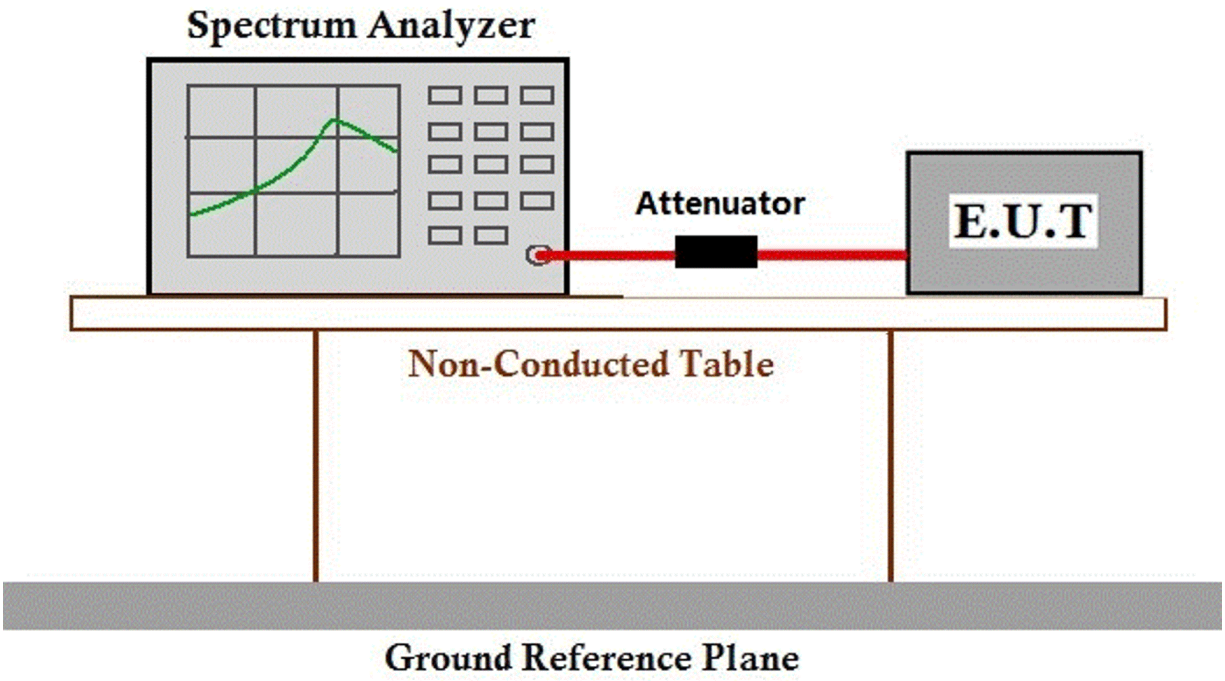

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit: ≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.4.2 Test Setup Diagram

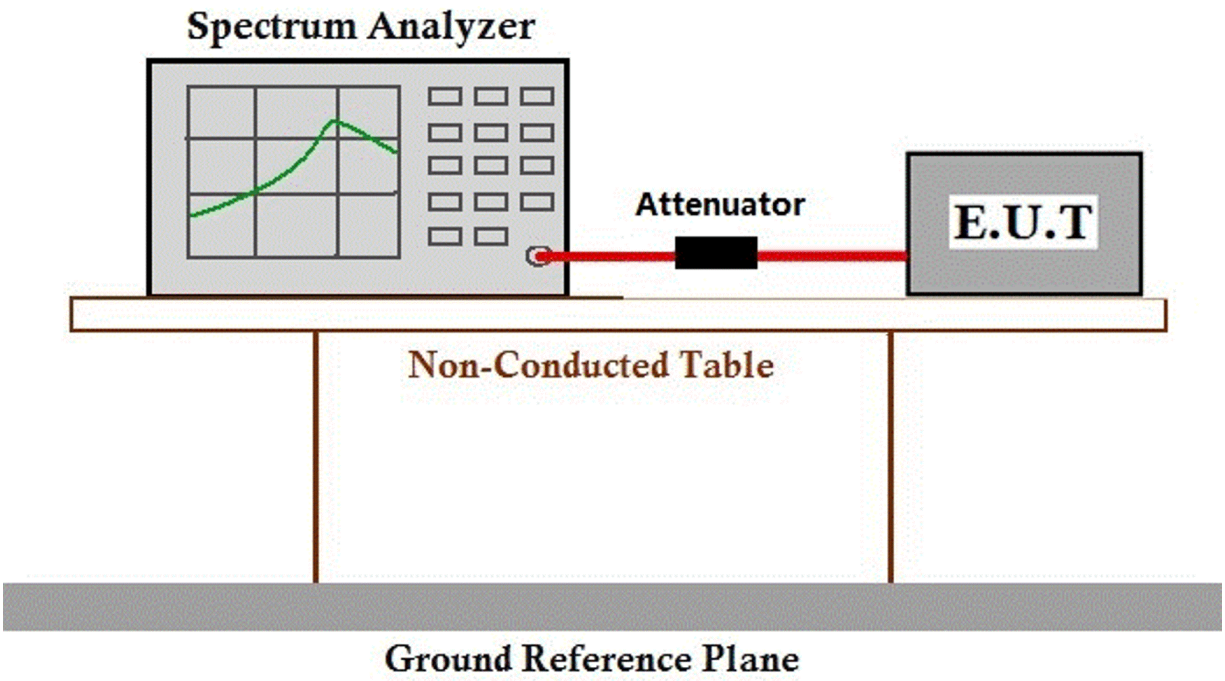

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.13.3.2
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.5.2 Test Setup Diagram

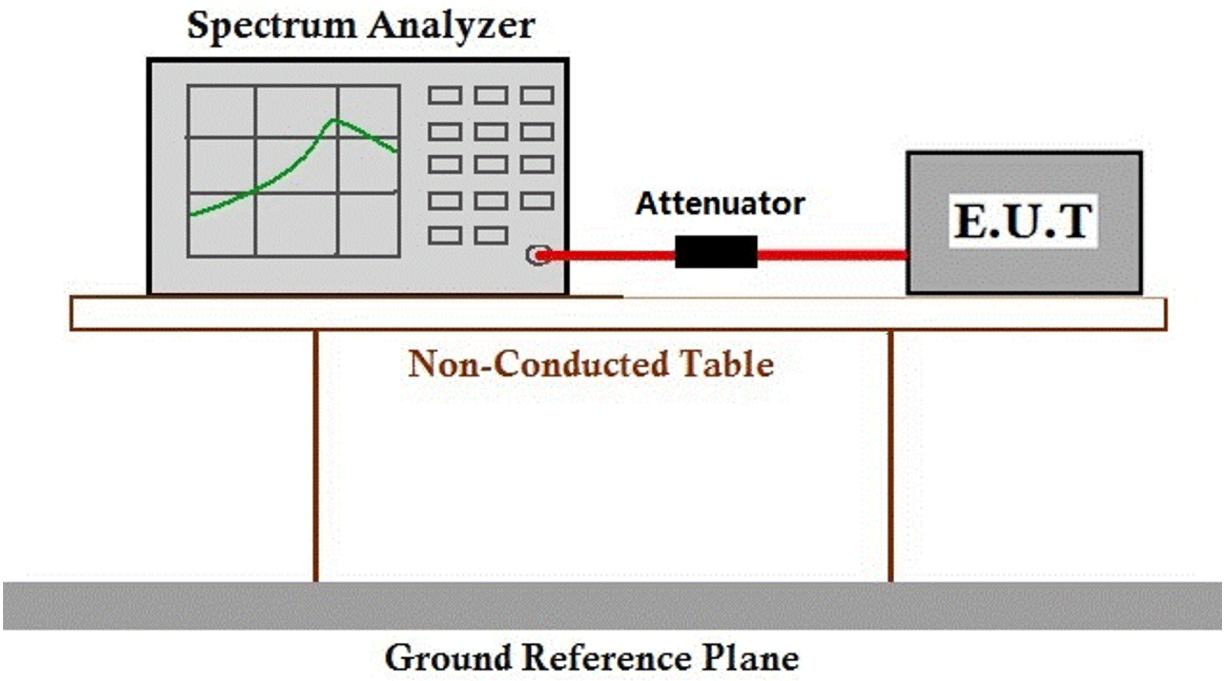

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.6 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.11
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.6.2 Test Setup Diagram

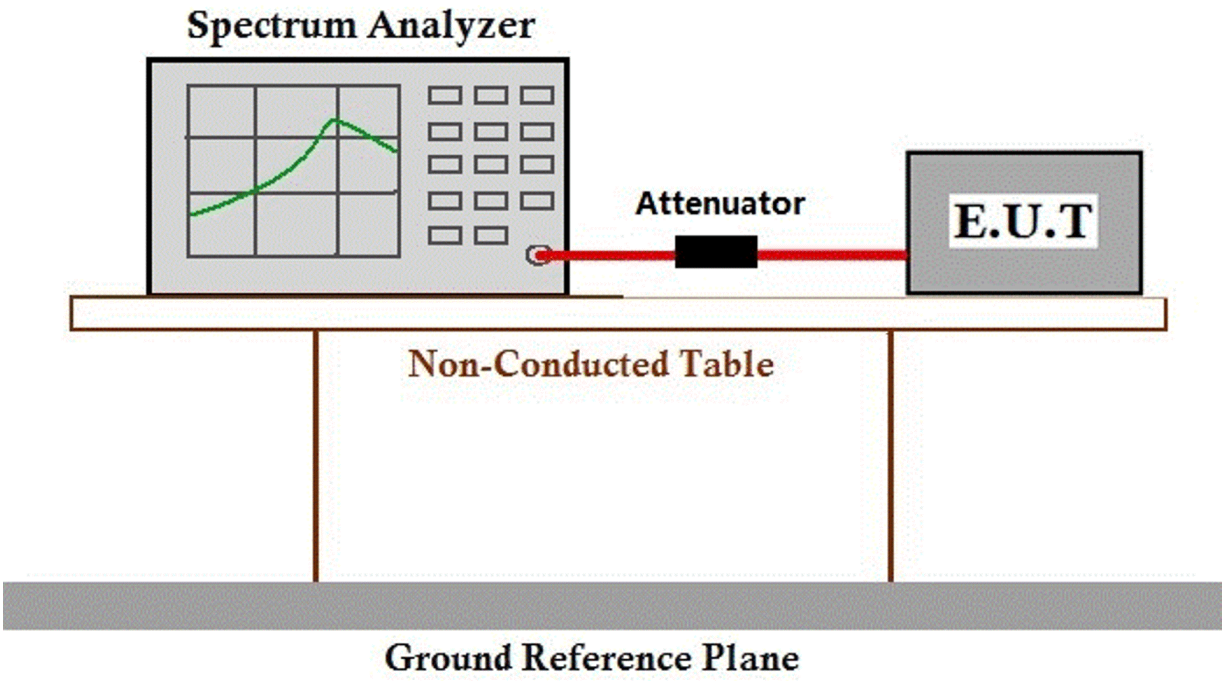

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)
Test Method: ANSI C63.10 (2013) Section 6.10.5
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

7.7.1 E.U.T. Operation

Operating Environment:
Temperature: 24.4 °C Humidity: 50.1 % RH Atmospheric Pressure: 1020 mbar
Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.7.2 Test Setup Diagram

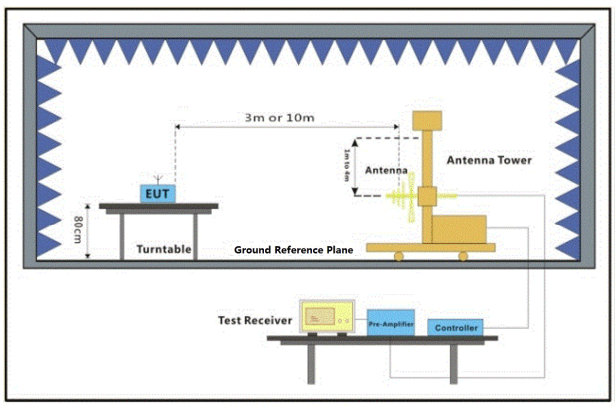

30MHz-1GHz

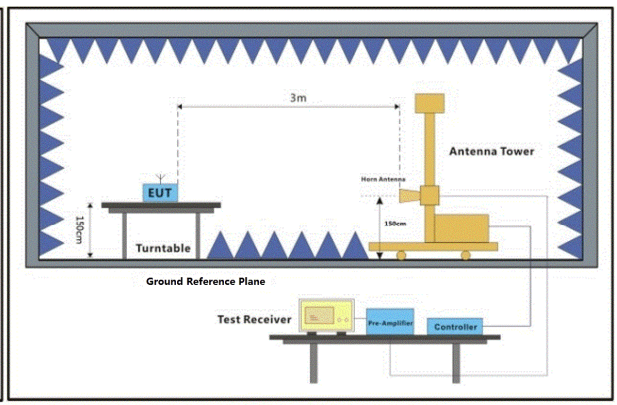

Above 1GHz

7.7.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Mode:a; Polarization:Horizontal; Modulation:O-QPSK; ; Channel:Low

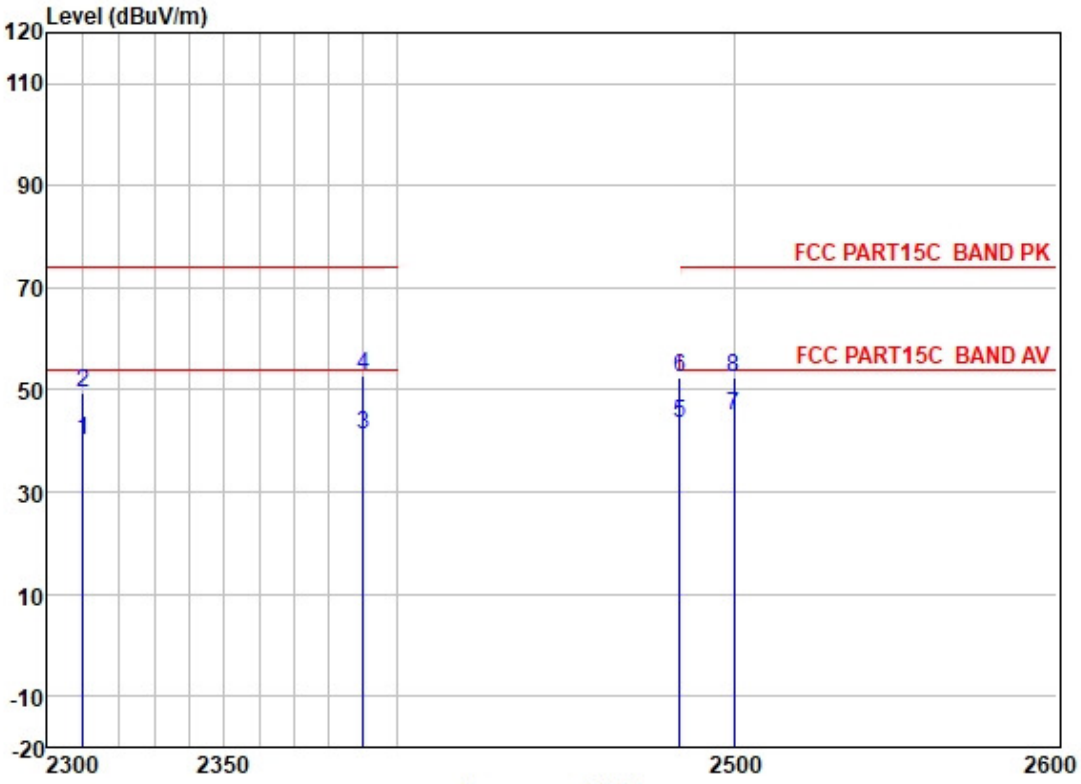

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	46.50	27.15	3.32	36.94	40.03	54.00	-13.97	HORIZONTAL	Average
2	2310.000	55.90	27.15	3.32	36.94	49.43	74.00	-24.57	HORIZONTAL	Peak
3	2390.000	47.44	27.33	3.48	36.92	41.33	54.00	-12.67	HORIZONTAL	Average
4	2390.000	58.86	27.33	3.48	36.92	52.75	74.00	-21.25	HORIZONTAL	Peak
5	2483.500	49.42	27.48	3.53	36.90	43.53	54.00	-10.47	HORIZONTAL	Average
6	2483.500	58.46	27.48	3.53	36.90	52.57	74.00	-21.43	HORIZONTAL	Peak
7	2500.000	50.87	27.50	3.40	36.89	44.88	54.00	-9.12	HORIZONTAL	Average
8	2500.000	58.29	27.50	3.40	36.89	52.30	74.00	-21.70	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:O-QPSK; ; Channel:Low

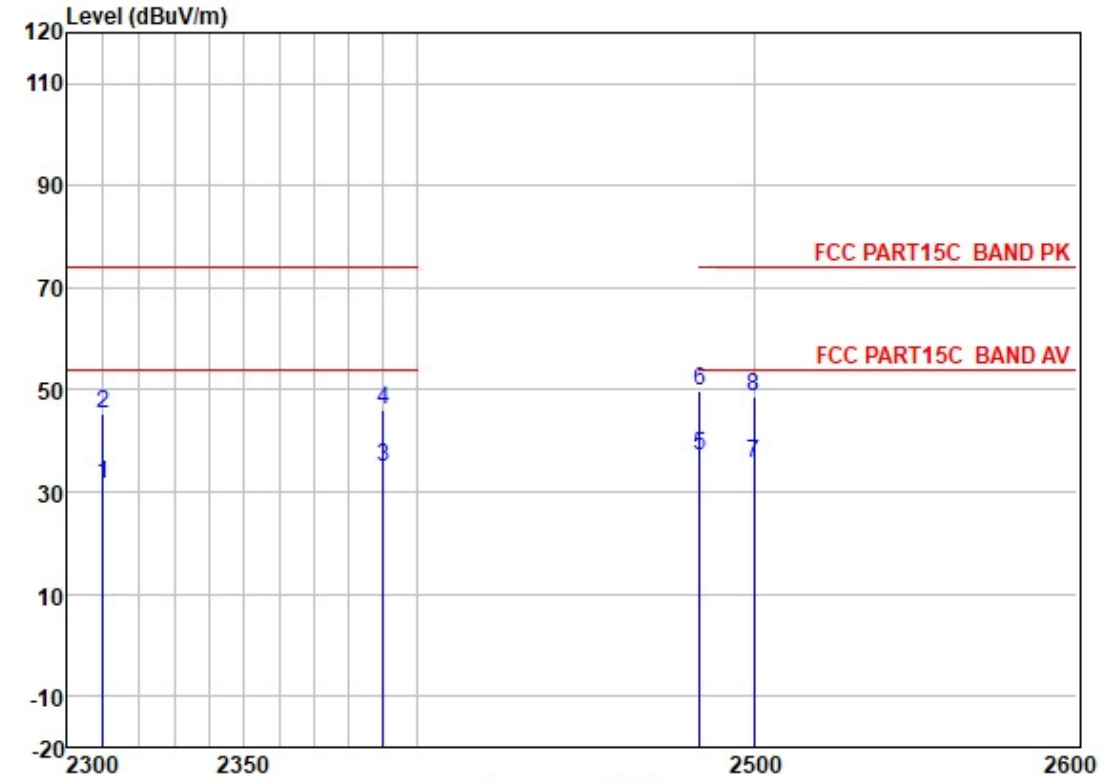

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	38.03	27.15	3.32	36.94	31.56	54.00	-22.44	VERTICAL	Average
2	2310.000	51.77	27.15	3.32	36.94	45.30	74.00	-28.70	VERTICAL	Peak
3	2390.000	40.93	27.33	3.48	36.92	34.82	54.00	-19.18	VERTICAL	Average
4	2390.000	52.12	27.33	3.48	36.92	46.01	74.00	-27.99	VERTICAL	Peak
5	2483.500	42.83	27.48	3.53	36.90	36.94	54.00	-17.06	VERTICAL	Average
6	2483.500	55.56	27.48	3.53	36.90	49.67	74.00	-24.33	VERTICAL	Peak
7	2500.000	41.75	27.50	3.40	36.89	35.76	54.00	-18.24	VERTICAL	Average
8	2500.000	54.81	27.50	3.40	36.89	48.82	74.00	-25.18	VERTICAL	Peak

Mode:a; Polarization:Horizontal; Modulation:O-QPSK; ; Channel:High

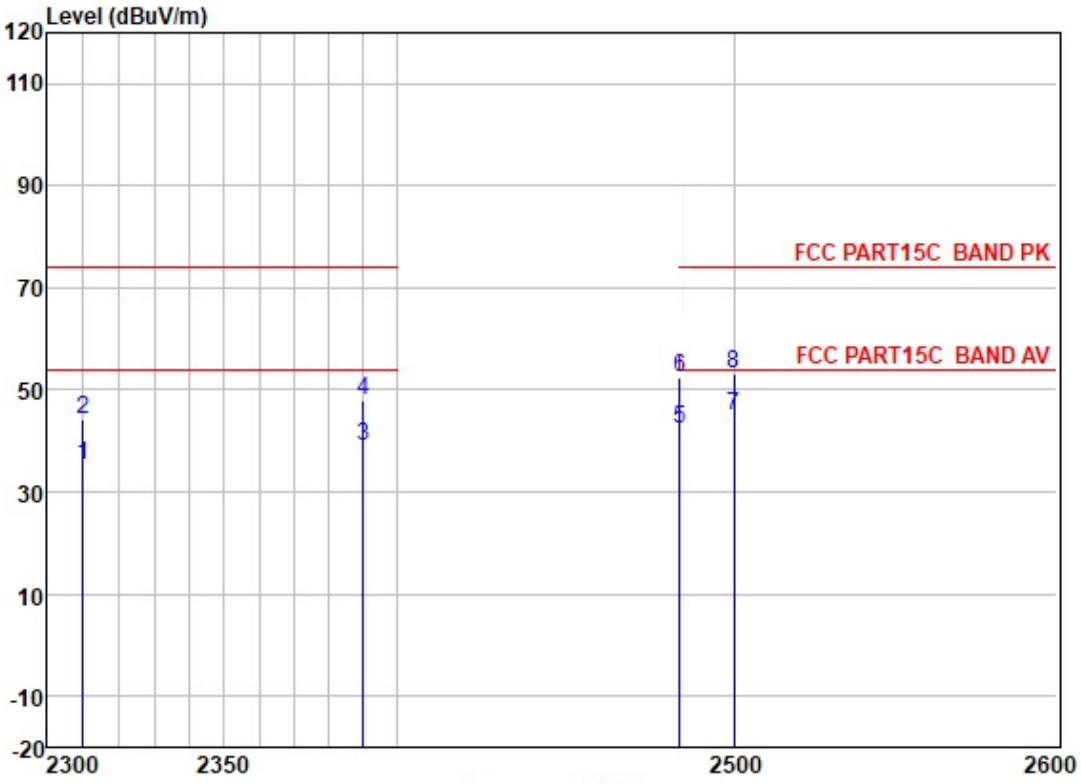

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	41.83	27.15	3.32	36.94	35.36	54.00	-18.64	HORIZONTAL	Average
2	2310.000	50.51	27.15	3.32	36.94	44.04	74.00	-29.96	HORIZONTAL	Peak
3	2390.000	45.28	27.33	3.48	36.92	39.17	54.00	-14.83	HORIZONTAL	Average
4	2390.000	54.22	27.33	3.48	36.92	48.11	74.00	-25.89	HORIZONTAL	Peak
5	2483.500	48.27	27.48	3.53	36.90	42.38	54.00	-11.62	HORIZONTAL	Average
6	2483.500	58.23	27.48	3.53	36.90	52.34	74.00	-21.66	HORIZONTAL	Peak
7	2500.000	50.86	27.50	3.40	36.89	44.87	54.00	-9.13	HORIZONTAL	Average
8	2500.000	59.33	27.50	3.40	36.89	53.34	74.00	-20.66	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:O-QPSK; ; Channel:High

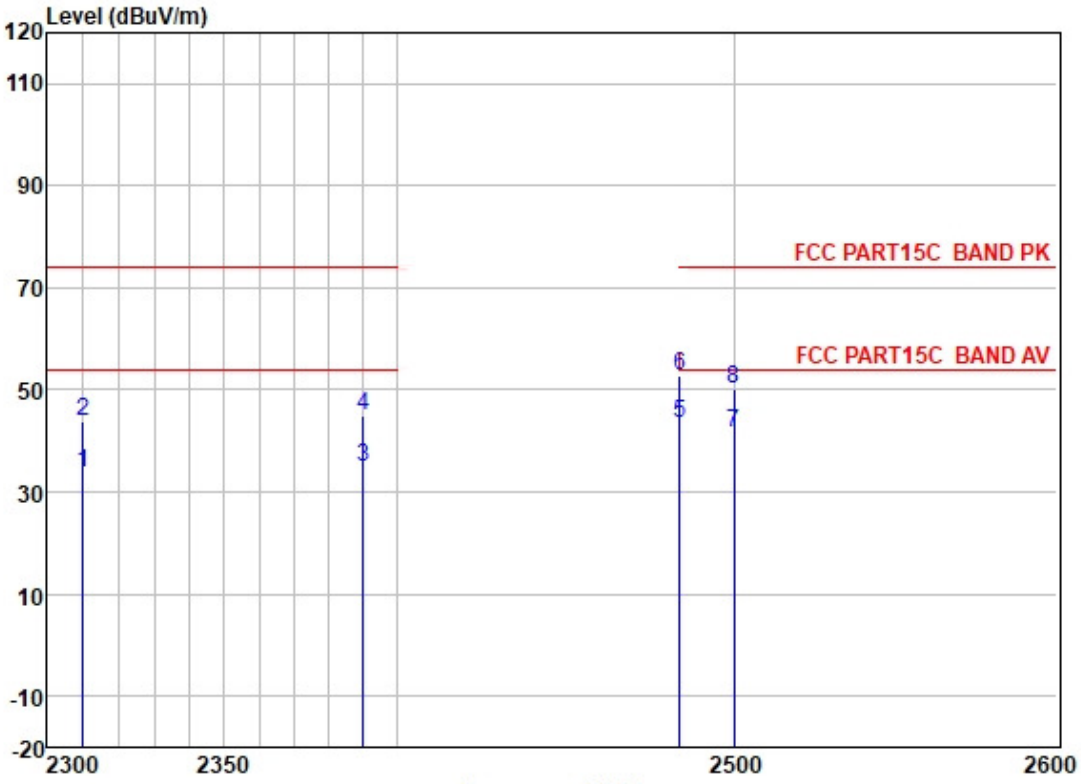

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	40.30	27.15	3.32	36.94	33.83	54.00	-20.17	VERTICAL	Average
2	2310.000	50.23	27.15	3.32	36.94	43.76	74.00	-30.24	VERTICAL	Peak
3	2390.000	40.89	27.33	3.48	36.92	34.78	54.00	-19.22	VERTICAL	Average
4	2390.000	51.11	27.33	3.48	36.92	45.00	74.00	-29.00	VERTICAL	Peak
5	2483.500	49.42	27.48	3.53	36.90	43.53	54.00	-10.47	VERTICAL	Average
6	2483.500	58.79	27.48	3.53	36.90	52.90	74.00	-21.10	VERTICAL	Peak
7	2500.000	47.63	27.50	3.40	36.89	41.64	54.00	-12.36	VERTICAL	Average
8	2500.000	56.20	27.50	3.40	36.89	50.21	74.00	-23.79	VERTICAL	Peak

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 50.1 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode_Keep the EUT in charging and continuously transmitting with O-QPSK modulation mode.

7.8.2 Test Setup Diagram

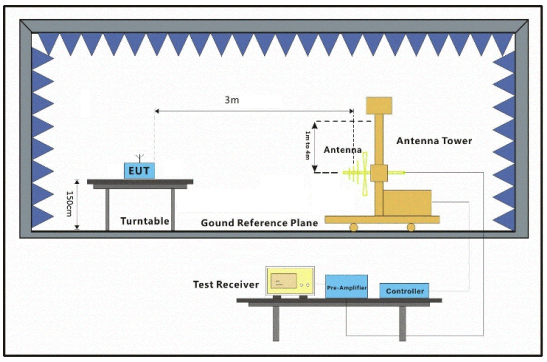

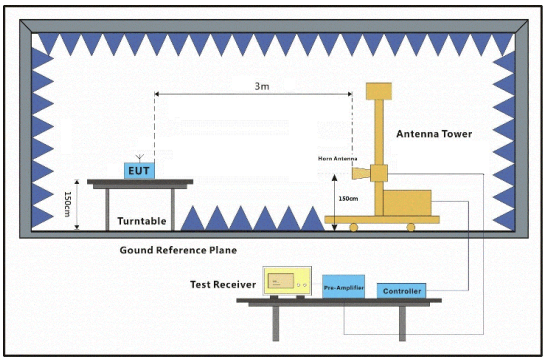

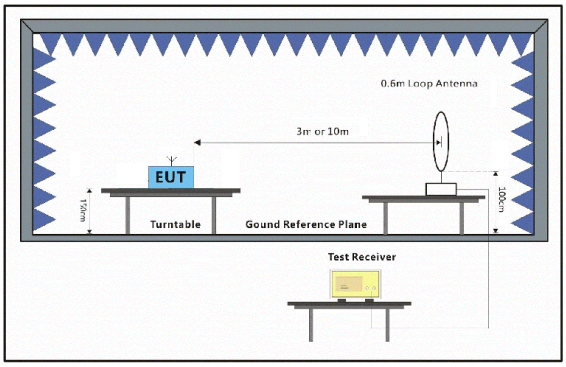

7.8.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark:

1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown

Mode:a; Polarization:Horizontal; Modulation:O-QPSK; ; Channel:Low

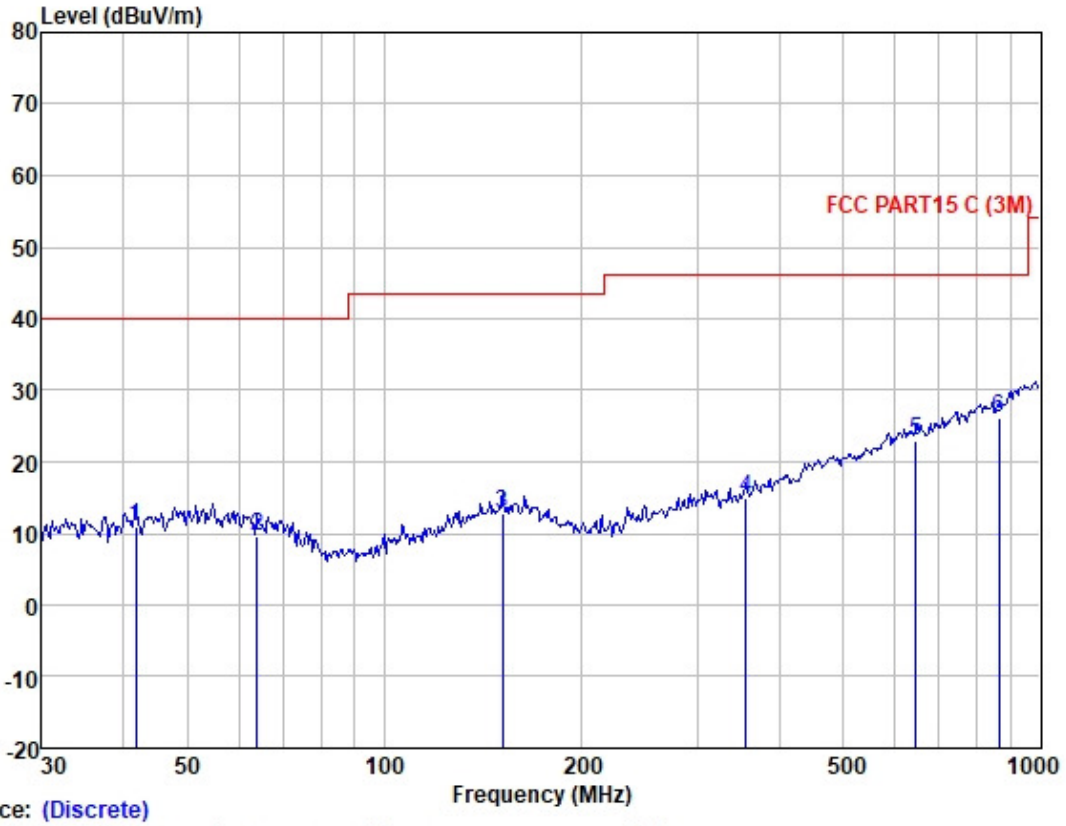

Trace: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	41.713	23.43	13.68	1.11	27.17	11.05	40.00	-28.95	HORIZONTAL	QP
2	63.983	22.50	12.90	1.30	27.15	9.55	40.00	-30.45	HORIZONTAL	QP
3	151.067	23.71	13.80	2.06	26.88	12.69	43.50	-30.81	HORIZONTAL	QP
4	355.427	24.97	14.60	3.24	27.76	15.05	46.00	-30.95	HORIZONTAL	QP
5	645.120	25.57	20.45	4.93	28.09	22.86	46.00	-23.14	HORIZONTAL	QP
6	863.056	25.44	22.97	5.87	28.04	26.24	46.00	-19.76	HORIZONTAL	QP

Mode:a; Polarization:Horizontal; Modulation:O-QPSK; ; Channel:Low

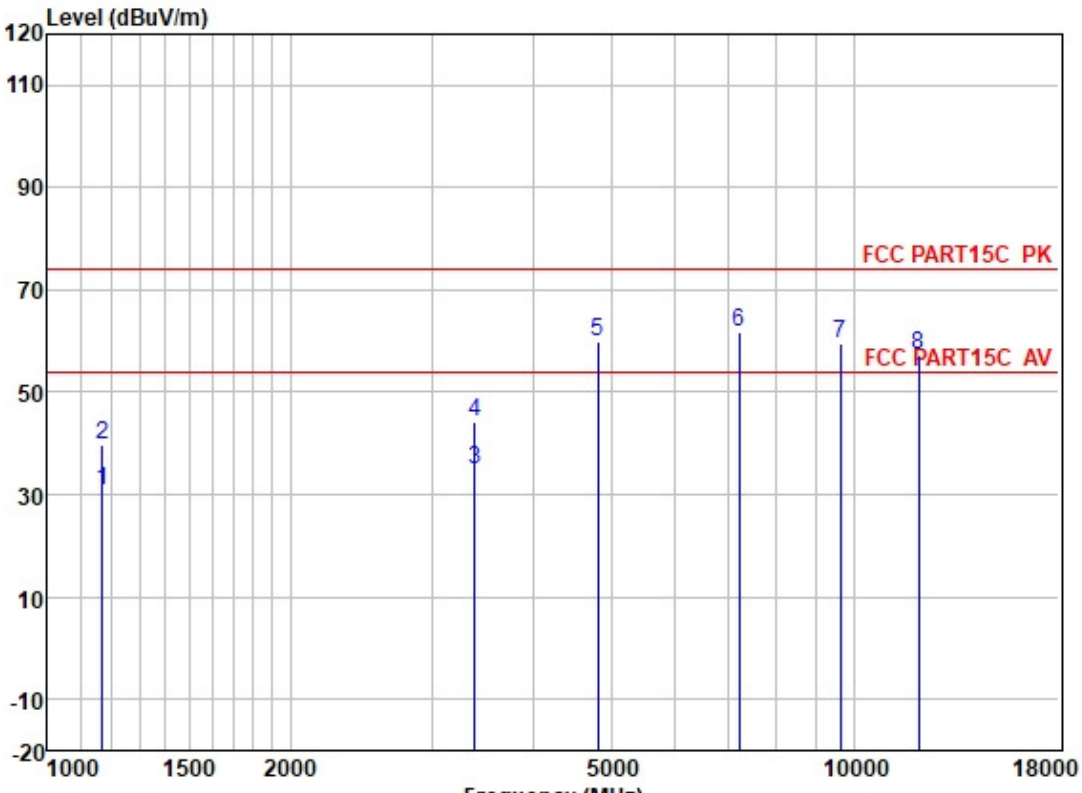

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1168.920	41.31	24.55	2.39	37.36	30.89	54.00	-23.11	HORIZONTAL	Average
2	1168.920	50.20	24.55	2.39	37.36	39.78	74.00	-34.22	HORIZONTAL	Peak
3	3386.297	38.28	28.83	4.10	36.47	34.74	54.00	-19.26	HORIZONTAL	Average
4	3386.297	47.63	28.83	4.10	36.47	44.09	74.00	-29.91	HORIZONTAL	Peak
5	4810.016	59.45	31.42	5.40	36.48	59.79	74.00	-14.21	HORIZONTAL	Peak
6	7215.309	56.78	35.62	6.01	36.75	61.66	74.00	-12.34	HORIZONTAL	Peak
7	9620.430	50.27	38.37	7.07	36.35	59.36	74.00	-14.64	HORIZONTAL	Peak
8	12025.520	46.67	38.90	8.19	36.40	57.36	74.00	-16.64	HORIZONTAL	Peak

	Freq	Duty cycle correction factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol/Phase	Remark
5	4810.016	-38.27	21.52	54	-32.48	Horizontal	Average
6	7215.309	-38.27	23.39	54	-30.61	Horizontal	Average
7	9620.430	-38.27	21.09	54	-32.91	Horizontal	Average
8	12025.520	-38.27	19.09	54	-34.91	Horizontal	Average
Remark: Duty cycle correction factor = 20log (duty cycle), the detailed duty cycle test data see: Appendix 15.247							

Mode:a; Polarization:Vertical; Modulation:O-QPSK; ; Channel:Low

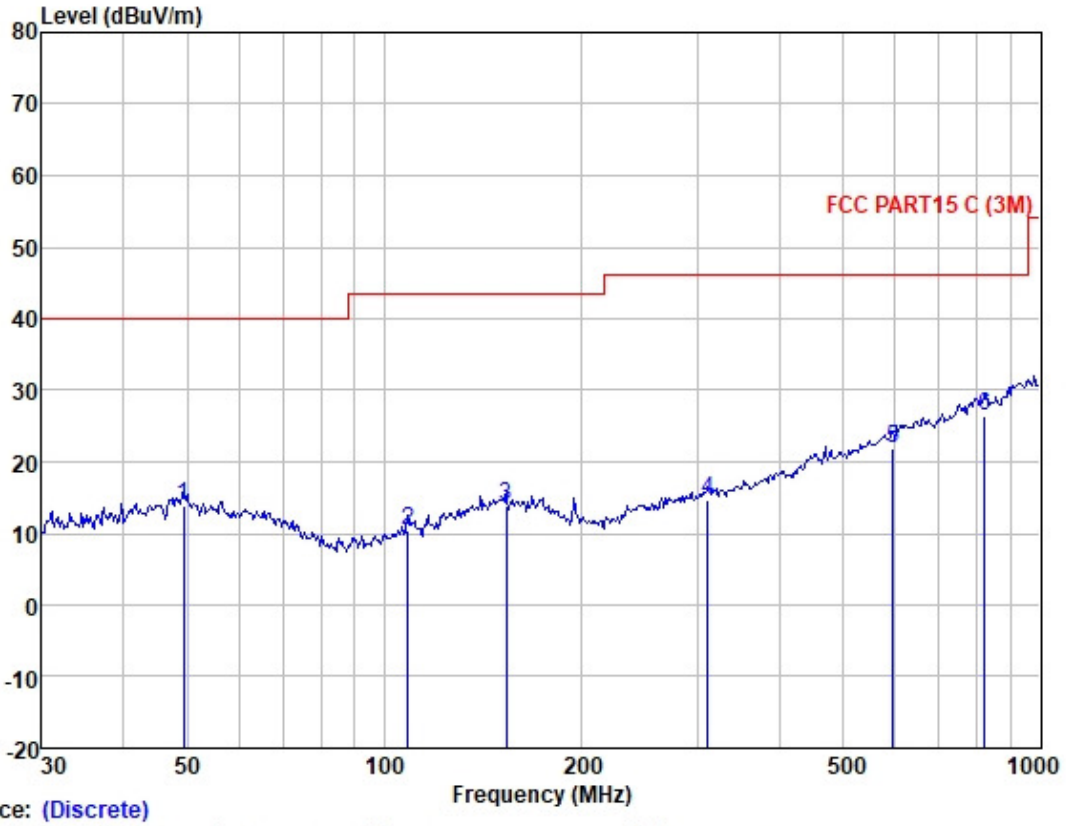

Trace: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	49.359	25.94	13.93	1.19	27.17	13.89	40.00	-26.11	VERTICAL	QP
2	108.647	25.56	10.33	1.70	27.08	10.51	43.50	-32.99	VERTICAL	QP
3	153.200	24.79	13.80	2.09	26.87	13.81	43.50	-29.69	VERTICAL	QP
4	311.087	24.95	13.95	2.99	27.34	14.55	46.00	-31.45	VERTICAL	QP
5	595.133	25.54	19.70	4.78	28.07	21.95	46.00	-24.05	VERTICAL	QP
6	821.710	25.90	22.78	5.80	28.10	26.38	46.00	-19.62	VERTICAL	QP

Mode:a; Polarization:Vertical; Modulation:O-QPSK; ; Channel:Low

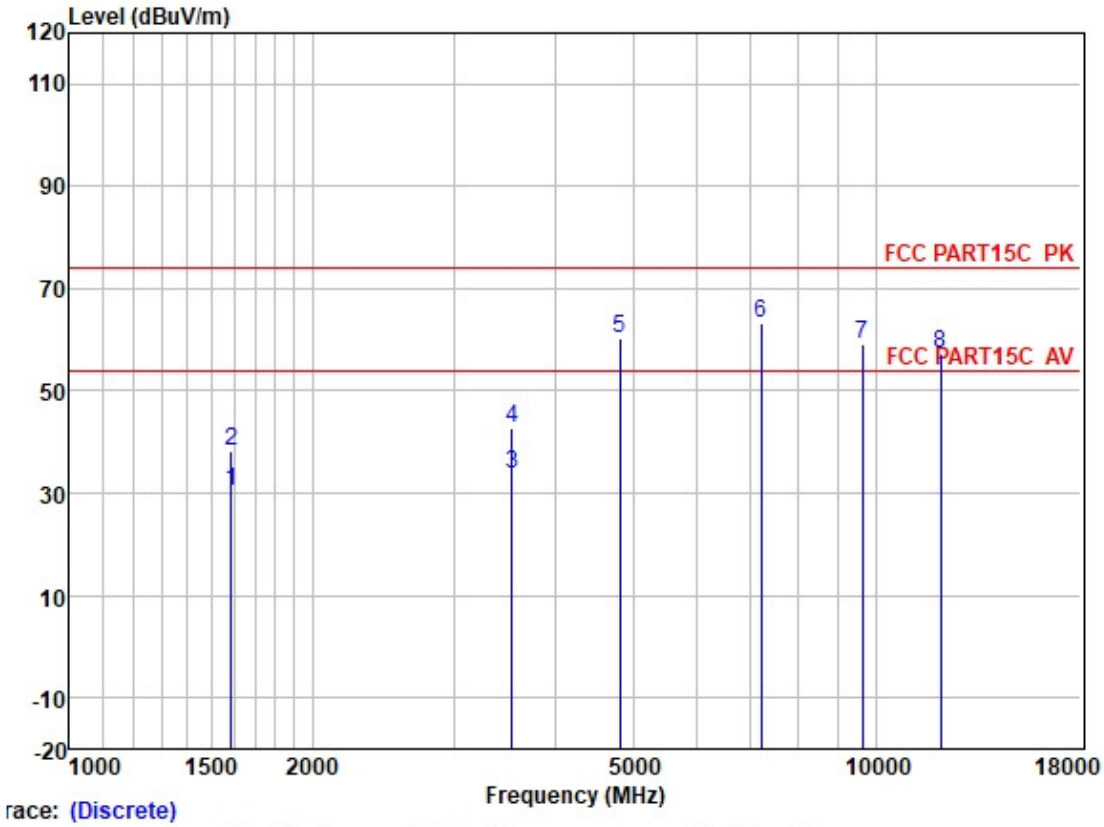

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1587.975	39.29	25.57	2.80	37.08	30.58	54.00	-23.42	VERTICAL	Average
2	1587.975	47.08	25.57	2.80	37.08	38.37	74.00	-35.63	VERTICAL	Peak
3	3536.341	36.75	28.95	4.40	36.45	33.65	54.00	-20.35	VERTICAL	Average
4	3536.341	45.94	28.95	4.40	36.45	42.84	74.00	-31.16	VERTICAL	Peak
5	4810.016	60.11	31.42	5.40	36.48	60.45	74.00	-13.55	VERTICAL	Peak
6	7215.309	58.35	35.62	6.01	36.75	63.23	74.00	-10.77	VERTICAL	Peak
7	9620.430	49.89	38.37	7.07	36.35	58.98	74.00	-15.02	VERTICAL	Peak
8	12025.760	46.65	38.90	8.19	36.40	57.34	74.00	-16.66	VERTICAL	Peak

	Freq	Duty cycle correction factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol/Phase	Remark
5	4810.016	-38.27	22.18	54	-31.82	Vertical	Average
6	7215.309	-38.27	24.96	54	-29.04	Vertical	Average
7	9620.430	-38.27	20.71	54	-33.29	Vertical	Average
8	12025.760	-38.27	19.07	54	-34.93	Vertical	Average
Remark: Duty cycle correction factor = 20log (duty cycle), the detailed duty cycle test data see: Appendix 15.247							

Mode:a; Polarization:Horizontal; Modulation:O-QPSK; ; Channel:middle

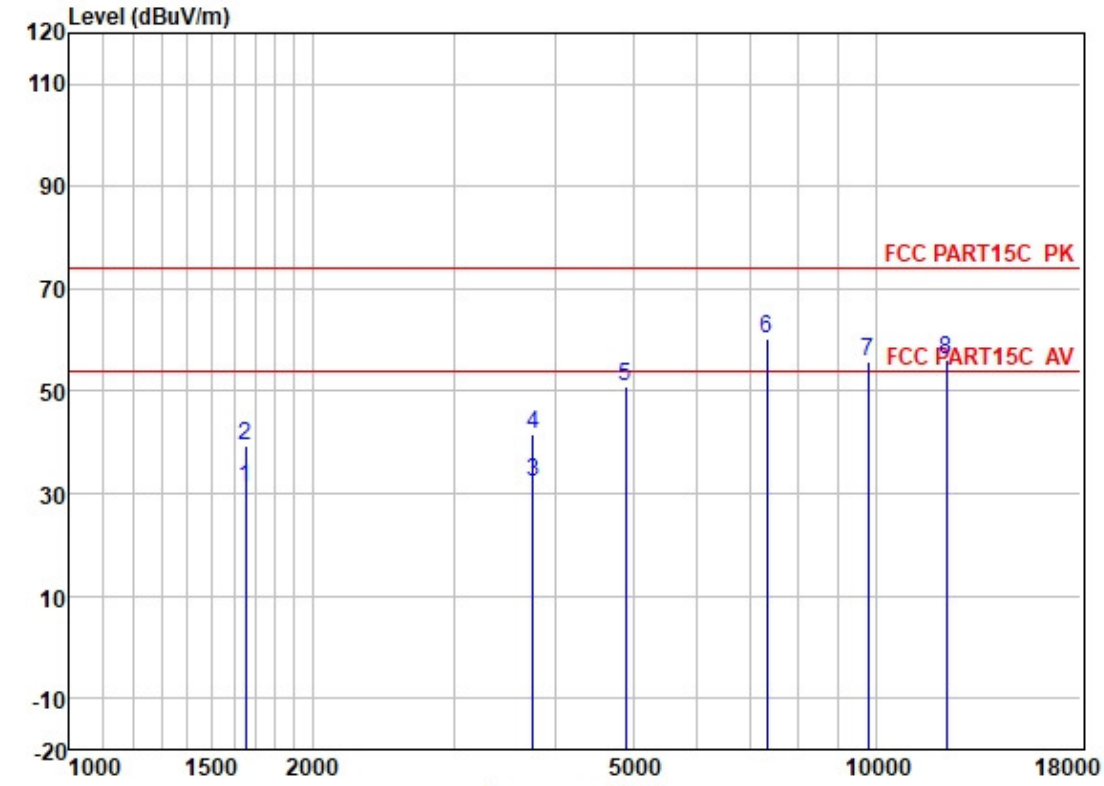

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1653.550	39.62	25.64	2.80	37.06	31.00	54.00	-23.00	HORIZONTAL	Average
2	1653.550	47.87	25.64	2.80	37.06	39.25	74.00	-34.75	HORIZONTAL	Peak
3	3757.637	34.53	29.42	4.58	36.42	32.11	54.00	-21.89	HORIZONTAL	Average
4	3757.637	44.05	29.42	4.58	36.42	41.63	74.00	-32.37	HORIZONTAL	Peak
5	4890.151	50.35	31.56	5.52	36.50	50.93	74.00	-23.07	HORIZONTAL	Peak
6	7335.267	54.90	36.00	6.13	36.76	60.27	74.00	-13.73	HORIZONTAL	Peak
7	9780.603	46.45	38.53	7.01	36.33	55.66	74.00	-18.34	HORIZONTAL	Peak
8	12225.750	45.51	38.74	8.08	36.30	56.03	74.00	-17.97	HORIZONTAL	Peak

	Freq	Duty cycle correction factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol/Phase	Remark
5	4890.151	-38.27	12.66	54	-41.34	Horizaontal	Average
6	7335.267	-38.27	22	54	-32	Horizaontal	Average
7	9780.603	-38.27	17.39	54	-36.61	Horizaontal	Average
8	12225.750	-38.27	17.76	54	-36.24	Horizaontal	Average
Remark: Duty cycle correction factor = 20log (duty cycle), the detailed duty cycle test data see: Appendix 15.247							

Mode:a; Polarization:Vertical; Modulation:O-QPSK; ; Channel:middle

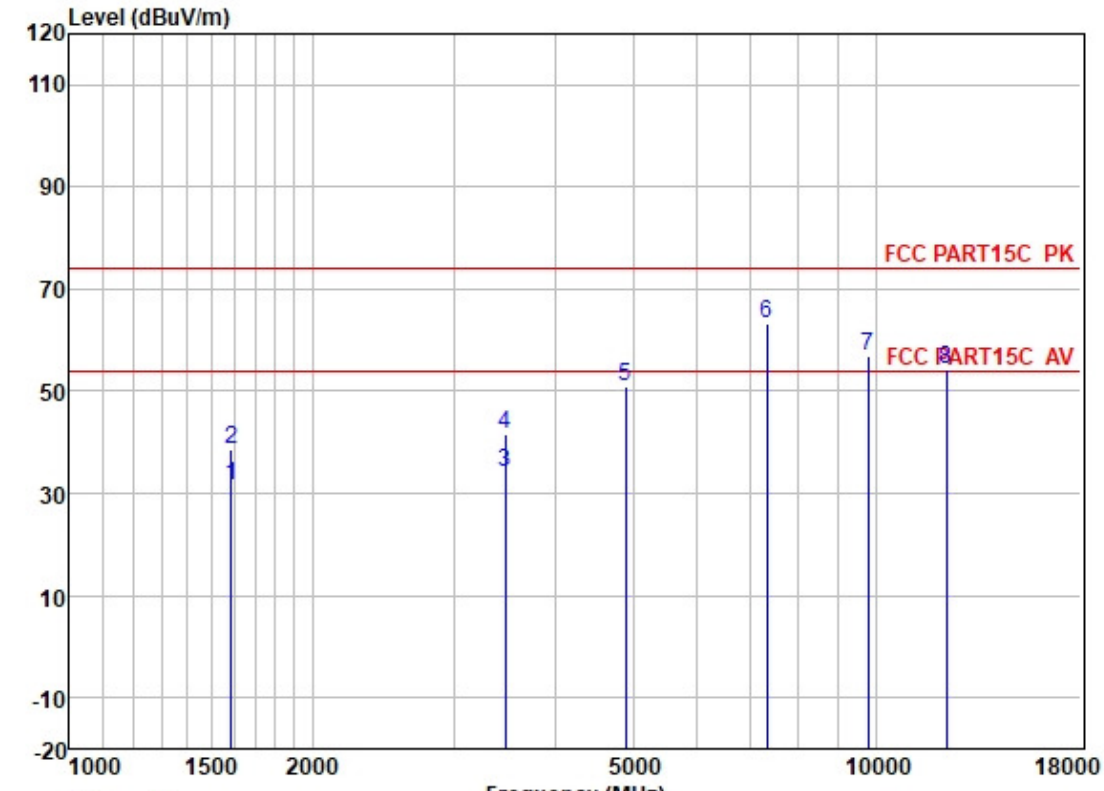

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1587.975	40.37	25.57	2.80	37.08	31.66	54.00	-22.34	VERTICAL	Average
2	1587.975	47.23	25.57	2.80	37.08	38.52	74.00	-35.48	VERTICAL	Peak
3	3475.541	37.30	28.89	4.25	36.46	33.98	54.00	-20.02	VERTICAL	Average
4	3475.541	44.98	28.89	4.25	36.46	41.66	74.00	-32.34	VERTICAL	Peak
5	4890.151	50.41	31.56	5.52	36.50	50.99	74.00	-23.01	VERTICAL	Peak
6	7335.267	57.99	36.00	6.13	36.76	63.36	74.00	-10.64	VERTICAL	Peak
7	9780.603	47.66	38.53	7.01	36.33	56.87	74.00	-17.13	VERTICAL	Peak
8	12225.740	43.84	38.74	8.08	36.30	54.36	74.00	-19.64	VERTICAL	Peak

	Freq	Duty cycle correction factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol/Phase	Remark
5	4890.151	-38.27	12.72	54	-41.28	Vertical	Average
6	7335.267	-38.27	25.09	54	-28.91	Vertical	Average
7	9780.603	-38.27	18.6	54	-35.4	Vertical	Average
8	12225.740	-38.27	16.09	54	-37.91	Vertical	Average
Remark: Duty cycle correction factor = 20log (duty cycle), the detailed duty cycle test data see: Appendix 15.247							

Mode:a; Polarization:Horizontal; Modulation:O-QPSK; ; Channel:High

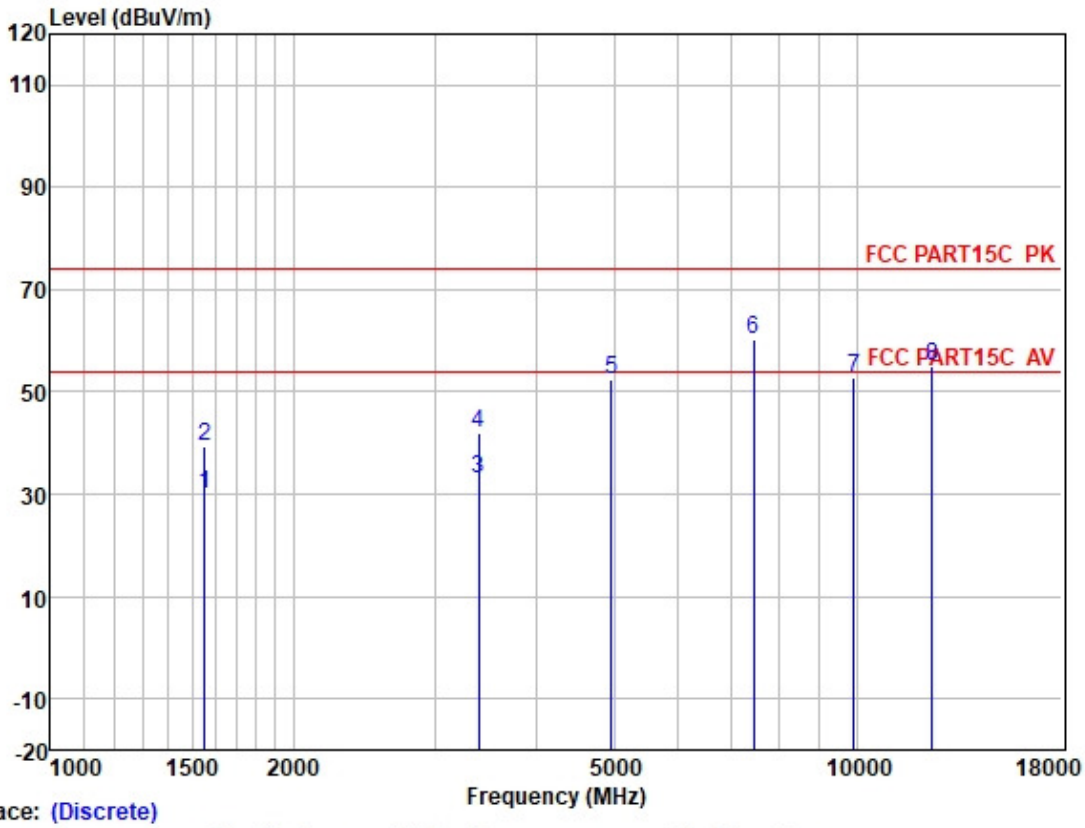

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1551.677	38.91	25.54	2.80	37.09	30.16	54.00	-23.84	HORIZONTAL	Average
2	1551.677	47.96	25.54	2.80	37.09	39.21	74.00	-34.79	HORIZONTAL	Peak
3	3396.098	36.71	28.84	4.10	36.47	33.18	54.00	-20.82	HORIZONTAL	Average
4	3396.098	45.37	28.84	4.10	36.47	41.84	74.00	-32.16	HORIZONTAL	Peak
5	4960.993	51.74	31.65	5.65	36.52	52.52	74.00	-21.48	HORIZONTAL	Peak
6	7440.914	54.40	36.27	6.22	36.77	60.12	74.00	-13.88	HORIZONTAL	Peak
7	9920.151	43.50	38.65	6.96	36.31	52.80	74.00	-21.20	HORIZONTAL	Peak
8	12400.620	44.65	38.57	7.97	36.17	55.02	74.00	-18.98	HORIZONTAL	Peak

	Freq	Duty cycle correction factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol/Phase	Remark
5	4960.993	-38.27	14.25	54	-39.75	Horizontal	Average
6	7440.914	-38.27	21.85	54	-32.15	Horizontal	Average
7	9920.151	-38.27	14.53	54	-39.47	Horizontal	Average
8	12400.620	-38.27	16.75	54	-37.25	Horizontal	Average
Remark: Duty cycle correction factor = 20log (duty cycle), the detailed duty cycle test data see: Appendix 15.247							

Mode:a; Polarization:Vertical; Modulation:O-QPSK; ; Channel:High

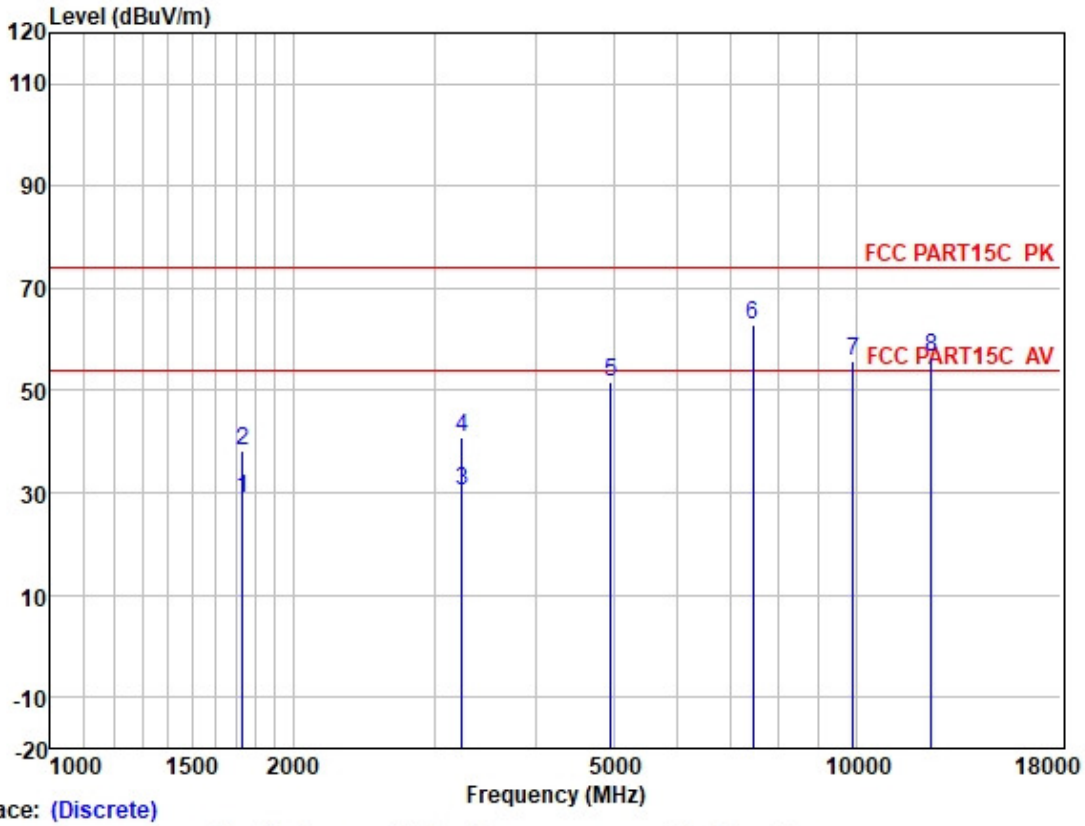

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1731.816	37.28	25.80	2.85	37.04	28.89	54.00	-25.11	VERTICAL	Average
2	1731.816	46.66	25.80	2.85	37.04	38.27	74.00	-35.73	VERTICAL	Peak
3	3242.619	34.27	28.67	4.02	36.50	30.46	54.00	-23.54	VERTICAL	Average
4	3242.619	44.81	28.67	4.02	36.50	41.00	74.00	-33.00	VERTICAL	Peak
5	4960.993	51.02	31.65	5.65	36.52	51.80	74.00	-22.20	VERTICAL	Peak
6	7440.914	57.06	36.27	6.22	36.77	62.78	74.00	-11.22	VERTICAL	Peak
7	9920.991	46.43	38.65	6.96	36.31	55.73	74.00	-18.27	VERTICAL	Peak
8	12400.380	46.22	38.57	7.97	36.17	56.59	74.00	-17.41	VERTICAL	Peak

	Freq	Duty cycle correction factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol/Phase	Remark
5	4960.993	-38.27	13.53	54	-40.47	Vertical	Average
6	7440.914	-38.27	24.51	54	-29.49	Vertical	Average
7	9920.991	-38.27	17.46	54	-36.54	Vertical	Average
8	12400.380	-38.27	18.32	54	-35.68	Vertical	Average
Remark: Duty cycle correction factor = 20log (duty cycle), the detailed duty cycle test data see: Appendix 15.247							

8 Appendix

8.1 Appendix 15.247

1.6dB Bandwidth

Test Mode	Test Channel	Ant	OBW[MHz]	EBW[MHz]	Limit	Verdict
ZIGBEE	2405	Ant1	3.1518	1.603	0.5	PASS
ZIGBEE	2445	Ant1	2.9113	1.603	0.5	PASS
ZIGBEE	2480	Ant1	2.7491	1.593	0.5	PASS

TEST PLOT
6dB Bandwidth_ZIGBEE_2405_Ant1

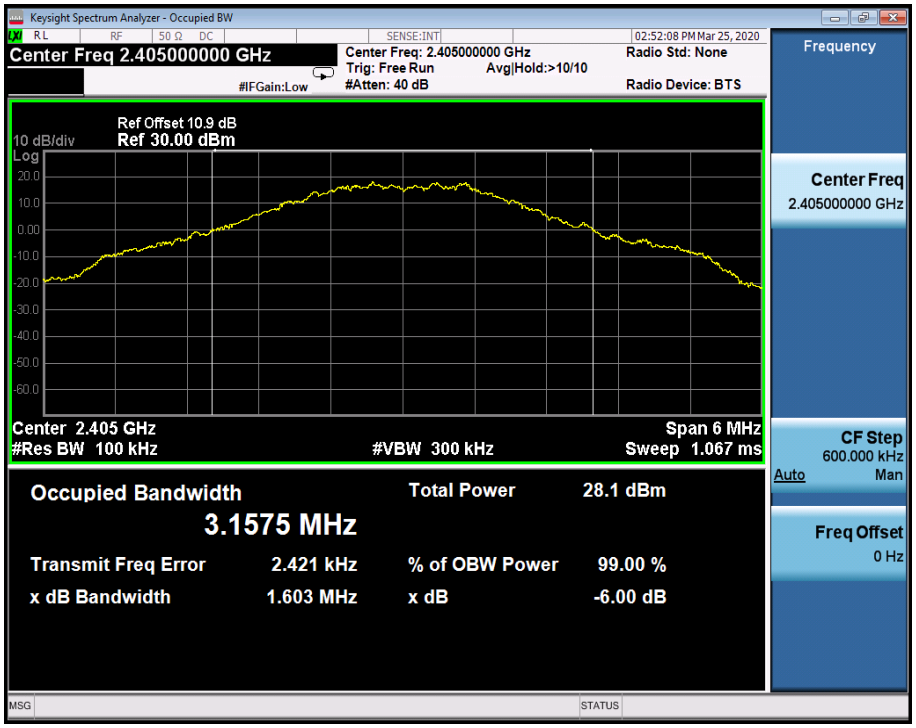

6dB Bandwidth_ZIGBEE_2445_Ant1

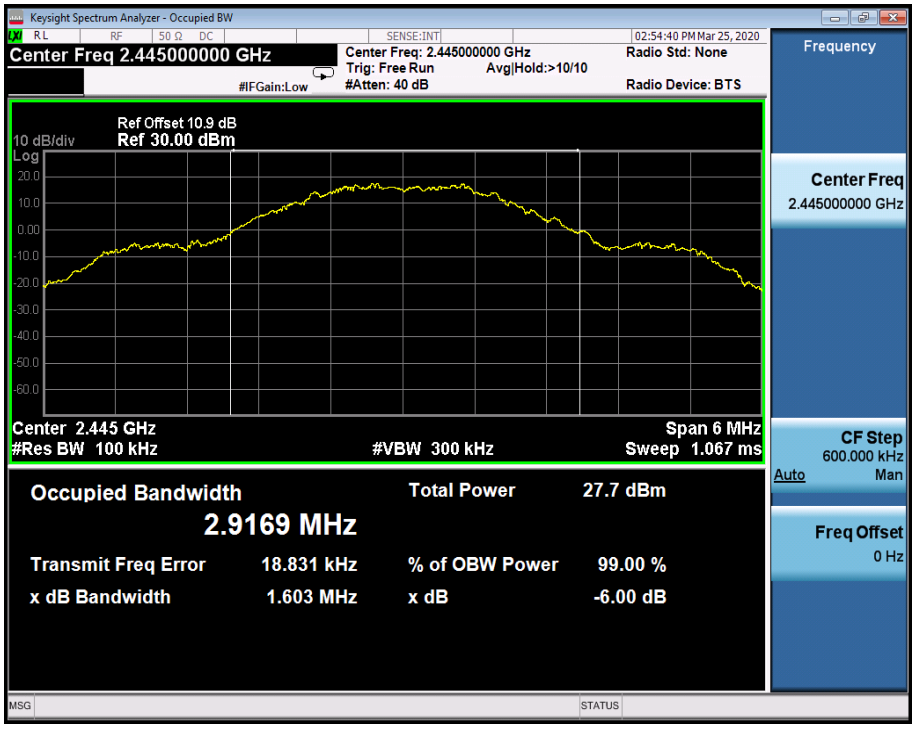

6dB Bandwidth_ZIGBEE_2480_Ant1

2.Maximum peak conducted output power

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
ZIGBEE	2405	Ant1	20.609	30	PASS
ZIGBEE	2445	Ant1	19.993	30	PASS
ZIGBEE	2480	Ant1	19.209	30	PASS

TEST PLOT

Maximum peak conducted output power_ZIGBEE_2405_Ant1

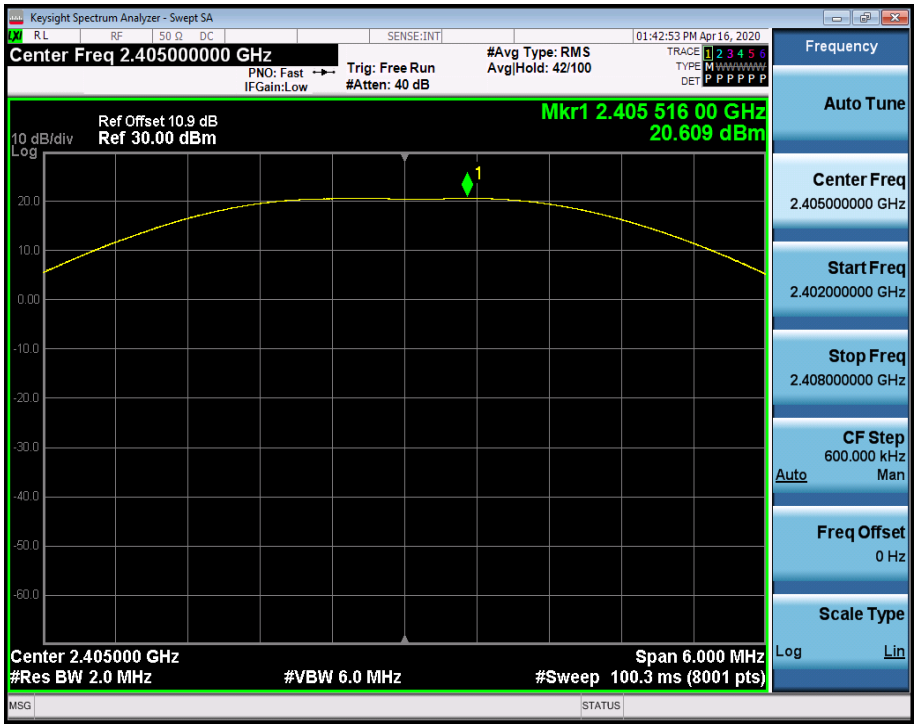

Maximum peak conducted output power_ZIGBEE_2445_Ant1

Maximum peak conducted output power_ZIGBEE_2480_Ant1

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory.
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

3.Maximum Peak power spectral density

Test Mode	Test Channel	Ant	Result	Limit[dBm/3kHz]	Verdict
ZIGBEE	2405	Ant1	4.55	8.00	PASS
ZIGBEE	2445	Ant1	4.45	8.00	PASS
ZIGBEE	2480	Ant1	4.039	8.00	PASS

TEST PLOT

Maximum Peak power spectral density_ZIGBEE_2405_Ant1

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Maximum Peak power spectral density_ZIGBEE_2445_Ant1

Maximum Peak power spectral density_ZIGBEE_2480_Ant1

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch, Testing Center
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

4.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
ZIGBEE	2405	Ant1	17.060	-38.354	-2.94	PASS
ZIGBEE	2480	Ant1	16.649	-29.012	-3.35	PASS

TEST PLOT

Band-edge for RF Conducted Emissions_ZIGBEE_2405_Ant1

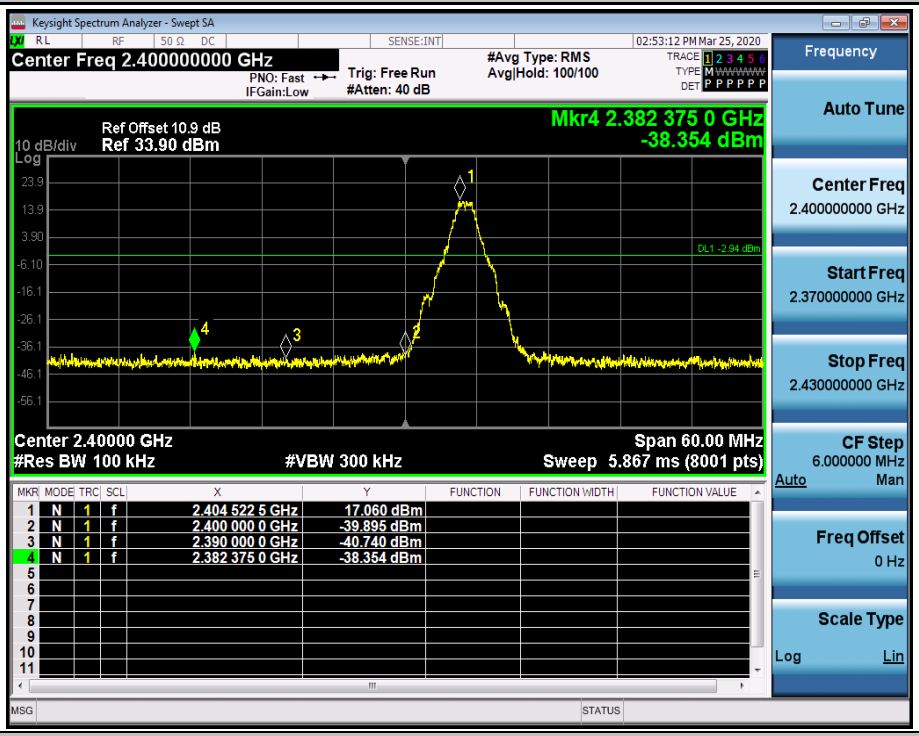

Band-edge for RF Conducted Emissions_ZIGBEE_2480_Ant1

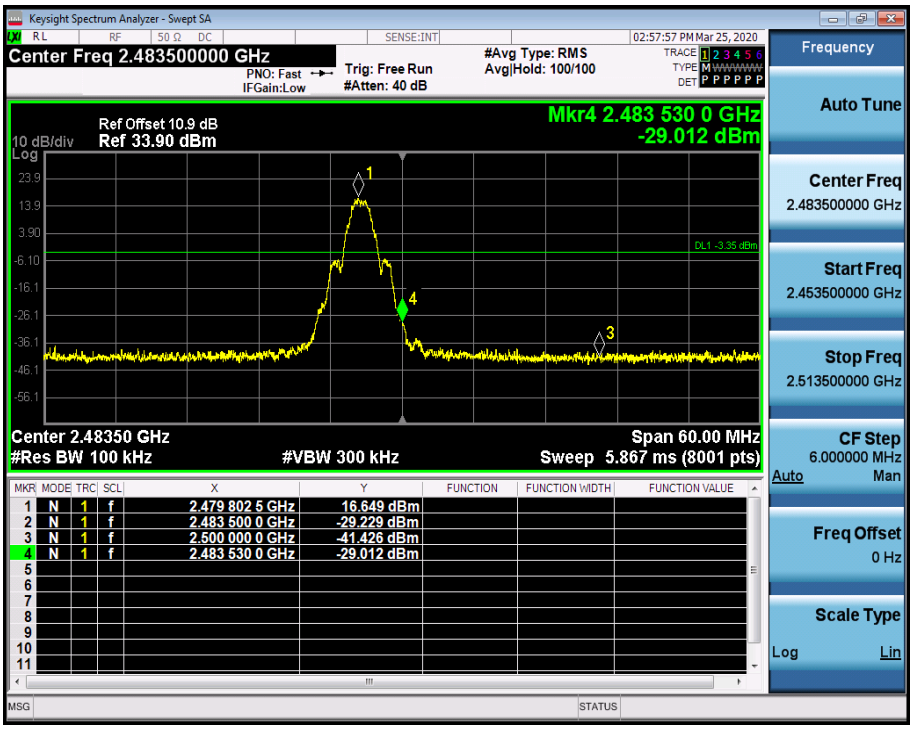

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

5.RF Conducted Spurious Emissions

Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
ZIGBEE	2405	Ant1	30	10000	100	300	18.005	-44.933	<-1.995	PASS
ZIGBEE	2405	Ant1	10000	26000	100	300	18.005	-41.911	<-1.995	PASS
ZIGBEE	2445	Ant1	30	10000	100	300	17.153	-44.166	<-2.847	PASS
ZIGBEE	2445	Ant1	10000	26000	100	300	17.153	-40.619	<-2.847	PASS
ZIGBEE	2480	Ant1	30	10000	100	300	17.298	-44.785	<-2.702	PASS
ZIGBEE	2480	Ant1	10000	26000	100	300	17.298	-42.378	<-2.702	PASS

TEST PLOT

RF Conducted Spurious Emissions_ZIGBEE_2405_Ant1

Pref

CSE_1	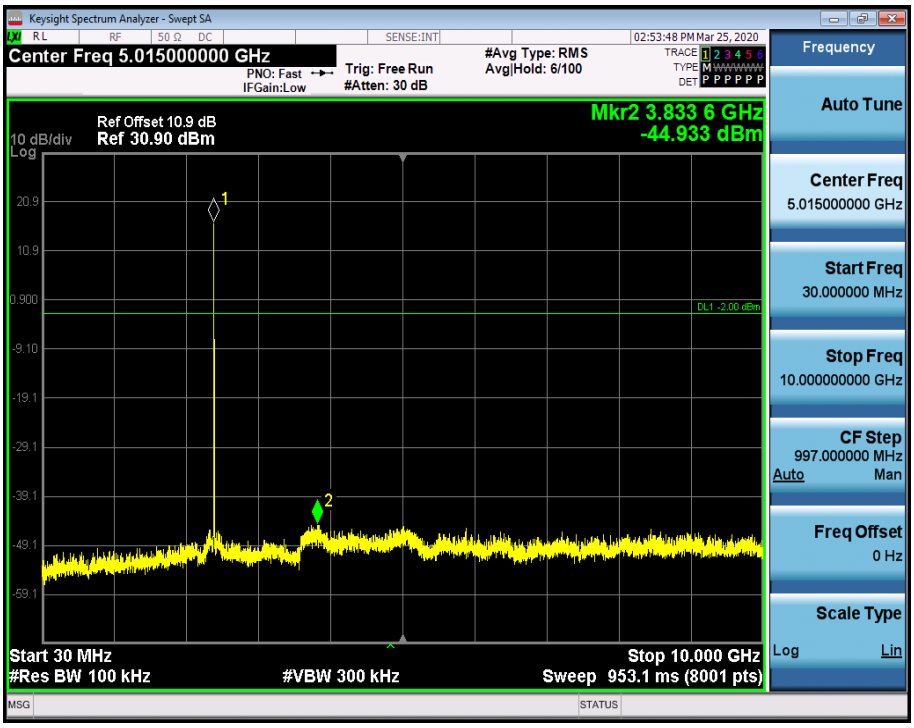
CSE_2	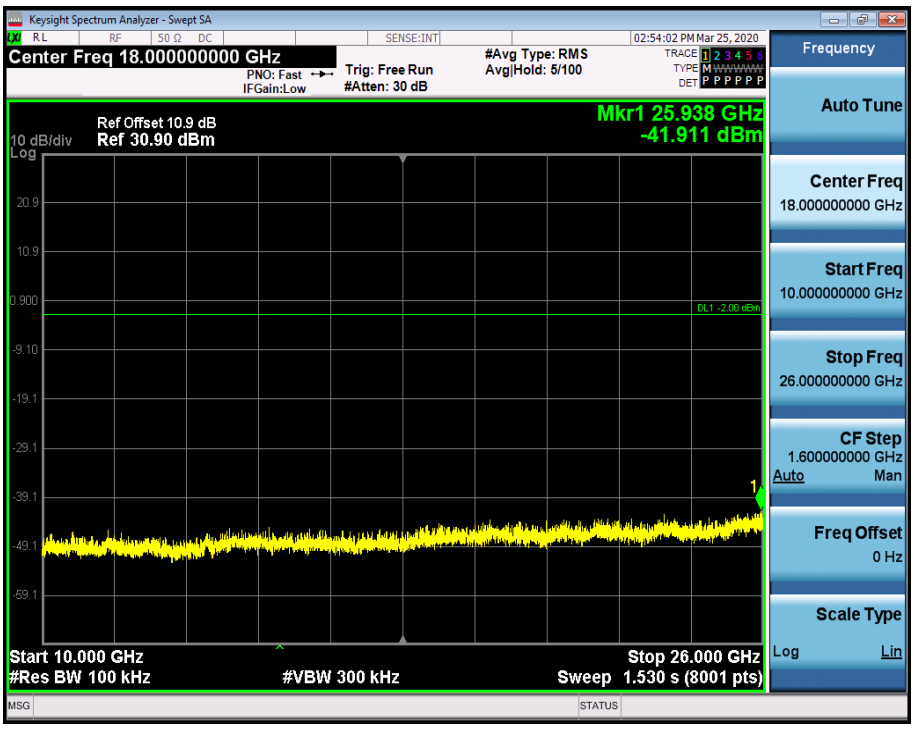

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

RF Conducted Spurious Emissions_ZIGBEE_2445_Ant1	
Pref	
CSE_1	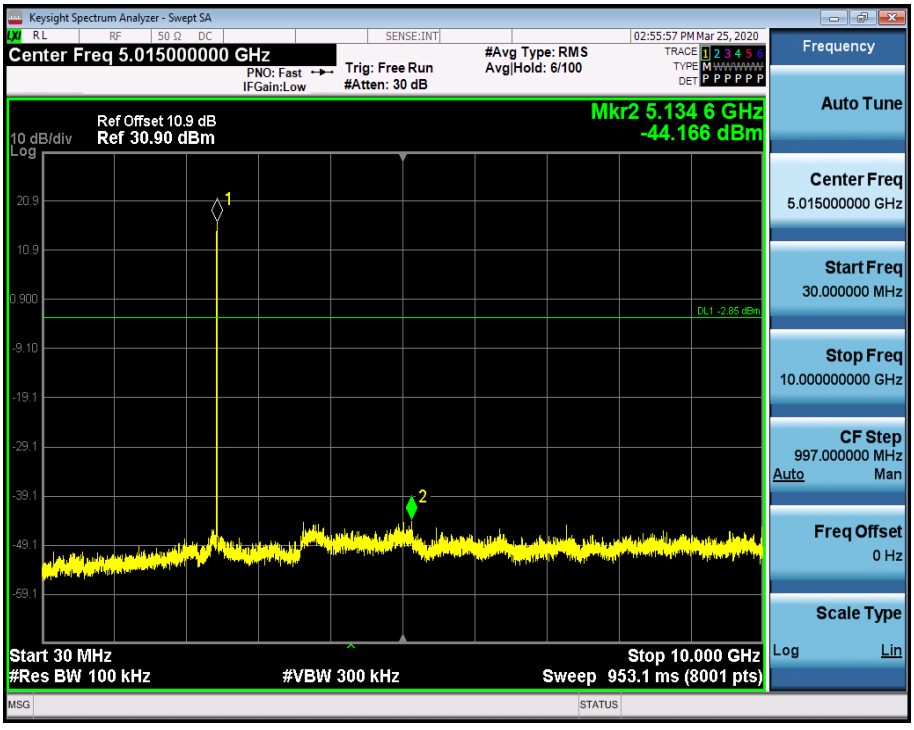

CSE_2	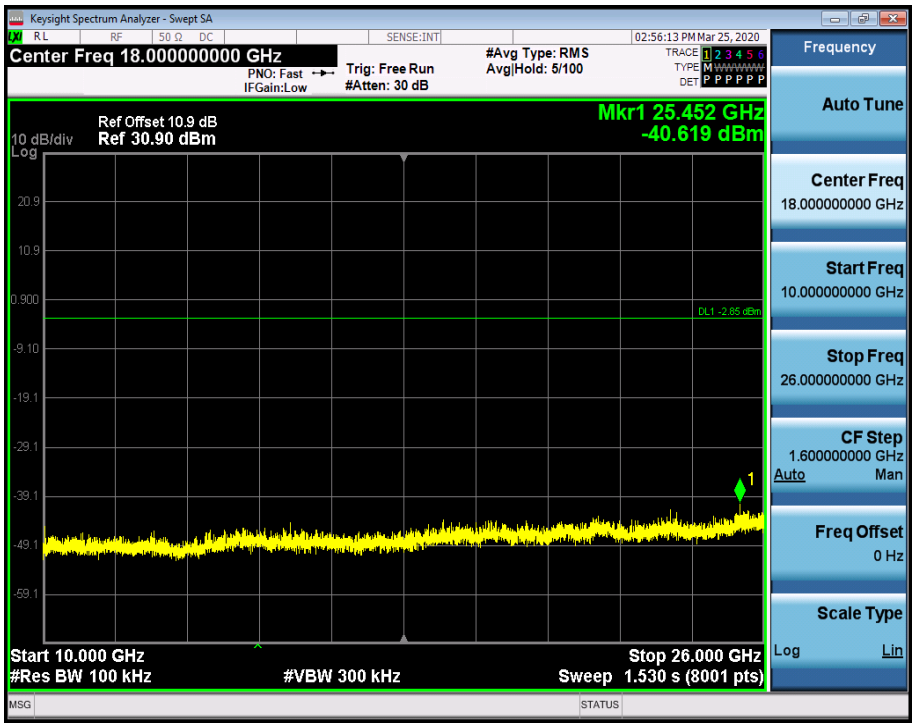
RF Conducted Spurious Emissions_ZIGBEE_2480_Ant1	
Pref	

CSE_1	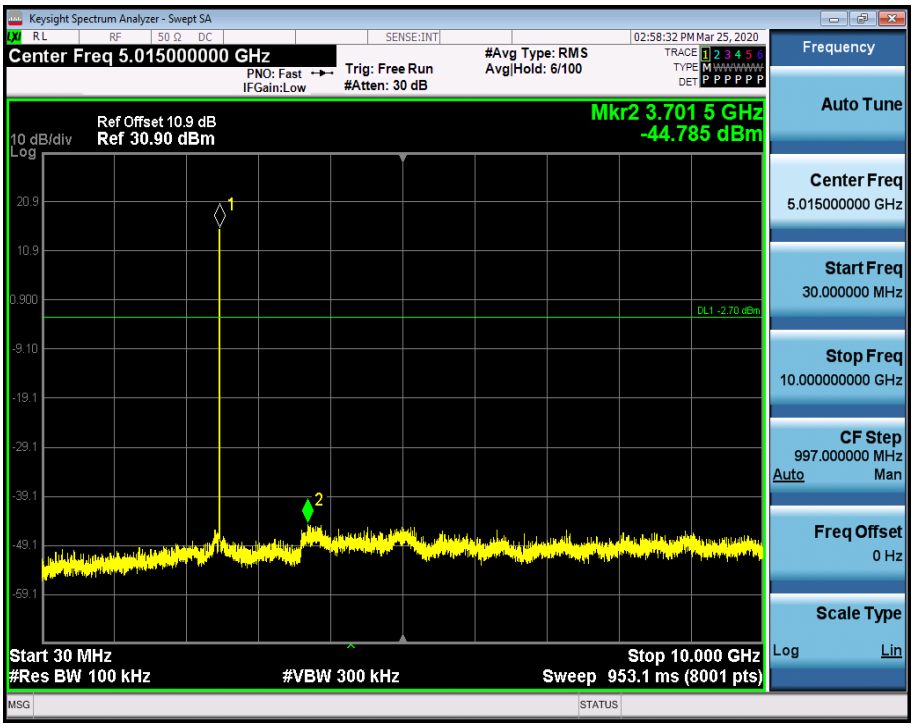
CSE_2	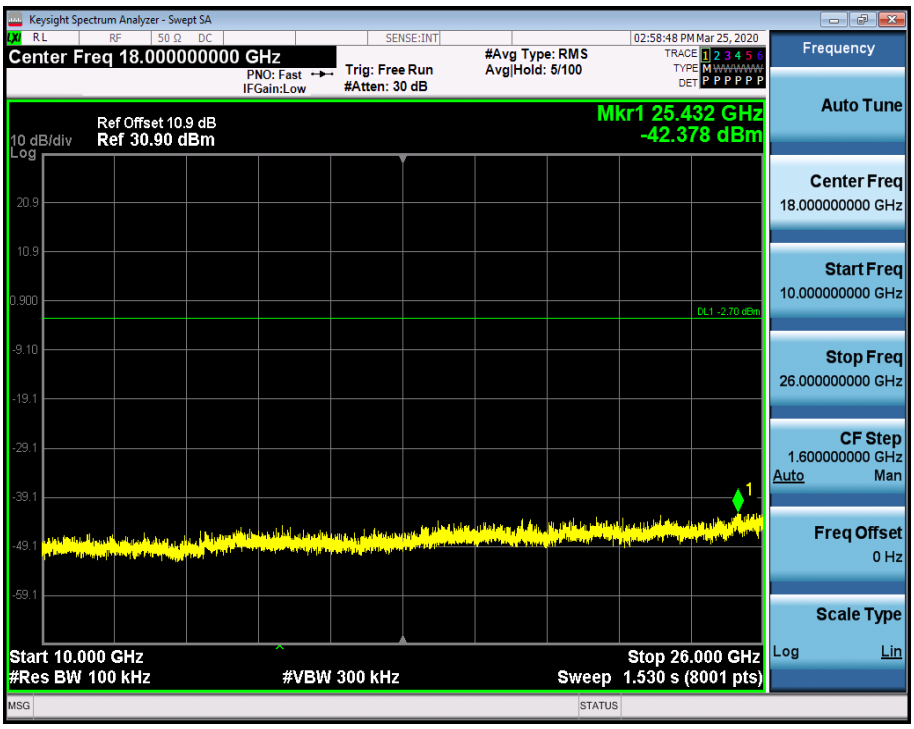

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

6.Duty cycle

Test mode	Test channel	Ant	Ton	Tobservation	Duty cycle
ZIGBEE	2405	Ant1	1.22ms	100ms	1.22%
ZIGBEE	2445	Ant1	1.22ms	100ms	1.22%
ZIGBEE	2480	Ant1	1.22ms	100ms	1.22%

TEST PLOT
Duty Cycle_ZIGBEE_2405_Ant1

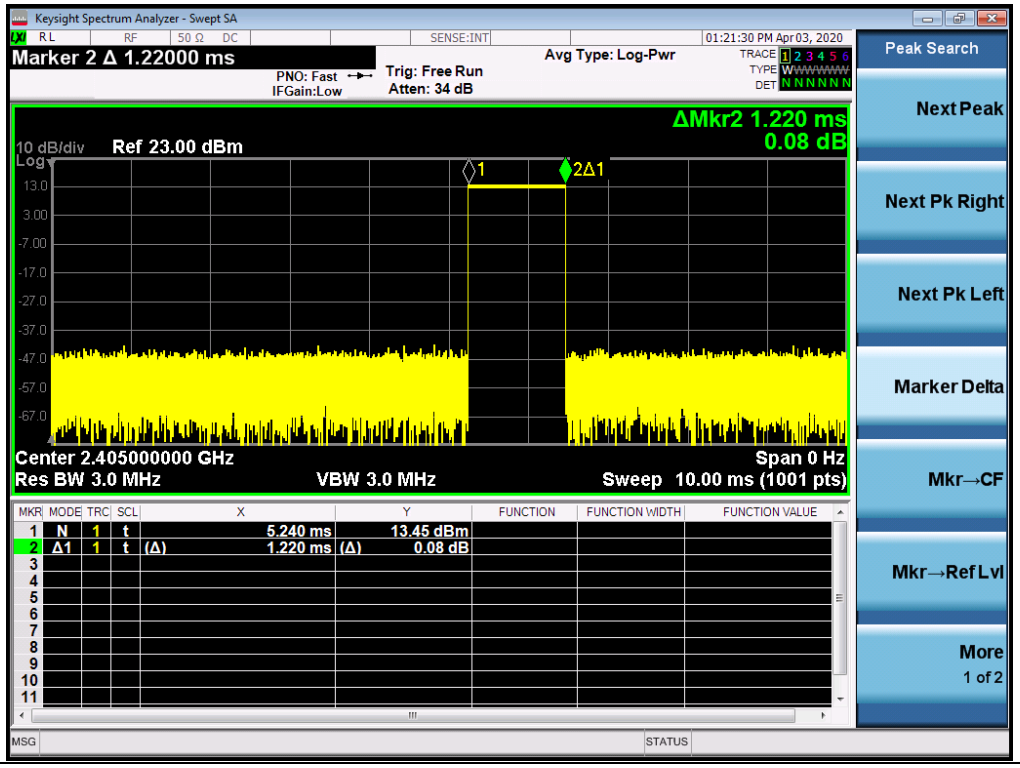

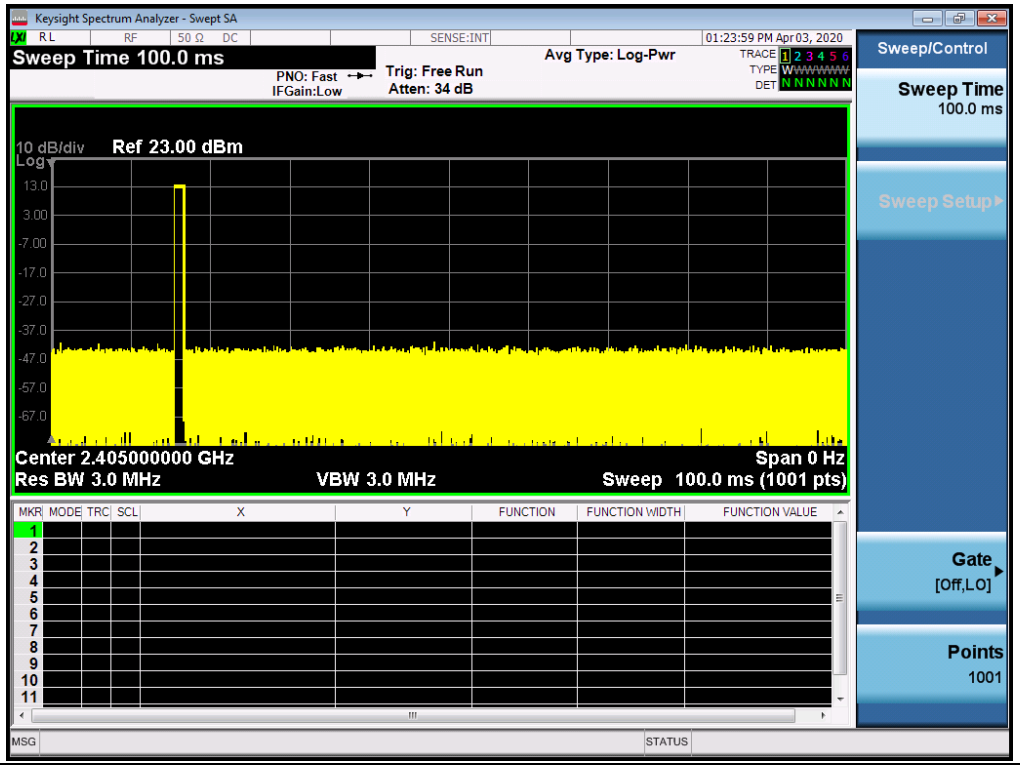

Duty Cycle_ZIGBEE_2445_Ant1

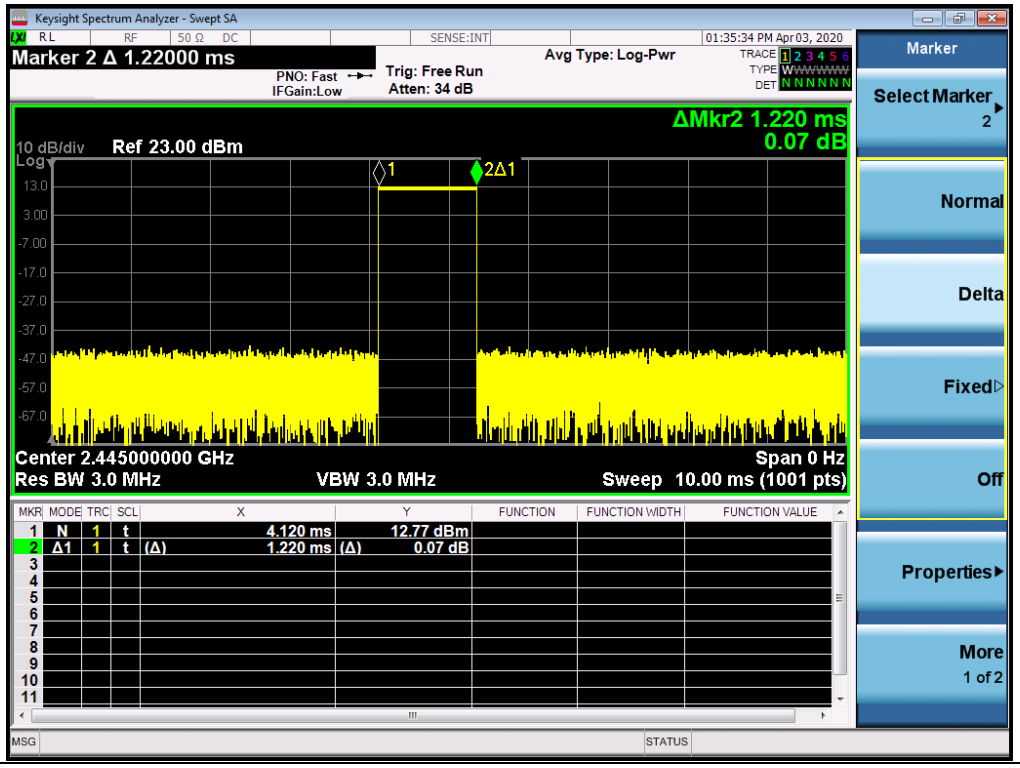

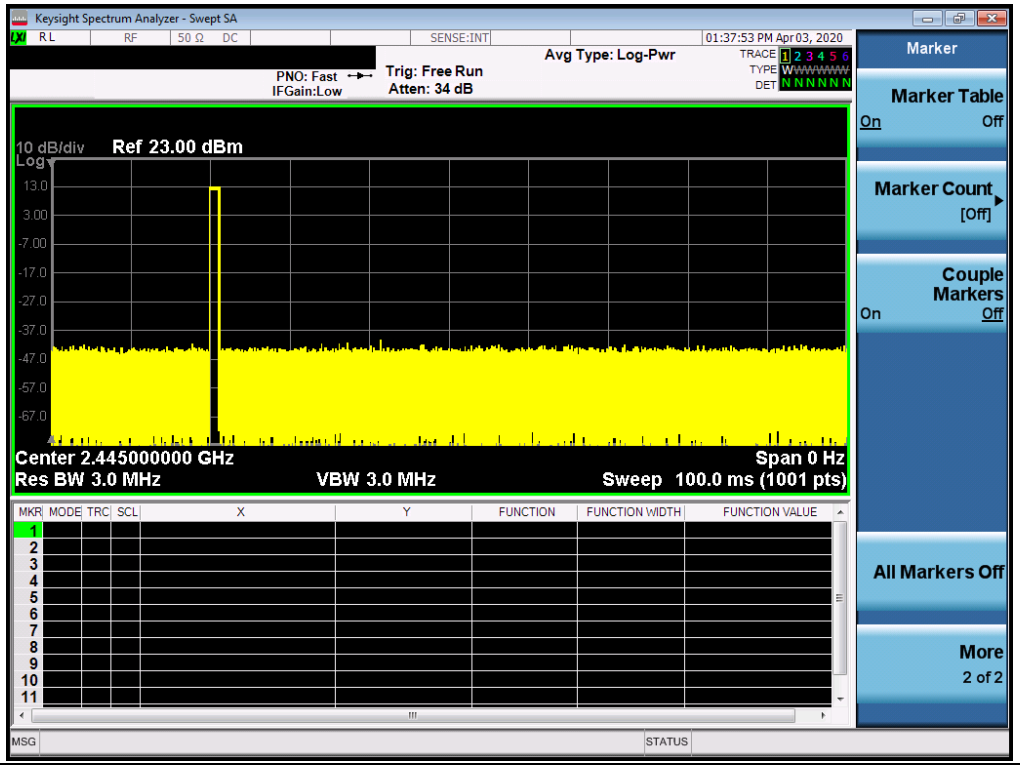

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch, Testing Center EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Duty Cycle_ZIGBEE_2480_Ant1

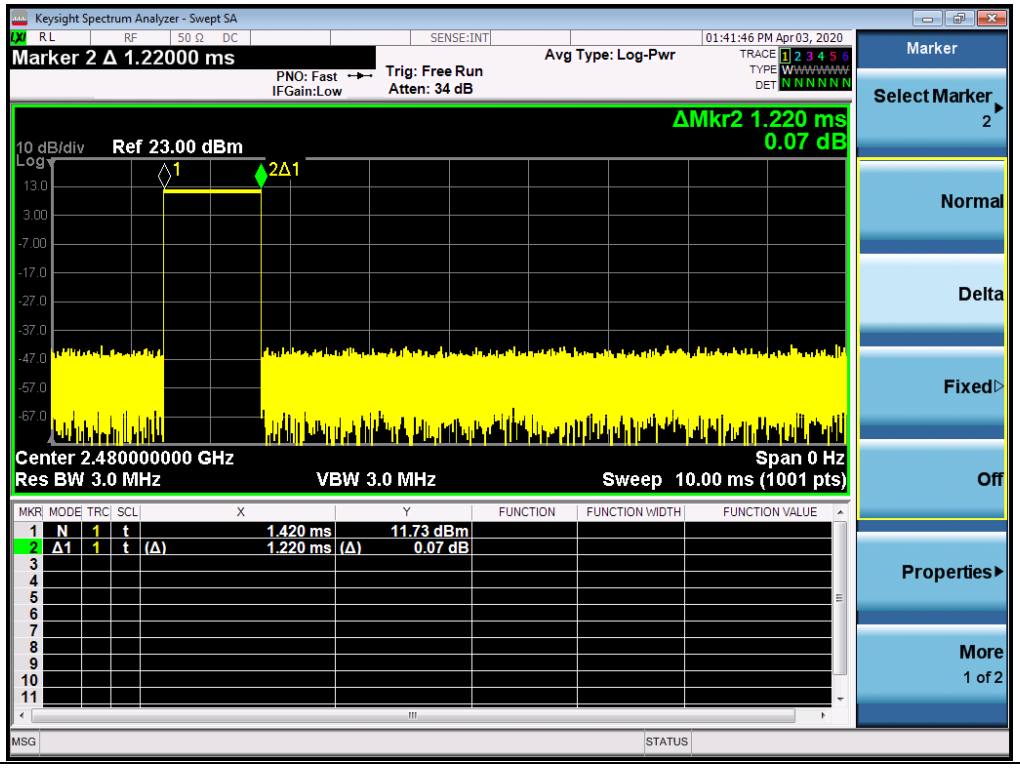

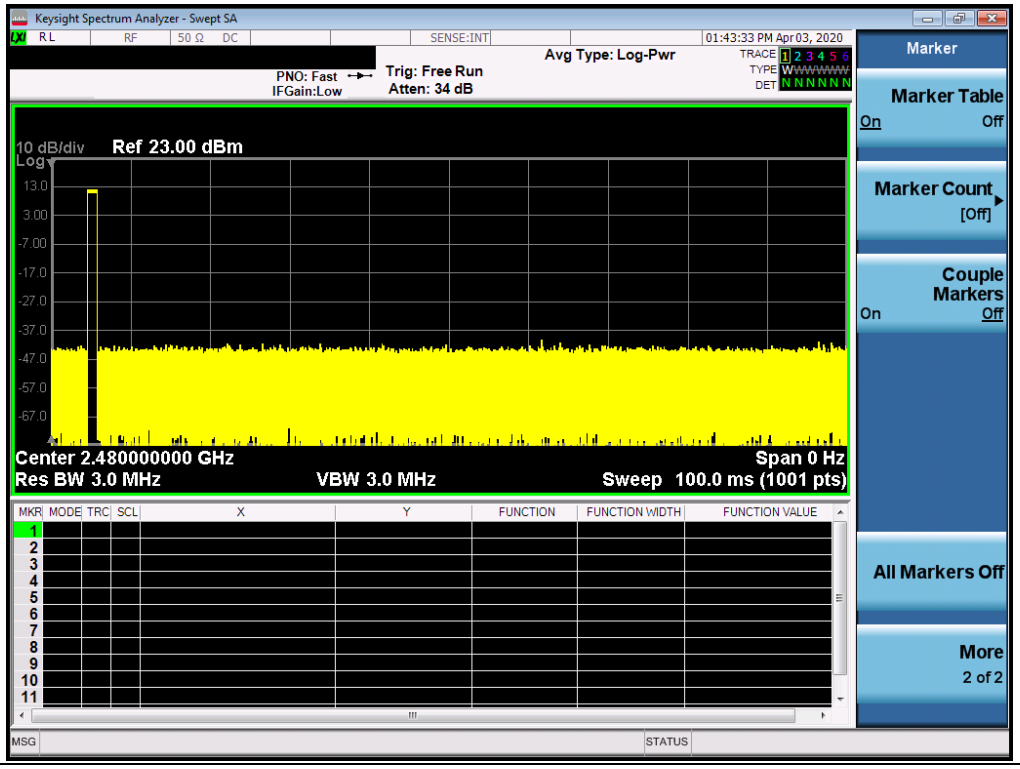

--End of Report--