

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-205-RWD-006
AGR No. : A201A-205R
Applicant : openit Inc.
Address : 6F HumanTeco, 57, Ahasan17gil, Seongdong-gu, Seoul 04799, Republic of Korea
Manufacturer : openit Inc.
Address : 6F HumanTeco, 57, Ahasan17gil, Seongdong-gu, Seoul 04799, Republic of Korea
Type of Equipment : Healthcare IoT Gateway
FCC ID. : 2AVY3BT5UW100
Model Name : HealthUp OG-BT5UW100
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 92 pages (including this page)
Date of Incoming : February 07, 2020
Date of issue : May 06, 2020

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Ha-Ram Lee / Manager
ONETECH Corp.

Approved by:



Jae-Ho Lee / General Manager
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS.....	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	7
2.3 RELATED SUBMITTAL(S) / GRANT(S).....	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY	7
2.6 TEST FACILITY	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	8
4. EUT MODIFICATIONS.....	8
5. SYSTEM TEST CONFIGURATION	9
5.1 JUSTIFICATION	9
5.2 PERIPHERAL EQUIPMENT.....	9
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM	14
5.5 ANTENNA REQUIREMENT	14
6. PRELIMINARY TEST	15
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	15
6.2 GENERAL RADIATED EMISSIONS TESTS.....	15
7. MINIMUM 6 DB BANDWIDTH	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP	16
7.3 TEST EQUIPMENT USED	16
7.4 TEST DATA FOR 802.11B WLAN MODE	17
7.5 TEST DATA FOR 802.11G WLAN MODE.....	19
7.6 TEST DATA FOR 802.11N (HT 20) WLAN MODE	21
7.7 TEST DATA FOR 802.11N (HT 40) WLAN MODE	23
8. MAXIMUM PEAK OUTPUT POWER	25
8.1 OPERATING ENVIRONMENT	25
8.2 TEST SET-UP	25
8.3 TEST EQUIPMENT USED	25

8.4 TEST DATA FOR 802.11B WLAN MODE	26
8.5 TEST DATA FOR 802.11G WLAN MODE.....	28
8.6 TEST DATA FOR 802.11N(HT20) WLAN MODE.....	30
8.7 TEST DATA FOR 802.11N(HT40) WLAN MODE.....	32
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	34
9.1 OPERATING ENVIRONMENT	34
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	34
9.3 TEST SET-UP FOR RADIATED MEASUREMENT	34
9.4 TEST EQUIPMENT USED	34
9.5 TEST DATA FOR CONDUCTED EMISSION	35
9.5.1 Test data for 802.11b WLAN Mode	35
9.5.2 Test data for 802.11g WLAN Mode	40
9.5.3 Test data for 802.11n (HT20) WLAN Mode	45
9.5.4 Test data for 802.11n (HT40) WLAN Mode	49
9.6 TEST DATA FOR RADIATED EMISSION	55
9.6.1 Radiated Emission which fall in the Restricted Band.....	55
9.6.2 Spurious & Harmonic Radiated Emission.....	59
10. PEAK POWER SPECTRAL DENSITY	63
10.1 OPERATING ENVIRONMENT	63
10.2 TEST SET-UP	63
10.3 TEST EQUIPMENT USED	63
10.4 TEST DATA FOR 802.11B WLAN MODE	64
10.5 TEST DATA FOR 802.11G WLAN MODE.....	66
10.6 TEST DATA FOR 802.11N (HT20) WLAN MODE.....	68
10.7 TEST DATA FOR 802.11N (HT40) WLAN MODE.....	70
11. RADIATED EMISSION TEST	72
11.1 OPERATING ENVIRONMENT	72
11.2 TEST SET-UP	72
11.3 TEST EQUIPMENT USED	72
11.4 TEST DATA FOR WLAN 2.4 GHz (CONNECTED TO ADAPTER).....	73
11.4.1 Test data for 30 MHz ~ 1 GHz.....	73
11.4.2 Test data for Below 30 MHz	74
11.4.3 Test data for above 1 GHz.....	74
11.5. TEST DATA FOR WLAN 2.4 GHz (CONNECTED TO USB CABLE)	75
11.5.1 Test data for 30 MHz ~ 1 GHz.....	75
11.5.2 Test data for Below 30 MHz	76

11.5.3 Test data for above 1 GHz.....	76
11.6 TEST DATA FOR WLAN 2.4 GHz (PoE ADAPTER)	78
11.6.1 Test data for 30 MHz ~ 1 GHz.....	78
11.6.2 Test data for Below 30 MHz	79
11.6.3 Test data for above 1 GHz.....	79
11.7 TEST DATA FOR BLUETOOTH LE + WLAN 2.4 GHz INTERMODULATION MODE (CONNECTION TO ADAPTER)....	80
11.7.1 Test data for 30 MHz ~ 1 GHz.....	80
11.7.2 Test data for Below 30 MHz	81
11.7.3 Test data for above 1 GHz.....	81
11.8. TEST DATA FOR BLUETOOTH LE + WLAN 2.4 GHz INTERMODULATION MODE (CONNECTION TO USB CABLE)	
.....	82
11.8.1 Test data for 30 MHz ~ 1 GHz.....	82
11.8.2 Test data for Below 30 MHz	83
11.8.3 Test data for above 1 GHz.....	83
11.9 TEST DATA FOR BLUETOOTH LE + WLAN 2.4 GHz INTERMODULATION MODE (PoE ADAPTER)	84
11.9.1 Test data for 30 MHz ~ 1 GHz.....	84
11.9.2 Test data for Below 30 MHz	85
11.9.3 Test data for above 1 GHz.....	85
12. CONDUCTED EMISSION TEST	86
12.1 OPERATING ENVIRONMENT	86
12.2 TEST SET-UP	86
12.3 TEST EQUIPMENT USED	86
12.4 TEST DATA (CONNECTION TO ADAPTER).....	87
12.5 TEST DATA (CONNECTION TO USB CABLE)	89
12.6 TEST DATA (PoE ADAPTER).....	91

Revision History

Rev. No.	Issued Report No.	Issue Date	Revisions	Section Affected
0	OT-204-RWD-041	April 07, 2020	Initial Issue	All
1	OT-205-RWD-006	May 06, 2020	Revised the maximum peak output power	8. MAXIMUM PEAK OUTPUT POWER

1. VERIFICATION OF COMPLIANCE

Applicant : openit Inc.
 Address : 6F HumanTeco, 57, Ahasan17gil, Seongdong-gu, Seoul 04799, Republic of Korea
 Contact Person : MIN-YOUNG KIM / CEO
 Telephone No. : +82-1566-5911
 FCC ID. : 2AVY3BT5UW100
 Model Name : HealthUp OG-BT5UW100
 Brand Name : Healthup
 Serial Number : N/A
 Date : May 06, 2020

EQUIPMENT CLASS	DTS-Digital Transmission System
E.U.T. DESCRIPTION	Healthcare IoT Gateway
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	6 dB bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The openit Inc., Model HealthUp OG-BT5UW100 (referred to as the EUT in this report) is a Healthcare IoT Gateway. Product specification information described herein was obtained from product data sheet or user's manual.

Device Type	Healthcare IoT Gateway		
Operating Frequency	Bluetooth LE	2 402 MHz ~ 2 480 MHz	
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz [802.11b/g/n(HT20)/n(HT40)]	
RF Output Power	Bluetooth LE	1 Mbps	-2.22 dBm
		2 Mbps	-2.23 dBm
		Coded (125 kHz)	-2.24 dBm
		Coded (500 kHz)	-2.24 dBm
	WLAN 2.4 GHz	802.11b	23.95 dBm
		802.11g	22.36 dBm
		802.11n(HT20)	22.29 dBm
		802.11n(HT40)	21.71 dBm
Number of Channel	Bluetooth LE	40 Channels	
	WLAN 2.4 GHz	11 Channels	
Modulation Type	Bluetooth LE	GFSK	
	WLAN 2.4 GHz	DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
Antenna Type	Bluetooth LE	PCB Antenna	
	WLAN 2.4 GHz		
Antenna Gain	Bluetooth LE	-0.28 dBi	
	WLAN 2.4 GHz	0.48 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	40 MHz		
Rated Supply Voltage	DC 5.0 V , PoE DC 48 V		

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	-
R-TONE Board	N/A	N/A	-

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
HP Probook	HP	Notebook PC	EUT
PPP009C	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 412 MHz, 2 437 MHz, and 2 462 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.


-. Duty Cycle [802.11b]

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
802.11b	-	-	100.0	0.0

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

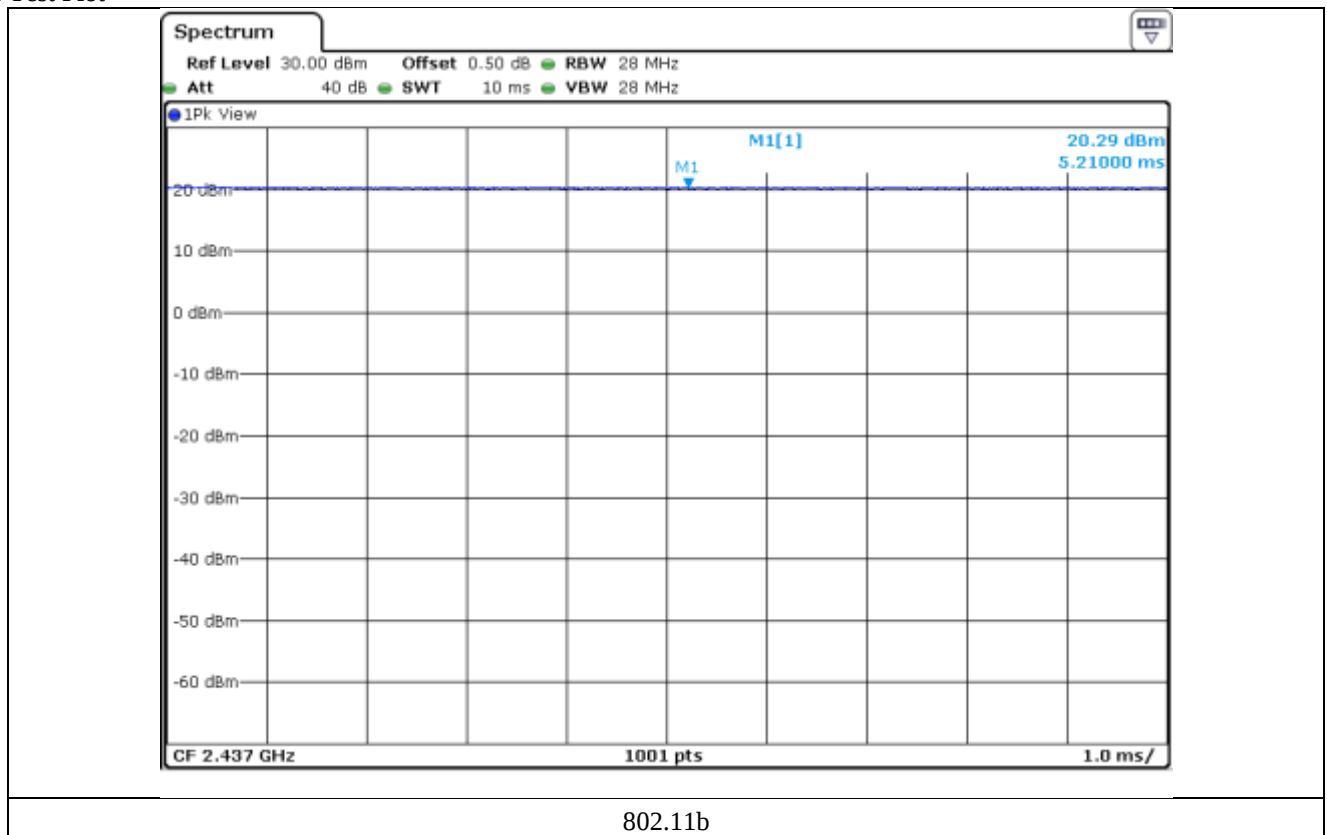

802.11b


-. Duty Cycle [802.11g]

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
802.11g	-	-	100.0	0.0

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

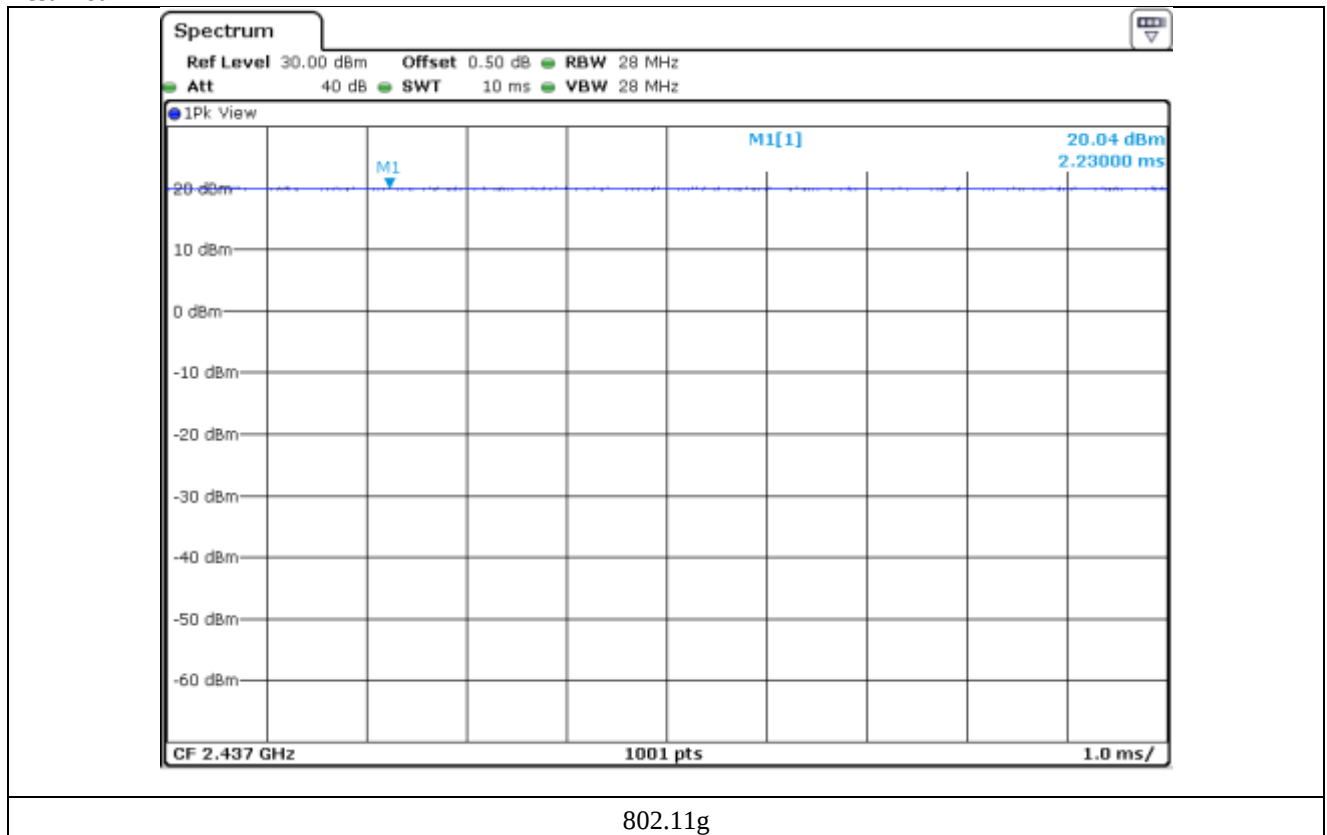

802.11g


-. Duty Cycle [802.11n (HT20)]

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
802.11n (HT20)	-	-	100.0	0.0

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

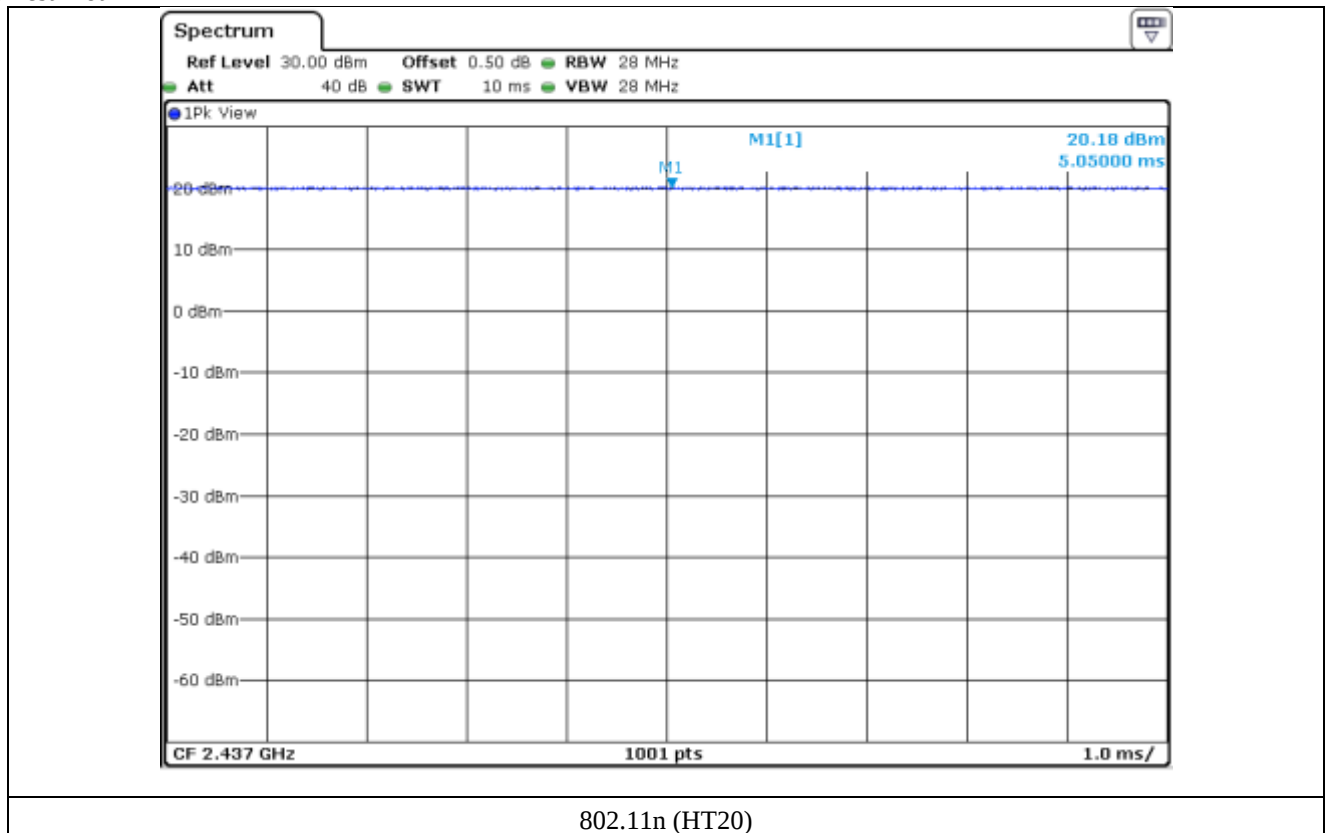

802.11n (HT20)


-. Duty Cycle [802.11n (HT40)]

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
802.11n (HT40)	-	-	100.0	0.0

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

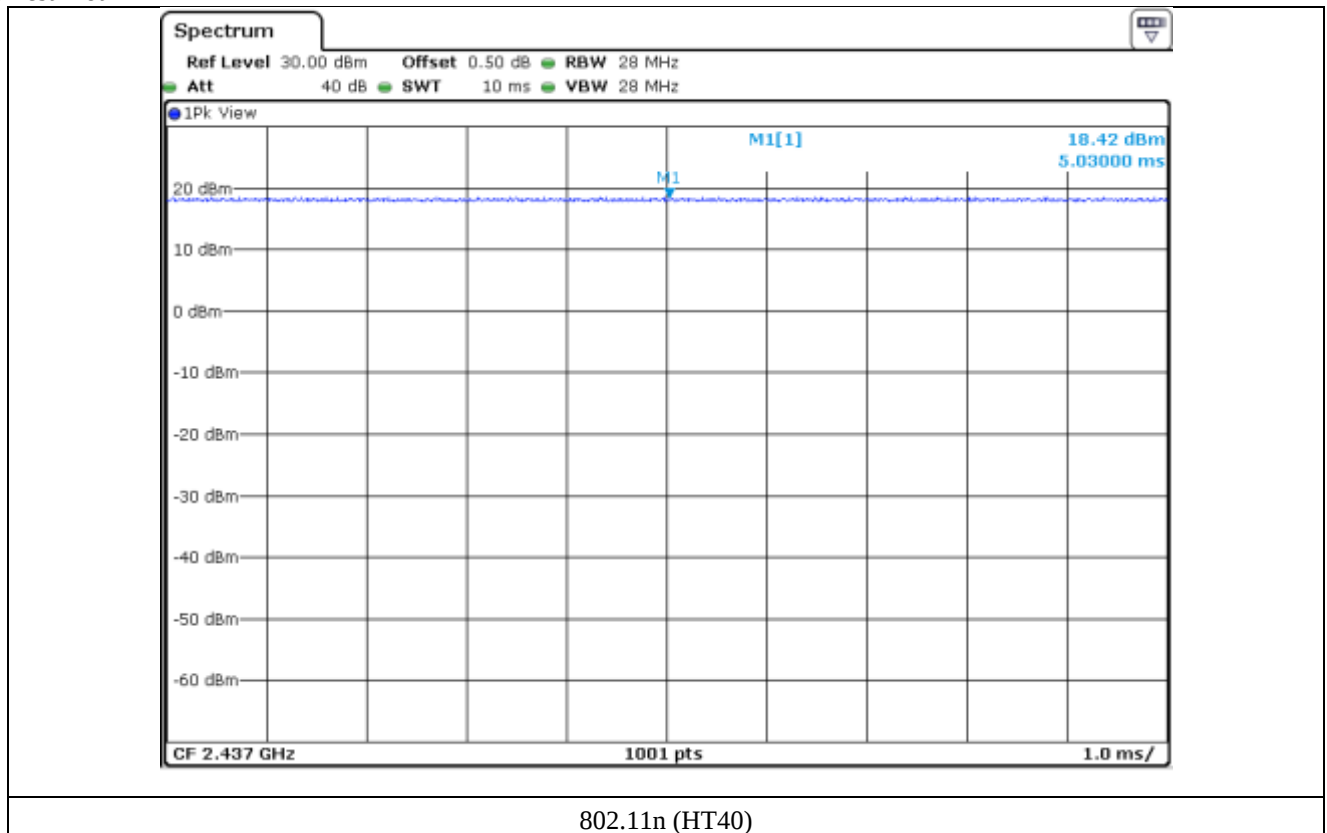

802.11n (HT40)

5.4 Configuration of Test System

- Line Conducted Test:** The EUT was tested in the Transmitting mode. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.
- Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.
- The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

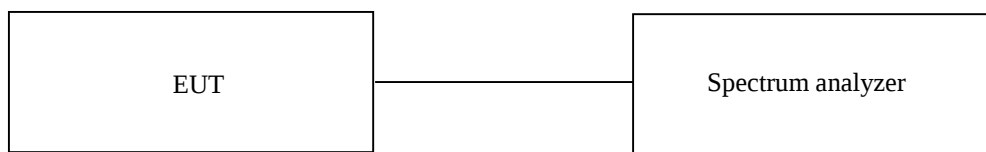

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11b WLAN Mode


- Test Date : February 11, 2020 ~ February 12, 2020
- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Bandwidth Margin(MHz)
Low	2 412.00	10.04	0.50	9.54
Middle	2 437.00	10.09	0.50	9.59
High	2 462.00	10.09	0.50	9.59

Remark. Margin = Measured Value – Limit




Tested by: Ha-Ram Lee / Manager

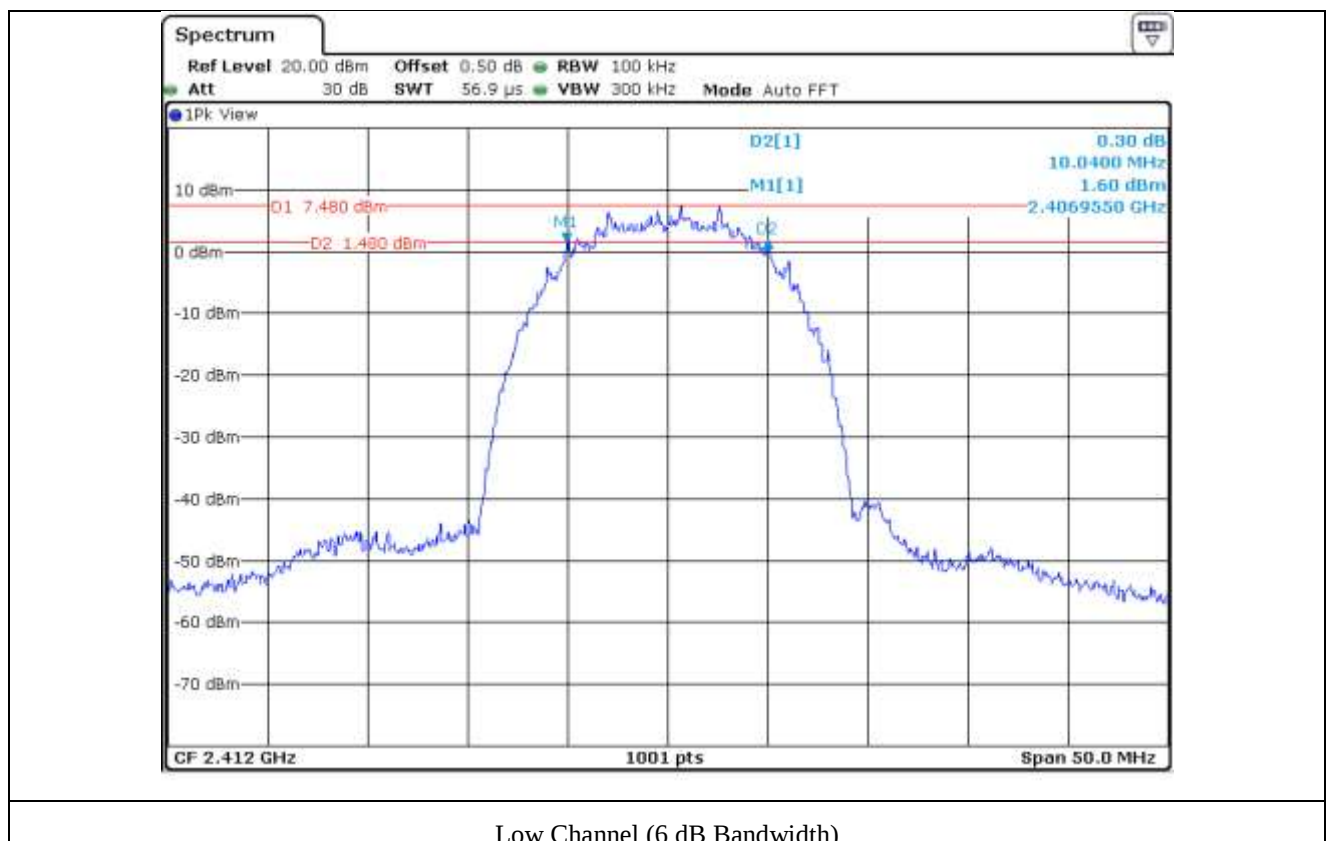



Middle Channel (6 dB Bandwidth)

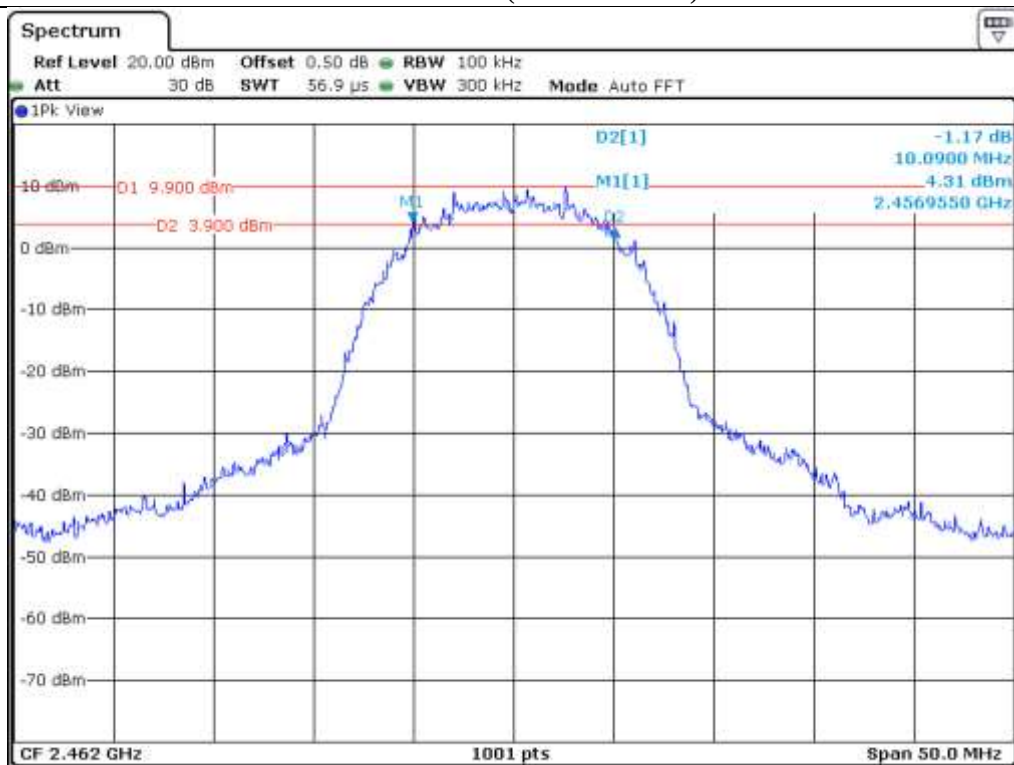

High Channel (6 dB Bandwidth)

7.5 Test data for 802.11g WLAN Mode


- Test Date : February 11, 2020 ~ February 12, 2020
- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Bandwidth Margin(MHz)
Low	2 412.00	16.48	0.50	15.98
Middle	2 437.00	16.51	0.50	16.01
High	2 462.00	16.48	0.50	15.98

Remark. Margin = Measured Value – Limit




Tested by: Ha-Ram Lee / Manager

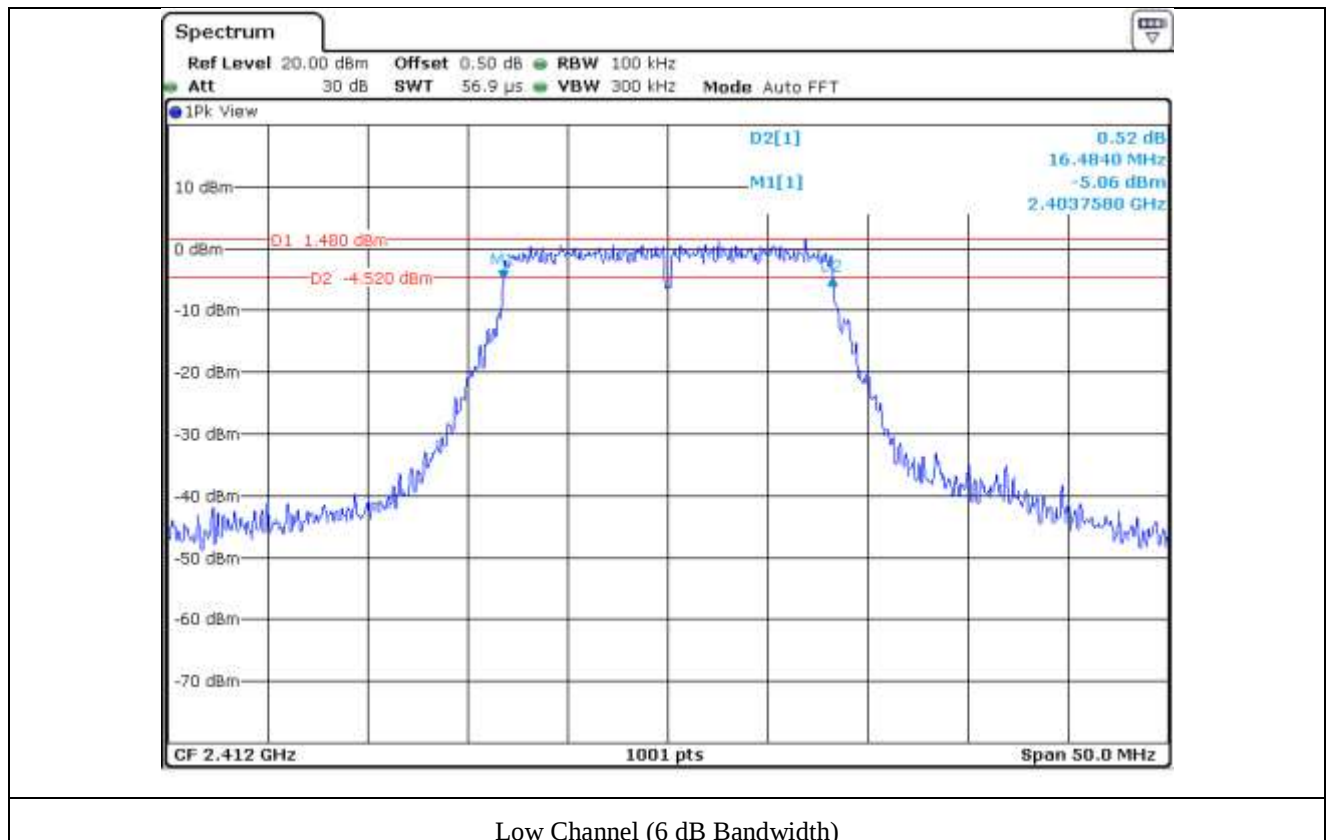

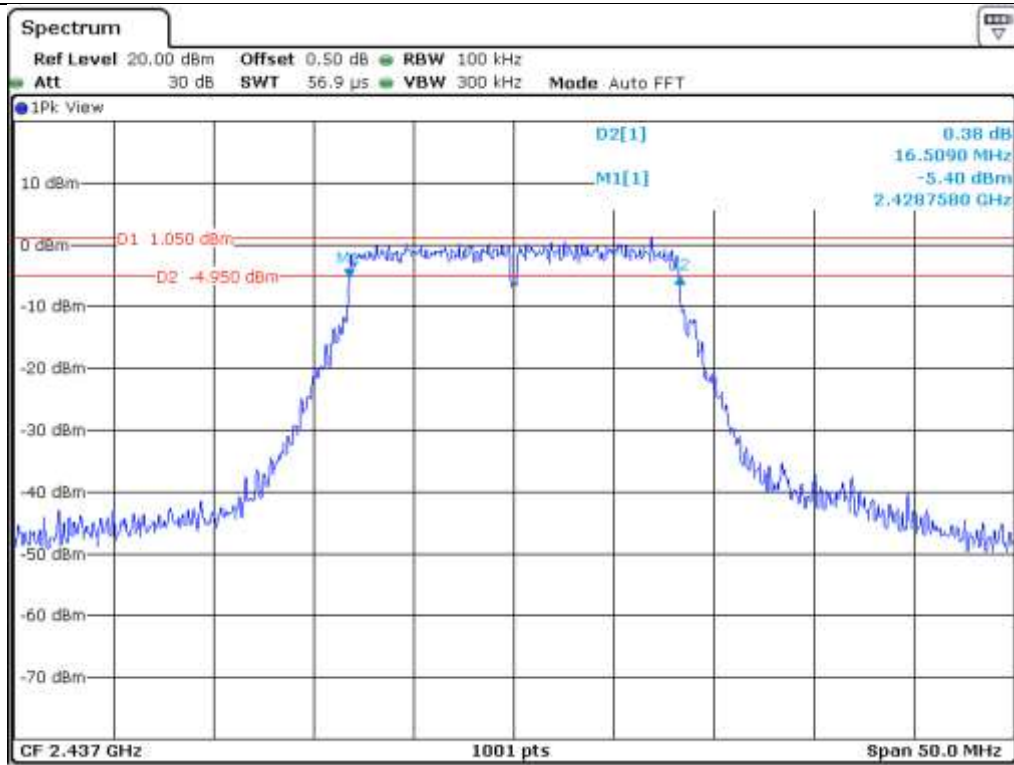

Middle Channel (6 dB Bandwidth)

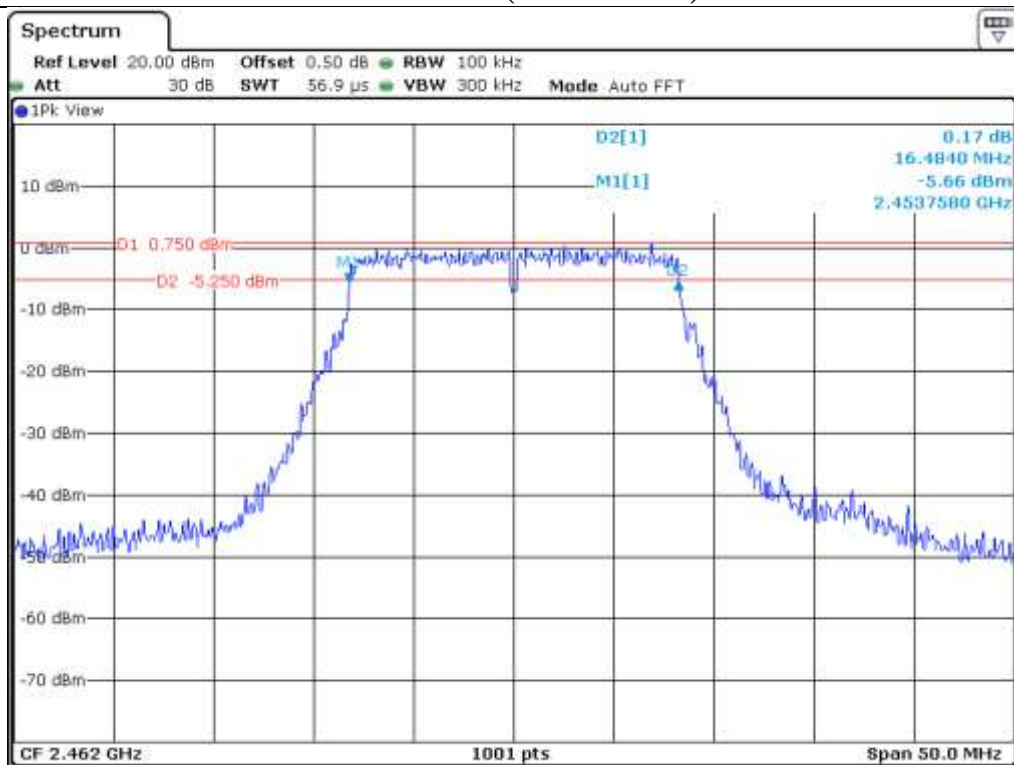

High Channel (6 dB Bandwidth)

7.6 Test data for 802.11n (HT 20) WLAN Mode


- Test Date : February 11, 2020 ~ February 12, 2020
- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Bandwidth Margin(MHz)
Low	2 412.00	17.78	0.50	17.28
Middle	2 437.00	17.78	0.50	17.28
High	2 462.00	17.78	0.50	17.28

Remark. Margin = Measured Value – Limit




Tested by: Ha-Ram Lee / Manager

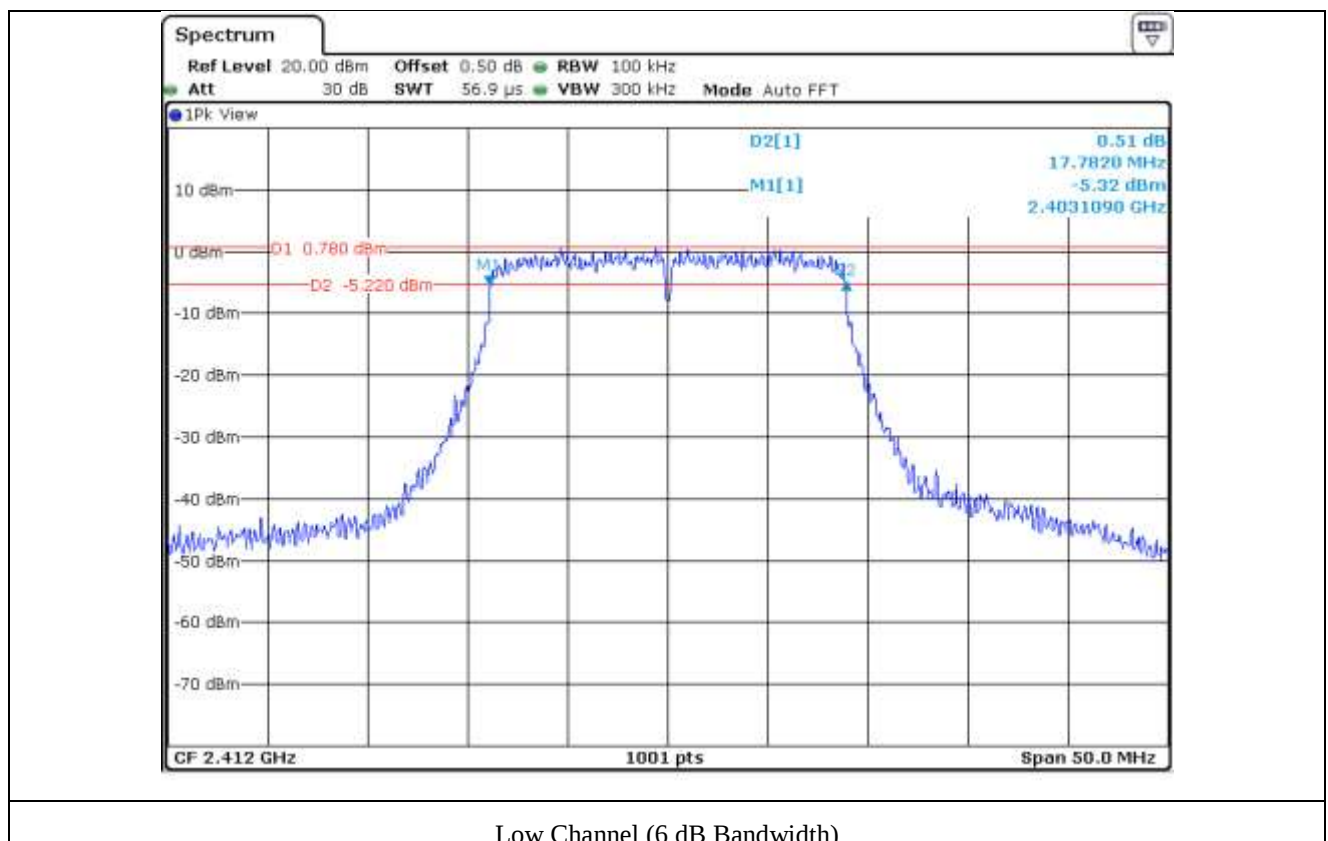

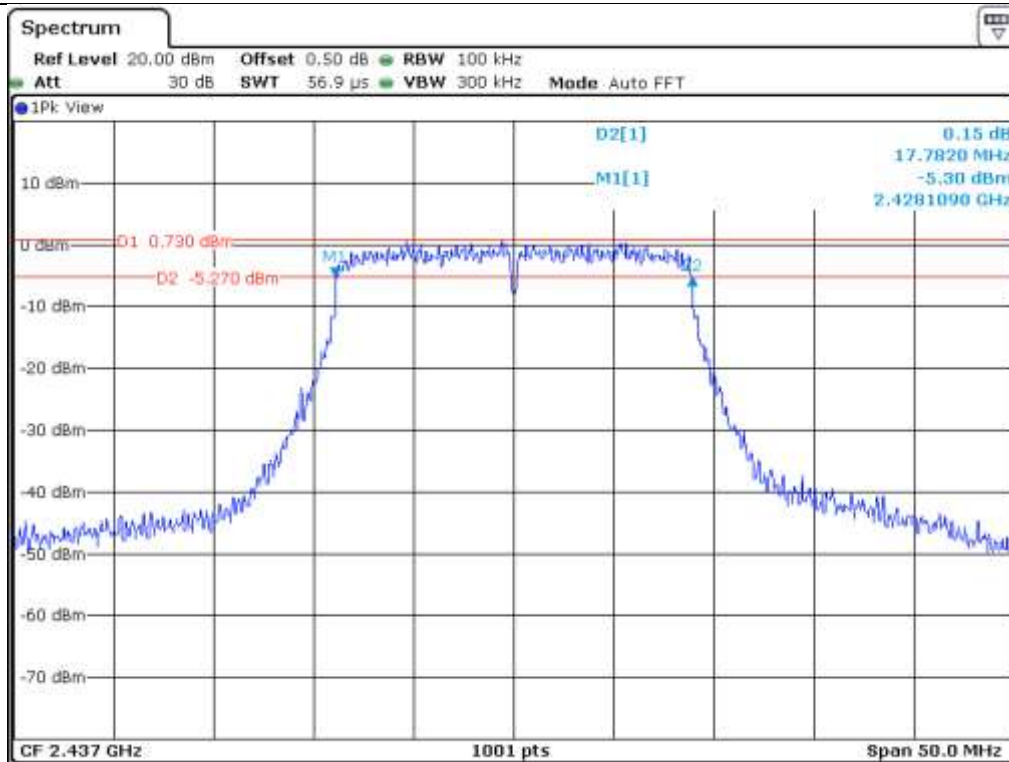

Middle Channel (6 dB Bandwidth)

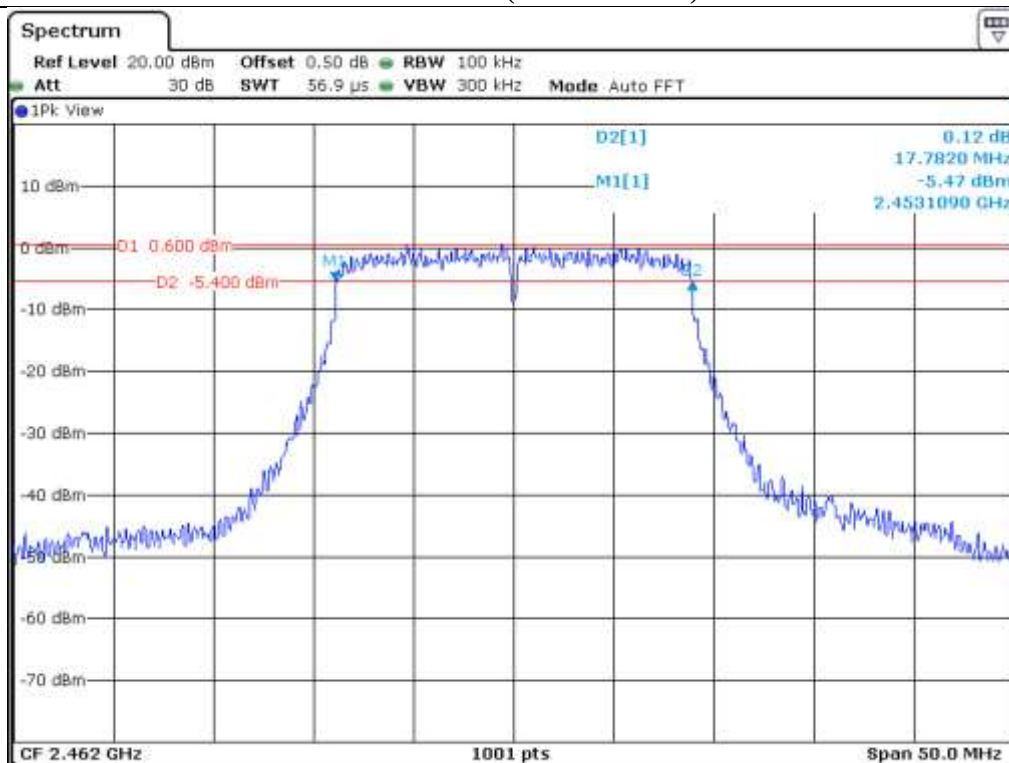

High Channel (6 dB Bandwidth)

7.7 Test data for 802.11n (HT 40) WLAN Mode


- Test Date : February 11, 2020 ~ February 12, 2020
- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Bandwidth Margin(MHz)
Low	2 412.00	36.55	0.50	36.05
Middle	2 437.00	36.54	0.50	36.04
High	2 462.00	36.52	0.50	36.02

Remark. Margin = Measured Value – Limit




Tested by: Ha-Ram Lee / Manager

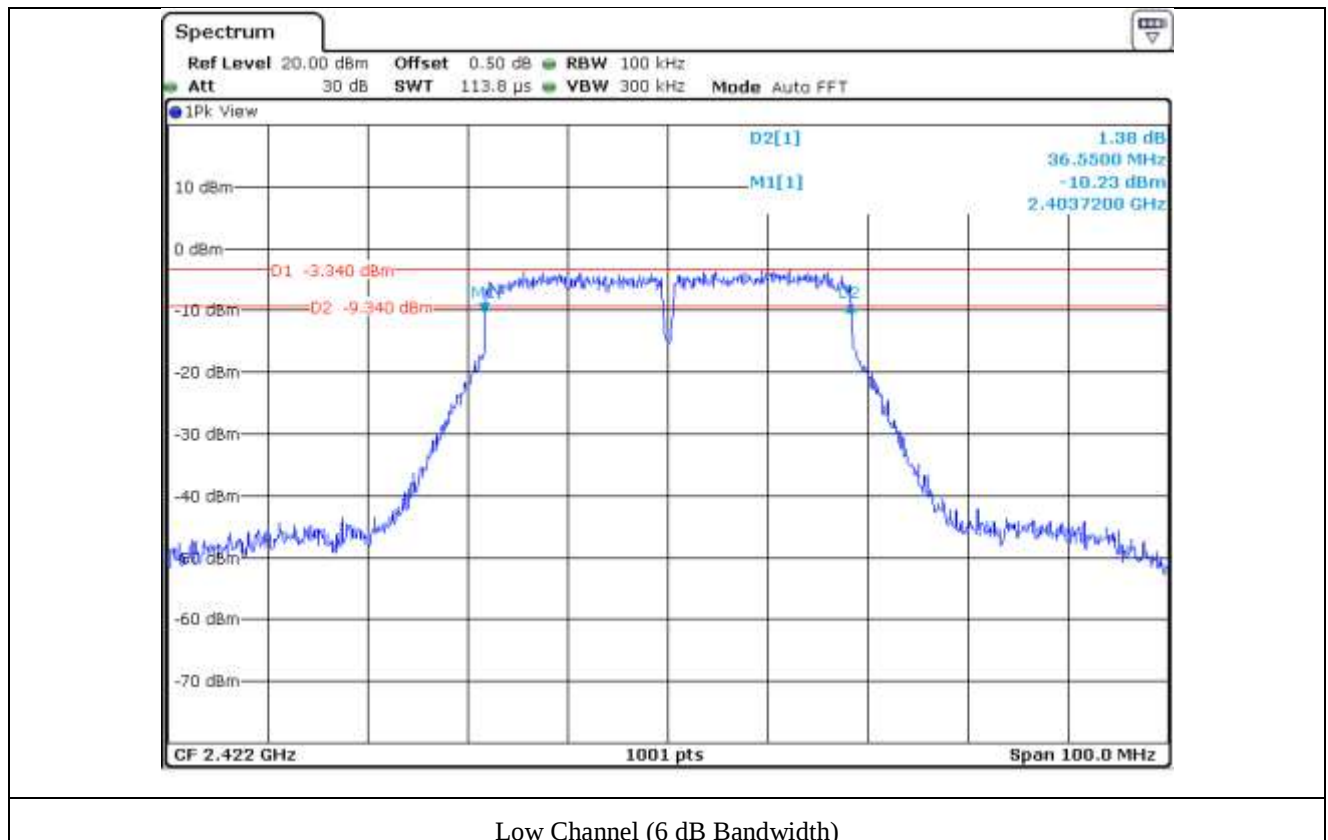

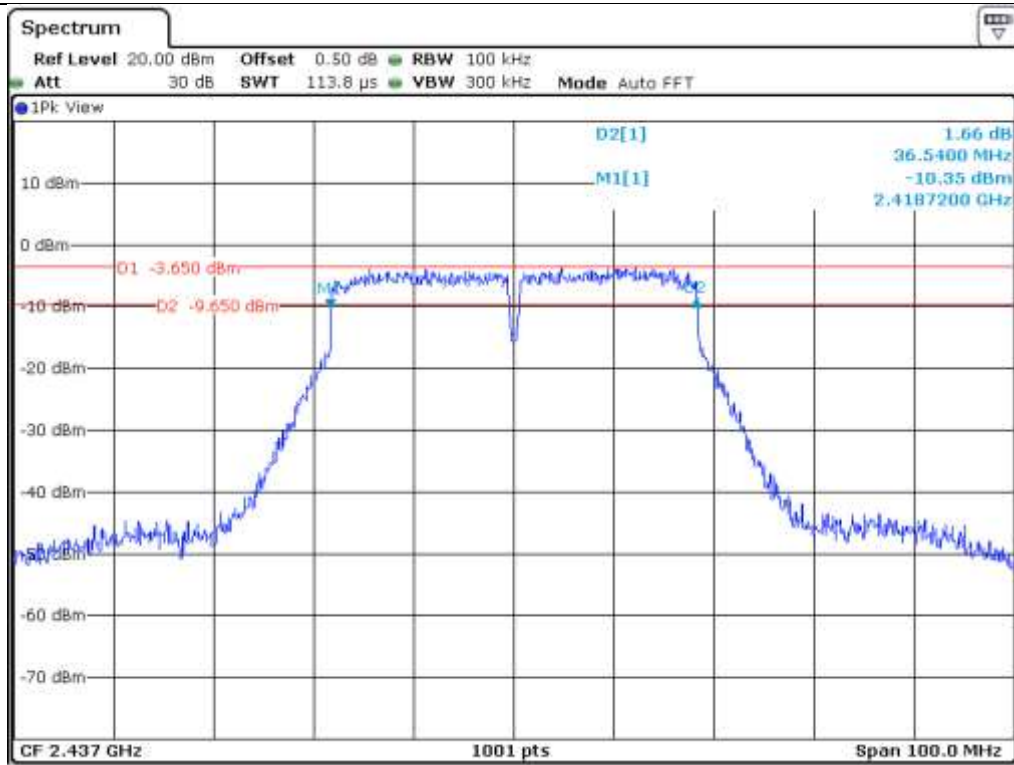

Middle Channel (6 dB Bandwidth)

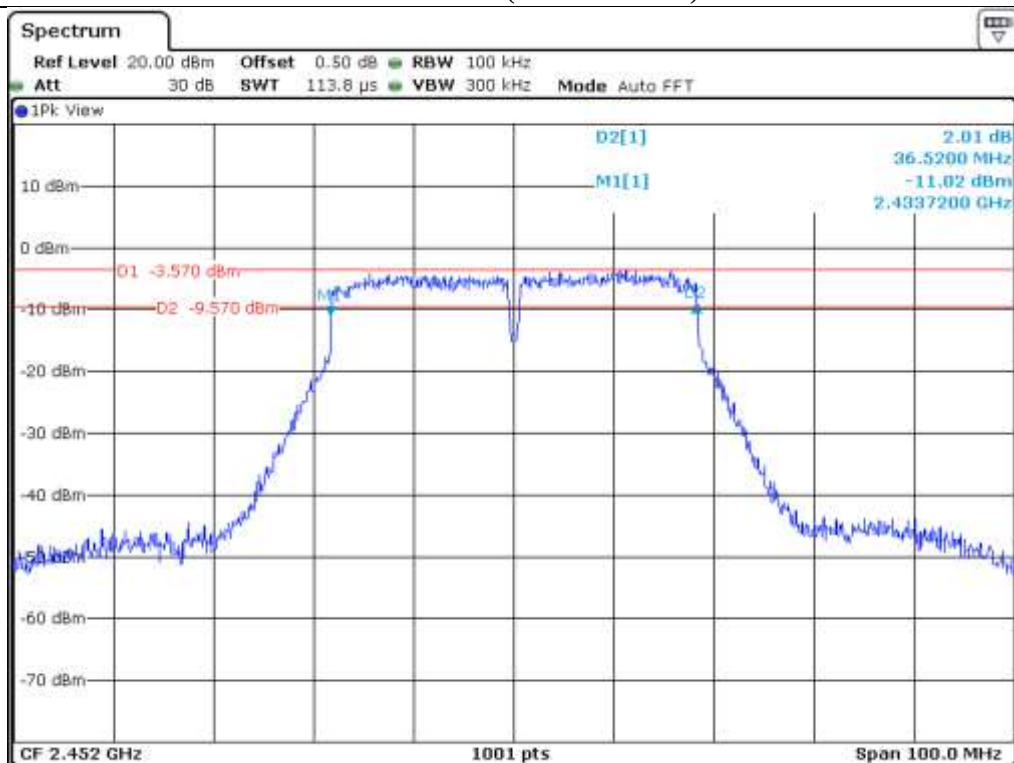

High Channel (6 dB Bandwidth)


8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99 % bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

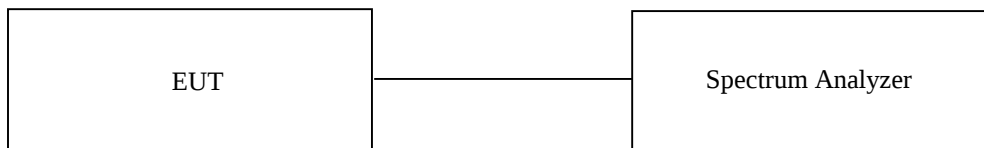

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11b WLAN Mode

-. Test Date : May 04, 2020


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB bandwidth (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	10.04	22.98	30.00	7.02
MIDDLE	2 437.00	10.09	23.95	30.00	6.05
HIGH	2 462.00	10.09	23.46	30.00	6.54

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Ha-Ram Lee / Manager

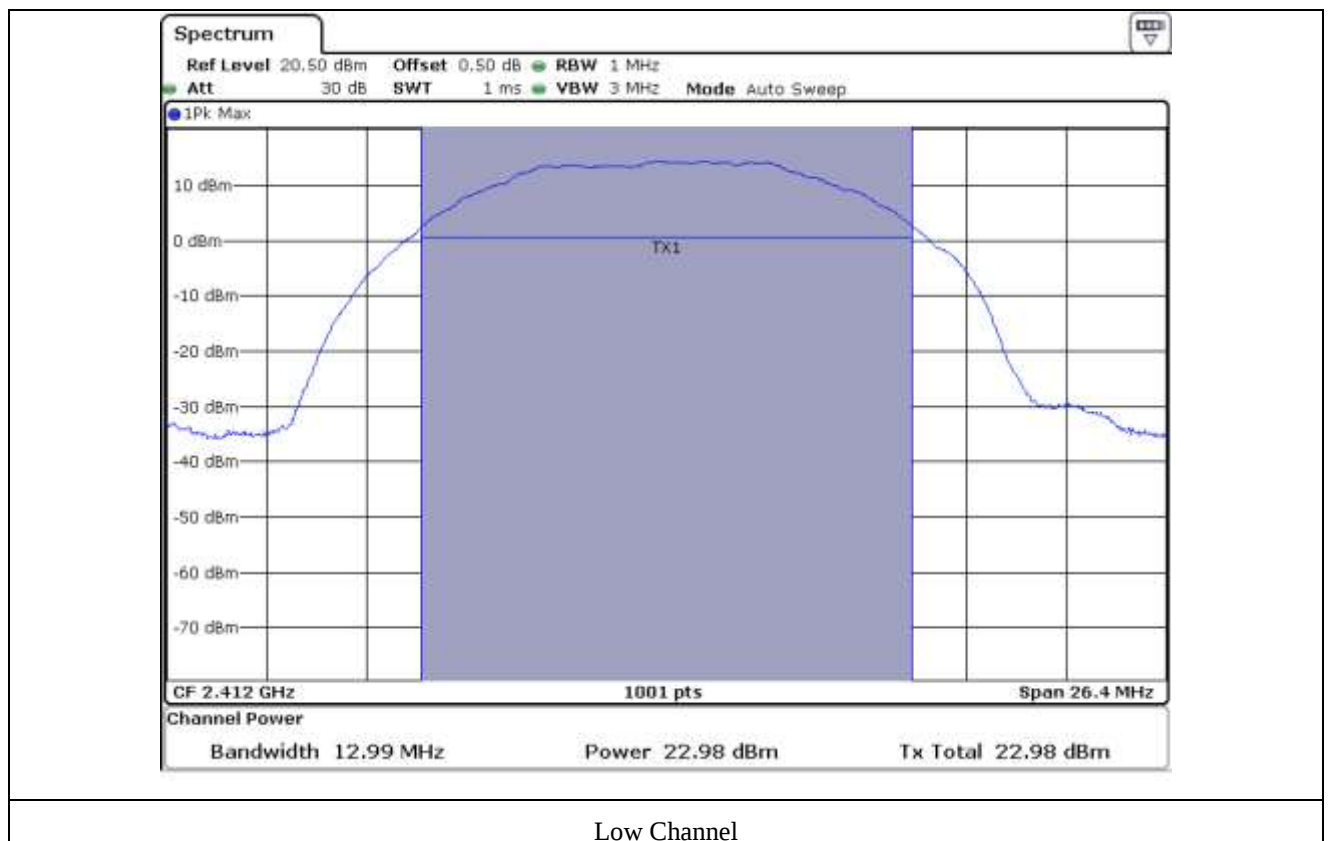

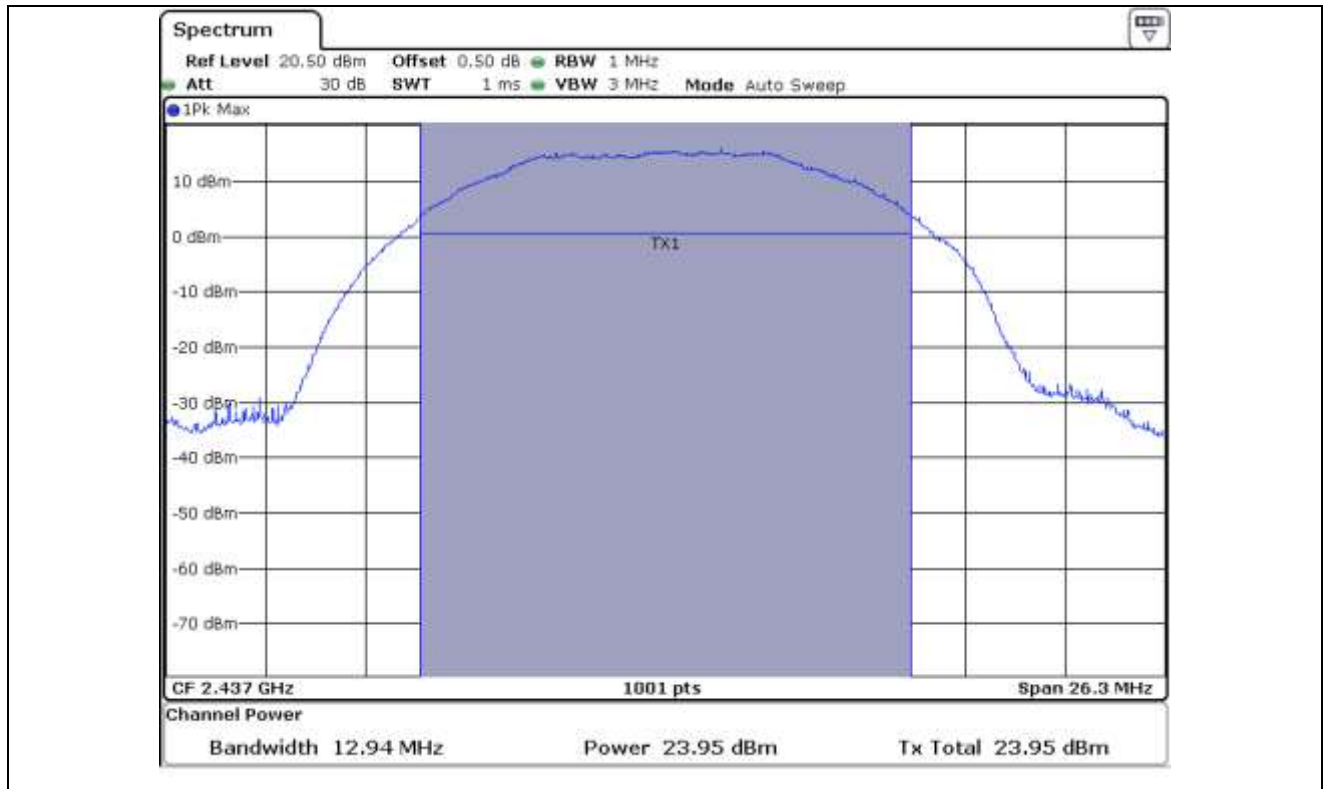

Middle Channel

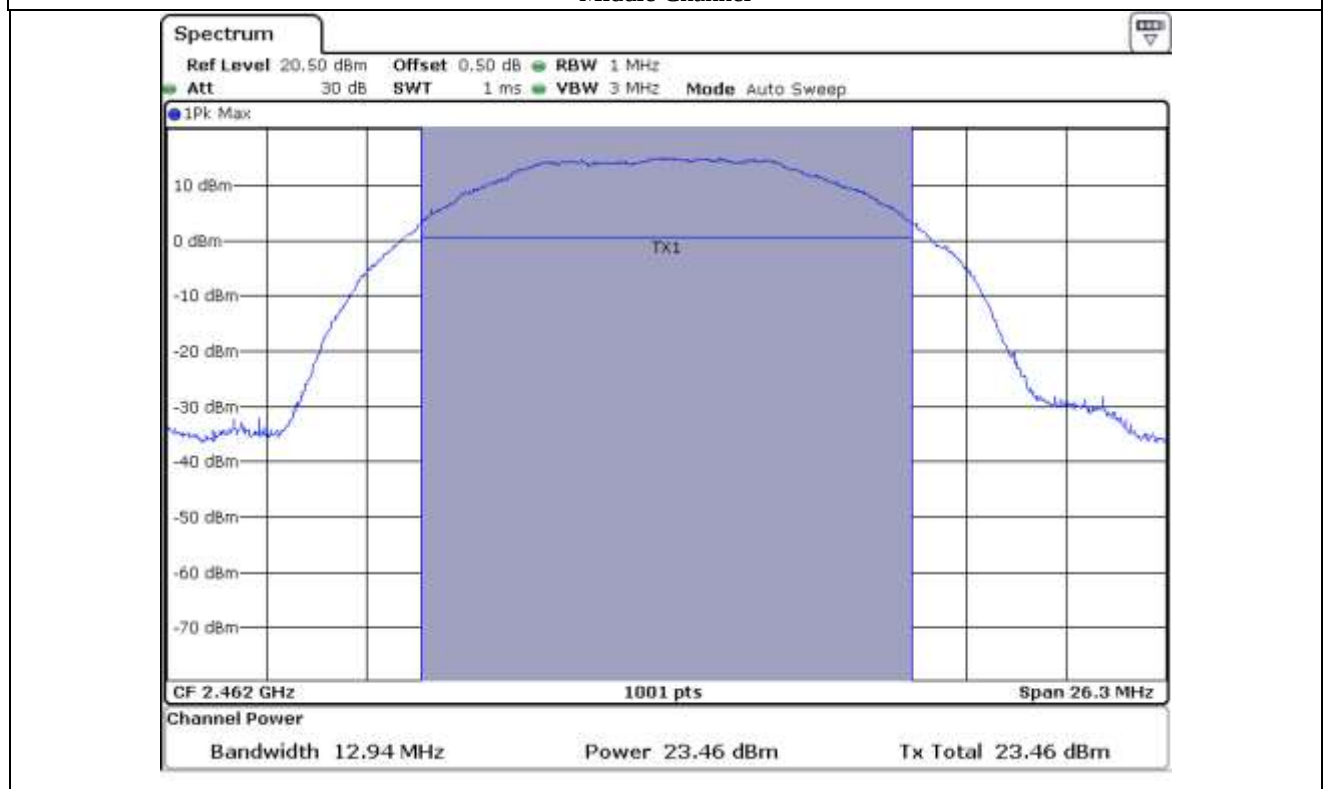

High Channel

8.5 Test data for 802.11g WLAN Mode

-. Test Date : May 04, 2020


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB bandwidth (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.48	22.36	30.00	7.64
MIDDLE	2 437.00	16.51	21.76	30.00	8.24
HIGH	2 462.00	16.48	22.00	30.00	8.00

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Ha-Ram Lee / Manager

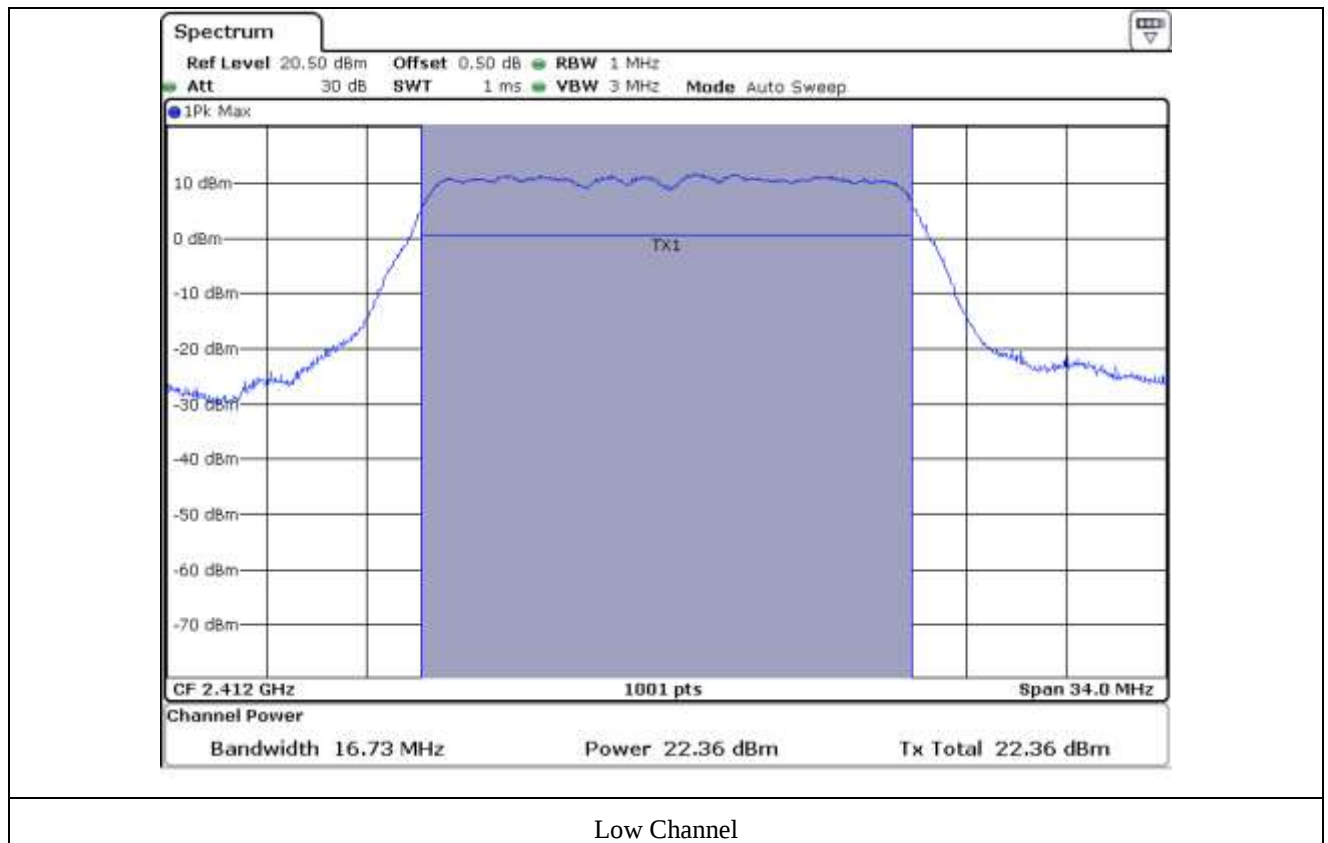

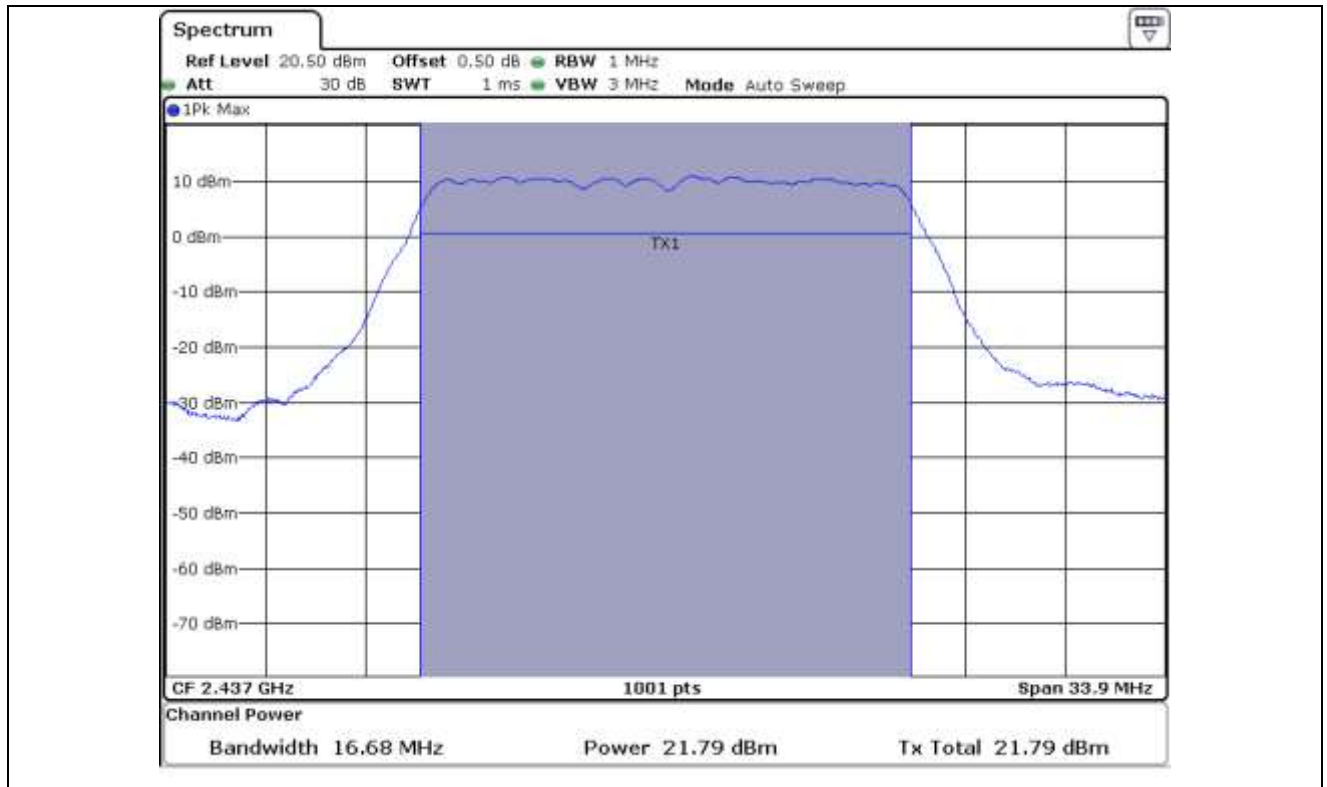

Middle Channel

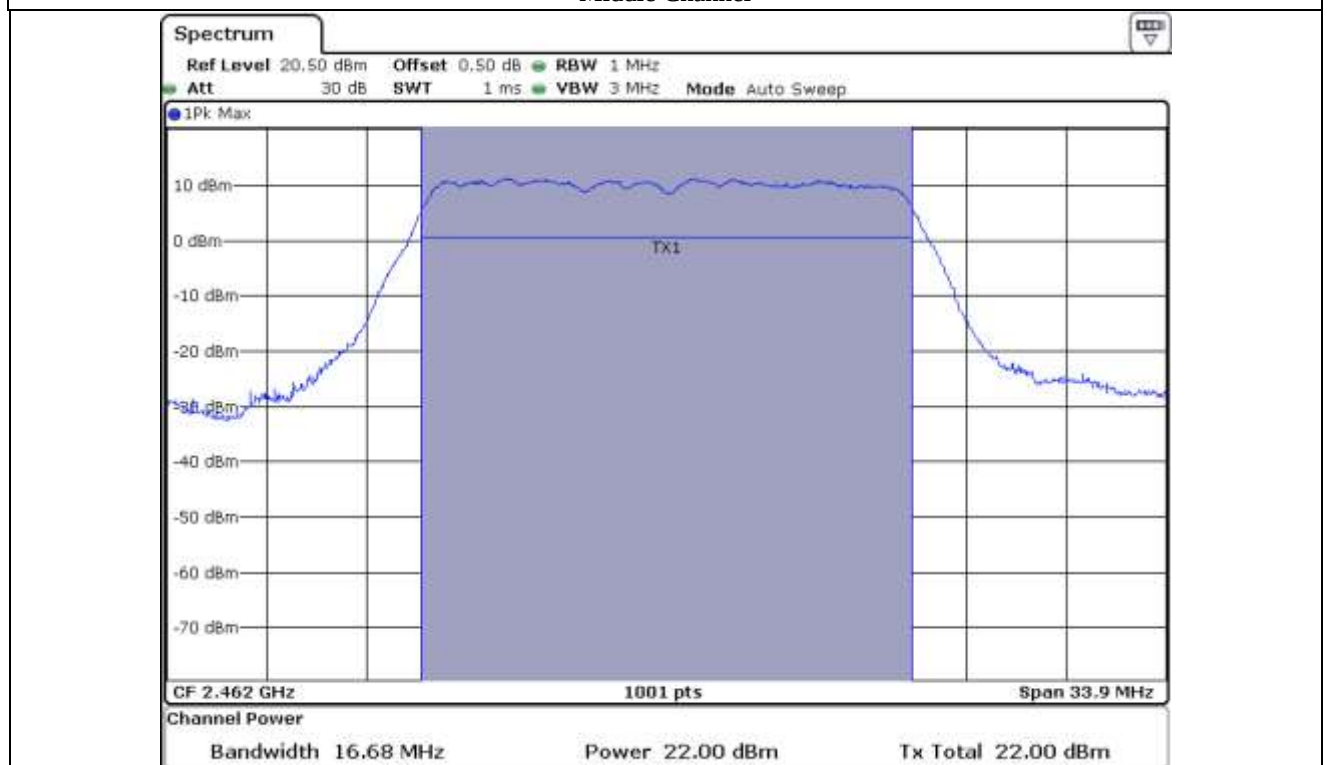

High Channel

8.6 Test data for 802.11n(HT20) WLAN Mode

-. Test Date : May 04, 2020


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB bandwidth (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	17.78	22.29	30.00	7.71
MIDDLE	2 437.00	17.78	21.67	30.00	8.33
HIGH	2 462.00	17.78	21.85	30.00	8.15

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Ha-Ram Lee / Manager

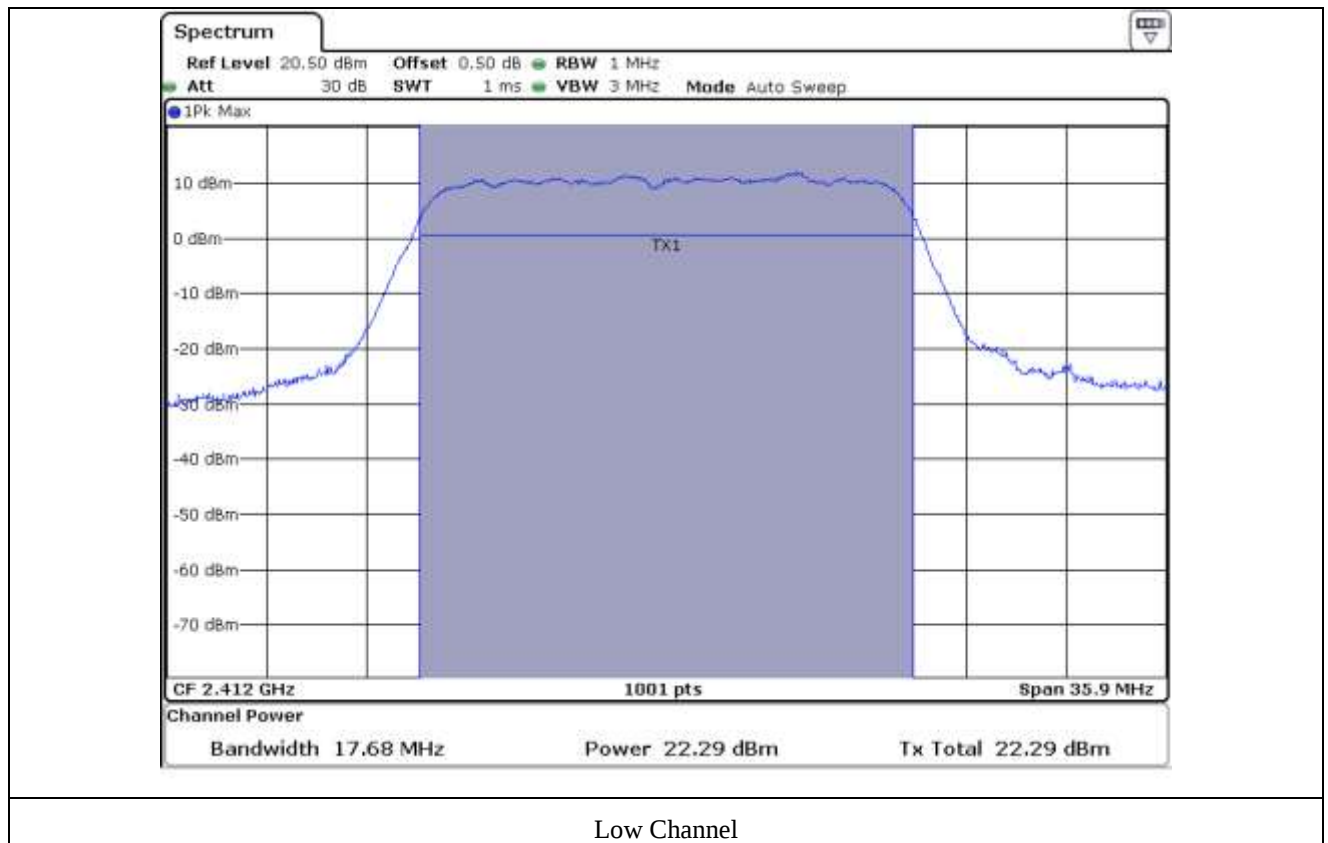

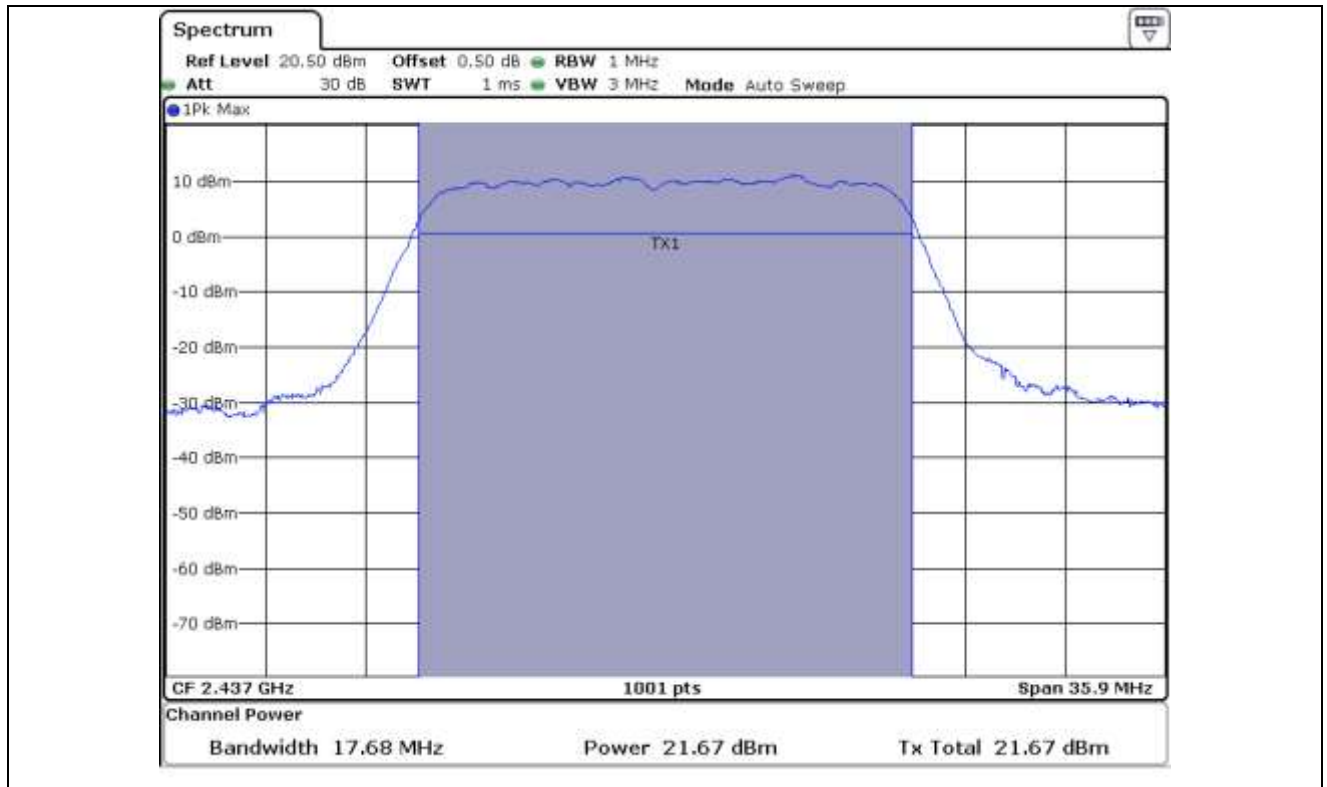

Middle Channel

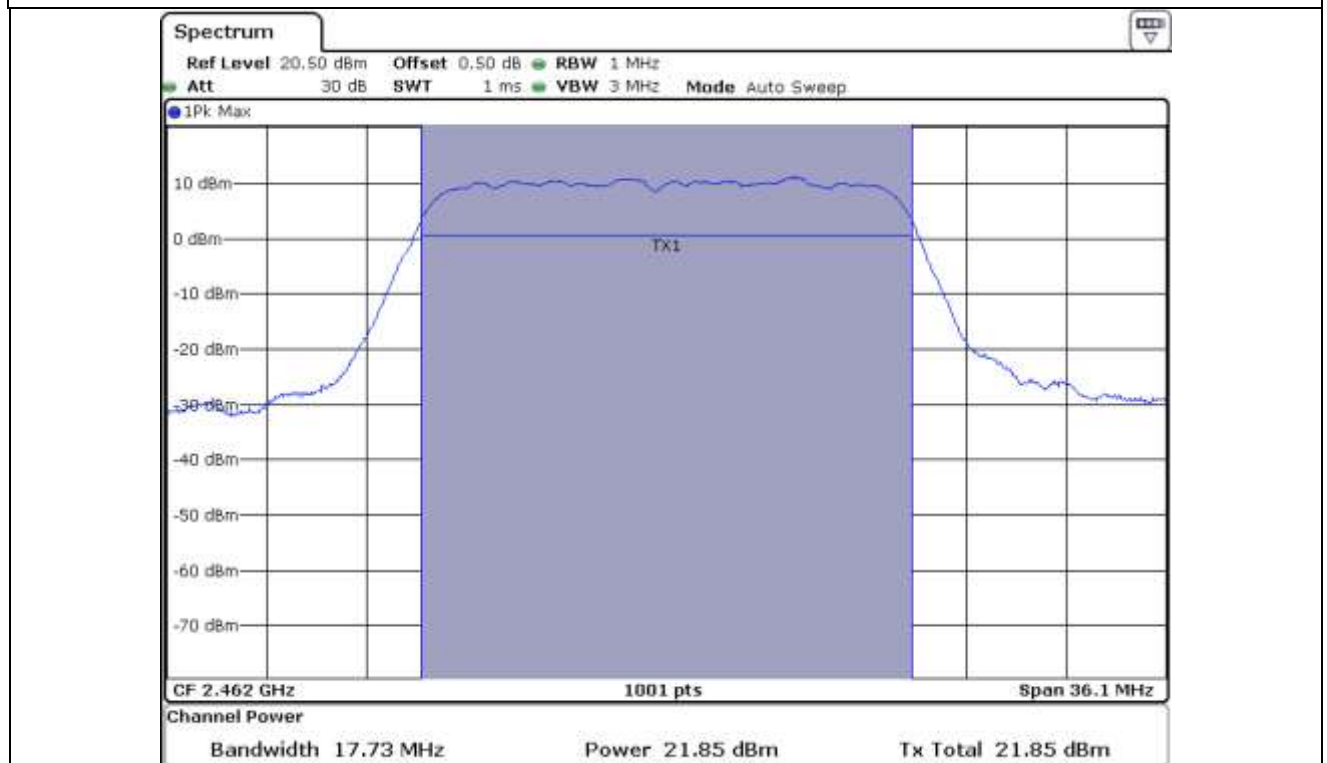

High Channel

8.7 Test data for 802.11n(HT40) WLAN Mode

-. Test Date : May 04, 2020


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB bandwidth (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	36.55	21.71	30.00	8.29
MIDDLE	2 437.00	36.54	21.29	30.00	8.71
HIGH	2 452.00	36.52	21.57	30.00	8.43

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Ha-Ram Lee / Manager

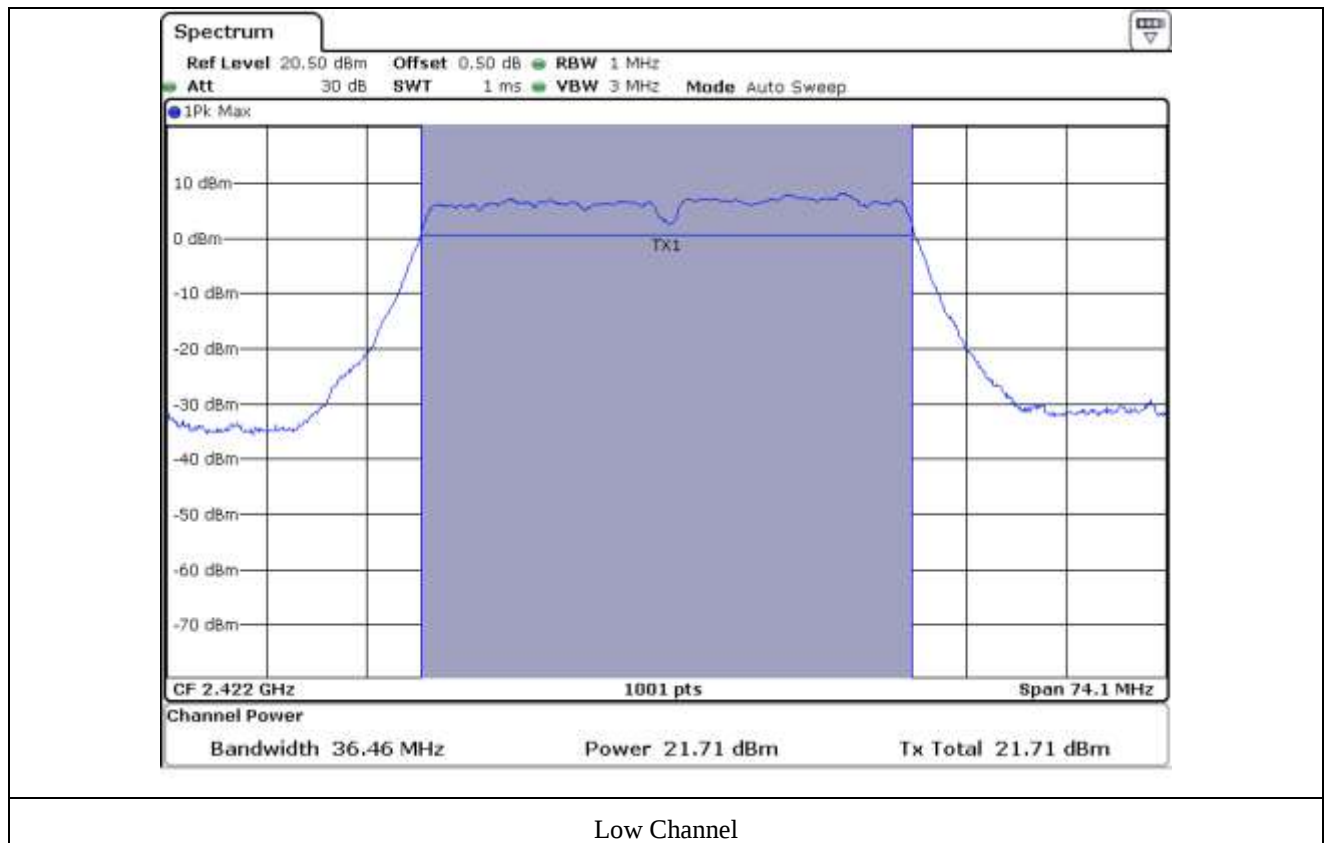

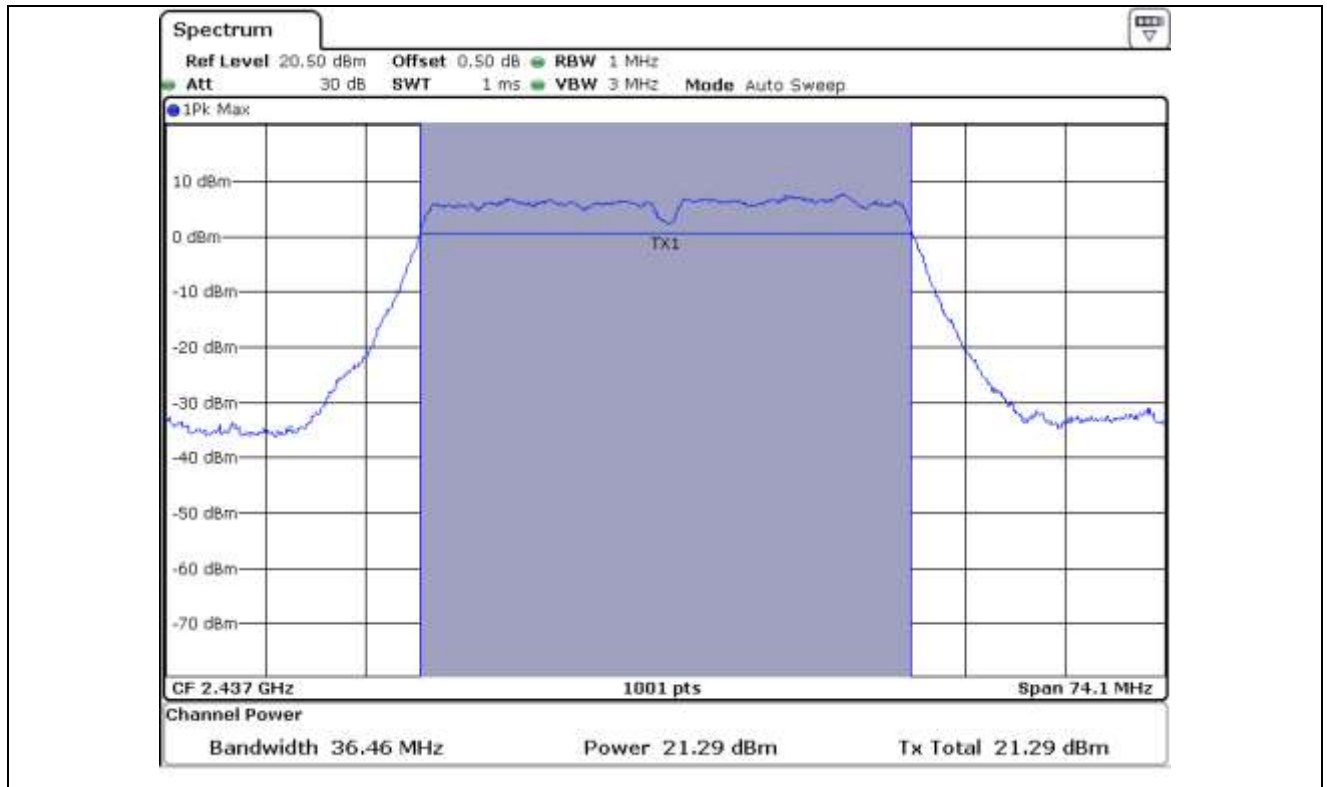

Middle Channel

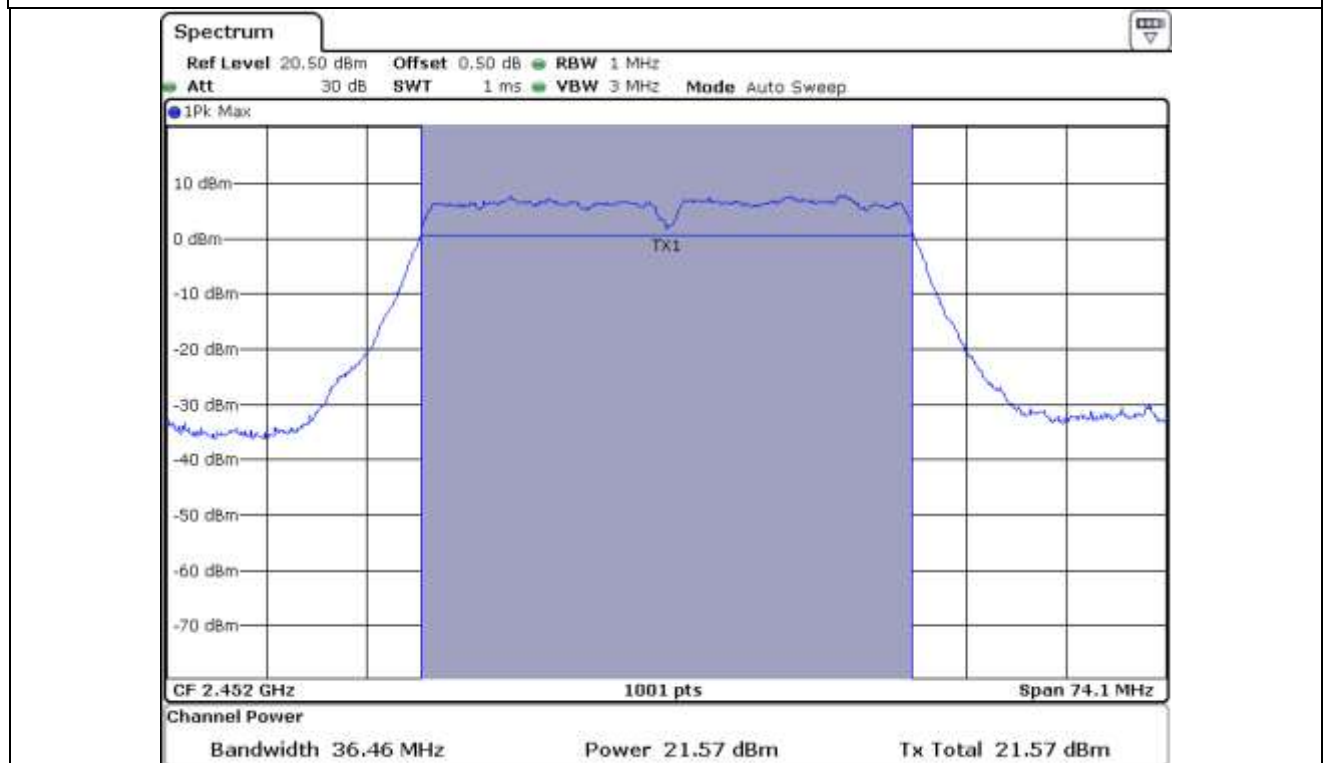

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

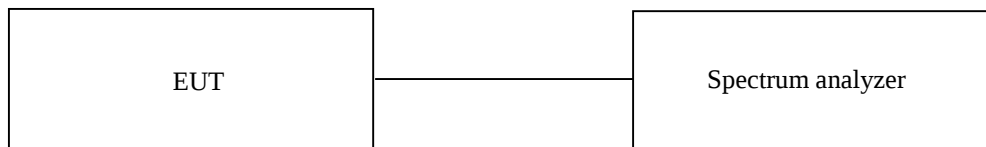

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable above the ground plane.

The frequency spectrum from 30 MHz to 40 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2019 (1Y)
■ -	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 18, 2019 (1Y)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)
■ -	SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 24, 2019 (1Y)
■ -	MA240	HD GmbH	Antenna Master	N/A	N/A
■ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DS420S	HD GmbH	Turn Table	N/A	N/A
■ -	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	Jun. 05, 2018 (2Y)
■ -	3115	ETS-LINDGREN	Horn Antenna	34823	Aug. 26, 2019 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020 (1Y)
■ -	SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Feb. 20, 2020 (1Y)

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

9.5.1 Test data for 802.11b WLAN Mode

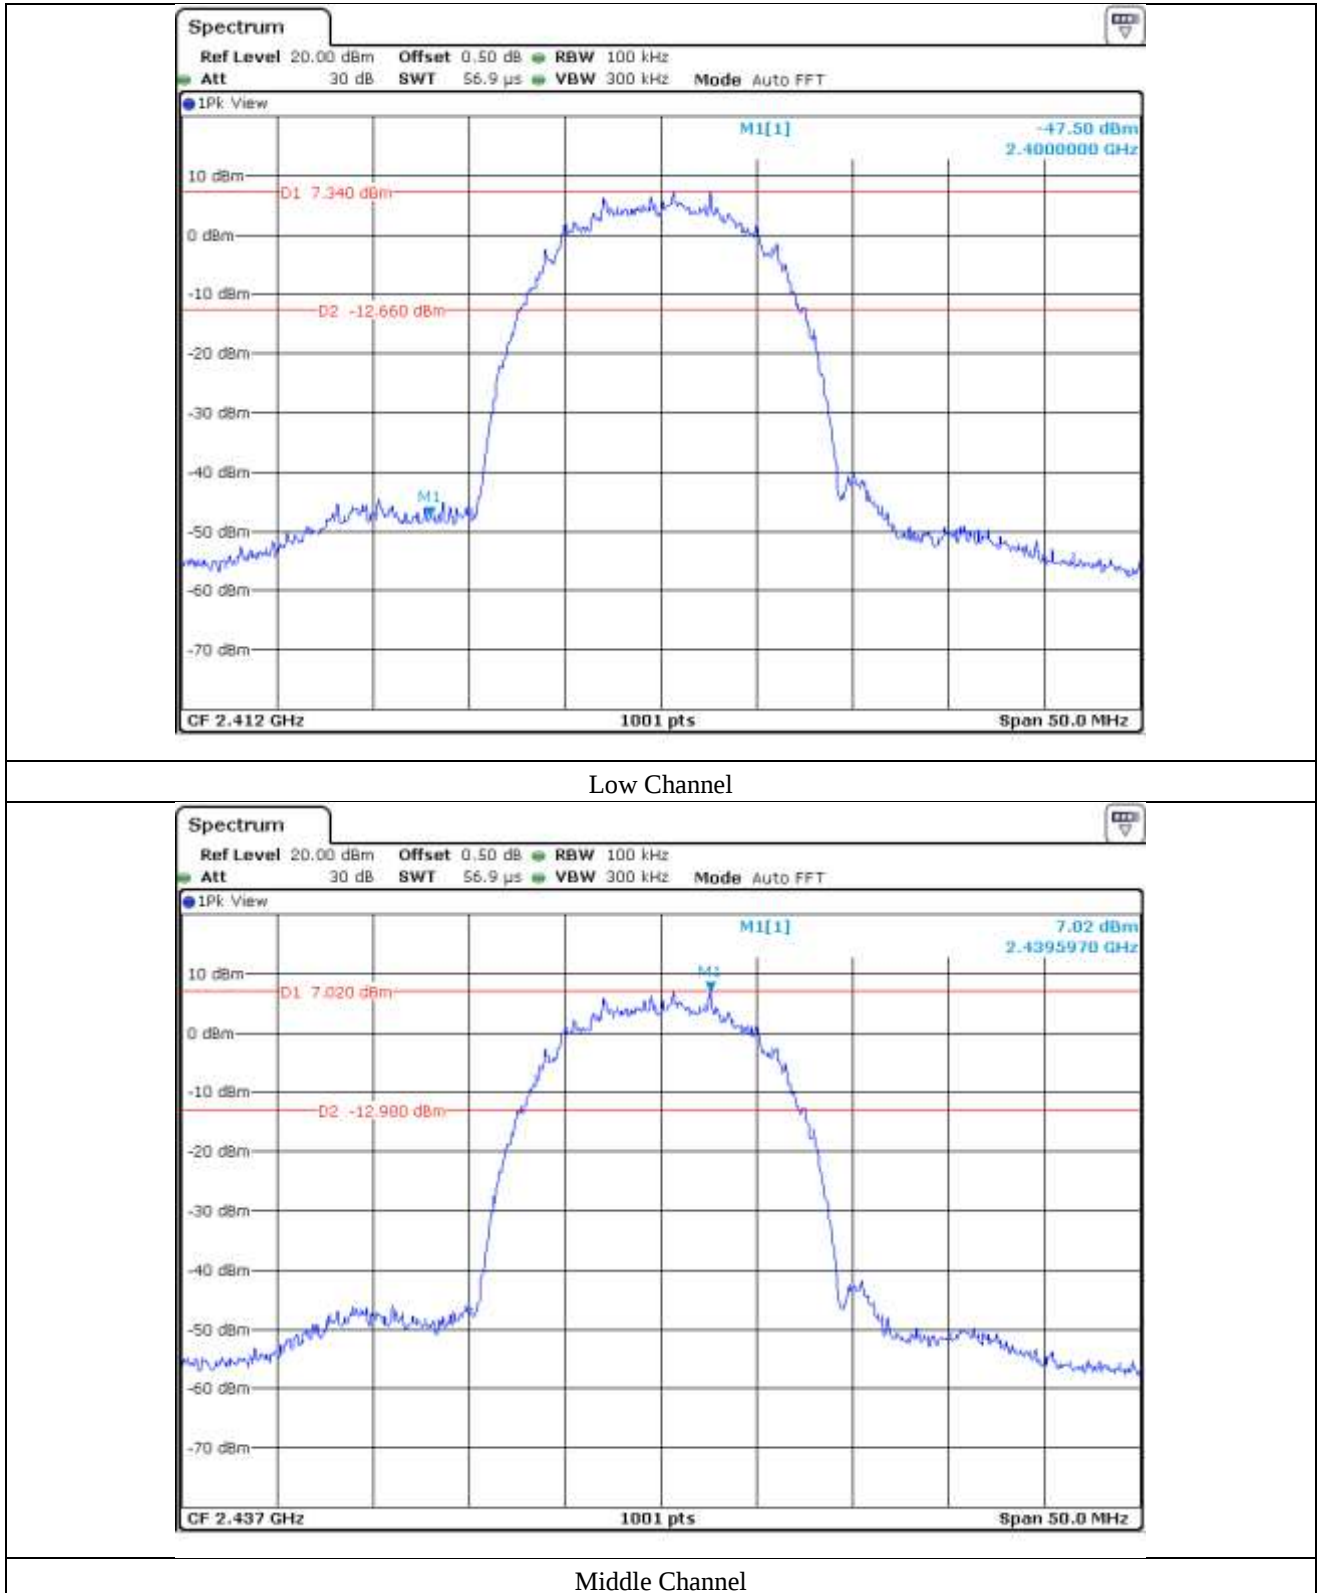


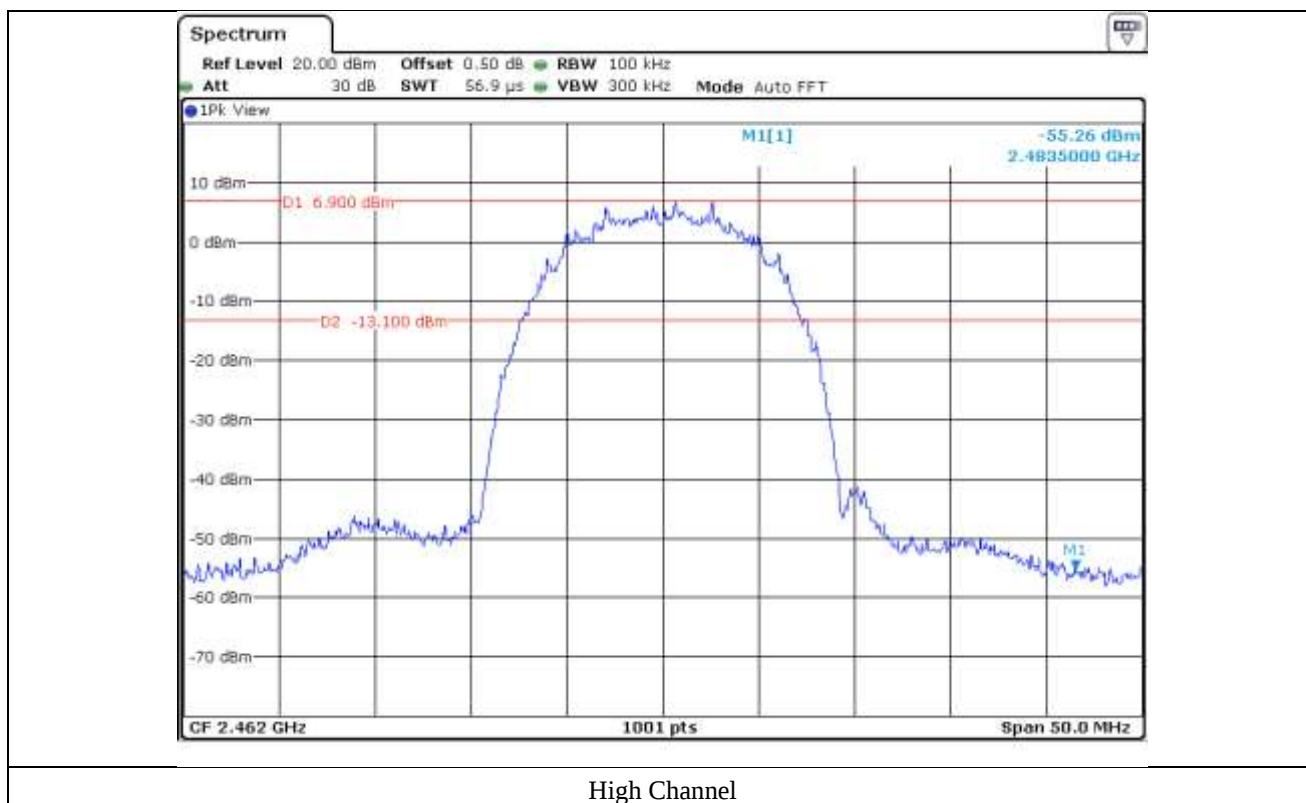


High Channel

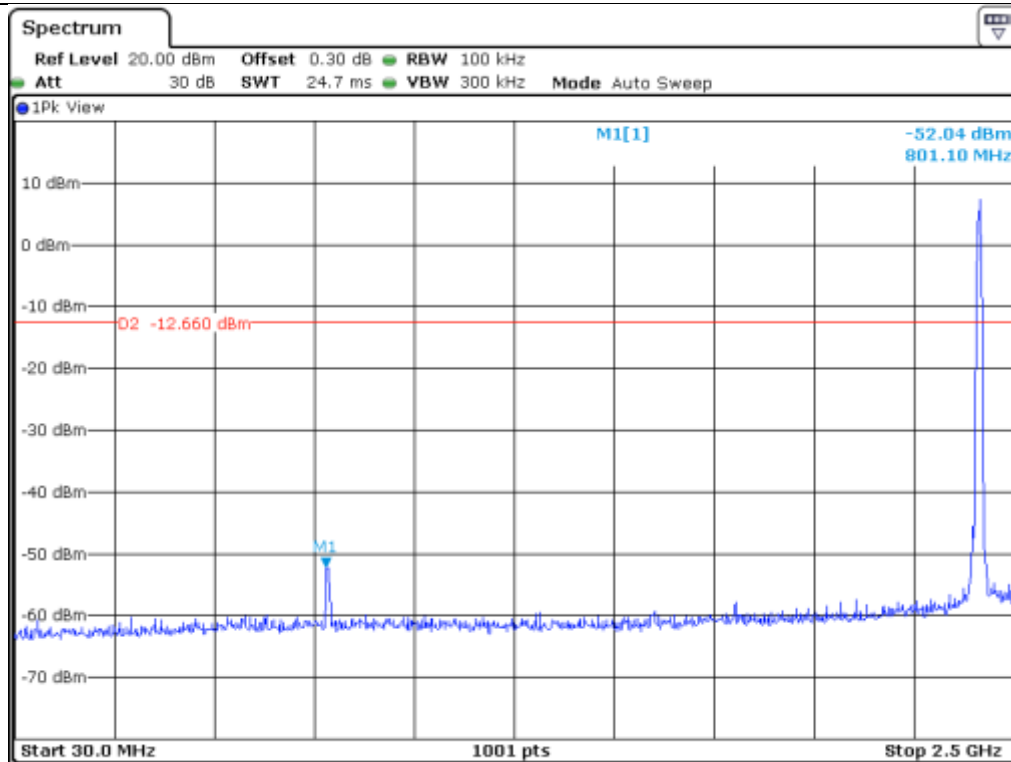


Low Channel

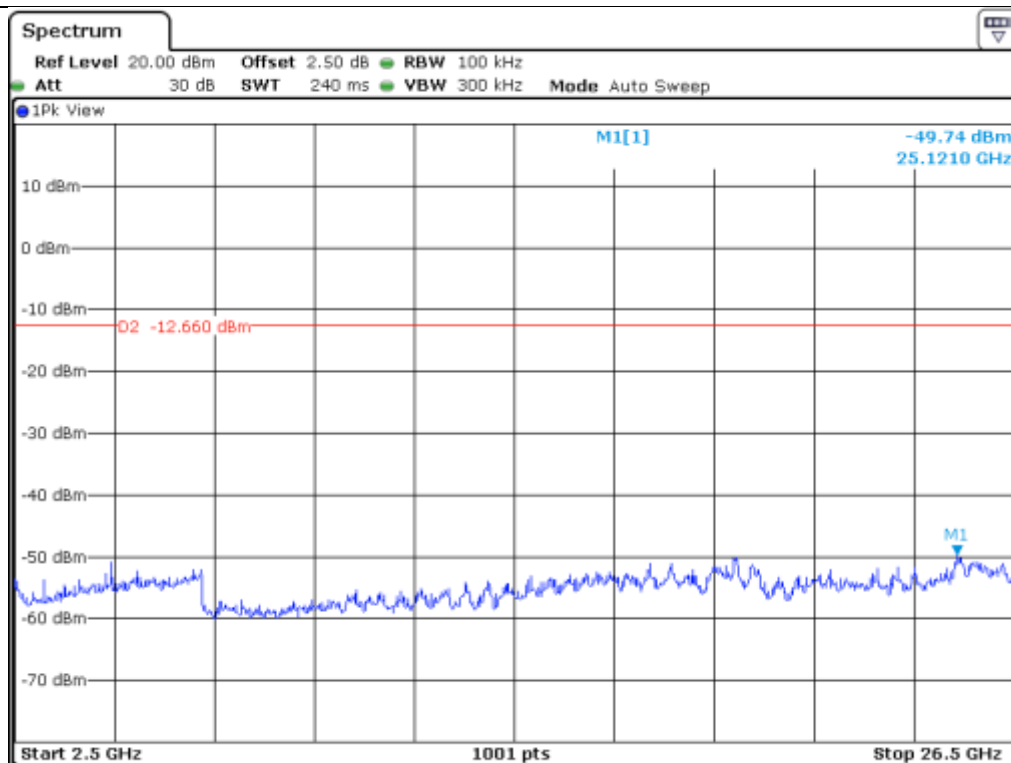


Low Channel

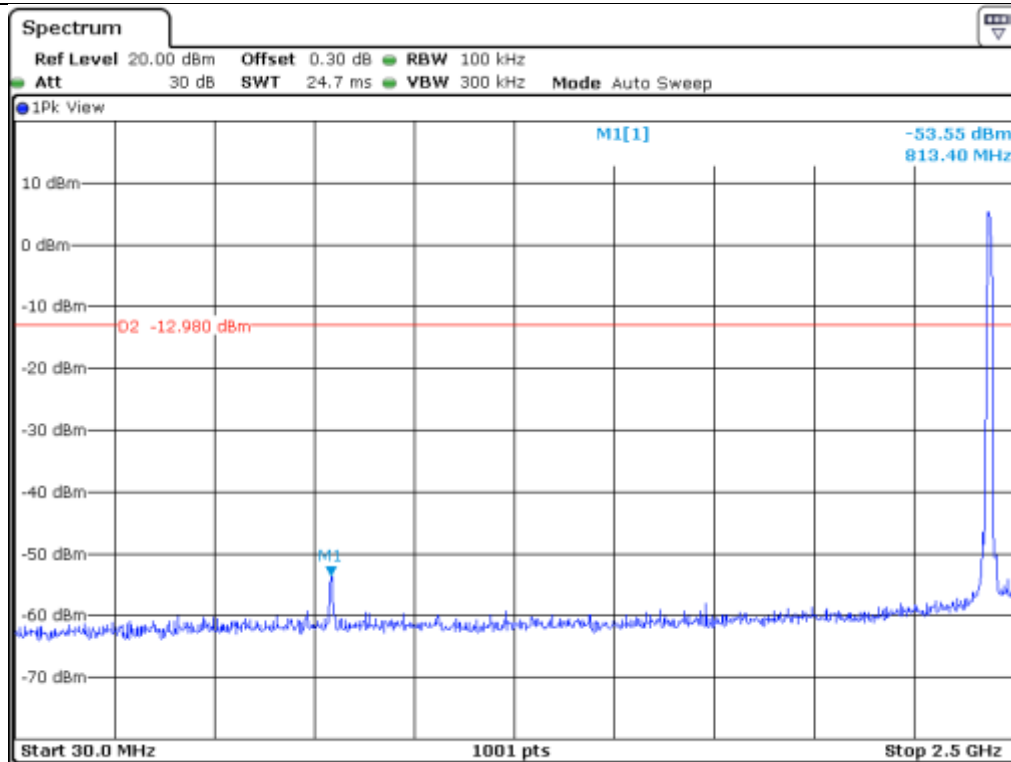


Middle Channel

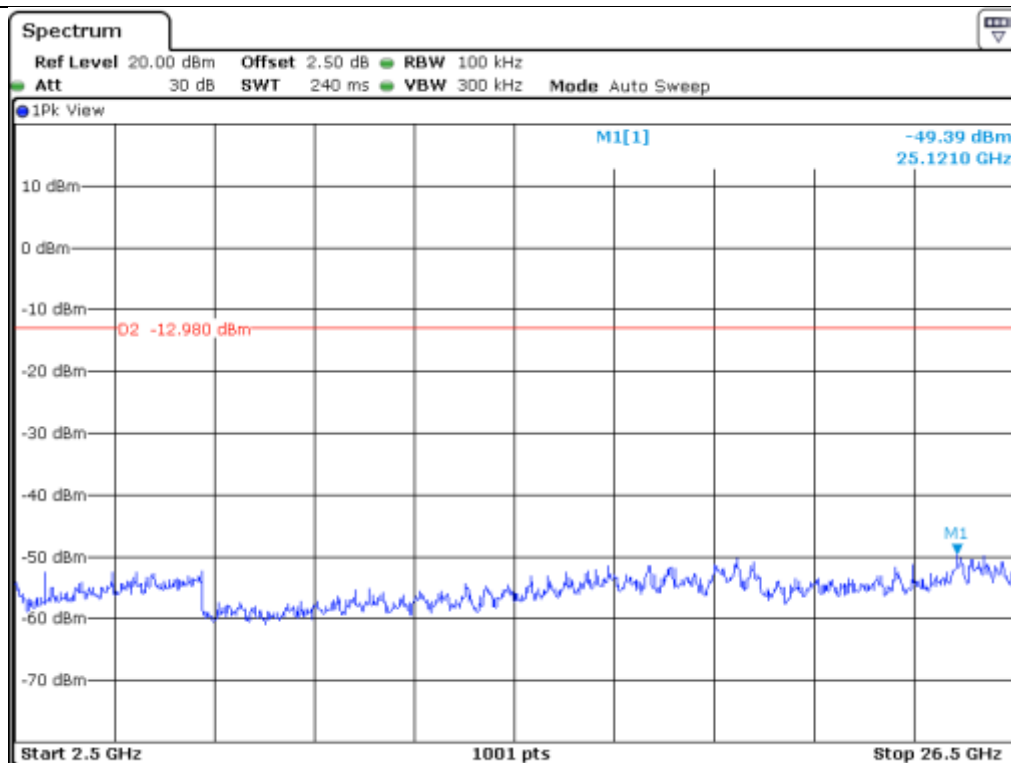

Middle Channel

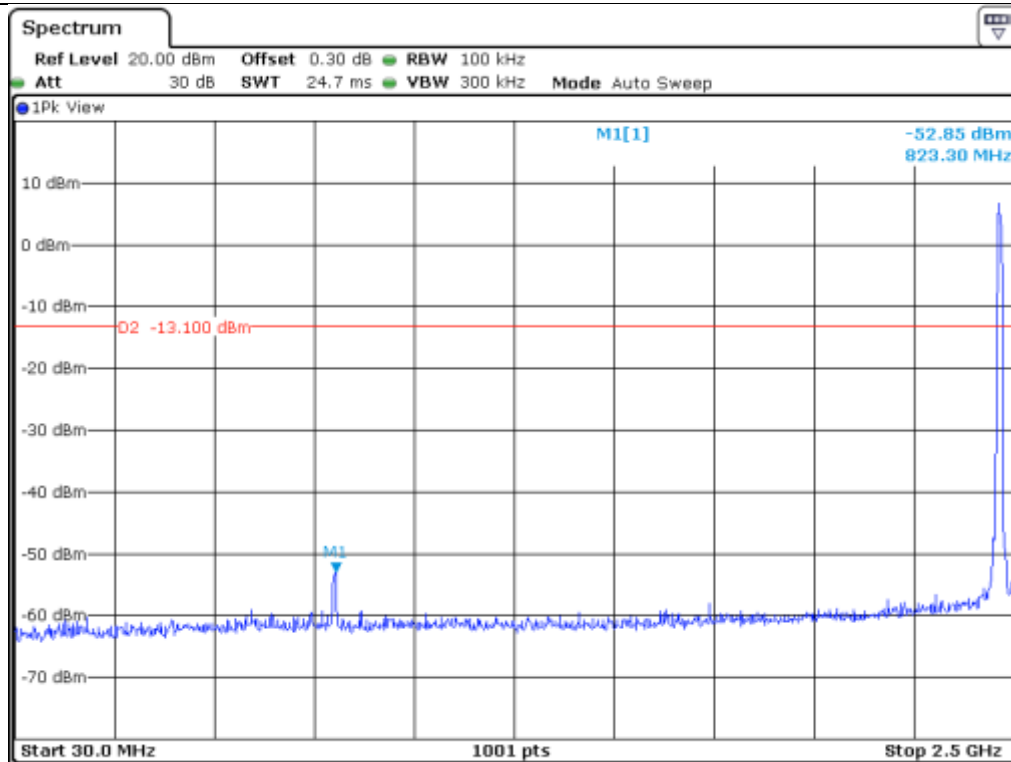



High Channel

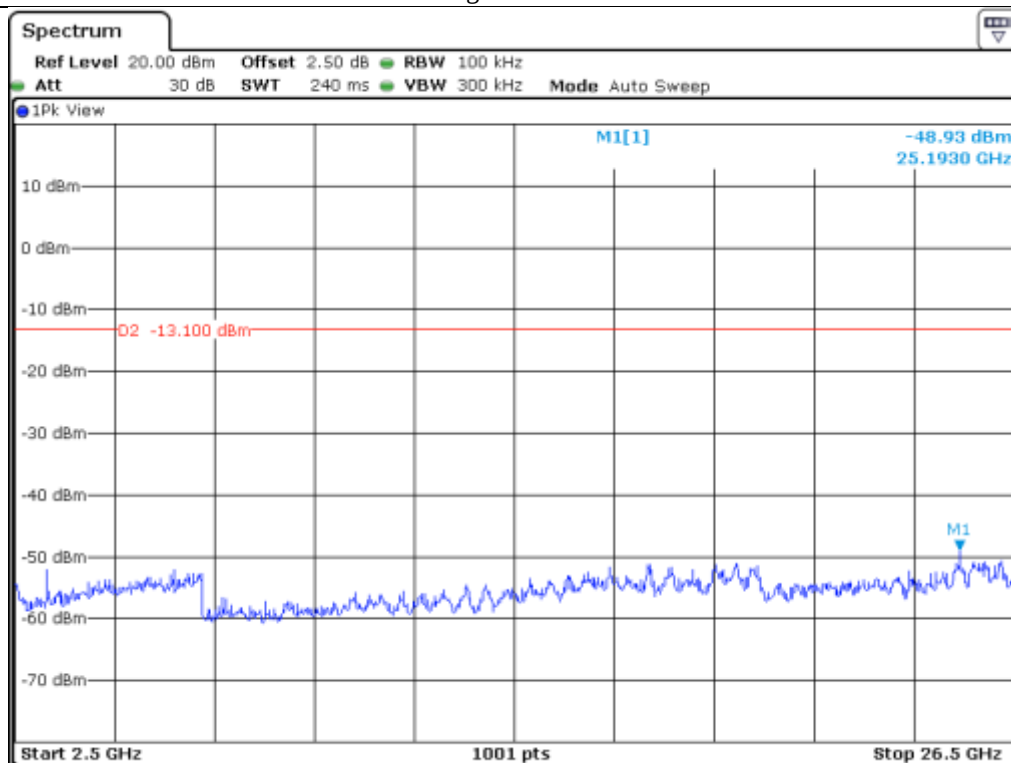


High Channel


9.5.2 Test data for 802.11g WLAN Mode

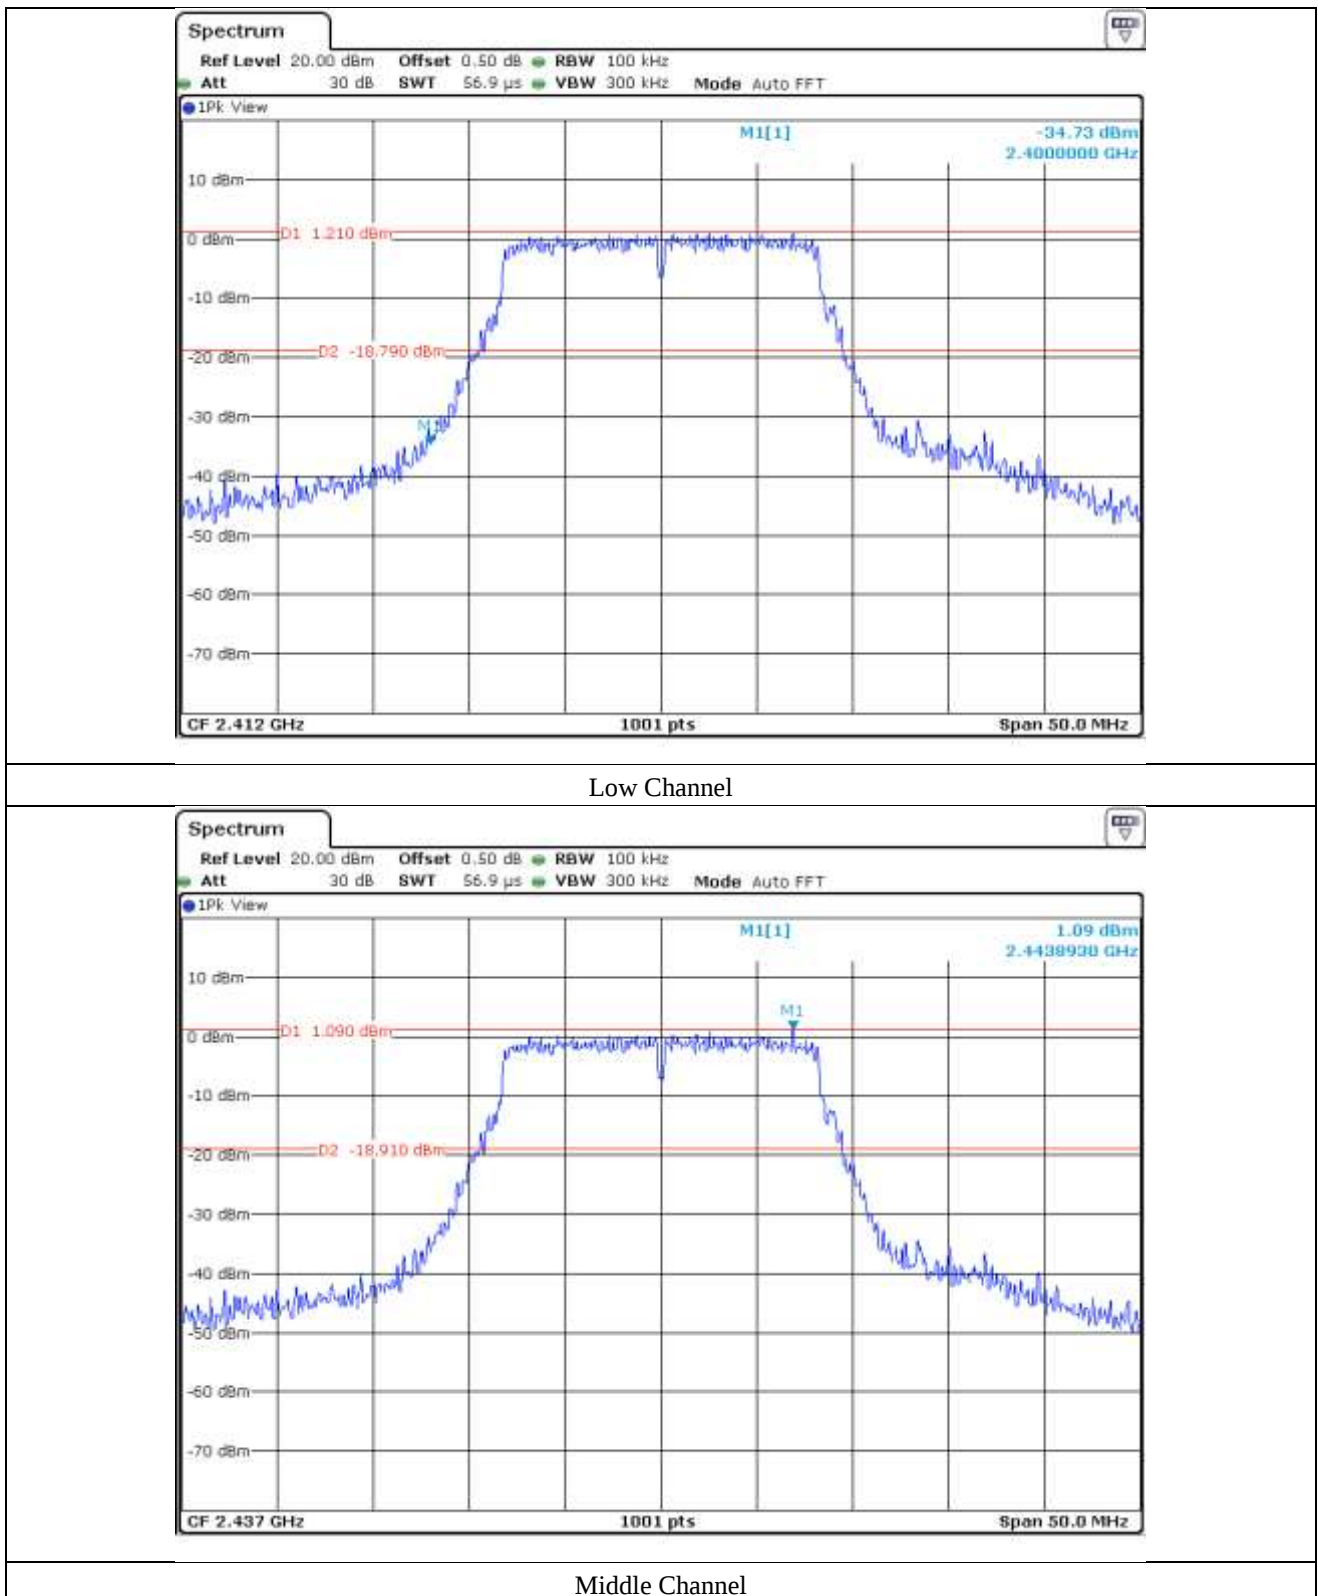

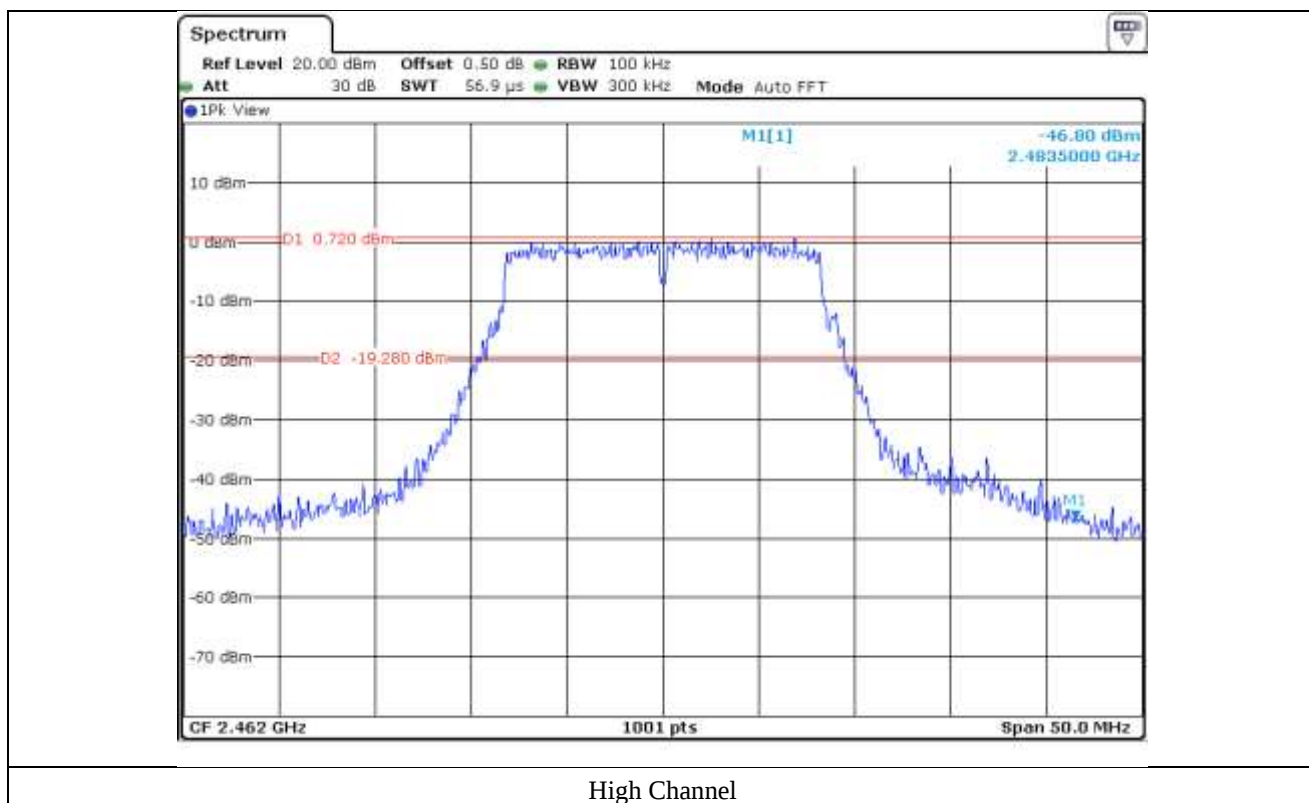


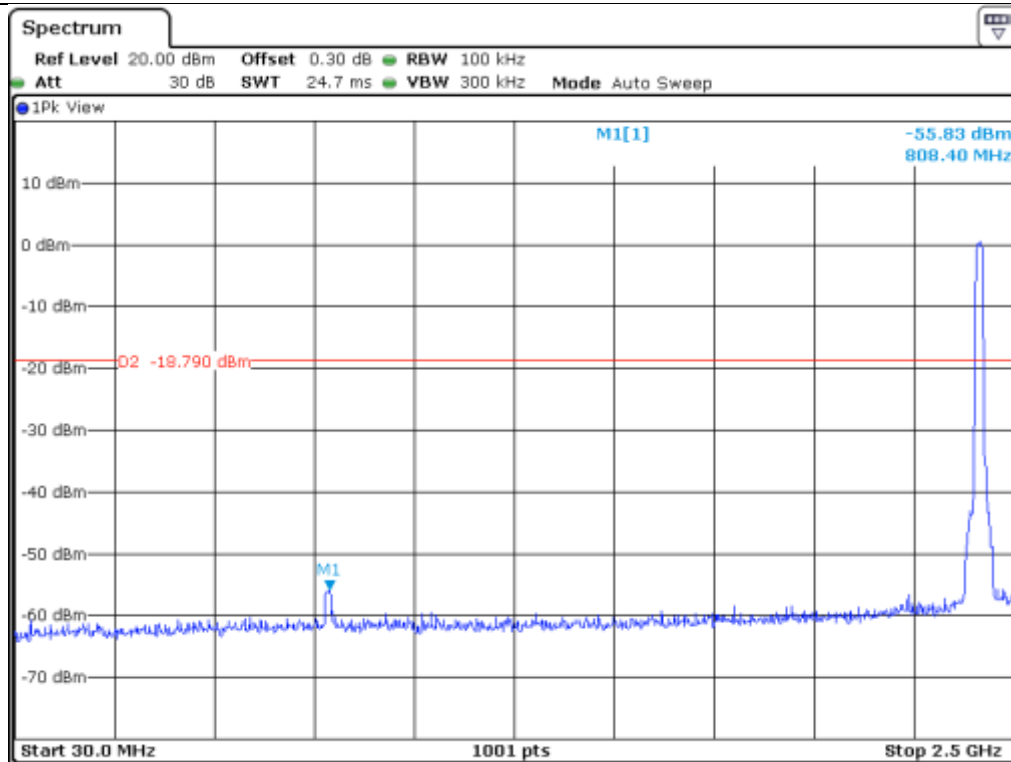


Low Channel

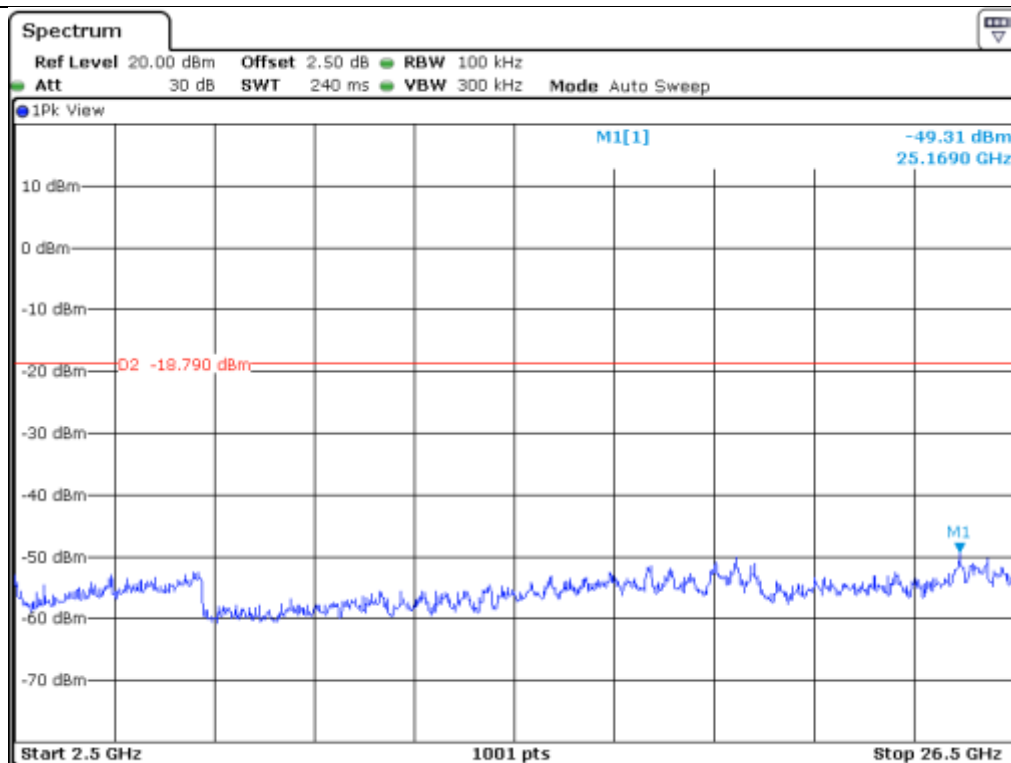


Low Channel

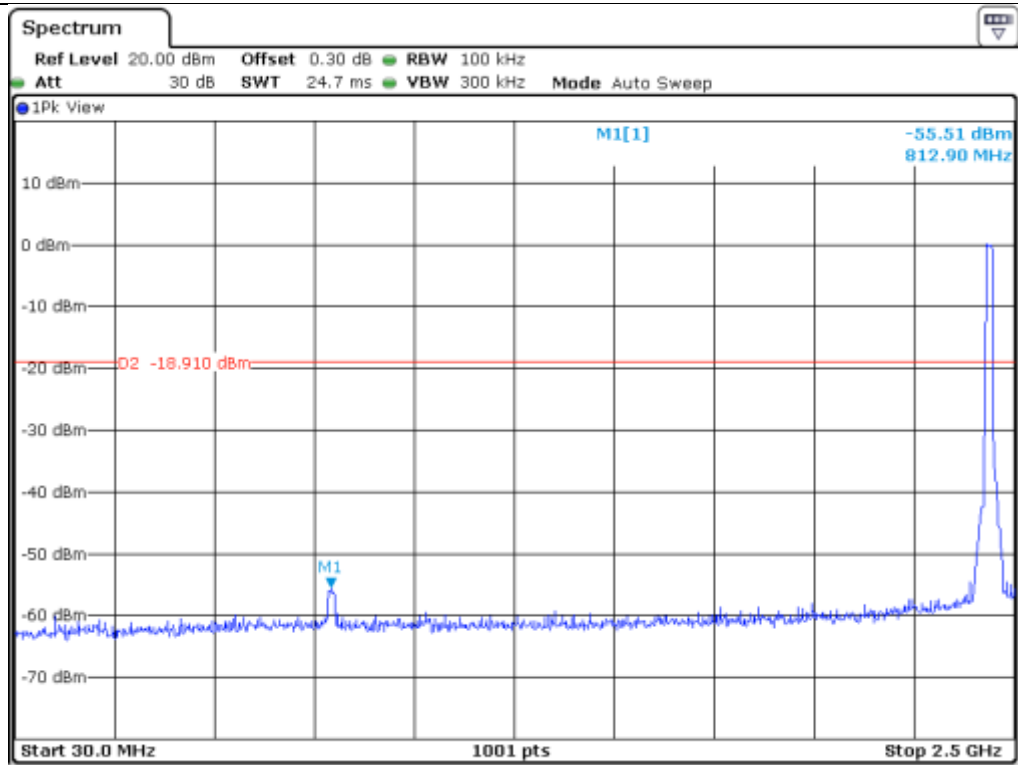


Middle Channel

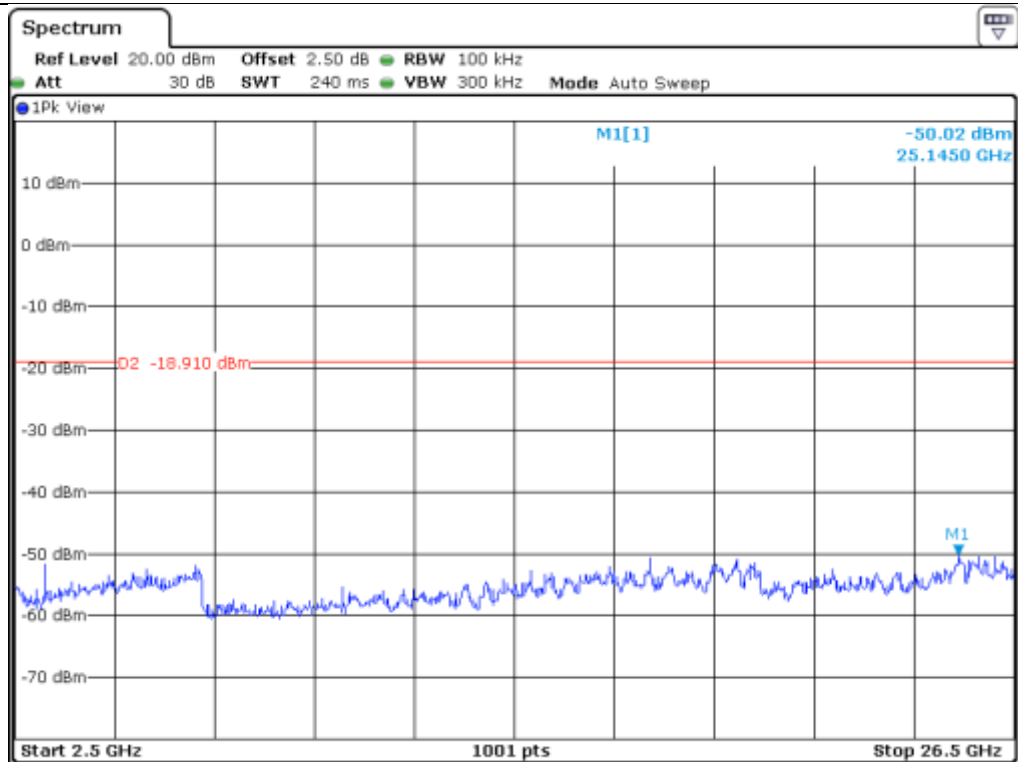

Middle Channel

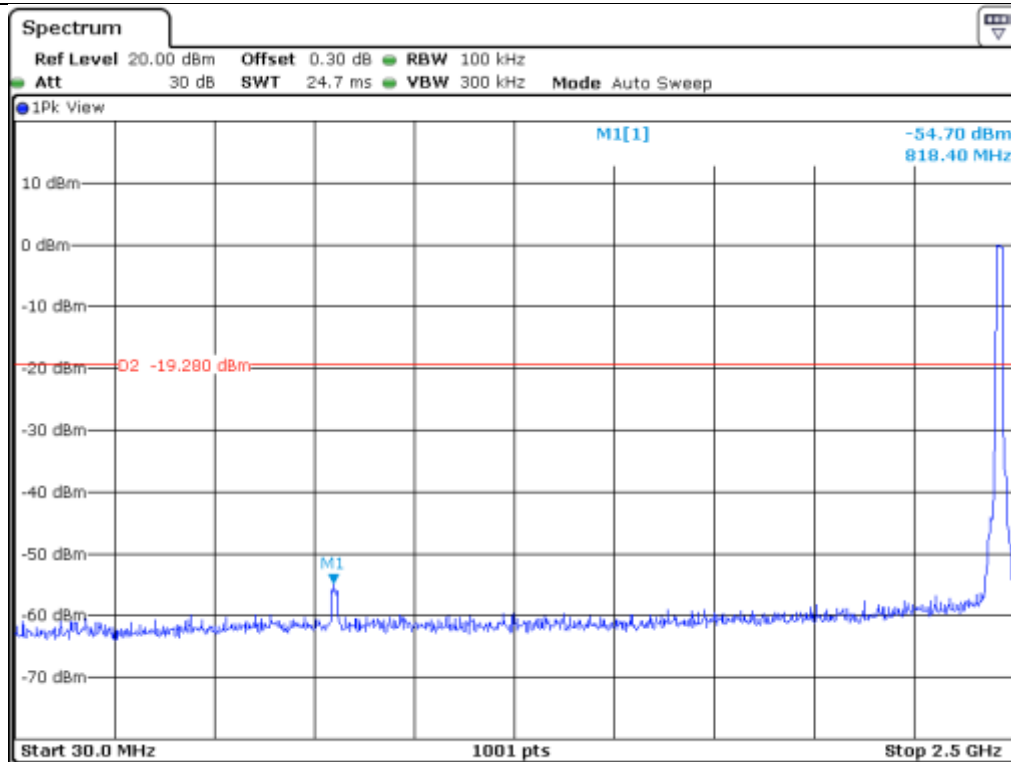



High Channel

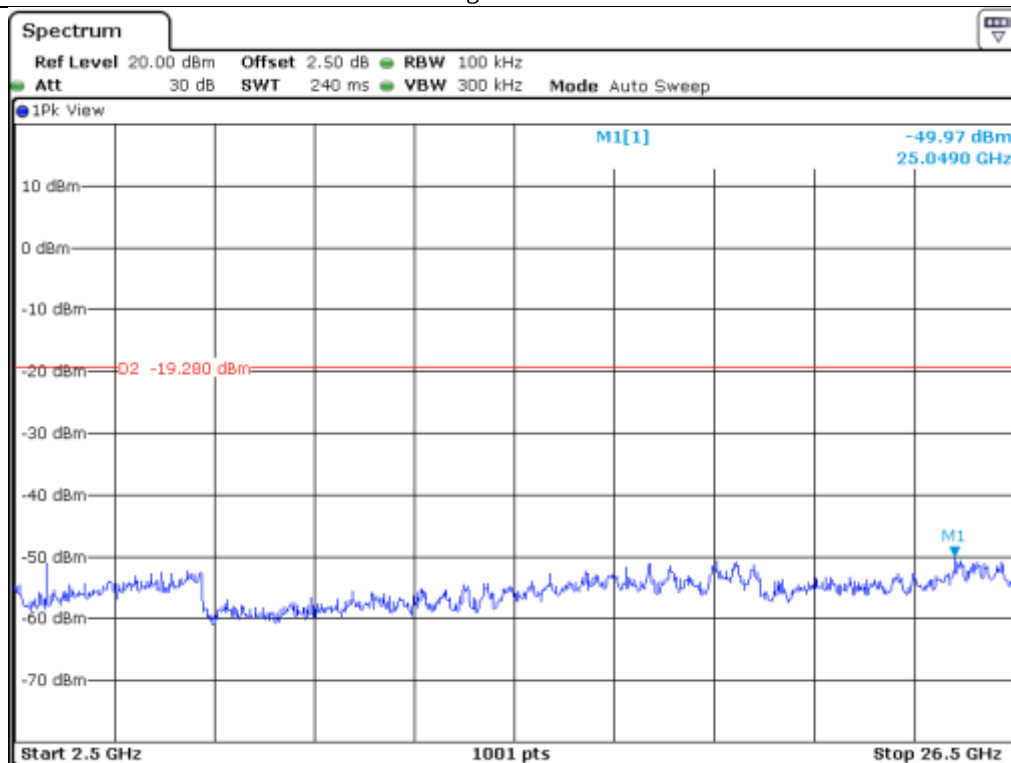


High Channel

9.5.3 Test data for 802.11n (HT20) WLAN Mode

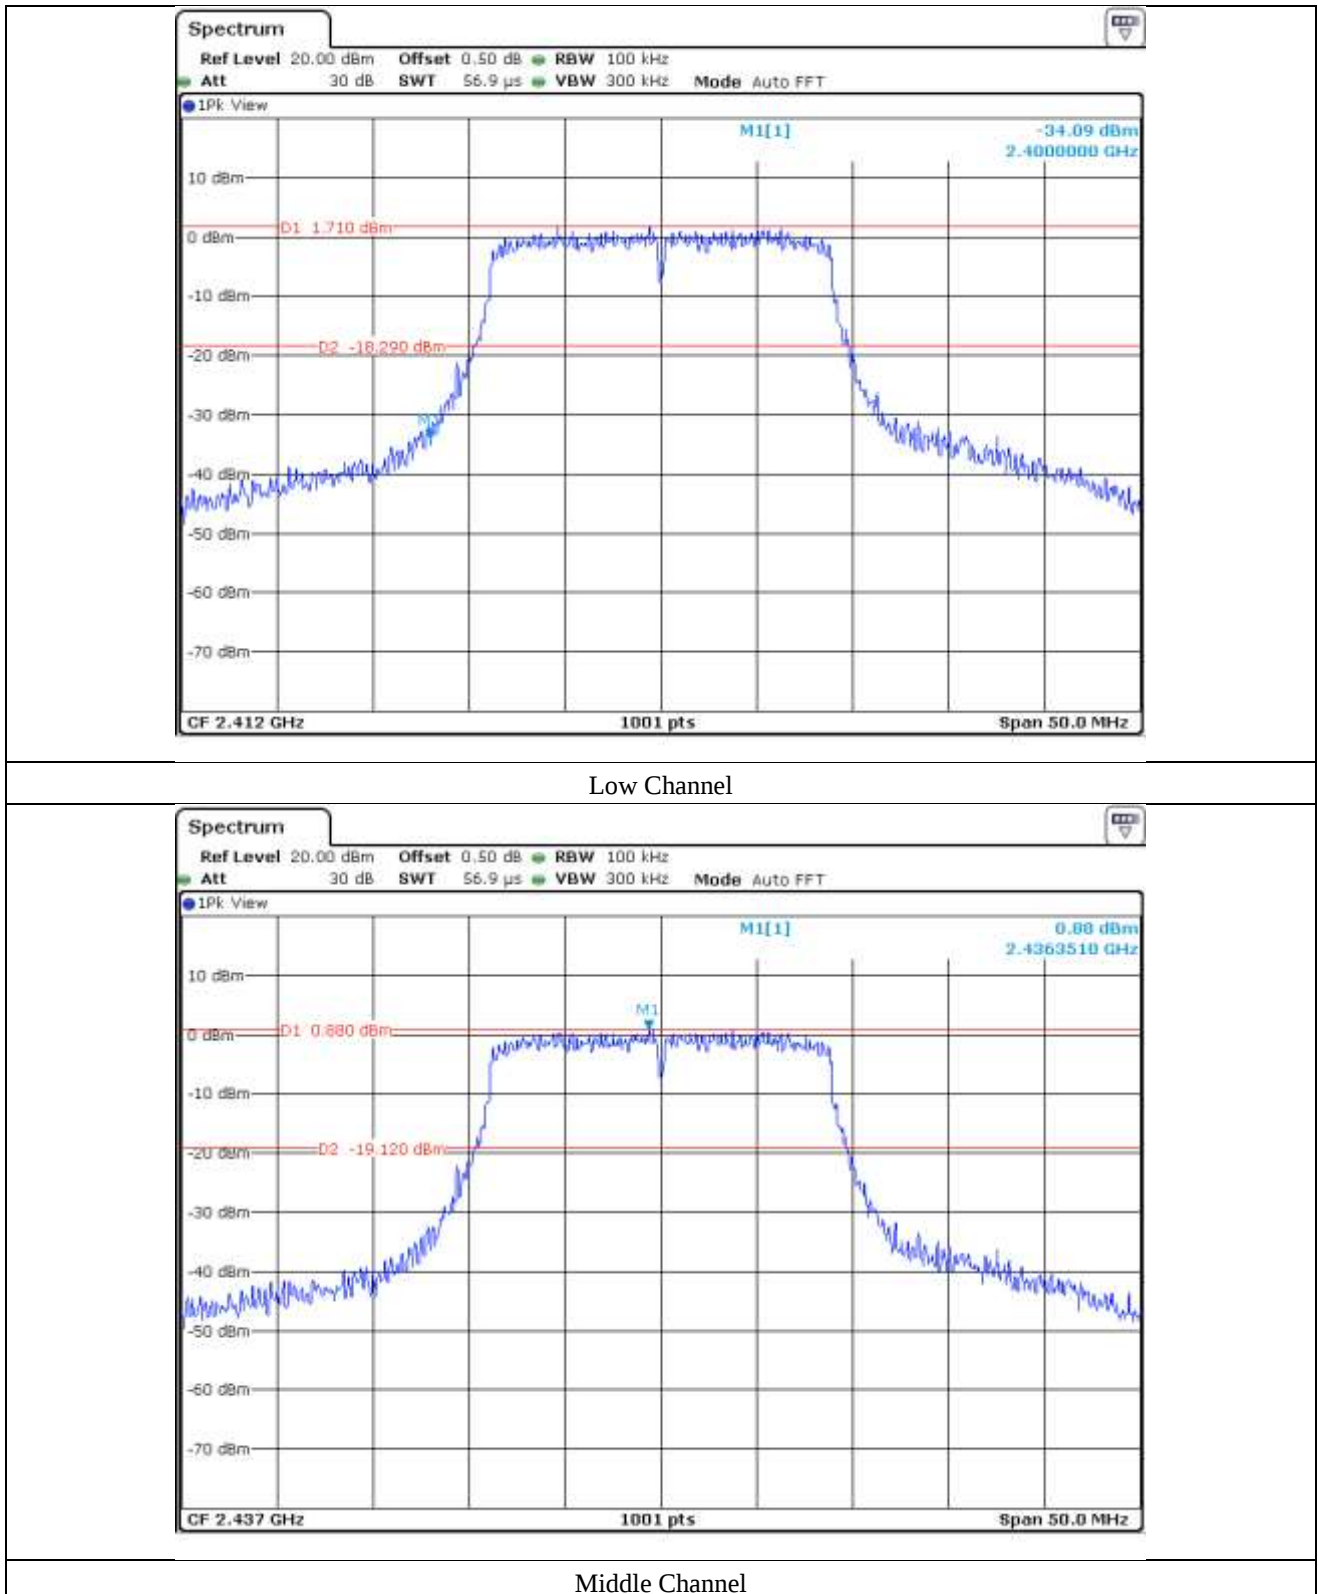


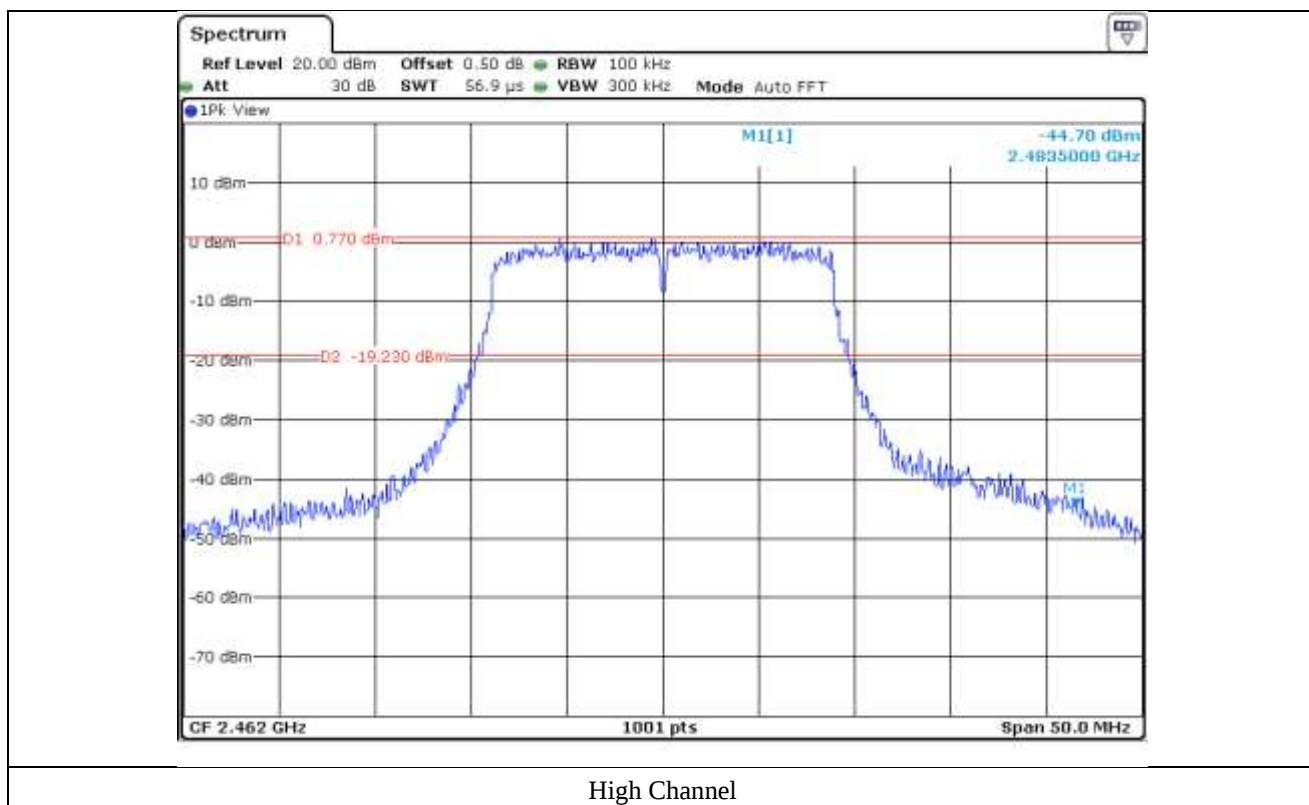


High Channel

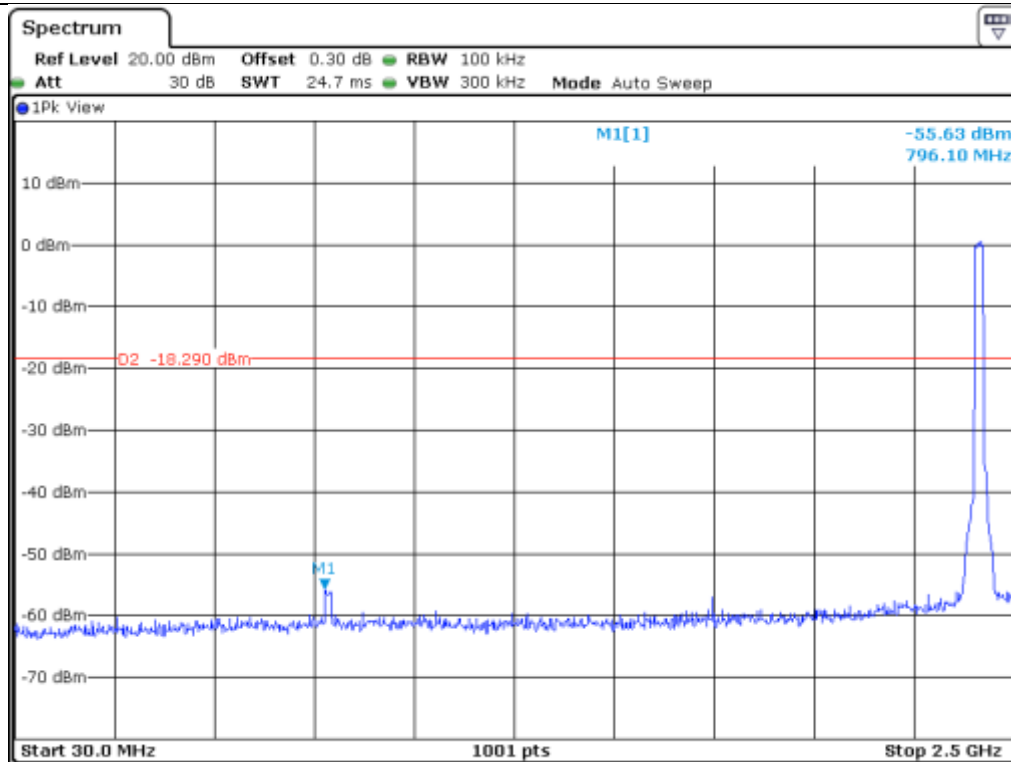


Low Channel

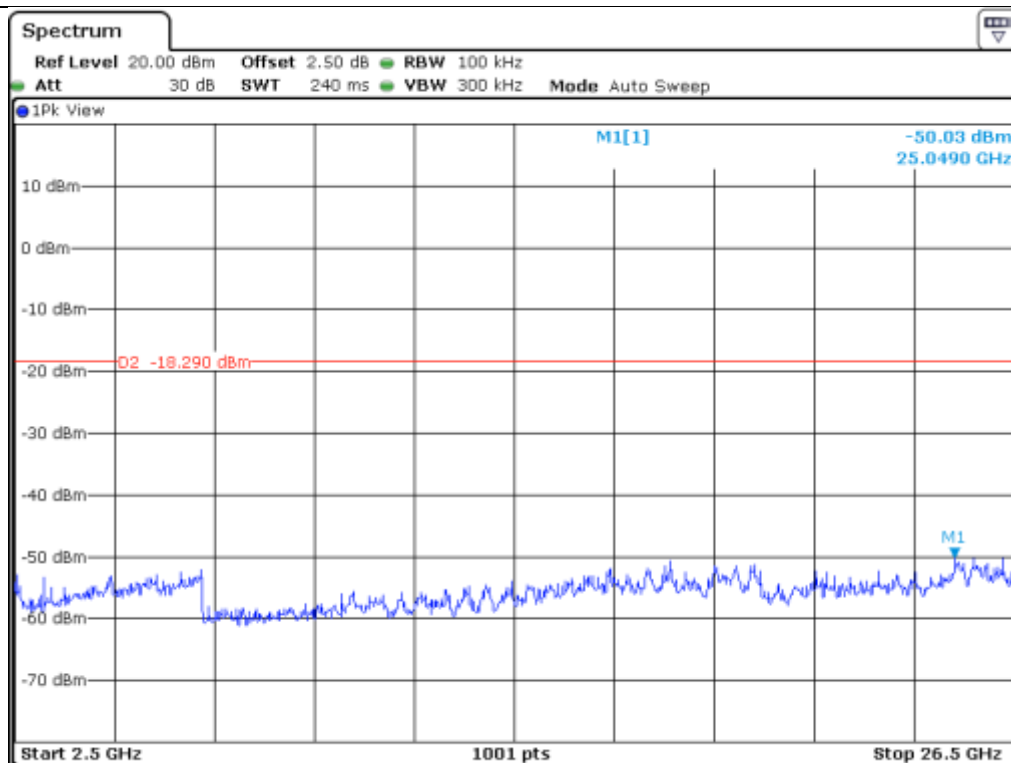


Low Channel

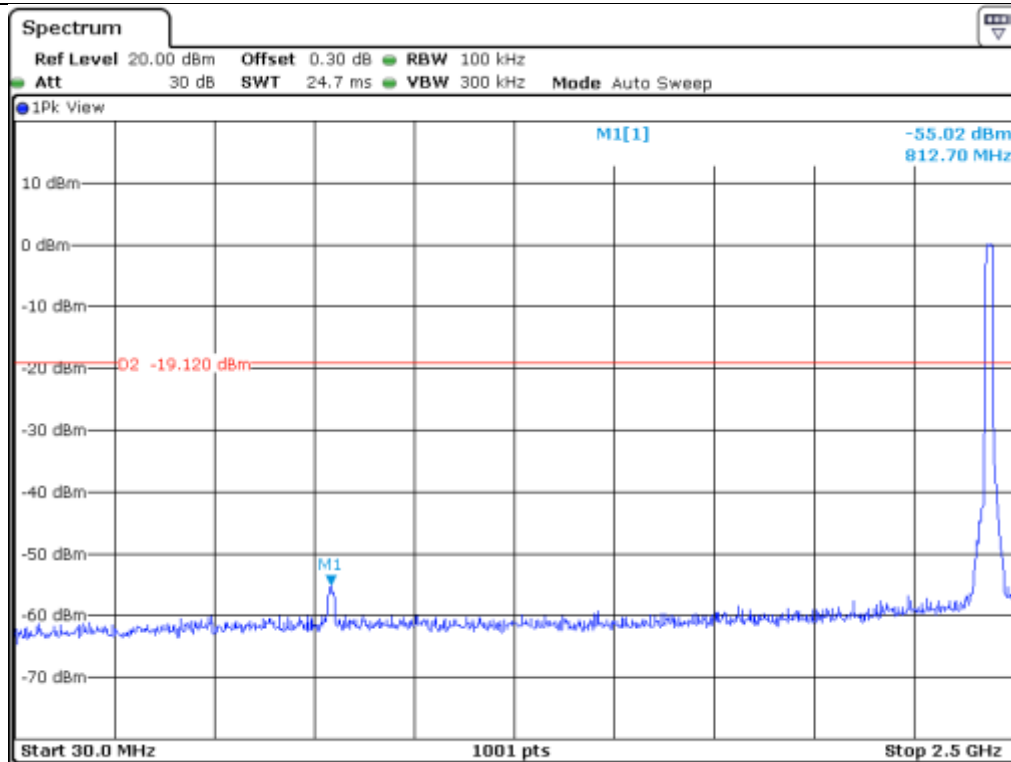


Middle Channel

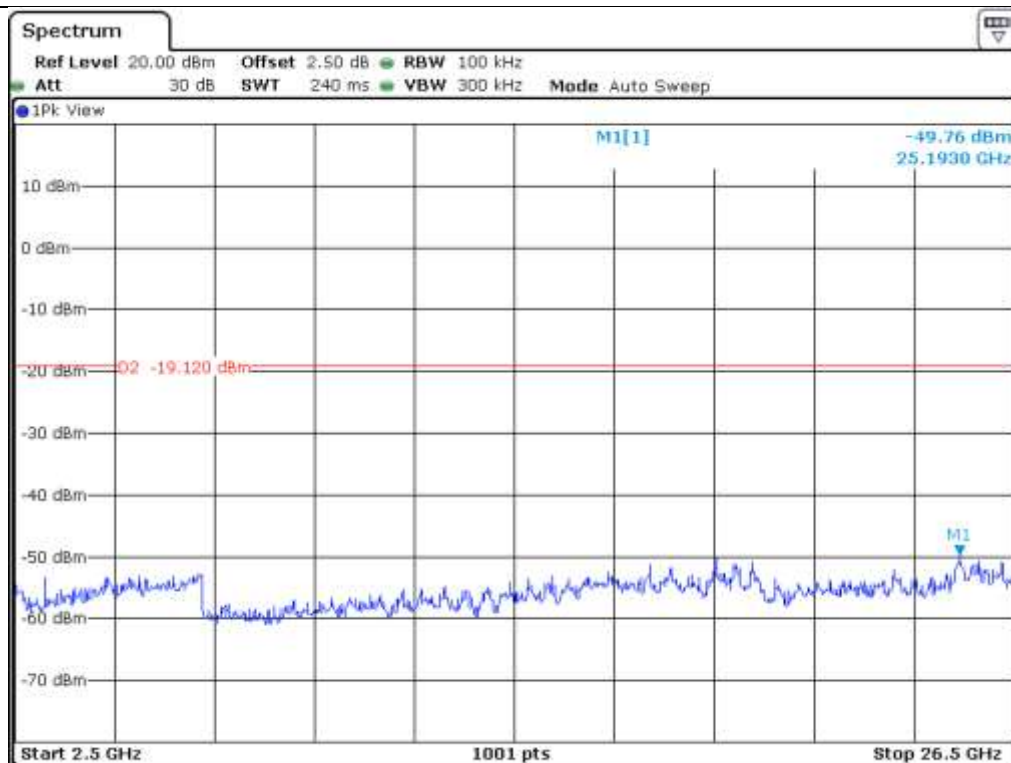

Middle Channel

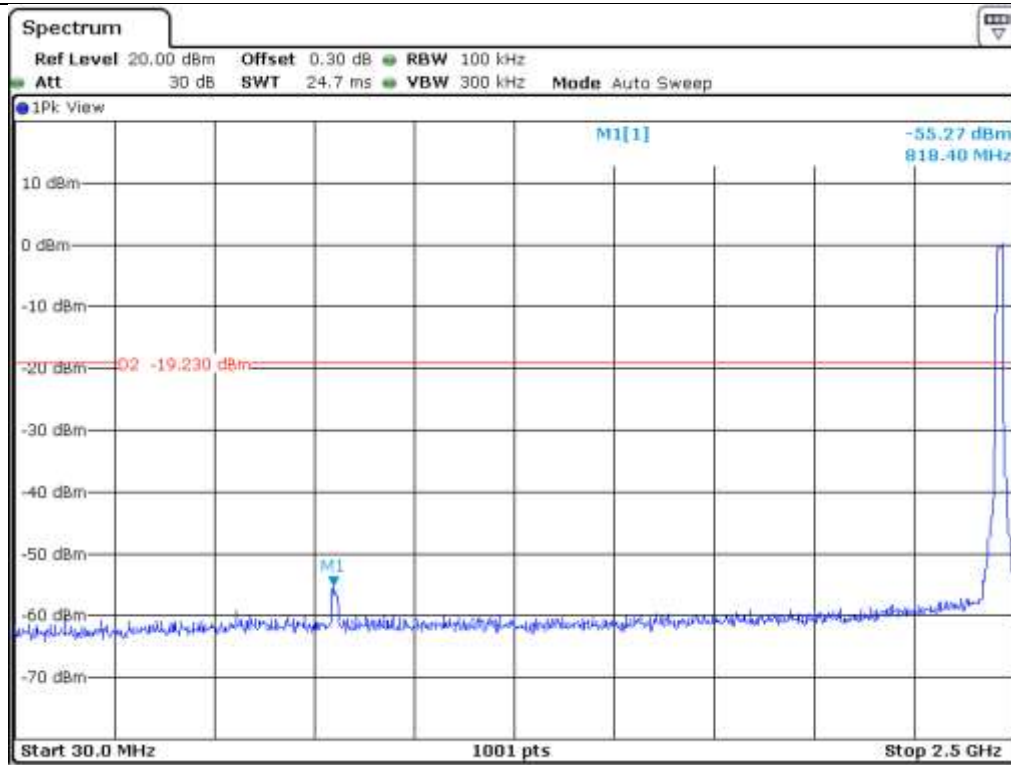


High Channel

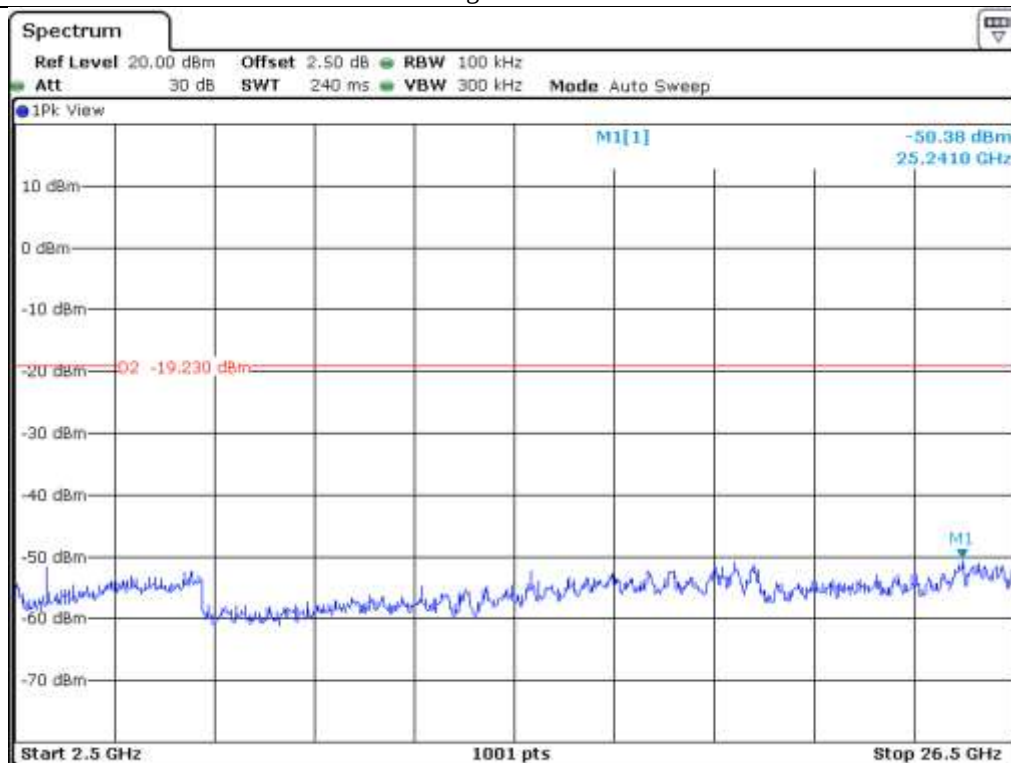


High Channel


9.5.4 Test data for 802.11n (HT40) WLAN Mode

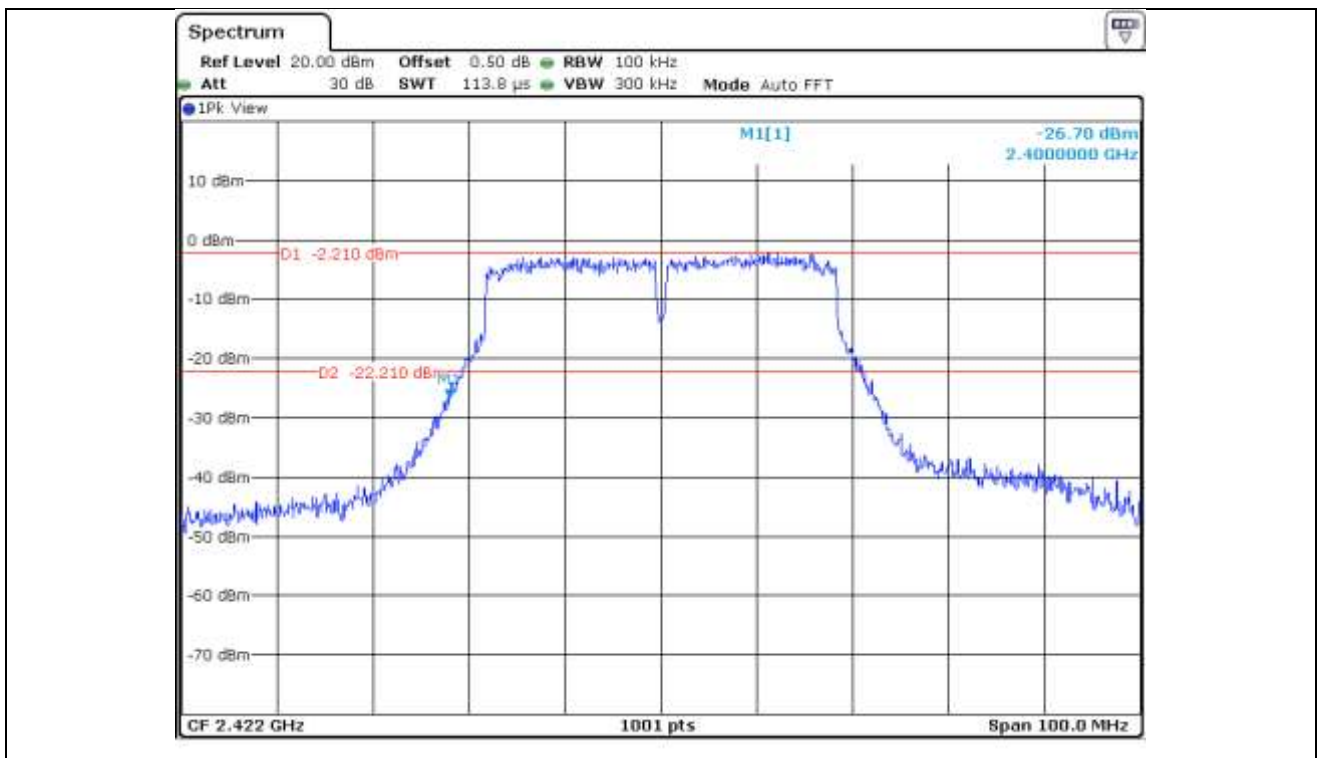


Low Channel

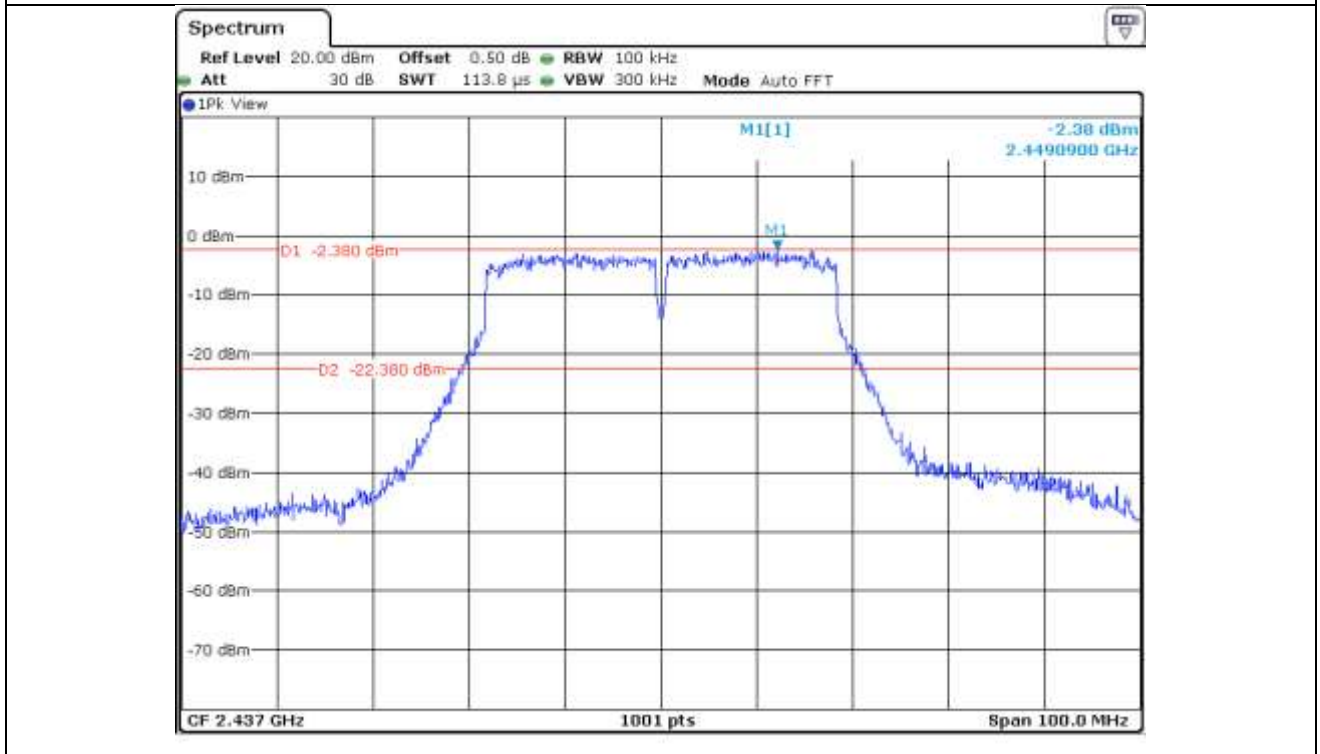


Middle Channel

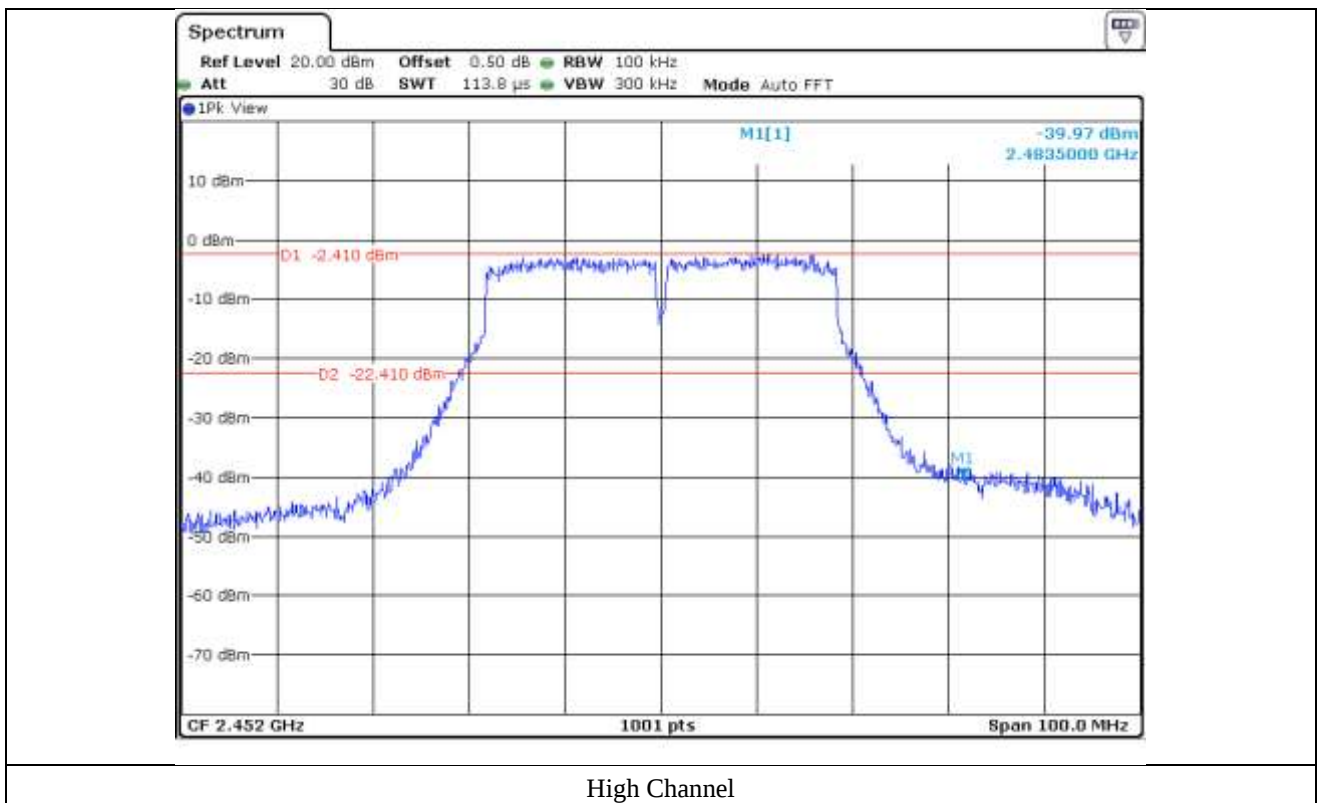


High Channel

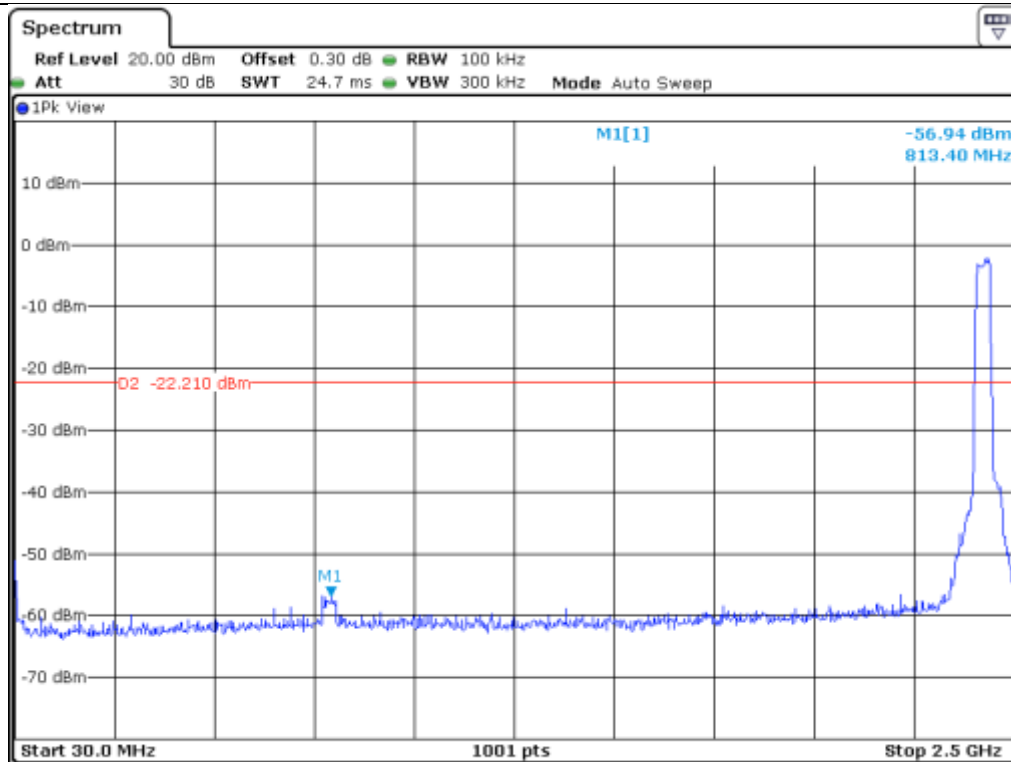


Low Channel

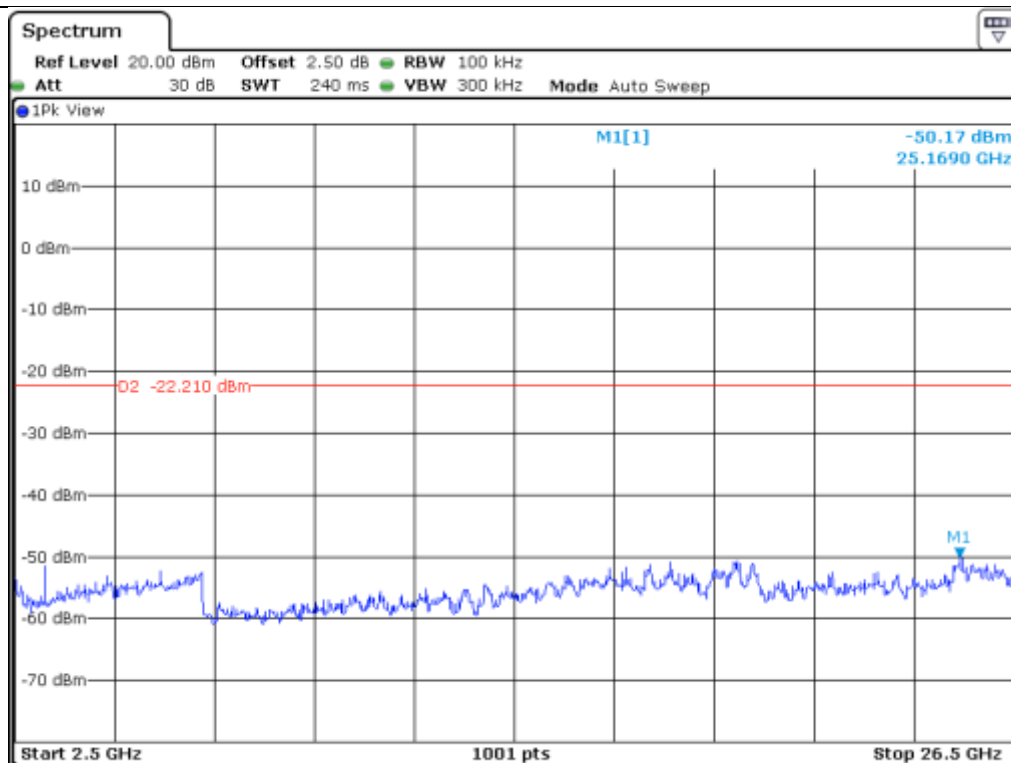


Low Channel

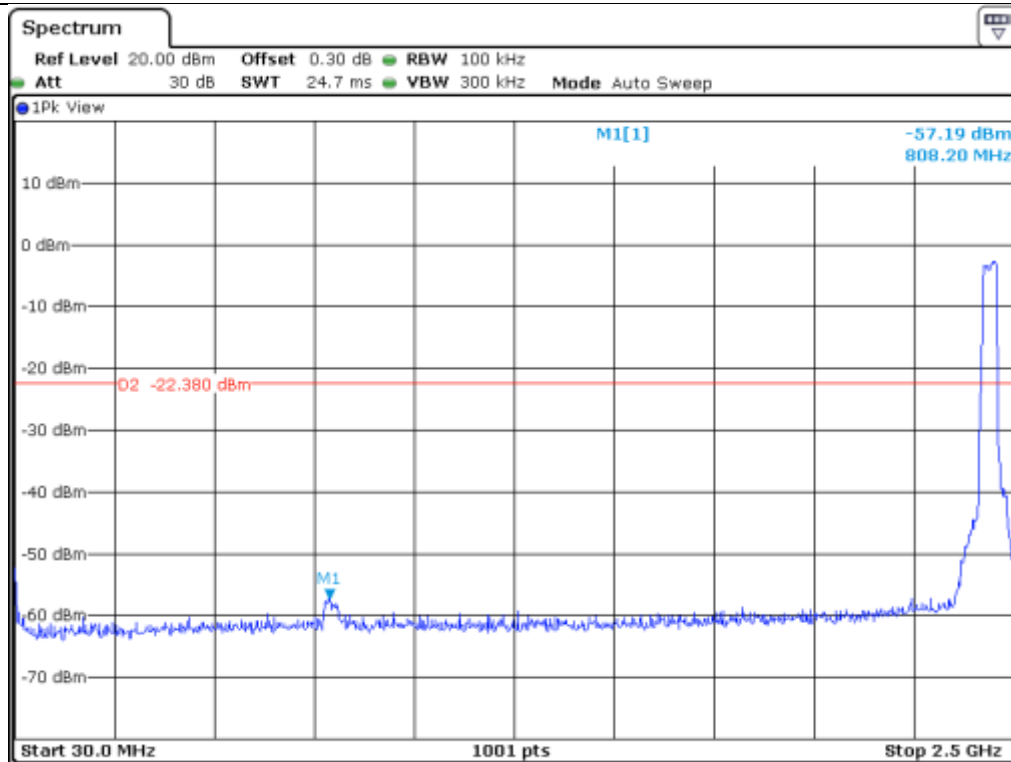


Middle Channel

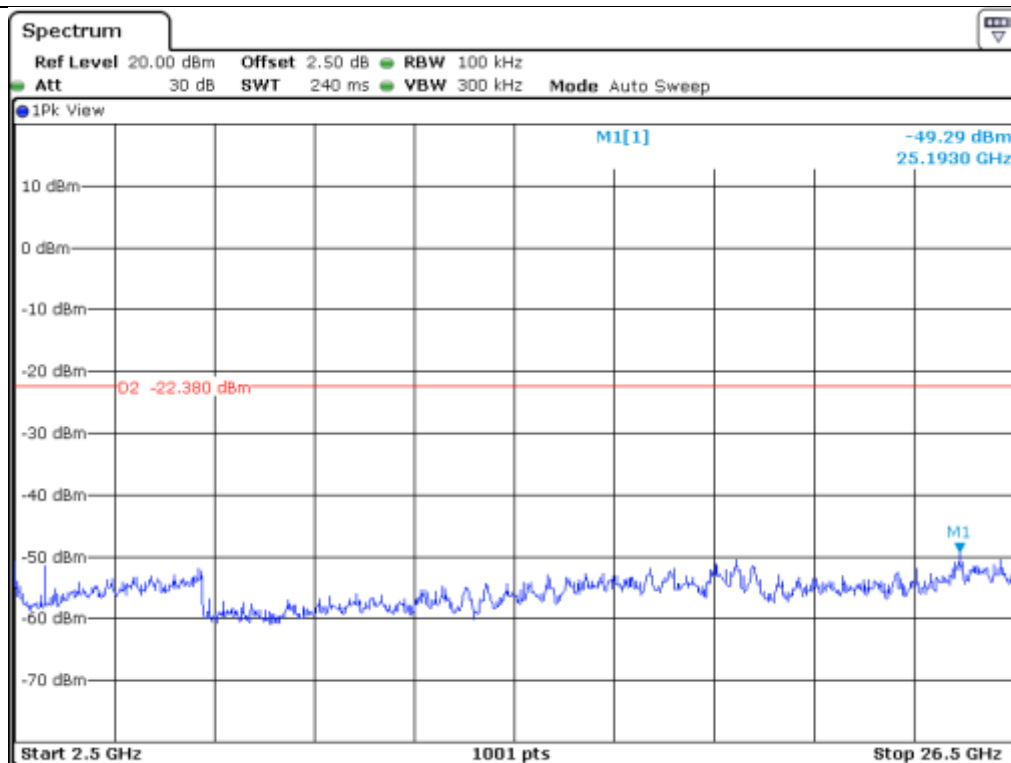

Middle Channel

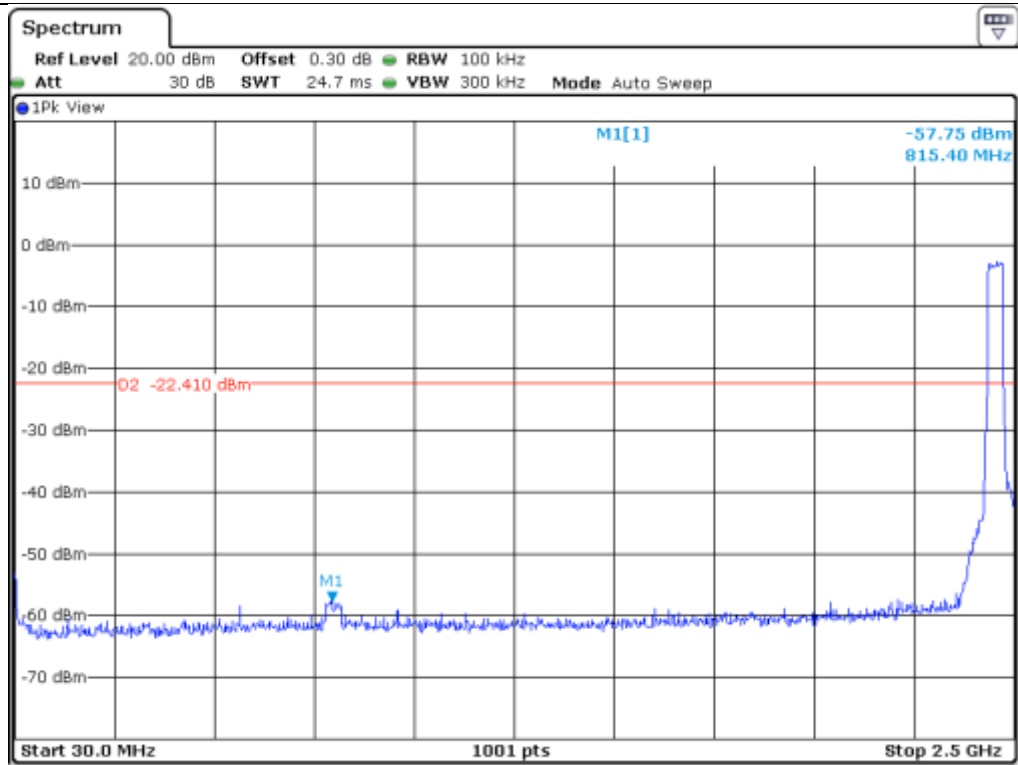

High Channel

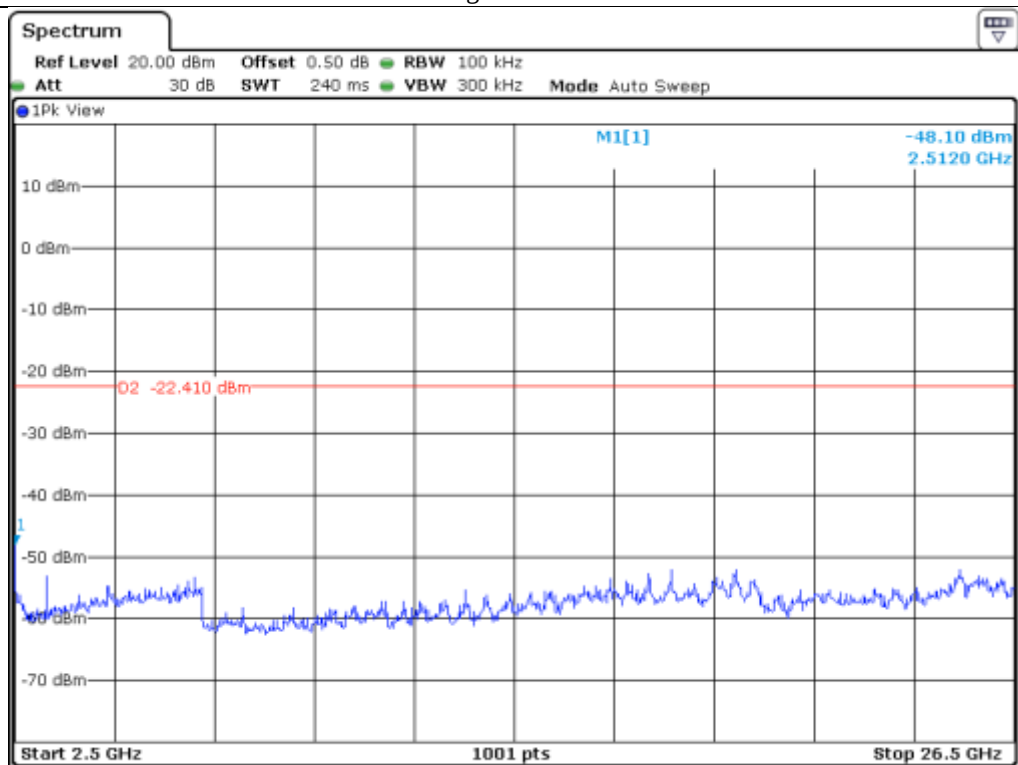

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for 802.11b WLAN Mode

- . Test Date : February 13, 2020 ~ February 17, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 30 MHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 339.37	19.01	Peak	H	27.90	5.10	0.00	52.01	74.00	21.99
2 387.24	8.19	Average	H				41.19	54.00	12.81
2 385.80	14.51	Peak	V				47.51	74.00	26.49
2 372.22	5.33	Average	V				38.33	54.00	15.67
Test Data for High Channel									
2 485.88	17.31	Peak	H	28.40	5.20	0.00	50.91	74.00	23.09
2 486.87	8.18	Average	H				41.78	54.00	12.22
2 486.44	15.38	Peak	V				48.98	74.00	25.02
2 486.57	4.85	Average	V				38.45	54.00	15.55

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Ha-Ram Lee / Manager

9.6.1.2 Test data for 802.11g WLAN Mode

- . Test Date : February 13, 2020 ~ February 17, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 30 MHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 389.96	22.75	Peak	H	27.90	5.10	0.00	55.75	74.00	18.25
2 389.32	12.64	Average	H				45.64	54.00	8.36
2 388.76	15.58	Peak	V				48.58	74.00	25.42
2 390.96	5.51	Average	V				38.51	54.00	15.49
Test Data for High Channel									
2 483.51	29.09	Peak	H	28.40	5.20	0.00	62.69	74.00	11.31
2 483.79	18.44	Average	H				52.04	54.00	1.96
2 483.51	16.56	Peak	V				50.16	74.00	23.84
2 483.51	5.75	Average	V				39.35	54.00	14.65

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Ha-Ram Lee / Manager

9.6.1.3 Test data for 802.11n (HT 20) WLAN Mode

- Test Date : February 13, 2020 ~ February 17, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 30 MHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 389.96	23.45	Peak	H	27.90	5.10	0.00	56.45	74.00	17.55
2 389.96	12.97	Average	H				45.97	54.00	8.03
2 389.96	16.14	Peak	V				49.14	74.00	24.86
2 389.96	5.54	Average	V				38.54	54.00	15.46
Test Data for High Channel									
2 483.51	28.82	Peak	H	28.40	5.20	0.00	62.42	74.00	11.58
2 483.51	18.27	Average	H				51.87	54.00	2.13
2 485.34	16.28	Peak	V				49.88	74.00	24.12
2 483.51	5.93	Average	V				39.53	54.00	14.47

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Ha-Ram Lee / Manager

9.6.1.4 Test data for 802.11n (HT 40) WLAN Mode

- . Test Date : February 13, 2020 ~ February 17, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 30 MHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 386.92	20.96	Peak	H	27.90	5.10	0.00	53.96	74.00	20.04
2 388.92	10.75	Average	H				43.75	54.00	10.25
2 387.80	15.07	Peak	V				48.07	74.00	25.93
2 388.44	5.32	Average	V				38.32	54.00	15.68
Test Data for High Channel									
2 483.89	28.35	Peak	H	28.40	5.20	0.00	61.95	74.00	12.05
2 483.51	17.98	Average	H				51.58	54.00	2.42
2 486.23	16.37	Peak	V				49.97	74.00	24.03
2 484.71	6.31	Average	V				39.91	54.00	14.09

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Ha-Ram Lee / Manager

9.6.2 Spurious & Harmonic Radiated Emission

9.6.2.1 Test data for 802.11b WLAN Mode

- . Test Date : February 13, 2020 ~ February 17, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	17.79	Peak	H	32.90	7.10	0.00	57.79	74.00	16.21
	7.98	Average	H				47.98	54.00	6.02
	16.76	Peak	V				56.76	74.00	17.24
	7.45	Average	V				47.45	54.00	6.55
Test Data for Middle Channel									
4 874.00	17.65	Peak	H	33.10	7.10	0.00	57.85	74.00	16.15
	8.93	Average	H				49.13	54.00	4.87
	16.50	Peak	V				56.70	74.00	17.30
	6.95	Average	V				47.15	54.00	6.85
Test Data for High Channel									
4 924.00	17.26	Peak	H	33.10	7.00	0.00	57.36	74.00	16.64
	8.42	Average	H				48.52	54.00	5.48
	16.40	Peak	V				56.50	74.00	17.50
	7.46	Average	V				47.56	54.00	6.44

Tabulated test data for Spurious & Harmonic

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Ha-Ram Lee / Manager

9.6.2.2 Test data for 802.11g WLAN Mode

- . Test Date : February 13, 2020 ~ February 17, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	17.04	Peak	H	32.90	7.10	0.00	57.04	74.00	16.96
	7.30	Average	H				47.30	54.00	6.70
	16.06	Peak	V				56.06	74.00	17.94
	6.88	Average	V				46.88	54.00	7.12
Test Data for Middle Channel									
4 874.00	16.91	Peak	H	33.10	7.10	0.00	57.11	74.00	16.89
	7.63	Average	H				47.83	54.00	6.17
	15.97	Peak	V				56.17	74.00	17.83
	7.09	Average	V				47.29	54.00	6.71
Test Data for High Channel									
4 924.00	17.48	Peak	H	33.10	7.00	0.00	57.58	74.00	16.42
	8.04	Average	H				48.14	54.00	5.86
	16.33	Peak	V				56.43	74.00	17.57
	7.23	Average	V				47.33	54.00	6.67

Tabulated test data for Spurious & Harmonic

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Ha-Ram Lee / Manager

9.6.2.3 Test data for 802.11n (HT 20) WLAN Mode

- Test Date : February 13, 2020 ~ February 17, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	17.17	Peak	H	32.90	7.10	0.00	57.17	74.00	16.83
	7.27	Average	H				47.27	54.00	6.73
	16.26	Peak	V				56.26	74.00	17.74
	6.88	Average	V				46.88	54.00	7.12
Test Data for Middle Channel									
4 874.00	16.72	Peak	H	33.10	7.10	0.00	56.92	74.00	17.08
	7.57	Average	H				47.77	54.00	6.23
	16.16	Peak	V				56.36	74.00	17.64
	7.17	Average	V				47.37	54.00	6.63
Test Data for High Channel									
4 924.00	17.10	Peak	H	33.10	7.00	0.00	57.20	74.00	16.80
	7.51	Average	H				47.61	54.00	6.39
	16.76	Peak	V				56.86	74.00	17.14
	7.14	Average	V				47.24	54.00	6.76

Tabulated test data for Spurious & Harmonic

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Ha-Ram Lee / Manager

9.6.2.4 Test data for 802.11n (HT 40) WLAN Mode

- . Test Date : February 13, 2020 ~ February 17, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 844.00	17.18	Peak	H	33.10	7.10	0.00	57.38	74.00	16.62
	7.42	Average	H				47.62	54.00	6.38
	16.96	Peak	V				57.16	74.00	16.84
	7.00	Average	V				47.20	54.00	6.80
Test Data for Middle Channel									
4 874.00	16.81	Peak	H	33.10	7.10	0.00	57.01	74.00	16.99
	7.34	Average	H				47.54	54.00	6.46
	16.30	Peak	V				56.50	74.00	17.50
	7.06	Average	V				47.26	54.00	6.74
Test Data for High Channel									
4 904.00	17.16	Peak	H	33.10	7.10	0.00	57.36	74.00	16.64
	8.13	Average	H				48.33	54.00	5.67
	17.04	Peak	V				57.24	74.00	16.76
	7.46	Average	V				47.66	54.00	6.34

Tabulated test data for Spurious & Harmonic

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Ha-Ram Lee / Manager


10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is set to 3 times the resolution bandwidth.

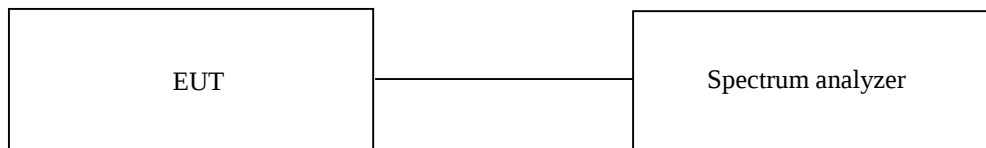

10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 802.11b WLAN Mode

-. Test Date : February 11, 2020 ~ February 12, 2020

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-7.66	8.00	15.66
Middle	2 437.00	-8.26	8.00	16.26
High	2 462.00	-8.49	8.00	16.49

Remark. Margin = Limit – Measured value




Tested by: Ha-Ram Lee / Manager

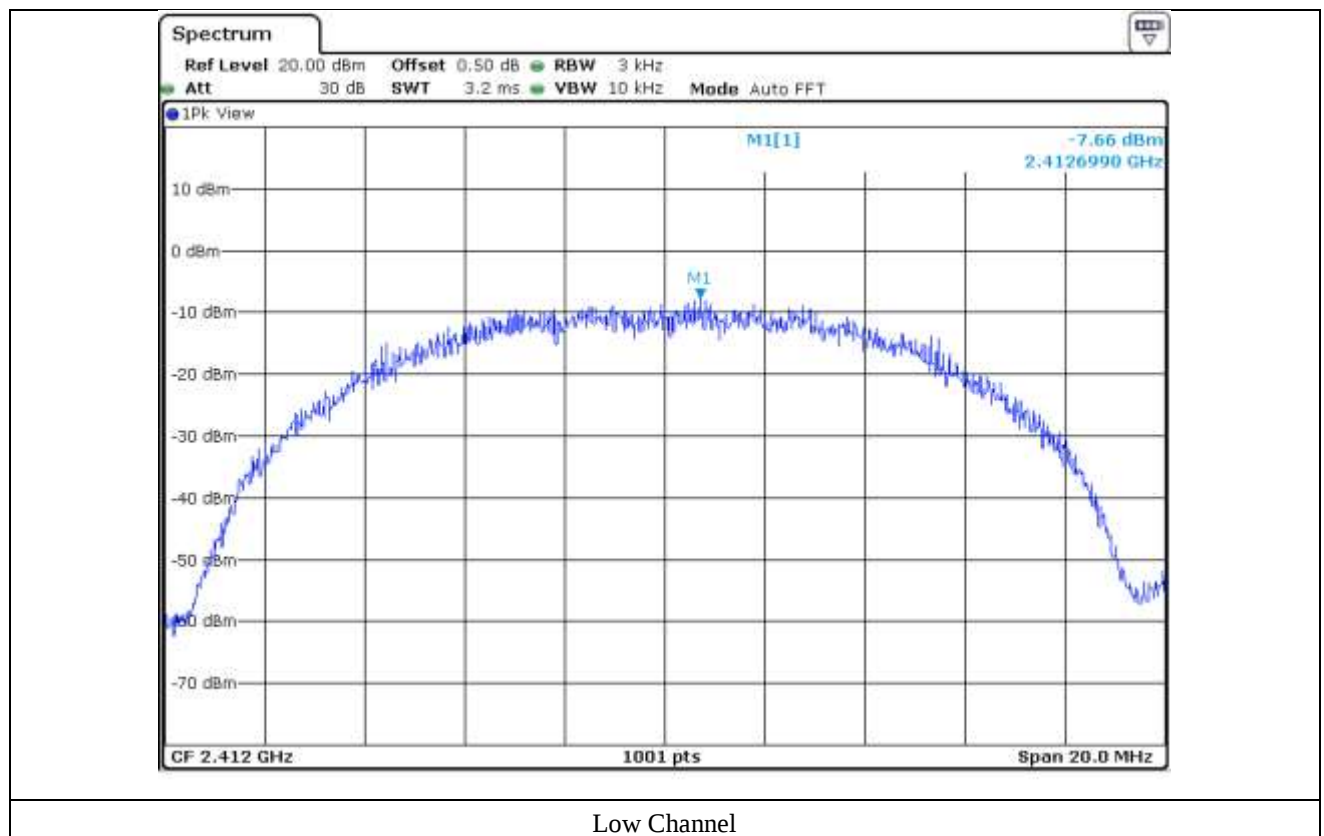

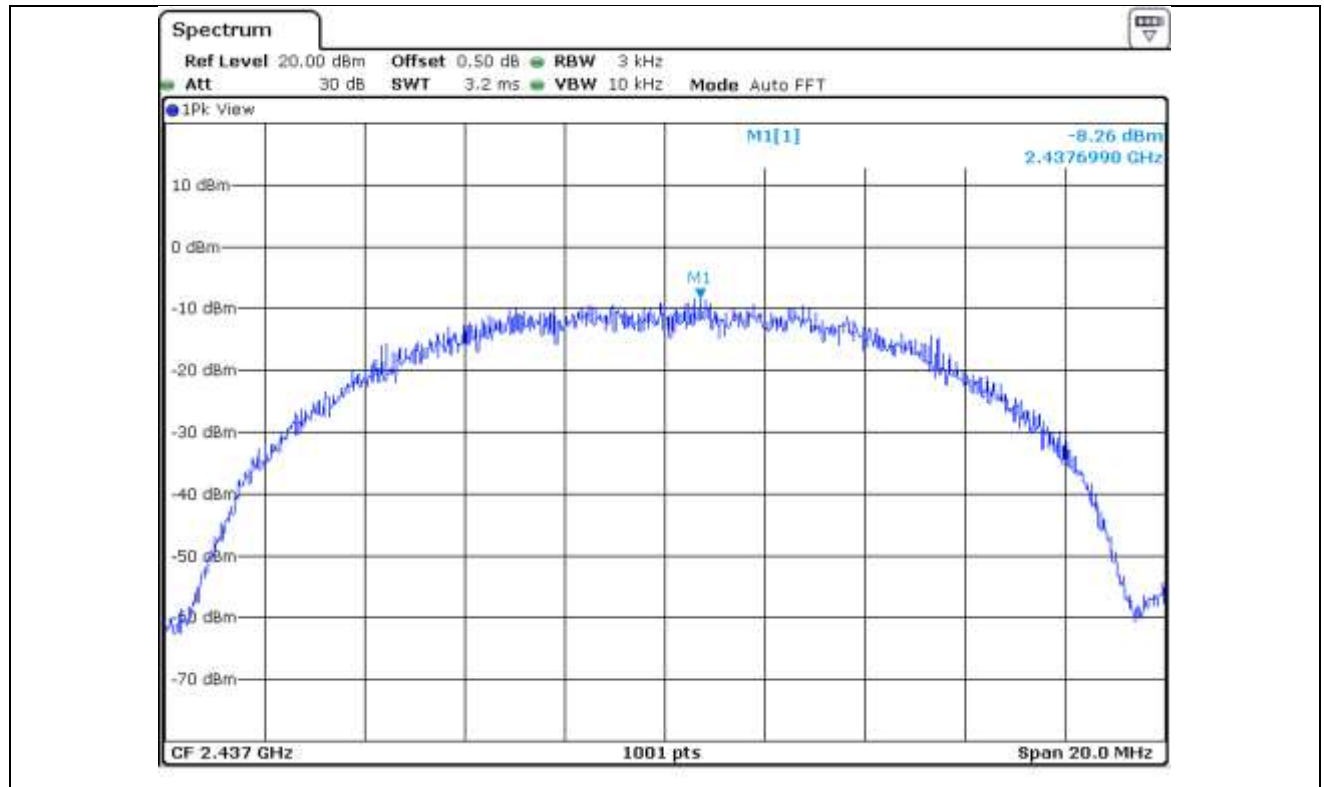

Middle Channel

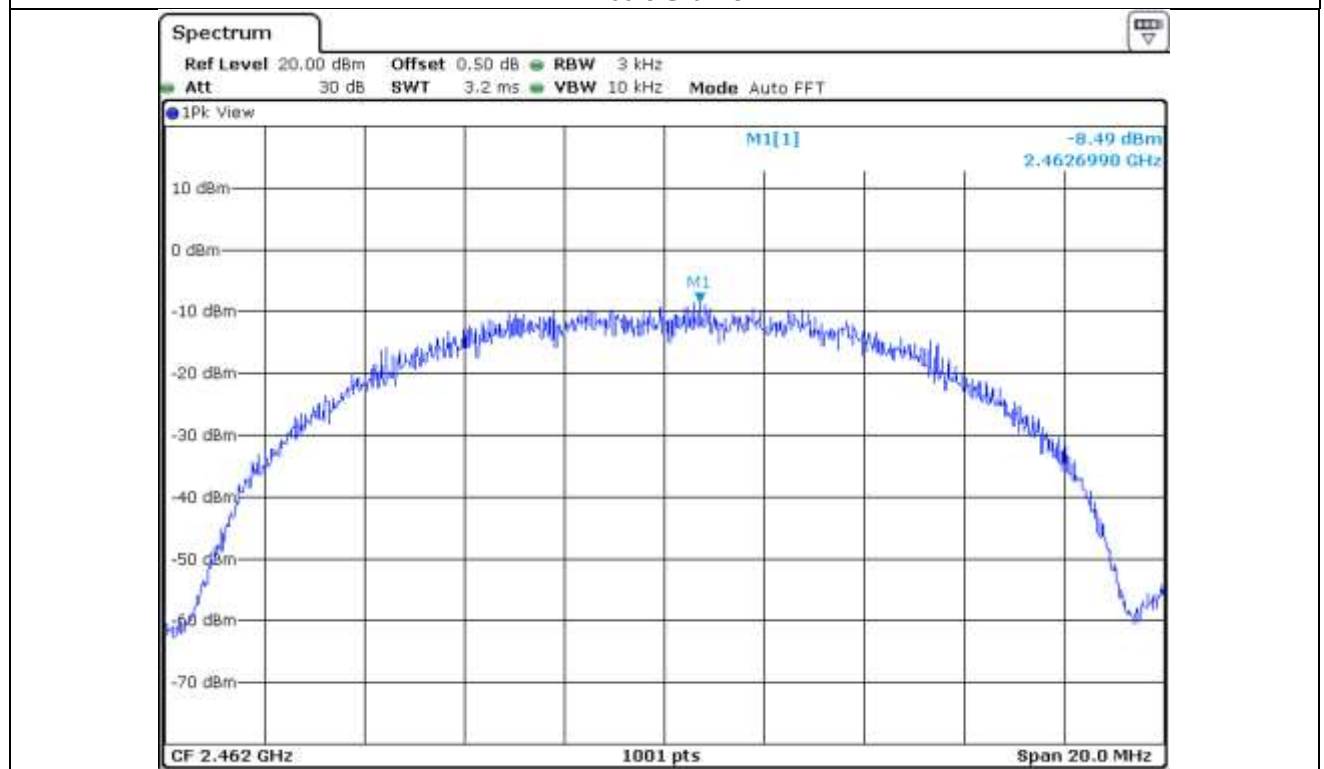

High Channel

10.5 Test data for 802.11g WLAN Mode

-. Test Date : February 11, 2020 ~ February 12, 2020

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-14.32	8.00	22.32
Middle	2 437.00	-14.67	8.00	22.67
High	2 462.00	-14.59	8.00	22.59


Remark. Margin = Limit – Measured value




Tested by: Ha-Ram Lee / Manager

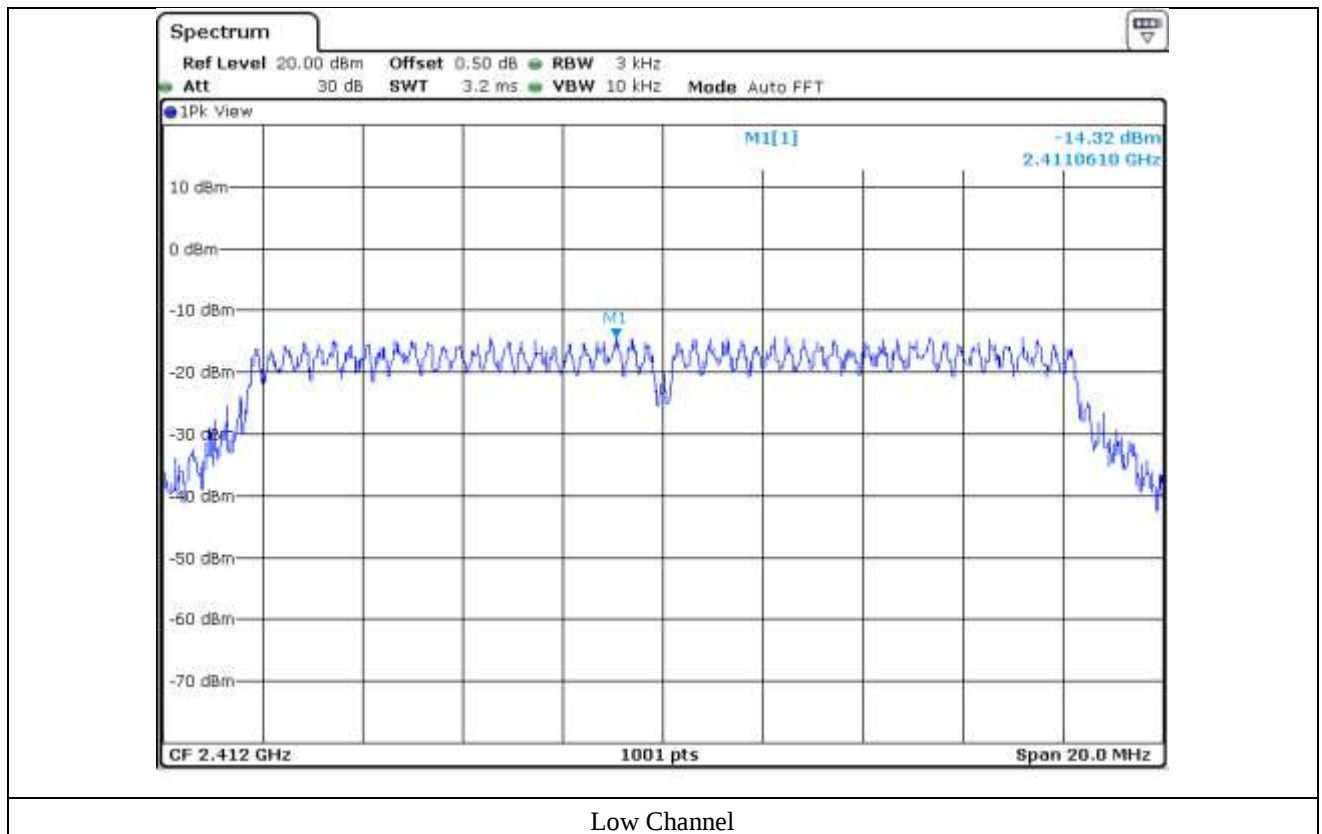

Low Channel

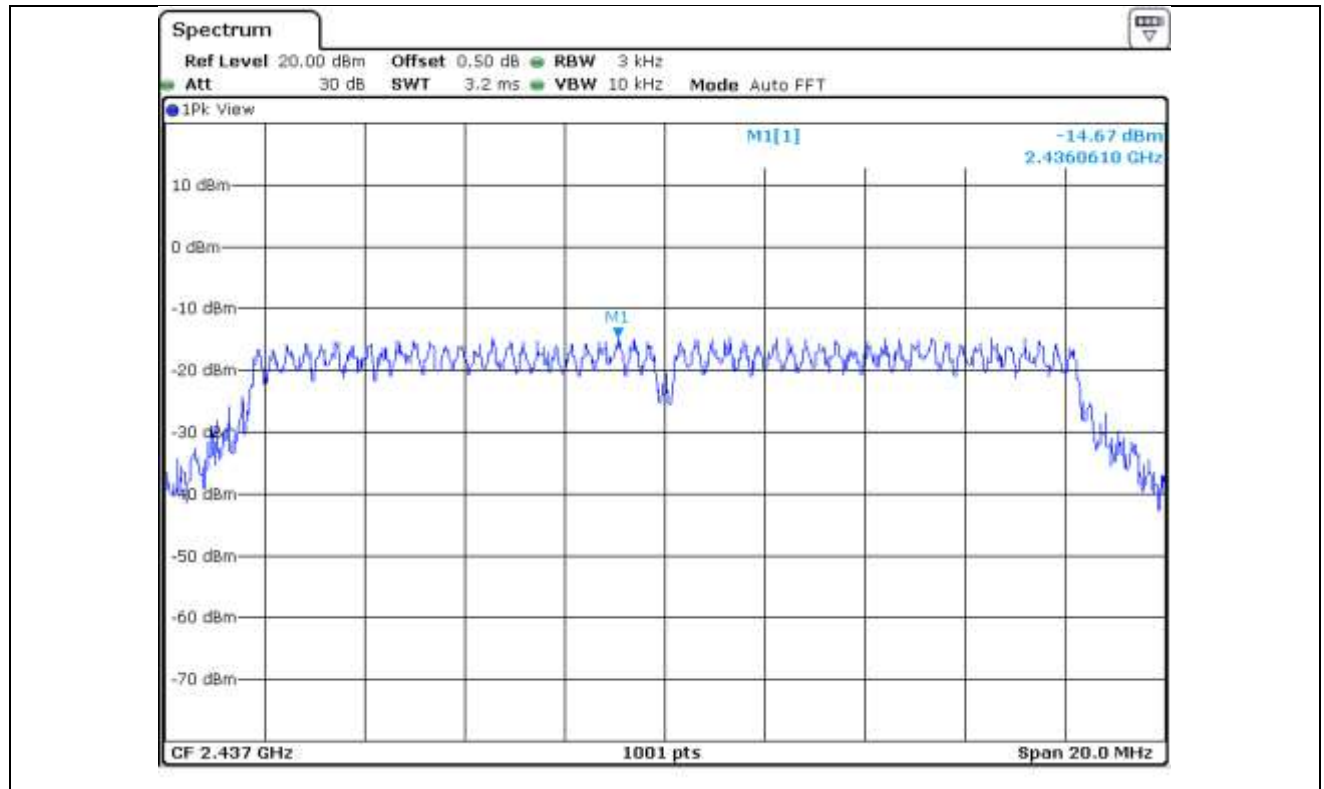

Middle Channel

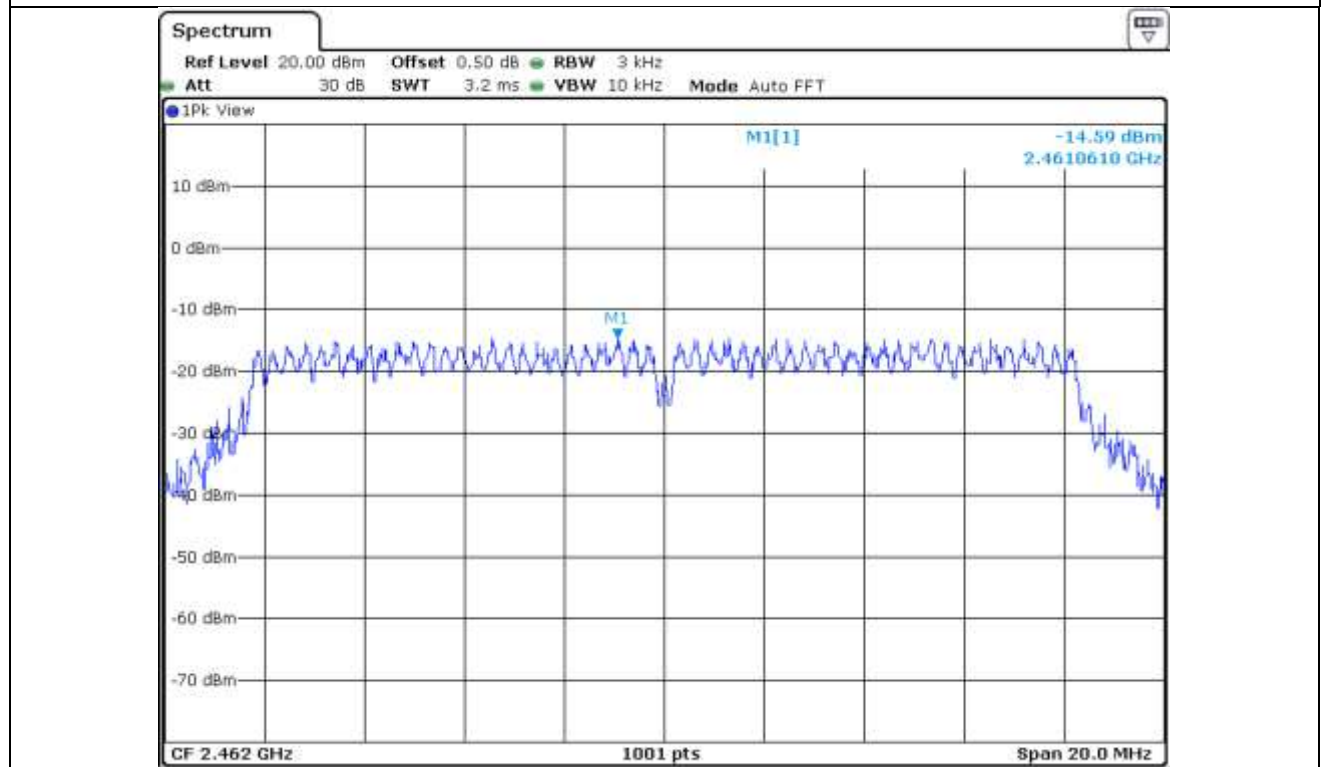

High Channel

10.6 Test data for 802.11n (HT20) WLAN Mode

-. Test Date : February 11, 2020 ~ February 12, 2020

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-13.99	8.00	21.99
Middle	2 437.00	-14.35	8.00	22.35
High	2 462.00	-14.40	8.00	22.40

Remark. Margin = Limit – Measured value




Tested by: Ha-Ram Lee / Manager

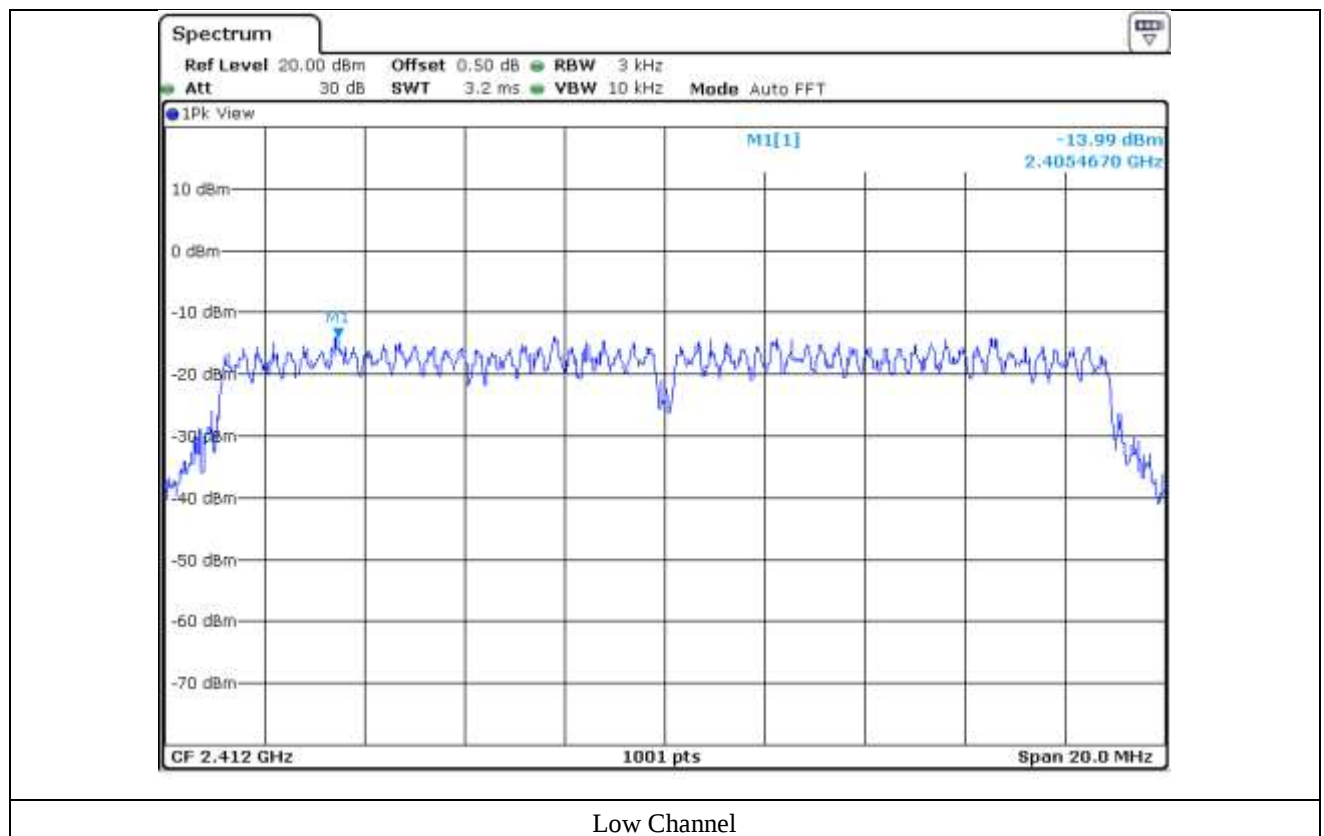

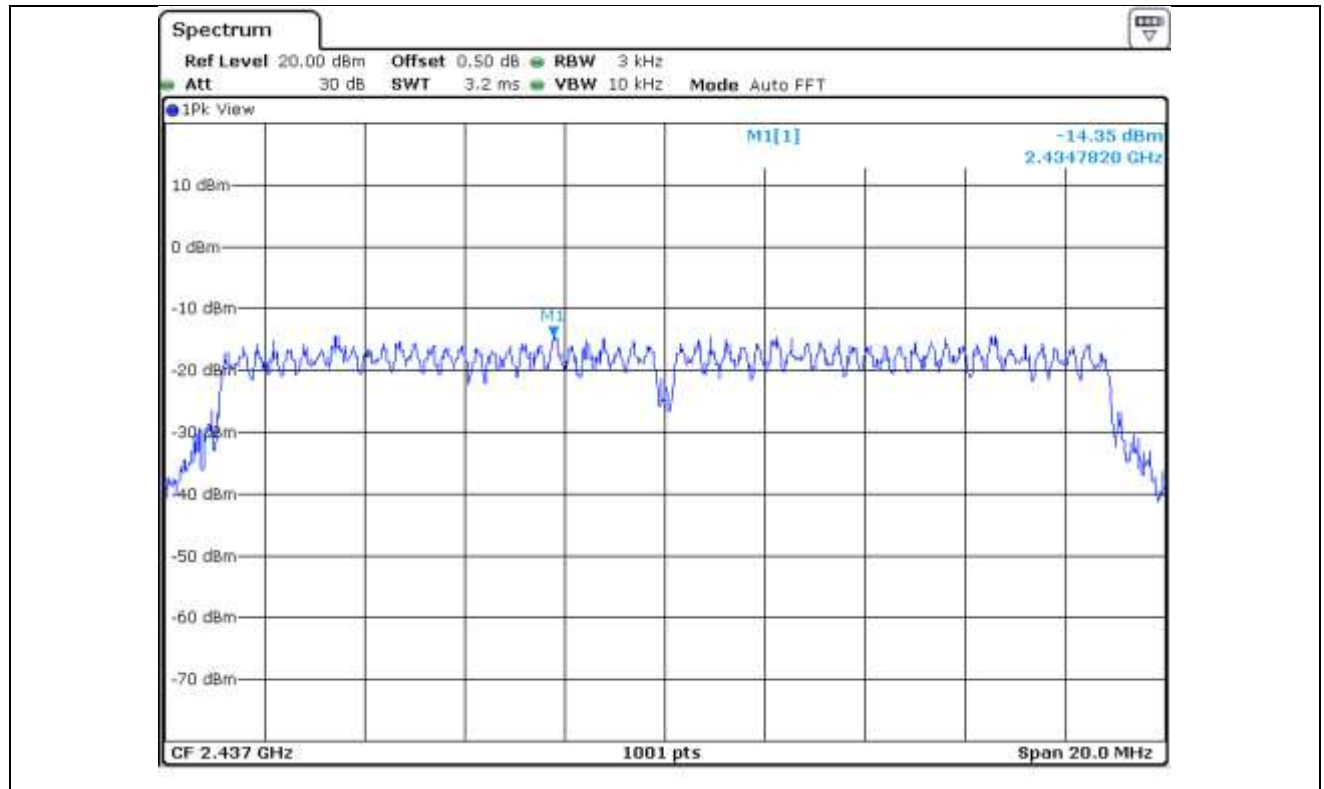

Middle Channel

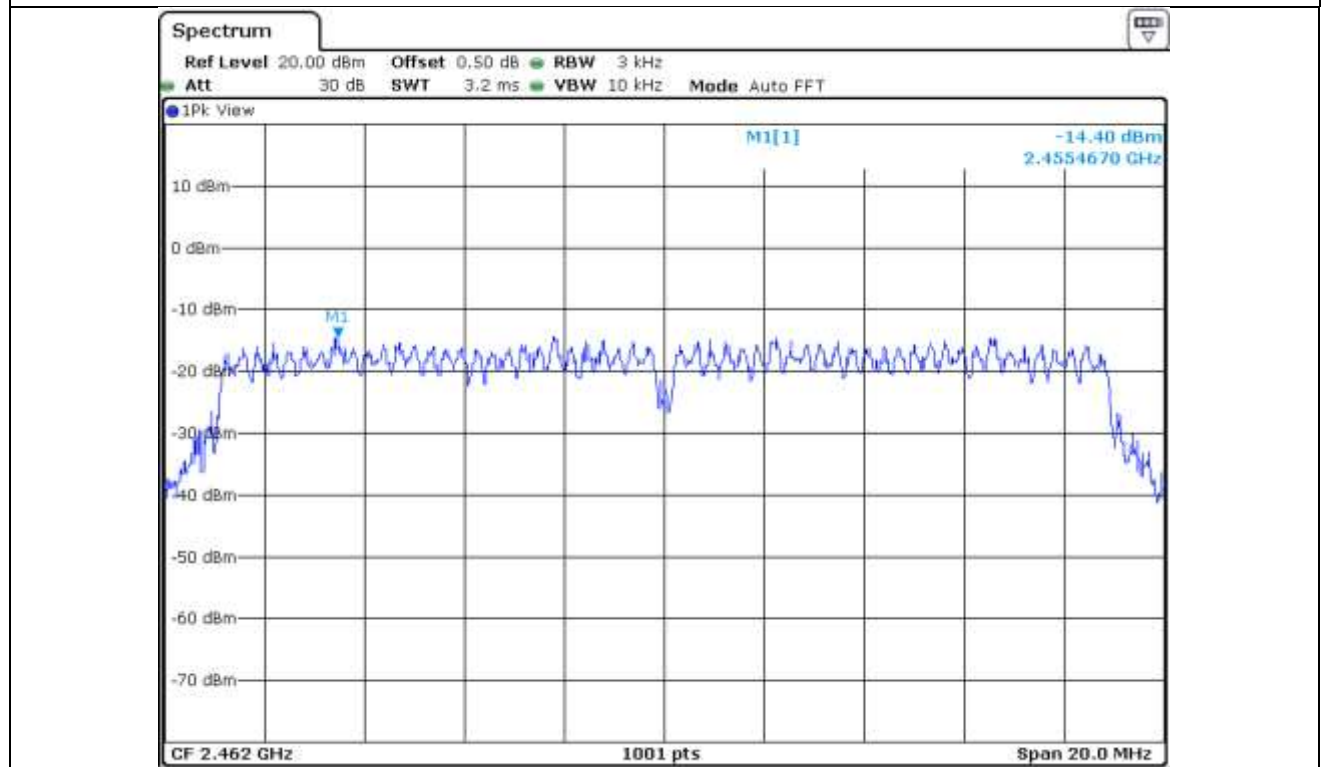

High Channel

10.7 Test data for 802.11n (HT40) WLAN Mode

-. Test Date : February 11, 2020 ~ February 12, 2020

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 422.00	-16.15	8.00	24.15
Middle	2 437.00	-16.44	8.00	24.44
High	2 452.00	-16.36	8.00	24.36

Remark. Margin = Limit – Measured value



Tested by: Ha-Ram Lee / Manager

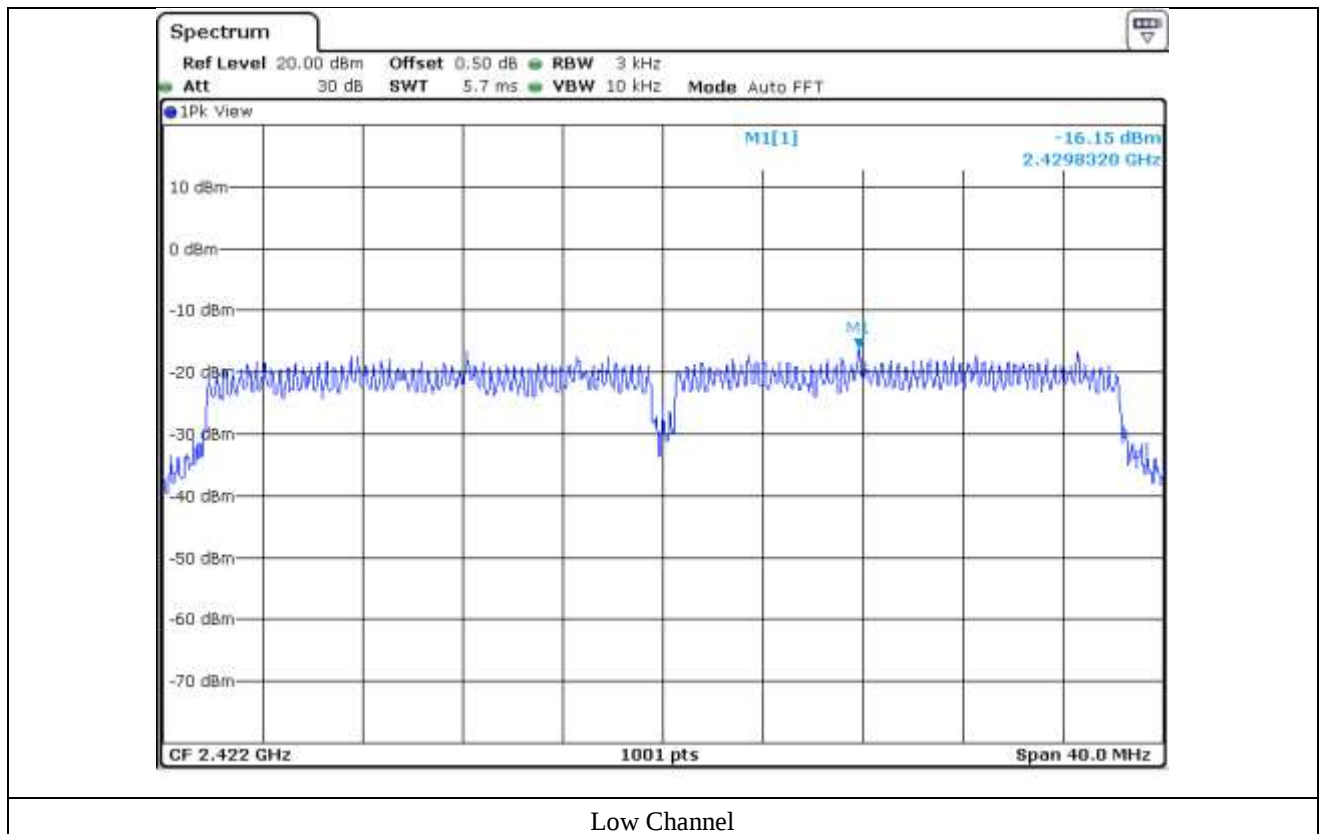

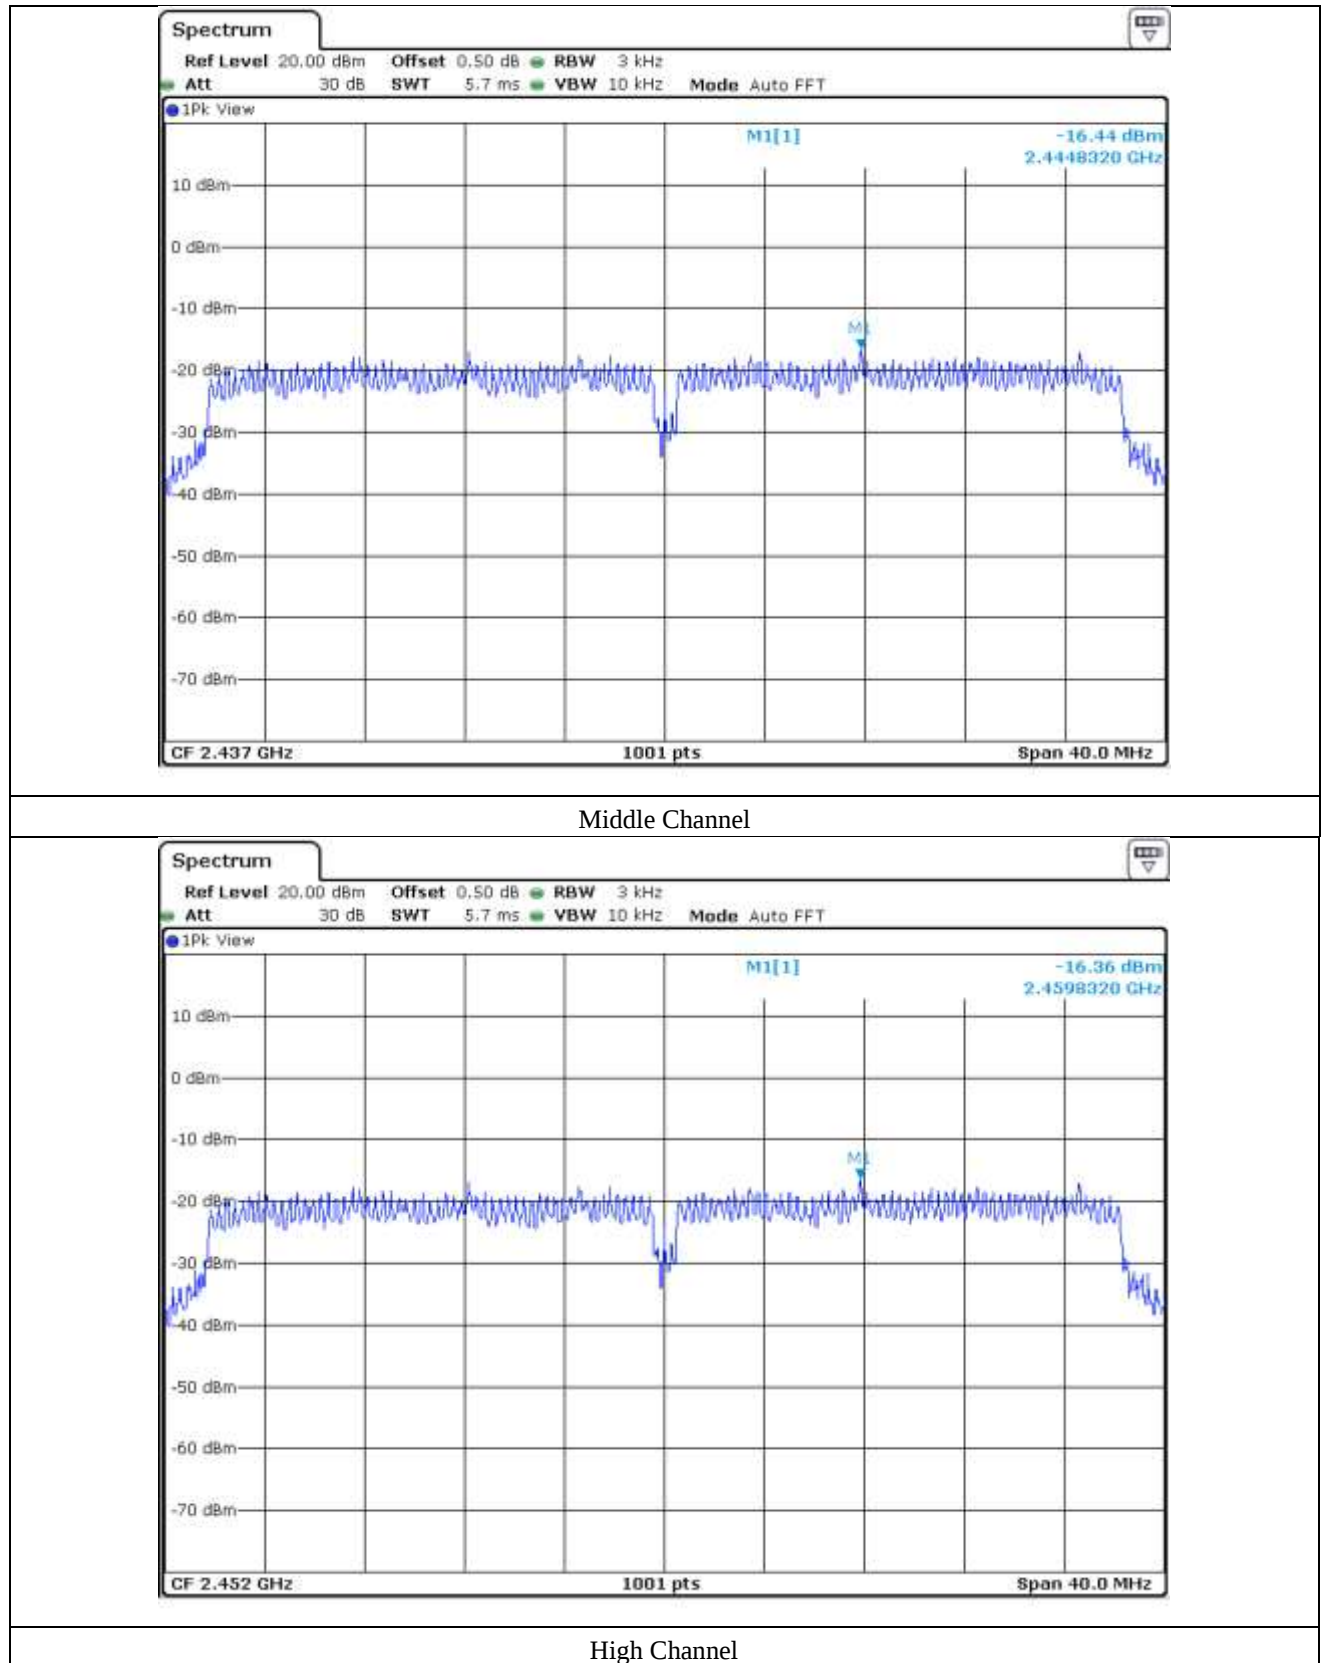

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2019 (1Y)
■ -	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 18, 2019 (1Y)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101199	Feb. 20, 2020 (1Y)
■ -	SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 24, 2019 (1Y)
■ -	MA240	HD GmbH	Antenna Master	N/A	N/A
■ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DS420S	HD GmbH	Turn Table	N/A	N/A
■ -	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	Jun. 05, 2018 (2Y)
■ -	3115	ETS-LINDGREN	Horn Antenna	34823	Aug. 26, 2019 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020 (1Y)
■ -	SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Feb. 20, 2020 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for WLAN 2.4 GHz (Connected to adapter)

11.4.1 Test data for 30 MHz ~ 1 GHz

- Test Date : February 17, 2020
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

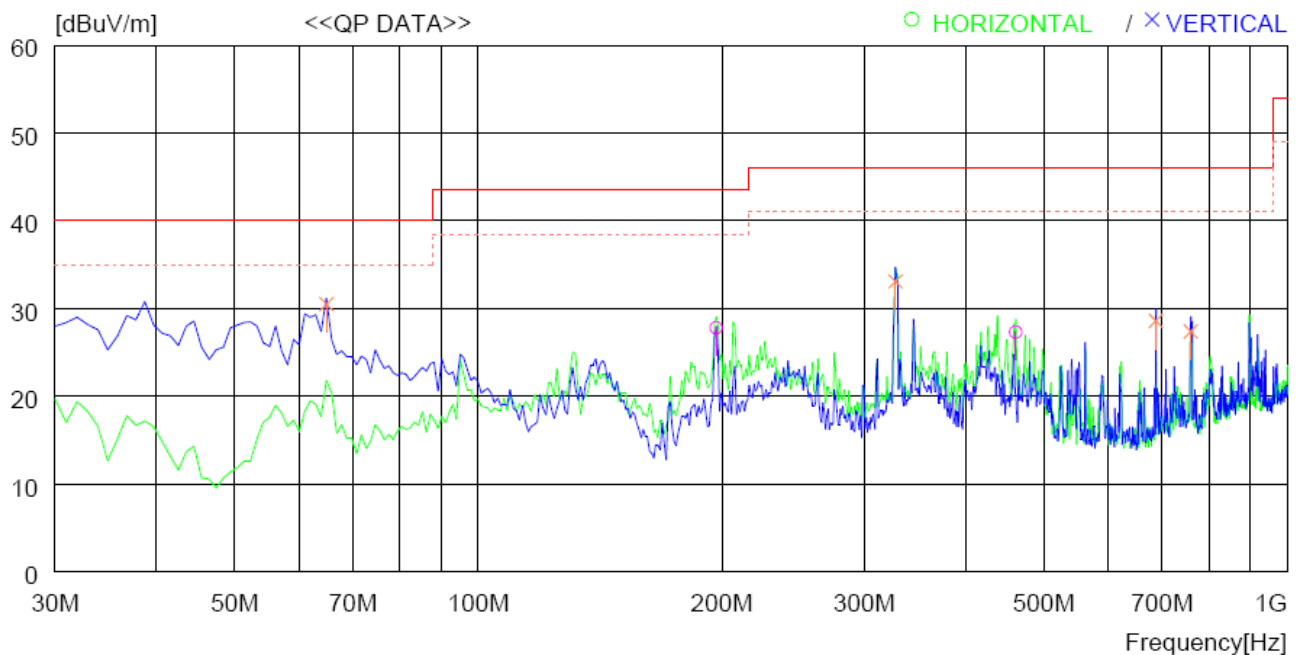

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
---- Horizontal ----										
1	196.840	48.1	10.5	1.8	32.6	27.8	43.5	15.7	200	359
2	461.651	41.6	16.0	2.5	32.8	27.3	46.0	18.7	100	159
---- Vertical ----										
3	64.920	51.0	11.3	0.9	32.7	30.5	40.0	9.5	100	78
4	327.790	49.8	13.8	2.2	32.7	33.1	46.0	12.9	200	149
5	687.655	38.9	19.2	3.4	32.9	28.6	46.0	17.4	200	0
6	759.433	35.7	20.7	3.7	32.7	27.4	46.0	18.6	100	359



Tested by: Ha-Ram Lee / Manager

11.4.2 Test data for Below 30 MHz

- Test Date : February 17, 2020
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20 dB below the limit and thus not reported.									

11.4.3 Test data for above 1 GHz

- Test Date : February 17, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20 dB below the limit and thus not reported.									




Tested by: Ha-Ram Lee / Manager

11.5. Test data for WLAN 2.4 GHz (Connected to USB cable)

11.5.1 Test data for 30 MHz ~ 1 GHz

- Test Date : April 09, 2020
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

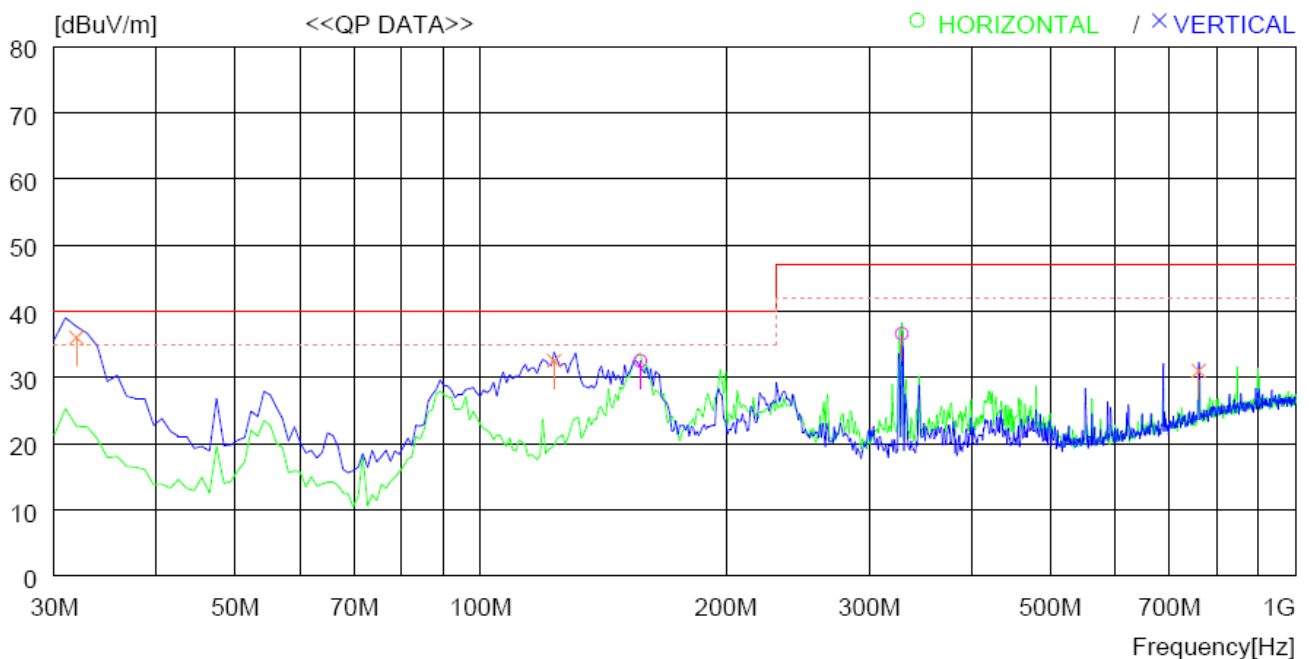

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	157.070	45.4	18.1	1.6	32.6	32.5	40.0	7.5	300	0
2	328.760	47.5	19.6	2.2	32.7	36.6	47.0	10.4	100	0
----- Vertical -----										
3	31.940	47.5	20.3	0.8	32.6	36.0	40.0	4.0	100	268
4	123.120	45.1	18.7	1.4	32.7	32.5	40.0	7.5	100	243
5	760.403	33.5	26.5	3.7	32.7	31.0	47.0	16.0	200	254



Tested by: Ha-Ram Lee / Manager

11.5.2 Test data for Below 30 MHz

- . Test Date : April 09, 2020
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.									

11.5.3 Test data for above 1 GHz

- . Test Date : April 09, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.									




Tested by: Ha-Ram Lee / Manager

11.6 Test data for WLAN 2.4 GHz (PoE adapter)

11.6.1 Test data for 30 MHz ~ 1 GHz

- Test Date : April 09, 2020
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

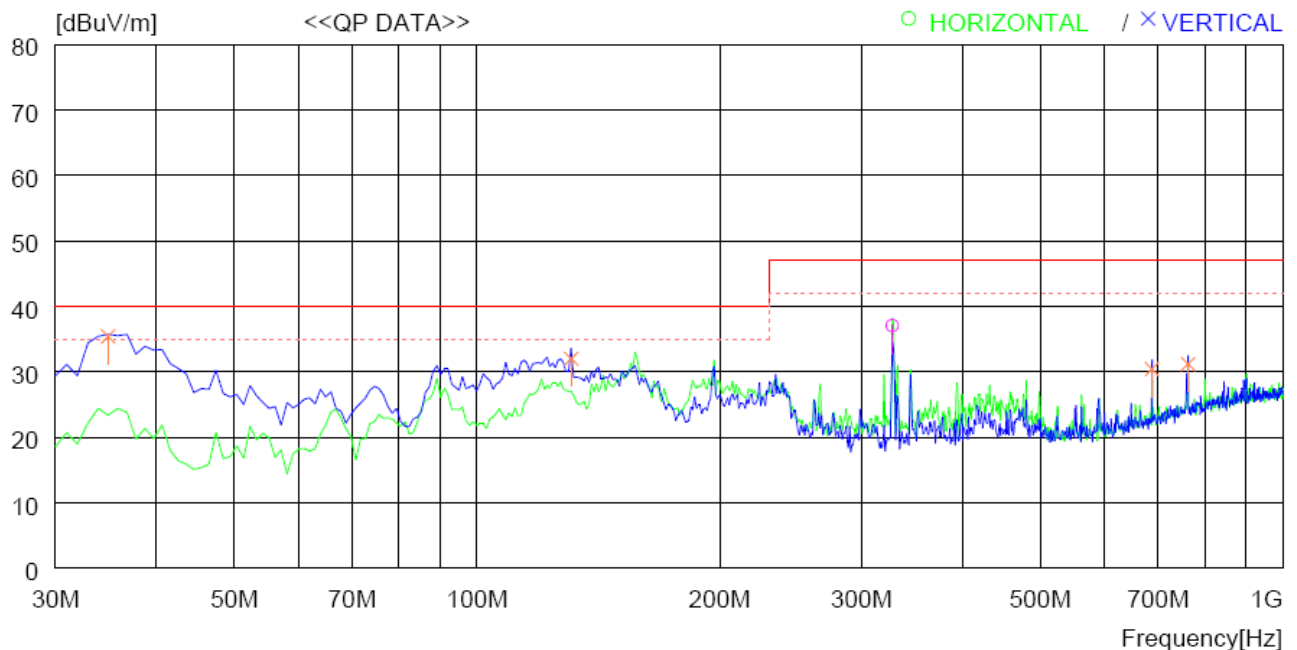

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	327.790	47.9	19.6	2.2	32.7	37.0	47.0	10.0	100	0
----- Vertical -----										
2	34.850	47.9	19.2	0.9	32.6	35.4	40.0	4.6	100	359
3	130.880	44.2	19.1	1.4	32.7	32.0	40.0	8.0	100	231
4	687.655	34.5	25.4	3.4	32.9	30.4	47.0	16.6	100	359
5	762.343	33.7	26.5	3.7	32.7	31.2	47.0	15.8	200	0



Tested by: Ha-Ram Lee / Manager

11.6.2 Test data for Below 30 MHz

- Test Date : April 09, 2020
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.									

11.6.3 Test data for above 1 GHz

- Test Date : April 09, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.									



Tested by: Ha-Ram Lee / Manager

11.7 Test data for Bluetooth LE + WLAN 2.4 GHz Intermodulation mode (Connection to adapter)

11.7.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : 49 % R.H.

Temperature: 22 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Healthcare IoT Gateway

Date: February 17, 2020

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

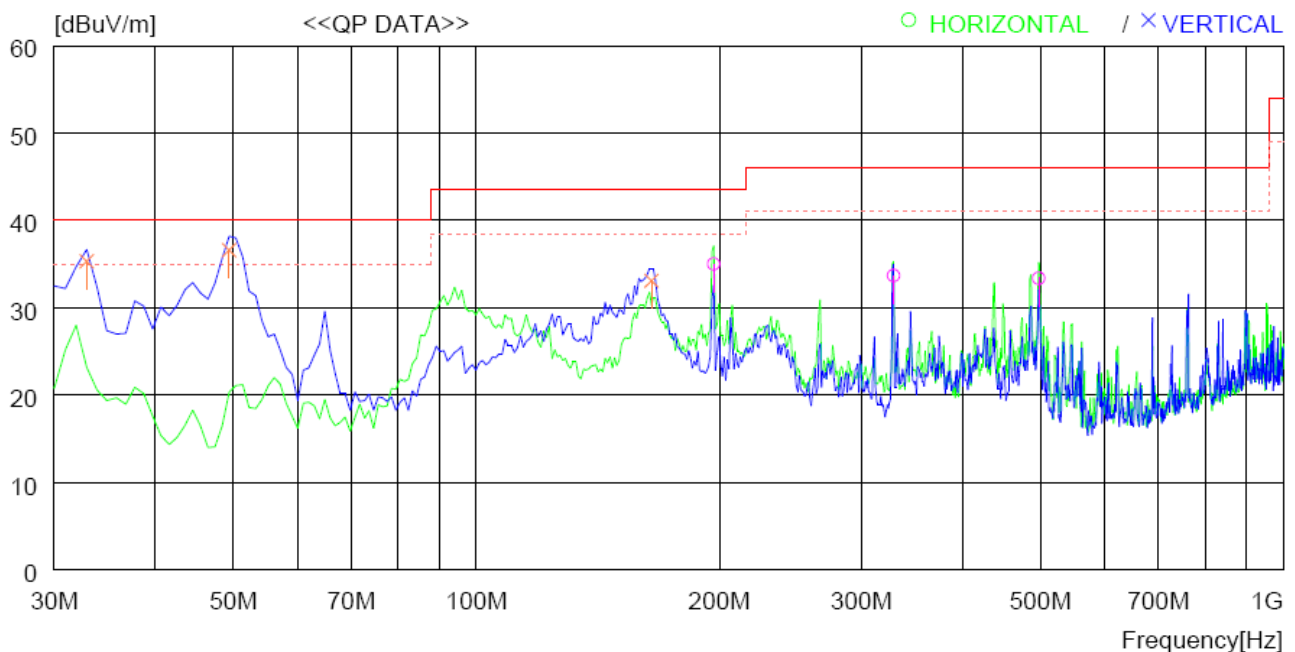

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	196.840	55.3	10.5	1.8	32.6	35.0	43.5	8.5	200	359
2	328.760	50.4	13.8	2.2	32.7	33.7	46.0	12.3	100	5
3	497.541	46.5	17.2	2.6	32.9	33.4	46.0	12.6	100	0
----- Vertical -----										
4	32.910	55.1	12.0	0.8	32.6	35.3	40.0	4.7	100	284
5	49.400	54.8	13.6	0.9	32.7	36.6	40.0	3.4	100	359
6	164.830	55.6	8.5	1.6	32.6	33.1	43.5	10.4	100	235



Tested by: Ha-Ram Lee / Manager

11.7.2 Test data for Below 30 MHz

- Test Date : February 17, 2020
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Bluetooth LE + WLAN 2.4 GHz Intermodulation mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									

11.7.3 Test data for above 1 GHz

- Test Date : February 17, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Bluetooth LE + WLAN 2.4 GHz Intermodulation mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									



Tested by: Ha-Ram Lee / Manager

11.8. Test data for Bluetooth LE + WLAN 2.4 GHz Intermodulation mode (Connection to USB cable)

11.8.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : 48 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Healthcare IoT Gateway

Date: April 09, 2020

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

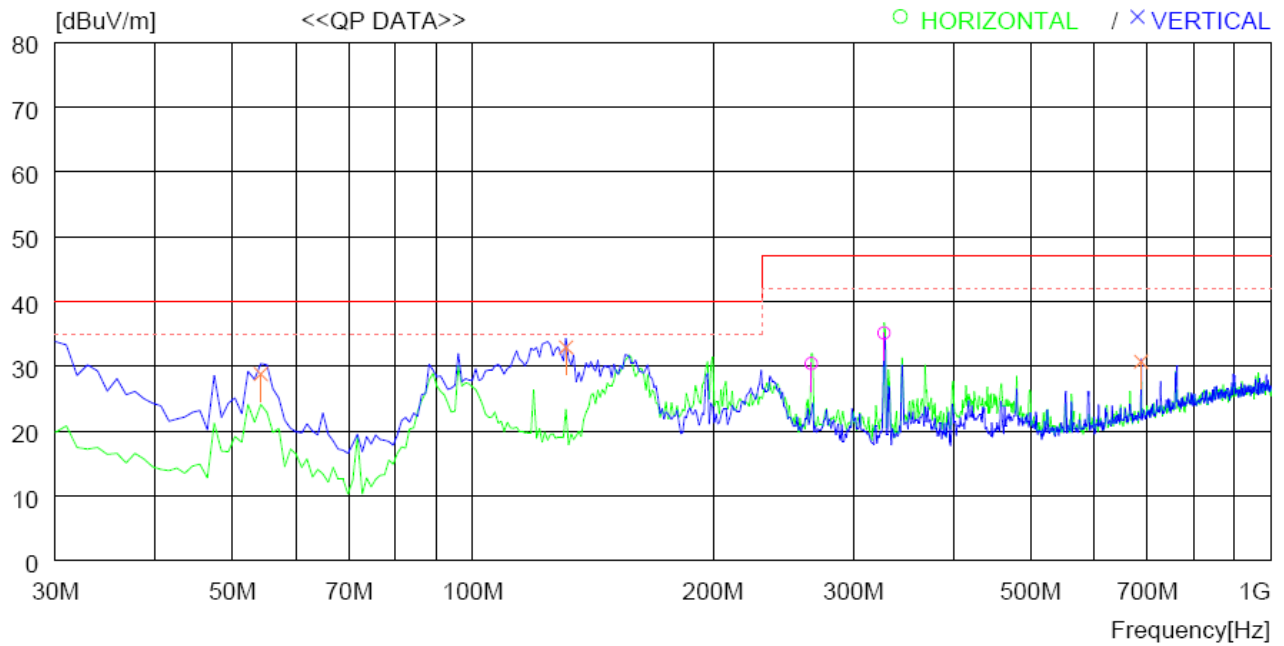

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
---- Horizontal ----										
1	265.710	42.9	18.2	2.0	32.7	30.4	47.0	16.6	100	0
2	327.790	46.0	19.6	2.2	32.7	35.1	47.0	11.9	100	0
---- Vertical ----										
3	54.250	47.9	12.7	0.9	32.7	28.8	40.0	11.2	100	259
4	130.880	45.1	19.1	1.4	32.7	32.9	40.0	7.1	100	359
5	687.655	34.8	25.4	3.4	32.9	30.7	47.0	16.3	100	326



Tested by: Ha-Ram Lee / Manager

11.8.2 Test data for Below 30 MHz

- Test Date : April 09, 2020
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Bluetooth LE + WLAN 2.4 GHz Intermodulation mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									

11.8.3 Test data for above 1 GHz

- Test Date : April 09, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Bluetooth LE + WLAN 2.4 GHz Intermodulation mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									



Tested by: Ha-Ram Lee / Manager

11.9 Test data for Bluetooth LE + WLAN 2.4 GHz Intermodulation mode (PoE adapter)

11.9.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : 48 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Healthcare IoT Gateway

Date: April 09, 2020

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

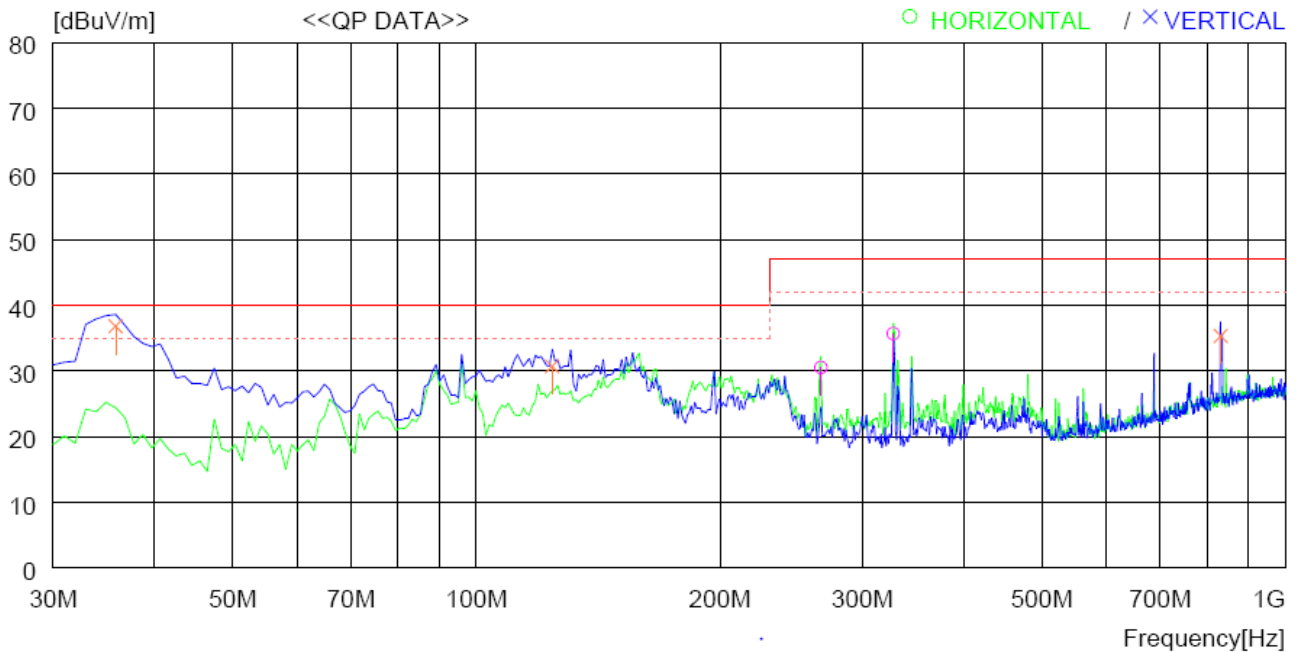

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QF	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	266.680	42.9	18.3	2.0	32.7	30.5	47.0	16.5	100	244
2	327.790	46.5	19.6	2.2	32.7	35.6	47.0	11.4	100	250
----- Vertical -----										
3	35.820	49.8	18.8	0.9	32.7	36.8	40.0	3.2	100	359
4	124.090	43.2	18.8	1.4	32.7	30.7	40.0	9.3	100	359
5	831.211	36.4	27.2	4.1	32.4	35.3	47.0	11.7	300	359



Tested by: Ha-Ram Lee / Manager

11.9.2 Test data for Below 30 MHz

- . Test Date : April 09, 2020
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Bluetooth LE + WLAN 2.4 GHz Intermodulation mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									

11.9.3 Test data for above 1 GHz

- . Test Date : April 09, 2020
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Bluetooth LE + WLAN 2.4 GHz Intermodulation mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									



Tested by: Ha-Ram Lee / Manager

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H

12.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


12.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESCI	Rohde & Schwarz	Test Receiver	101420	Mar. 28, 2019 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Mar. 27, 2019 (1Y)
■ - NSLK8126	Schwarzbeck	LISN	8126-480	Oct. 21, 2019 (1Y)
■ - 11947A	Hewlett Packard	Transient Limiter	3107A02762	Mar. 28, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


12.4 Test data (Connection to adapter)

- Test Date : February 20, 2020
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

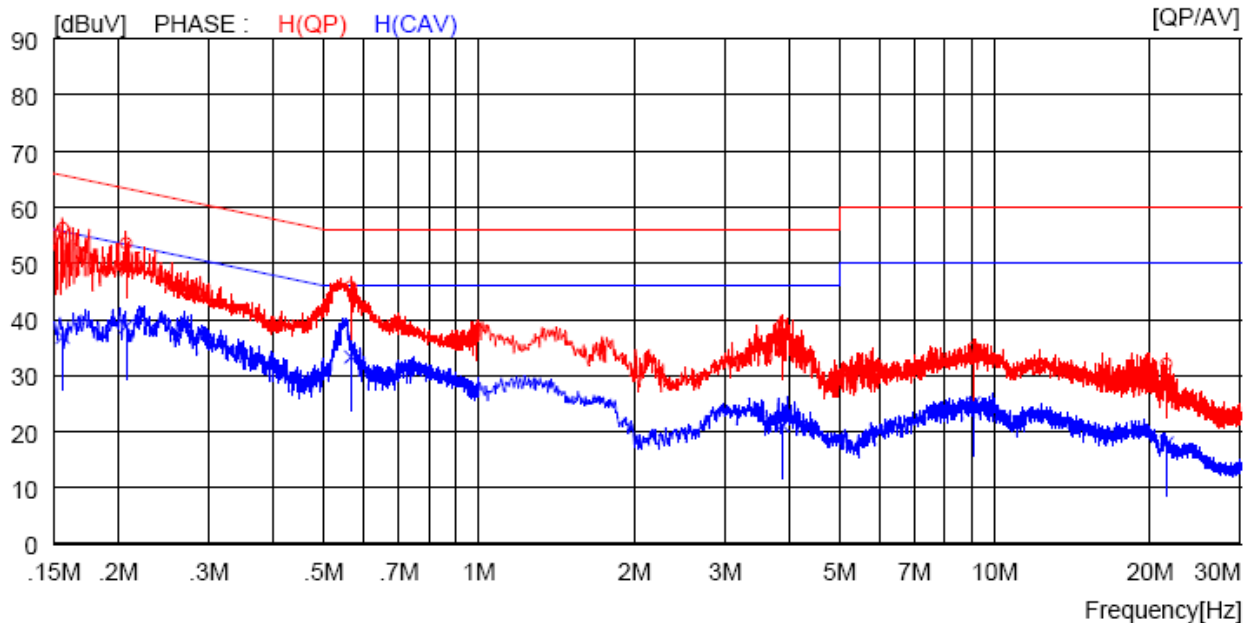

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15600	46.3	----	10.0	56.3	----	65.7	----	9.4	----	H (QP)
2	0.20700	43.5	----	10.0	53.5	----	63.3	----	9.8	----	H (QP)
3	0.56500	35.8	----	10.0	45.8	----	56.0	----	10.2	----	H (QP)
4	3.87200	28.8	----	10.1	38.9	----	56.0	----	17.1	----	H (QP)
5	9.10500	24.7	----	10.2	34.9	----	60.0	----	25.1	----	H (QP)
6	21.55000	21.7	----	10.4	32.1	----	60.0	----	27.9	----	H (QP)
7	0.15600	----	26.9	10.0	----	36.9	----	55.7	----	18.8	H (CAV)
8	0.20700	----	28.7	10.0	----	38.7	----	53.3	----	14.6	H (CAV)
9	0.56500	----	23.3	10.0	----	33.3	----	46.0	----	12.7	H (CAV)
10	3.87200	----	11.1	10.1	----	21.2	----	46.0	----	24.8	H (CAV)
11	9.10500	----	14.9	10.2	----	25.1	----	50.0	----	24.9	H (CAV)
12	21.55000	----	7.5	10.4	----	17.9	----	50.0	----	32.1	H (CAV)

-. Tested Line : NEUTRAL LINE

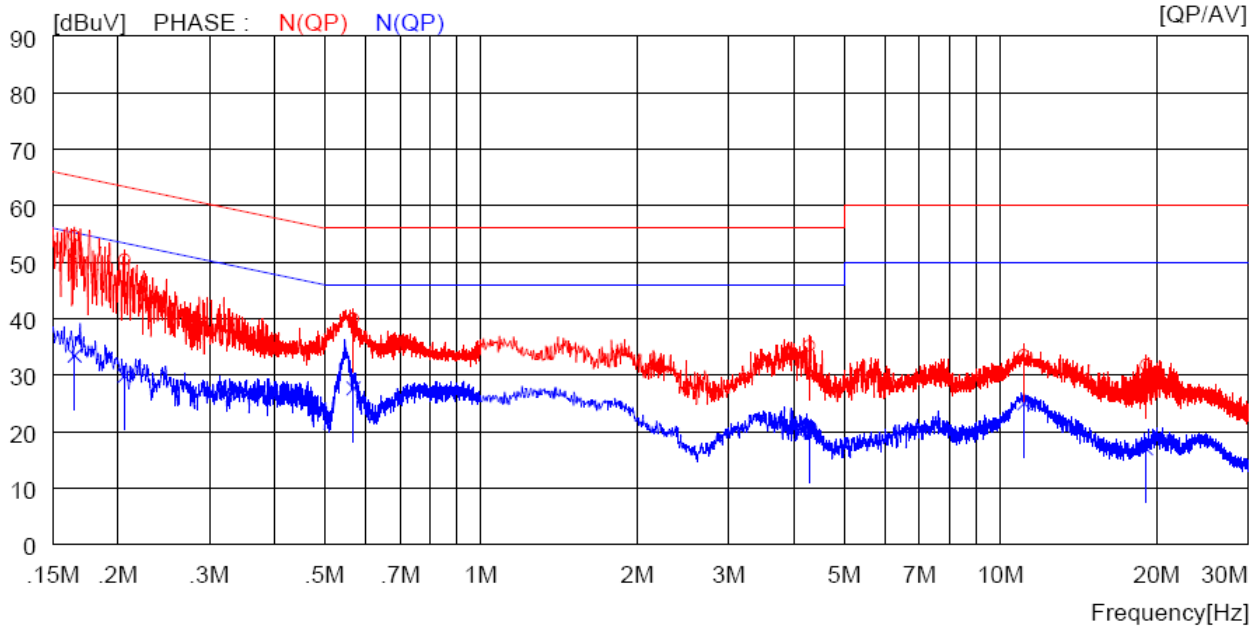

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16500	44.7	----	10.0	54.7	----	65.2	----	10.5	----	N (QP)
2	0.20600	40.5	----	10.0	50.5	----	63.4	----	12.9	----	N (QP)
3	0.56800	30.0	----	10.0	40.0	----	56.0	----	16.0	----	N (QP)
4	4.28400	25.1	----	10.1	35.2	----	56.0	----	20.8	----	N (QP)
5	11.11000	23.3	----	10.2	33.5	----	60.0	----	26.5	----	N (QP)
6	19.09000	21.4	----	10.4	31.8	----	60.0	----	28.2	----	N (QP)
7	0.16500	----	23.5	10.0	----	33.5	----	55.2	----	21.7	N (CAV)
8	0.20600	----	19.9	10.0	----	29.9	----	53.4	----	23.5	N (CAV)
9	0.56800	----	17.7	10.0	----	27.7	----	46.0	----	18.3	N (CAV)
10	4.28400	----	10.3	10.1	----	20.4	----	46.0	----	25.6	N (CAV)
11	11.11000	----	14.8	10.2	----	25.0	----	50.0	----	25.0	N (CAV)
12	19.09000	----	6.7	10.4	----	17.1	----	50.0	----	32.9	N (CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Ha-Ram Lee / Manager


12.5 Test data (Connection to USB cable)

- Test Date : April 07, 2020
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

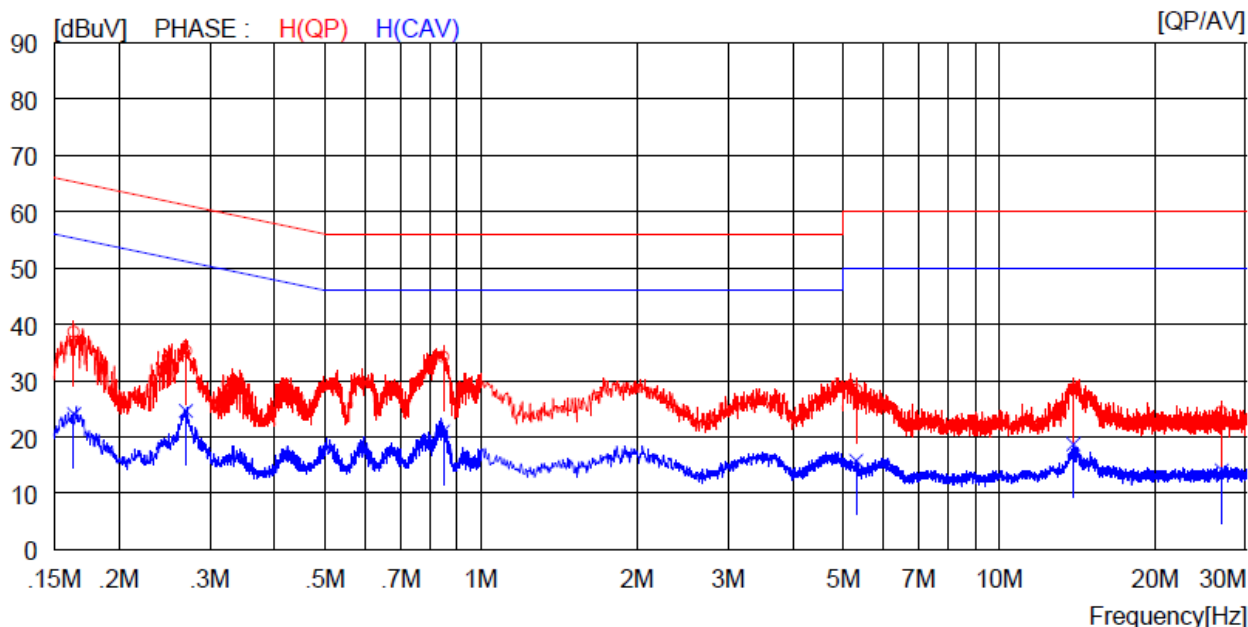

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16400	28.6	----	10.0	38.6	----	65.3	----	26.7	----	H (QP)
2	0.27000	25.3	----	9.9	35.2	----	61.1	----	25.9	----	H (QP)
3	0.84700	24.2	----	10.0	34.2	----	56.0	----	21.8	----	H (QP)
4	5.31000	18.2	----	10.1	28.3	----	60.0	----	31.7	----	H (QP)
5	13.94000	18.3	----	10.2	28.5	----	60.0	----	31.5	----	H (QP)
6	26.92000	13.9	----	10.5	24.4	----	60.0	----	35.6	----	H (QP)
7	0.16400	----	14.0	10.0	----	24.0	----	55.3	----	31.3	H (CAV)
8	0.27000	----	14.7	9.9	----	24.6	----	51.1	----	26.5	H (CAV)
9	0.84700	----	11.0	10.0	----	21.0	----	46.0	----	25.0	H (CAV)
10	5.31000	----	5.7	10.1	----	15.8	----	50.0	----	34.2	H (CAV)
11	13.94000	----	8.5	10.2	----	18.7	----	50.0	----	31.3	H (CAV)
12	26.92000	----	3.6	10.5	----	14.1	----	50.0	----	35.9	H (CAV)

-. Tested Line : NEUTRAL LINE

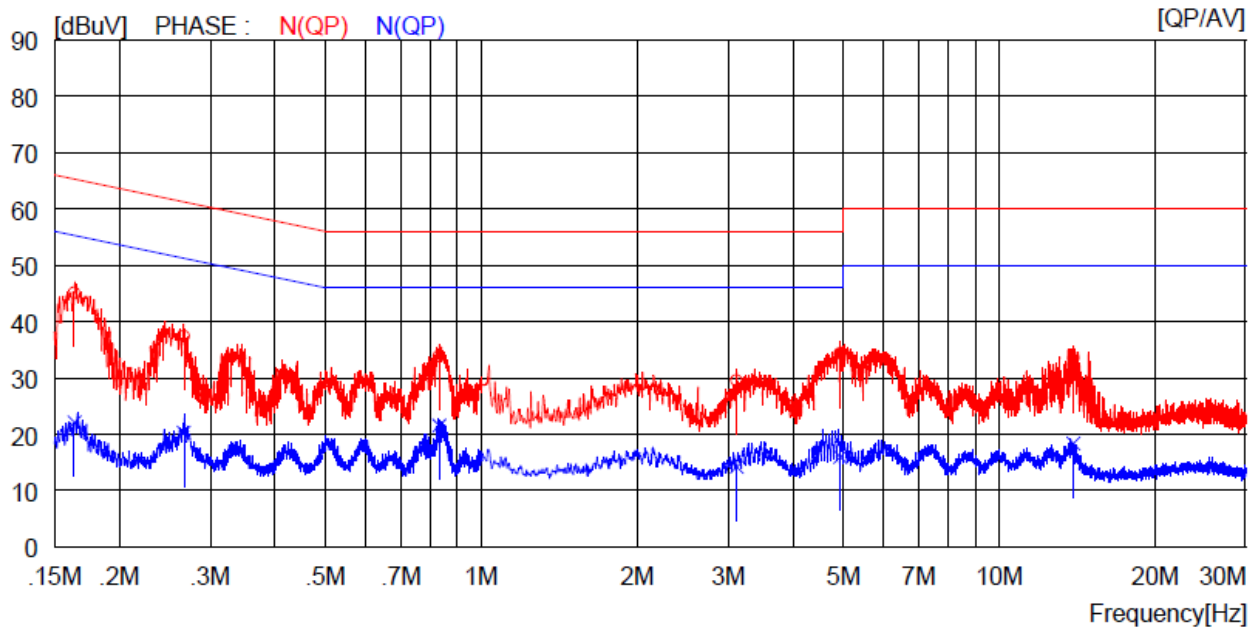

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16400	35.1	----	10.0	45.1	----	65.3	----	20.2	----	N(QP)
2	0.26700	27.5	----	9.9	37.4	----	61.2	----	23.8	----	N(QP)
3	0.83100	23.9	----	10.0	33.9	----	56.0	----	22.1	----	N(QP)
4	3.11600	19.4	----	10.1	29.5	----	56.0	----	26.5	----	N(QP)
5	4.93600	24.2	----	10.1	34.3	----	56.0	----	21.7	----	N(QP)
6	13.94000	23.3	----	10.2	33.5	----	60.0	----	26.5	----	N(QP)
7	0.16400	----	12.1	10.0	----	22.1	----	55.3	----	33.2	N(CAV)
8	0.26700	----	10.4	9.9	----	20.3	----	51.2	----	30.9	N(CAV)
9	0.83100	----	11.5	10.0	----	21.5	----	46.0	----	24.5	N(CAV)
10	3.11600	----	4.1	10.1	----	14.2	----	46.0	----	31.8	N(CAV)
11	4.93600	----	5.9	10.1	----	16.0	----	46.0	----	30.0	N(CAV)
12	13.94000	----	8.1	10.2	----	18.3	----	50.0	----	31.7	N(CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN),
cable loss and attenuator.

Tested by: Ha-Ram Lee / Manager

12.6 Test data (PoE adapter)


- Test Date : April 14, 2020
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

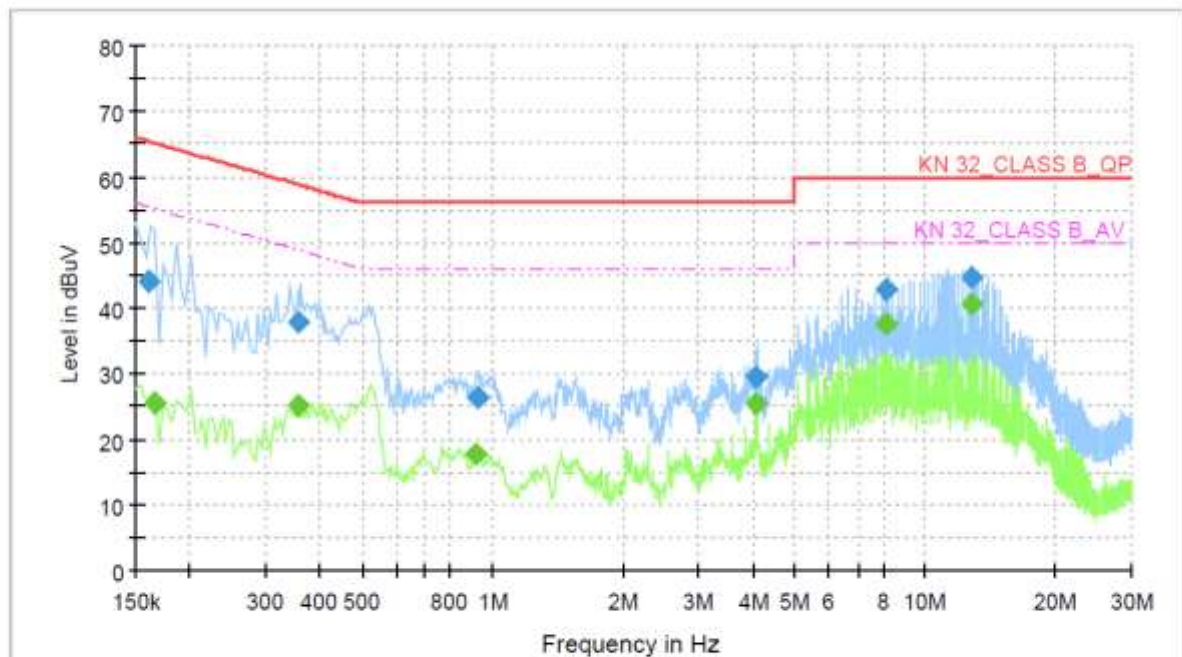

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.161500	44.02	---	65.39	21.36	3000.0	9.000	L1	9.9
0.165500	---	25.38	55.18	29.81	3000.0	9.000	L1	9.9
0.357500	---	25.00	48.79	23.78	3000.0	9.000	L1	9.9
0.357500	37.76	---	58.79	21.03	3000.0	9.000	L1	9.9
0.912860	---	17.74	46.00	28.26	3000.0	9.000	L1	10.0
0.928780	26.23	---	56.00	29.77	3000.0	9.000	L1	10.0
4.077180	---	25.31	46.00	20.69	3000.0	9.000	L1	10.1
4.077220	29.58	---	56.00	26.42	3000.0	9.000	L1	10.1
8.153260	---	37.39	50.00	12.61	3000.0	9.000	L1	10.2
8.156380	42.78	---	60.00	17.22	3000.0	9.000	L1	10.2
12.746500	44.67	---	60.00	15.33	3000.0	9.000	L1	10.4
12.746900	---	40.60	50.00	9.40	3000.0	9.000	L1	10.4

-. Tested Line : NEUTRAL LINE

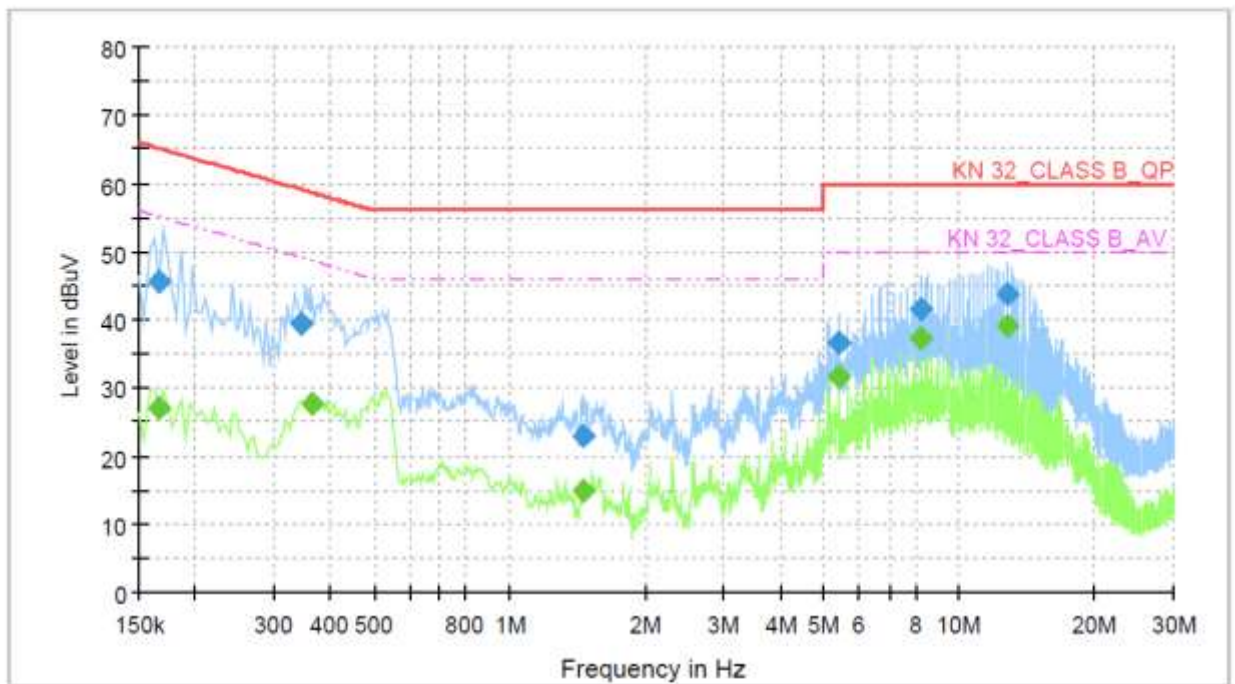

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165500	---	26.94	55.18	28.24	3000.0	9.000	N	9.9
0.165500	45.61	---	65.18	19.58	3000.0	9.000	N	9.9
0.345500	39.41	---	59.07	19.66	3000.0	9.000	N	9.9
0.362500	---	27.72	48.67	20.96	3000.0	9.000	N	9.9
1.455380	23.07	---	56.00	32.93	3000.0	9.000	N	10.0
1.455380	---	14.73	46.00	31.27	3000.0	9.000	N	10.0
5.360220	---	31.57	50.00	18.43	3000.0	9.000	N	10.1
5.360300	36.64	---	60.00	23.36	3000.0	9.000	N	10.1
8.164180	---	37.31	50.00	12.69	3000.0	9.000	N	10.3
8.172400	41.50	---	60.00	18.50	3000.0	9.000	N	10.3

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Ha-Ram Lee / Manager