



FCC TEST REPORT

**Test report
On Behalf of
Shenzhen Eternity Technology Co., Ltd
For
LTE smartphone
Model No.: HEROSP001,UW5008KLTE**

FCC ID: 2AVYL-HEROSP001

Prepared for : **Shenzhen Eternity Technology Co., Ltd**
Building A2, YingZhan Industrial Park, LongTian Street, PingShan, ShenZhen,
China

Prepared By : **Shenzhen Tongzhou Testing Co.,Ltd**
1th Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang
Street, Longhua, Shenzhen, China

Date of Test: 2020/3/2 ~ 2020/4/20 & 2020/5/18

Date of Report: 2020/5/20

Report Number: TZ200301201-E6

The test report apply only to the specific sample(s) tested under stated test conditions
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**TEST RESULT CERTIFICATION****Applicant's name** : **Shenzhen Eternity Technology Co., Ltd**Address..... : Building A2, YingZhan Industrial Park, LongTian Street, PingShan,
ShenZhen, China**Manufacture's Name** : **Shenzhen Eternity Technology Co., Ltd**Address..... : Building A2, YingZhan Industrial Park, LongTian Street, PingShan,
ShenZhen, China**Product description**

Trade Mark..... : N/A

Product name..... : LTE smartphone

Model and/or type reference : HEROSP001,UW5008KLTE

Standards : FCC Rules and Regulations Part 22 & Part 24 & Part 27
ANSI C63.26:2015

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Shenzhen Tongzhou Testing Co.,Ltd Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Shenzhen Tongzhou Testing Co.,Ltd Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of TestDate (s) of performance of tests : **2020/3/2 ~ 2020/4/20 & 2020/5/18**Date of Issue : **2020/5/20**Test Result : **Pass**

Testing Engineer :

(Anna Hu)

Technical Manager :

(Hugo Chen)

Authorized Signatory :

(Andy Zhang)



Revision History

Revision	Issue Date	Revisions	Revised By
000	2020/3/26	Initial Issue	Andy Zhang



Contents

1 TEST STANDARDS	5
2 SUMMARY	6
2.1 Product Description	6
2.2 Host System Configuration List and Details.....	8
2.3 Short description of the Equipment under Test (EUT)	8
2.5 Normal Accessory setting.....	8
2.6 EUT configuration.....	8
2.7 Related Submittal(s) / Grant (s).....	8
2.8 Modifications	8
3 TEST ENVIRONMENT.....	9
3.1 Test Facility	9
3.2 Environmental conditions	9
3.3 Test Description.....	9
3.4 Equipments Used during the Test.....	12
3.5 Measurement uncertainty.....	13
4 TEST CONDITIONS AND RESULTS.....	14
4.1 Output Power.....	14
4.1.1. Conducted Output Power	14
4.1.2. Radiated Output Power	15
4.2 Peak-to-Average Ratio (PAR)	41
4.3 Occupied Bandwidth and Emission Bandwidth.....	42
4.4 Band Edge compliance	43
4.5 Spurious Emssion on Antenna Port	44
4.6 Radiated Spurious Emssion	45
4.7 Frequency Stability under Temperature & Voltage Variations	58
5 Test Set up Photos of the EUT	60
6 External Photos of the EUT	60
7 Internal Photos of the EUT	60



1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2:](#) FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Part 22 Subpart H:](#) PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24 Subpart E:](#) PUBLIC MOBILE SERVICES

[FCC Part 27:](#) Miscellaneous Wireless Communications Services.

[ANSI/TIA-603-E-2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015:](#) IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[FCCKDB971168D01](#) Power Meas License Digital Systems



2 SUMMARY

2.1 Product Description

EUT	: LTE smartphone
Model Number	: HEROSP001,UW5008KLTE
Model Declaration	: All the same except for the model name
Test Model	: HEROSP001
Power Supply	: DC 3.7V by battery
Hardware version	: AL_A5L_MB_V10
Software version	: MOLY.LR12A.R3.MP.V88.3.T1
Sample ID	: TZ200301201 – 2#
Bluetooth	
Bluetooth Version	: V4.2+EDR
Channel Number	: 79 Channels for Bluetooth BR/EDR(DSS) : 40 Channels for BLE (DTS)
Modulation Technology	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth BR/EDR (DSS) : GFSK for BLE (DTS)
Data Rates	: Bluetooth BR/EDR (DSS): 1/2/3Mbps : BLE (DTS): 1Mbps
Antenna Type And Gain	Internal Antenna /2.84 dBi(Max.)
WiFi	
WLAN	: Supported IEEE 802.11a/b/g/n
WLAN FCC Operation Frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz : IEEE 802.11n HT20:2412-2462MHz / 5180-5240MHz IEEE 802.11n HT40:2422-2452MHz / 5190-5230MHz IEEE 802.11a: 5180-5240MHz
WLAN Channel Number	11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20) : 7 Channels for 2422-2452MHz(IEEE 802.11n HT40) : 4 Channels for 5180-5240MHz (IEEE 802.11a/n HT20) 2 Channels for 5190-5230MHz (IEEE 802.11n HT40)
WLAN Modulation Technology	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) : IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) : IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type And Gain	Internal Antenna : Wlan2.4G: 2.84 dBi(Max.) Wlan5G: 0.87 dBi(Max.)
GSM	
GSM FCC Operation Frequency	: GSM850(UL: 824 – 849 MHz/DL: 869 – 894 MHz) GSM1900(UL: 1850 –1910 MHz/DL: 1930 – 1990 MHz)
Channel Separation	: 0.2MHz
Modulation Technology	: GMSK,8PSK
Antenna Type And Gain	: Internal Antenna GSM850: 2.2 dBi



PCS1900: 0.57dBi

UTRA

UTRA FCC Operation Frequency	WCDMA BAND II (UL: 1850 – 1910 MHz/DL: 1930 – 1990 MHz) : WCDMA BAND IV (UL: 1710 – 1755 MHz/DL: 2110 – 2155 MHz) WCDMA BAND V (UL: 824 – 849 MHz/DL: 869 – 894 MHz)
Channel Separation	: 0.2MHz
Modulation Technology	: OFDM (16QAM, QPSK)
Antenna Type And Gain	Internal Antenna : WCDMA BAND II: 0.57dBi WCDMA BAND IV: 1.26dBi WCDMA BAND V: 2.2dBi

CDMA

UTRA FCC Operation Frequency	BC0 (UL: 824 – 849 MHz/DL: 869 – 894 MHz) : BC1 (UL: 1850 – 1910 MHz/DL: 1930 – 1990 MHz) BC10 (UL: 816 – 824 MHz/DL: 861 – 869 MHz)
Channel Separation	BC0: 0.03MHz : BC1: 0.05MHz BC10: 0.025MHz
Modulation Technology	: OFDM (16QAM, QPSK)
Antenna Type And Gain	Internal Antenna : BC0: 2.2dBi BC1: 0.57dBi BC10: 2.2dBi

E-UTRA

E-UTRA FCC Operation Frequency	☒ FDD Band 2 (UL: 1850 – 1910 MHz/DL: 1930 – 1990 MHz) ☒ FDD Band 4 (UL: 1710 – 1755 MHz/DL: 2110 – 2155 MHz) ☒ FDD Band 5 (UL: 824 – 849 MHz/DL: 869 – 894 MHz) ☒ FDD Band 12 (UL: 699 – 716 MHz/DL: 729 – 746 MHz) ☒ FDD Band 13 (UL: 777 – 787 MHz/DL: 746 – 756 MHz) : ☒ FDD Band 17 (UL: 704 – 716 MHz/DL: 746 – 756 MHz) ☒ FDD Band 25 (UL: 1850 – 1915 MHz/DL: 1930 – 1995 MHz) ☒ FDD Band 26 (UL: 824 – 849 MHz/DL: 869 – 894 MHz) ☒ FDD Band 66 (UL: 1710 – 1780 MHz/DL: 2110 – 2180 MHz) ☒ TDD Band 41 (UL: 2496 MHz - 2690 MHz/DL: 2496 - 2690 MHz) ☒ FDD Band 71 (UL: 663 MHz - 698 MHz/DL: 617 - 652 MHz)
Channel Separation	: 0.1 MHz
Modulation Technology	: OFDM (16QAM, QPSK)
Antenna Type And Gain	Internal Antenna FDD Band 2: 0.57 dBi, FDD Band 4: 1.26 dBi, FDD Band 5: 2.2 dBi, FDD Band 12: 0.7 dBi, : FDD Band 13: -0.05 dBi, FDD Band 17: 0.7 dBi, FDD Band 25: 0.57 dBi, FDD Band 26: 2.2 dBi, FDD Band 66: 2.12 dBi, TDD Band 41: 2.34 dBi FDD Band 71: -0.12 dBi

Note: Antenna position refer to EUT Photos.



2.2 Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate

2.3 Short description of the Equipment under Test (EUT)

2.3.1 General Description

EUT is subscriber equipment in the LTE/WCDMA/GSM system. Support bands as list in section 2.1 of this report.

2.5 Normal Accessory setting

Fully charged battery was used during the test.

2.6 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

☐ supplied by the lab ☒ supplied by the manufacturer

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO LTD.	Adapter	TPA-46B050100UU	N/A	N/A

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AVYL-HEROSP001** filing to comply with FCC Part 24 and FCC Part 27 Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.



3 TEST ENVIRONMENT

3.1 Test Facility

Designation Number: CN1229

Test Firm Registration Number: 616276

The 3m-Semi anechoic test site fulfills CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010

3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

FDD Band 2/25

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	2.1046, 24.232(c)	EIRP $\leq$ 2W(33dBm)	Pass
Bandwidth	2.1049 24.238(a)	OBW: No limit. EBW: No limit.	Pass
Band Edges	2.1051, 24.238(a)	-13dBm	Pass
Spurious Emission at Antenna Terminals	2.1051, 24.238(a)	-13dBm	Pass
Field Strength of Spurious Radiation	2.1053, 24.238(a)	-13dBm	Pass
Frequency Stability	2.1055, 24.235	the fundamental emission stays within the authorized frequency block.	Pass
Peak to average ratio	24.232(d)	<13dB	Pass

FDD Band 5/26

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	2.1046, 2.913(a)	ERP $\leq$ 7W(38.5dBm)	Pass
Occupied Bandwidth	2.1049	OBW: No limit.	Pass
Emission Bandwidth	22.917(b)	EBW: No limit.	Pass
Band Edges Compliance	2.1051, 22.917(a)(b)	-13dBm	Pass
Spurious Emission at Antenna Terminals	2.1051, 22.917	-13dBm	Pass
Field Strength of Spurious Radiation	2.1053, 22.917	-13dBm	Pass
Frequency Stability	2.1055, 22.355	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass
Peak to average ratio	2.1046, 2.913(a)	<13dB	Pass

**FDD Band 4/66**

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	2.1046, 27.50(d)	ERP $\leq$ 1W(30dBm)	Pass
Occupied Bandwidth	2.1049	OBW: No limit.	Pass
Emission Bandwidth	2.1049	EBW: No limit.	Pass
Band Edges Compliance	2.1051, 27.53(h)	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	2.1051, 27.53(h)	-13dBm	Pass
Field Strength of Spurious Radiation	2.1053, 27.53(h)	-13dBm	Pass
Frequency Stability	2.1055, 27.54	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass
Peak to average ratio	2.1046, 27.50(d)	<13dB	Pass

FDD Band 12/17/71

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	2.1046, 27.50(c)	ERP $\leq$ 3W(34.8dBm)	Pass
Occupied Bandwidth	2.1049	OBW: No limit.	Pass
Emission Bandwidth	2.1049	EBW: No limit.	Pass
Band Edges Compliance	2.1051, 27.53(g)	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	2.1051, 27.53(g)	-13dBm	Pass
Field Strength of Spurious Radiation	2.1053, 27.53(g)	-13dBm	Pass
Frequency Stability	2.1055, 27.54	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass
Peak to average ratio	2.1046, 27.50(d)	<13dB	Pass

FDD Band 13

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	2.1046, 27.50(b)	ERP $\leq$ 3W(34.8dBm)	Pass
Occupied Bandwidth	2.1049	OBW: No limit.	Pass
Emission Bandwidth	2.1049	EBW: No limit.	Pass
Band Edges Compliance	2.1051, 27.53(c)	27.53(C) for detail	Pass
Spurious Emission at Antenna Terminals	2.1051, 27.53(c)	-13dBm	Pass
Field Strength of Spurious Radiation	2.1053, 27.53(c)	-13dBm	Pass
Frequency Stability	2.1055, 27.54	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass
Peak to average ratio	2.1046, 27.50(d)	<13dB	Pass

**FDD Band 41**

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	2.1046, 27.50(h)(2)	EIRP $\leq$ 2W(33dBm)	Pass
Occupied Bandwidth	2.1049	OBW: No limit.	Pass
Emission Bandwidth	2.1049	EBW: No limit.	Pass
Band Edges(Out of Band Emission) Compliance	2.1051, 27.53(m)	KDB 971 168 D02 971168 D02 Misc OOB E License Digital Systems v01 &27.53(m) for detail the limit is upon different OBW	Pass
Spurious Emission at Antenna Terminals	2.1051, 27.53(g)	-13dBm	Pass
Field Strength of Spurious Radiation	2.1053, 27.53(g)	-13dBm	Pass
Frequency Stability	2.1055, 27.54	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass
Peak to average ratio	2.1046, 27.50(d)	<13dB	Pass



3.4 Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	MXA Signal Analyzer	Keysight	N9020A	MY52091623	2020/1/2	2021/1/1
2	Power Sensor	Agilent	U2021XA	MY5365004	2020/1/2	2021/1/1
3	Power Meter	Agilent	U2531A	TW53323507	2020/1/2	2021/1/1
4	Wideband Antenna	schwarzbeck	VULB 9163	958	2019/11/16	2022/11/15
5	Horn Antenna	schwarzbeck	9120D-1141	1574	2019/11/16	2022/11/15
6	EMI Test Receiver	R&S	ESCI	100849/003	2020/1/2	2021/1/1
7	Controller	MF	MF7802	N/A	N/A	N/A
8	Amplifier	schwarzbeck	BBV 9743	209	2020/1/2	2021/1/1
9	Amplifier	Tonscend	TSAMP-0518SE	--	2020/1/2	2021/1/1
10	RF Cable(below 1GHz)	HUBER+SUHNER	RG214	N/A	2020/1/2	2021/1/1
11	RF Cable(above 1GHz)	HUBER+SUHNER	RG214	N/A	2020/1/2	2021/1/1
12	Artificial Mains	ROHDE & SCHWARZ	ENV 216	101333-IP	2020/1/2	2021/1/1
12	EMI Test Software	ROHDE & SCHWARZ	ESK1	V1.71	N/A	N/A
14	RE test software	Tonscend	JS32-RE	V2.0.2.0	N/A	N/A
15	Test Software	Tonscend	JS1120-2	V2.5.77.0418	N/A	N/A
16	UNIVERSAL RADIO COMMUNICATION	R&S	CMW500	101855	2020/1/2	2021/1/1



3.5 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 “ Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics” and is documented in the Shenzhen Tongzhou Testing Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Tongzhou Testing Co.,Ltd is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.10 dB	(1)
Radiated Emission	1~18GHz	3.70 dB	(1)
Radiated Emission	18-40GHz	3.90 dB	(1)
Conducted Disturbance	0.15~30MHz	1.63 dB	(1)
Conducted Power	9KHz~18GHz	0.61 dB	(1)
Spurious RF Conducted Emission	9KHz~40GHz	1.22 dB	(1)
Band Edge Compliance of RF Emission	9KHz~40GHz	1.22 dB	(1)
Occuiped Bandwidth	9KHz~40GHz	-	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4 TEST CONDITIONS AND RESULTS


4.1 Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1. Conducted Output Power

TEST CONFIGURATION

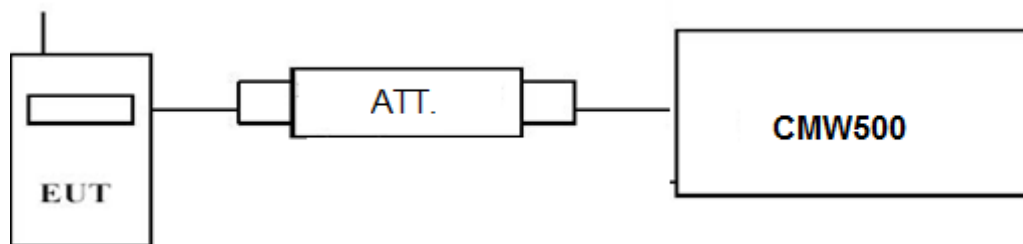

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Pass

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;*
- please refer to Appendix A*

4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Per Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Per Part 27.50(d) (4) specifies, Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band are limited to 1W EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications.


Per Part 27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

Per Part 27.50(b) (9) specifies, Control stations and mobile stations transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands and fixed stations transmitting in the 787-788 MHz and 805-806 MHz bands are limited to 30 watts ERP.

Per Part 27.50(a) (3) specifies, *Mobile and portable stations*. (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

Per Part 27.50(h) (2) specifies, The following power limits shall apply in the BRS and EBS: *Mobile and other user stations*. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST CONFIGURATION

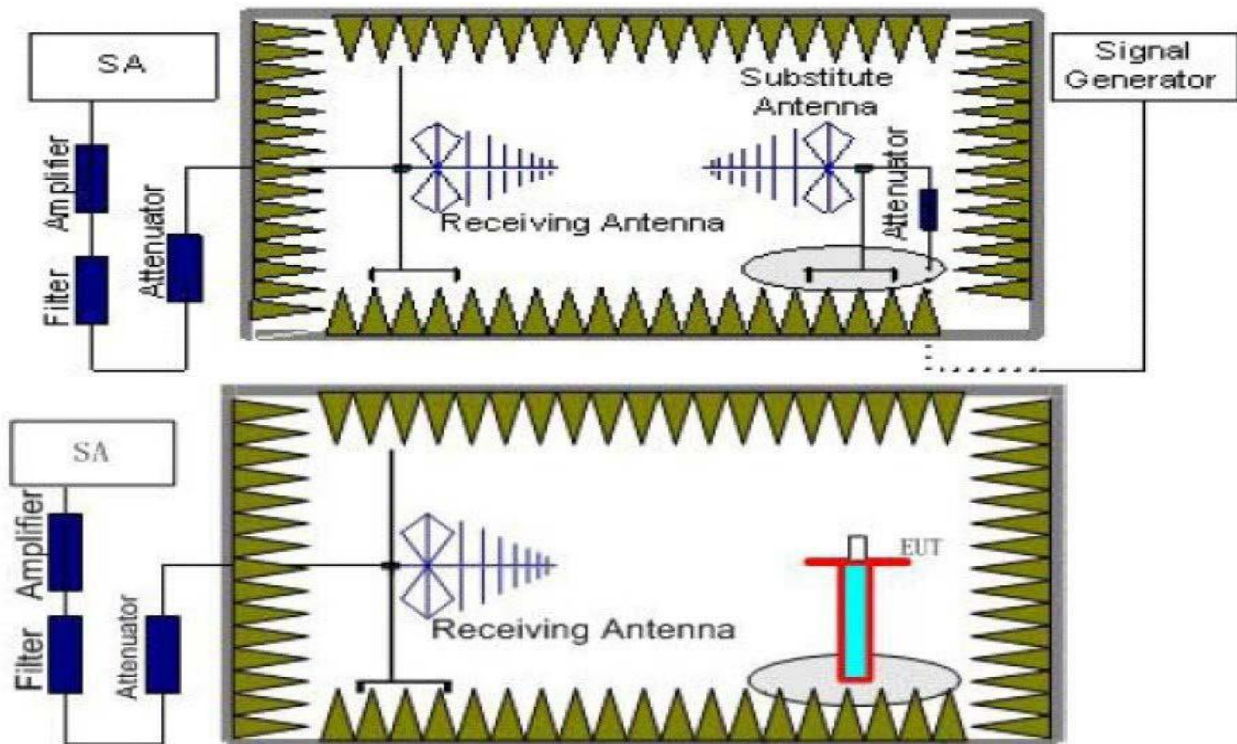

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77; recorded worst case for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;.
2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. $ERP = EIRP - 2.15\text{dBi}$ as EIRP by subtracting the gain of the dipole.
4. Margin = Limit - Emission Level
5. We test the H direction and V direction recorded worst case

*LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-22.00	0.87	8.4	33.81	0	19.34	33	13.66	V
1880	-22.07	0.88	8.43	33.81	0	19.29	33	13.71	V
1909.3	-22.32	0.88	8.46	33.81	0	19.07	33	13.93	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-21.49	0.87	8.4	33.81	0	19.85	33	13.15	V
1880	-21.43	0.88	8.43	33.81	0	19.93	33	13.07	V
1908.5	-21.87	0.88	8.46	33.81	0	19.52	33	13.48	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-21.54	0.87	8.4	33.81	0	19.80	33	13.20	V
1880	-21.50	0.88	8.43	33.81	0	19.86	33	13.14	V
1907.5	-21.81	0.88	8.46	33.81	0	19.58	33	13.42	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855	-21.74	0.87	8.41	33.81	0	19.61	33	13.39	V
1880	-21.56	0.88	8.43	33.81	0	19.80	33	13.20	V
1905	-22.09	0.88	8.46	33.81	0	19.30	33	13.70	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-22.08	0.87	8.41	33.81	0	19.27	33	13.73	V
1880	-21.54	0.88	8.43	33.81	0	19.82	33	13.18	V
1902.5	-21.85	0.88	8.46	33.81	0	19.54	33	13.46	V

*LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860	-21.56	0.87	8.41	33.81	0	19.79	33	13.21	V
1880	-22.20	0.88	8.43	33.81	0	19.16	33	13.84	V
1900	-21.74	0.88	8.45	33.81	0	19.64	33	13.36	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-22.13	0.87	8.4	33.81	0	19.21	33	13.79	V
1880	-21.71	0.88	8.43	33.81	0	19.65	33	13.35	V
1909.3	-22.04	0.88	8.46	33.81	0	19.35	33	13.65	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-21.90	0.87	8.4	33.81	0	19.44	33	13.56	V
1880	-22.23	0.88	8.43	33.81	0	19.13	33	13.87	V
1908.5	-21.76	0.88	8.46	33.81	0	19.63	33	13.37	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-22.30	0.87	8.4	33.81	0	19.04	33	13.96	V
1880	-21.76	0.88	8.43	33.81	0	19.60	33	13.40	V
1907.5	-22.34	0.88	8.46	33.81	0	19.05	33	13.95	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855	-21.38	0.87	8.41	33.81	0	19.97	33	13.03	V
1880	-21.86	0.88	8.43	33.81	0	19.50	33	13.50	V
1905	-22.37	0.88	8.46	33.81	0	19.02	33	13.98	V

*LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-23.26	0.87	8.41	33.81	0	18.09	33	14.91	V
1880	-23.01	0.88	8.43	33.81	0	18.35	33	14.65	V
1902.5	-23.45	0.88	8.46	33.81	0	17.94	33	15.06	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860	-22.28	0.87	8.41	33.81	0	19.07	33	13.93	V
1880	-22.18	0.88	8.43	33.81	0	19.18	33	13.82	V
1900	-22.35	0.88	8.45	33.81	0	19.03	33	13.97	V

*LTE FDD Band 4_Channel Bandwidth 1.4MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-23.70	0.84	8.25	33.79	0	17.50	30	12.50	V
1732.5	-23.05	0.85	8.28	33.79	0	18.17	30	11.83	V
1754.3	-22.98	0.85	8.3	33.8	0	18.27	30	11.73	V

LTE FDD Band 4_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-22.94	0.84	8.25	33.79	0	18.26	30	11.74	V
1732.5	-23.66	0.85	8.28	33.79	0	17.56	30	12.44	V
1753.5	-23.03	0.85	8.3	33.8	0	18.22	30	11.78	V

LTE FDD Band 4_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-23.61	0.84	8.26	33.79	0	17.60	30	12.40	V
1732.5	-23.61	0.85	8.28	33.79	0	17.61	30	12.39	V
1752.5	-23.57	0.85	8.3	33.8	0	17.68	30	12.32	V

LTE FDD Band 4_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715	-23.20	0.84	8.26	33.79	0	18.01	30	11.99	V
1732.5	-22.88	0.85	8.28	33.79	0	18.34	30	11.66	V
1750	-22.87	0.85	8.3	33.8	0	18.38	30	11.62	V

LTE FDD Band 4_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.5	-22.88	0.84	8.26	33.79	0	18.33	30	11.67	V
1732.5	-23.48	0.85	8.28	33.79	0	17.74	30	12.26	V
1747.5	-22.82	0.85	8.29	33.79	0	18.41	30	11.59	V

*LTE FDD Band 4_Channel Bandwidth 20MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720	-23.63	0.84	8.26	33.79	0	17.58	30	12.42	V
1732.5	-23.31	0.85	8.28	33.79	0	17.91	30	12.09	V
1745	-23.44	0.85	8.29	33.79	0	17.79	30	12.21	V

LTE FDD Band 4_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-23.45	0.84	8.25	33.79	0	17.75	30	12.25	V
1732.5	-23.21	0.85	8.28	33.79	0	18.01	30	11.99	V
1754.3	-22.77	0.85	8.3	33.8	0	18.48	30	11.52	V

LTE FDD Band 4_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-23.41	0.84	8.25	33.79	0	17.79	30	12.21	V
1732.5	-23.35	0.85	8.28	33.79	0	17.87	30	12.13	V
1753.5	-23.73	0.85	8.3	33.8	0	17.52	30	12.48	V

LTE FDD Band 4_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-22.86	0.84	8.26	33.79	0	18.35	30	11.65	V
1732.5	-23.64	0.85	8.28	33.79	0	17.58	30	12.42	V
1752.5	-23.24	0.85	8.3	33.8	0	18.01	30	11.99	V

LTE FDD Band 4_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715	-23.05	0.84	8.26	33.79	0	18.16	30	11.84	V
1732.5	-23.41	0.85	8.28	33.79	0	17.81	30	12.19	V
1750	-23.70	0.85	8.3	33.8	0	17.55	30	12.45	V

*LTE FDD Band 4_Channel Bandwidth 15MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarizatio n
1717.5	-23.12	0.84	8.26	33.79	0	18.09	30	11.91	V
1732.5	-22.87	0.85	8.28	33.79	0	18.35	30	11.65	V
1747.5	-23.29	0.85	8.29	33.79	0	17.94	30	12.06	V

LTE FDD Band 4_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarizatio n
1720	-22.76	0.84	8.26	33.79	0	18.45	30	11.55	V
1732.5	-23.27	0.85	8.28	33.79	0	17.95	30	12.05	V
1745	-23.75	0.85	8.29	33.79	0	17.48	30	12.52	V

*LTE FDD Band 5_Channel Bandwidth 1.4MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-17.98	0.61	7.32	33.68	2.15	20.26	38.45	18.33	V
836.5	-18.21	0.62	7.34	33.68	2.15	20.04	38.45	19.17	V
848.3	-17.88	0.62	7.35	33.68	2.15	20.38	38.45	19.44	V

LTE FDD Band 5_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-18.10	0.61	7.33	33.68	2.15	20.15	38.45	19.01	V
836.5	-18.01	0.62	7.34	33.68	2.15	20.24	38.45	19.14	V
847.5	-17.86	0.62	7.35	33.68	2.15	20.40	38.45	19.55	V

LTE FDD Band 5_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-17.70	0.61	7.33	33.68	2.15	20.55	38.45	19.24	V
836.5	-17.80	0.62	7.34	33.68	2.15	20.45	38.45	18.04	V
846.5	-17.37	0.62	7.35	33.68	2.15	20.89	38.45	19.34	V

LTE FDD Band 5_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829	-17.74	0.61	7.33	33.68	2.15	20.51	38.45	20.66	V
836.5	-17.31	0.62	7.34	33.68	2.15	20.94	38.45	18.73	V
844	-17.82	0.62	7.34	33.68	2.15	20.43	38.45	19.89	V

LTE FDD Band 5_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-17.71	0.61	7.32	33.68	2.15	20.53	38.45	18.33	V
836.5	-17.66	0.62	7.34	33.68	2.15	20.59	38.45	19.17	V
848.3	-17.93	0.62	7.35	33.68	2.15	20.33	38.45	19.44	V

*LTE FDD Band 5_Channel Bandwidth 3MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-18.06	0.61	7.33	33.68	2.15	20.19	33.0	19.01	V
836.5	-17.79	0.62	7.34	33.68	2.15	20.46	33.0	19.14	V
847.5	-17.49	0.62	7.35	33.68	2.15	20.77	33.0	19.55	V

LTE FDD Band 5_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-17.51	0.61	7.33	33.68	2.15	20.74	38.45	19.24	V
836.5	-18.19	0.62	7.34	33.68	2.15	20.06	38.45	18.04	V
846.5	-17.91	0.62	7.35	33.68	2.15	20.35	38.45	19.34	V

LTE FDD Band 5_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829	-17.33	0.61	7.33	33.68	2.15	20.92	38.45	20.66	V
836.5	-17.77	0.62	7.34	33.68	2.15	20.48	38.45	18.73	V
844	-17.79	0.62	7.34	33.68	2.15	20.46	38.45	19.89	V

*LTE FDD Band 12_Channel Bandwidth 1.4MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
699.7	-18.84	0.55	7.2	33.65	2.15	19.31	34.8	15.49	V
707.5	-18.73	0.55	7.21	33.65	2.15	19.43	34.8	15.37	V
715.3	-19.05	0.56	7.22	33.65	2.15	19.11	34.8	15.69	V

LTE FDD Band 12_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.5	-18.44	0.55	7.2	33.65	2.15	19.71	34.8	15.09	V
707.5	-18.21	0.55	7.21	33.65	2.15	19.95	34.8	14.85	V
714.5	-18.55	0.56	7.21	33.65	2.15	19.6	34.8	15.2	V

LTE FDD Band 12_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.5	-19.09	0.55	7.2	33.65	2.15	19.06	34.8	15.74	V
707.5	-18.3	0.55	7.21	33.65	2.15	19.86	34.8	14.94	V
713.5	-19.09	0.56	7.21	33.65	2.15	19.06	34.8	15.74	V

LTE FDD Band 12_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704	-18.45	0.55	7.2	33.65	2.15	19.7	34.8	15.1	V
707.5	-18.61	0.55	7.21	33.65	2.15	19.55	34.8	15.25	V
711	-18.39	0.56	7.21	33.65	2.15	19.76	34.8	15.04	V

LTE FDD Band 12_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
699.7	-19.15	0.55	7.2	33.65	2.15	19	34.8	15.8	V
707.5	-18.52	0.55	7.21	33.65	2.15	19.64	34.8	15.16	V
715.3	-18.9	0.56	7.22	33.65	2.15	19.26	34.8	15.54	V

*LTE FDD Band 12_Channel Bandwidth 3MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.5	-18.42	0.55	7.2	33.65	2.15	19.73	34.8	15.07	V
707.5	-18.86	0.55	7.21	33.65	2.15	19.3	34.8	15.5	V
714.5	-19.04	0.56	7.21	33.65	2.15	19.11	34.8	15.69	V

LTE FDD Band 12_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.5	-18.8	0.55	7.2	33.65	2.15	19.35	34.8	15.45	V
707.5	-18.8	0.55	7.21	33.65	2.15	19.36	34.8	15.44	V
713.5	-18.84	0.56	7.21	33.65	2.15	19.31	34.8	15.49	V

LTE FDD Band 12_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704	-18.91	0.55	7.2	33.65	2.15	19.24	34.8	15.56	V
707.5	-18.19	0.55	7.21	33.65	2.15	19.97	34.8	14.83	V
711	-18.43	0.56	7.21	33.65	2.15	19.72	34.8	15.08	V

*LTE FDD Band 13_Channel Bandwidth 5MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
779.5	-17.86	0.59	7.28	33.67	2.15	20.35	34.8	14.45	V
782	-17.49	0.59	7.28	33.67	2.15	20.72	34.8	14.08	V
784.5	-17.28	0.59	7.28	33.67	2.15	20.93	34.8	13.87	V

LTE FDD Band 13_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	#REF! (dBm)	Limit (dBm)	Margin (dB)	Polarization
782	-17.83	0.59	7.28	33.67	2.15	20.38	34.8	14.42	V

LTE FDD Band 13_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
779.5	-18.04	0.59	7.28	33.67	2.15	20.17	34.8	14.63	V
782	-17.63	0.59	7.28	33.67	2.15	20.58	34.8	14.22	V
784.5	-18.18	0.59	7.28	33.67	2.15	20.03	34.8	14.77	V

LTE FDD Band 13_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	#REF! (dBm)	Limit (dBm)	Margin (dB)	Polarization
782	-17.64	0.59	7.28	33.67	2.15	20.57	34.8	14.23	V



LTE FDD Band 17_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenn a Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Averga e ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
706.5	-18.54	0.55	7.2	33.65	2.15	19.61	34.8	15.19	V
710	-19.09	0.55	7.21	33.65	2.15	19.07	34.8	15.73	V
713.5	-18.36	0.56	7.21	33.65	2.15	19.79	34.8	15.01	V

LTE FDD Band 17_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenn a Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Averga e ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
709	-18.9	0.55	7.2	33.65	2.15	19.25	34.8	15.55	V
710	-19.11	0.55	7.21	33.65	2.15	19.05	34.8	15.75	V
711	-18.8	0.56	7.21	33.65	2.15	19.35	34.8	15.45	V

LTE FDD Band 17_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenn a Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Averga e ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
706.5	-19.14	0.55	7.2	33.65	2.15	19.01	34.8	15.79	V
710	-19.13	0.55	7.21	33.65	2.15	19.03	34.8	15.77	V
713.5	-18.7	0.56	7.21	33.65	2.15	19.45	34.8	15.35	V

LTE FDD Band 17_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenn a Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Averga e ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
709	-18.9	0.55	7.2	33.65	2.15	19.25	34.8	15.55	V
710	-18.67	0.55	7.21	33.65	2.15	19.49	34.8	15.31	V
711	-18.57	0.56	7.21	33.65	2.15	19.58	34.8	15.22	V

*LTE FDD Band 25_Channel Bandwidth 1.4MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-21.95	0.87	8.4	33.81	0	19.39	33.0	13.6	V
1882.5	-21.6	0.88	8.44	33.81	0	19.77	33.0	13.2	V
1914.3	-21.72	0.88	8.47	33.81	0	19.68	33.0	13.3	V

LTE FDD Band 25_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-21.51	0.87	8.4	33.81	0	19.83	33.0	13.2	V
1882.5	-22.07	0.88	8.44	33.81	0	19.3	33.0	13.7	V
1913.5	-22.33	0.88	8.47	33.81	0	19.07	33.0	13.9	V

LTE FDD Band 25_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-21.52	0.87	8.4	33.81	0	19.82	33.0	13.2	V
1882.5	-22.14	0.88	8.44	33.81	0	19.23	33.0	13.8	V
1912.5	-21.83	0.88	8.47	33.81	0	19.57	33.0	13.4	V

LTE FDD Band 25_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855	-21.93	0.87	8.41	33.81	0	19.42	33.0	13.6	V
1882.5	-22.21	0.88	8.44	33.81	0	19.16	33.0	13.8	V
1910	-22	0.88	8.46	33.81	0	19.39	33.0	13.6	V

LTE FDD Band 25_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-21.4	0.87	8.41	33.81	0	19.95	33.0	13.1	V
1882.5	-21.91	0.88	8.44	33.81	0	19.46	33.0	13.5	V
1907.5	-21.99	0.88	8.46	33.81	0	19.4	33.0	13.6	V

*LTE FDD Band 25_Channel Bandwidth 20MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860	-21.44	0.87	8.41	33.81	0	19.91	33.0	13.1	V
1882.5	-21.87	0.88	8.44	33.81	0	19.5	33.0	13.5	V
1905	-22.16	0.88	8.46	33.81	0	19.23	33.0	13.8	V

LTE FDD Band 25_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-22	0.87	8.4	33.81	0	19.34	33.0	13.7	V
1882.5	-21.52	0.88	8.44	33.81	0	19.85	33.0	13.2	V
1914.3	-21.88	0.88	8.47	33.81	0	19.52	33.0	13.5	V

LTE FDD Band 25_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-21.92	0.87	8.4	33.81	0	19.42	33.0	13.6	V
1882.5	-22.16	0.88	8.44	33.81	0	19.21	33.0	13.8	V
1913.5	-21.66	0.88	8.47	33.81	0	19.74	33.0	13.3	V

LTE FDD Band 25_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-21.42	0.87	8.4	33.81	0	19.92	33.0	13.1	V
1882.5	-22.25	0.88	8.44	33.81	0	19.12	33.0	13.9	V
1912.5	-21.4	0.88	8.47	33.81	0	20	33.0	13.0	V

LTE FDD Band 25_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855	-22.35	0.87	8.41	33.81	0	19	33.0	14.0	V
1882.5	-21.52	0.88	8.44	33.81	0	19.85	33.0	13.2	V
1910	-22.37	0.88	8.46	33.81	0	19.02	33.0	14.0	V

*LTE FDD Band 25_Channel Bandwidth 15MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-23.26	0.87	8.41	33.81	0	18.09	33.0	14.9	V
1882.5	-23.02	0.88	8.44	33.81	0	18.35	33.0	14.7	V
1907.5	-23.45	0.88	8.46	33.81	0	17.94	33.0	15.1	V

LTE FDD Band 25_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860	-21.81	0.87	8.41	33.81	0	19.54	33.0	13.5	V
1882.5	-21.46	0.88	8.44	33.81	0	19.91	33.0	13.1	V
1905	-22.11	0.88	8.46	33.81	0	19.28	33.0	13.7	V

*LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-19.56	0.84	8.25	33.79	2.15	19.49	38.5	19.01	V
836.5	-19.98	0.85	8.29	33.79	2.15	19.1	38.5	19.4	V
848.3	-20.04	0.86	8.33	33.8	2.15	19.08	38.5	19.42	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-19.21	0.84	8.25	33.79	2.15	19.84	38.5	18.66	V
836.5	-19.18	0.85	8.29	33.79	2.15	19.9	38.5	18.6	V
847.5	-19.67	0.86	8.33	33.8	2.15	19.45	38.5	19.05	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-19.73	0.84	8.26	33.79	2.15	19.33	38.5	19.17	V
836.5	-19.78	0.85	8.29	33.79	2.15	19.3	38.5	19.2	V
846.5	-20.09	0.86	8.32	33.8	2.15	19.02	38.5	19.48	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829	-19.09	0.84	8.26	33.79	2.15	19.97	38.5	18.53	V
836.5	-19.71	0.85	8.29	33.79	2.15	19.37	38.5	19.13	V
844	-19.27	0.86	8.32	33.8	2.15	19.84	38.5	18.66	V

LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-19.25	0.84	8.26	33.79	2.15	19.81	38.5	18.69	V
836.5	-19.67	0.85	8.29	33.79	2.15	19.41	38.5	19.09	V
841.5	-19.35	0.85	8.32	33.8	2.15	19.77	38.5	18.73	V



LTE FDD Band 26_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-19.98	0.84	8.25	33.79	2.15	19.07	38.5	19.43	V
836.5	-19.4	0.85	8.29	33.79	2.15	19.68	38.5	18.82	V
848.3	-19.77	0.86	8.33	33.8	2.15	19.35	38.5	19.15	V

LTE FDD Band 26_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-19.56	0.84	8.25	33.79	2.15	19.49	38.5	19.01	V
836.5	-19.82	0.85	8.29	33.79	2.15	19.26	38.5	19.24	V
847.5	-19.83	0.86	8.33	33.8	2.15	19.29	38.5	19.21	V

LTE FDD Band 26_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-19.62	0.84	8.26	33.79	2.15	19.44	38.5	19.06	V
836.5	-19.35	0.85	8.29	33.79	2.15	19.73	38.5	18.77	V
846.5	-19.16	0.86	8.32	33.8	2.15	19.95	38.5	18.55	V

LTE FDD Band 26_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829	-19.21	0.84	8.26	33.79	2.15	19.85	38.5	18.65	V
836.5	-19.21	0.85	8.29	33.79	2.15	19.87	38.5	18.63	V
844	-19.94	0.86	8.32	33.8	2.15	19.17	38.5	19.33	V

LTE FDD Band 26_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-19.15	0.84	8.26	33.79	2.15	19.91	38.5	18.59	V
836.5	-19.8	0.85	8.29	33.79	2.15	19.28	38.5	19.22	V
841.5	-19.93	0.85	8.32	33.8	2.15	19.19	38.5	19.31	V

*LTE FDD Band 41_Channel Bandwidth 5MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2498.5	-22.15	1	9.09	33.87	0	19.81	33	13.19	V
2593	-22.46	1.02	9.19	33.88	0	19.59	33	13.41	V
2687.5	-22.5	1.04	9.29	33.89	0	19.64	33	13.36	V

LTE FDD Band 41_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501	-22.29	1	9.09	33.87	0	19.67	33	13.33	V
2593	-22.22	1.02	9.19	33.88	0	19.83	33	13.17	V
2685	-22.61	1.04	9.29	33.89	0	19.53	33	13.47	V

LTE FDD Band 41_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.5	-22.79	1	9.09	33.87	0	19.17	33	13.83	V
2593	-22.92	1.02	9.19	33.88	0	19.13	33	13.87	V
2682.5	-22.18	1.04	9.28	33.89	0	19.95	33	13.05	V

LTE FDD Band 41_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506	-22.12	1	9.1	33.87	0	19.85	33	13.15	V
2593	-22.8	1.02	9.19	33.88	0	19.25	33	13.75	V
2680	-22.39	1.04	9.28	33.89	0	19.74	33	13.26	V

LTE FDD Band 41_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2498.5	-22.3	1	9.09	33.87	0	19.66	33	13.34	V
2593	-22.36	1.02	9.19	33.88	0	19.69	33	13.31	V
2687.5	-23	1.04	9.29	33.89	0	19.14	33	13.86	V

*LTE FDD Band 41_Channel Bandwidth 10MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501	-22.03	1	9.09	33.87	0	19.93	33	13.07	V
2593	-22.43	1.02	9.19	33.88	0	19.62	33	13.38	V
2685	-22.3	1.04	9.29	33.89	0	19.84	33	13.16	V

LTE FDD Band 41_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.5	-20.68	1	9.09	33.87	2.15	19.13	33	13.87	V
2593	-20.85	1.02	9.19	33.88	2.15	19.05	33	13.95	V
2682.5	-20.97	1.04	9.28	33.89	2.15	19.01	33	13.99	V

LTE FDD Band 41_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506	-22	1	9.1	33.87	0	19.97	33	13.03	V
2593	-22.68	1.02	9.19	33.88	0	19.37	33	13.63	V
2680	-23.01	1.04	9.28	33.89	0	19.12	33	13.88	V

*LTE FDD Band 66_Channel Bandwidth 1.4MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-22.16	0.84	8.25	33.79	0	19.04	30	10.96	V
1745	-21.77	0.85	8.29	33.79	0	19.46	30	10.54	V
1779.3	-22.02	0.86	8.33	33.8	0	19.25	30	10.75	V

LTE FDD Band 66_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-21.3	0.84	8.25	33.79	0	19.9	30	10.1	V
1745	-21.84	0.85	8.29	33.79	0	19.39	30	10.61	V
1778.5	-21.81	0.86	8.33	33.8	0	19.46	30	10.54	V

LTE FDD Band 66_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-21.76	0.84	8.26	33.79	0	19.45	30	10.55	V
1745	-22.06	0.85	8.29	33.79	0	19.17	30	10.83	V
1777.5	-22.21	0.86	8.32	33.8	0	19.05	30	10.95	V

LTE FDD Band 66_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715	-22.15	0.84	8.26	33.79	0	19.06	30	10.94	V
1745	-21.97	0.85	8.29	33.79	0	19.26	30	10.74	V
1775	-21.3	0.86	8.32	33.8	0	19.96	30	10.04	V

LTE FDD Band 66_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.5	-22.21	0.84	8.26	33.79	0	19	30	11	V
1745	-21.84	0.85	8.29	33.79	0	19.39	30	10.61	V
1772.5	-21.38	0.85	8.32	33.8	0	19.89	30	10.11	V



LTE FDD Band 66_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720	-21.69	0.84	8.26	33.79	0	19.52	30	10.48	V
1745	-21.9	0.85	8.29	33.79	0	19.33	30	10.67	V
1770	-21.56	0.85	8.32	33.8	0	19.71	30	10.29	V

LTE FDD Band 66_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-21.67	0.84	8.25	33.79	0	19.53	30	10.47	V
1745	-21.81	0.85	8.29	33.79	0	19.42	30	10.58	V
1779.3	-21.34	0.86	8.33	33.8	0	19.93	30	10.07	V

LTE FDD Band 66_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-21.66	0.84	8.25	33.79	0	19.54	30	10.46	V
1745	-21.78	0.85	8.29	33.79	0	19.45	30	10.55	V
1778.5	-21.85	0.86	8.33	33.8	0	19.42	30	10.58	V

LTE FDD Band 66_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-21.45	0.84	8.26	33.79	0	19.76	30	10.24	V
1745	-21.89	0.85	8.29	33.79	0	19.34	30	10.66	V
1777.5	-21.9	0.86	8.32	33.8	0	19.36	30	10.64	V

LTE FDD Band 66_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Average ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715	-21.5	0.84	8.26	33.79	0	19.71	30	10.29	V
1745	-21.25	0.85	8.29	33.79	0	19.98	30	10.02	V
1775	-21.92	0.86	8.32	33.8	0	19.34	30	10.66	V

*LTE FDD Band 66_Channel Bandwidth 15MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.5	-19.67	0.84	8.26	33.79	2.15	19.39	30	10.61	V
1745	-19.33	0.85	8.29	33.79	2.15	19.75	30	10.25	V
1772.5	-19.81	0.85	8.32	33.8	2.15	19.31	30	10.69	V

LTE FDD Band 66_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720	-21.83	0.84	8.26	33.79	0	19.38	30	10.62	V
1745	-21.96	0.85	8.29	33.79	0	19.27	30	10.73	V
1770	-21.64	0.85	8.32	33.8	0	19.63	30	10.37	V

*LTE FDD Band 71_Channel Bandwidth 5MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
665.5	-19.02	0.53	7.17	33.64	2.15	19.11	33	-19.24	V
680.5	-19.00	0.54	7.18	33.64	2.15	19.13	33	-18.04	V
695.5	-19.05	0.55	7.2	33.65	2.15	19.10	33	-19.34	V

LTE FDD Band 71_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
668	-18.84	0.53	7.17	33.64	2.15	19.29	33	-20.66	V
680.5	-18.56	0.54	7.18	33.64	2.15	19.57	33	-18.73	V
693	-18.54	0.55	7.19	33.65	2.15	19.60	33	-19.89	V

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
670.5	-18.16	0.54	7.17	33.64	2.15	19.96	33	-18.32	V
680.5	-18.26	0.54	7.18	33.64	2.15	19.87	33	-18.84	V
690.5	-18.69	0.55	7.19	33.65	2.15	19.45	33	-19.28	V

LTE FDD Band 71_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
673	-19.03	0.54	7.17	33.64	2.15	19.09	33	-18.32	V
683	-18.41	0.54	7.18	33.64	2.15	19.72	33	-18.84	V
688	-18.90	0.54	7.19	33.65	2.15	19.25	33	-19.28	V

LTE FDD Band 71_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
665.5	-18.99	0.53	7.17	33.64	2.15	19.14	33	-19.24	V
680.5	-18.15	0.54	7.18	33.64	2.15	19.98	33	-18.04	V
695.5	-18.99	0.55	7.2	33.65	2.15	19.16	33	-19.34	V

*LTE FDD Band 71_Channel Bandwidth 10MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain (dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
668	-18.90	0.53	7.17	33.64	2.15	19.23	33	-20.66	V
680.5	-18.49	0.54	7.18	33.64	2.15	19.64	33	-18.73	V
693	-18.41	0.55	7.19	33.65	2.15	19.73	33	-19.89	V

LTE FDD Band 71_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
670.5	-18.36	0.54	7.17	33.64	2.15	19.76	33	-18.32	V
680.5	-18.53	0.54	7.18	33.64	2.15	19.60	33	-18.84	V
690.5	-18.26	0.55	7.19	33.65	2.15	19.88	33	-19.28	V

LTE FDD Band 71_Channel Bandwidth 20MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	Correction (dB)	Burst Avergae ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
673	-18.19	0.54	7.17	33.64	2.15	19.93	33	-18.32	V
683	-18.91	0.54	7.18	33.64	2.15	19.22	33	-18.84	V
688	-18.27	0.54	7.19	33.65	2.15	19.88	33	-19.28	V

4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13dB.

TEST CONFIGURATION

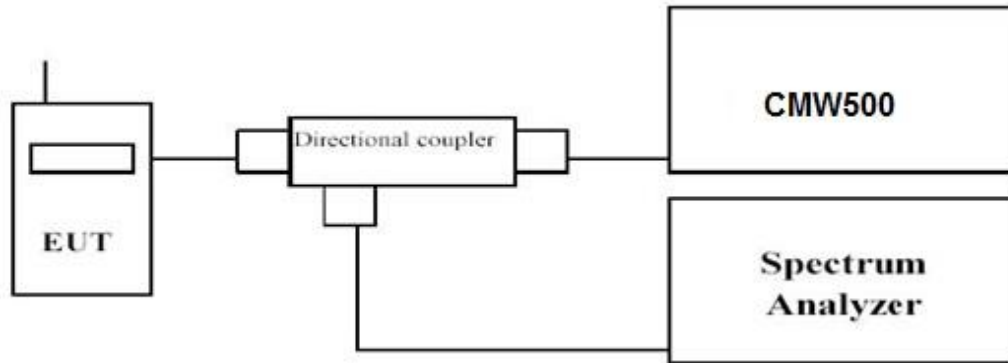

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT bursttiming sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;
2. please refer to Appendix B

4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

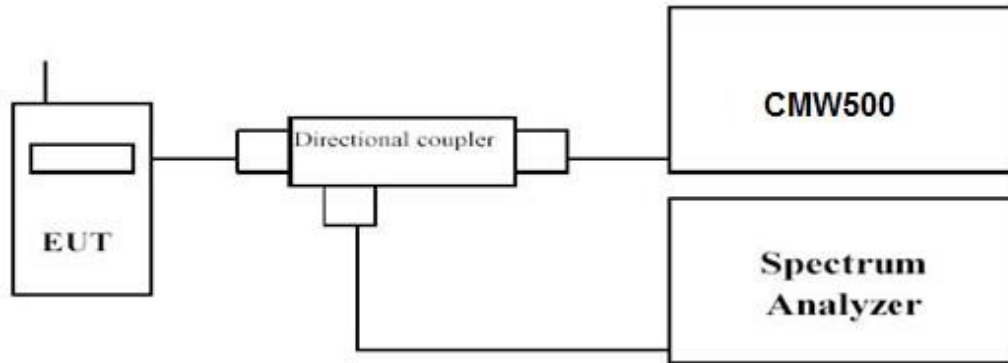

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;
2. please refer to Appendix C.

4.4 Band Edge compliance


LIMIT

For LTE FDD Band 2: Per §24.238(a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 4: Per §27.53(h): For operations in the 814–849 MHz band, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 2/17: Per §27.53(g): For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

TEST CONFIGURATION

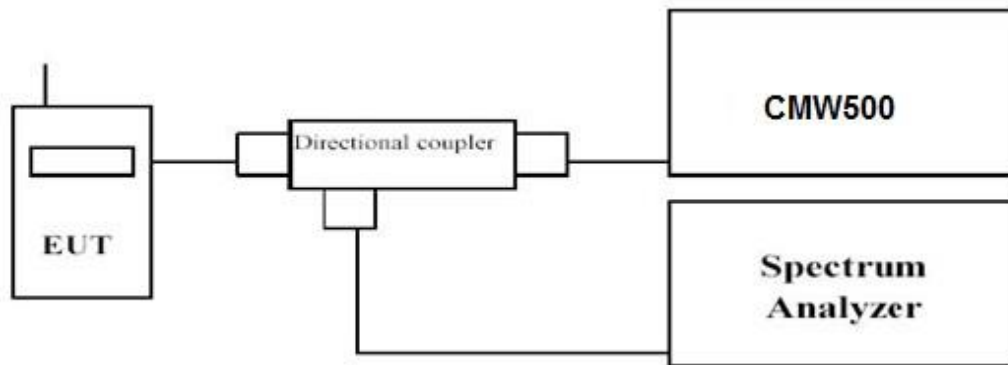

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;
2. please refer to Appendix D

4.5 Spurious Emission on Antenna Port


LIMIT

For LTE FDD Band 2: Per §24.238(a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 4: Per §27.53(h) (a): For operations in the 814–849 MHz band, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 2/17: Per §27.53(g): For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

TEST CONFIGURATION

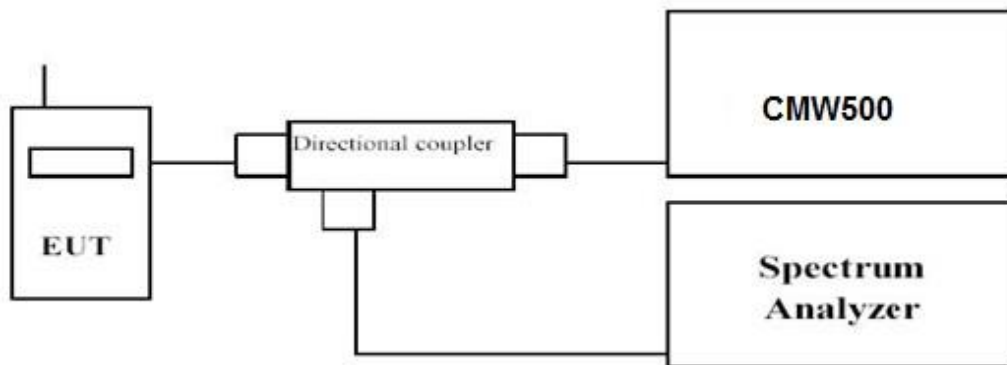

TEST PROCEDURE

The EUT was setup according to ANSI C63.26

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~26	1 MHz	3 MHz	Auto

TEST RESULTS

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;
- please refer to Appendix E

4.6 Radiated Spurious Emission


LIMIT

For LTE FDD Band 2: Per §24.238(a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 4: Per §27.53(h): For operations in the 814–849 MHz band, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 2/17: Per §27.53(g): For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

TEST CONFIGURATION

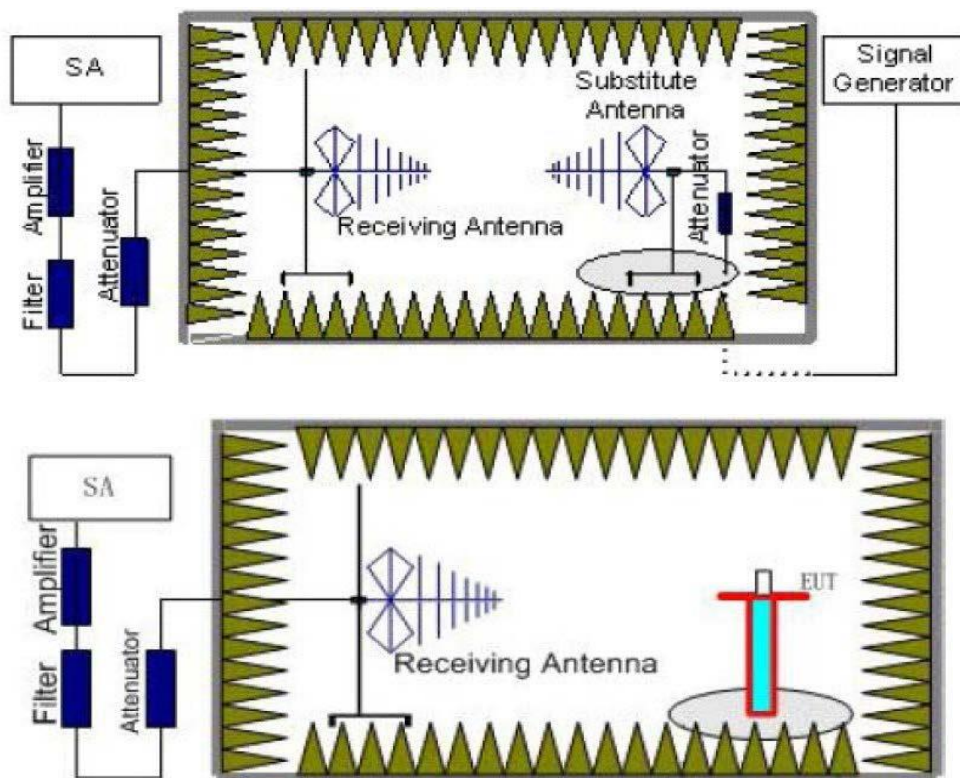

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.



Test Receiver or Spectrum RBW=1MHz,VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).

4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 2/4/5/12/13/17/25/ 26/41/66/77	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10 th	1 MHz	3 MHz	3

TEST LIMITS

According to rules specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE FDD Band 2/4/5/12/13/17/25/26/ 41/66/77	Low	9 KHz – 10 th GHz	PASS
	Middle	9 KHz – 10 th GHz	PASS
	High	9 KHz – 10 th GHz	PASS

TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;
2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + G_a(\text{dBi})$
3. We were not recorded other points as values lower than limits.
4. $\text{Margin} = EIRP - \text{Limit}$

*LTE TDD Band 2_Channel Bandwidth 10MHz_16QAM_ Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710	-48.51	1.27	3	12.11	-37.67	-13	24.67	H
3710	-54.10	1.27	3	12.11	-43.26	-13	30.26	H
5565	-47.00	1.7	3	12.58	-36.12	-13	23.12	V
5565	-53.11	1.7	3	12.58	-42.23	-13	29.23	V

LTE TDD Band 2_Channel Bandwidth 10MHz_16QAM_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760	-51.52	1.28	3	12.16	-40.64	-13	27.64	H
3760	-55.20	1.28	3	12.16	-44.32	-13	31.32	H
5640	-50.25	1.72	3	12.62	-39.35	-13	26.35	V
5640	-54.54	1.72	3	12.62	-43.64	-13	30.64	V

LTE TDD Band 2_Channel Bandwidth 10MHz_16QAM_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3610	-49.16	1.24	3	12.01	-38.39	-13	25.39	H
3610	-55.87	1.24	3	12.01	-45.10	-13	32.10	H
5415	-53.34	1.66	3	12.51	-42.49	-13	29.49	V
5415	-53.99	1.66	3	12.51	-43.14	-13	30.14	V

*LTE TDD Band 4_Channel Bandwidth 1.4MHz_16QAM_ Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.4	-50.34	1.2	3	11.82	-39.72	-13	26.72	H
3421.4	-56.18	1.2	3	11.82	-45.56	-13	32.56	H
5132.1	-53.19	1.6	3	12.37	-42.42	-13	29.42	V
5132.1	-59.21	1.6	3	12.37	-48.44	-13	35.44	V

LTE TDD Band 4_Channel Bandwidth 1.4MHz_16QAM_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465	-51.95	1.21	3	11.86	-41.30	-13	28.30	H
3465	-55.93	1.21	3	11.86	-45.28	-13	32.28	H
5197.5	-52.52	1.61	3	12.4	-41.73	-13	28.73	V
5197.5	-58.87	1.61	3	12.4	-48.08	-13	35.08	V

LTE TDD Band 4_Channel Bandwidth 1.4MHz_16QAM_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3508.6	-51.77	1.22	3	11.91	-41.08	-13	28.08	H
3508.6	-54.41	1.22	3	11.91	-43.72	-13	30.72	H
5262.9	-52.49	1.63	3	12.43	-41.69	-13	28.69	V
5262.9	-60.09	1.63	3	12.43	-49.29	-13	36.29	V

*LTE TDD Band 5_Channel Bandwidth 10MHz_QPSK_Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658	-49.31	0.83	3	8.63	-41.51	-13	-28.51	H
1658	-53.74	0.83	3	8.63	-45.94	-13	-32.94	H
2487	-50.73	1	3	10.73	-41.00	-13	-28.00	V
2487	-55.41	1	3	10.73	-45.68	-13	-32.68	V

LTE TDD Band 5_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673	-44.18	0.83	3	8.69	-36.32	-13	-23.32	H
1673	-50.94	0.83	3	8.69	-43.08	-13	-30.08	H
2509.5	-49.12	1	3	10.76	-39.36	-13	-26.36	V
2509.5	-58.66	1	3	10.76	-48.90	-13	-35.90	V

LTE TDD Band 5_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688	-44.22	0.84	3	8.76	-36.30	-13	-23.30	H
1688	-54.34	0.84	3	8.76	-46.42	-13	-33.42	H
2532	-52.28	1.01	3	10.79	-42.50	-13	-29.50	V
2532	-51.93	1.01	3	10.79	-42.15	-13	-29.15	V

*LTE TDD Band 12_Channel Bandwidth 10MHz_16QAM Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1408	-44.48	0.78	3	7.55	-37.71	-13	24.71	H
1408	-52.56	0.78	3	7.55	-45.79	-13	32.79	H
2112	-48.36	0.92	3	10.25	-39.03	-13	26.03	V
2112	-53.41	0.92	3	10.25	-44.08	-13	31.08	V

LTE TDD Band 12_Channel Bandwidth 10MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415	-45.91	0.78	3	7.58	-39.11	-13	26.11	H
1415	-49.89	0.78	3	7.58	-43.09	-13	30.09	H
2122.5	-49.62	0.92	3	10.26	-40.28	-13	27.28	V
2122.5	-55.99	0.92	3	10.26	-46.65	-13	33.65	V

LTE TDD Band 12_Channel Bandwidth 10MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1422	-43.71	0.78	3	7.61	-36.88	-13	23.88	H
1422	-49.52	0.78	3	7.61	-42.69	-13	29.69	H
2133	-48.25	0.93	3	10.27	-38.91	-13	25.91	V
2133	-53.05	0.93	3	10.27	-43.71	-13	30.71	V

*LTE TDD Band 13_Channel Bandwidth 5MHz_QPSK Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1559	-48.48	0.81	3	8.2	-41.09	-13	28.09	H
1559	-51.14	0.81	3	8.2	-43.75	-13	30.75	H
2338.5	-48.26	0.97	3	10.54	-38.69	-13	25.69	V
2338.5	-53.73	0.97	3	10.54	-44.16	-13	31.16	V

LTE TDD Band 13_Channel Bandwidth 5MHz_QPSK Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564	-43.47	0.81	3	8.23	-36.05	-13	23.05	H
1564	-49.49	0.81	3	8.23	-42.07	-13	29.07	H
2346	-49.34	0.97	3	10.55	-39.76	-13	26.76	V
2346	-53.09	0.97	3	10.55	-43.51	-13	30.51	V

LTE TDD Band 13_Channel Bandwidth 5MHz_QPSK High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1569	-47.33	0.81	3	8.25	-39.89	-13	26.89	H
1569	-54.13	0.81	3	8.25	-46.69	-13	33.69	H
2353.5	-51.91	0.97	3	10.56	-42.32	-13	29.32	V
2353.5	-54.87	0.97	3	10.56	-45.28	-13	32.28	V

*LTE TDD Band 17_Channel Bandwidth 5MHz_QPSK_Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1413	-44.08	0.78	3	7.58	-37.28	-13	24.28	H
1413	-51.75	0.78	3	7.58	-44.95	-13	31.95	H
2119.5	-48.26	0.92	3	10.26	-38.92	-13	25.92	V
2119.5	-57.29	0.92	3	10.26	-47.95	-13	34.95	V

LTE TDD Band 17_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1420	-47.81	0.78	3	7.61	-40.98	-13	27.98	H
1420	-53.81	0.78	3	7.61	-46.98	-13	33.98	H
2130	-47.72	0.93	3	10.27	-38.38	-13	25.38	V
2130	-53.21	0.93	3	10.27	-43.87	-13	30.87	V

LTE TDD Band 17_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1427	-46.60	0.79	3	7.64	-39.75	-13	26.75	H
1427	-53.46	0.79	3	7.64	-46.61	-13	33.61	H
2140.5	-50.00	0.93	3	10.28	-40.65	-13	27.65	V
2140.5	-54.01	0.93	3	10.28	-44.66	-13	31.66	V

*LTE TDD Band 25_Channel Bandwidth 5MHz_16QAM_ Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705	-51.82	1.26	3	12.1	-40.98	-13	27.98	H
3705	-56.46	1.26	3	12.1	-45.62	-13	32.62	H
5557.5	-52.61	1.7	3	12.58	-41.73	-13	28.73	V
5557.5	-57.24	1.7	3	12.58	-46.36	-13	33.36	V

LTE TDD Band 25_Channel Bandwidth 5MHz_16QAM_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765	-47.31	1.28	3	12.16	-36.43	-13	23.43	H
3765	-55.94	1.28	3	12.16	-45.06	-13	32.06	H
5647.5	-48.81	1.72	3	12.62	-37.91	-13	24.91	V
5647.5	-60.40	1.72	3	12.62	-49.50	-13	36.50	V

LTE TDD Band 25_Channel Bandwidth 5MHz_16QAM_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3825	-51.25	1.29	3	12.22	-40.32	-13	27.32	H
3825	-56.09	1.29	3	12.22	-45.16	-13	32.16	H
5737.5	-52.02	1.74	3	12.67	-41.09	-13	28.09	V
5737.5	-58.56	1.74	3	12.67	-47.63	-13	34.63	V

*LTE TDD Band 26_Channel Bandwidth 10MHz_QPSK_Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658	-44.66	0.83	3	8.63	-36.86	-13	23.86	H
1658	-51.32	0.83	3	8.63	-43.52	-13	30.52	H
2487	-49.27	1	3	10.73	-39.54	-13	26.54	V
2487	-53.75	1	3	10.73	-44.02	-13	31.02	V

LTE TDD Band 26_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673	-48.00	0.83	3	8.69	-40.14	-13	27.14	H
1673	-50.15	0.83	3	8.69	-42.29	-13	29.29	H
2509.5	-52.53	1	3	10.76	-42.77	-13	29.77	V
2509.5	-55.70	1	3	10.76	-45.94	-13	32.94	V

LTE TDD Band 26_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688	-45.39	0.84	3	8.76	-37.47	-13	24.47	H
1688	-55.54	0.84	3	8.76	-47.62	-13	34.62	H
2532	-51.98	1.01	3	10.79	-42.20	-13	29.20	V
2532	-54.46	1.01	3	10.79	-44.68	-13	31.68	V

*LTE TDD Band 41_Channel Bandwidth 20MHz_16QAM_ Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5012	-51.12	1.57	3	12.31	-40.38	-25	15.38	H
5012	-55.61	1.57	3	12.31	-44.87	-25	19.87	H
7518	-47.24	2	3	11.24	-38	-25	13.00	V
7518	-57.1	2	3	11.24	-47.86	-25	22.86	V

LTE TDD Band 41_Channel Bandwidth 20MHz_16QAM_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186	-48.48	1.61	3	12.39	-37.7	-25	12.70	H
5186	-58.58	1.61	3	12.39	-47.8	-25	22.80	H
7779	-45.99	2.04	3	11.17	-36.86	-25	11.86	V
7779	-58.05	2.04	3	11.17	-48.92	-25	23.92	V

LTE TDD Band 41_Channel Bandwidth 20MHz_16QAM_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5360	-47.86	1.65	3	12.48	-37.03	-25	12.03	H
5360	-54.6	1.65	3	12.48	-43.77	-25	18.77	H
8040	-47.79	2.07	3	11.12	-38.74	-25	13.74	V
8040	-54.62	2.07	3	11.12	-45.57	-25	20.57	V

*LTE FDD Band 66_Channel Bandwidth 10MHz_16QAM_ Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3430	-51.70	1.2	3	11.83	-41.07	-13	-28.07	H
3430	-58.04	1.2	3	11.83	-47.41	-13	-34.41	H
5145	-49.77	1.6	3	12.37	-39.00	-13	-26.00	V
5145	-55.90	1.6	3	12.37	-45.13	-13	-32.13	V

LTE FDD Band 66_Channel Bandwidth 10MHz_16QAM_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490	-47.75	1.21	3	11.89	-37.07	-13	-24.07	H
3490	-58.51	1.21	3	11.89	-47.83	-13	-34.83	H
5235	-47.76	1.62	3	12.42	-36.96	-13	-23.96	V
5235	-54.93	1.62	3	12.42	-44.13	-13	-31.13	V

LTE FDD Band 66_Channel Bandwidth 10MHz_16QAM_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3550	-47.73	1.23	3	11.95	-37.01	-13	-24.01	H
3550	-56.69	1.23	3	11.95	-45.97	-13	-32.97	H
5325	-47.80	1.64	3	12.46	-36.98	-13	-23.98	V
5325	-56.70	1.64	3	12.46	-45.88	-13	-32.88	V

*LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK_ Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1341	-47.56	1.2	3	11.83	-36.93	-13	-23.93	H
1341	-54.54	1.2	3	11.83	-43.91	-13	-30.91	H
2011.5	-51.99	1.6	3	12.37	-41.22	-13	-28.22	V
2011.5	-58.08	1.6	3	12.37	-47.31	-13	-34.31	V

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-48.17	1.21	3	11.89	-37.49	-13	-24.49	H
1361	-56.27	1.21	3	11.89	-45.59	-13	-32.59	H
2041.5	-50.72	1.62	3	12.42	-39.92	-13	-26.92	V
2041.5	-59.65	1.62	3	12.42	-48.85	-13	-35.85	V

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK_ High Channel


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1381	-49.33	1.23	3	11.95	-38.61	-13	-25.61	H
1381	-55.46	1.23	3	11.95	-44.74	-13	-31.74	H
2071.5	-53.77	1.64	3	12.46	-42.95	-13	-29.95	V
2071.5	-54.66	1.64	3	12.46	-43.84	-13	-30.84	V

4.7 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to FCC §2.1055, §24.235§27.54 and §90.213 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

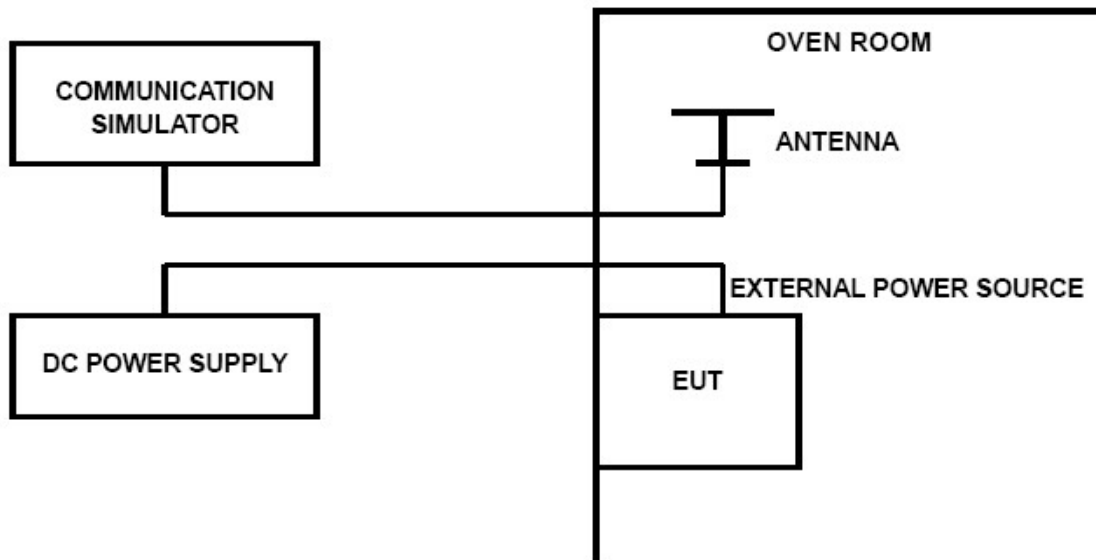

TEST PROCEDURE

The EUT was setup according to ANSI C63.26.

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for Specific band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1V increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.



TEST RESULTS

Remark:

1. *We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2/4/5/12/13/17/25/26/41/66/77;*
2. *please refer to Appendix F*



5 Test Set up Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

*****End of Report*****