

FCC/ISED - TEST REPORT

Report Number : **68.950.24.0458.01** Date of Issue: **2024-08-12**

Model/HVIN : **HKE2500A-A**

Product Type : Split type energy storage power supply

Applicant : Shenzhen Huntkey Electric Co., Ltd.

Address : Huntkey Industrial Park, XueXiang Village Bantian Street,
LONGGANG DISTRICT, 518129 Shenzhen, China

Manufacturer : Shenzhen Huntkey Electric Co., Ltd.

Address : Huntkey Industrial Park, XueXiang Village Bantian Street,
LONGGANG DISTRICT, 518129 Shenzhen, China

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **56**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems Test Configuration	10
9	Technical Requirement	11
9.1	Conducted Emission	11
9.2	Conducted Output Power	14
9.3	6dB Bandwidth	16
9.4	Power Spectral Density	25
9.5	Spurious RF Conducted Emissions	30
9.6	Band Edge Testing	38
9.7	Spurious Radiated Emissions for Transmitter	46
10	Test Equipment List	54
11	System Measurement Uncertainty	56

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park, Guankou Erlu, Nantou,
Nanshan District, Shenzhen City, 518052, P. R. China

Telephone: 86 755 8828 6998

Fax: 86 755 828 5299

FCC Registration No.: 514049

FCC Designation No.: CN5009

IC Registration No.: 10320A

ISED CAB identifier: CN0077

3 Description of the Equipment Under Test

Product:	Split type energy storage power supply
Model no.:	HKE2500A-A
FCC ID:	2AVYR-HKE2500A-A
IC:	11568A-HKE2500AA
PMN:	HKE2500A-A
HVIN:	HKE2500A-A
Rating:	44.4VDC, 70Ah, 3108Wh rechargeable Li-ion battery or 10.5-16VDC input or 17-72VDC input or 120VAC 50/60Hz, 15A
RF Transmission Frequency:	2412MHz-2462MHz for 802.11b/g/n20
No. of Operated Channel:	11
Modulation:	802.11b: BPSK, QPSK, CCK, 802.11g/802.11n20: BPSK, QPSK, 16-QAM, 64-QAM
Antenna Type:	Internal Antenna
Antenna Gain:	-1.8dBi max for 2.4GHz
Description of the EUT:	The Equipment Under Test (EUT) is a Split type energy storage power supply supports Bluetooth Low Energy / 2.4GHz Wi-Fi functions

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C/ RSS-247 Issue 3/RSS-Gen Issue 5			
Test Condition		Test Site	Test Result
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	Site 1	Pass
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	Pass
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	Pass
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	Pass
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	Pass
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	Pass
§15.247(d) & RSS-247 5.5	Band edge	Site 1	Pass
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	Pass
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Internal Antenna, which gain is -1.8dBi max for 2.4GHz. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AVYR-HKE2500A-A, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C.

This submittal(s) (test report) is intended for IC: 11568A-HKE2500AA, complies with RSS-247, RSS-GEN.

The Model: HKE2500A-A supports Bluetooth Low Energy/ 2.4GHz Wi-Fi functions.

The TX and RX range is 2402MHz-2480MHz for Bluetooth, 2412MHz – 2462MHz for 2.4GHz Wi-Fi.

This report is for the 2.4GHz Wi-Fi part.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2024-04-29

Testing Start Date: 2024-04-29

Testing End Date: 2024-05-28

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

Prepared by:

Tested by:



John Zhi
Project Manager




Joe Gu
Project Engineer



Carry Cai
Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

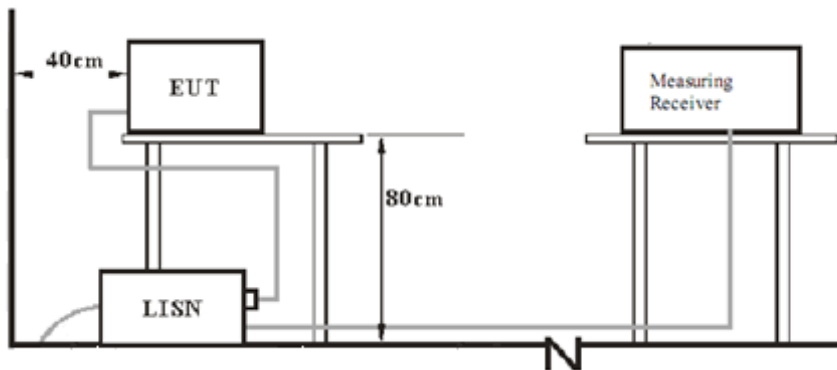


7.2 Radiated test setups


9kHz - 30MHz

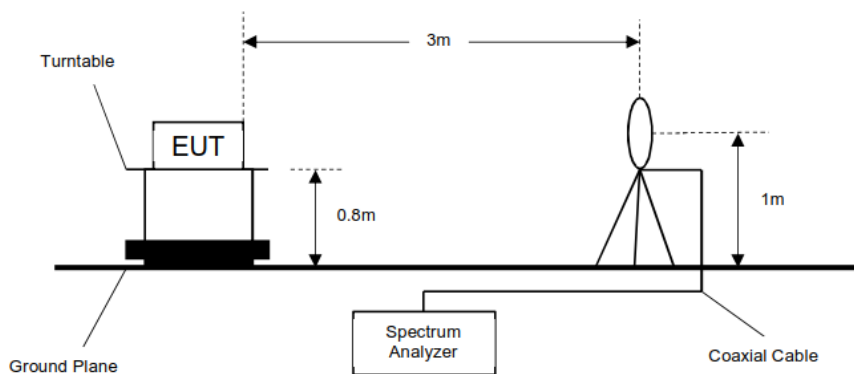


30MHz - 1GHz

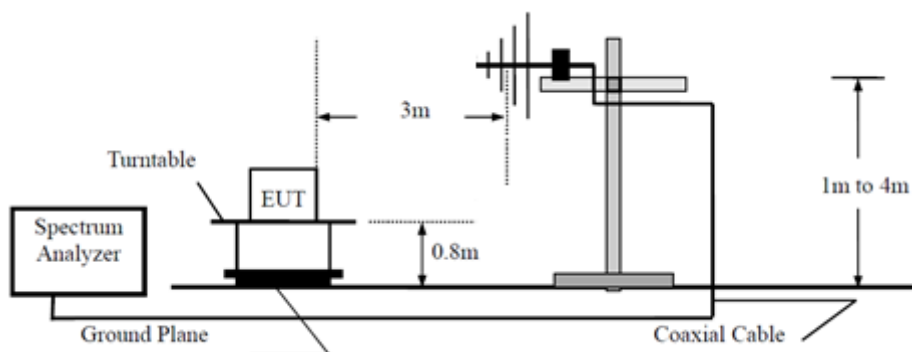

Above 1GHz

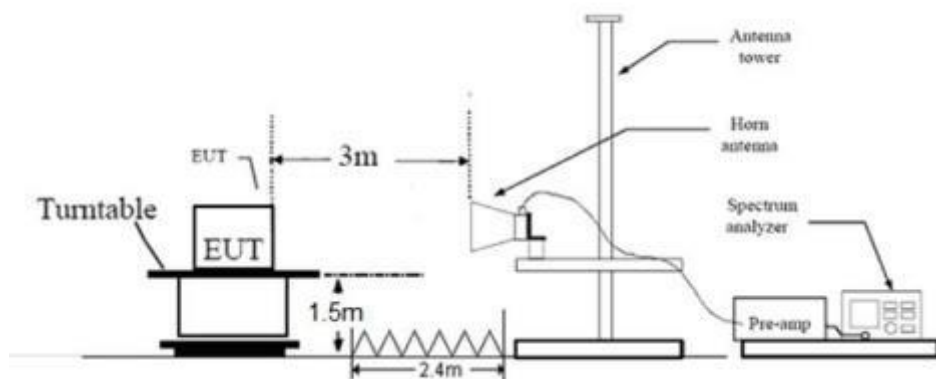

7.3 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
LAPTOP	LENOVO	T460S	---
Battery Pack	Huntkey	HKE3000A-A	---

Test Channel information:

Test Mode	Channel (MHz)		
802.11b	CH 1: 2412MHz	CH 6: 2437MHz	CH 11: 2462MHz
802.11g	CH 1: 2412MHz	CH 6: 2437MHz	CH 11: 2462MHz
802.11n20	CH 1: 2412MHz	CH 6: 2437MHz	CH 11: 2462MHz

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : Split type energy storage power supply
 M/N : HKE2500A-A
 Operating Condition : Transmitting
 Test Specification : Line
 Comment : AC 120V/60Hz

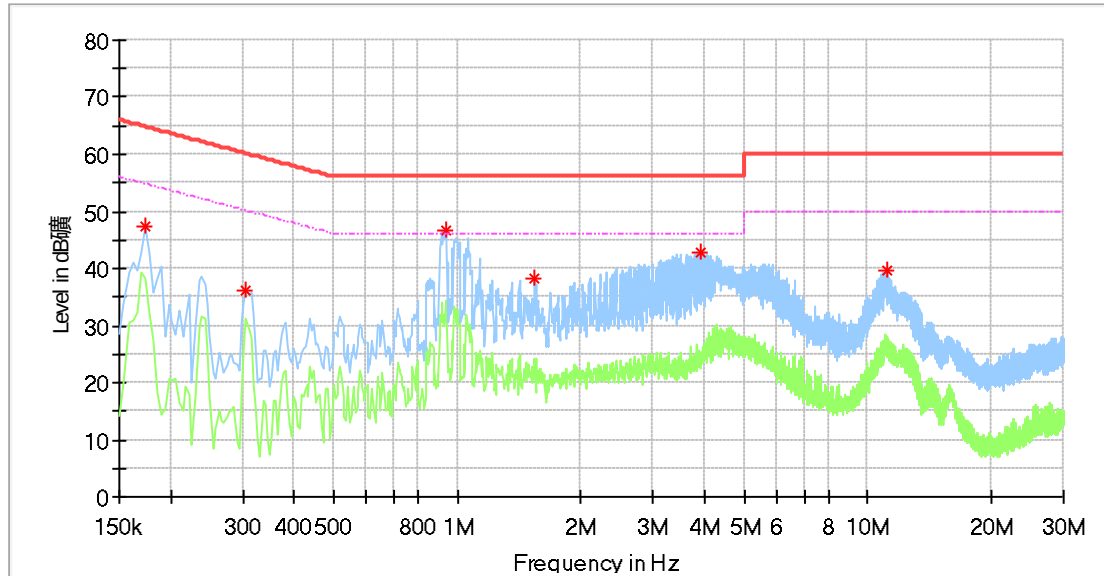

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.174000	47.36	---	64.77	17.41	L1	10.27
0.306000	36.31	---	60.08	23.77	L1	10.29
0.942000	46.60	---	56.00	9.40	L1	10.32
1.546000	38.07	---	56.00	17.93	L1	10.34
3.938000	42.88	---	56.00	13.12	L1	10.49
11.118000	39.63	---	60.00	20.37	L1	11.17

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Split type energy storage power supply
 M/N : HKE2500A-A
 Operating Condition : Transmitting
 Test Specification : Neutral
 Comment : AC 120V/60Hz

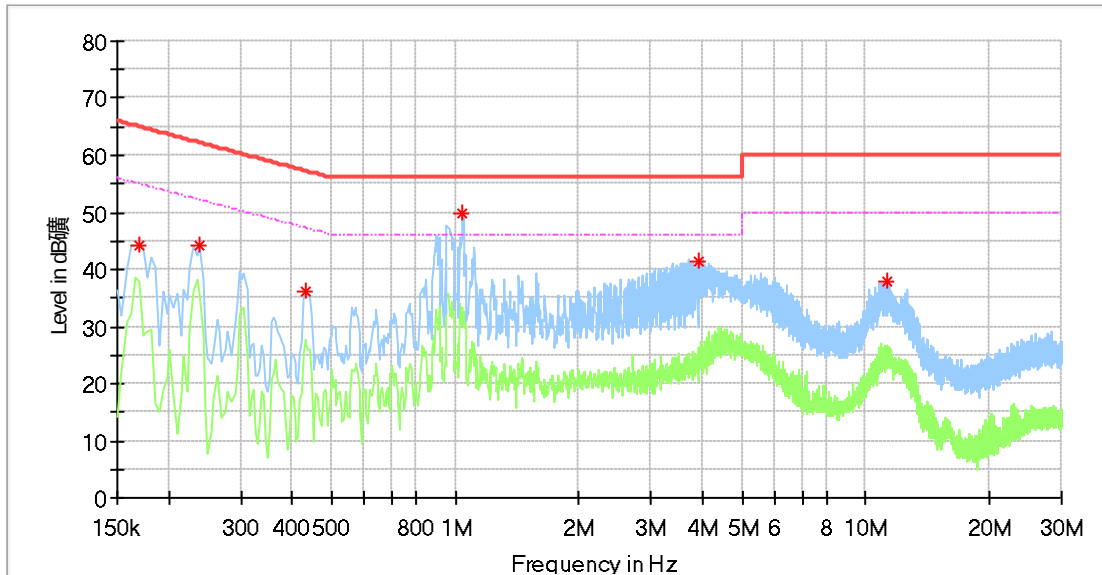

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.170000	44.36	---	64.96	20.60	N	10.21
0.238000	44.22	---	62.17	17.94	N	10.23
0.434000	36.24	---	57.18	20.94	N	10.19
1.042000	49.99	---	56.00	6.01	N	10.21
3.930000	41.33	---	56.00	14.67	N	10.43
11.246000	37.88	---	60.00	22.12	N	11.29

Remark:

Level=Reading Level + Correction Factor


Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted Output Power

Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

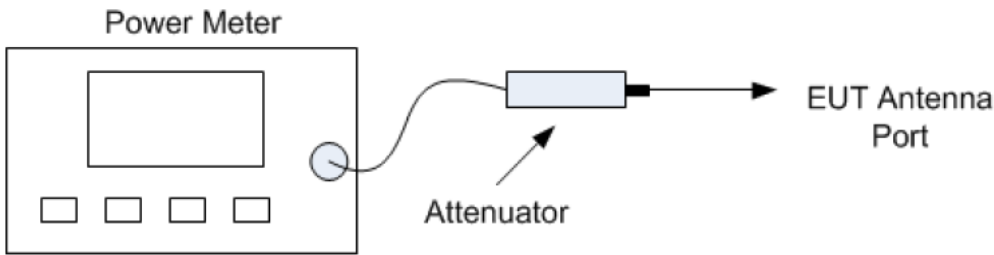

Power meter conducted test setup

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36

Test result as below table

802.11b modulation Test Result

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	16.9	-1.8	15.1	Pass
Middle channel 2437MHz	17.2	-1.8	15.4	Pass
High channel 2462MHz	16.6	-1.8	14.8	Pass

802.11g modulation Test Result

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	18.2	-1.8	16.4	Pass
Middle channel 2437MHz	18.4	-1.8	16.6	Pass
High channel 2462MHz	17.9	-1.8	16.1	Pass

802.11n20 modulation Test Result

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	18.1	-1.8	16.3	Pass
Middle channel 2437MHz	18.3	-1.8	16.5	Pass
High channel 2462MHz	17.9	-1.8	16.1	Pass

9.3 6dB Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set center frequency to the nominal EUT channel center frequency.
3. Set RBW = 1% to 5% of the OBW, but not less than 100 kHz, VBW $\geq 3 \times$ RBW Detector = Peak. Trace mode = max hold. Sweep = auto Trace = max hold
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
5. Record the results in the test report.

Limit

Limit [kHz]

≥ 500

Test Method for 99 % Bandwidth




1. Set center frequency to the nominal EUT channel center frequency
2. Set span = 1.5 times to 5.0 times the OBW. Set RBW = 1 % to 5 % of the OBW Set VBW ≥ 3 RBW Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize.
3. Use the 99 % power bandwidth function of the instrument.
4. Record the results in the test report.

Limit


Limit [kHz]

6 dB Bandwidth


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	8.813	≥ 0.5	Pass
		2437	1	8.828	≥ 0.5	Pass
		2462	1	8.813	≥ 0.5	Pass
802.11g	SISO	2412	1	17.866	≥ 0.5	Pass
		2437	1	17.888	≥ 0.5	Pass
		2462	1	17.884	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	1	18.519	≥ 0.5	Pass
		2437	1	18.537	≥ 0.5	Pass
		2462	1	18.526	≥ 0.5	Pass

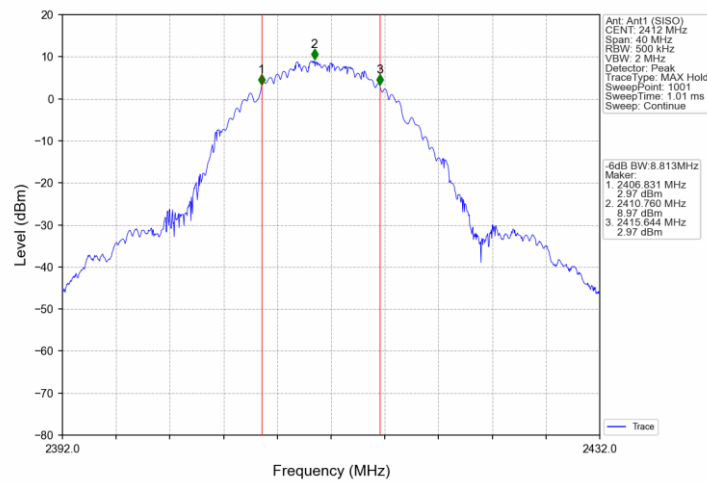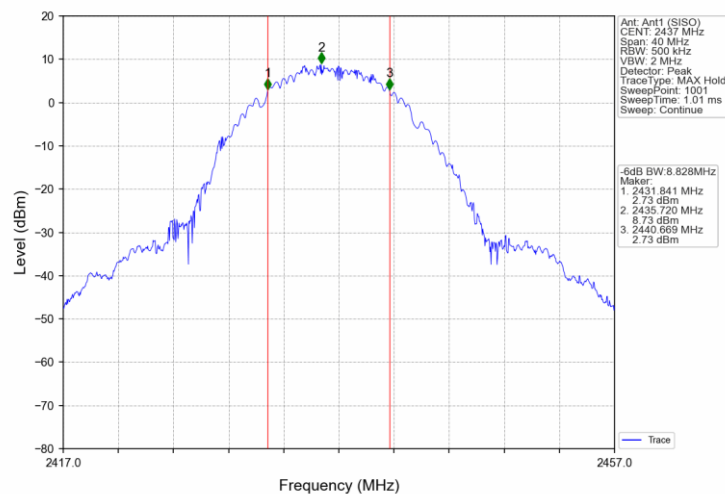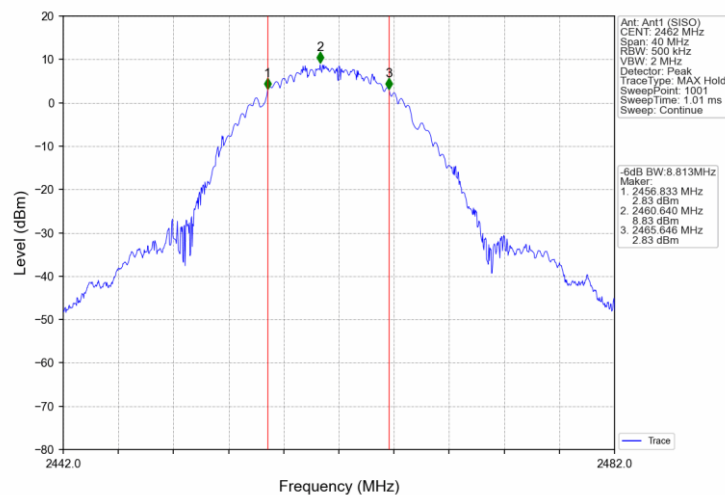6 dB Bandwidth**802.11b LCH 2412MHz Ant1 (SISO) NTV****802.11b MCH 2437MHz Ant1 (SISO) NTV****802.11b HCH 2462MHz Ant1 (SISO) NTV**


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

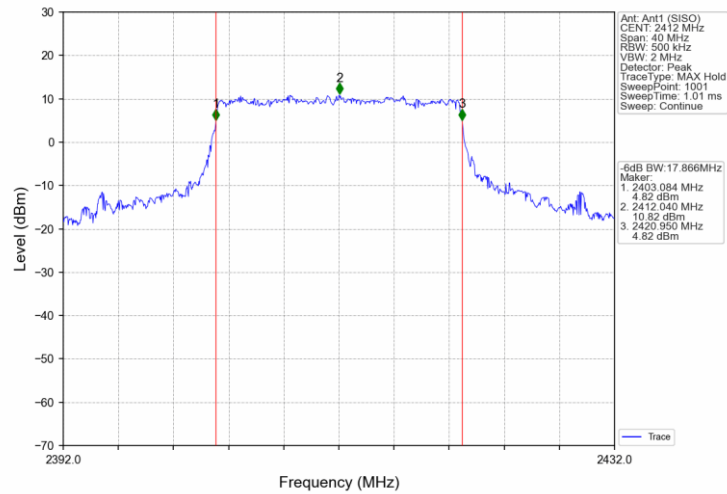


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

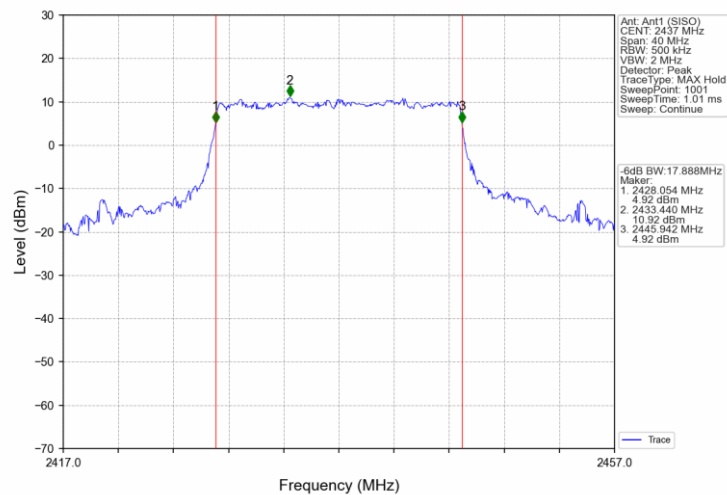


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

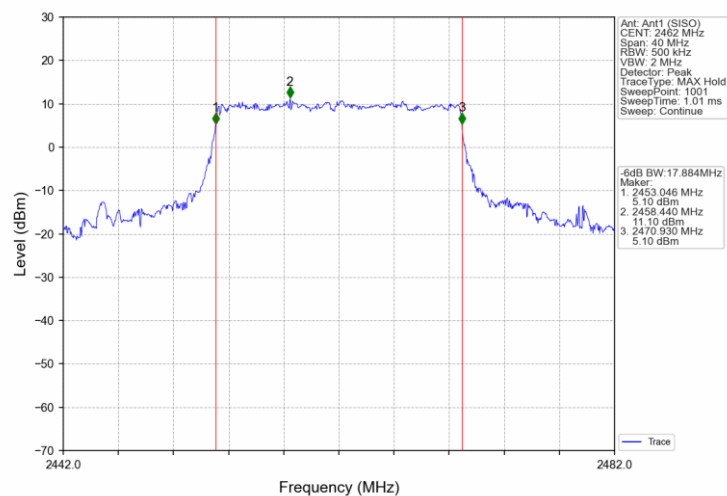


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

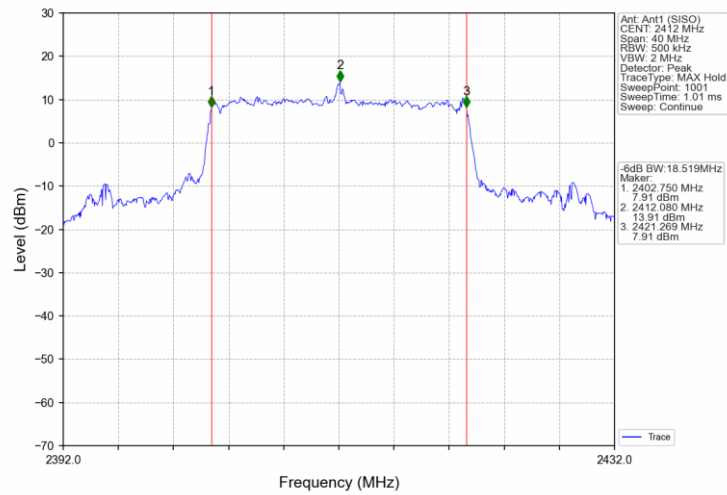

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV



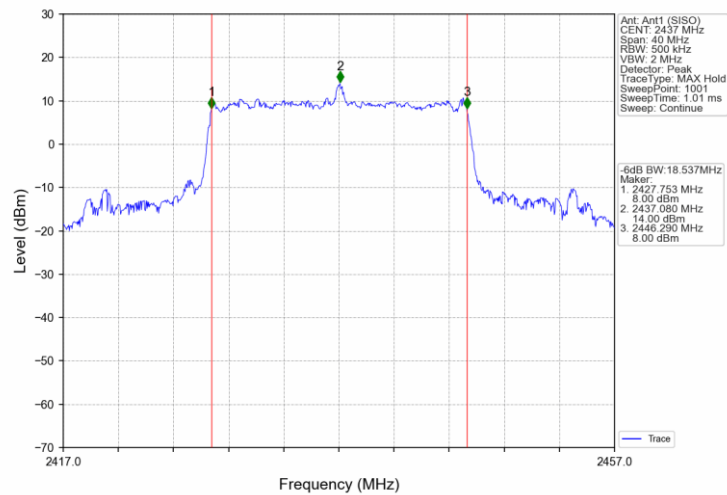


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

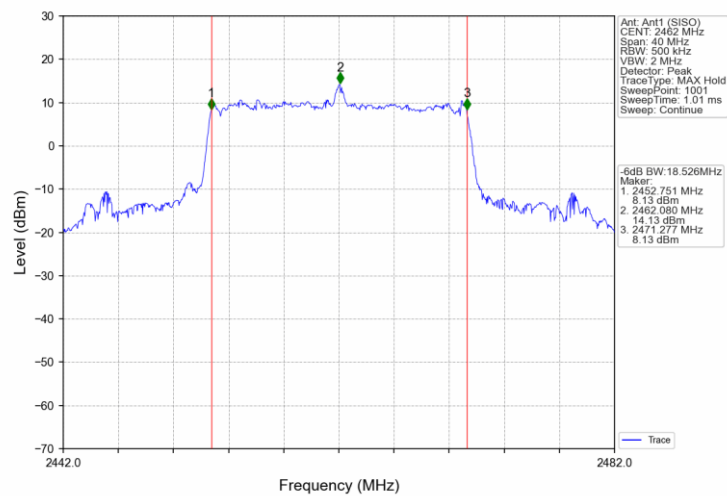


99% Bandwidth


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	13.949	/	Pass
		2437	1	13.976	/	Pass
		2462	1	13.917	/	Pass
802.11g	SISO	2412	1	18.628	/	Pass
		2437	1	18.261	/	Pass
		2462	1	18.142	/	Pass
802.11n (HT20)	SISO	2412	1	19.158	/	Pass
		2437	1	18.967	/	Pass
		2462	1	18.922	/	Pass

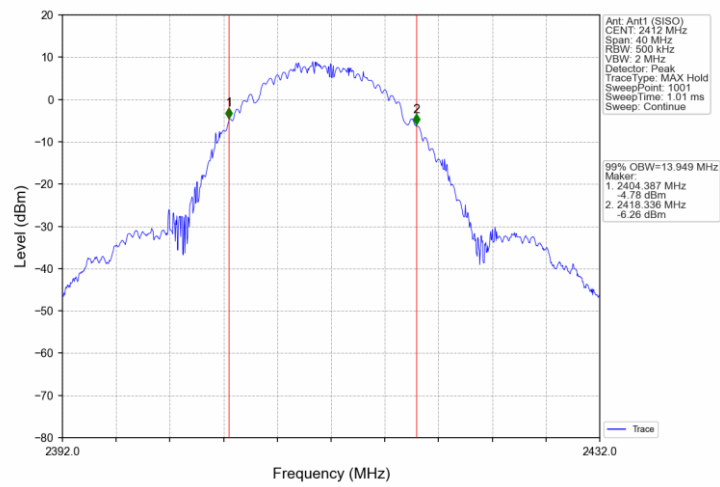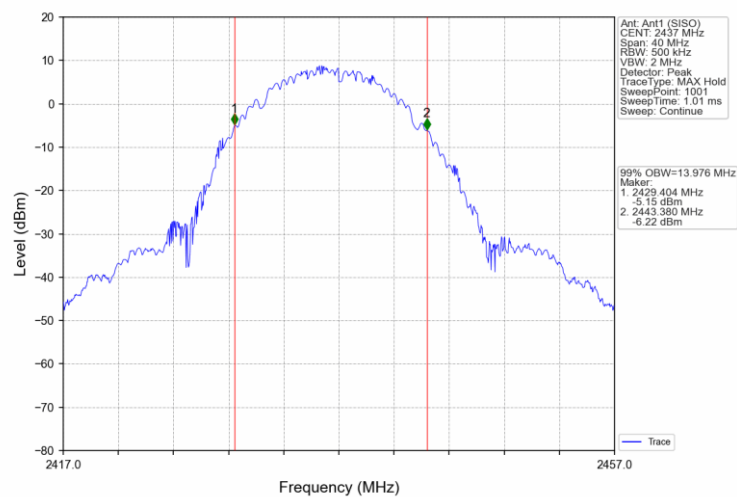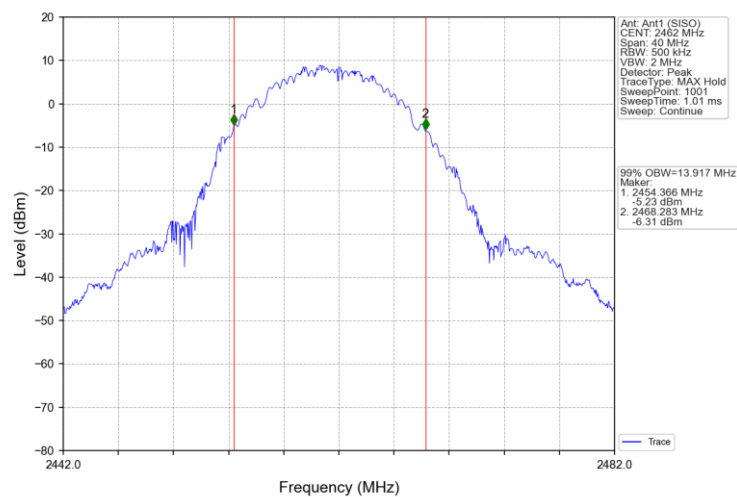99% Bandwidth**802.11b_LCH_2412MHz_Ant1 (SISO) NTN****802.11b_MCH_2437MHz_Ant1 (SISO) NTN****802.11b_HCH_2462MHz_Ant1 (SISO) NTN**


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

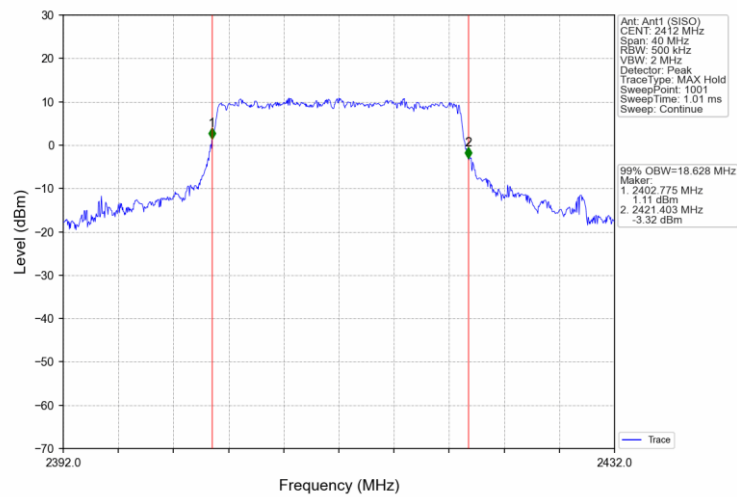


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

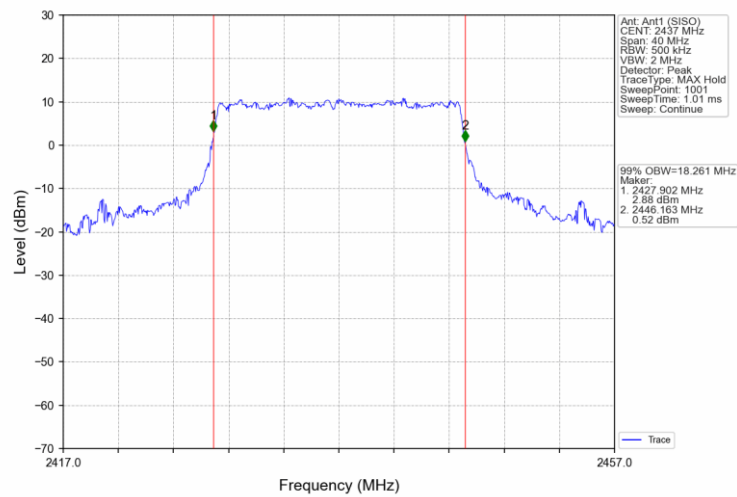


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

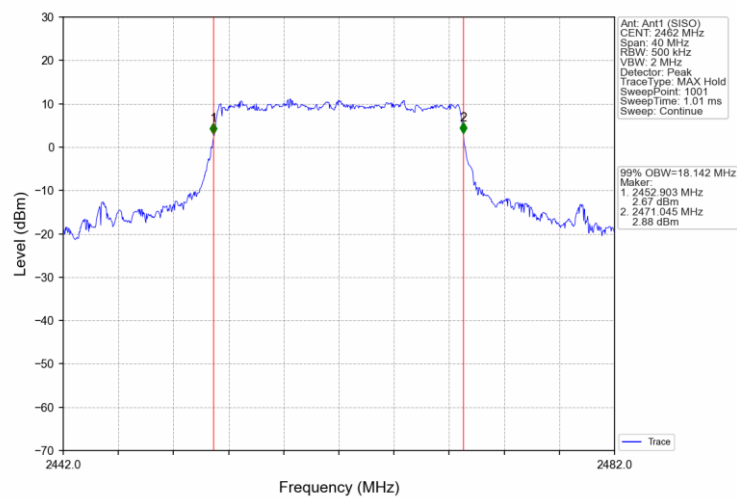


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

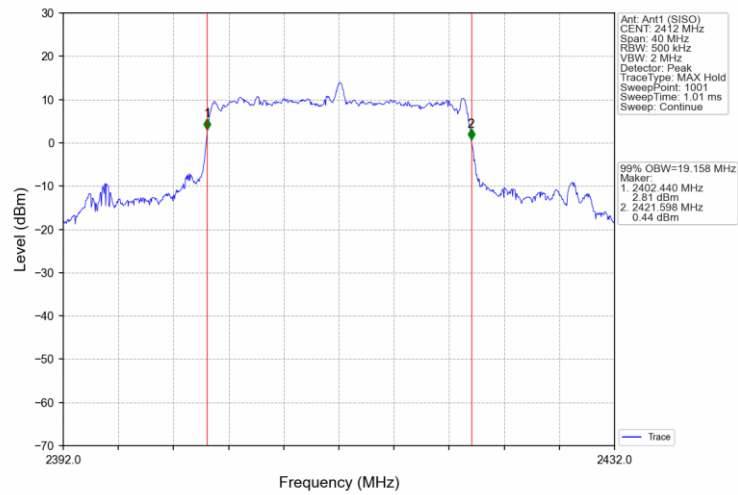

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

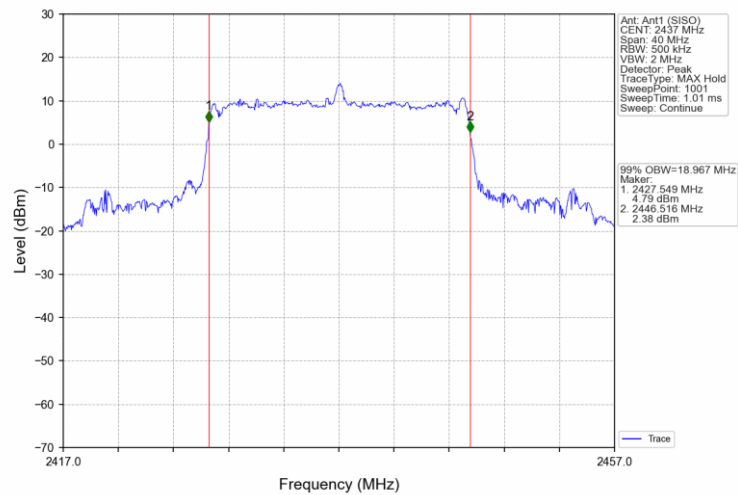

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

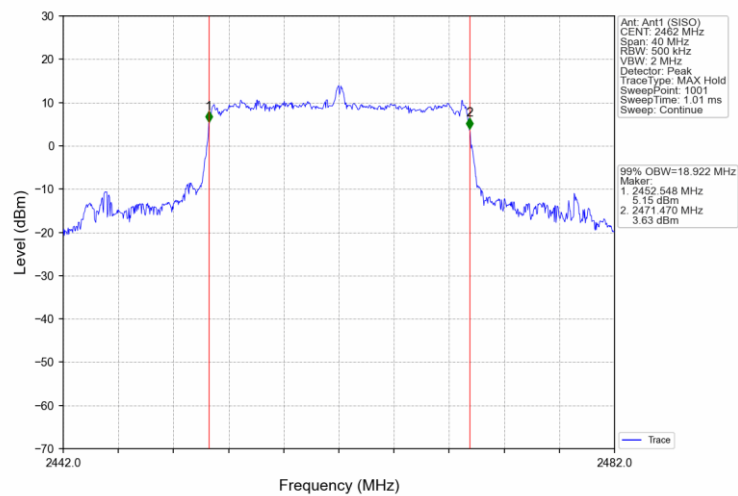

9.4 Power Spectral Density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.


Limit

Limit [dBm/3KHz]


≤ 8

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
802.11b	SISO	2412	-8.07	<=8	Pass
		2437	-7.25	<=8	Pass
		2462	-7.56	<=8	Pass
802.11g	SISO	2412	-8.36	<=8	Pass
		2437	-8.54	<=8	Pass
		2462	-8.17	<=8	Pass
802.11n (HT20)	SISO	2412	-9.16	<=8	Pass
		2437	-9.35	<=8	Pass
		2462	-9.58	<=8	Pass


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

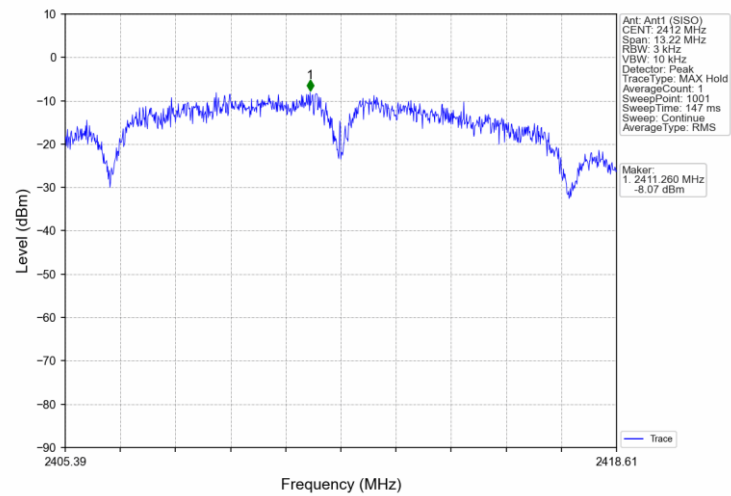


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

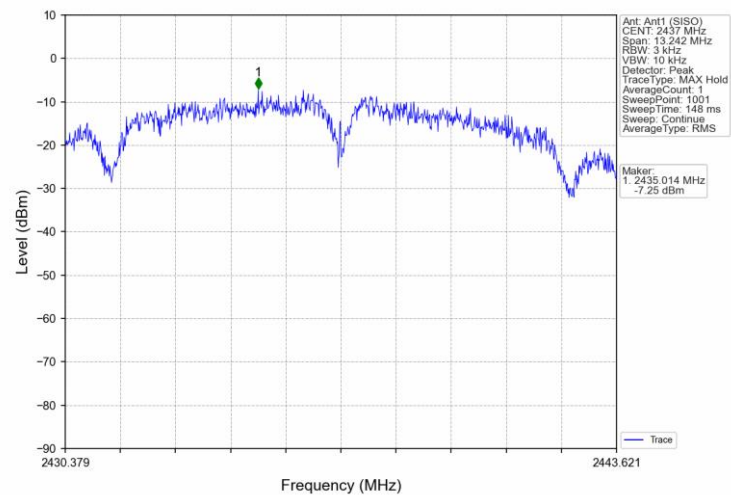


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

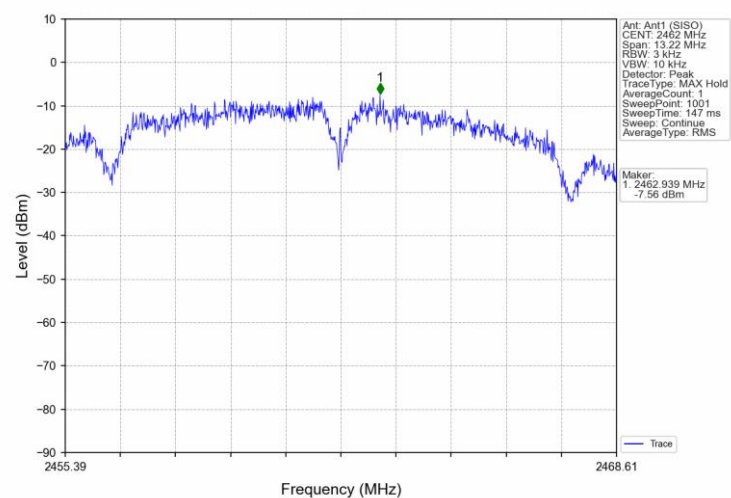


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

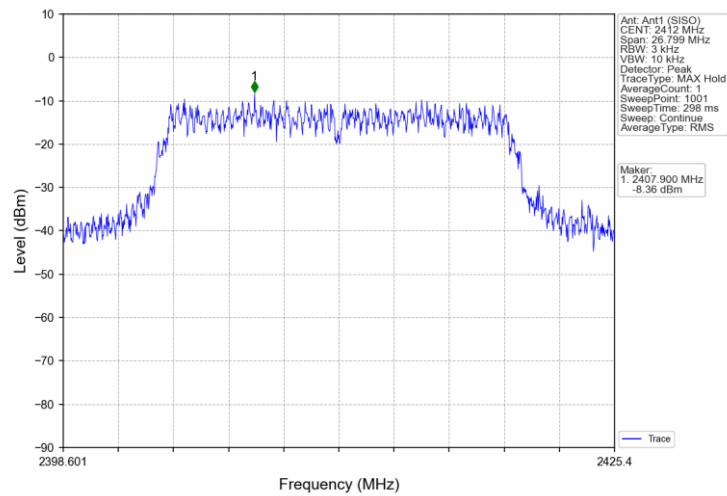


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

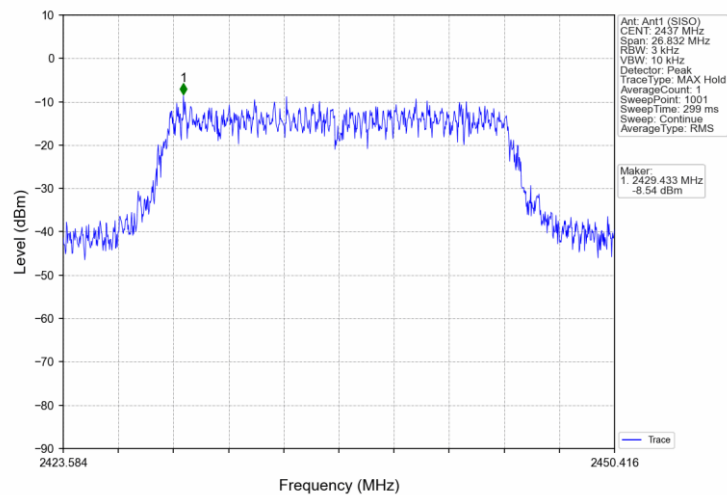


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

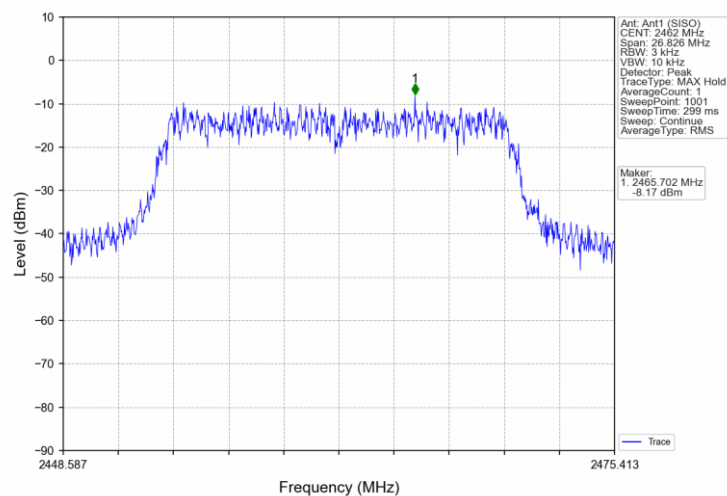


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

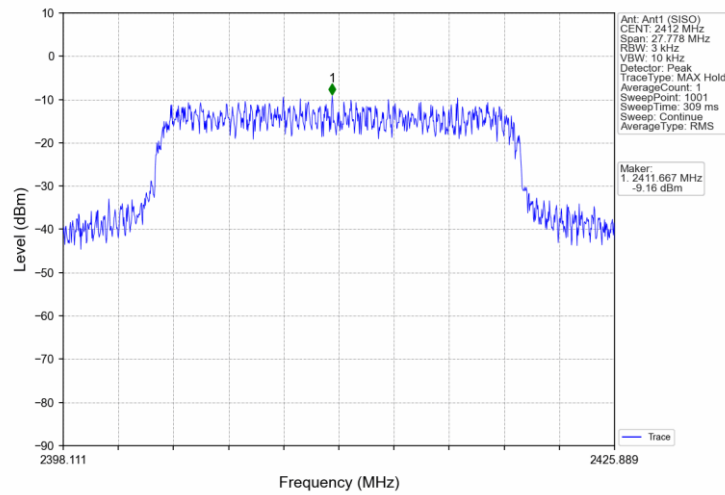

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

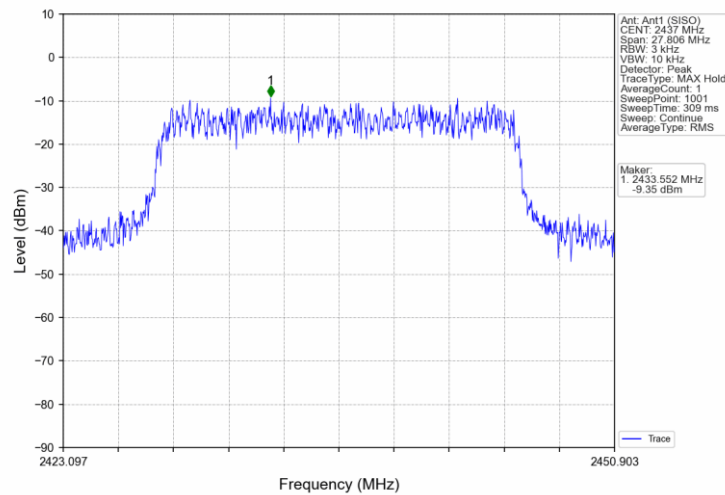

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

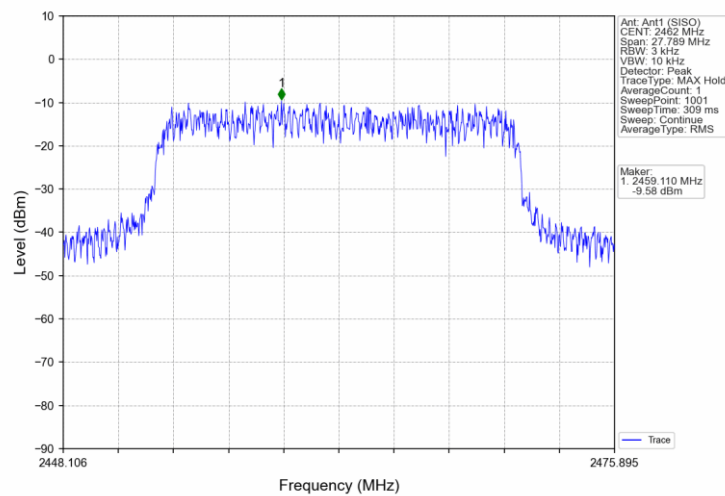

9.5 Spurious RF Conducted Emissions

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.


Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Spurious RF conducted emissions

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	SISO	2412	1	5.45	-14.55	Pass
		2437	1	5.37	-14.63	Pass
		2462	1	5.27	-14.73	Pass
802.11g	SISO	2412	1	4.25	-15.75	Pass
		2437	1	4.44	-15.56	Pass
		2462	1	4.22	-15.78	Pass
802.11n (HT20)	SISO	2412	1	6.69	-13.31	Pass
		2437	1	6.72	-13.28	Pass
		2462	1	6.18	-13.82	Pass


802.11b_LCH_2412MHz_Ant1 (SISO) NTNv

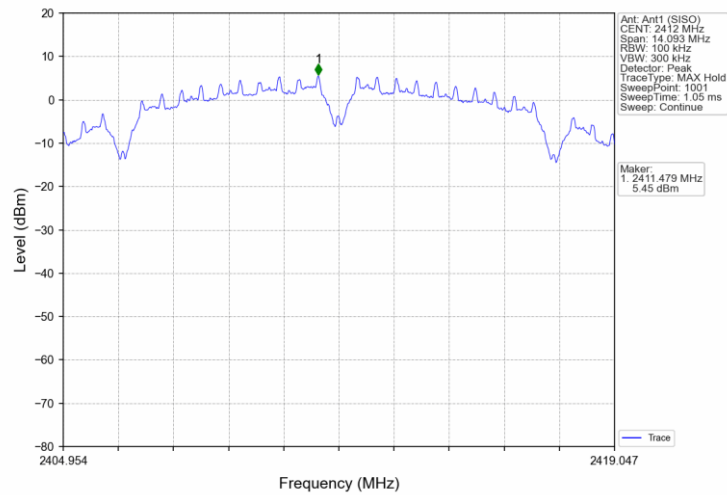


802.11b_MCH_2437MHz_Ant1 (SISO) NTNv

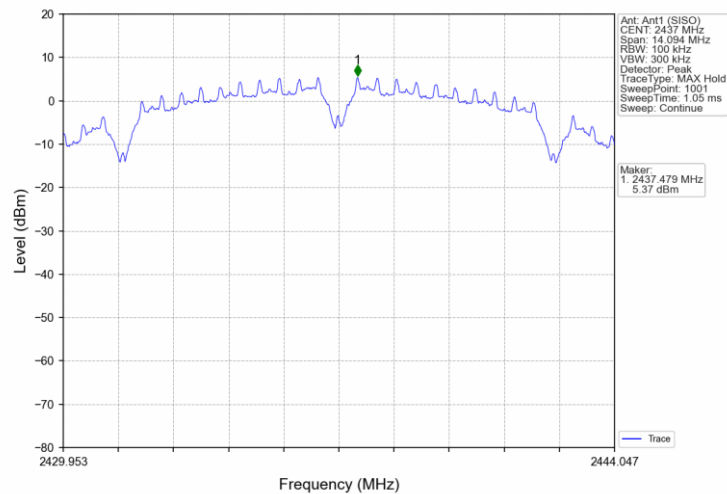


802.11b_HCH_2462MHz_Ant1 (SISO) NTNv

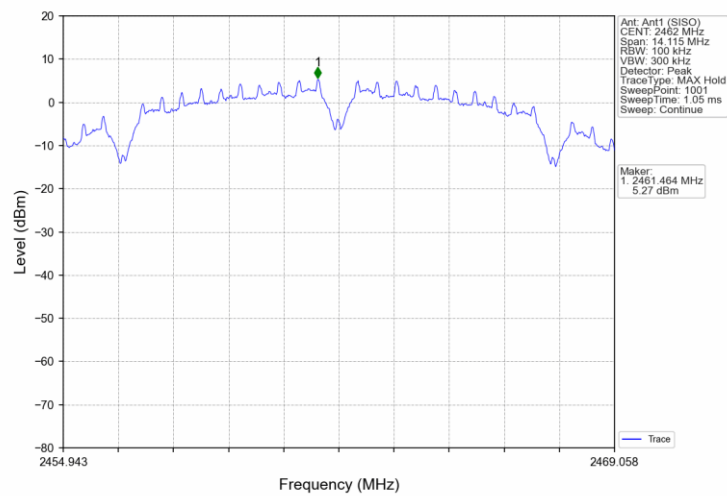


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

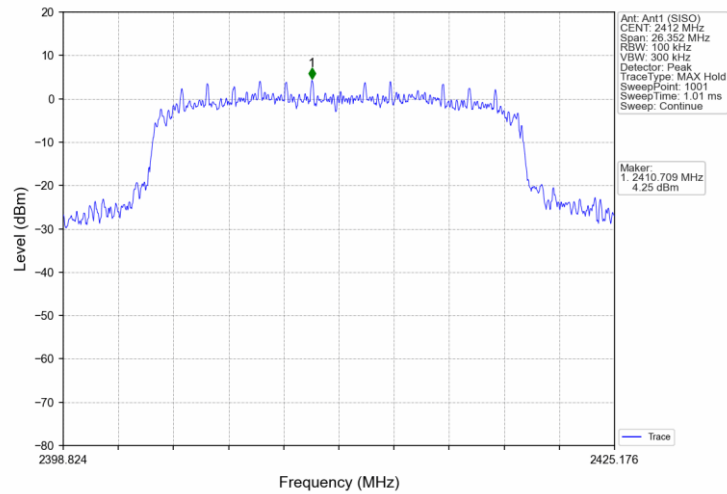


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

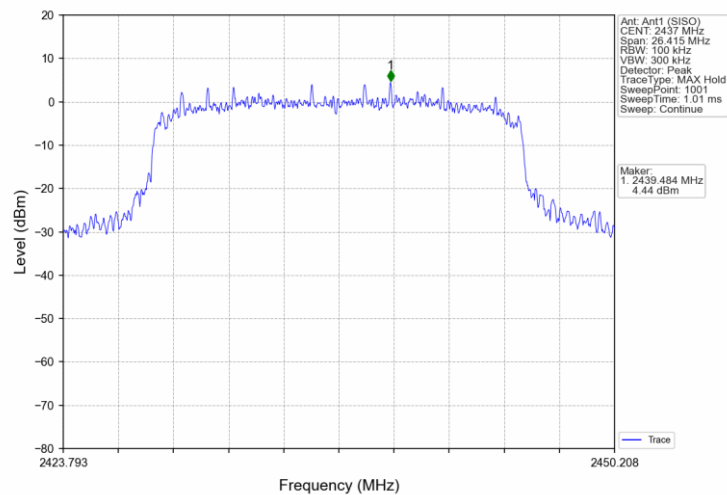


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

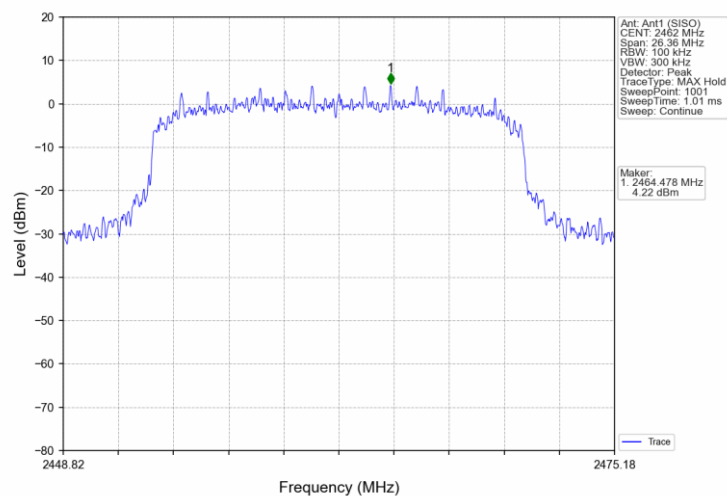


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

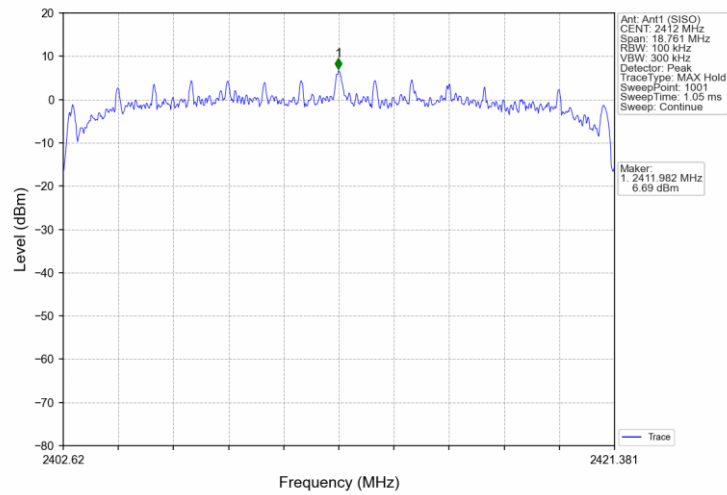


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

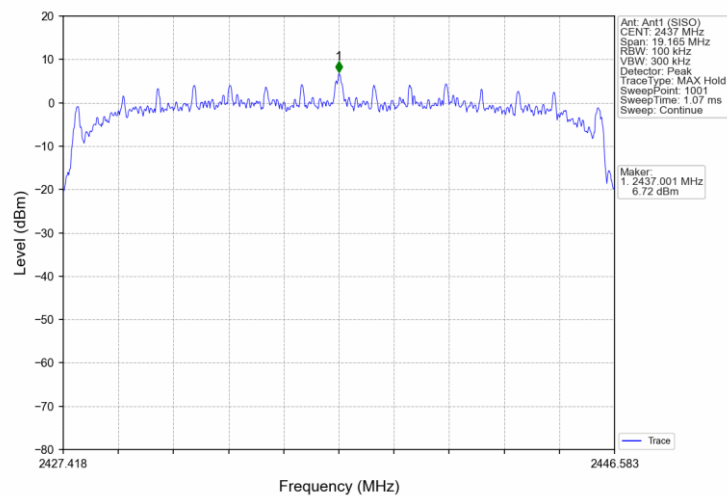


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

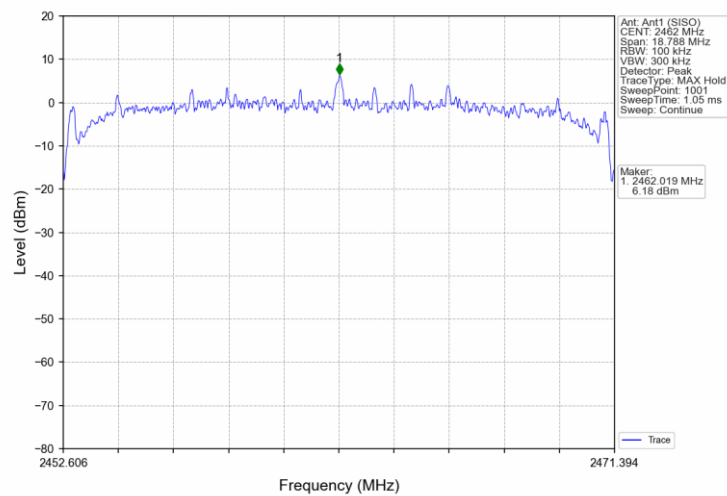


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

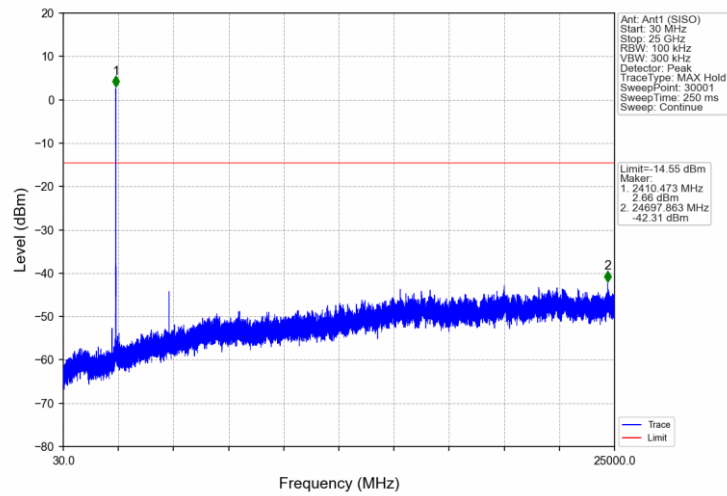


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

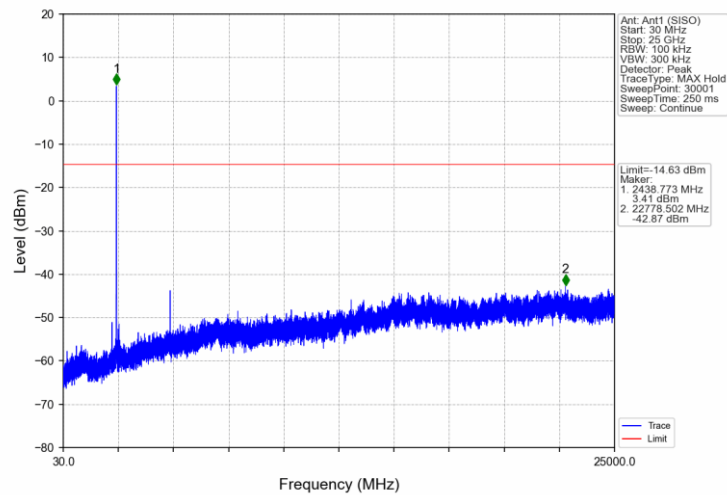


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

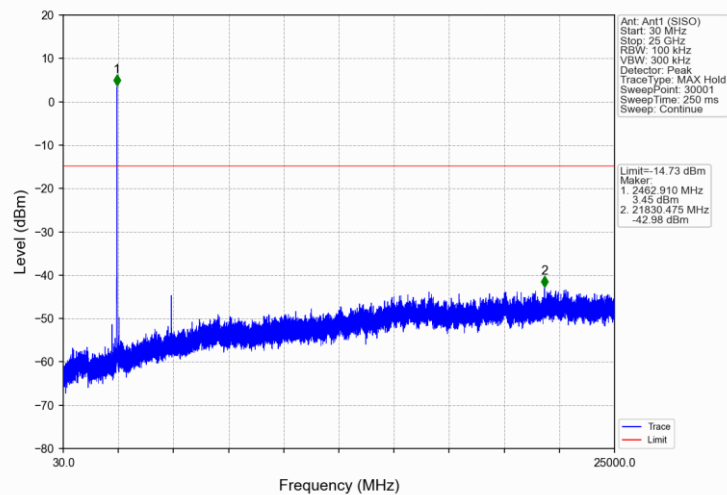


802.11g_LCH_2412MHz_Ant1 (SISO) NTN

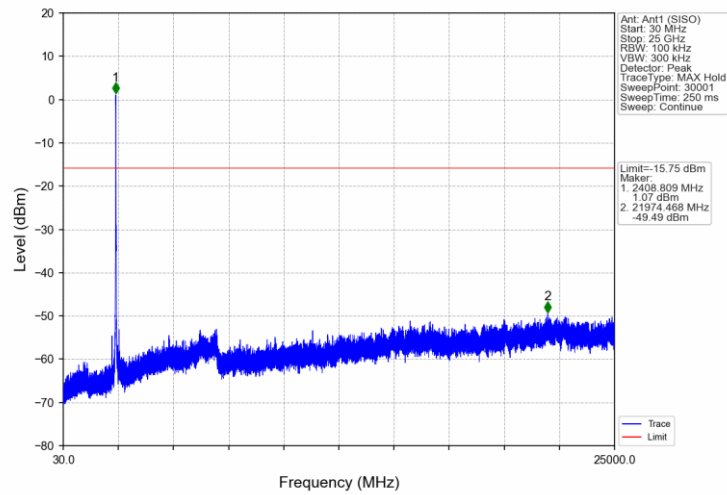


802.11g_MCH_2437MHz_Ant1 (SISO) NTN

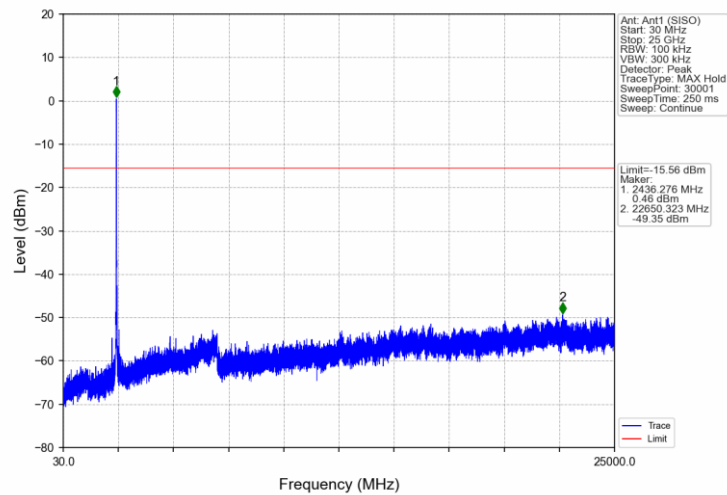


802.11g_HCH_2462MHz_Ant1 (SISO) NTN

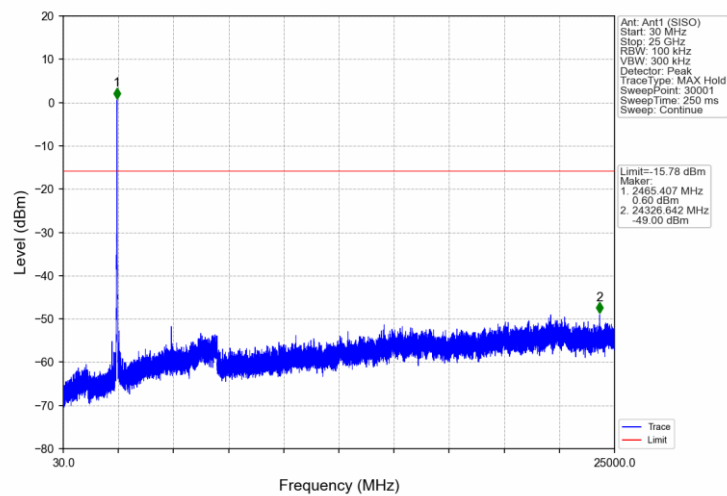


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

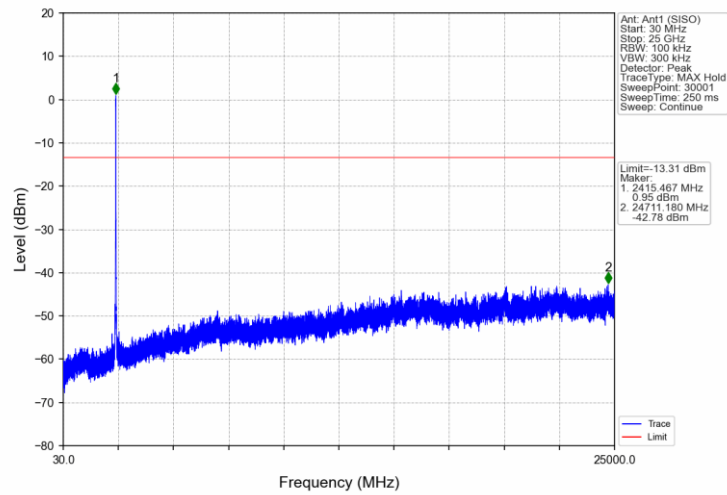

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

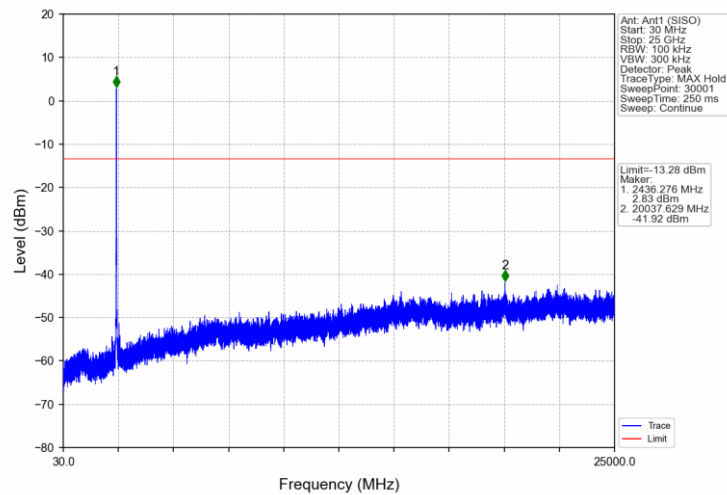

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

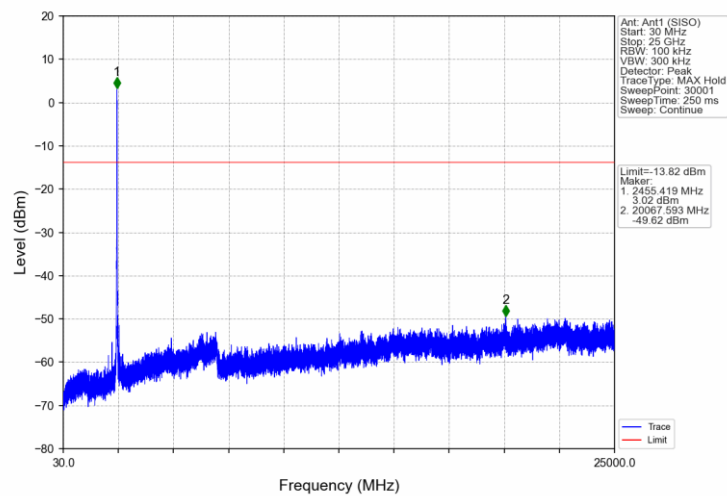

9.6 Band Edge Testing

Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously. Set the EUT to the lowest frequency channel.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector, Trace: Max hold, Sweep time: Coupled, Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation. Allow the trace to stabilize.
4. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
5. Set the EUT to the highest frequency channel and repeat step 2) to 4)
6. Enable the EUT hopping mode, repeat the test.

Limit


In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

Frequency Range MHz	Limit (dBc)
30-25000	-20


Band edge testing

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	SISO	2412	1	5.45	-14.55	Pass
		2437	1	5.37	-14.63	Pass
		2462	1	5.27	-14.73	Pass
802.11g	SISO	2412	1	4.25	-15.75	Pass
		2437	1	4.44	-15.56	Pass
		2462	1	4.22	-15.78	Pass
802.11n (HT20)	SISO	2412	1	6.69	-13.31	Pass
		2437	1	6.72	-13.28	Pass
		2462	1	6.18	-13.82	Pass


802.11b_LCH_2412MHz_Ant1 (SISO) NTNv

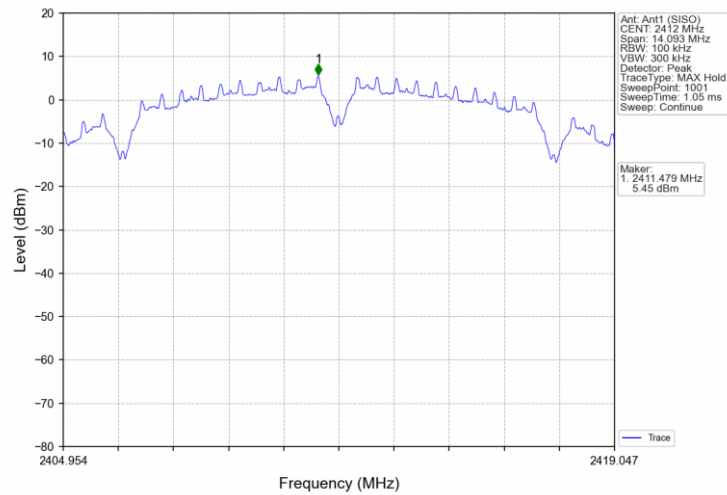


802.11b_MCH_2437MHz_Ant1 (SISO) NTNv

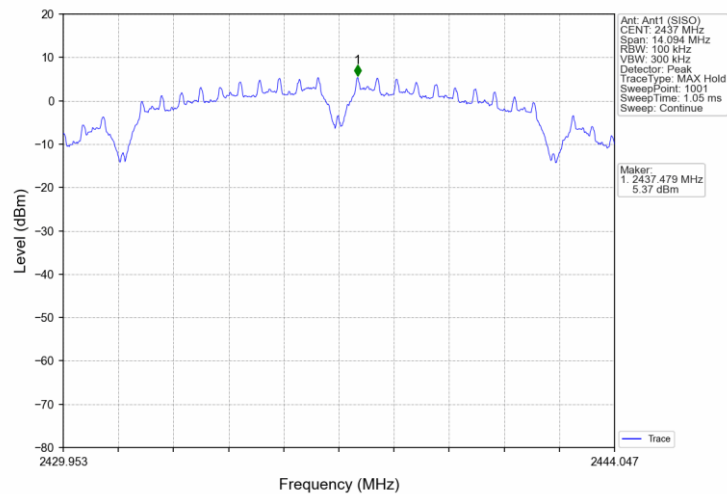


802.11b_HCH_2462MHz_Ant1 (SISO) NTNv

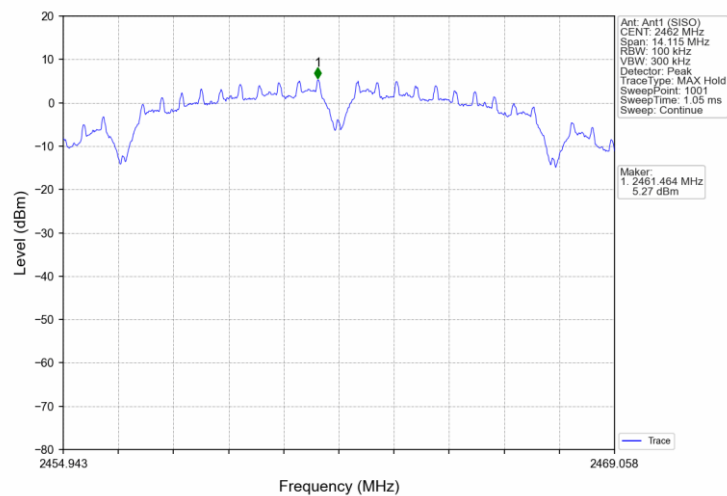


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

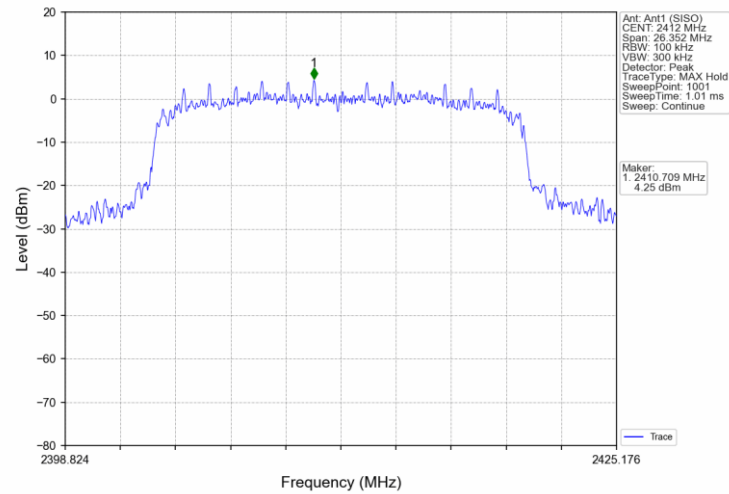


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

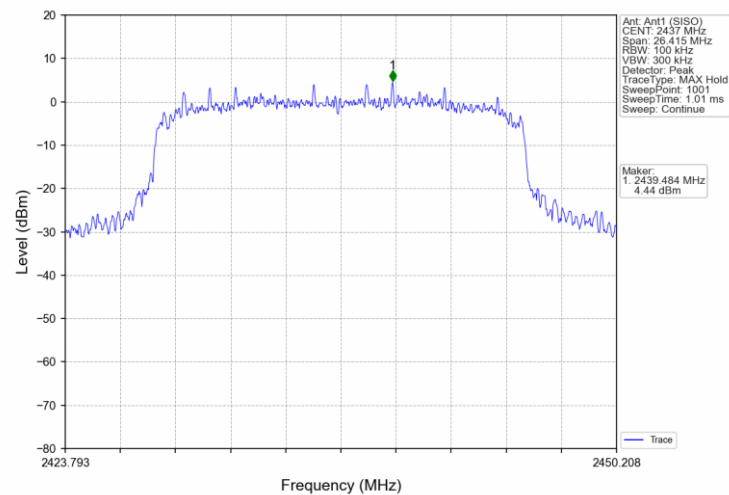


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

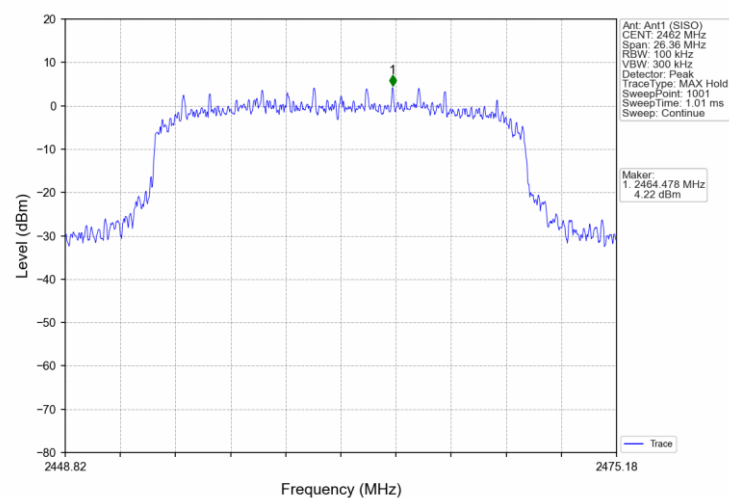


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

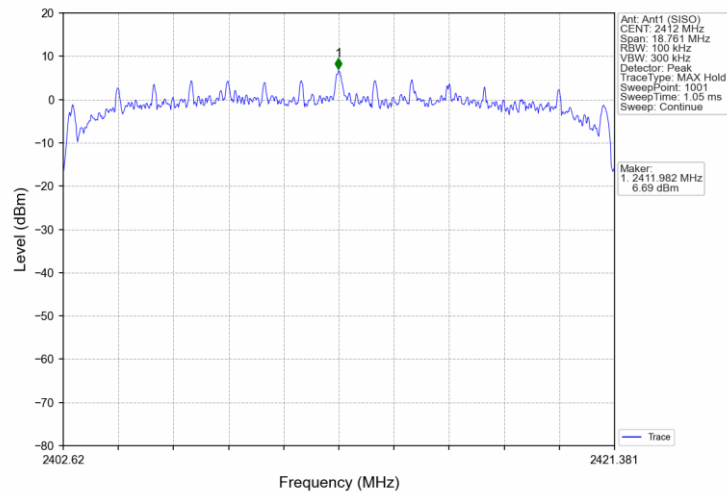


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

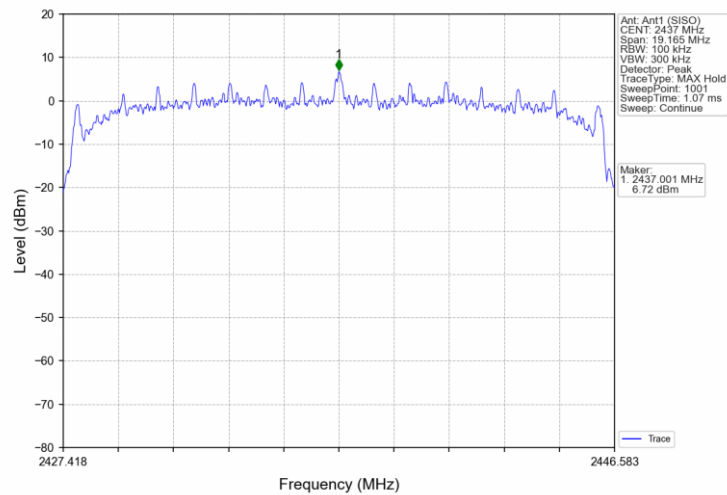


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

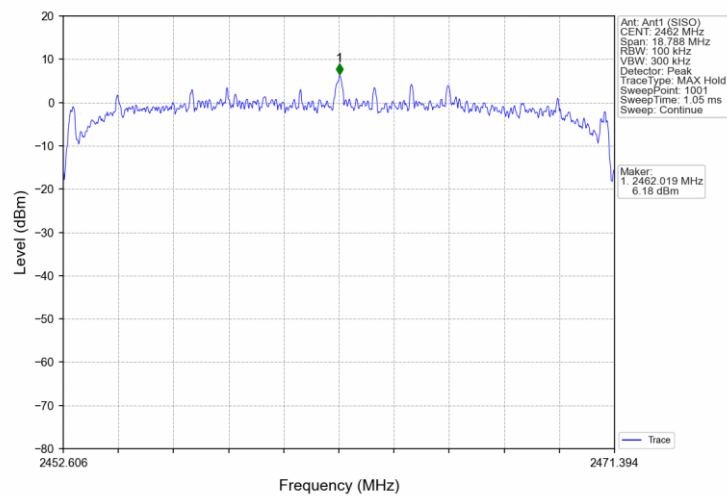


802.11b_LCH_2412MHz_Ant1 (SISO) NTN

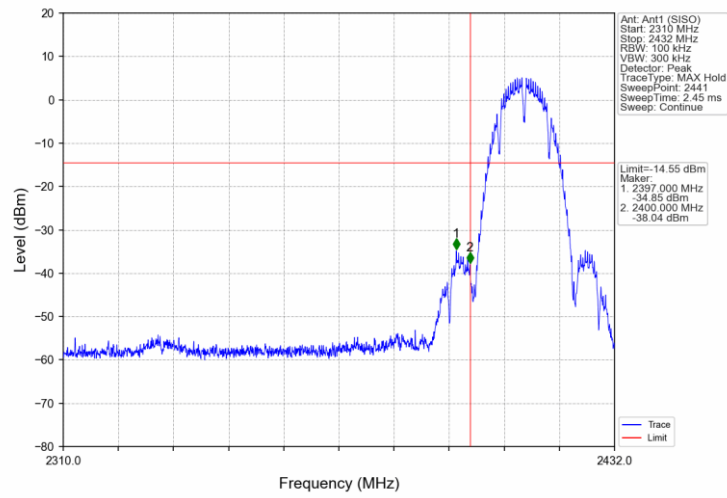


802.11b_HCH_2462MHz_Ant1 (SISO) NTN

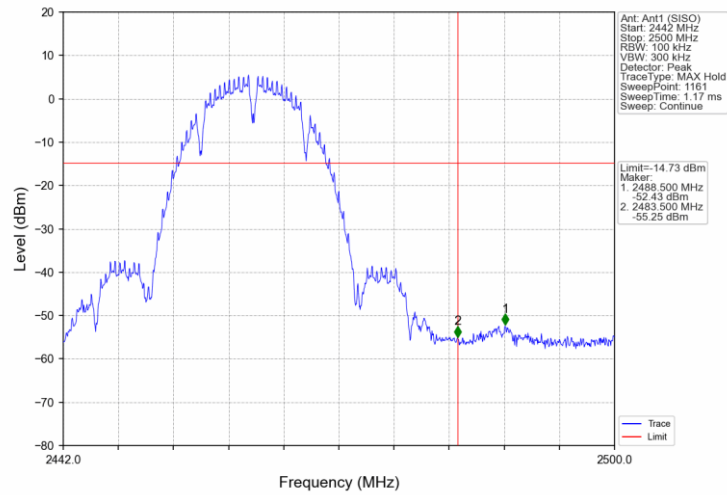


802.11g_LCH_2412MHz_Ant1 (SISO) NTN

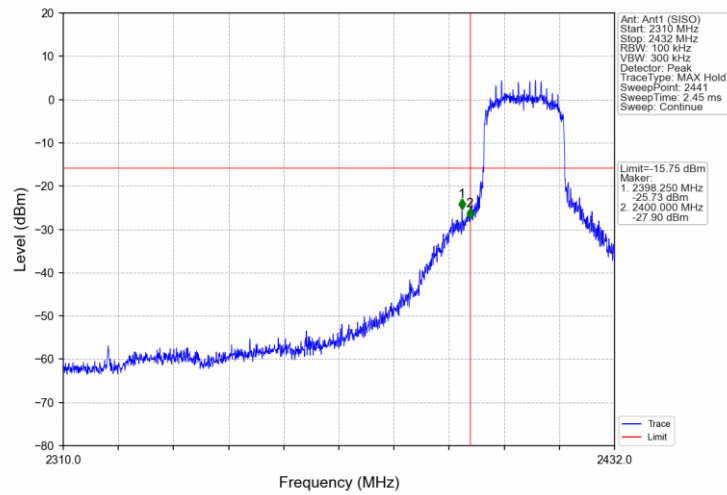


802.11g_HCH_2462MHz_Ant1 (SISO) NTN

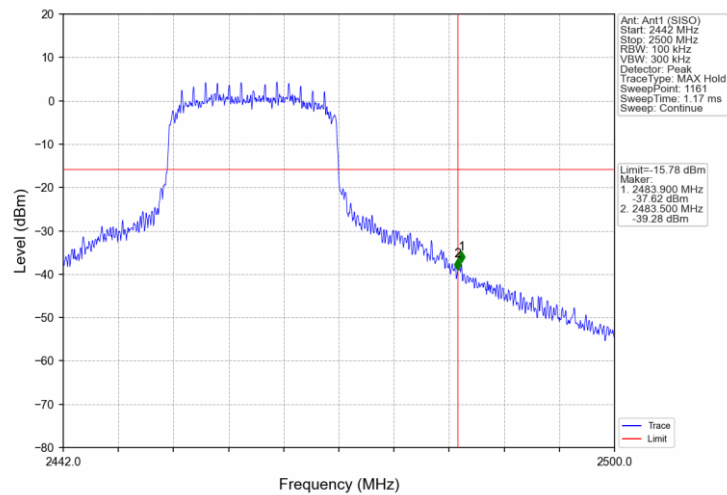

802.11n(HT20) LCH 2412MHz Ant1 (SISO) NTNV

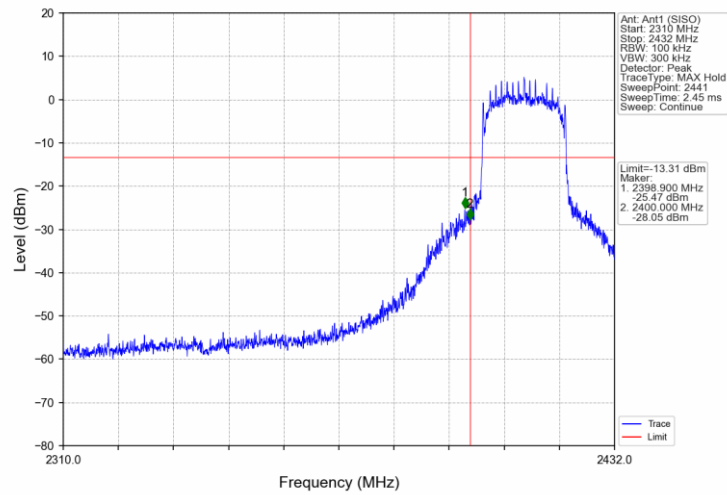

802.11n(HT20) HCH 2462MHz Ant1 (SISO) NTNV

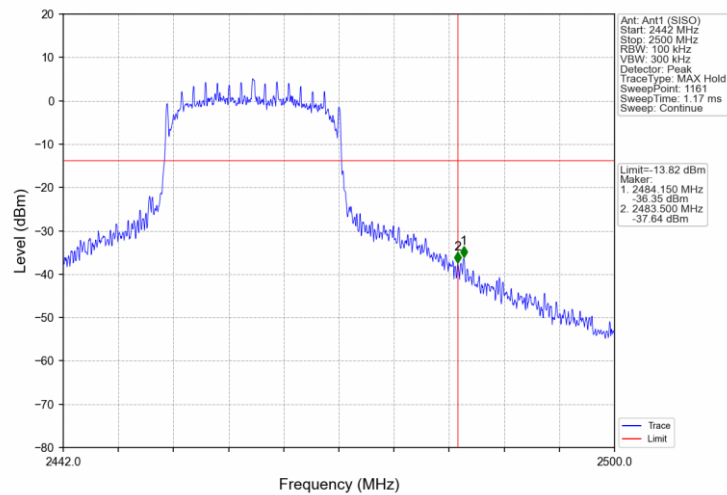

9.7 Spurious Radiated Emissions for Transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz to 120kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
Procedures for average unwanted emissions measurements above 1GHz
 - a) RBW = 1MHz.
 - b) $VBW \setminus [3 \times RBW]$.
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \setminus RBW / 2$.
Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
 - 2) If linear voltage averaging mode was used in the preceding step e), then the correction

factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(300\text{m}/3\text{m})$ (Below 30MHz)

Note 2: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(30\text{m}/3\text{m})$ (Below 30MHz)


Spurious Radiated Emissions for Transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.


The only worse case (802.11g) test result is listed in the report.

Transmitting spurious emission test result as below:

30MHz – 1000MHz:

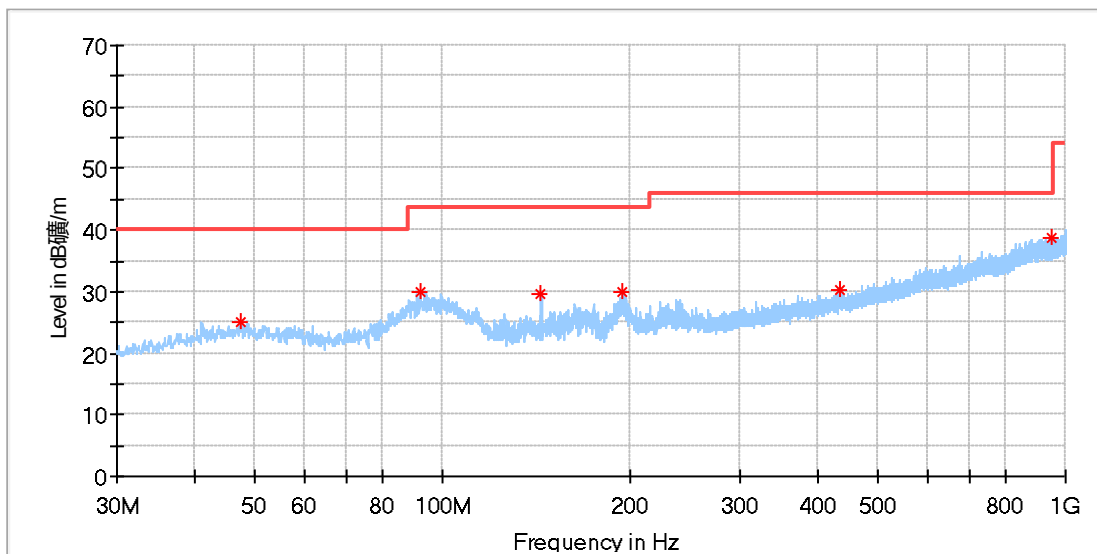


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.338750	25.11	40.00	14.89	200.0	H	290.0	21.08
92.322500	29.90	43.50	13.60	200.0	H	244.0	17.37
143.975000	29.59	43.50	13.91	200.0	H	218.0	15.21
193.990625	29.92	43.50	13.58	100.0	H	167.0	18.88
435.278125	30.22	46.00	15.78	200.0	H	0.0	24.61
947.741250	38.69	46.00	7.31	100.0	H	330.0	32.30

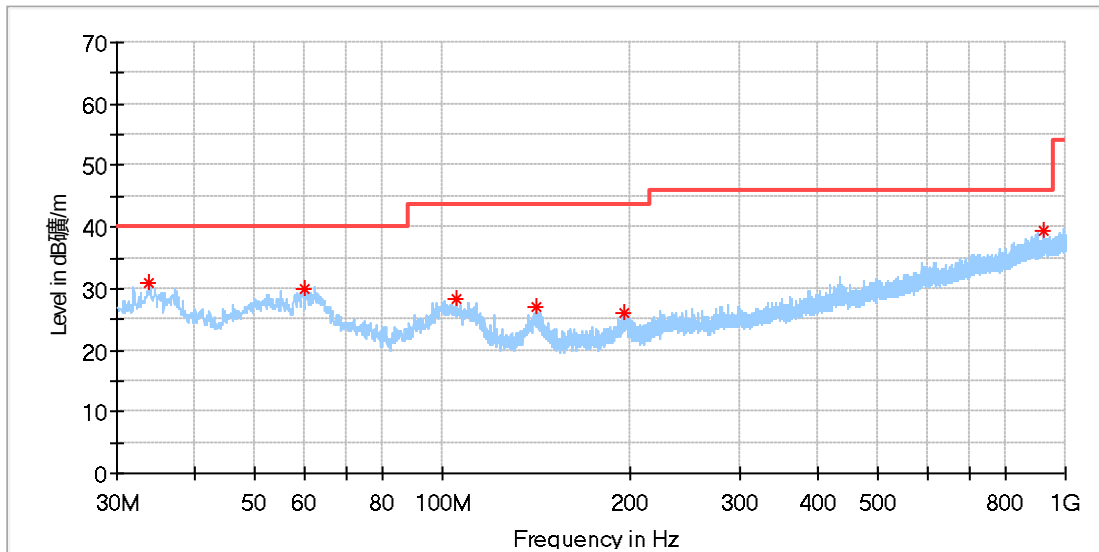


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.819375	31.05	40.00	8.95	100.0	V	0.0	17.39
60.251875	30.06	40.00	9.94	100.0	V	69.0	19.49
105.175000	28.24	43.50	15.26	100.0	V	261.0	18.69
141.792500	26.97	43.50	16.53	100.0	V	198.0	15.20
196.051875	26.00	43.50	17.50	100.0	V	78.0	18.99
921.975625	39.48	46.00	6.52	100.0	V	0.0	32.44

1GHz -18GHz:
11G_2412

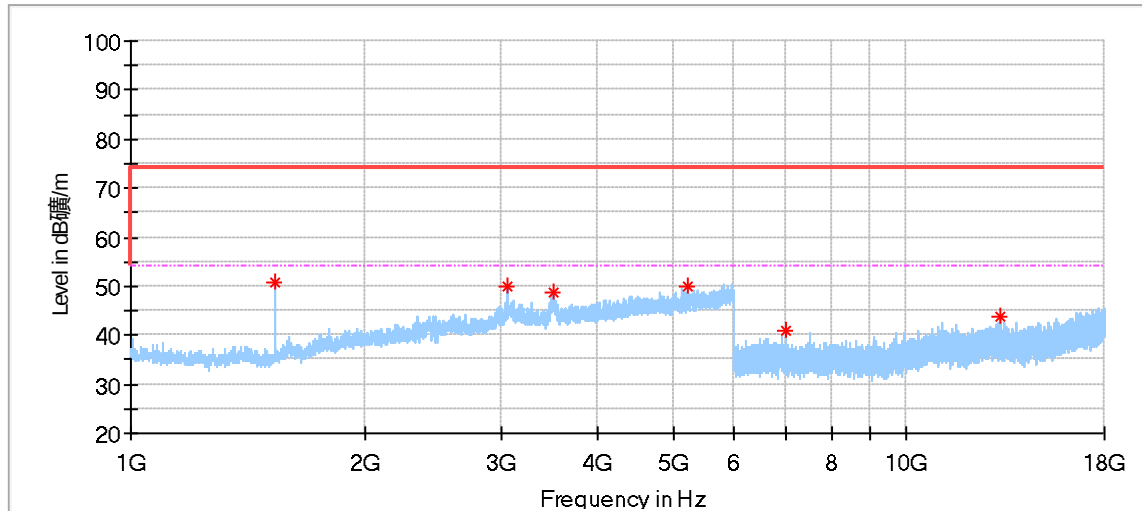


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1533.000000	50.88	74.00	23.12	150.0	H	314.0	-8.51
3067.000000	50.06	74.00	23.94	150.0	H	259.0	1.35
3497.500000	48.75	74.00	25.25	150.0	H	52.0	3.58
5216.000000	49.79	74.00	24.21	150.0	H	162.0	4.99
7007.500000	40.88	74.00	33.12	150.0	H	328.0	5.62
13212.000000	43.78	74.00	30.22	150.0	H	208.0	11.64

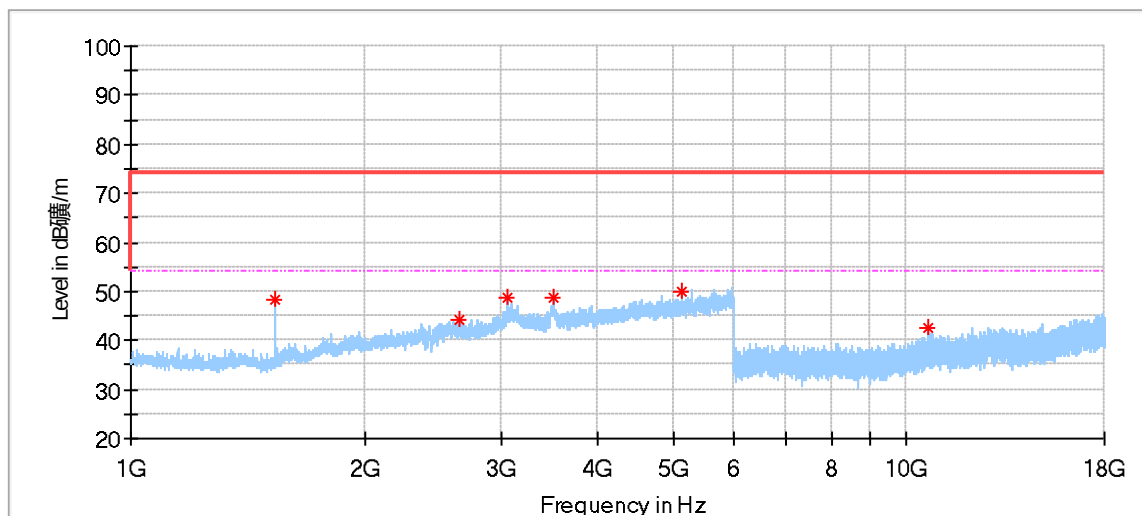


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1533.000000	48.38	74.00	25.62	150.0	V	356.0	-8.51
2649.500000	44.12	74.00	29.88	150.0	V	109.0	-1.77
3067.000000	48.73	74.00	25.27	150.0	V	296.0	1.35
3502.000000	48.85	74.00	25.15	150.0	V	356.0	3.65
5134.000000	50.12	74.00	23.88	150.0	V	337.0	4.77
10639.500000	42.55	74.00	31.45	150.0	V	28.0	9.45

11G_2437

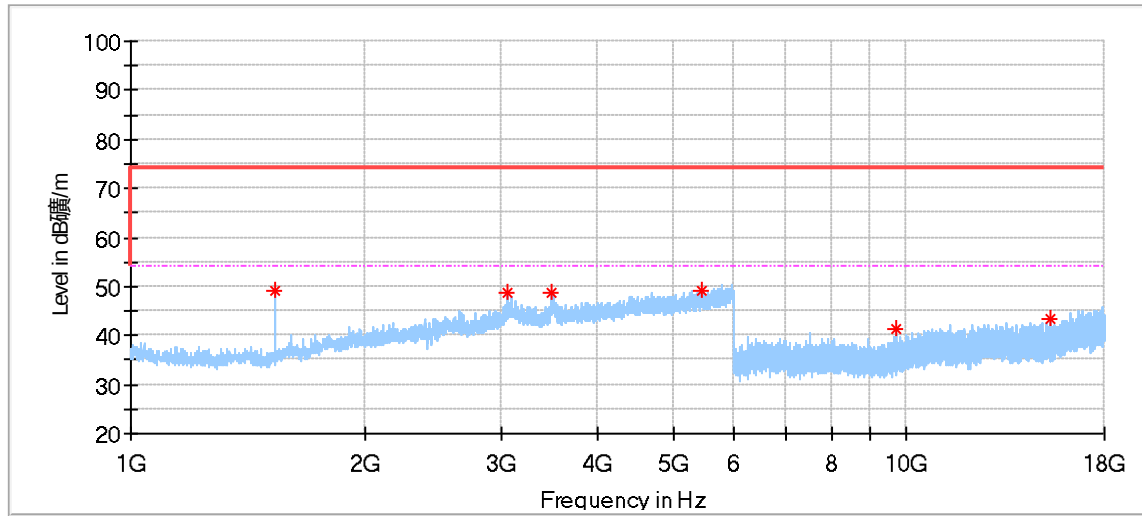


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1533.500000	48.99	74.00	25.01	150.0	H	302.0	-8.50
3066.500000	48.59	74.00	25.41	150.0	H	261.0	1.35
3484.500000	48.60	74.00	25.40	150.0	H	39.0	2.65
5446.000000	49.17	74.00	24.83	150.0	H	25.0	5.59
9688.000000	41.42	74.00	32.58	150.0	H	157.0	8.02
15299.500000	43.56	74.00	30.44	150.0	H	129.0	13.03

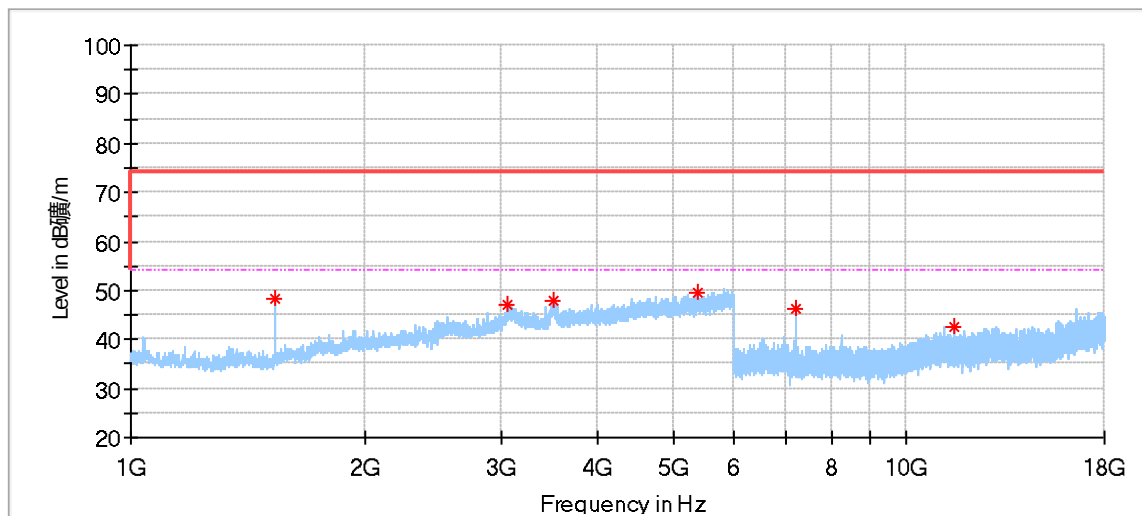


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1533.000000	48.46	74.00	25.54	150.0	V	356.0	-8.51
3066.500000	46.93	74.00	27.07	150.0	V	216.0	1.35
3502.500000	48.03	74.00	25.97	150.0	V	0.0	3.63
5366.500000	49.58	74.00	24.42	150.0	V	52.0	5.22
7196.500000	46.41	74.00	27.59	150.0	V	34.0	5.67
11556.000000	42.67	74.00	31.33	150.0	V	356.0	10.44

11G_2462

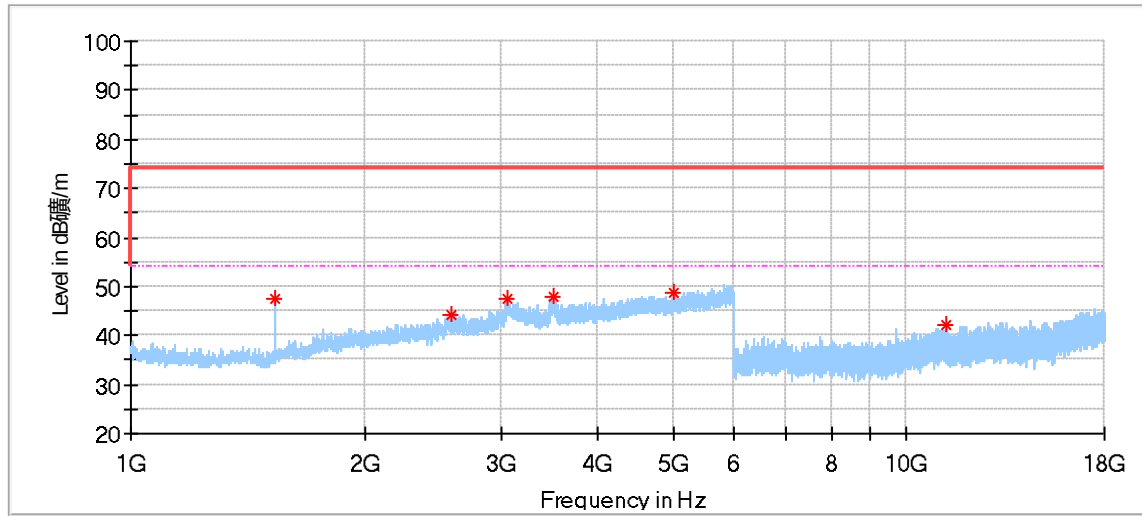

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1534.000000	47.35	74.00	26.65	150.0	H	347.0	-8.48
2583.000000	44.06	74.00	29.94	150.0	H	9.0	-1.42
3066.500000	47.53	74.00	26.47	150.0	H	9.0	1.35
3504.000000	47.83	74.00	26.17	150.0	H	128.0	3.55
5018.500000	48.76	74.00	25.24	150.0	H	101.0	4.39
11256.000000	42.04	74.00	31.96	150.0	H	359.0	10.31

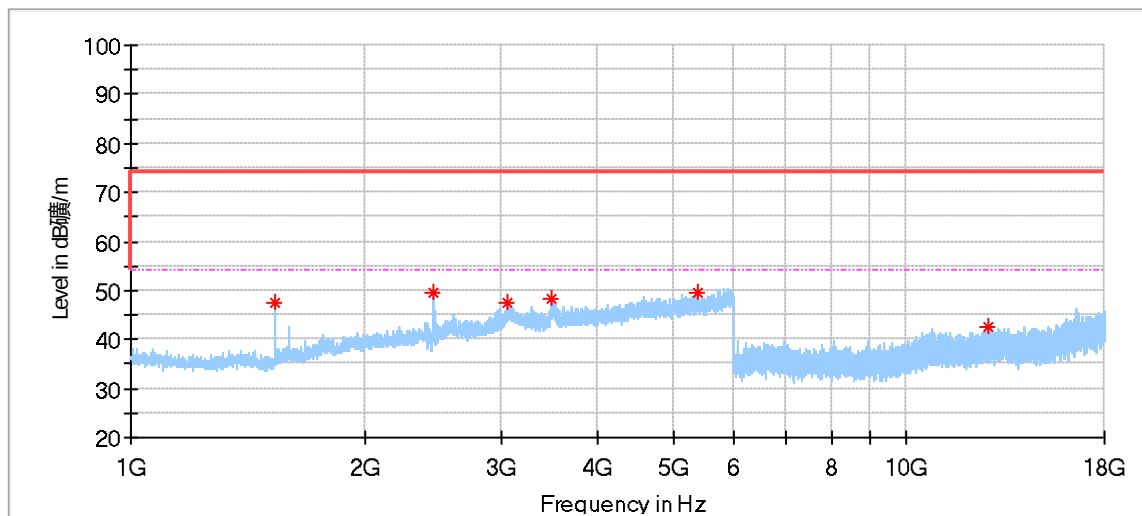

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1533.000000	47.68	74.00	26.32	150.0	V	356.0	-8.51
2457.000000	49.57	74.00	24.43	150.0	V	336.0	-2.10
3066.500000	47.42	74.00	26.58	150.0	V	292.0	1.35
3492.000000	48.31	74.00	25.69	150.0	V	166.0	3.19
5374.500000	49.44	74.00	24.56	150.0	V	81.0	5.24
12745.500000	42.51	74.00	31.49	150.0	V	73.0	11.68

Remark:

- (1) The emission(s) appear within the restrict bands shall follow the requirement of section 15.205 & RSS-GEN 8.10.

- (2) Data of measurement within frequency range 9kHz-30MHz, 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.
- (3) Level= Reading Level + Correction Factor
- (4) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

Conducted Emission 2# Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2025-5-13
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2025-5-12
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2024-5-19
Cable	OUQIAO	RG142	68-4-90-19-005-A20	----	----	----
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.35.02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	3	2025-10-15

Radiated Emission 1# Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2025-5-13
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2024-8-7
Cable	JUNFLON	MWX221	68-4-90-19-006-A20	----	----	----
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission 2# Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2025-2-22
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2025-4-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2025-5-11
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2025-5-11
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2024-7-11
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2025-5-11
Cable	OUQIAO	RG142	68-4-90-19-004-A20	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF conducted test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2025-5-11
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157W	68-4-93-14-003	101226/100929	1	2025-5-11
Cable	JUNFLON	J12J103539	68-4-90-19-003-A20	----	----	----
Test software	Tonscend	System for BT/Wi-Fi	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission in new shielding room (68-4-90-19-005) 150kHz-30MHz (for test using AMN ENV216)	3.15dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 30MHz-1000MHz	Horizontal: 4.63dB; Vertical: 4.78dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.38dB; Vertical: 5.38dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 18GHz-40GHz	Horizontal: 5.29dB; Vertical: 5.29dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10 ⁻⁸ or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

---THE END OF REPORT---