

Königswinkel 10
32825 Blomberg, Germany
Phone: +49 (0) 52 35 / 95 00-0
Fax: +49 (0) 52 35 / 95 00-10
office@phoenix-testlab.de
www.phoenix-testlab.de

Test Report

Report Number:

F191161E2

Equipment under Test (EUT):

omlox Satellite

Applicant:

TRUMPF Werkzeugmaschinen GmbH + Co. KG

Manufacturer:

TRUMPF Werkzeugmaschinen GmbH + Co. KG



Deutsche
Akkreditierungsstelle
D-PL-17186-01-01
D-PL-17186-01-02
D-PL-17186-01-03

References

- [1] **ANSI C63.10-2013**, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- [2] **FCC CFR 47 Part 15**, Radio Frequency Devices
- [3] **393764 D01 UWB FAQ v02**, ULTRA-WIDEBAND (UWB) DEVICES FREQUENTLY ASKED QUESTIONS

TEST RESULT

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

Tested and written by:	Thomas KÜHN		30.06.2020
	Name	Signature	Date
Reviewed and approved by:	Bernd STEINER		30.06.2020
	Name	Signature	Date

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:

	Page
1 Identification	4
1.1 Applicant.....	4
1.2 Manufacturer	4
1.3 Test laboratory	4
1.4 EUT (Equipment Under Test).....	5
1.5 Technical data of equipment.....	5
1.6 Dates	5
2 Operational states	6
3 Additional information	6
4 Overview.....	7
5 Test results	8
5.1 10 dB bandwidth	8
5.1.1 Method of measurement (10 dB bandwidth).....	8
5.1.2 Test results (10 dB bandwidth)	9
5.2 Peak level of transmission	12
5.2.1 Method of measurement (peak level of transmission).....	12
5.2.2 Test results (peak level of transmission)	12
5.3 Radiated emissions.....	15
5.3.1 Method of measurement (radiated emissions)	15
5.3.2 Test results (radiated emissions)	20
5.3.2.1 Preliminary radiated emission measurement (9 kHz to 40 GHz)	20
5.3.2.2 Final radiated emission measurement (30 MHz to 1 GHz)	37
5.3.2.3 Final radiated emission measurement (1 GHz to 40 GHz).....	38
5.4 Conducted emissions on power supply lines (150 kHz to 30 MHz).....	39
5.4.1 Method of measurement	39
5.4.2 Test results (conducted emissions on power supply lines)	40
5.4.2.1 Test results with EUT supplied via PoE.....	40
5.4.2.2 Test results with EUT supplied via USB	41
6 Test equipment and ancillaries used for tests.....	42
7 Test site Validation	43
8 Report history	43
9 List of annexes	43

1 Identification

1.1 Applicant

Name:	TRUMPF Werkzeugmaschinen GmbH + Co. KG
Address:	Johann-Maus-Str. 2, 71254 Ditzingen
Country:	Germany
Name for contact purposes:	Mr. Guido Schönhardt
Phone:	07156-303-36117
Fax:	-
eMail Address:	Guido.schoenhardt@trumpf.com
Applicant represented during the test by the following person:	---

1.2 Manufacturer

Name:	TRUMPF Werkzeugmaschinen GmbH + Co. KG
Address:	Johann-Maus-Str. 2, 71254 Ditzingen
Country:	Germany
Name for contact purposes:	Mr. Guido Schönhardt
Phone:	07156-303-36117
Fax:	-
eMail Address:	Guido.schoenhardt@trumpf.com
Manufacturer represented during the test by the following person:	---

1.3 Test laboratory

The tests were carried out at:

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Germany

Accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) in compliance with DIN EN ISO/IEC 17025 under Reg. No. D-PL-17186-01-05 and D-PL-17186-01-06, FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623.

1.4 EUT (Equipment Under Test)

Test object: *	Satellite for indoor localization
Model name: *	omlox Satellite
FCC ID: *	2AVYV-2554432-01
Serial number: *	204744041
PCB identifier: *	1901154A00102B90
Hardware version: *	Rev D
Software version: *	3.0.6
Lowest internal frequency: *	32.768 kHz

*: Declared by the applicant.

Note: PHOENIX TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

1.5 Technical data of equipment

Channel 1	$f_c = 3.575$ GHz, 500 MHz bandwidth					
Channel 2	$f_c = 4.000$ GHz, 500 MHz bandwidth					
Channel 3	$f_c = 4.500$ GHz, 500 MHz bandwidth					
Channel 4	$f_c = 4.000$ GHz, 1000 MHz bandwidth					
Rated rf-output power: *	-41.3 dBm (e.i.r.p.)					
Antenna type: *	Internal PCB antenna only					
Antenna connector: *	None					
Antenna gain: *	2 dBi					
Temperature range: *	-10 °C to 39 °C					
Supply voltage EUT (PoE): *	$U_{nom}=$	48.0 V _{DC}	$U_{min}=$	42.5 V _{DC}	$U_{max}=$	57.0 V _{DC}
Supply voltage EUT (USB): *	$U_{nom}=$	5.0 V _{DC}	$U_{min}=$	4.45 V _{DC}	$U_{max}=$	5.25 V _{DC}
Ancillary used for test:	Fujitsu Laptop PC type LIVEBOOK E-Series, PoE injector type PowerSine 3001, Samsung travel adapter EP-TA20EBE (all provided by the laboratory)					

* declared by the applicant.

Identification	Connector		Length *
	EUT	Ancillary	
USB	USB type C	USB type A	2.0 m
Ethernet	RJ45	RJ45	3.0 m

*: Length during the test if not otherwise specified.


1.6 Dates

Date of receipt of test sample:	07.05.2020
Start of test:	02.06.2020
End of test:	09.06.2020

2 Operational states

The EUT is intended to be used as transceiver for locating of machine tools inside a factory building. It will be fixed mounted inside the factory building. Therefore, it is defined as fixed indoor equipment. All tests were carried out with an unmodified test sample powered with 48 V_{DC} via PoE from a PoE injector. Because the EUT also could be supplied with 5.0 V_{DC} via USB, the conducted emission measurement on the power supply line was additionally carried out with this kind of power supply. The operation mode of the EUT could be chosen via the Ethernet link to a laptop PC with the help of a putty session.

The system setup as follows:

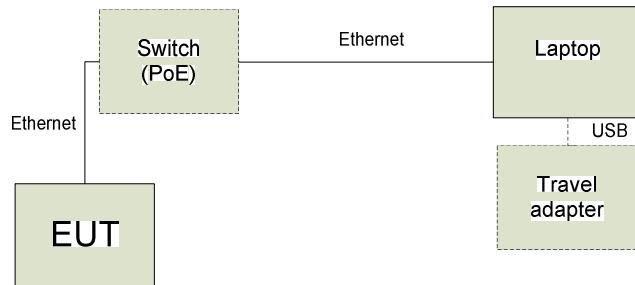

The transmit power level could be adjusted with the test software on the Laptop PC. The following power levels were used to reach the documented results:

Channel No.	Power setting
1	0
2	-4
3	-2
4	0

3 Additional information

The EUT also contains a Bluetooth Low Energy, a ZigBee and a WLAN transceiver. The results of these technologies are documented in the test reports F191161E3 to F191161E5. The emissions of the digital part of the EUT are documented in the test report F191161E1. Object of this test report is the UWB part of the EUT only.

The tested sample was not labeled as required by the FCC.

4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	Status	Refer page
10 dB bandwidth	3100 - 10600	15.517 (b)	Passed	8 et seq.
Peak level of transmission	3100 - 10600	15.517 (e)	Passed	12 et seq.
Radiated emissions (transmitter)	0.009 - 40000	15.517 (c) 15.517 (d) 15.205 (a) 15.209 (a)	Passed	15 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	Passed	39 et seq.
Antenna requirement	-	15.517 (a) (3)	Passed *1	-

*1: As declared by the applicant, the EUT is intended to be used with the internal PCB antenna only. No external antennas should be connected to the EUT. The internal UFL-connector is intended for test purposes only. Therefore, the antenna requirement could be regarded as fulfilled.

5 Test results

5.1 10 dB bandwidth

5.1.1 Method of measurement (10 dB bandwidth)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled, the transmitter shall work with its maximum data rate.

The following spectrum analyser settings according to [1] shall be used:

- Span: App. 2 to 5 times the 20 dB bandwidth, centered on the actual hopping channel.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: \geq the RBW.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- Sweep time: 1 ms / sweep point.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilization the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 10 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

Test set-up:

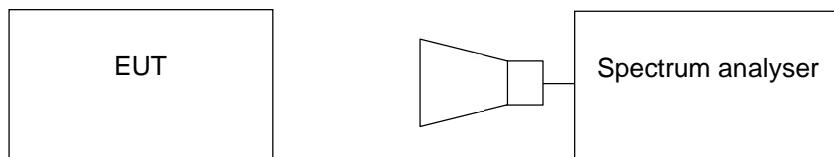


5.1.2 Test results (10 dB bandwidth)


Ambient temperature	22 °C
---------------------	-------

Relative humidity	43 %
-------------------	------


191161_6.png: 10 dB bandwidth on channel 1:

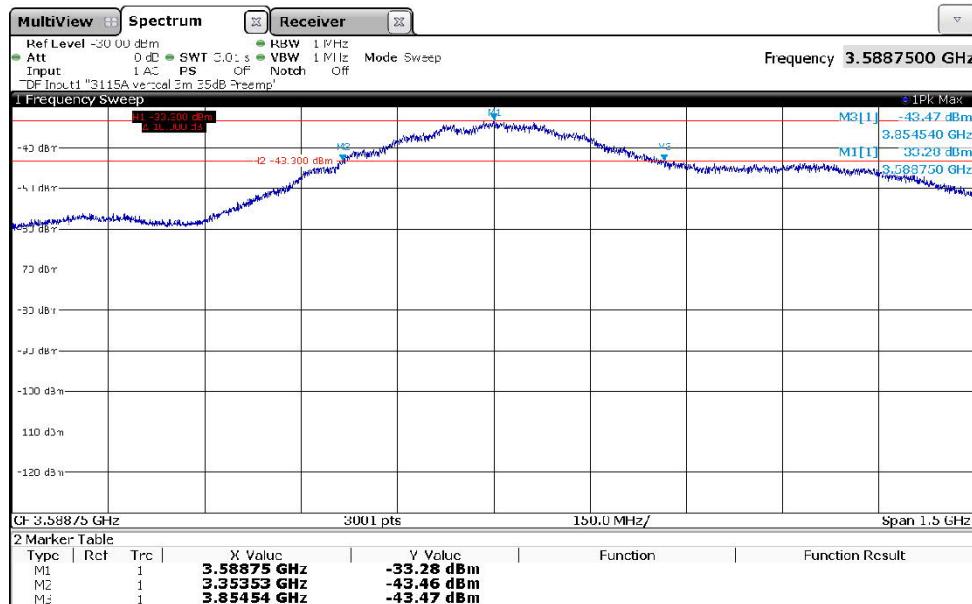


191161_7.png: 10 dB bandwidth on channel 2:

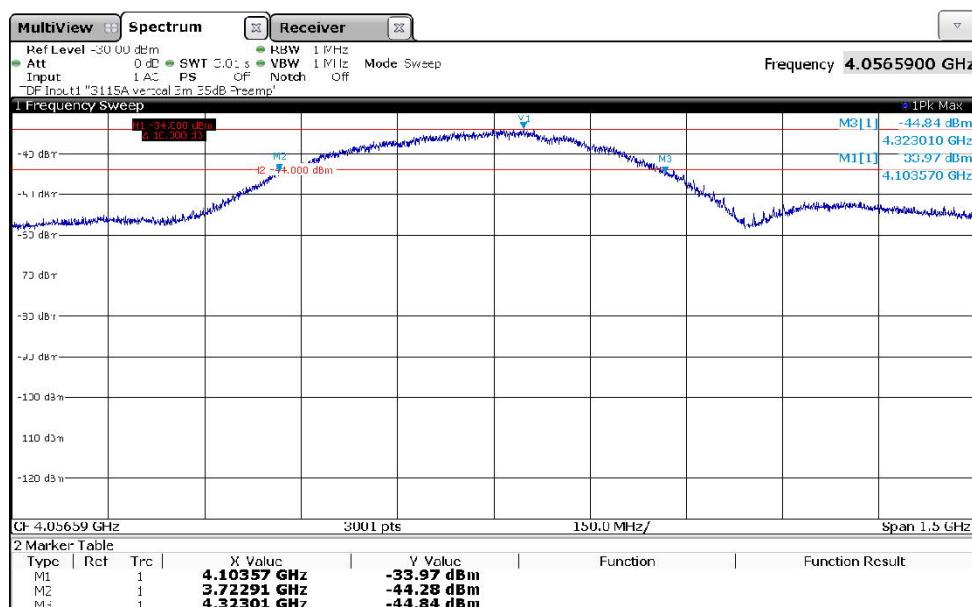

191161_8.png: 10 dB bandwidth on channel 3:

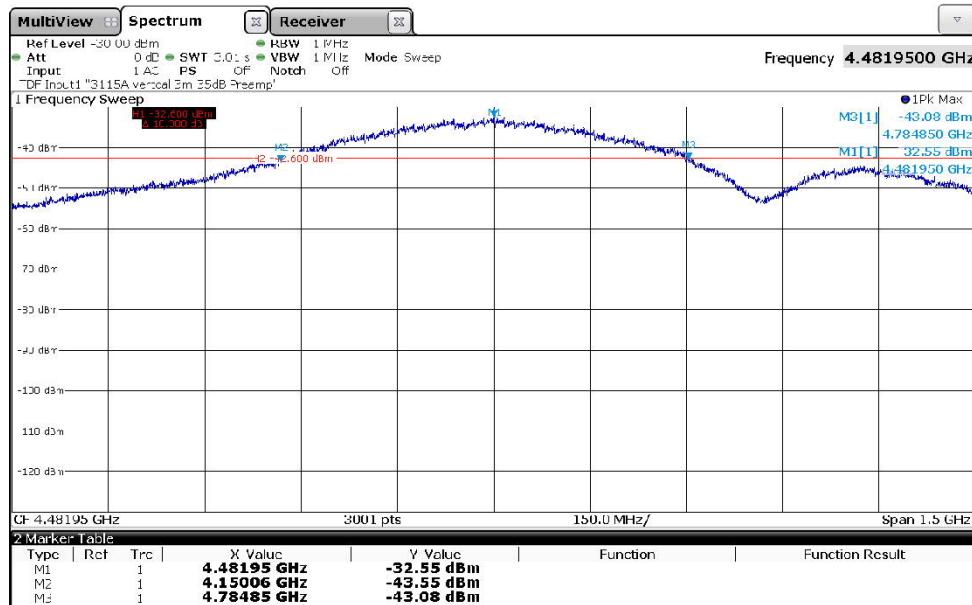

191161_5.png: 10 dB bandwidth on channel 4:

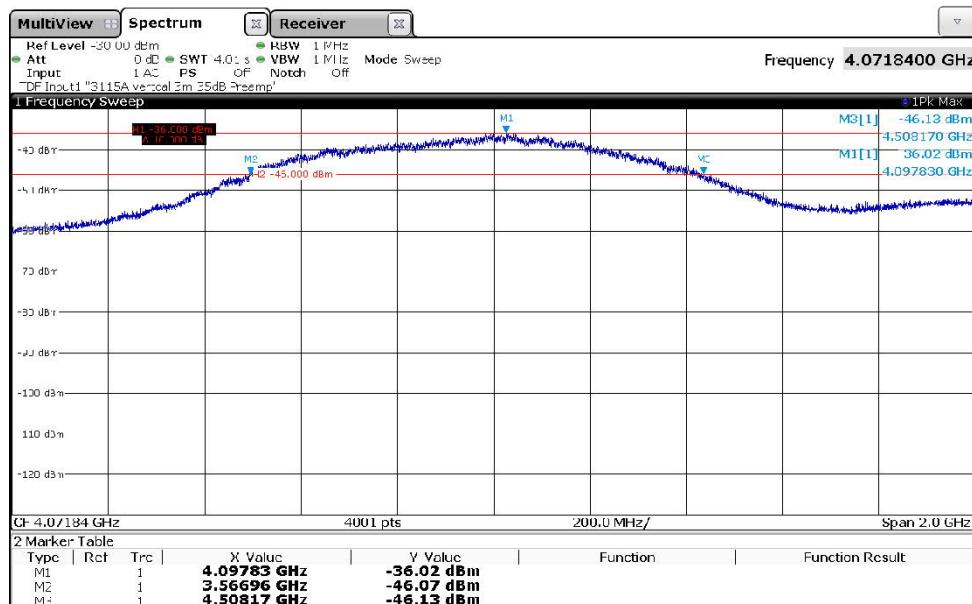

Channel number	Higher frequency f_H [MHz]	Lower frequency f_L [MHz]	10 dB bandwidth $f_H - f_L$ [GHz]	Center frequency $(f_H + f_L)/2$ [MHz]	Fractional bandwidth
1	3854.540	3353.530	0.50101	3604.035	0.139
2	4323.010	3722.910	0.60010	4022.960	0.149
3	4784.850	4150.060	0.63479	4467.455	0.142
4	4508.17	3566.960	0.94121	4037.565	0.233
Measurement uncertainty			+0.66 dB / -0.72 dB		

Test: Passed

Test equipment used (refer clause 6):

11 – 13, 17, 19, 26

5.2 Peak level of transmission


5.2.1 Method of measurement (peak level of transmission)

Because the EUT has no antenna connector, which presents the power delivered to the antenna, the peak value of the field strength was measured. The method of measurement is described under clause 5.3.1 (final measurement (1 GHz to 26.5 GHz)) of this test report with the exception that a peak detector and a resolution bandwidth of 50 MHz within a 50 MHz span centered at highest detected average emission level.


5.2.2 Test results (peak level of transmission)

Ambient temperature	22 °C	Relative humidity	49 %
---------------------	-------	-------------------	------


191161_13.png: Peak level of transmission on channel 1:

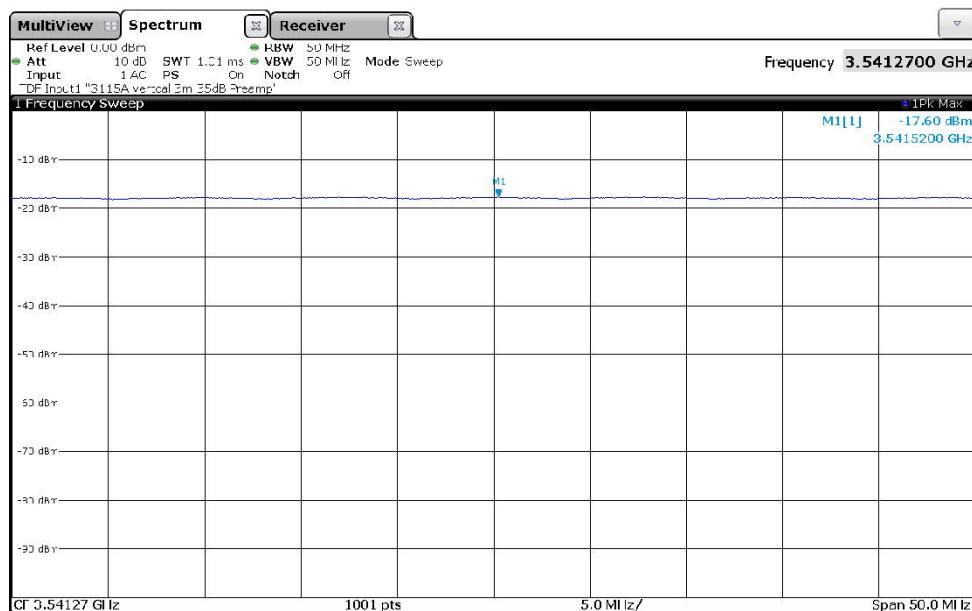


191161_14.png: Peak level of transmission on channel 2:

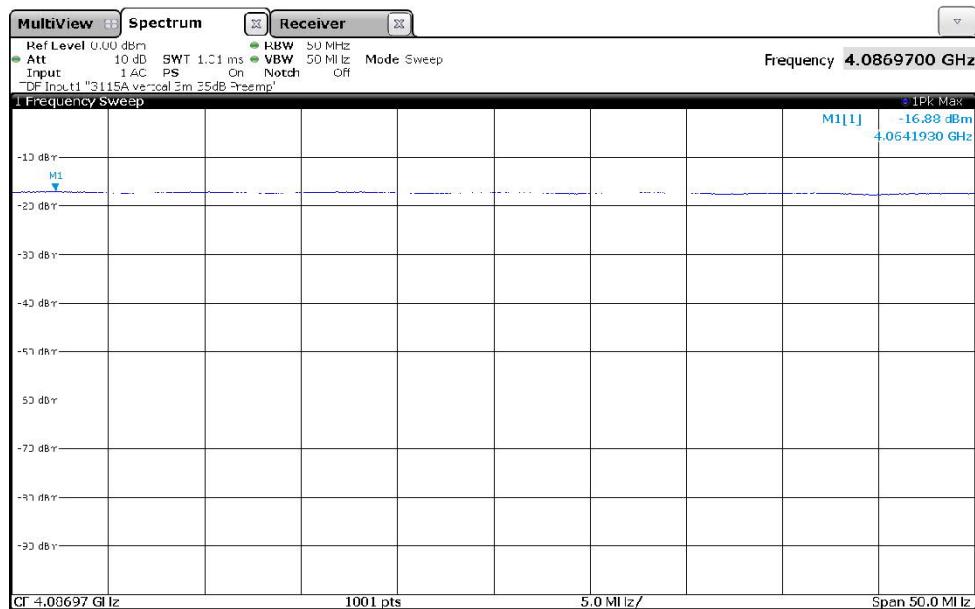

191161_15.png: Peak level of transmission on channel 3:

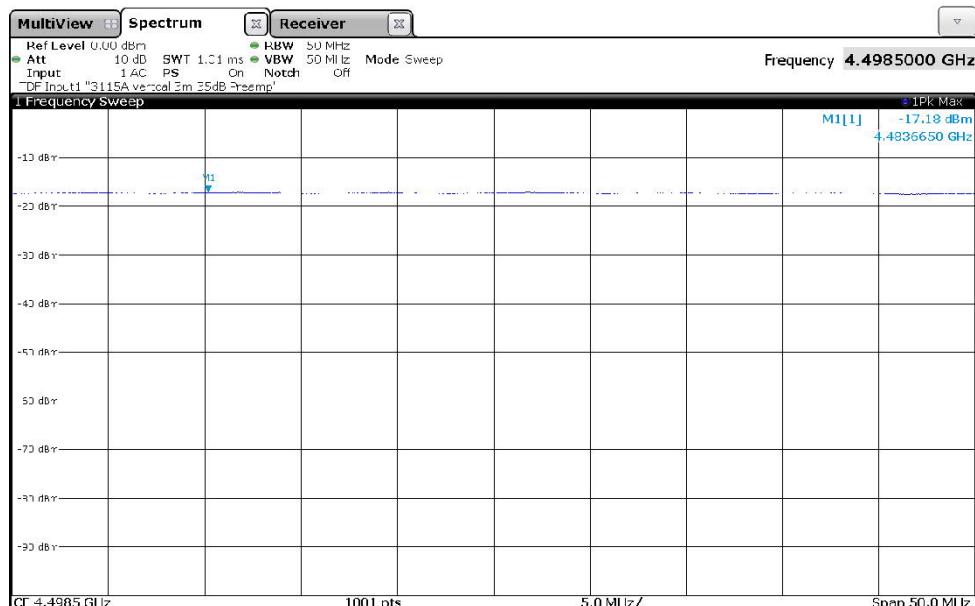

191161_16.png: Peak level of transmission on channel 4:

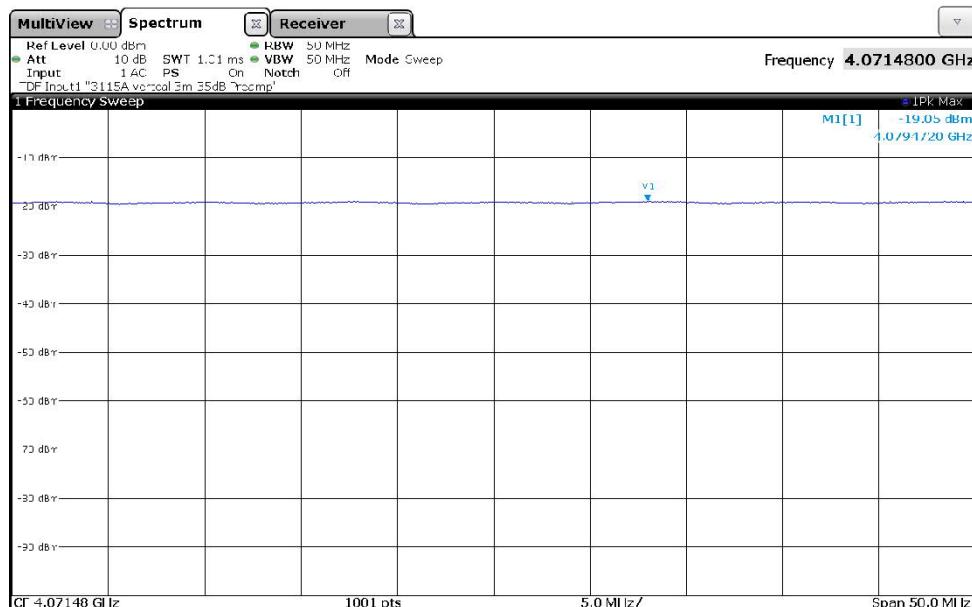

Channel No.	Channel frequency [GHz]	Frequency of max. level [GHz]	Bandwidth [kHz]	Height [cm]	Turn table [deg]	Turn device [deg]	Pol.	Peak level (EIRP) [dBm]	Limit [dBm]	Margin [dB]
1	3575	3541.520	50000	150	6	17	Vert.	-17.6	0.0	17.6
2	4000	4064.193	50000	150	6	15	Vert.	-16.9	0.0	16.9
3	4500	4483.665	50000	150	6	20	Vert.	-17.2	0.0	17.2
4	4000	4079.472	50000	150	6	20	Vert.	-19.1	0.0	19.1
Measurement uncertainty								±5.5 dB		

Test: Passed

Test equipment used (refer clause 6):

11 – 19, 26

5.3 Radiated emissions

5.3.1 Method of measurement (radiated emissions)


The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out inside a semi anechoic chamber with various antenna heights in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test site without reflecting ground plane and fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out inside a semi anechoic chamber with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with fixed antenna distance and height in the frequency range above 1 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range above 1 GHz.

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to find the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

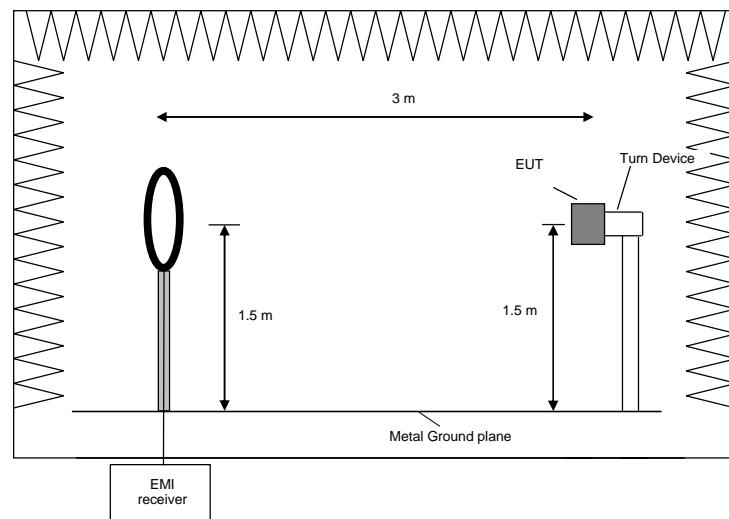

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT.
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m whichever is appropriate. In the case where larger measuring distances were required the results will be extrapolated based on the values measured on the closer distances according to [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak.

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

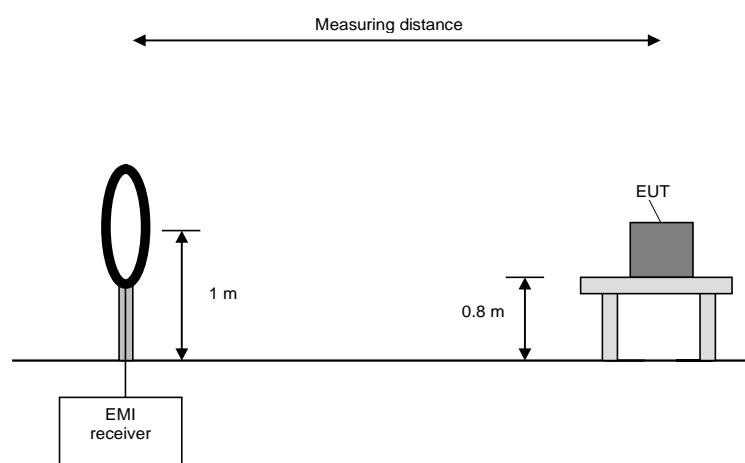

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (only if the EUT is a module or is used in a handheld application).

Preliminary and final measurement (30 MHz to 1 GHz)

The EUT is measured in the frequency range from 30 MHz to 1 GHz inside a semi anechoic chamber with a metal ground plane, which has been validated to the requirements of [1]. It is placed on a 3D-positioner to allow different positions at a distance of 3 meters from the receiving antenna. Both polarizations (vertical and horizontal) have been evaluated and the turn table has been turned to 360° to maximize the emissions. The receiving antenna is raised from 1 to 4 m.

Procedure preliminary measurement:

The following procedure is used:

1. Set the measurement antenna to 1 m height.
2. Monitor the frequency range at vertical polarization and a EUT azimuth of 0 °.
3. Rotate the EUT by 360° to maximize the detected signals in two axes.
4. Repeat 1) to 2) with the horizontal polarization of the measuring antenna.
5. Increase the height of the antenna for 0.5 m and repeat steps 2 – 4 until the final height of 4 m is reached (30 MHz to 1 GHz only).
6. The highest values for each frequency will be saved by the software, including the antenna height, measurement antenna polarization and turntable azimuth for that value.


Procedure final measurement:

The following procedure is used:

1. Select the highest frequency peaks to the limit for the final measurement.
2. The software will determine the exact peak frequencies by doing a partial scan with reduced RBW with +/- 10 times the RBW of the pre-scan of the selected peaks.
3. If the EUT is portable or ceiling mounted, find the worst case EUT position (x, y, z) for the final test.
4. The worst measurement antenna height is found by the measurement software by varying the measurement antenna height by +/- 0.5 m from the value obtained in the preliminary measurement, and to monitor the emission level.
5. The worst azimuth turntable position is found by varying the turntable azimuth by +/- 25° from the value obtained in the preliminary measurement, and to monitor the emission level.
6. The final measurement is performed at the worst-case antenna height and the worst case turntable azimuth
7. Steps 2 – 6 will be repeated for each frequency peak selected in step 1.
8. For frequencies above 960 MHz the measured field strength is converted to an EIRP value

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	100 kHz

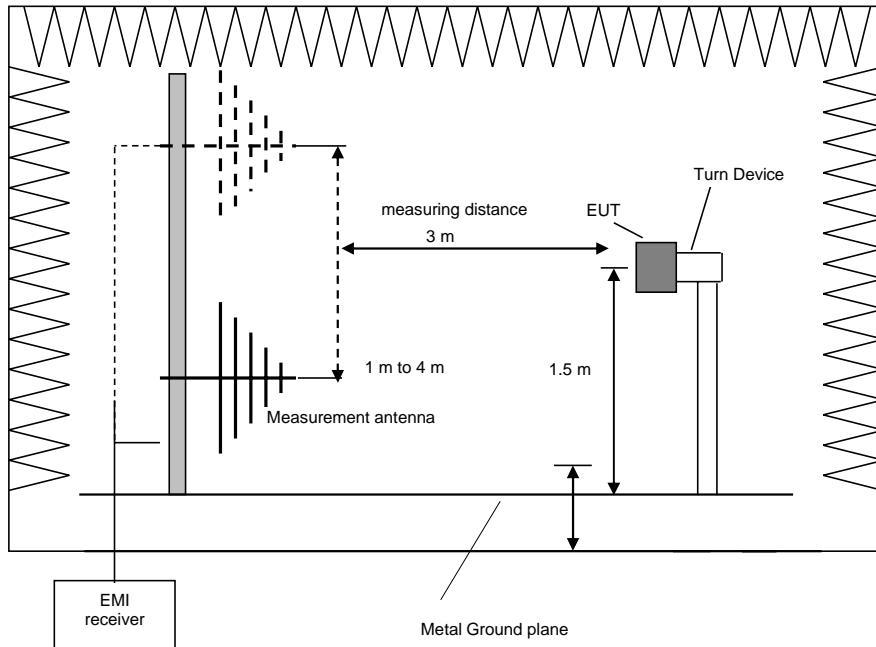

Test setup for measurements below 1 GHz

Preliminary and final measurement (1 GHz to 40 GHz)

This measurement will be performed in a fully anechoic chamber. Table top devices will set up on a non-conducting turn device at a height of 1.5 m. The set-up of the Equipment under test will be in accordance with [1].

Procedure preliminary measurement:

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz

Prescans were performed in the frequency range 1 to 40 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0° with peak or RMS detector of the spectrum analyser (depending of the noise floor and the applicable limit).
2. Rotate the EUT by 360° to maximize the detected signals.
3. Repeat 1) to 2) with the vertical polarisation of the measuring antenna.
4. Make a hardcopy of the spectrum.
5. Repeat 1) to 4) with the EUT raised by an angle of 30° (60° , 90° , 120° and 150°) according to 6.6.5.4 in [1].
6. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
7. The measurement antenna polarisation, with the according EUT position (Turntable and Turn device) which produces the highest emission for each frequency will be used for the final measurement. The six closest values to the applicable limit will be used for the final measurement.

Procedure final measurement:

The measurements were performed in the frequency range 1 GHz to 40 GHz.

The following procedure will be used:

- 1) Set the turntable and the turn device to obtain the worst-case emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna polarisation to the orientation with the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with peak and RMS average detector activated.
- 4) Rotate the turntable from 0° to 360° to find the EUT angle that produces the highest emissions.
- 5) Note the highest displayed peak and average values
- 6) Repeat the steps 1) to 5) for each frequency detected during the preliminary measurements.
- 7) Replace the EUT by a substitution antenna, which is fed by a signal generator.
- 8) Carry out a substitution for each frequency detected during the steps 5) to 6).
- 9) Calculate the EIRP values with the help of the final measurement and the substitution results.

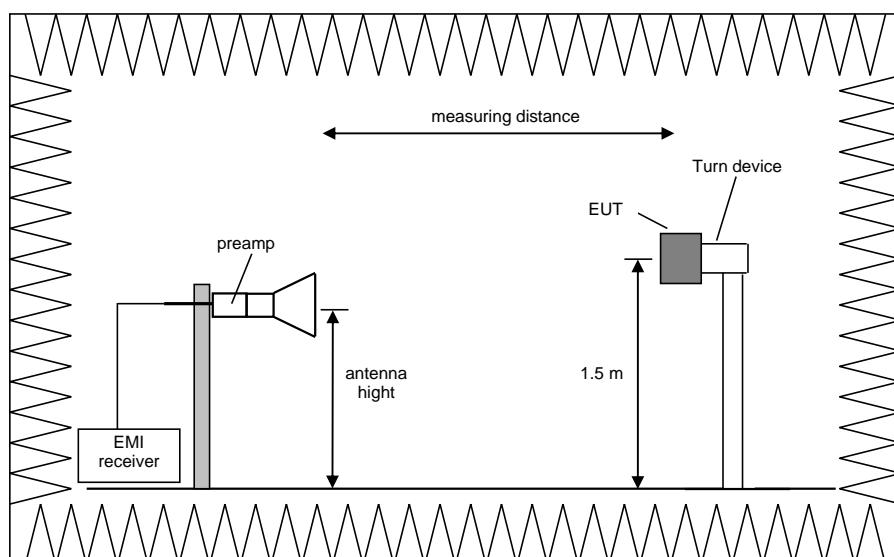

Test setup for measurements from 1 GHz to 40 GHz

5.3.2 Test results (radiated emissions)

5.3.2.1 Preliminary radiated emission measurement (9 kHz to 40 GHz)

Ambient temperature	21 °C	Relative humidity	31 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a turn device of a height of 1.5 m. The distance between EUT and antenna was 3 m (9 kHz to 1 GHz and 3.1 GHz to 10.6 GHz), 1 m (1 GHz to 3.1 GHz and 10.6 to 40 GHz).

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.


Supply voltage: During this test the EUT was powered with 48 V_{DC} by the power injector PowerSine 3001, which was itself supplied with 120 V_{AC} / 60 Hz.

Frequency range: The preliminary measurement was carried out in the frequency range 9 kHz to 40 GHz according to [2].

Remark: As the measurements have shown, the emissions below 1.99 GHz are not depending of the transmitter operation mode, they are caused by the digital part of the EUT also if the UWB transmitter is inactive.

Transmitter independent emissions below 1.99 GHz:


191161_UWB_1_mag: Spurious emissions from 9 kHz to 30 MHz:

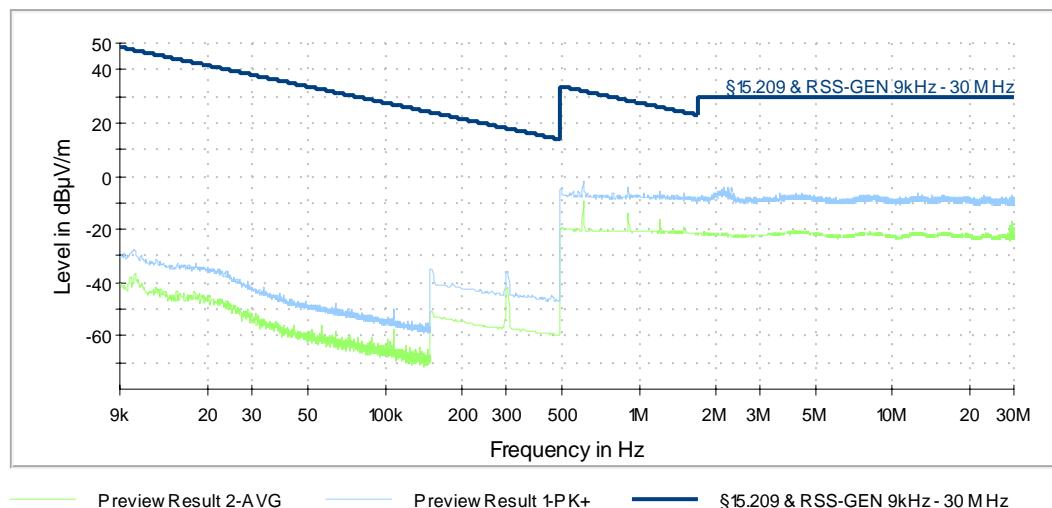

Remark: In the shown plot a distance correction factor was added to the measurement results to account for the different measuring distances according to standard (9 kHz to 490 kHz @ 300 m; 490 kHz to 30 MHz @ 30 m).

All emissions are more the 20 dB from the limit, so no final measurement was performed.

191161_UWB_1_low: Spurious emissions from 30 MHz to 1 GHz:

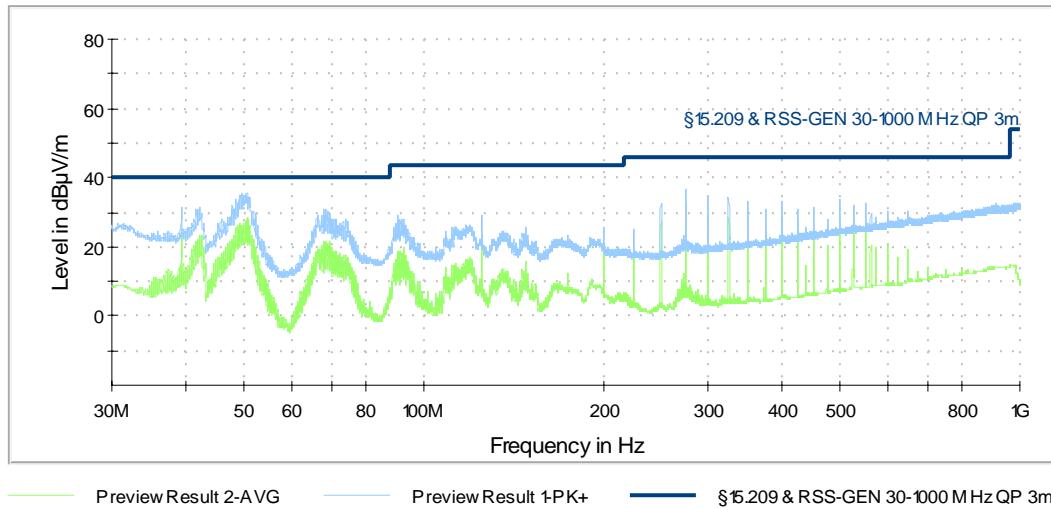

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 39.260 MHz, 50.430 MHz, 68.480 MHz, 90.350 MHz, 300.050 MHz and 500.000 MHz.

The following frequency was found inside the restricted bands during the preliminary radiated emission test:


- 124.990 MHz, 275.020 MHz and 400.010 MHz.

The following frequency was found in the frequency range 960 MHz to 1 GHz:

- 974.860 MHz (highest peak, noise floor of the measuring system).

On these frequencies a final measurement has to be carried out. The result is presented in the following.

191161_24.png: Spurious emissions from 1 GHz to 1.61 GHz:

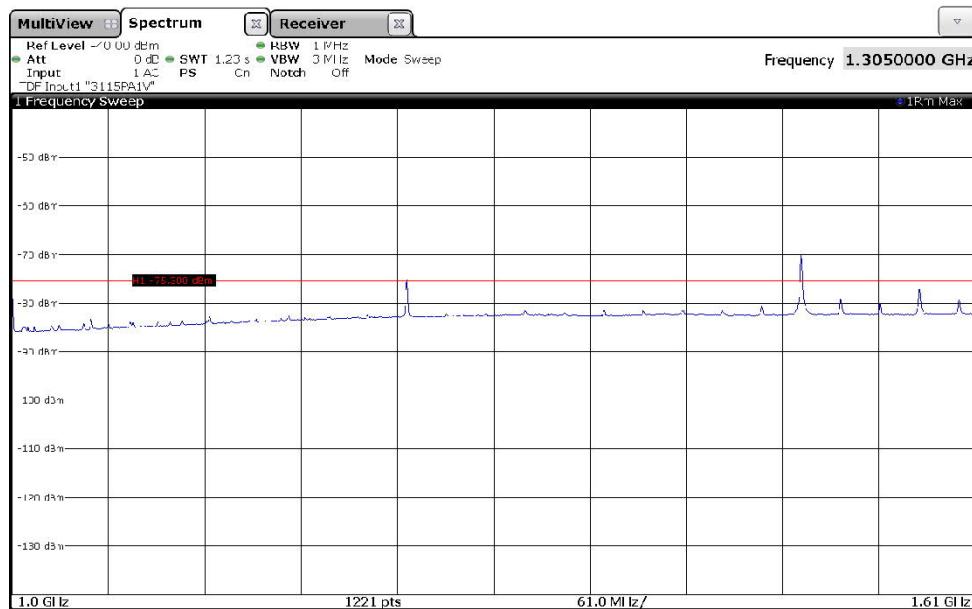


The following frequencies were found:

- 1249.901 MHz, 1499.890 MHz and 1574.879 MHz.


No final measurement was carried out on these frequencies, because they were not caused by the UWB transmitter.

191161_25.png: Spurious emissions from 1.61 GHz to 1.99 GHz:

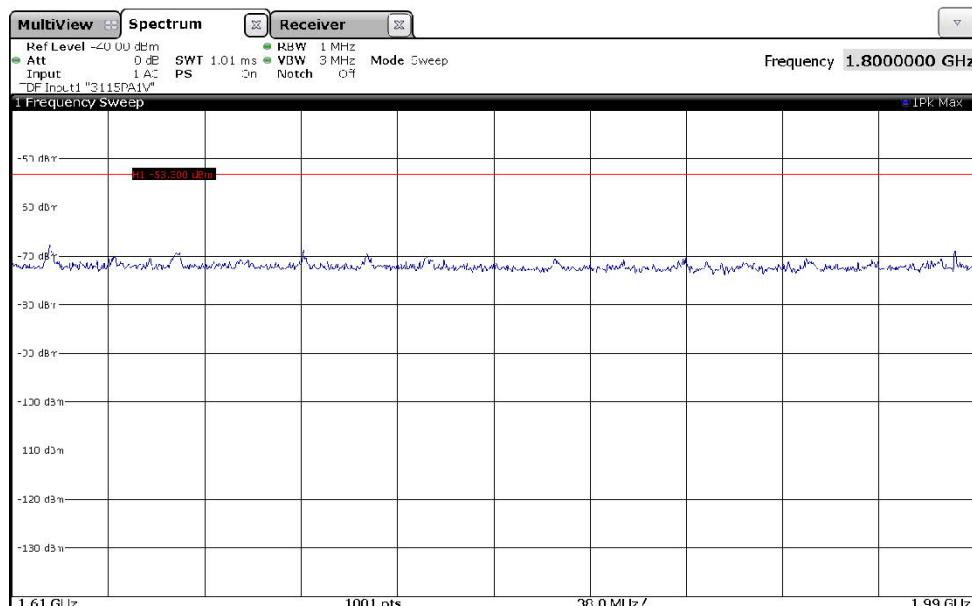


All emissions were below -67.6 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -53.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_34.png: Spurious emissions from 1.164 GHz to 1.240 GHz:

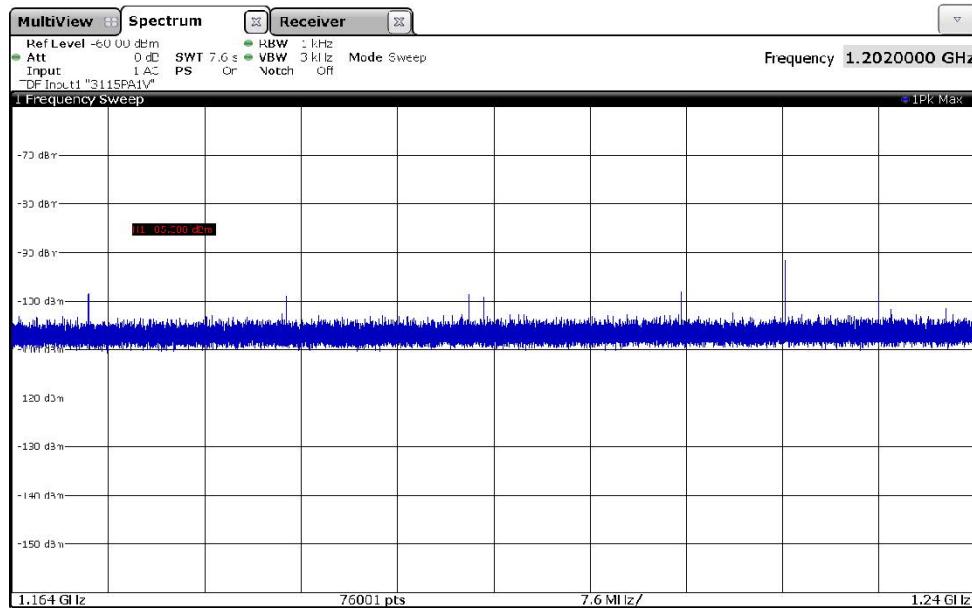

All emissions were below -90.7 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -85.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_35.png: Spurious emissions from 1.559 GHz to 1.610 GHz:

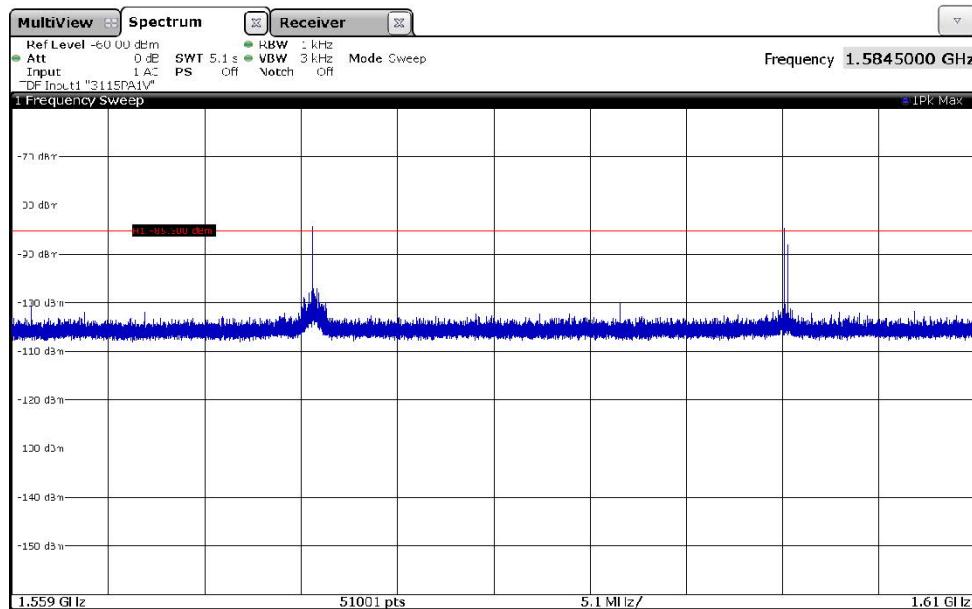


The following frequencies were found:

- 1574.903 MHz, 1575.051 MHz, 1599.901 MHz and 1600.052 MHz.


No final measurement was carried out on these frequencies, because they were not caused by the UWB transmitter, they are caused by the digital part of the EUT and they have to be compared with the 15.209 limits and they will be more than 20 dB below these limits. Please refer to the next plot, which shows the same frequency range with the EUT powered on and no UWB operation.

191161_35_b.png: Spurious emissions from 1.559 GHz to 1.610 GHz (EUT powered on, UWB inactive):

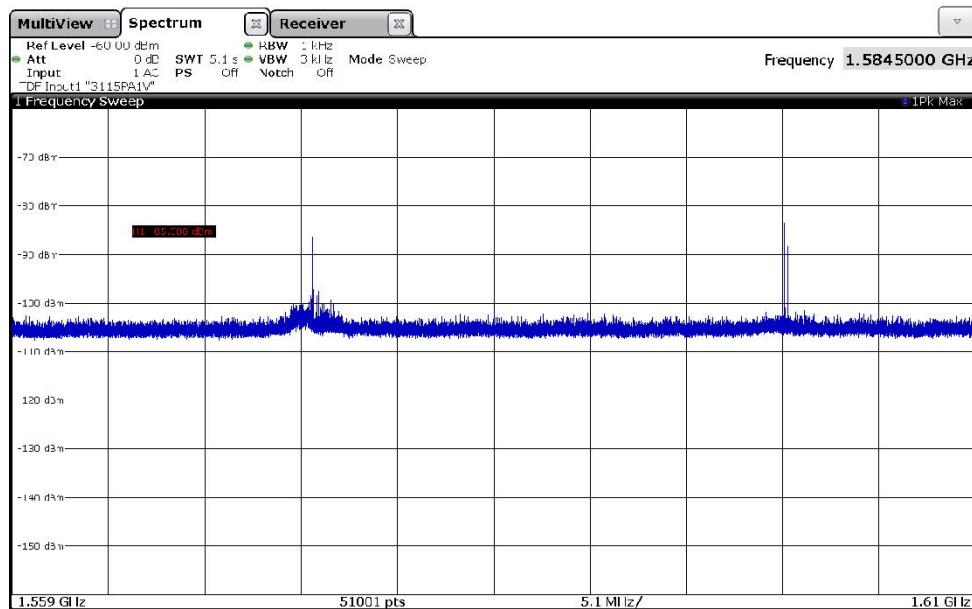


Transmitter operates on channel 1 (operation mode 1):

191161_26.png: Transmitter spurious emissions from 1.99 GHz to 3.1 GHz (operation mode 1):

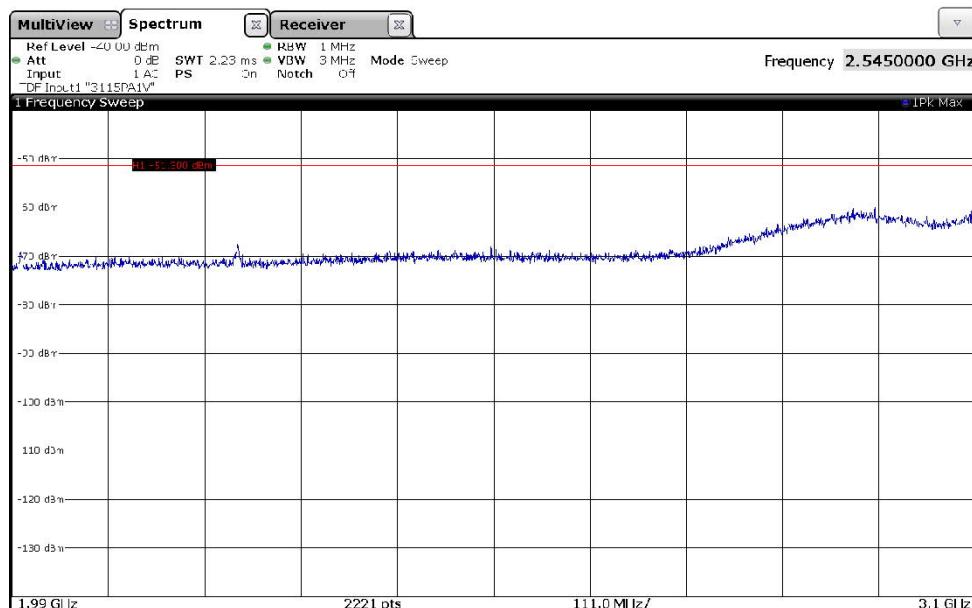

All emissions were below -60.2 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_17.png: Transmitter spurious emissions from 3.1 GHz to 10.6 GHz (operation mode 1):

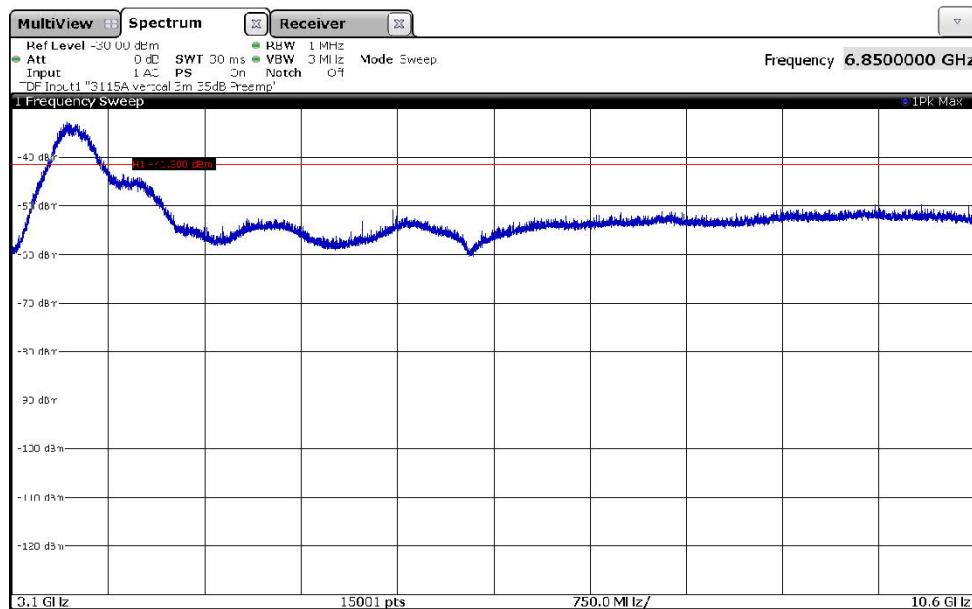


The following frequency was found:

- 3541.270 MHz (wanted signal).


On this frequency a final measurement has to be carried out. The result is presented in the following. All other emissions were below -49.7 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -41.3 dBm.

191161_33.png: Transmitter spurious emissions from 10.6 GHz to 12 GHz (operation mode 1):

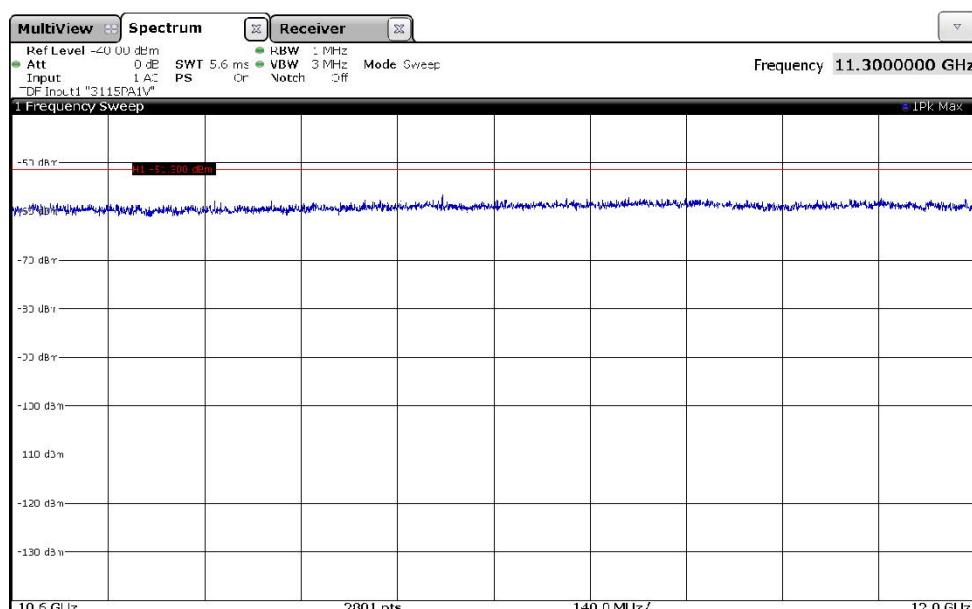


All emissions were below -56.7 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_36.png: Transmitter spurious emissions from 12 GHz to 18 GHz (operation mode 1):

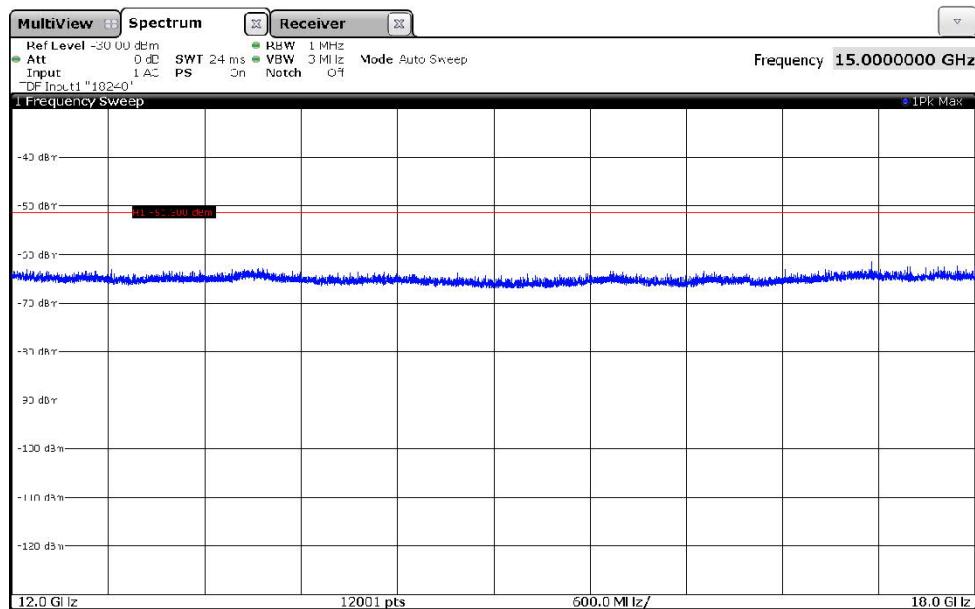


All emissions were below -61.5 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_43.png: Transmitter spurious emissions from 18 GHz to 26.5 GHz (operation mode 1):

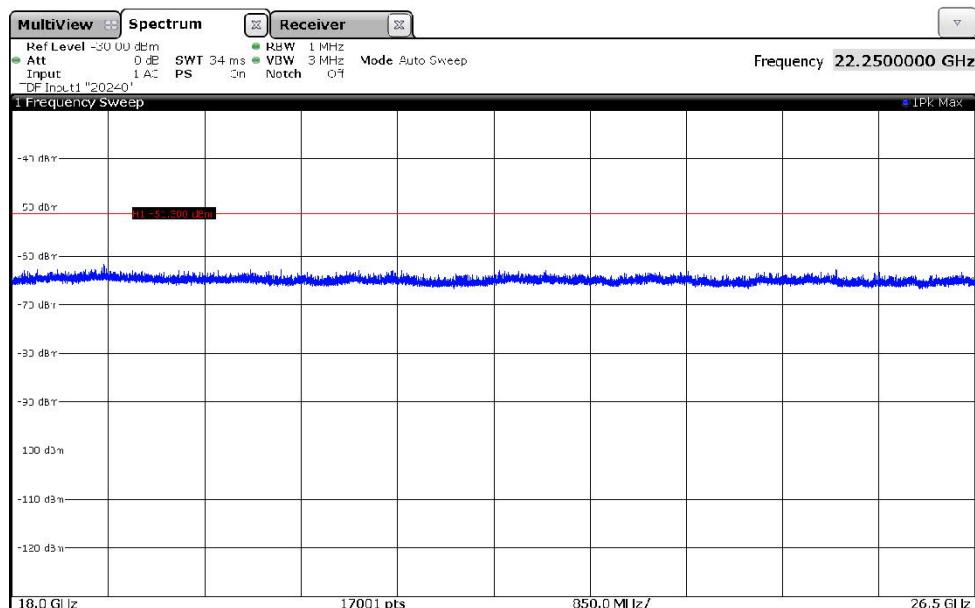

All emissions were below -61.8 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.


191161_44.png: Transmitter spurious emissions from 26.5 GHz to 40 GHz (operation mode 1):

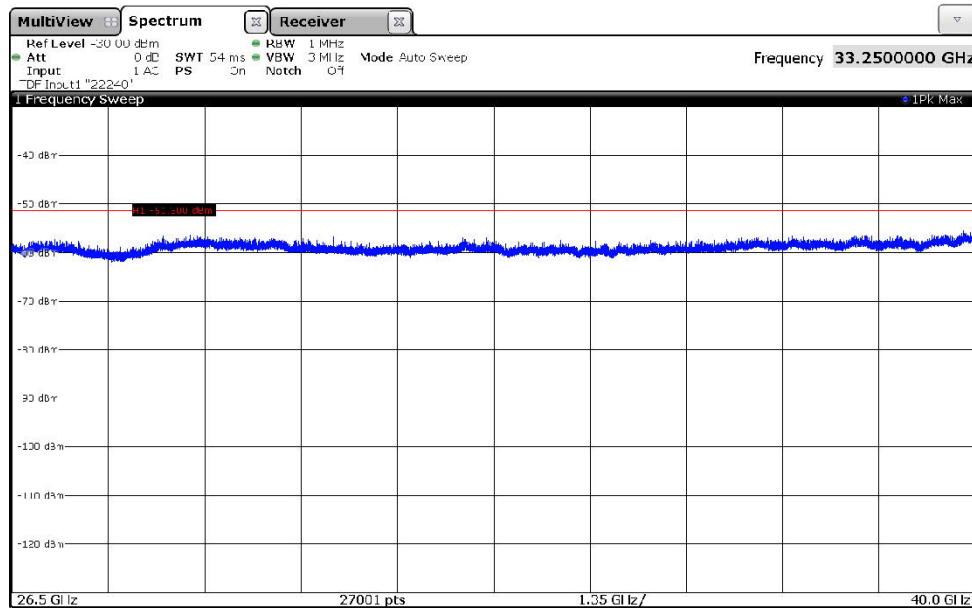

All emissions were below -56.0 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.


Transmitter operates on channel 2 (operation mode 2):

191161_27.png: Transmitter spurious emissions from 1.99 GHz to 3.1 GHz (operation mode 2):

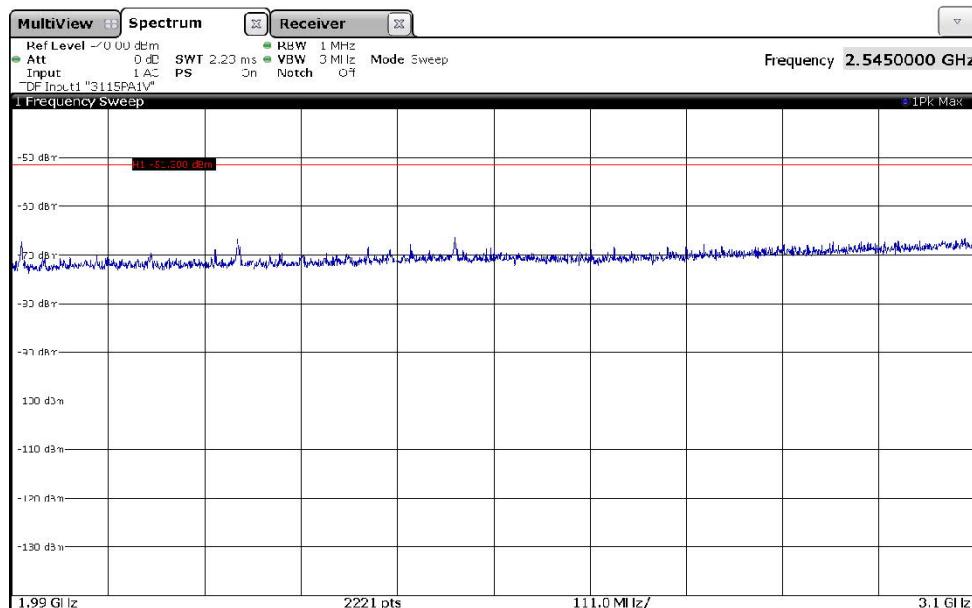

All emissions were below -66.3 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_18.png: Transmitter spurious emissions from 3.1 GHz to 10.6 GHz (operation mode 2):

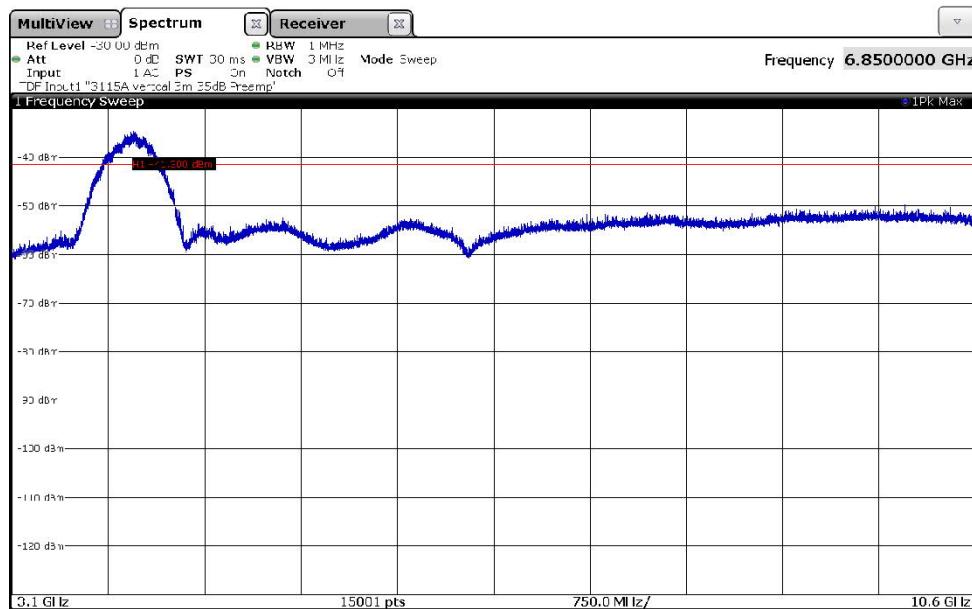


The following frequency was found:

- 4086.970 MHz (wanted signal).


On this frequency a final measurement has to be carried out. The result is presented in the following. All other emissions were below -49.6 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -41.3 dBm.

191161_32.png: Transmitter spurious emissions from 10.6 GHz to 12 GHz (operation mode 2):

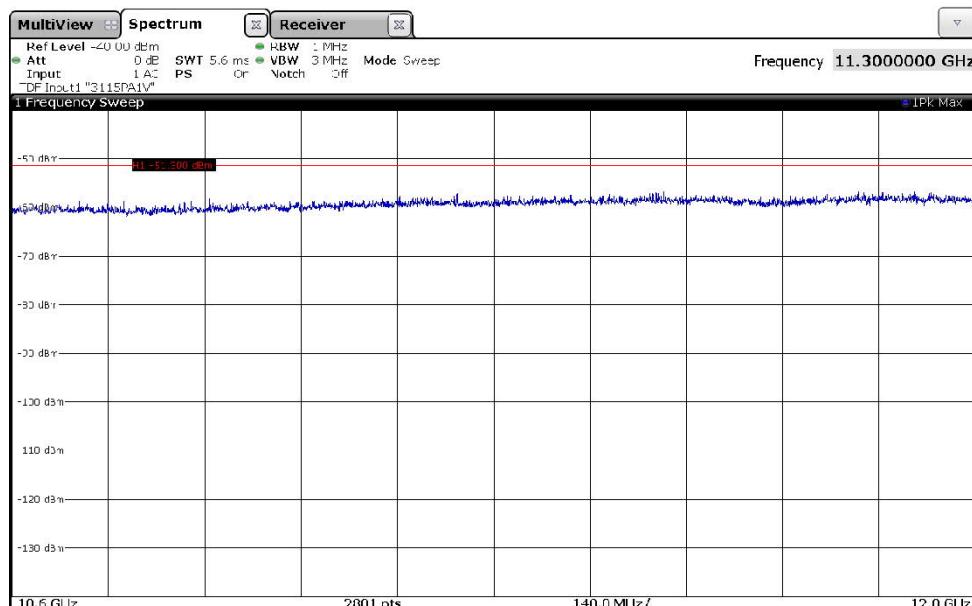


All emissions were below -56.8 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_37.png: Transmitter spurious emissions from 12 GHz to 18 GHz (operation mode 2):

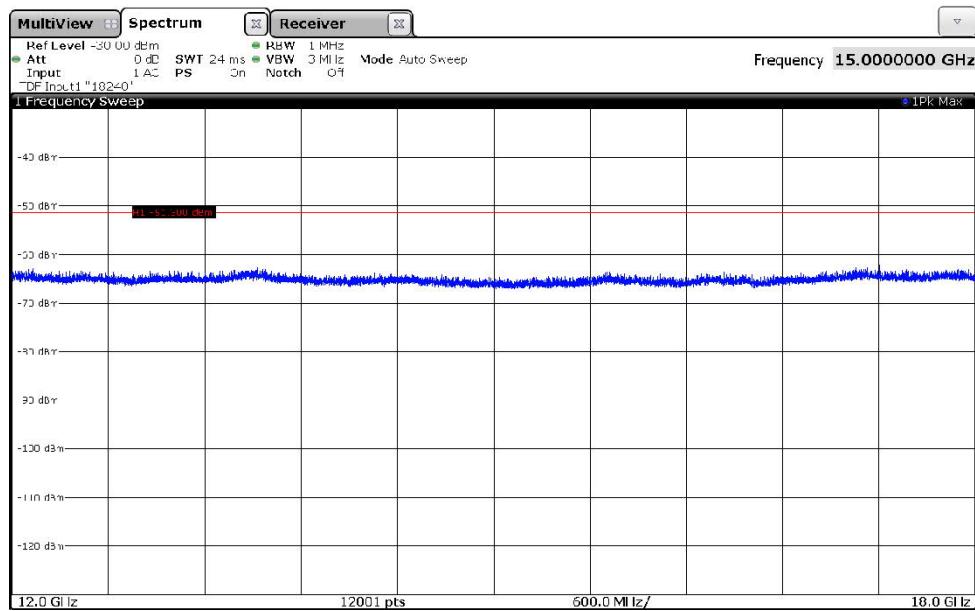


All emissions were below -62.1 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_42.png: Transmitter spurious emissions from 18 GHz to 26.5 GHz (operation mode 2):

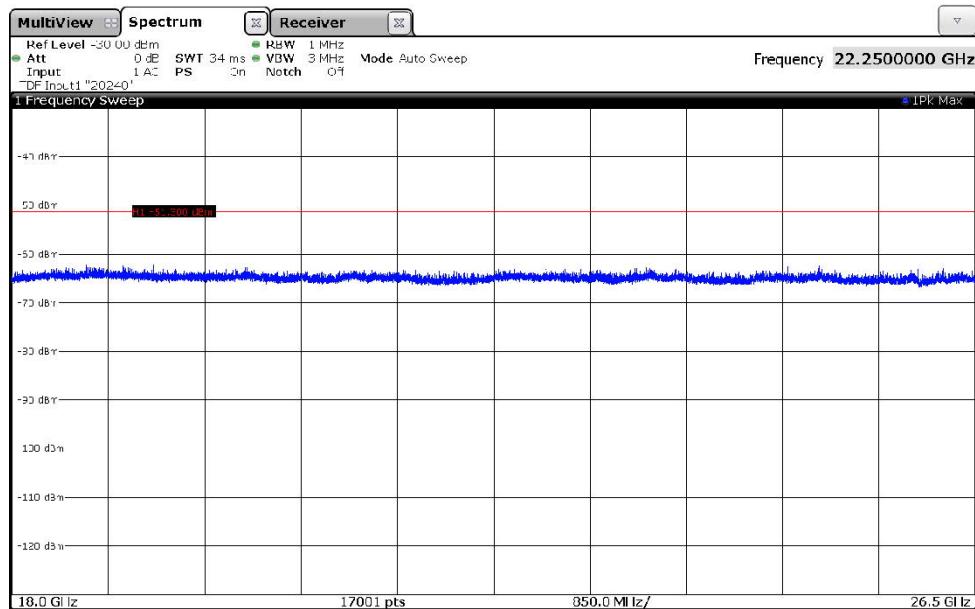

All emissions were below -62.5 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.


191161_45.png: Transmitter spurious emissions from 26.5 GHz to 40 GHz (operation mode 2):

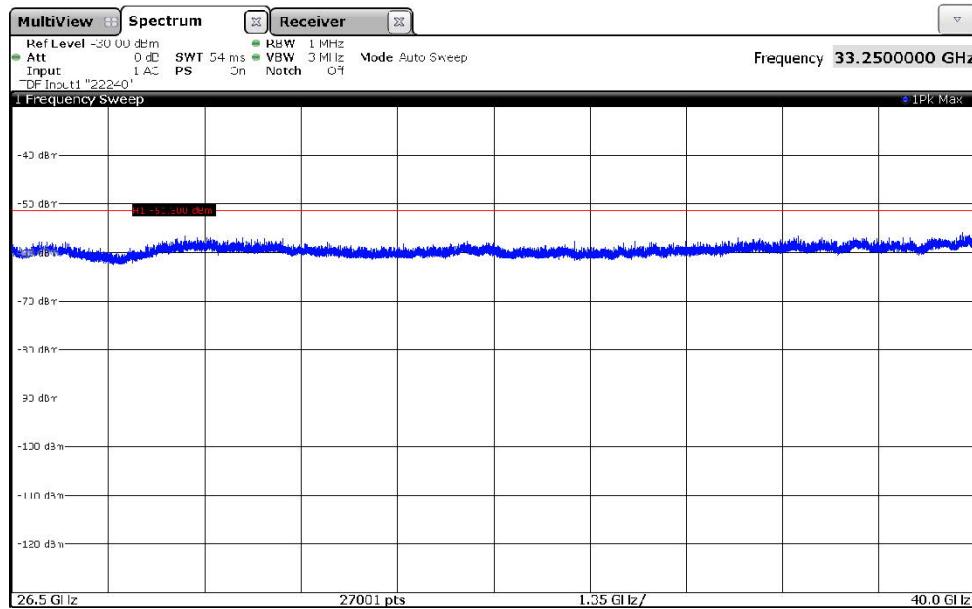

All emissions were below -55.8 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.


Transmitter operates on channel 3 (operation mode 3):

191161_28.png: Transmitter spurious emissions from 1.99 GHz to 3.1 GHz (operation mode 3):

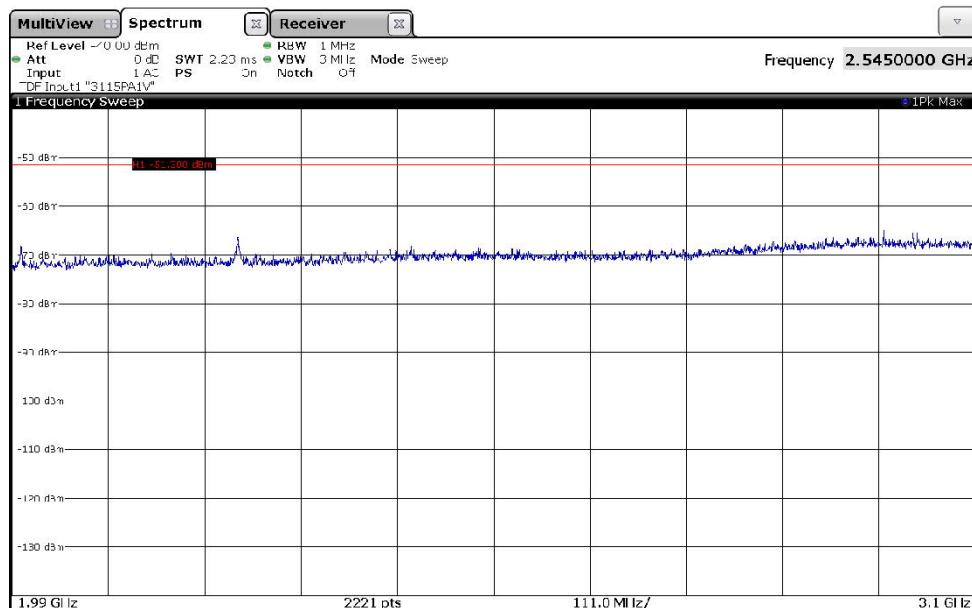

All emissions were below -64.9 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_19.png: Transmitter spurious emissions from 3.1 GHz to 10.6 GHz (operation mode 3):

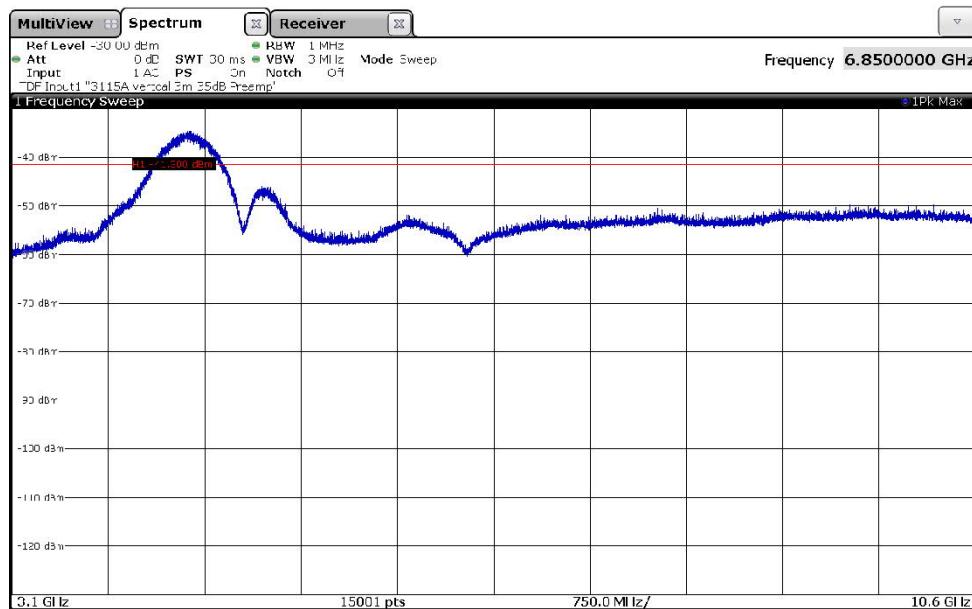


The following frequencies were found:

- 4498.500 MHz (wanted signal), 4762.750 MHz and 5028.130 MHz.


On these frequencies a final measurement has to be carried out. The results are presented in the following. All other emissions were below -49.7 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -41.3 dBm.

191161_31.png: Transmitter spurious emissions from 10.6 GHz to 12 GHz (operation mode 3):

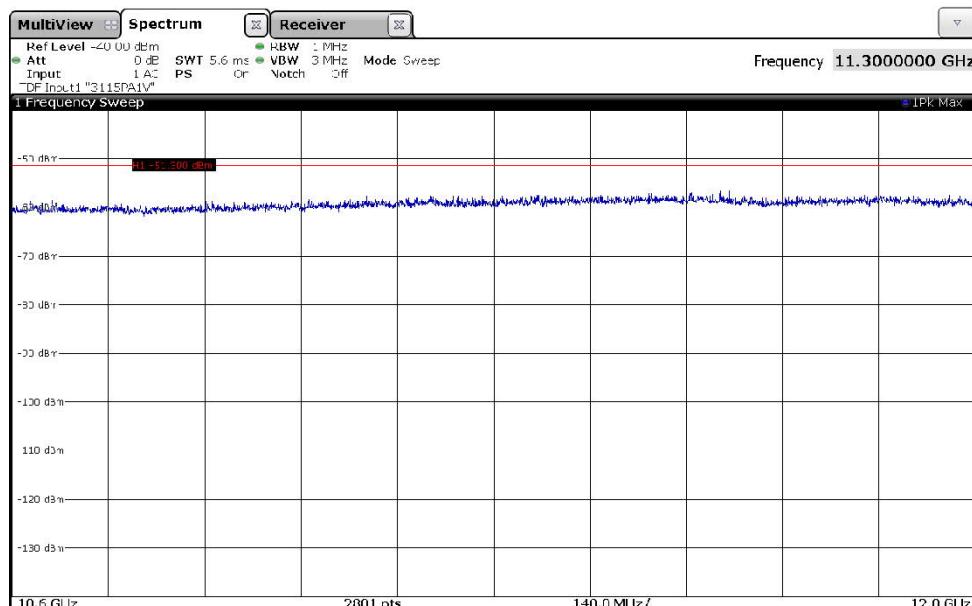


All emissions were below -55.7 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_38.png: Transmitter spurious emissions from 12 GHz to 18 GHz (operation mode 3):

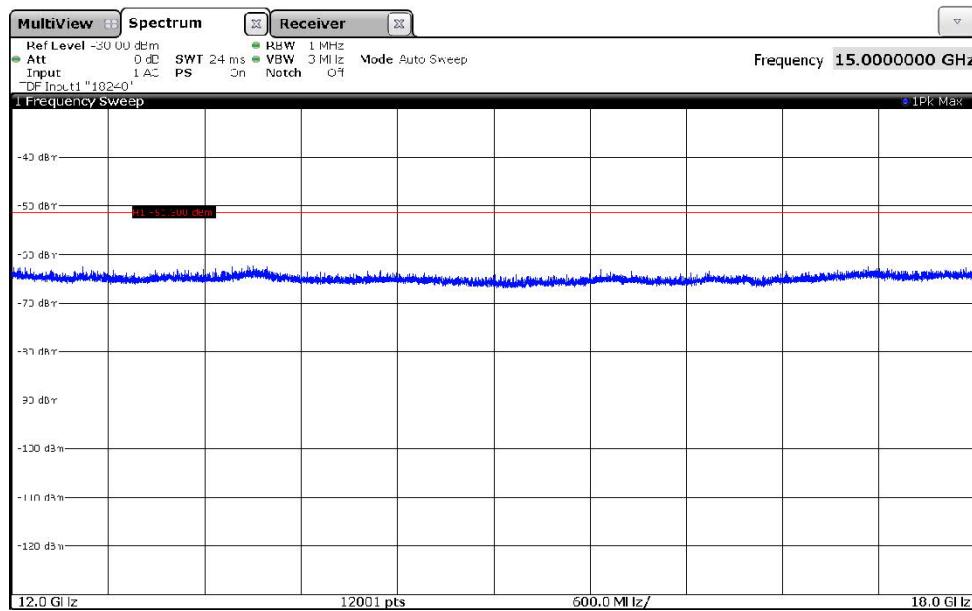


All emissions were below -62.4 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_41.png: Transmitter spurious emissions from 18 GHz to 26.5 GHz (operation mode 3):

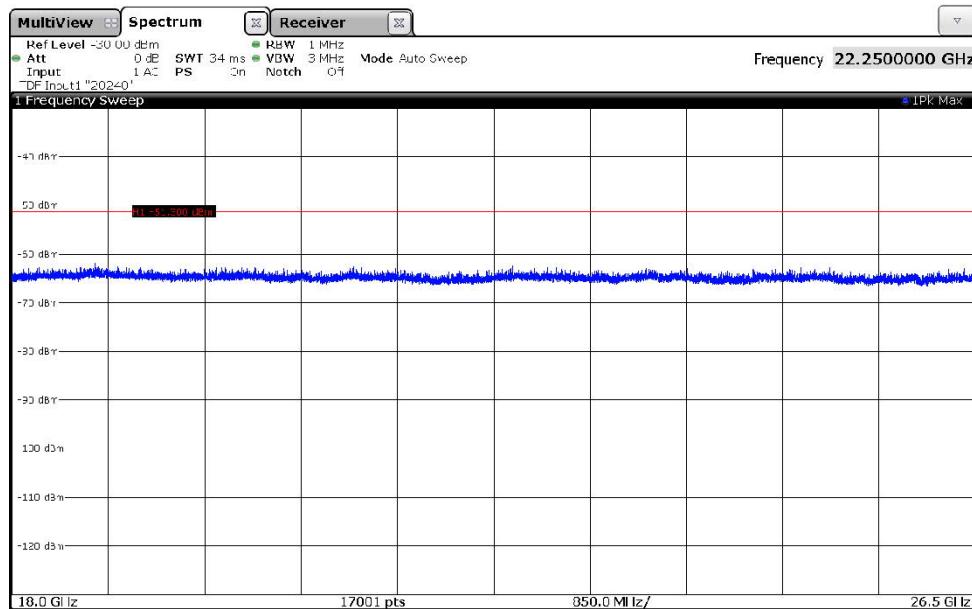

All emissions were below -61.9 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.


191161_46.png: Transmitter spurious emissions from 26.5 GHz to 40 GHz (operation mode 3):

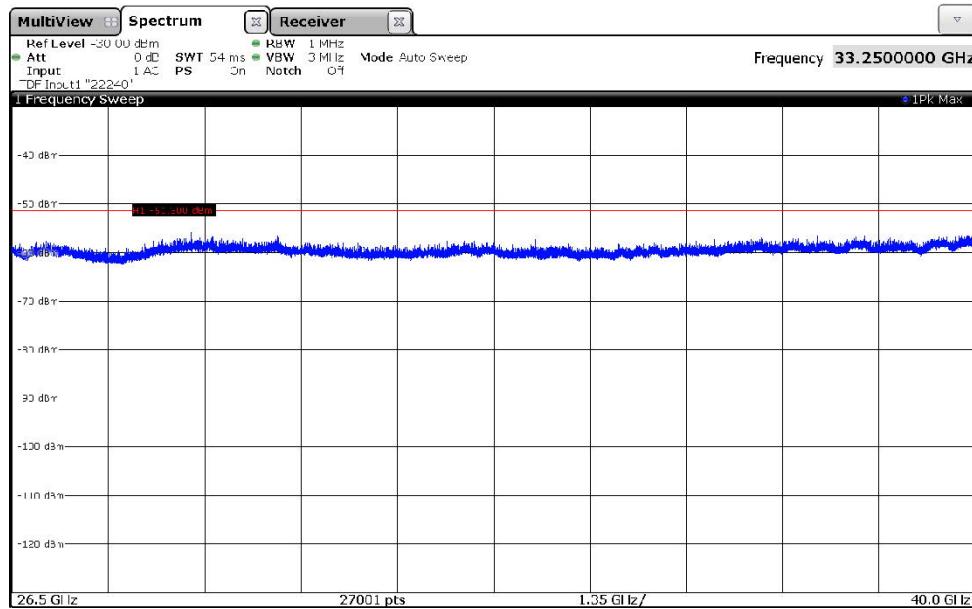

All emissions were below -55.9 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.


Transmitter operates on channel 4 (operation mode 4):

191161_29.png: Transmitter spurious emissions from 1.99 GHz to 3.1 GHz (operation mode 4):

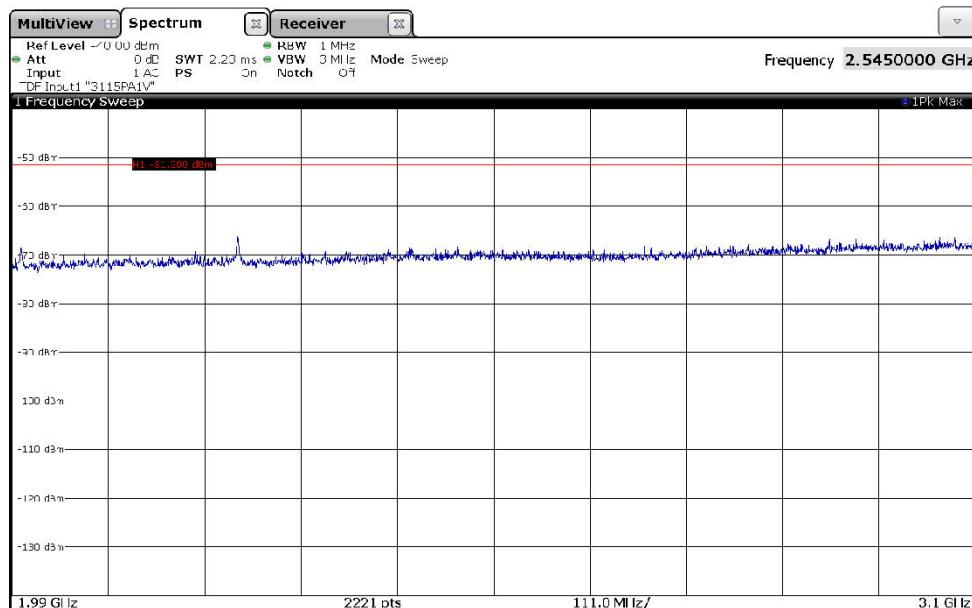

All emissions were below -66.2 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_20.png: Transmitter spurious emissions from 3.1 GHz to 10.6 GHz (operation mode 4):

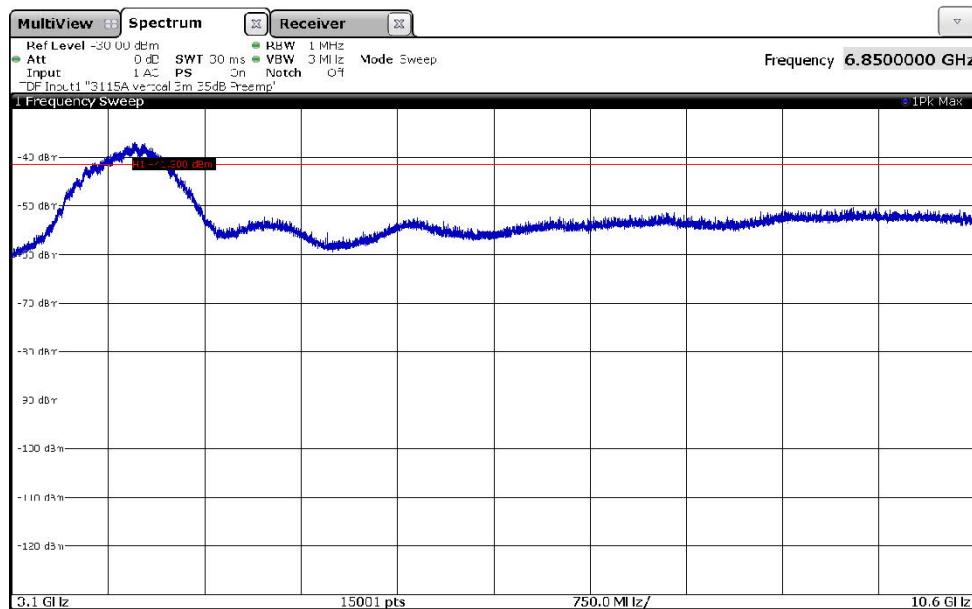


The following frequency was found:

- 4071.480 MHz (wanted signal).


On this frequency a final measurement has to be carried out. The result is presented in the following. All other emissions were below -50.1 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -41.3 dBm.

191161_30.png: Transmitter spurious emissions from 10.6 GHz to 12 GHz (operation mode 4):

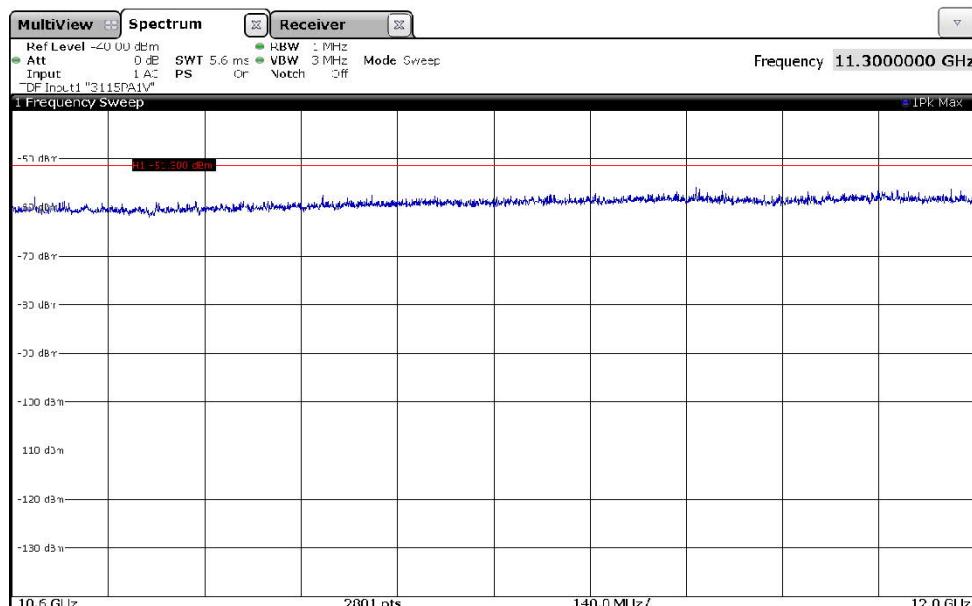


All emissions were below -55.8 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_39.png: Transmitter spurious emissions from 12 GHz to 18 GHz (operation mode 4):

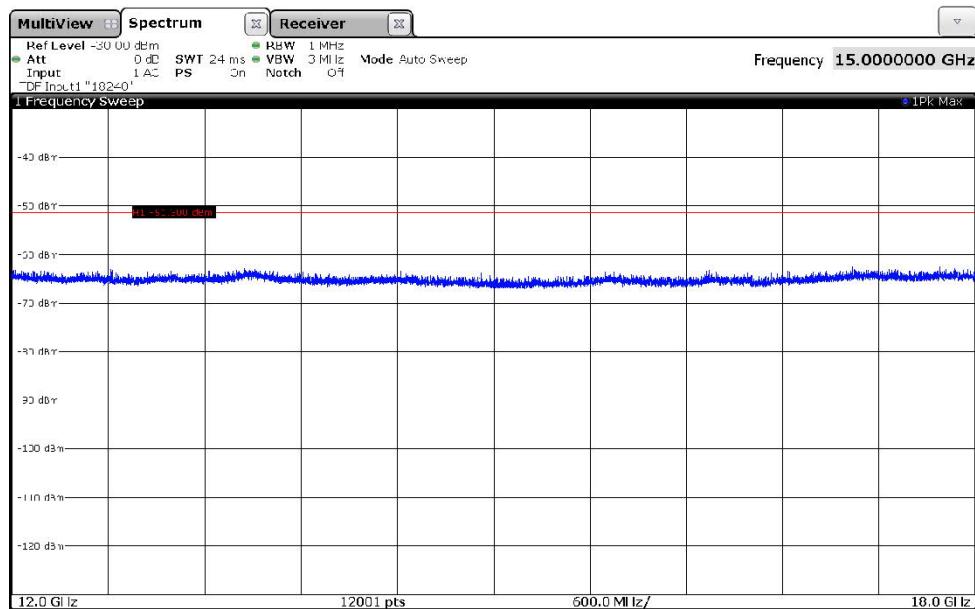


All emissions were below -62.5 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_40.png: Transmitter spurious emissions from 18 GHz to 26.5 GHz (operation mode 4):

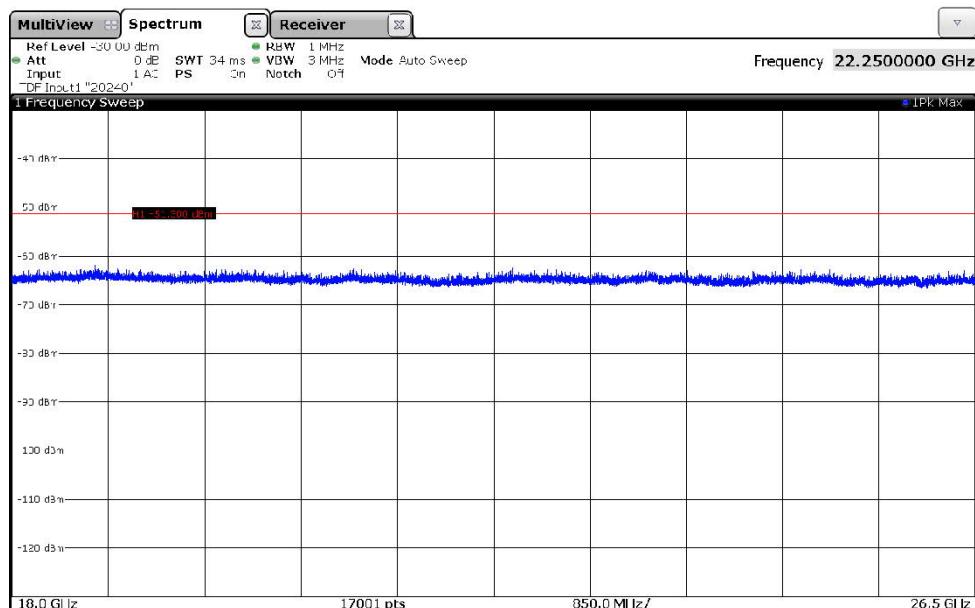

All emissions were below -62.0 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

191161_47.png: Transmitter spurious emissions from 26.5 GHz to 40 GHz (operation mode 4):

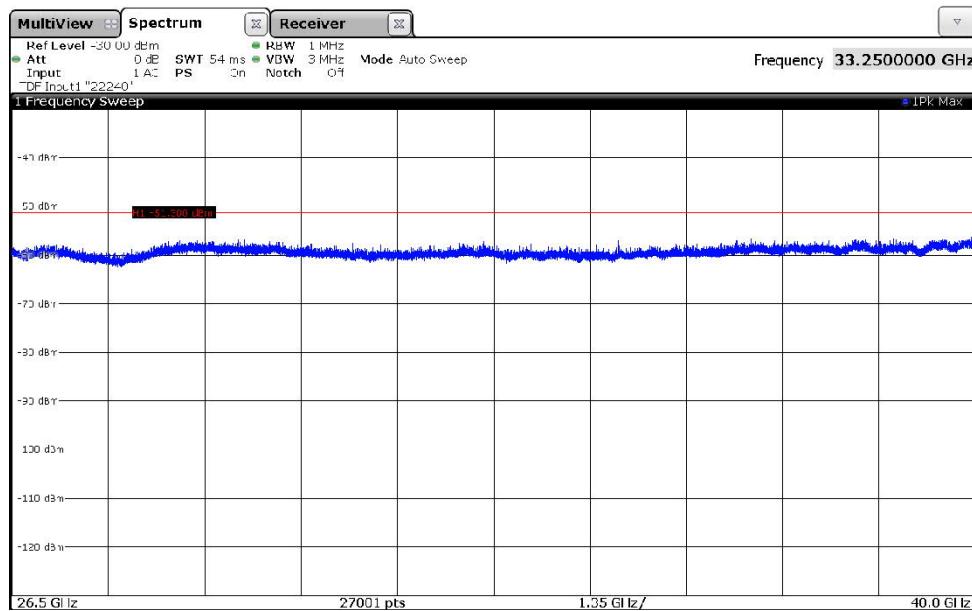

All emissions were below -55.9 dBm (measured with peak detector). This peak value is already below the rms AV-limit of -51.3 dBm. Therefore, no final measurement was carried out in this frequency range.

Test equipment used (refer clause 6):

1 – 31, 38

5.3.2.2 Final radiated emission measurement (30 MHz to 1 GHz)

Ambient temperature	22 °C	Relative humidity	31 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a turn device of a height of 1.5 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During this test the EUT was powered with 48 V_{DC} by the power injector PowerSine 3001, which was itself supplied with 120 V_{AC} / 60 Hz.

Test results: The test results from above 960 MHz and below 1 GHz were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{correction [dB]} \text{ (cable loss antenna factor)} + 6 \text{ dB (used attenuator)} - 95.2 \text{ dB (according to 15.503 (k) [2])}$$

The measurement time with the final detector is 1 second.

Result measured with the quasi-peak detector below 960 MHz:

Frequency [MHz]	Result [dB] μ V/m]	Limit [dB] μ V/m]	Margin [dB]	Readings [dB] μ V]	Correction [dB]	Height [cm]	Azimuth [deg]	Restr. Band	Pol.
39.260	28.6	40.0	11.4	2.3	20.3	100	287	No	Vert.
50.430	30.9	40.0	9.1	11.5	13.4	105	98	No	Vert.
68.480	28.4	40.0	11.6	8.3	14.1	134	166	No	Vert.
90.350	20.8	43.5	22.7	-1.8	16.6	127	279	No	Vert.
124.990	26.0	43.5	17.5	2.7	17.3	109	124	Yes	Vert.
275.020	28.0	46.0	18.0	3.5	18.5	103	95	Yes	Hor.
300.050	29.2	46.0	16.8	3.9	19.3	110	113	No	Hor.
400.010	26.5	46.0	19.5	-1.6	22.1	184	25	Yes	Vert.
500.000	31.4	46.0	14.6	0.8	24.6	119	322	No	Vert.
Measurement uncertainty					$\pm 5.5 \text{ dB}$				

Result measured with the RMS detector above 960 MHz and below 1 GHz:

Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Readings [dB] μ V	Correction [dB]	Conversion from dB μ V/m to dBm	Height [cm]	Azimuth [deg]	Pol.
974.860 *	-79.7	-75.3	4.4	-21.3	30.8	95.2	183	13	Hor.
Measurement uncertainty					$\pm 5.5 \text{ dB}$				

*: Highest peak (noise floor of the measuring system) with in the frequency range 960 MHz to 1 GHz.

Test: Passed

Test equipment used (refer clause 6):

1 – 10, 38

5.3.2.3 Final radiated emission measurement (1 GHz to 40 GHz)

Ambient temperature	22 °C	Relative humidity	36 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a turn device of a height of 1.5 m. The distance between EUT and antenna was 3 m (3.1 GHz to 10.6 GHz), 1 m (1 GHz to 3.1 GHz and 10.6 to 40 GHz).

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During this test the EUT was powered with 48 V_{DC} by the power injector PowerSine 3001, which was itself supplied with 120 V_{AC} / 60 Hz.

Transmit on channel 1							
Frequency [MHz]	RMS average [dBm]	Limit [dBm]	Margin [dB]	Bandwidth * [kHz]	Pol.	Azimuth [deg]	Elevation [deg]
3541.270	-41.9	-41.3	0.6	1000	Vert.	6	17
Transmit on channel 2							
Frequency [MHz]	RMS average [dBm]	Limit [dBm]	Margin [dB]	Bandwidth * [kHz]	Pol.	Azimuth [deg]	Elevation [deg]
4086.970	-41.9	-41.3	0.6	1000	Vert.	6	15
Transmit on channel 3							
Frequency [MHz]	RMS average [dBm]	Limit [dBm]	Margin [dB]	Bandwidth * [kHz]	Pol.	Azimuth [deg]	Elevation [deg]
4498.500	-42.0	-41.3	0.7	1000	Vert.	6	20
4762.750	-49.6	-41.3	8.6	1000	Vert.	6	20
5028.130	-54.1	-41.3	12.8	1000	Vert.	6	20
Transmit on channel 4							
Frequency [MHz]	RMS average [dBm]	Limit [dBm]	Margin [dB]	Bandwidth * [kHz]	Pol.	Azimuth [deg]	Elevation [deg]
4071.480	-43.9	-41.3	2.6	1000	Vert.	6	20
Measurement uncertainty				±4.7 dB			

*: The measuring receiver bandwidth

Test: Passed

Test equipment used (refer clause 6):

11 – 19, 26

5.4 Conducted emissions on power supply lines (150 kHz to 30 MHz)


5.4.1 Method of measurement

This test will be carried out in a shielded chamber. Tabletop devices will be set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The setup of the Equipment under test will be in accordance to [1].


The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the applicable limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

Test setup for measurement with the EUT supplied via PoE:

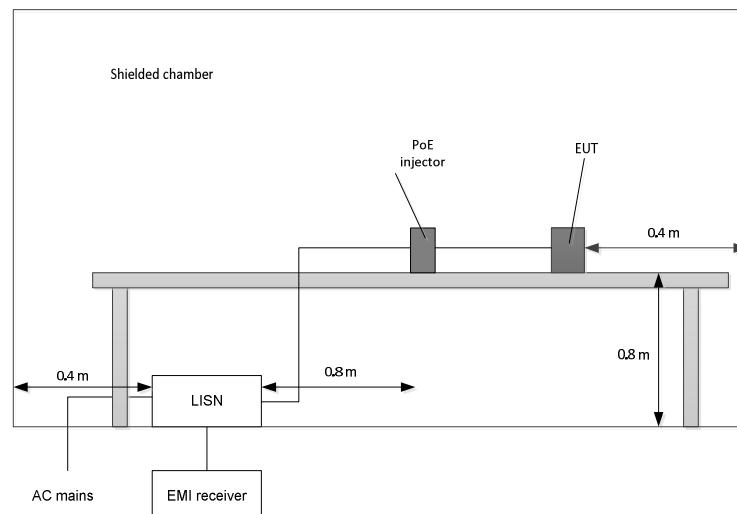

Test setup for measurement with the EUT supplied via USB:

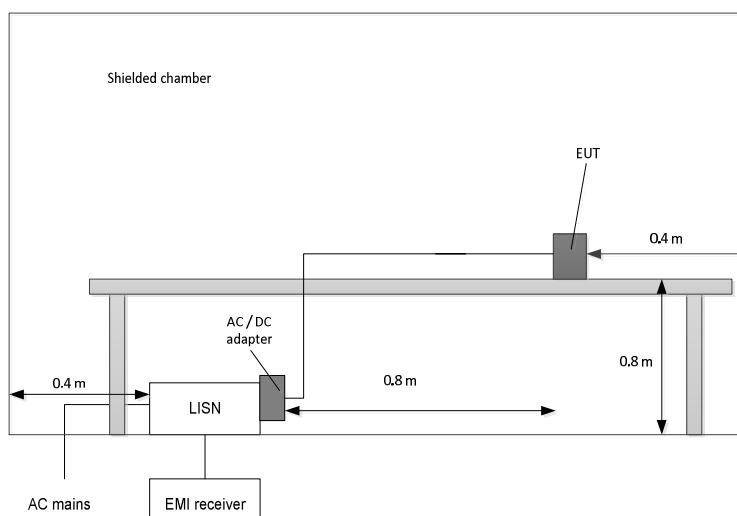

5.4.2 Test results (conducted emissions on power supply lines)

5.4.2.1 Test results with EUT supplied via PoE

Ambient temperature	22 °C	Relative humidity	46 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During this test the EUT was powered with 48 V_{DC} by the power injector PowerSine 3001, which was itself supplied with 120 V_{AC} / 60 Hz.

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by  the average measured points with .

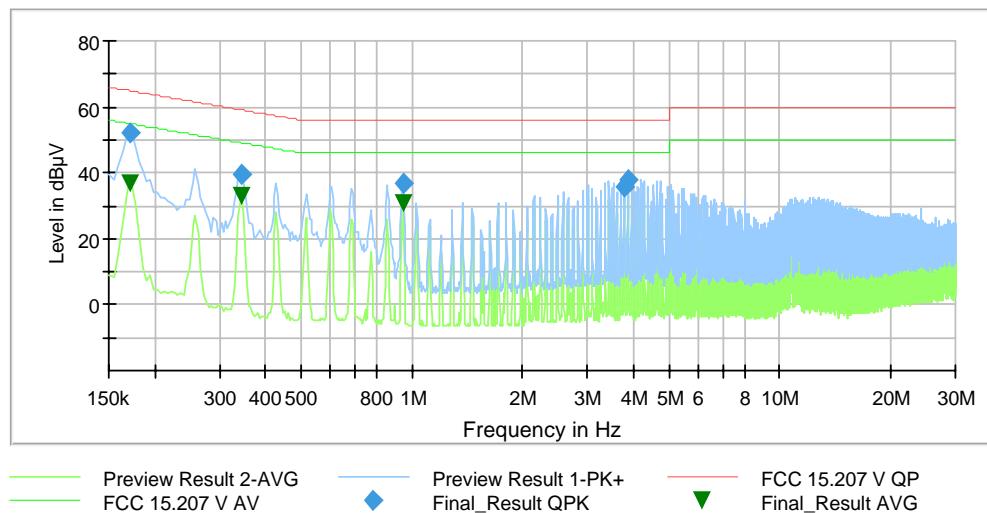

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	PE	Corr. [dB]
0.172500	---	52.0	64.8	12.8	5000	9	N	GND	9.8
0.172500	37.0	---	54.8	17.8	5000	9	L1	FLO	9.8
0.344400	32.7	---	49.1	16.4	5000	9	N	FLO	9.9
0.344400	---	39.7	59.1	19.4	5000	9	L1	GND	9.9
0.946500	---	36.9	56.0	19.1	5000	9	N	FLO	9.9
0.949200	30.9	---	46.0	15.1	5000	9	N	FLO	9.9
3.789600	---	35.7	56.0	20.3	5000	9	N	GND	10.3
3.877800	---	37.9	56.0	18.1	5000	9	N	GND	10.3
Measurement uncertainty		±2.8 dB							

Test: Passed

Test equipment used (refer clause 6):

32 - 37

5.4.2.2 Test results with EUT supplied via USB

Ambient temperature	22 °C	Relative humidity	46 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During this test the EUT was powered with 5.0 V_{DC} by the Samsung travel adapter EP-TA20EBE, which was itself supplied with 120 V_{AC} / 60 Hz.

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by  the average measured points with .

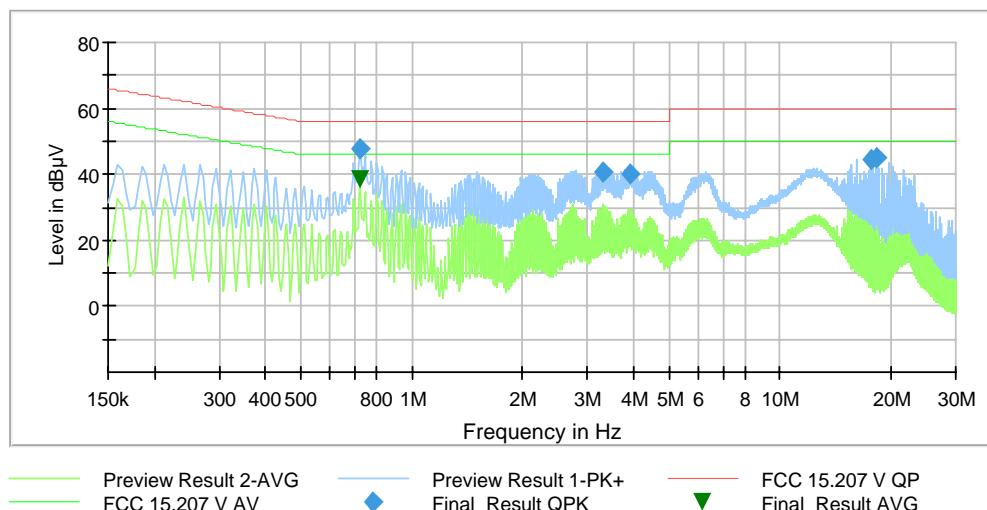

Frequency [MHz]	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	PE	Corr. [dB]
0.721500	---	38.4	46.0	7.6	5000	9	L1	FLO	9.9
0.721500	47.7	---	56.0	8.3	5000	9	L1	FLO	9.9
3.291000	40.4	---	56.0	15.6	5000	9	L1	FLO	10.2
3.905700	40.0	---	56.0	16.0	5000	9	L1	GND	10.3
17.692800	44.6	---	60.0	15.4	5000	9	L1	FLO	10.9
18.241800	45.3	---	60.0	14.7	5000	9	L1	FLO	10.9
Measurement uncertainty				± 2.8 dB					

Test: Passed

Test equipment used (refer clause 6):

32 - 37

6 Test equipment and ancillaries used for tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
1	Semi anechoic chamber M276	SAC5-2	Albatross Projects	C62128-A540-A138-10-0006	483227	Calibration not necessary	
2	RF Switch Matrix	OSP220	Rohde & Schwarz		482976	Calibration not necessary	
3	Turntable	TT3.0-3t	Maturo	825/2612/01	483224	Calibration not necessary	
4	Controller	NCD	Maturo	474/2612.01	483226	Calibration not necessary	
5	Positioner	TG1.5-10kg	Maturo	110/2648.01	483042	Calibration not necessary	
6	Antenna support	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
7	System software EMC32 M276	EMC32	Rohde & Schwarz	100970	482972	Calibration not necessary	
8	Ultralog Antenna	HL562E	Rohde & Schwarz	101079	482978	07.08.2019	08.2022
9	EMI Test receiver ESW	ESW44	Rohde & Schwarz	101828	482979	12.04.2019	04.2021
10	Cable C417	Sucoflex 118	Huber+Suhner	500654/118	-	Calibration not necessary	
11	Fully anechoic chamber M20	B83117-E2439-T232	Albatross Projects	103	480303	Calibration not necessary	
12	EMI Receiver / Spectrum Analyser	FSW43	Rohde & Schwarz	100586 & 100926	481720	04.03.2020	03.2022
13	Antenna (Horn)	3115	EMCO	9609-4918	480183	05.02.2018	02.2021
14	Antenna (Horn)	3115	EMCO	6761	480368	06.02.2020	02.2023
15	Antenna support	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
16	Swept CW generator	83650L	Agilent	3844A00554	480333	18.02.2020	02.2021
17	RF-cable No.3	Sucoflex 106B	Suhner	0563/6B	480670	Calibration not necessary	
18	RF-cable No.36	Sucoflex 106B	Suhner	0587/6B	480865	Calibration not necessary	
19	RF-cable 40	Sucoflex 106B	Suhner	0708/6B	481330	Calibration not necessary	
20	Standard gain horn antenna	14240-20	Flann	209388	481596	Calibration not necessary	
21	Standard gain horn antenna	16240-20	Flann	135671	480513	Calibration not necessary	
22	Standard gain horn antenna	18240-20	Flann	483	480294	Calibration not necessary	
23	Standard gain horn antenna	18240-20	Flann	482	480295	Calibration not necessary	
24	Standard gain horn antenna	20240-20	Flann	411	480297	Calibration not necessary	
25	Standard gain horn antenna	22240-20	Flann	469	480299	Calibration not necessary	
26	Preamplifier 100 MHz – 16 GHz	AFS6-00101600-23-10P-6-R	MITEQ	2011215	482333	13.02.2020	02.2022
27	Preamplifier 12 GHz - 18 GHz	JS3-12001800-16-5A	MITEQ	571667	480343	13.02.2020	02.2022
28	Preamplifier 18 GHz - 26 GHz	JS4-18002600-20-5A	MITEQ	658697	480342	13.02.2020	02.2022
29	Preamplifier 26 GHz - 40 GHz	JDM2-26004000-25-10P	MITEQ	128746	482806	17.02.2020	02.2022

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
30	RF-cable 1 m	KPS-1533-400-KPS	Insulated Wire	-	480300	Calibration not necessary	
31	RF-cable 2m	KPS-1533-800-KPS	Insulated Wire	-	480302	Calibration not necessary	
32	Shielded chamber M4	-	Siemens	B83117-S1-X158	480088	Calibration not necessary	
33	EMI Receiver	ESIB 26	Rohde & Schwarz	1088.7490	481182	12.02.2020	02.2022
34	LISN	NSLK8128	Schwarzbeck	8128161	480138	11.02.2020	02.2022
35	Transient Limiter	CFL 9206A	Teseq	38268	481982	Calibration not necessary	
36	Software	EMC32	Rohde & Schwarz	100061	481022	Calibration not necessary	
37	AC source	AC6803A	Keysight	JPVJ002509	482350	Calibration not necessary	
38	Attenuator 6 dB	WA2-6	Weinschel	-	482794	Calibration not necessary	

7 Test site Validation

Test equipment	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Semi anechoic chamber M276	483227	30 – 1000 MHz	NSA	ANSI C63.4-2014	19.09.2019	18.09.2021
Fully anechoic chamber M20	480303	1 -18 GHz	SVSWR	CISPR 16-1-4 Amd. 1	13.07.2018	12.07.2021
Shielded chamber M4	480088	9 kHz – 30 MHz	GND-Plane	ANSI C63.4-2014	06.11.2018	05.11.2020

8 Report history

Report Number	Date	Comment
F191161E2	.2020	Document created

9 List of annexes

Annex A

Test setup photos

8 pages