



Duty Cycle NVNT ac20 5785MHz Ant1

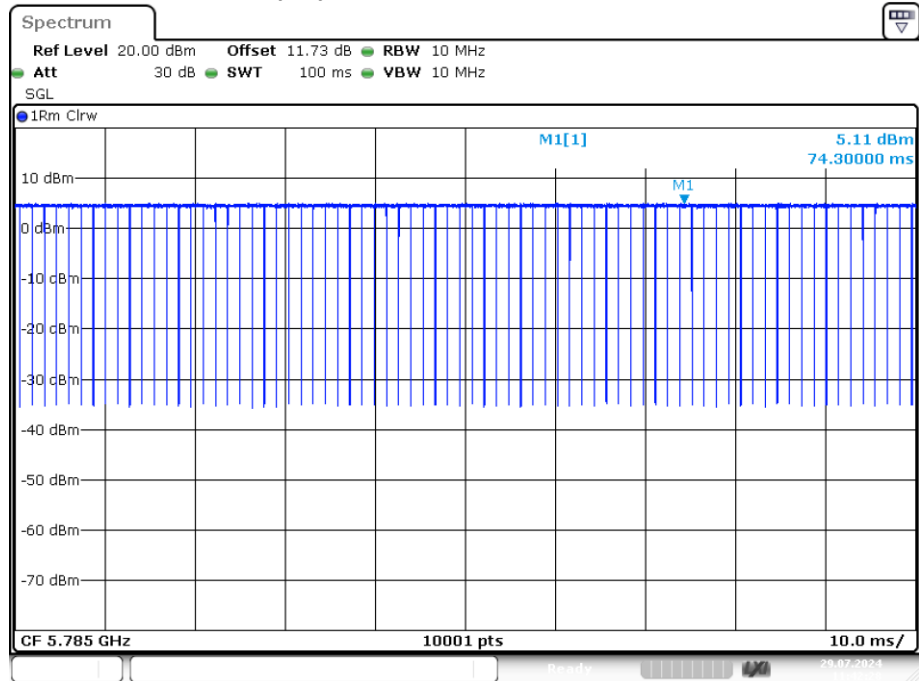


Date: 29.JUL.2024 11:42:28

Duty Cycle NVNT ac20 5825MHz Ant1

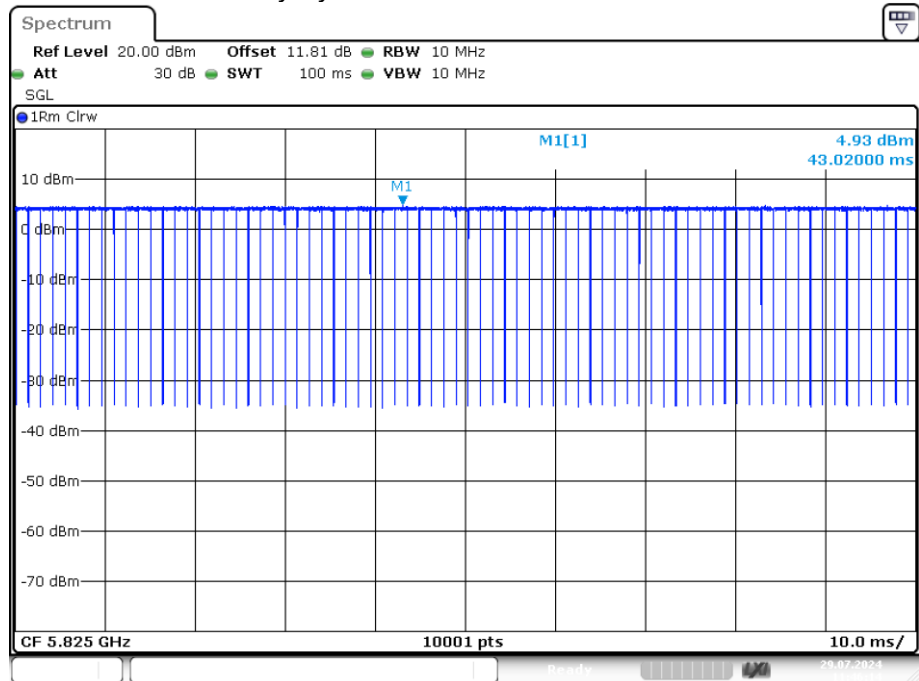


Date: 29.JUL.2024 11:46:14

Duty Cycle NVNT ac40 5755MHz Ant1

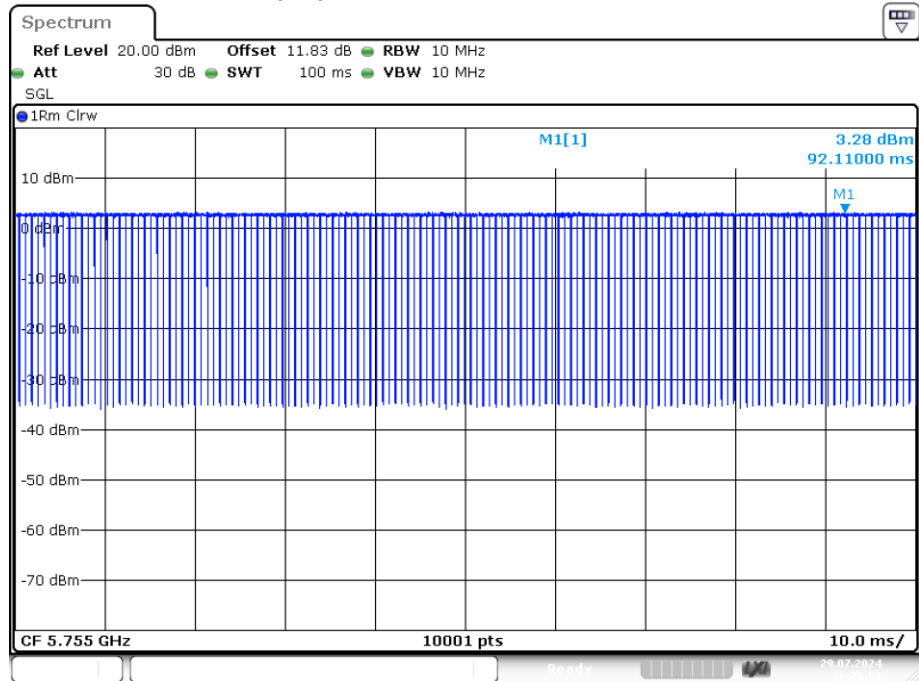


Date: 29.JUL.2024 12:25:51

Duty Cycle NVNT ac40 5795MHz Ant1

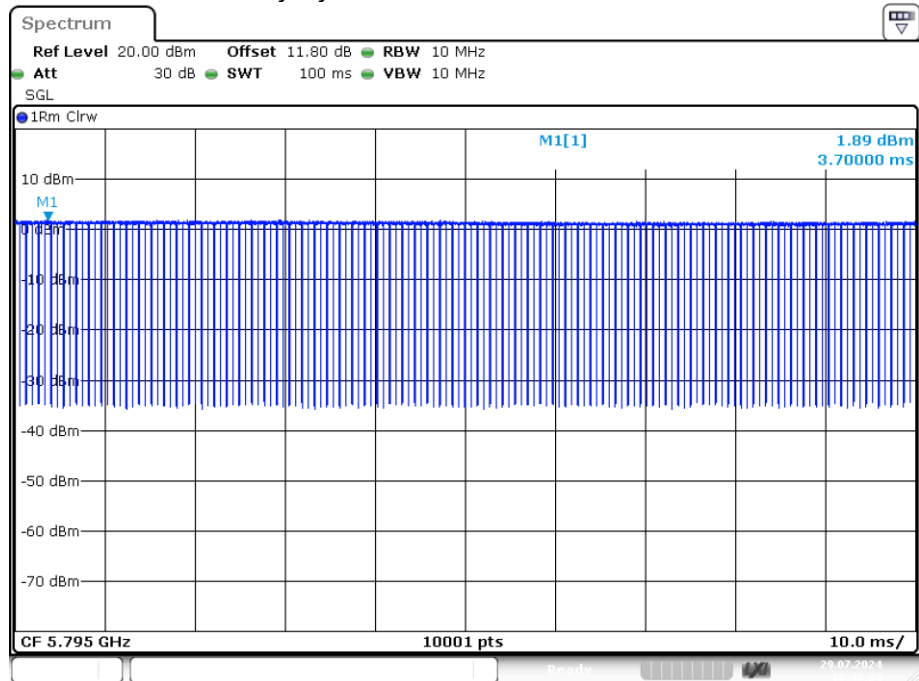


Date: 29.JUL.2024 12:48:25

Duty Cycle NVNT ac80 5775MHz Ant1

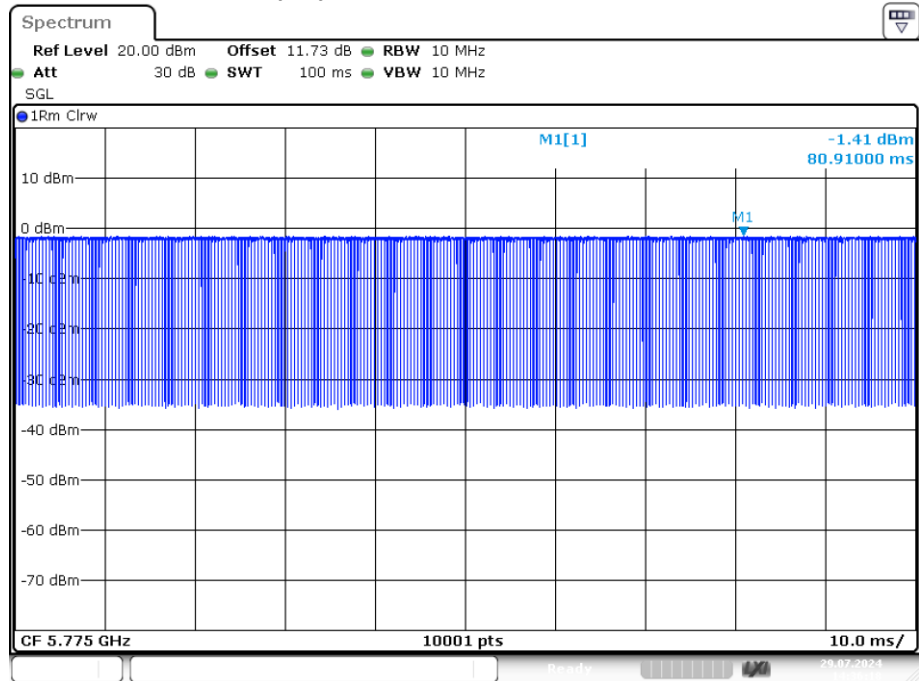


Date: 29.JUL.2024 14:36:18

Duty Cycle NVNT n20 5745MHz Ant1

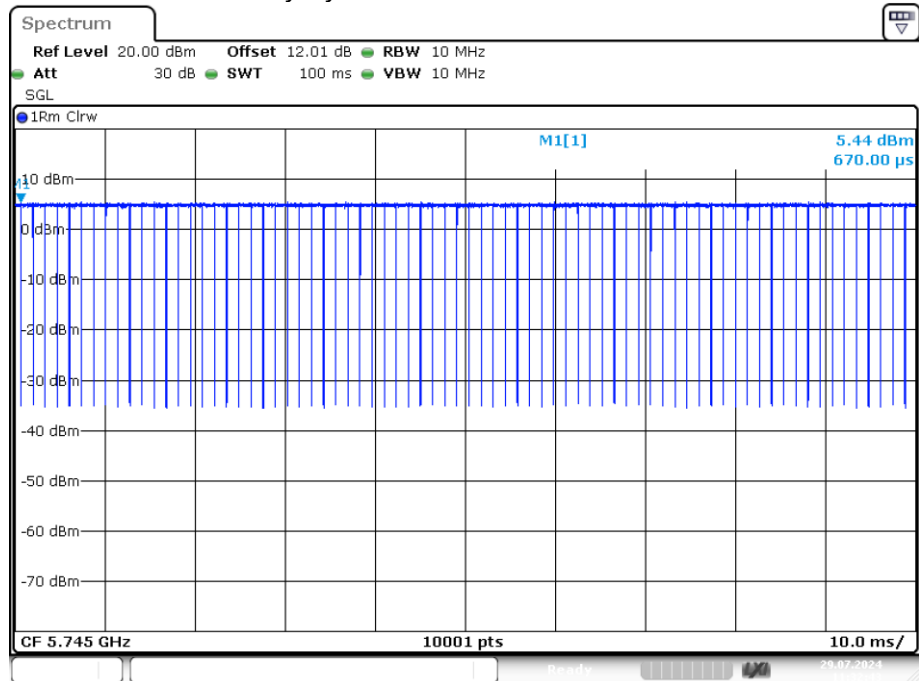


Date: 29.JUL.2024 11:32:42

Duty Cycle NVNT n20 5785MHz Ant1

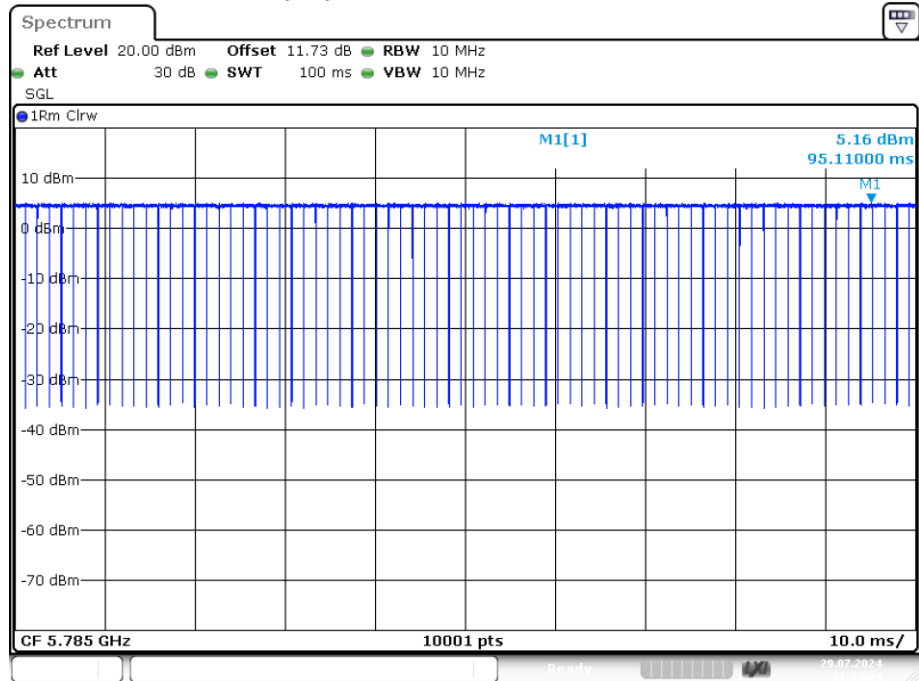


Date: 29.JUL.2024 11:34:44

Duty Cycle NVNT n20 5825MHz Ant1

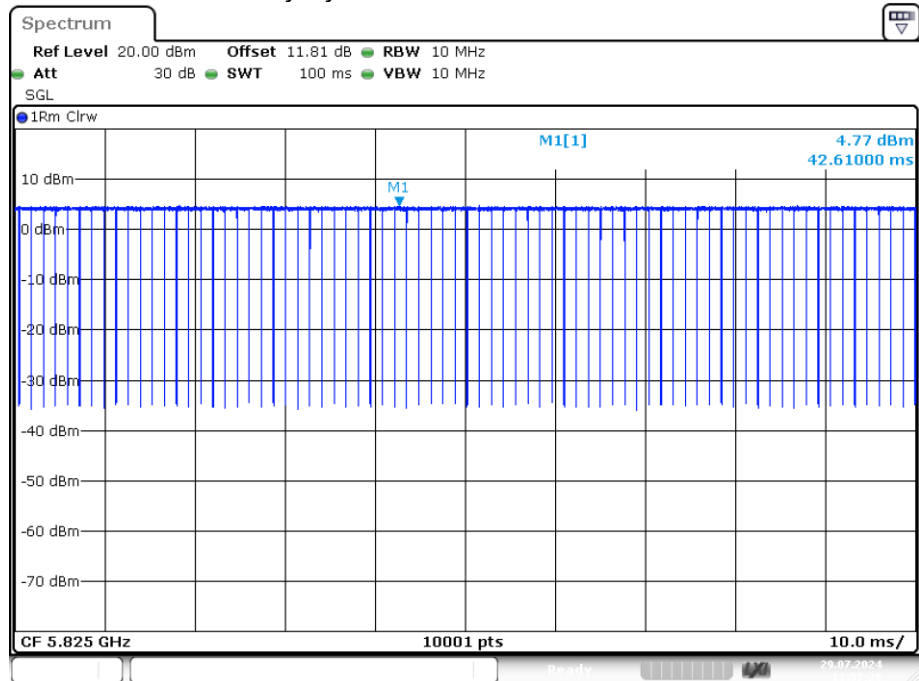


Date: 29.JUL.2024 11:37:28

Duty Cycle NVNT n40 5755MHz Ant1

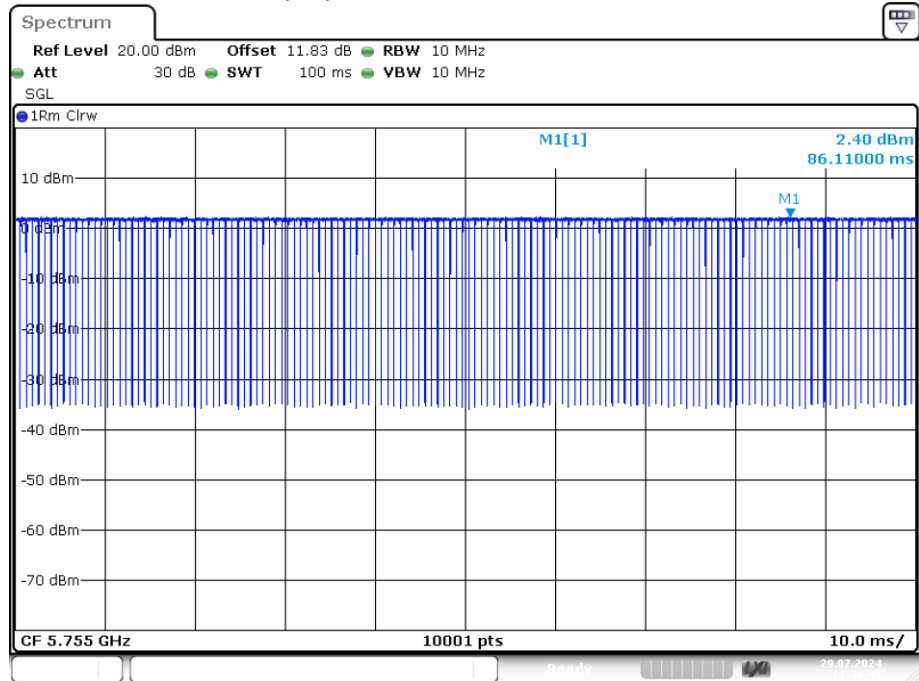


Date: 29.JUL.2024 11:49:56

Duty Cycle NVNT n40 5795MHz Ant1

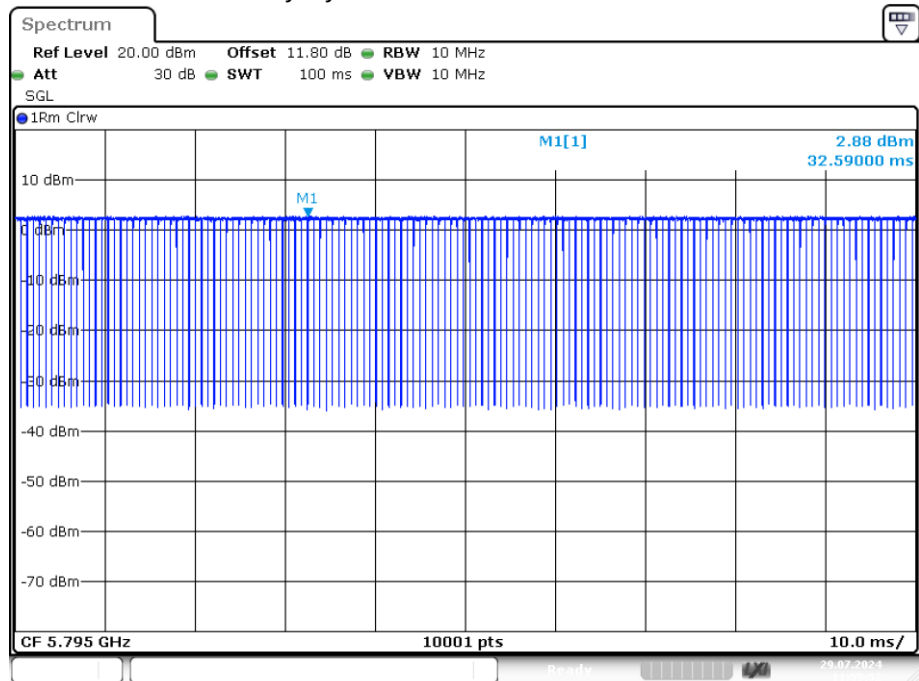

Date: 29.JUL.2024 11:55:51

4.5 Power Spectral Density

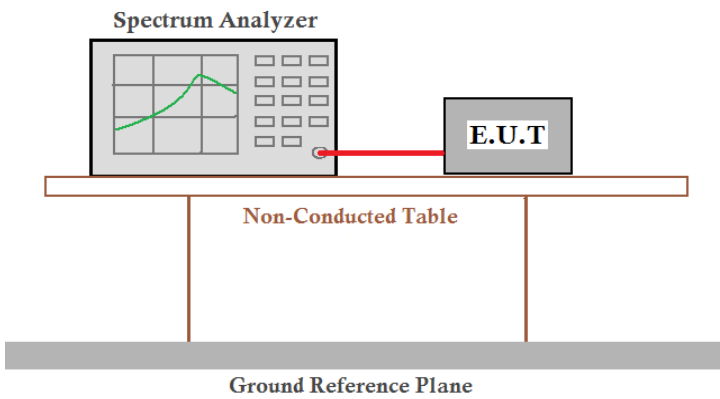
Test Requirement:	FCC Part15 E Section 15.407, RSS-247 Issue 3
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	$\leq 11.00\text{dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz $\leq 30.00\text{dBm/500KHz}$ for 5725MHz-5850MHz For 5150MHz-5250MHz: The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 1 (5150 - 5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna Gain(dBi)	DC factor(dB)	Conducted PSD (dBm)	FCC Limit (dBm)	EIRP PSD (dBm)	IC Limit (dBm)	Verdict
NVNT	a	5180	5.15	0.11	-3.374	11	1.886	10	Pass
NVNT	a	5200	5.15	0.11	-2.849	11	2.411	10	Pass
NVNT	a	5240	5.15	0.11	-2.421	11	2.839	10	Pass
NVNT	ac20	5180	5.15	0.11	-2.856	11	2.404	10	Pass
NVNT	ac20	5200	5.15	0.11	-2.959	11	2.301	10	Pass
NVNT	ac20	5240	5.15	0.11	-3.185	11	2.075	10	Pass
NVNT	ac40	5190	5.15	0.23	-6.056	11	-0.536	10	Pass
NVNT	ac40	5230	5.15	0.23	-6.037	11	-0.607	10	Pass
NVNT	ac80	5210	5.15	0.46	-9.222	11	-1.332	10	Pass
NVNT	n20	5180	5.15	0.12	-2.613	11	2.647	10	Pass
NVNT	n20	5200	5.15	0.12	-3.226	11	2.034	10	Pass
NVNT	n20	5240	5.15	0.12	-3.549	11	1.711	10	Pass
NVNT	n40	5190	5.15	0.23	-6.226	11	-0.696	10	Pass
NVNT	n40	5230	5.15	0.23	-6.259	11	-0.769	10	Pass


Note: EIRP PSD=conducted PSD+ANT GAIN + DC factor(dB)

PSD NVNT a 5180MHz Ant1

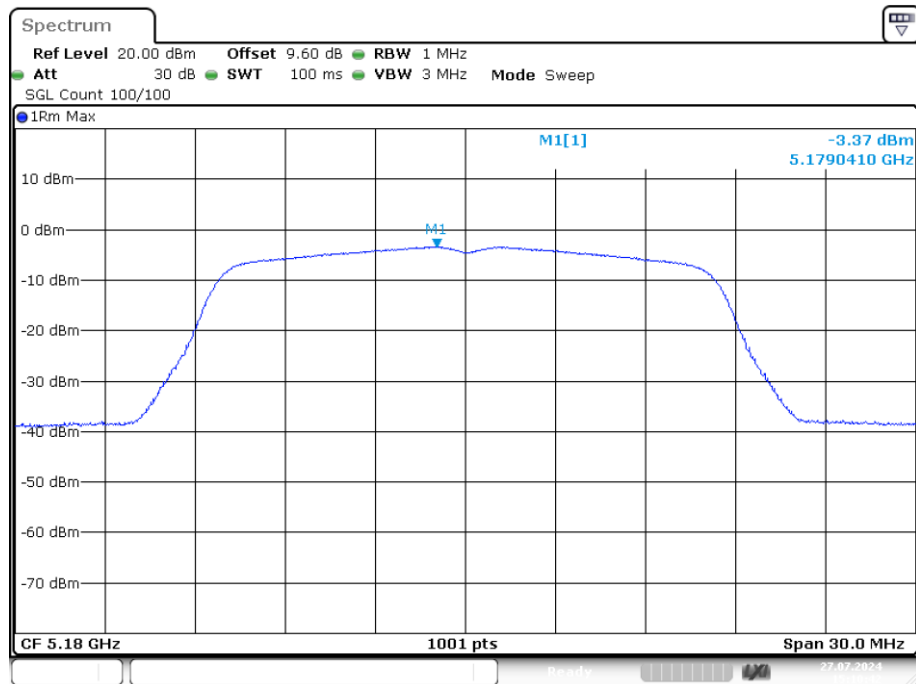


Date: 27.JUL.2024 15:10:42

PSD NVNT a 5200MHz Ant1

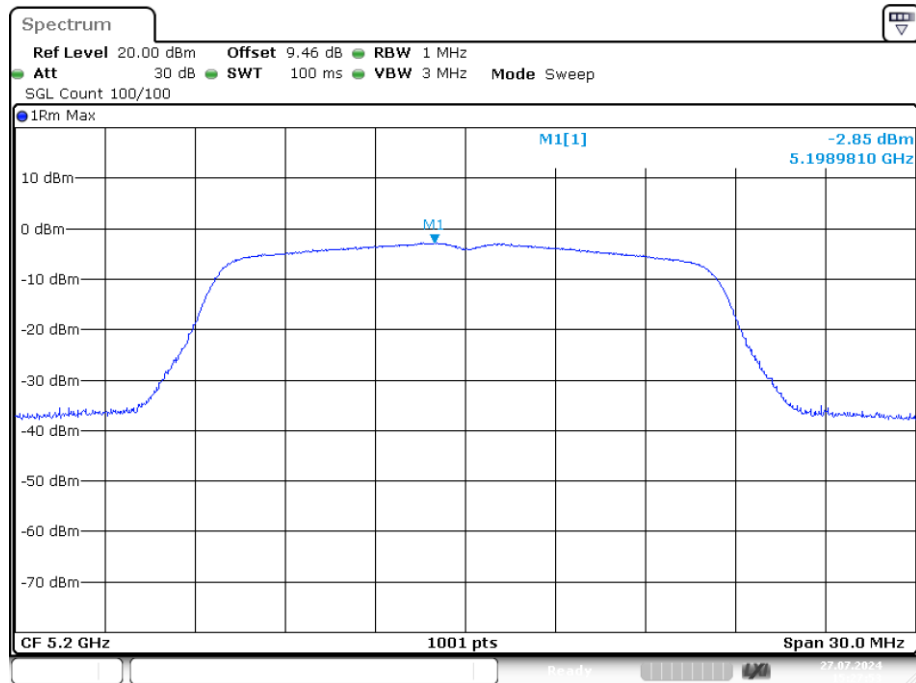


Date: 27.JUL.2024 15:27:53

PSD NVNT a 5240MHz Ant1

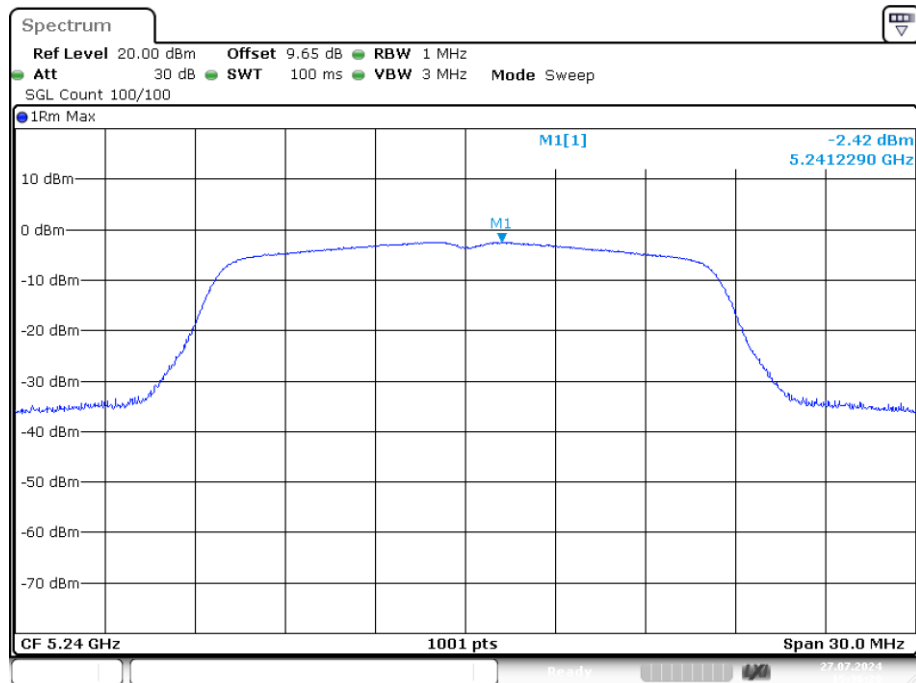


Date: 27.JUL.2024 15:36:30

PSD NVNT ac20 5180MHz Ant1

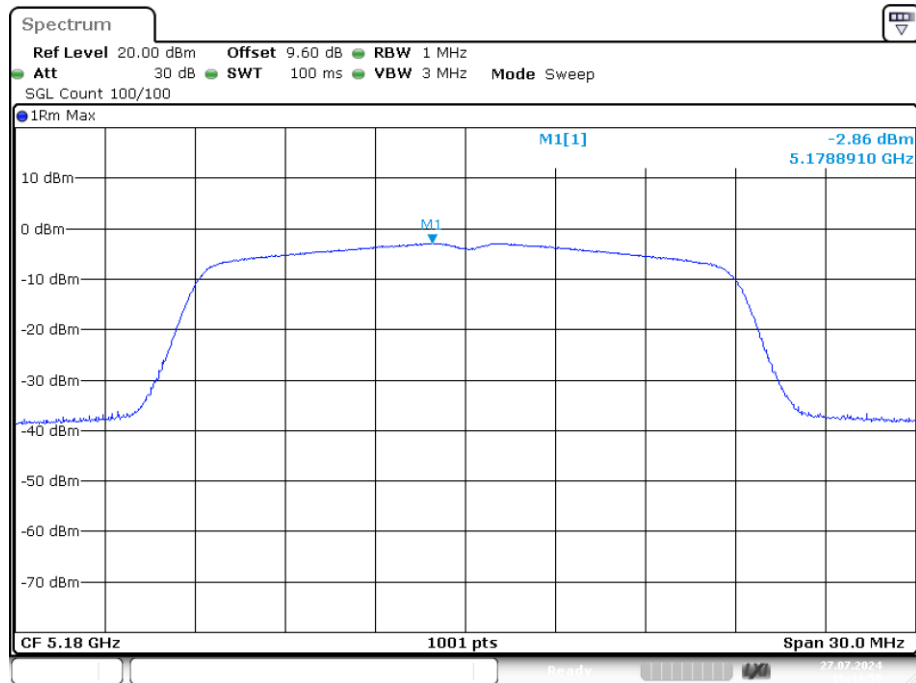


Date: 27.JUL.2024 16:44:59

PSD NVNT ac20 5200MHz Ant1

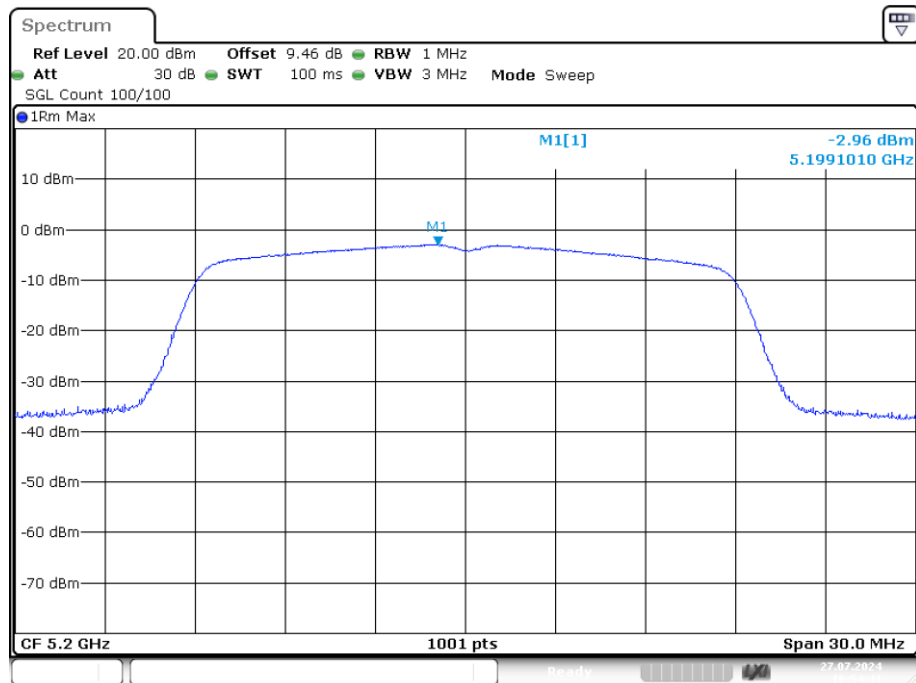


Date: 27.JUL.2024 16:54:42

PSD NVNT ac20 5240MHz Ant1

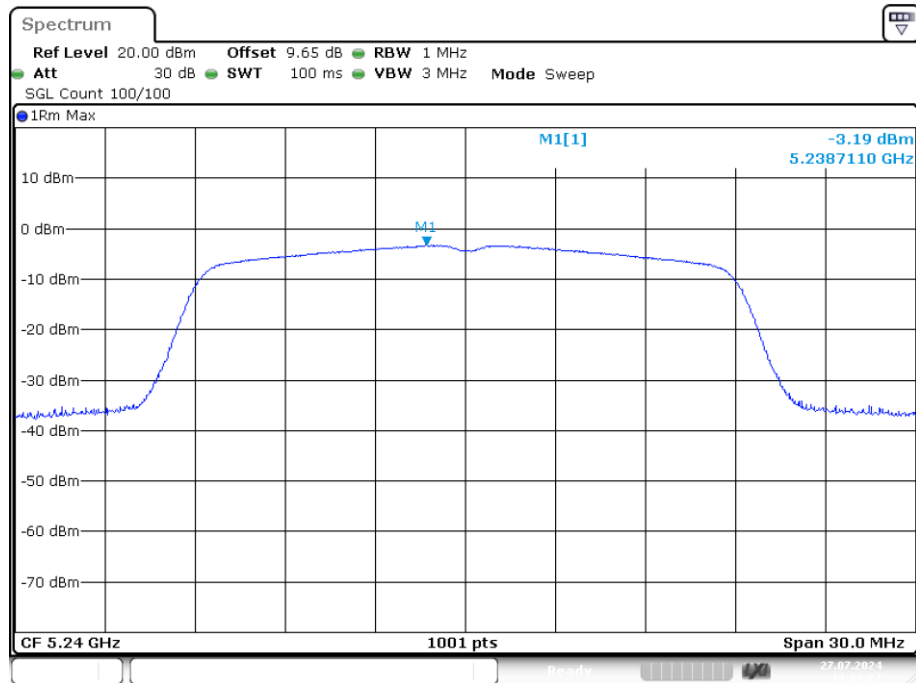


Date: 27.JUL.2024 17:03:27

PSD NVNT ac40 5190MHz Ant1

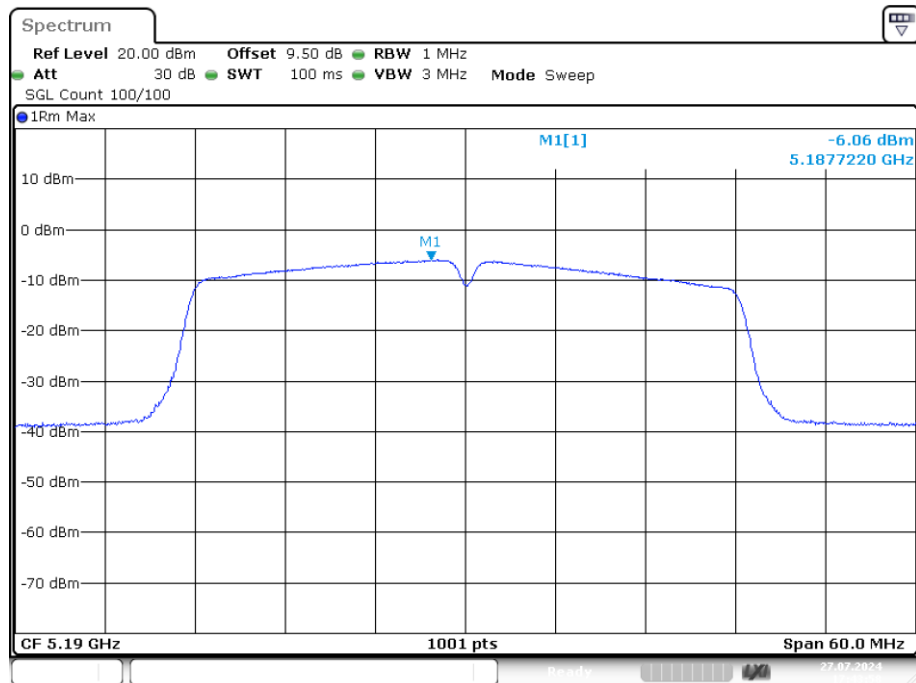


Date: 27.JUL.2024 17:43:57

PSD NVNT ac40 5230MHz Ant1

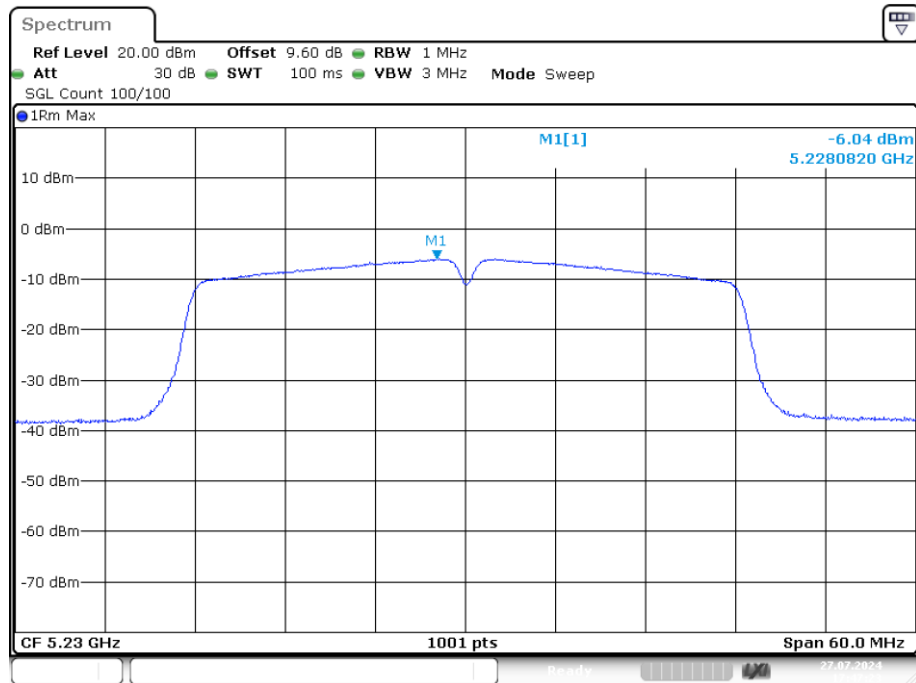


Date: 27.JUL.2024 17:47:23

PSD NVNT ac80 5210MHz Ant1

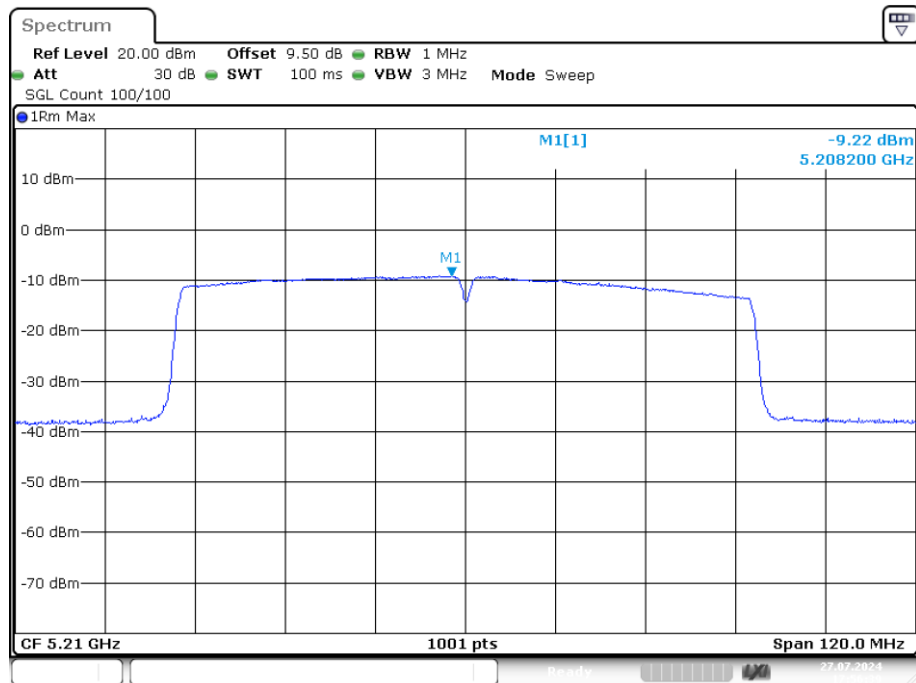


Date: 27.JUL.2024 17:56:39

PSD NVNT n20 5180MHz Ant1

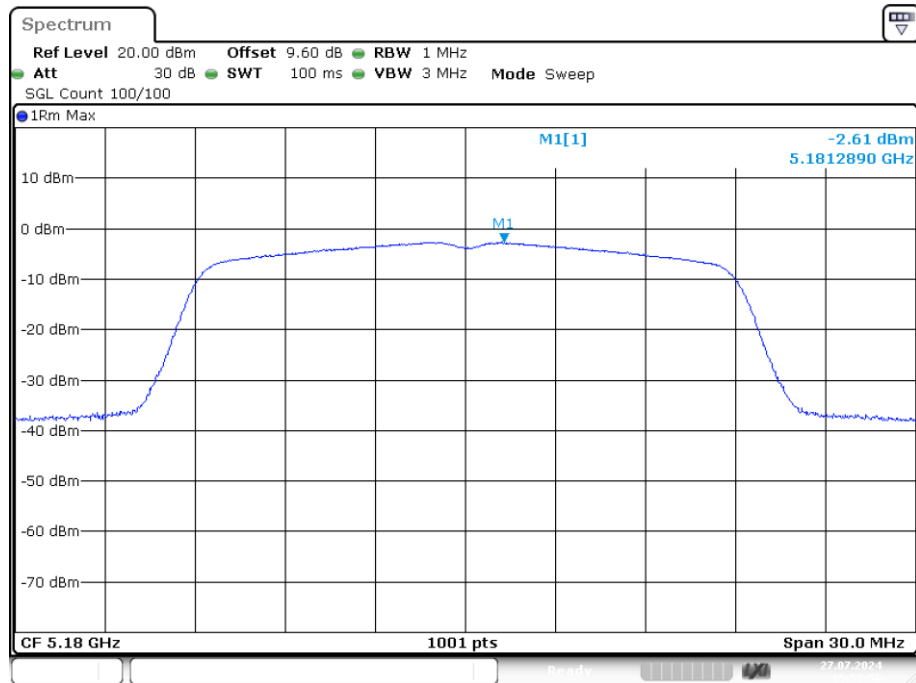


Date: 27.JUL.2024 15:52:56

PSD NVNT n20 5200MHz Ant1

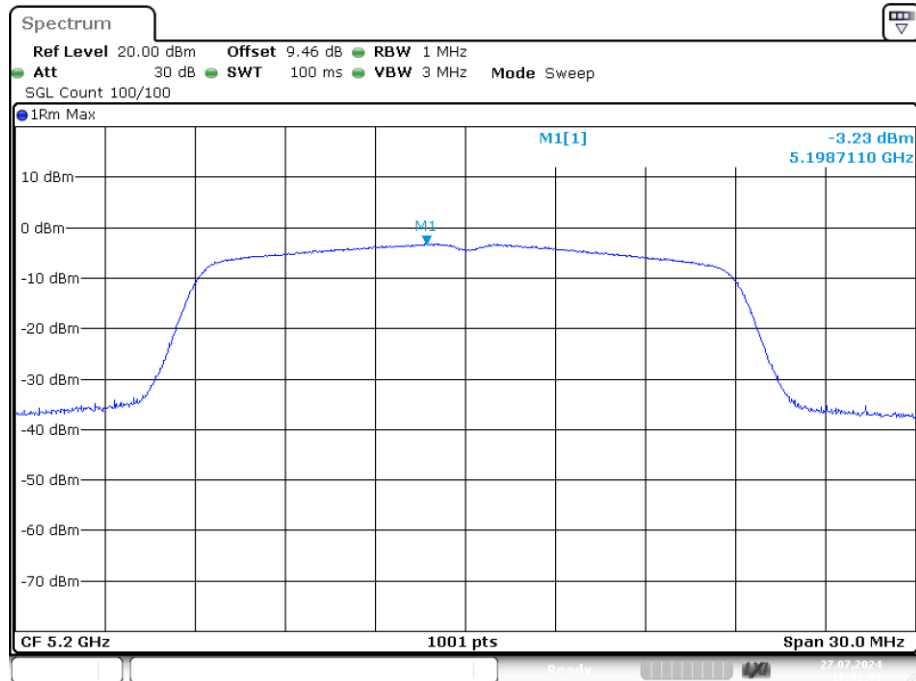


Date: 27.JUL.2024 16:01:03

PSD NVNT n20 5240MHz Ant1

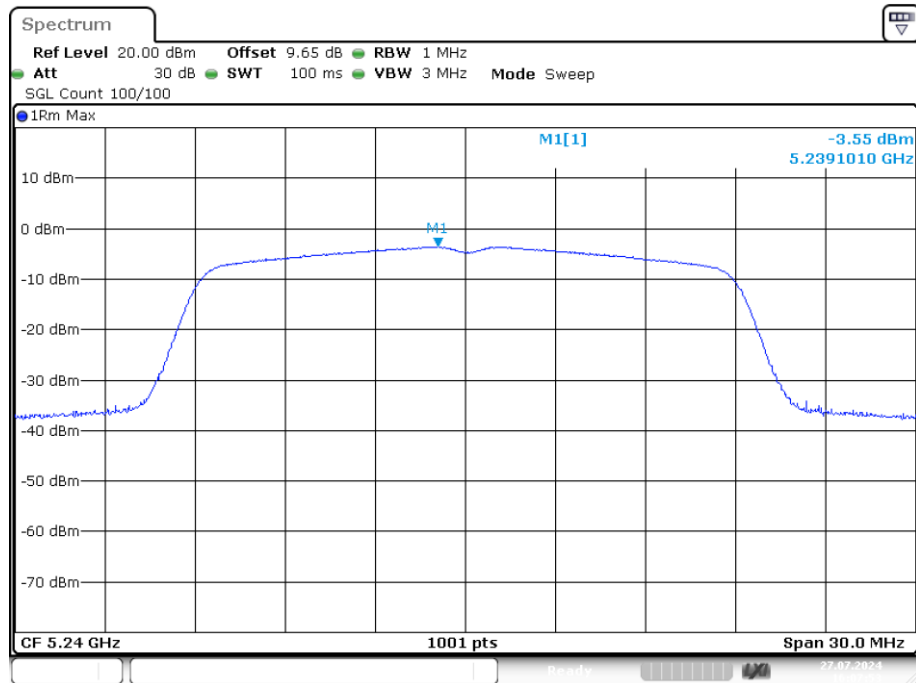


Date: 27.JUL.2024 16:07:54

PSD NVNT n40 5190MHz Ant1

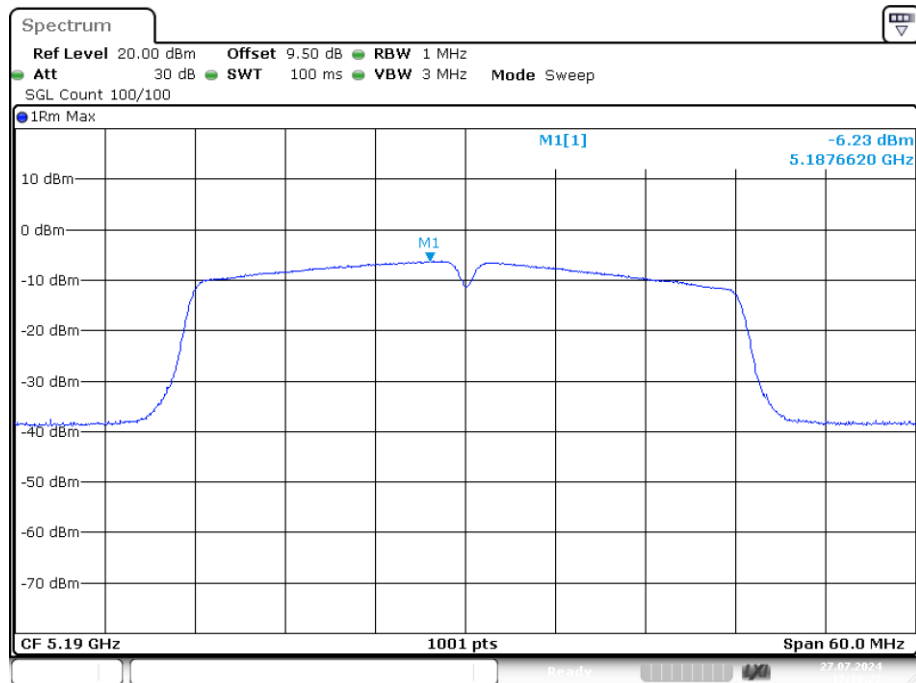

Date: 27.JUL.2024 17:19:28

PSD NVNT n40 5230MHz Ant1

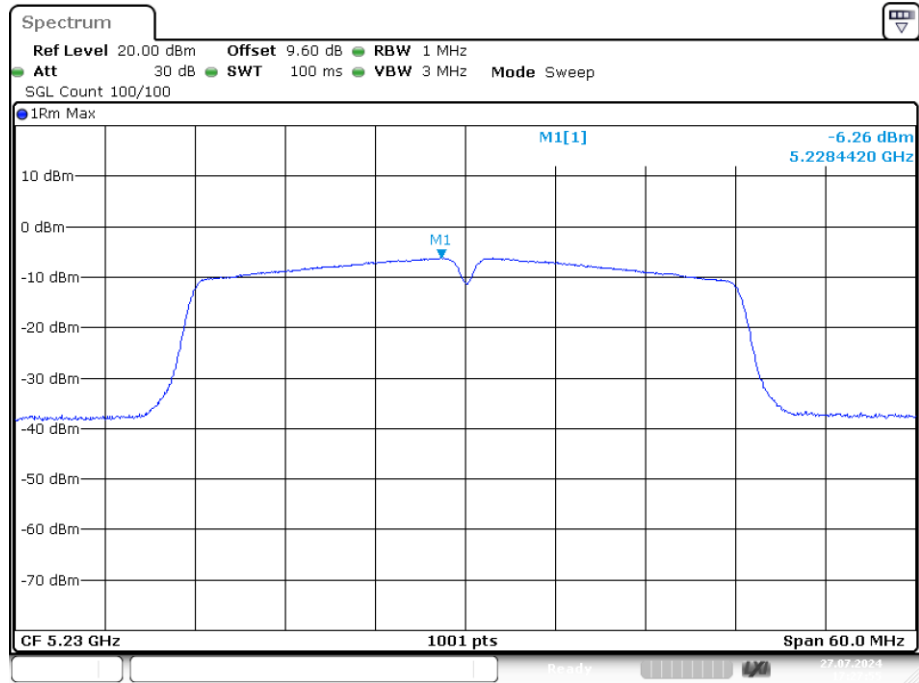


Date: 27.JUL.2024 17:27:56

Band 4 (5725 - 5850 MHz)


Condition	Mode	Frequency (MHz)	Antenna	DC factor(dB)	conducted PSD(dBm)	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	0.11	-5.776	-5.666	30	Pass
NVNT	a	5785	Ant1	0.11	-5.833	-5.723	30	Pass
NVNT	a	5825	Ant1	0.11	-6.142	-6.032	30	Pass
NVNT	ac20	5745	Ant1	0.11	-5.68	-5.57	30	Pass
NVNT	ac20	5785	Ant1	0.12	-5.978	-5.858	30	Pass
NVNT	ac20	5825	Ant1	0.12	-6.157	-6.037	30	Pass
NVNT	ac40	5755	Ant1	0.23	-8.009	-7.779	30	Pass
NVNT	ac40	5795	Ant1	0.23	-8.149	-7.919	30	Pass
NVNT	ac80	5775	Ant1	0.47	-12.07	-11.6	30	Pass
NVNT	n20	5745	Ant1	0.11	-5.711	-5.601	30	Pass
NVNT	n20	5785	Ant1	0.12	-5.997	-5.877	30	Pass
NVNT	n20	5825	Ant1	0.12	-6.395	-6.275	30	Pass
NVNT	n40	5755	Ant1	0.23	-8.923	-8.693	30	Pass
NVNT	n40	5795	Ant1	0.23	-8.765	-8.535	30	Pass

Note: Max PSD=conducted PSD+DC factor(dB)

PSD NVNT a 5745MHz Ant1

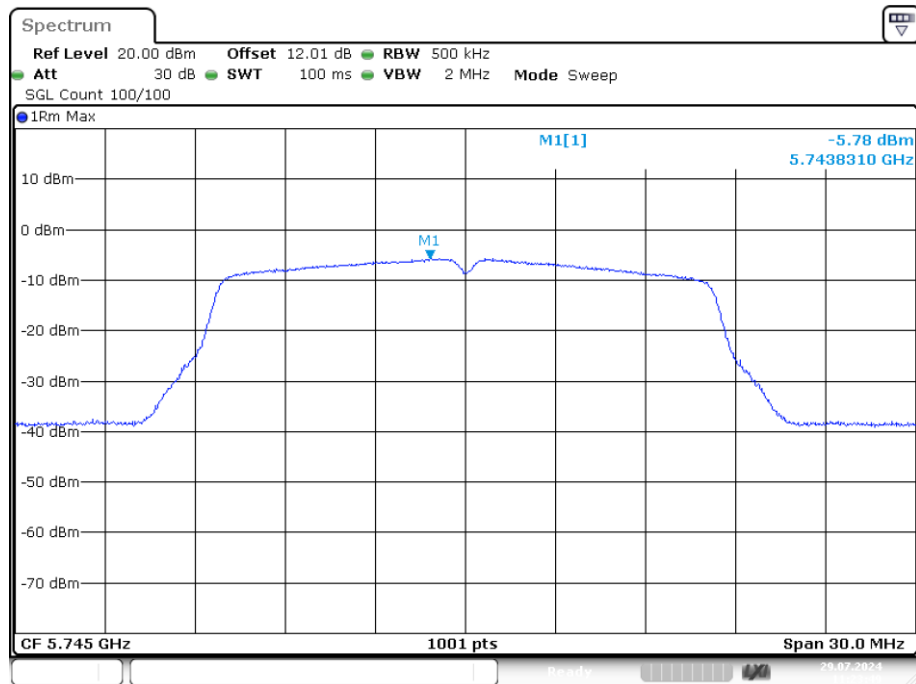


PSD NVNT a 5785MHz Ant1

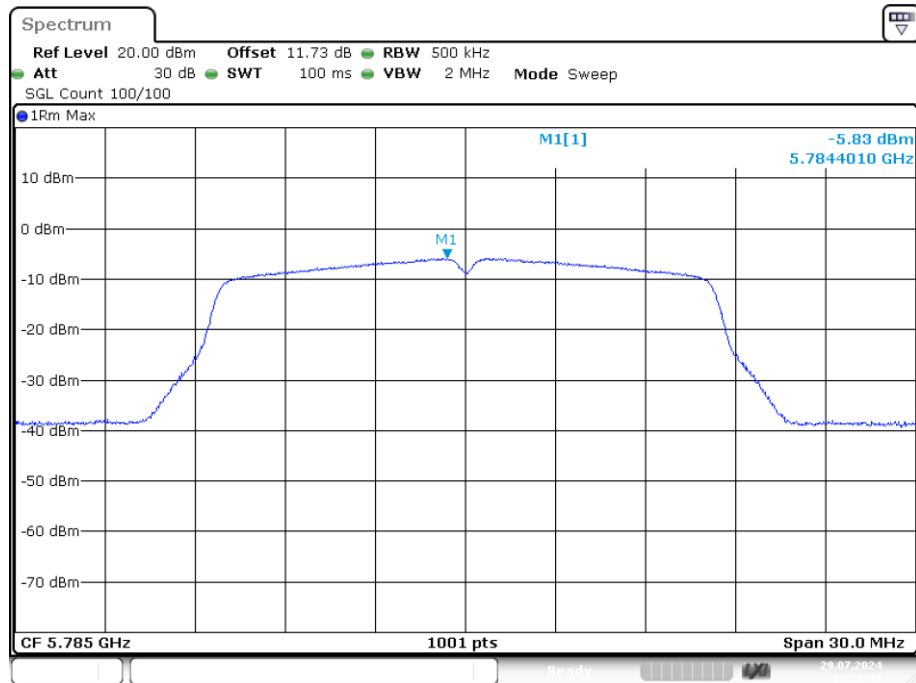


Date: 29.JUL.2024 11:27:43

PSD NVNT a 5825MHz Ant1

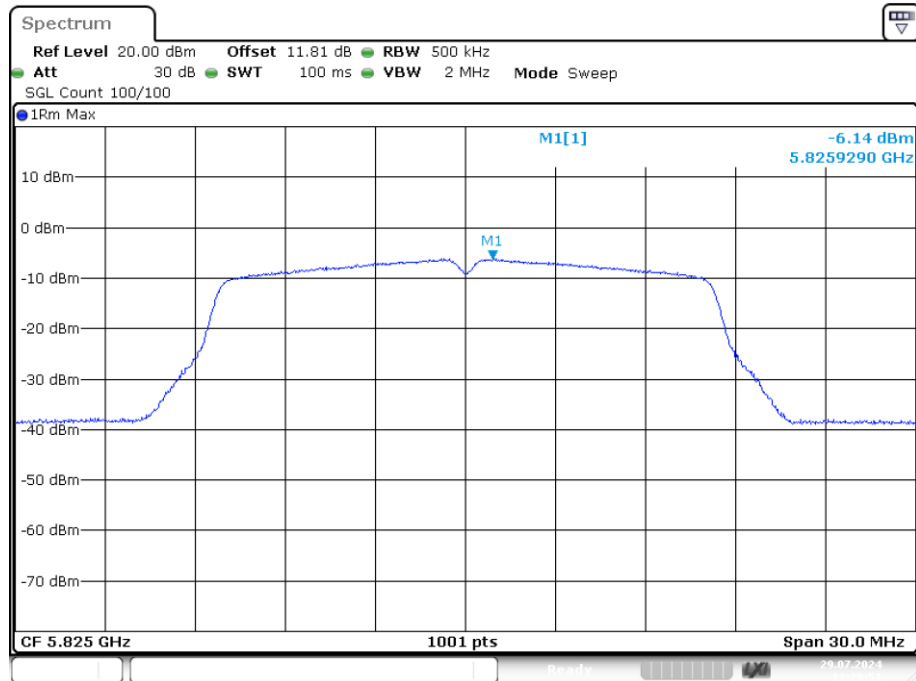


Date: 29.JUL.2024 11:29:50

PSD NVNT ac20 5745MHz Ant1

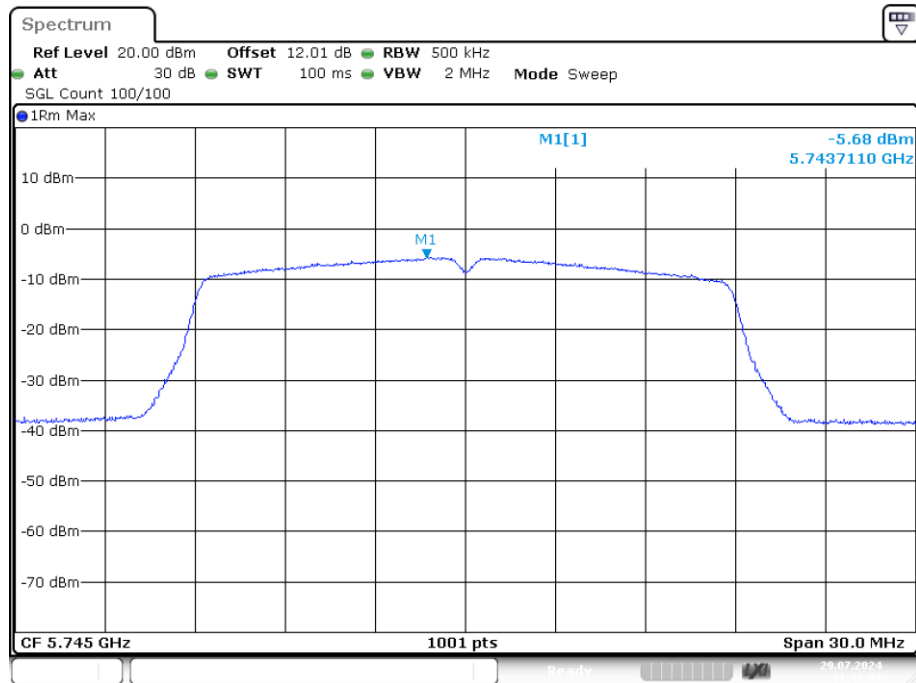


Date: 29.JUL.2024 11:41:07

PSD NVNT ac20 5785MHz Ant1

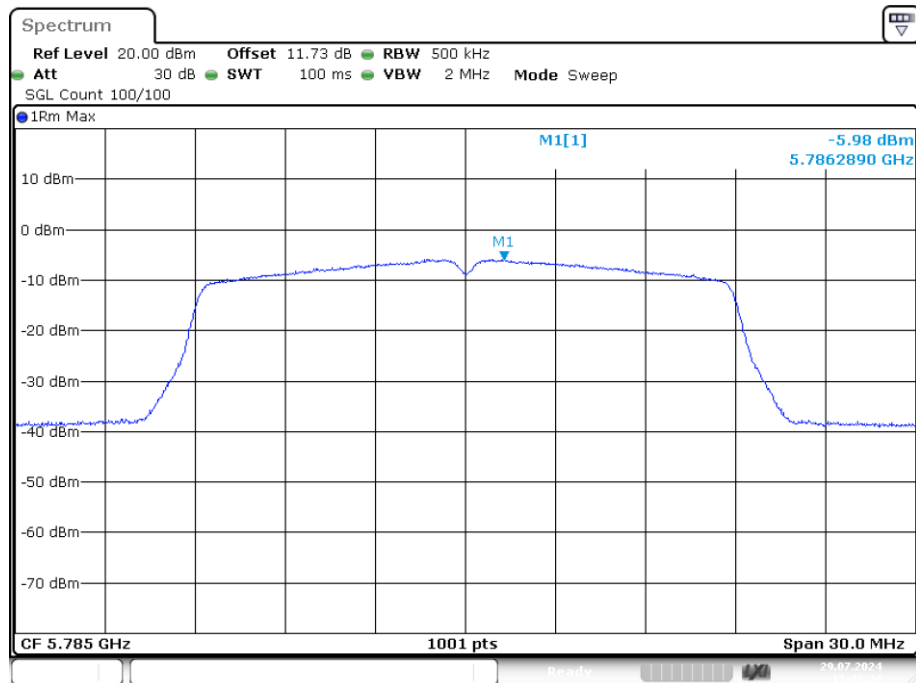


Date: 29.JUL.2024 11:43:23

PSD NVNT ac20 5825MHz Ant1

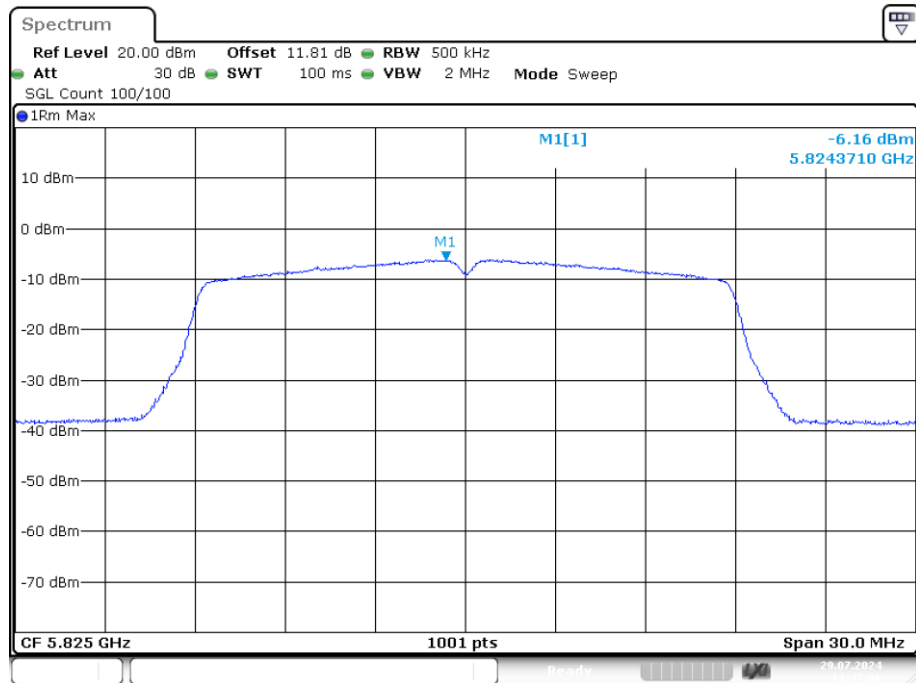


Date: 29.JUL.2024 11:47:05

PSD NVNT ac40 5755MHz Ant1

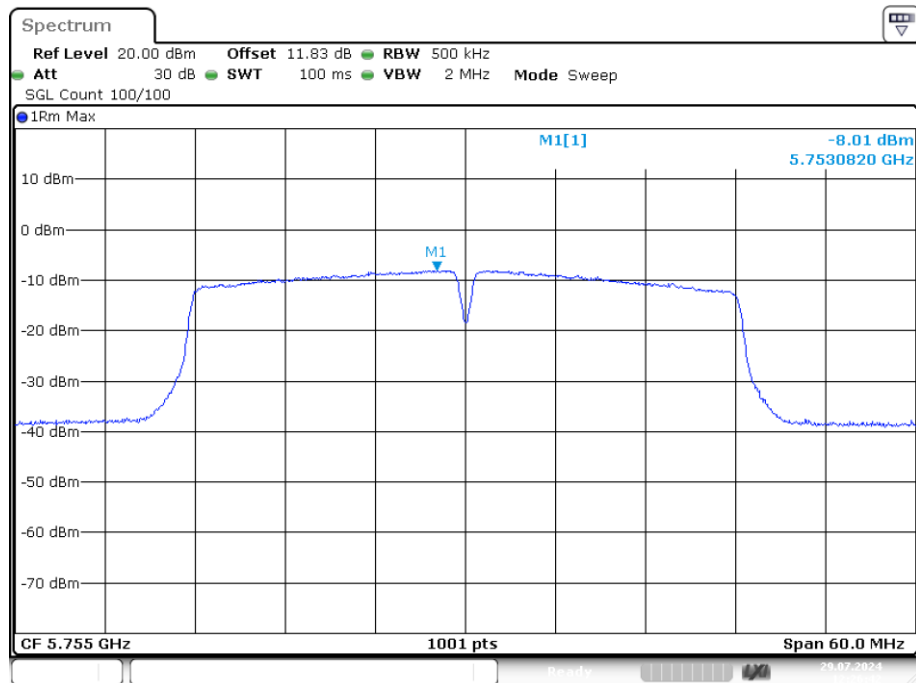


Date: 29.JUL.2024 12:26:41

PSD NVNT ac40 5795MHz Ant1

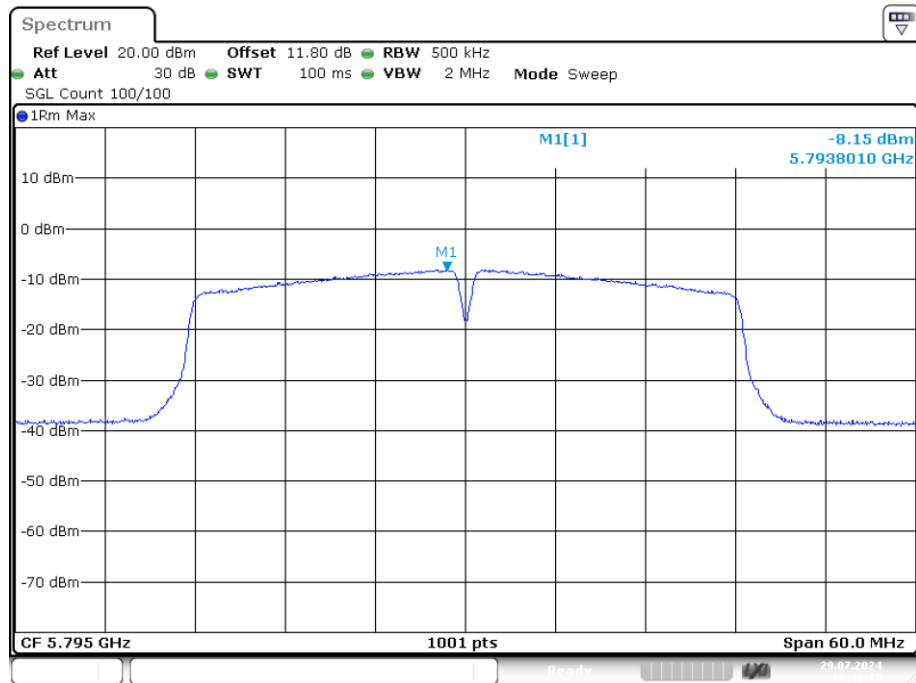


Date: 29.JUL.2024 12:49:15

PSD NVNT ac80 5775MHz Ant1

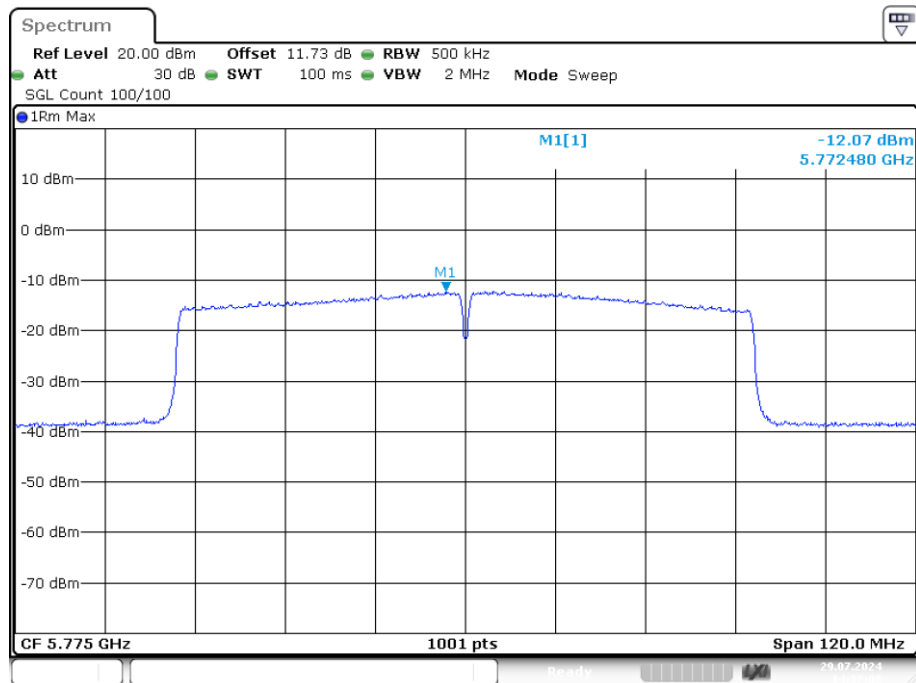


Date: 29.JUL.2024 14:37:09

PSD NVNT n20 5745MHz Ant1

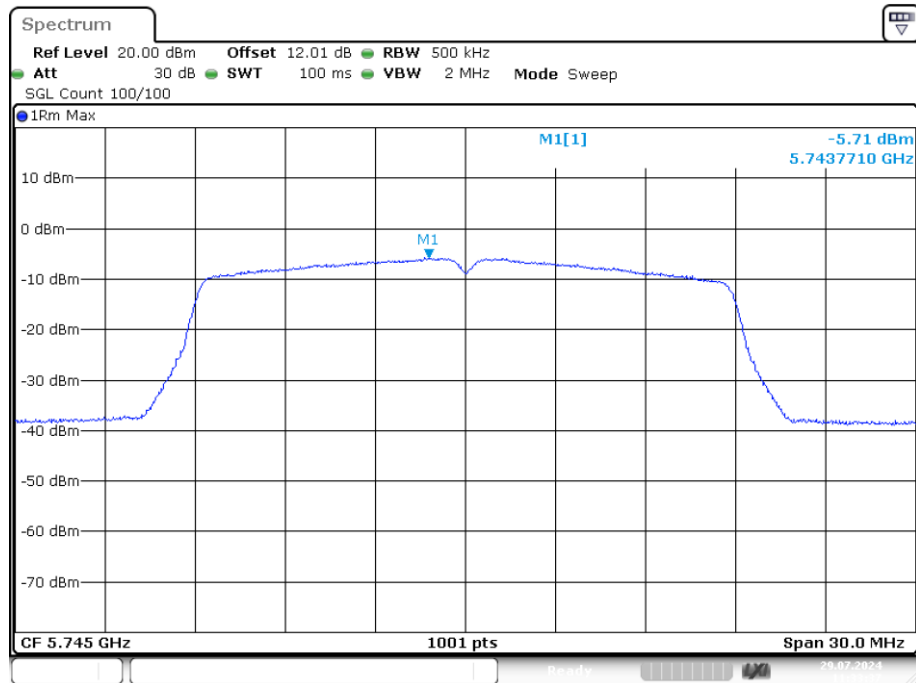


Date: 29.JUL.2024 11:33:37

PSD NVNT n20 5785MHz Ant1

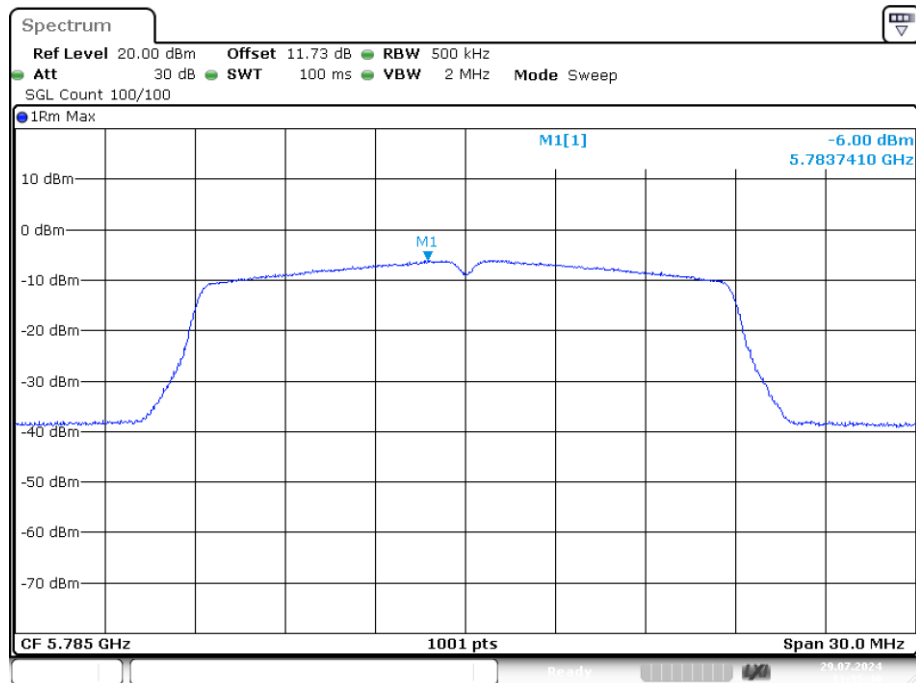


Date: 29.JUL.2024 11:35:40

PSD NVNT n20 5825MHz Ant1

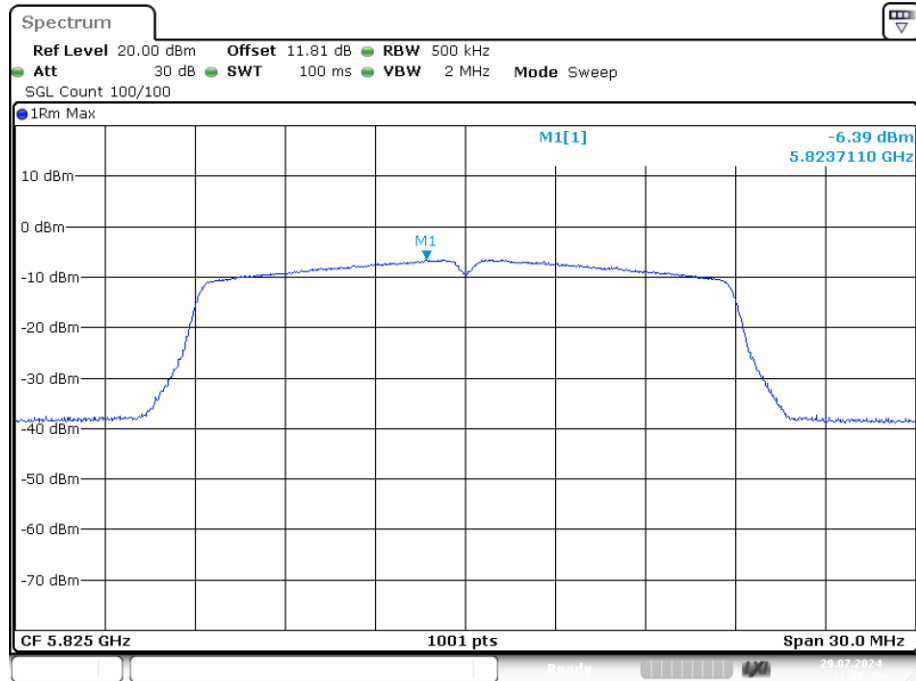


Date: 29.JUL.2024 11:38:20

PSD NVNT n40 5755MHz Ant1

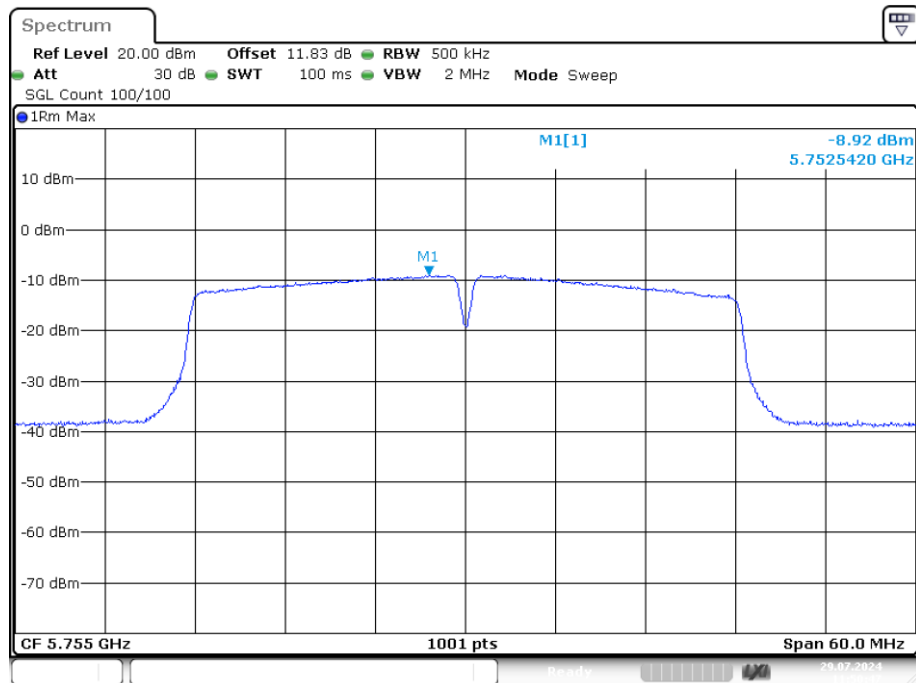

Date: 29.JUL.2024 11:50:47


PSD NVNT n40 5795MHz Ant1

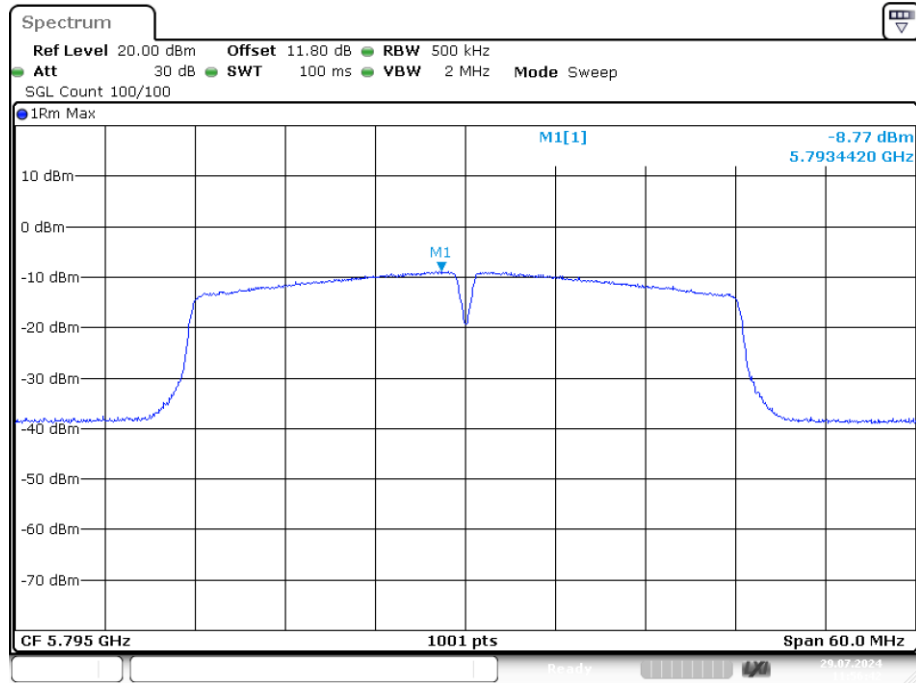

Date: 29.JUL.2024 11:56:42

4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205, RSS-247 Issue 3, RSS-Gen Issue 5																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								
Test setup:	Above 1GHz																								

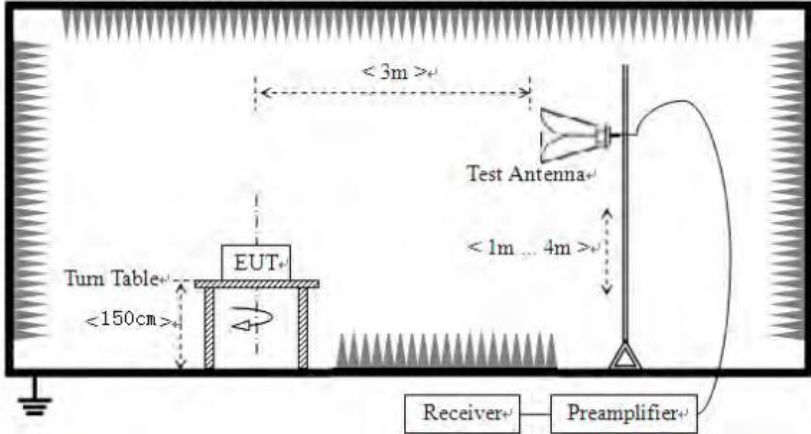	
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Measurement Data:**Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.02	17.21	54.23	68.20	-13.97	PK
V	5150.00	34.77	17.21	51.98	68.20	-16.22	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	21.66	17.18	38.84	54.00	-15.16	AV
V	5150.00	25.56	17.18	42.74	54.00	-11.26	AV
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.69	17.21	53.90	68.20	-14.30	PK
V	5350.00	32.62	17.21	49.83	68.20	-18.37	PK
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.72	17.18	43.90	54.00	-10.10	AV
V	5350.00	25.15	17.18	42.33	54.00	-11.67	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	38.58	17.21	55.79	68.20	-12.41	PK
V	5150.00	35.40	17.21	52.61	68.20	-15.59	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.32	17.18	39.50	54.00	-14.50	AV
V	5150.00	25.12	17.18	42.30	54.00	-11.70	AV
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.39	17.21	53.60	68.20	-14.60	PK
V	5350.00	34.08	17.21	51.29	68.20	-16.91	PK
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	29.48	17.18	46.66	54.00	-7.34	AV
V	5350.00	23.70	17.18	40.88	54.00	-13.12	AV

Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	38.24	17.21	55.45	68.20	-12.75	PK
V	5150.00	35.12	17.21	52.33	68.20	-15.87	PK
Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.83	17.18	42.01	54.00	-11.99	AV
V	5150.00	25.78	17.18	42.96	54.00	-11.04	AV
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.54	17.21	51.75	68.20	-16.45	PK
V	5350.00	34.60	17.21	51.81	68.20	-16.39	PK
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.56	17.18	44.74	54.00	-9.26	AV
V	5350.00	25.31	17.18	42.49	54.00	-11.51	AV


Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.67	17.21	54.88	68.20	-13.32	PK
V	5150.00	36.15	17.21	53.36	68.20	-14.84	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.90	17.18	41.08	54.00	-12.92	AV
V	5150.00	24.79	17.18	41.97	54.00	-12.03	AV
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.87	17.21	52.08	68.20	-16.12	PK
V	5350.00	35.70	17.21	52.91	68.20	-15.29	PK
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.01	17.18	44.19	54.00	-9.81	AV
V	5350.00	23.51	17.18	40.69	54.00	-13.31	AV

Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.05	17.21	53.26	68.20	-14.94	PK
V	5150.00	36.76	17.21	53.97	68.20	-14.23	PK
Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.11	17.18	41.29	54.00	-12.71	AV
V	5150.00	24.97	17.18	42.15	54.00	-11.85	AV
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.55	17.21	52.76	68.20	-15.44	PK
V	5350.00	33.79	17.21	51.00	68.20	-17.20	PK
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	29.03	17.18	46.21	54.00	-7.79	AV
V	5350.00	22.84	17.18	40.02	54.00	-13.98	AV


Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.21	17.21	53.42	68.20	-14.78	PK
V	5150.00	37.93	17.21	55.14	68.20	-13.06	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	21.87	17.18	39.05	54.00	-14.95	AV
V	5150.00	24.26	17.18	41.44	54.00	-12.56	AV
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.46	17.21	54.67	68.20	-13.53	PK
V	5350.00	35.59	17.21	52.80	68.20	-15.40	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	28.70	17.18	45.88	54.00	-8.12	AV
V	5350.00	25.98	17.18	43.16	54.00	-10.84	AV

Band4


Band Edge NVNT a 5745MHz Low Ant1

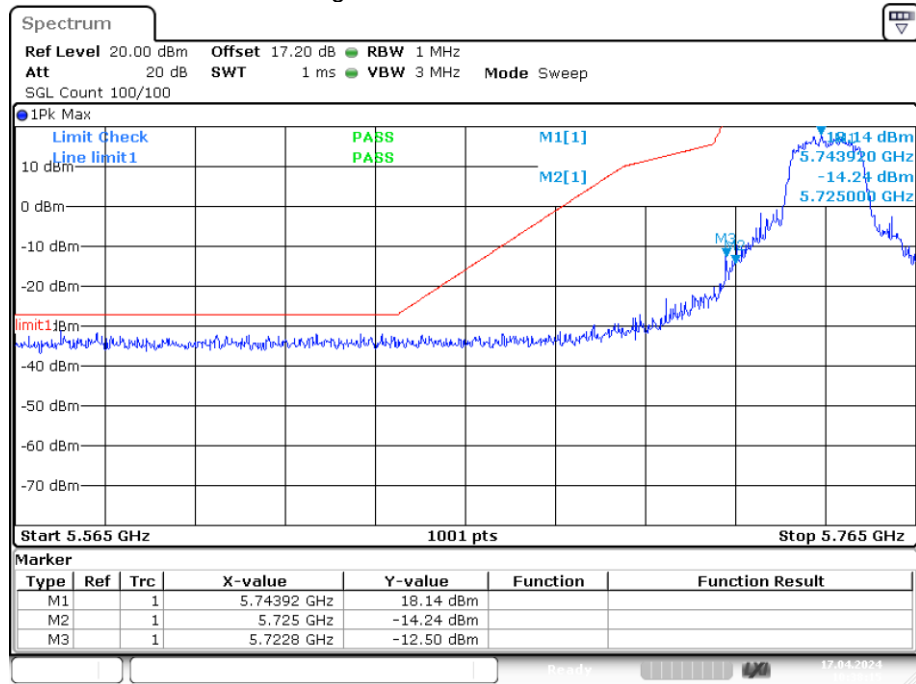

Band Edge NVNT a 5825MHz High Ant1

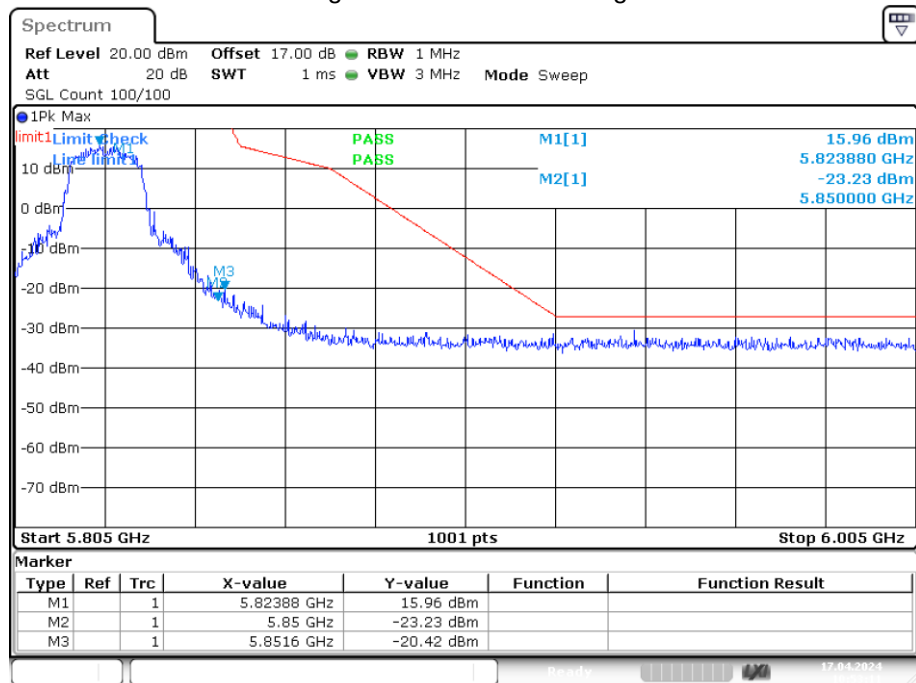


Band Edge NVNT ac20 5745MHz Low Ant1

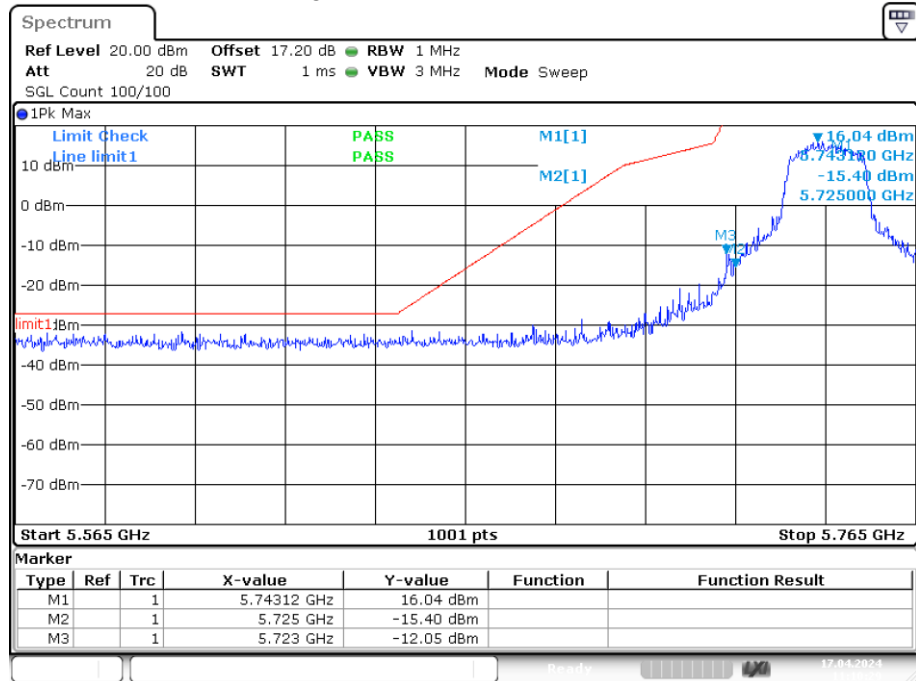


Date: 17.APR.2024 11:10:29

Band Edge NVNT ac20 5825MHz High Ant1

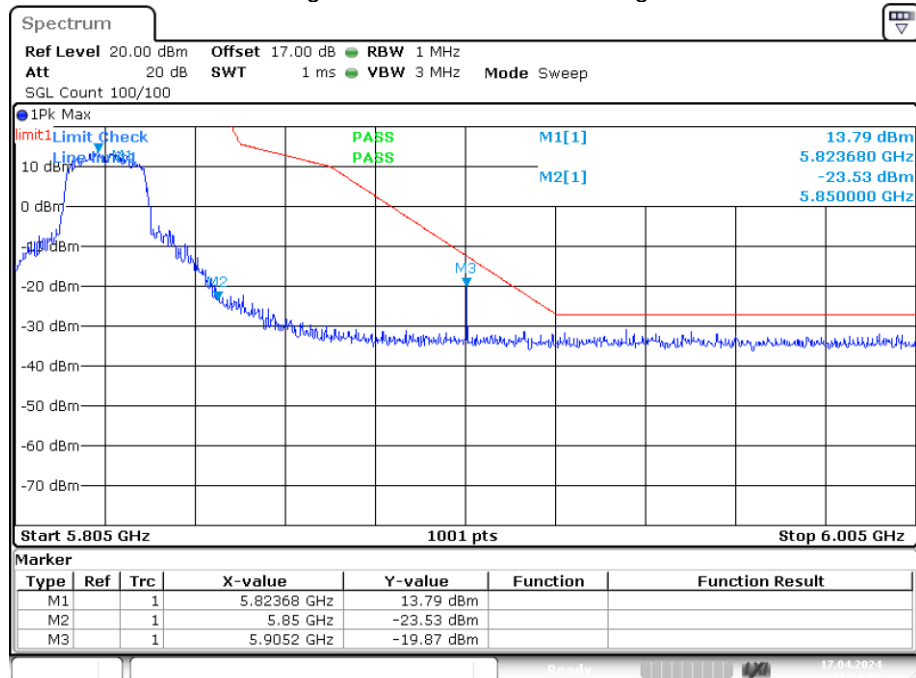


Date: 17.APR.2024 11:24:29

Band Edge NVNT ac40 5755MHz Low Ant1

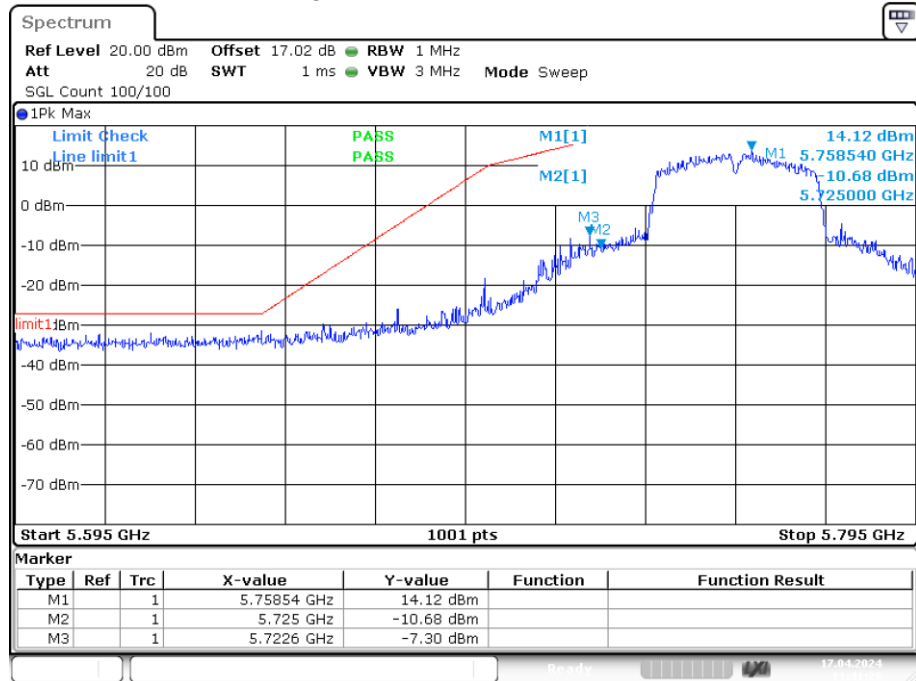


Date: 17.APR.2024 11:41:27

Band Edge NVNT ac40 5795MHz High Ant1

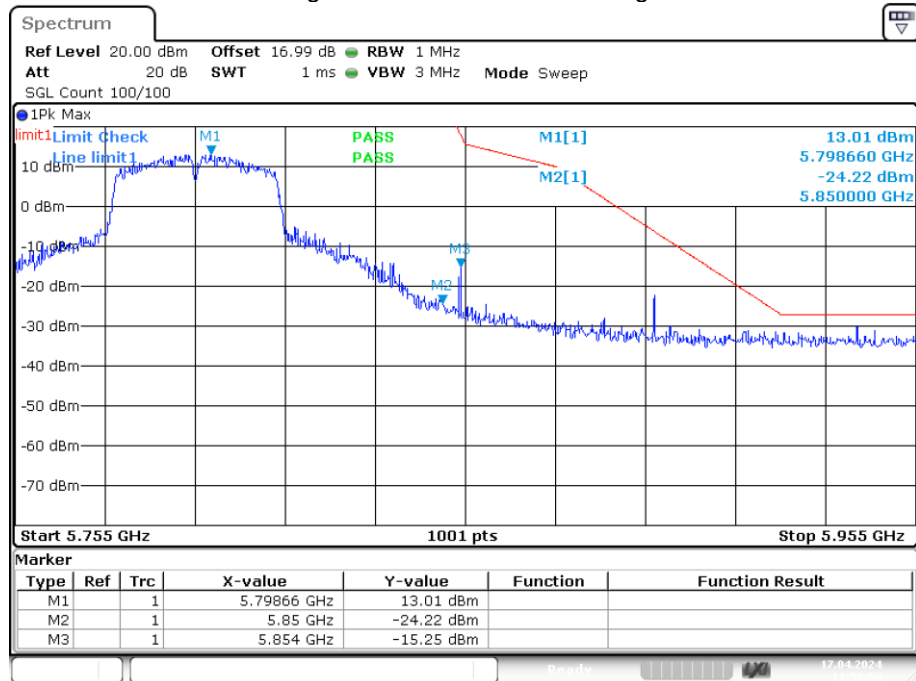


Date: 17.APR.2024 11:58:50

Band Edge NVNT ac80 5745MHz Low Ant1

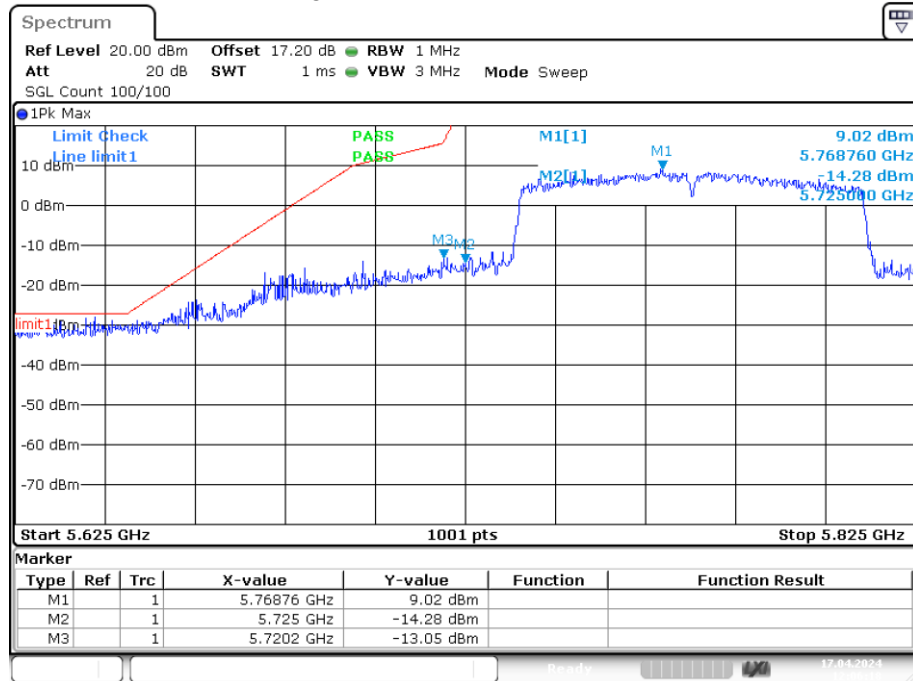


Date: 17.APR.2024 12:06:18

Band Edge NVNT ac80 5825MHz High Ant1

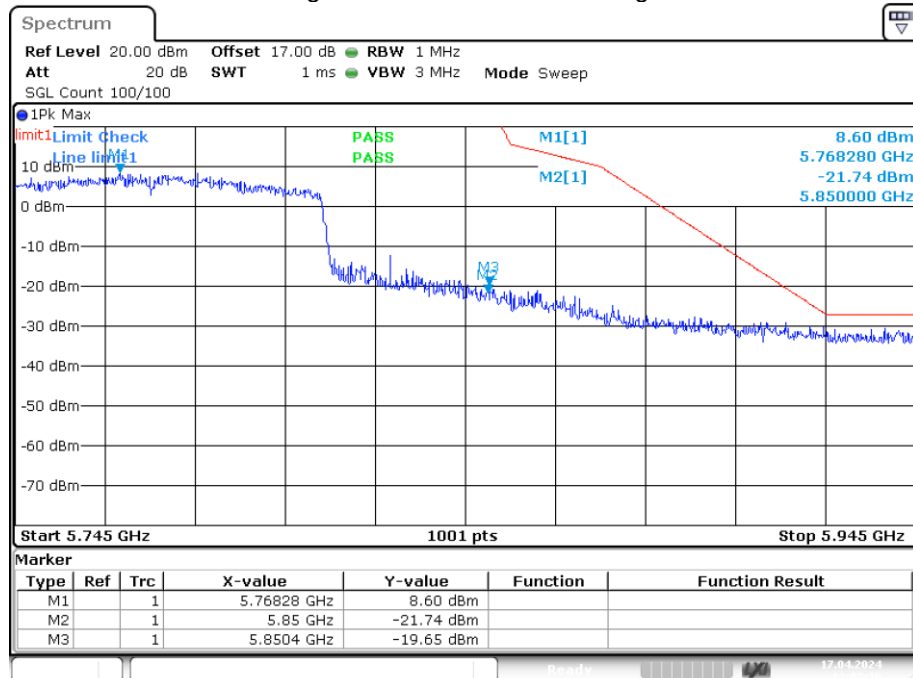


Date: 17.APR.2024 12:07:36

Band Edge NVNT n20 5745MHz Low Ant1

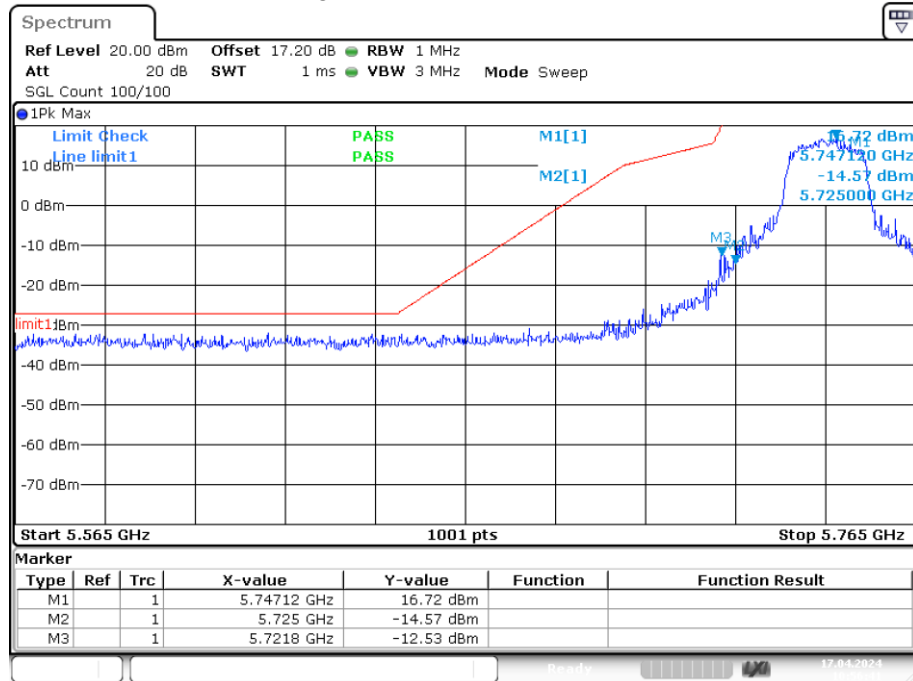


Date: 17.APR.2024 10:56:40

Band Edge NVNT n20 5825MHz High Ant1

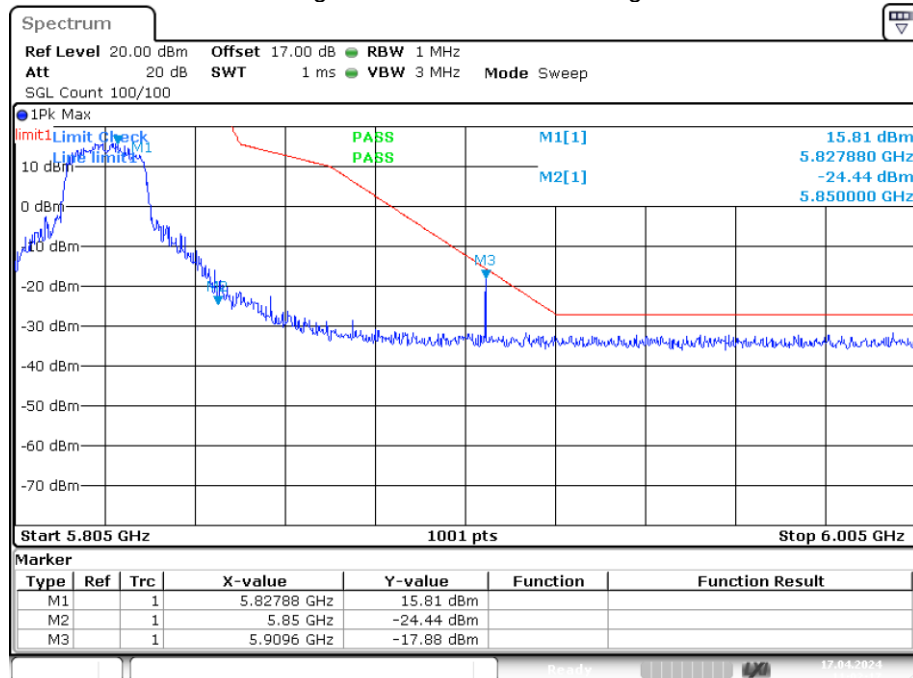


Date: 17.APR.2024 11:02:17

Band Edge NVNT n40 5755MHz Low Ant1

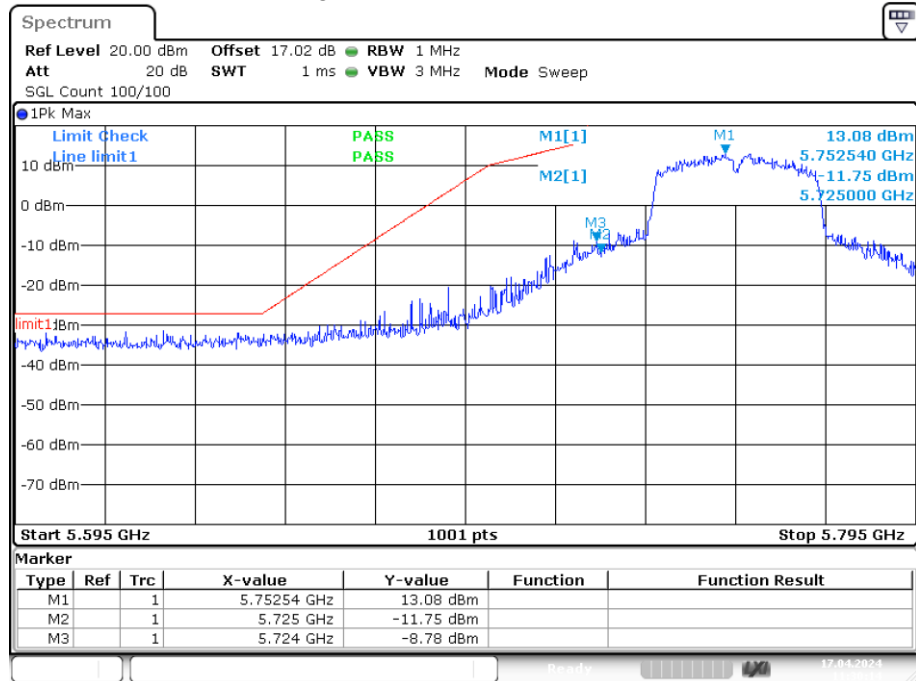

Date: 17.APR.2024 11:30:14


Band Edge NVNT n40 5795MHz High Ant1

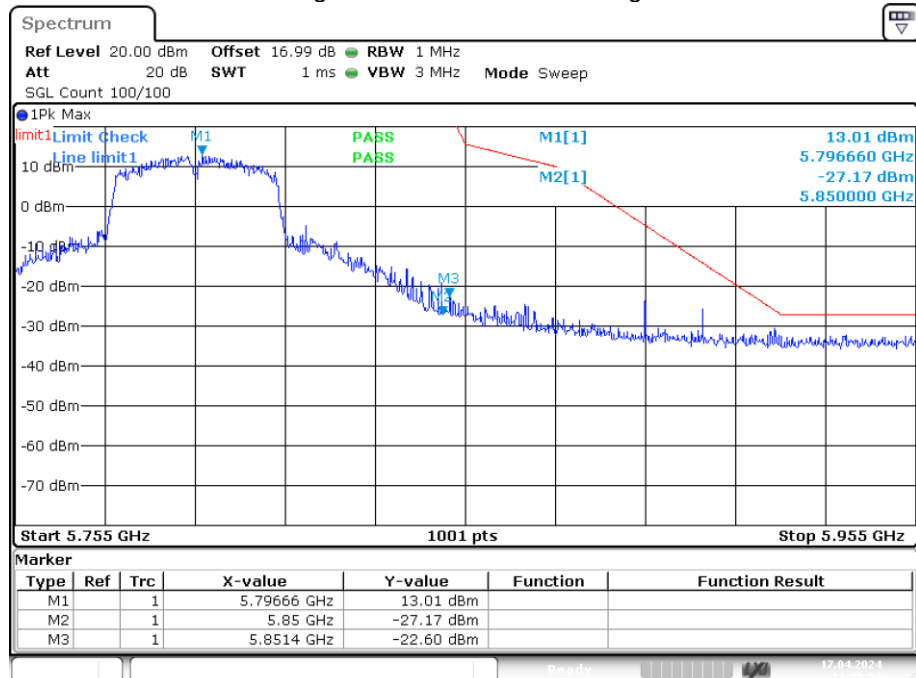


Date: 17.APR.2024 11:35:57

4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a				

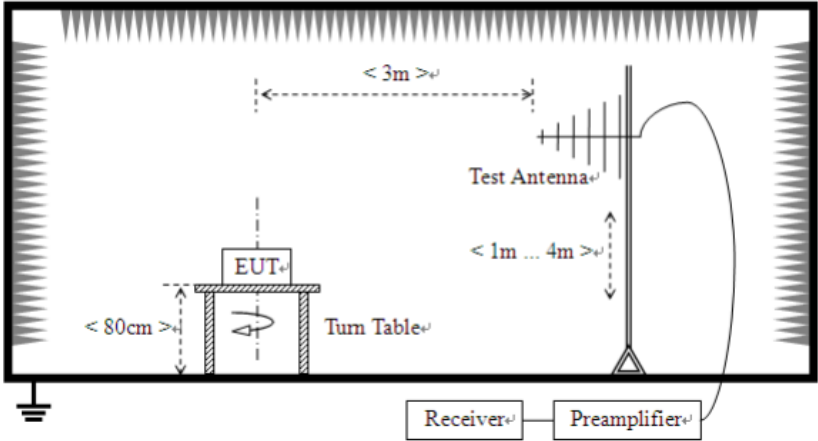
	maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. - Repeat step 4 for test frequency with the test antenna polarized horizontally. - Remove the transmitter and replace it with a substitution antenna - Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. - Repeat step 7 with both antennas horizontally polarized for each test frequency. - Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = P_g(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: P_g is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

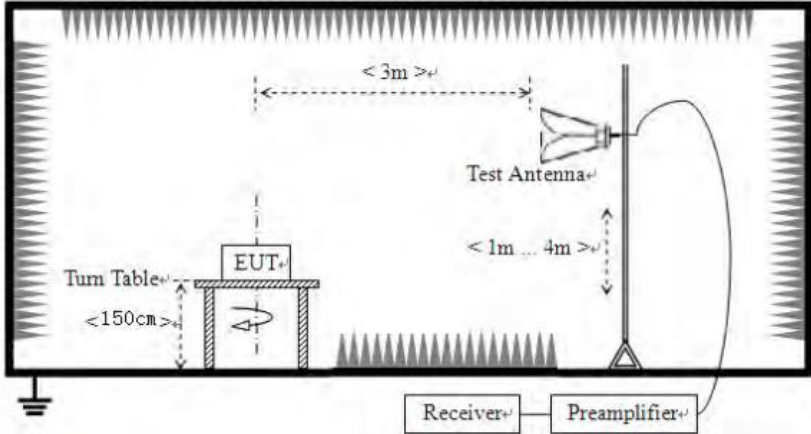	
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:

Below 1GHz

Vertical:

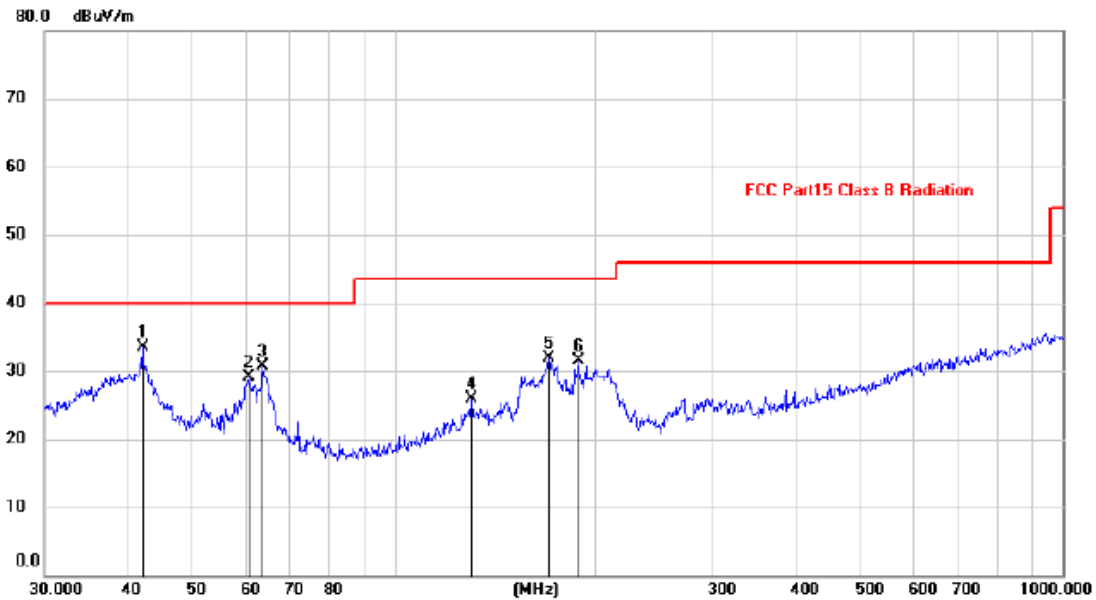


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	42.1540	19.16	14.33	33.49	40.00	-6.51	peak
2		60.6972	16.07	12.99	29.06	40.00	-10.94	peak
3		63.7513	18.09	12.52	30.61	40.00	-9.39	peak
4		130.8059	12.16	13.65	25.81	43.50	-17.69	peak
5		170.7726	17.84	13.97	31.81	43.50	-11.69	peak
6		188.9636	19.82	11.60	31.42	43.50	-12.08	peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

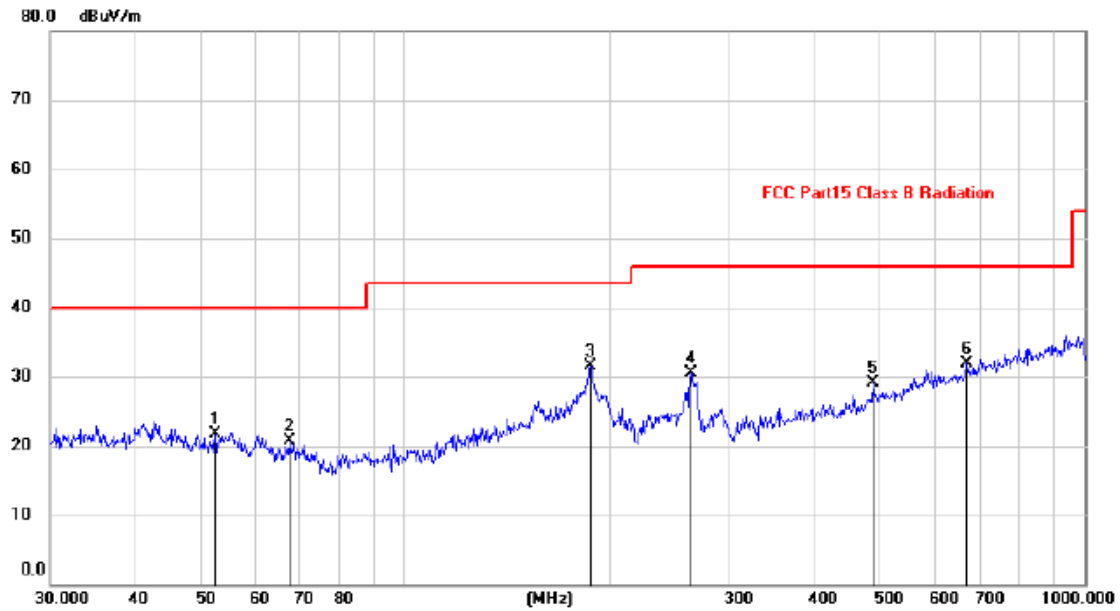

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		52.4157	7.89	13.81	21.70	40.00	-18.30	peak
2		67.4539	8.86	11.78	20.64	40.00	-19.36	peak
3	*	187.5552	19.80	11.77	31.57	43.50	-11.93	peak
4		263.0799	17.51	13.07	30.58	46.00	-15.42	peak
5		487.4859	11.04	18.05	29.09	46.00	-16.91	peak
6		672.2939	10.50	21.35	31.85	46.00	-14.15	peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of a mode, Channel 5180MHz was listed in this report.

Above 1GHz:Band 1**802.11a(HT20) 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.20	52.47	11.25	14.62	32.65	45.69	68.20	-22.51	Vertical
15540.03	51.98	11.93	17.66	34.46	47.11	74.00	-26.89	Vertical
10360.09	50.41	9.4	14.62	32.65	41.78	68.20	-26.42	Horizontal
15540.25	51.29	8.5	17.66	34.46	42.99	74.00	-31.01	Horizontal

802.11a(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.04	52.11	16.29	17.66	34.46	51.60	68.20	-16.60	Vertical
15600.12	50.25	21.83	17.66	34.46	55.28	74.00	-18.72	Vertical
10400.28	52.11	8.73	17.66	34.46	44.04	68.20	-24.16	Horizontal
15600.17	50.99	11.73	17.66	34.46	45.92	74.00	-28.08	Horizontal

802.11a(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.22	51.94	11.25	14.62	32.65	45.16	68.20	-23.04	Vertical
15540.27	49.88	11.93	17.66	34.46	45.01	74.00	-28.99	Vertical
10360.26	51.78	9.4	14.62	32.65	43.15	68.20	-25.05	Horizontal
15540.26	50.44	8.5	17.66	34.46	42.14	74.00	-31.86	Horizontal

802.11n(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.28	48.96	16.29	17.66	34.46	48.45	68.20	-19.75	Vertical
15720.29	50.42	21.83	17.66	34.46	55.45	74.00	-18.55	Vertical
10480.08	49.98	8.73	17.66	34.46	41.91	68.20	-26.29	Horizontal
15720.20	49.61	11.73	17.66	34.46	44.54	74.00	-29.46	Horizontal

802.11n(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.09	49.29	11.25	14.62	32.65	42.51	68.20	-25.69	Vertical
15600.20	50.48	11.93	17.66	34.46	45.61	74.00	-28.39	Vertical
10400.06	49.01	9.4	14.62	32.65	40.38	68.20	-27.82	Horizontal
15600.20	52.24	8.5	17.66	34.46	43.94	74.00	-30.06	Horizontal

802.11n(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.08	50.52	16.29	17.66	34.46	50.01	68.20	-18.19	Vertical
15720.02	49.43	21.83	17.66	34.46	54.46	74.00	-19.54	Vertical
10480.21	52.24	8.73	17.66	34.46	44.17	68.20	-24.03	Horizontal
15720.20	51.20	11.73	17.66	34.46	46.13	74.00	-27.87	Horizontal

802.11ac(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.02	49.59	11.25	14.62	32.65	42.81	68.20	-25.39	Vertical
15540.31	51.73	11.93	17.66	34.46	46.86	74.00	-27.14	Vertical
10360.11	49.32	9.4	14.62	32.65	40.69	68.20	-27.51	Horizontal
15540.03	48.96	8.5	17.66	34.46	40.66	74.00	-33.34	Horizontal

802.11ac(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.27	51.46	16.29	17.66	34.46	50.95	68.20	-17.25	Vertical
15600.27	52.04	21.83	17.66	34.46	57.07	74.00	-16.93	Vertical
10400.13	52.09	8.73	17.66	34.46	44.02	68.20	-24.18	Horizontal
15600.18	49.90	11.73	17.66	34.46	44.83	74.00	-29.17	Horizontal

802.11ac(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.23	49.48	16.29	17.66	34.46	48.97	68.20	-19.23	Vertical
15720.18	49.15	21.83	17.66	34.46	54.18	74.00	-19.82	Vertical
10480.32	49.50	8.73	17.66	34.46	41.43	68.20	-26.77	Horizontal
15720.15	48.65	11.73	17.66	34.46	43.58	74.00	-30.42	Horizontal

802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	52.28	11.25	14.62	32.65	45.50	68.20	-22.70	Vertical
15570.14	50.85	11.93	17.66	34.46	45.98	74.00	-28.02	Vertical
10380.26	51.18	9.4	14.62	32.65	42.55	68.20	-25.65	Horizontal
15570.03	51.17	8.5	17.66	34.46	42.87	74.00	-31.13	Horizontal

802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.04	52.54	11.25	14.62	32.65	45.76	68.20	-22.44	Vertical
15690.02	51.00	11.93	17.66	34.46	46.13	74.00	-27.87	Vertical
10460.22	49.88	9.4	14.62	32.65	41.25	68.20	-26.95	Horizontal
15690.22	49.28	8.5	17.66	34.46	40.98	74.00	-33.02	Horizontal

802.11ac(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.01	48.62	16.29	17.66	34.46	48.11	68.20	-20.09	Vertical
15570.07	49.93	21.83	17.66	34.46	54.96	74.00	-19.04	Vertical
10380.20	50.09	8.73	17.66	34.46	42.02	68.20	-26.18	Horizontal
15570.16	49.14	11.73	17.66	34.46	44.07	74.00	-29.93	Horizontal

802.11ac(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.07	49.33	11.25	14.62	32.65	42.55	68.20	-25.65	Vertical
15690.21	49.15	11.93	17.66	34.46	44.28	74.00	-29.72	Vertical
10460.17	52.08	9.4	14.62	32.65	43.45	68.20	-24.75	Horizontal
15690.32	52.28	8.5	17.66	34.46	43.98	74.00	-30.02	Horizontal

802.11ac(HT80) 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.15	50.43	16.29	17.66	34.46	49.92	68.20	-18.28	Vertical
15630.04	51.28	21.83	17.66	34.46	56.31	74.00	-17.69	Vertical
10420.13	49.20	8.73	17.66	34.46	41.13	68.20	-27.07	Horizontal
15630.06	48.81	11.73	17.66	34.46	43.74	74.00	-30.26	Horizontal

Above 1GHz: Band 4**802.11a(HT20) 5745MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.10	49.00	11.25	14.62	32.65	42.22	74.00	-31.78	Vertical
17235.17	50.05	11.93	17.66	34.46	45.18	68.20	-23.02	Vertical
11490.23	51.89	9.4	14.62	32.65	43.26	74.00	-30.74	Horizontal
17235.25	49.34	8.5	17.66	34.46	41.04	68.20	-27.16	Horizontal

802.11a(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11750.14	50.40	16.29	17.66	34.46	49.89	74.00	-24.11	Vertical
17625.14	50.04	21.83	17.66	34.46	55.07	68.20	-13.13	Vertical
11750.11	52.02	8.73	17.66	34.46	43.95	74.00	-30.05	Horizontal
17625.21	50.90	11.73	17.66	34.46	45.83	68.20	-22.37	Horizontal

802.11a(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.01	50.21	11.25	14.62	32.65	43.43	74.00	-30.57	Vertical
17475.17	52.16	11.93	17.66	34.46	47.29	68.20	-20.91	Vertical
11650.04	50.10	9.4	14.62	32.65	41.47	74.00	-32.53	Horizontal
17475.18	50.67	8.5	17.66	34.46	42.37	68.20	-25.83	Horizontal

802.11n(HT20) 5745MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.10	49.13	16.29	17.66	34.46	48.62	74.00	-25.38	Vertical
17235.20	51.94	21.83	17.66	34.46	56.97	68.20	-11.23	Vertical
11490.21	49.05	8.73	17.66	34.46	40.98	74.00	-33.02	Horizontal
17235.12	51.00	11.73	17.66	34.46	45.93	68.20	-22.27	Horizontal

802.11n(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.23	51.64	11.25	14.62	32.65	44.86	74.00	-29.14	Vertical
17355.31	51.53	11.93	17.66	34.46	46.66	68.20	-21.54	Vertical
11570.23	51.24	9.4	14.62	32.65	42.61	74.00	-31.39	Horizontal
17355.12	52.45	8.5	17.66	34.46	44.15	68.20	-24.05	Horizontal

802.11n(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.01	49.02	16.29	17.66	34.46	48.51	74.00	-25.49	Vertical
17475.22	50.20	21.83	17.66	34.46	55.23	68.20	-12.97	Vertical
11650.11	50.43	8.73	17.66	34.46	42.36	74.00	-31.64	Horizontal
17475.16	48.74	11.73	17.66	34.46	43.67	68.20	-24.53	Horizontal

802.11ac(HT20) 5745MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.26	49.98	11.25	14.62	32.65	43.20	74.00	-30.80	Vertical
17235.01	52.70	11.93	17.66	34.46	47.83	68.20	-20.37	Vertical
11490.08	52.46	9.4	14.62	32.65	43.83	74.00	-30.17	Horizontal
17235.15	52.19	8.5	17.66	34.46	43.89	68.20	-24.31	Horizontal

802.11ac(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Lev785el (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.14	49.22	16.29	17.66	34.46	48.71	74.00	-25.29	Vertical
17355.16	49.45	21.83	17.66	34.46	54.48	68.20	-13.72	Vertical
11570.20	48.65	8.73	17.66	34.46	40.58	74.00	-33.42	Horizontal
17355.08	50.16	11.73	17.66	34.46	45.09	68.20	-23.11	Horizontal

802.11ac(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.09	51.08	11.25	14.62	32.65	44.30	74.00	-29.70	Vertical
17475.31	52.12	11.93	17.66	34.46	47.25	68.20	-20.95	Vertical
11650.16	50.80	9.4	14.62	32.65	42.17	74.00	-31.83	Horizontal
17475.05	52.51	8.5	17.66	34.46	44.21	68.20	-23.99	Horizontal

802.11n(HT40) 5755MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.12	49.96	16.29	17.66	34.46	49.45	74.00	-24.55	Vertical
17265.25	50.38	21.83	17.66	34.46	55.41	68.20	-12.79	Vertical
11510.23	50.38	8.73	17.66	34.46	42.31	74.00	-31.69	Horizontal
17265.12	50.77	11.73	17.66	34.46	45.70	68.20	-22.50	Horizontal

802.11n(HT40) 5795MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.04	51.03	11.25	14.62	32.65	44.25	74.00	-29.75	Vertical
17385.28	50.34	11.93	17.66	34.46	45.47	68.20	-22.73	Vertical
11590.15	52.60	9.4	14.62	32.65	43.97	74.00	-30.03	Horizontal
17385.11	49.56	8.5	17.66	34.46	41.26	68.20	-26.94	Horizontal

802.11ac(HT40) 5755MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.08	49.77	16.29	17.66	34.46	49.26	74.00	-24.74	Vertical
17265.13	50.34	21.83	17.66	34.46	55.37	68.20	-12.83	Vertical
11510.01	50.00	8.73	17.66	34.46	41.93	74.00	-32.07	Horizontal
17265.08	50.07	11.73	17.66	34.46	45.00	68.20	-23.20	Horizontal

802.11ac(HT40) 5795MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.09	50.67	11.25	14.62	32.65	43.89	74.00	-30.11	Vertical
17385.31	49.55	11.93	17.66	34.46	44.68	68.20	-23.52	Vertical
11590.03	50.88	9.4	14.62	32.65	42.25	74.00	-31.75	Horizontal
17385.06	48.97	8.5	17.66	34.46	40.67	68.20	-27.53	Horizontal

802.11ac(HT80) 5775MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.24	51.47	16.29	17.66	34.46	50.96	74.00	-23.04	Vertical
17265.13	52.02	21.83	17.66	34.46	57.05	68.20	-11.15	Vertical
11510.26	50.42	8.73	17.66	34.46	42.35	74.00	-31.65	Horizontal
17265.09	49.52	11.73	17.66	34.46	44.45	68.20	-23.75	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test plots of the worst case.

4.8 Frequency stability

Test limit	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test results:	Pass


Measurement Data:

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	DC 3.2V	5179.992	8	5239.991	9
	DC 3.7V	5179.991	9	5239.990	10
	DC 4.2V	5179.994	6	5239.990	10
Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	DC 3.2V	5744.990	10	5824.991	9
	DC 7.2V	5744.991	9	5824.987	13
	DC 4.2V	5744.992	8	5824.991	9


Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	-20°C	5179.993	7	5239.993	7
	-10°C	5179.989	11	5239.987	13
	-5°C	5179.991	9	5239.994	6
	0°C	5179.994	6	5239.992	8
	+10°C	5179.993	7	5239.994	6
	+20°C	5179.991	9	5239.989	11
	+30°C	5179.991	9	5239.988	12
	+40°C	5179.991	9	5239.990	10
	+50°C	5179.992	8	5239.987	13
Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	-20°C	5744.994	6	5824.990	10
	-10°C	5744.987	13	5824.991	9
	-5°C	5744.994	6	5824.992	8
	0°C	5744.994	6	5824.994	6
	+10°C	5744.992	8	5824.995	5
	+20°C	5744.990	10	5824.991	9
	+30°C	5744.990	10	5824.990	10
	+40°C	5744.988	12	5824.990	10
	+50°C	5744.992	8	5824.992	8

5 Test setup photo

5.1 Photos of Radiated emission

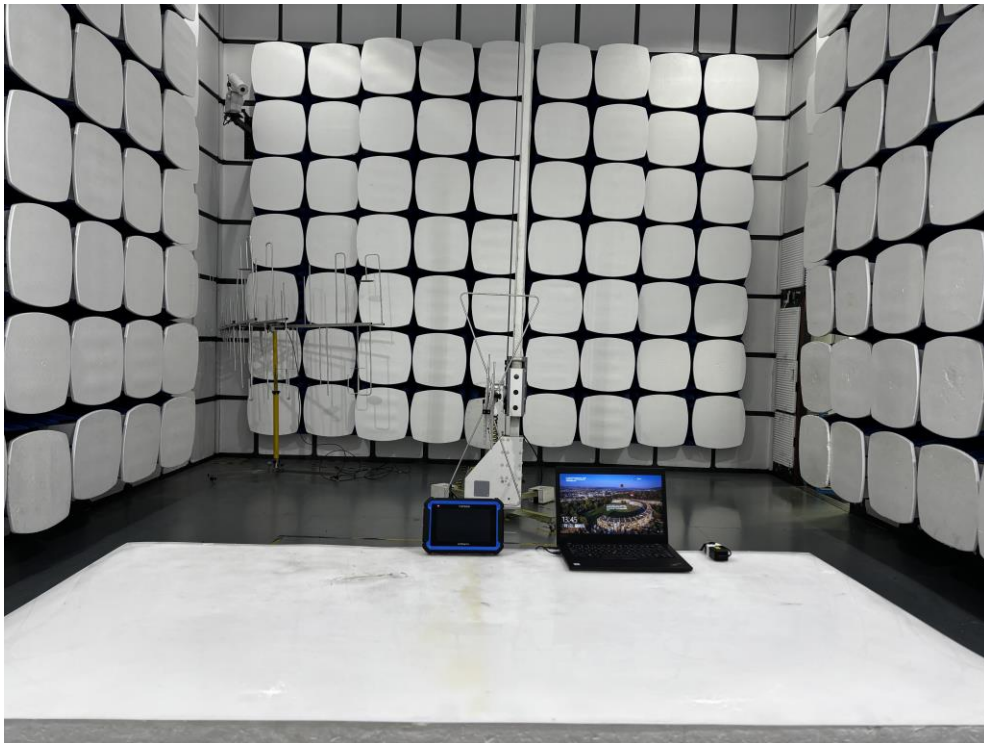

5.2 Photos of Conducted Emission test

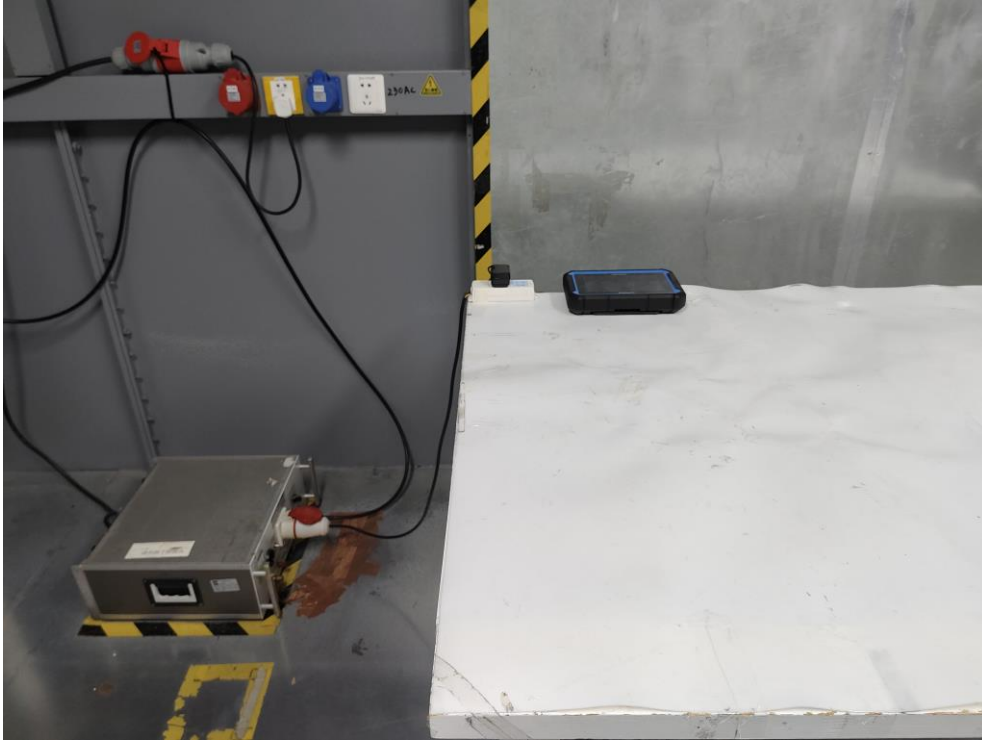

-----END OF REPORT-----