



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03



中国认可
国际互认
检测
TESTING
CNAS L5785

TEST REPORT

Report No.: CQASZ20250701536E-03
Applicant: TOPDON TECHNOLOGY Co., Ltd.
Address of Applicant: Unit 2005 20/F, Qianhai Shima Tower, Qianhai Shenzhen-Hong Kong Cooperation Zone Shenzhen China
Equipment Under Test (EUT):
Product: Automotive Diagnostic Tool, GOOLOO Diagnostic Tool
Model No.: ArtiDiag900 Lite, UltraDiag, T-Ninja Pro, UltraDiag Moto, DS900
Test Model No.: ArtiDiag900 Lite
Brand Name:  
FCC ID: 2AVYW-UD900TN
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013
Date of Receipt: 2025-07-03
Date of Test: 2025-07-03 to 2025-07-31
Date of Issue: 2025-08-11
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.



Shenzhen Huaxia Testing Technology Co., Ltd.

Report No.: CQASZ20250701536E-03

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250701536E-03	Rev.01	Initial report	2025-08-11

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	3
2 TEST SUMMARY	4
3 CONTENTS	5
.....	6
4 GENERAL INFORMATION	7
4.1 CLIENT INFORMATION	7
4.2 GENERAL DESCRIPTION OF EUT	7
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
4.4 TEST ENVIRONMENT AND MODE	10
4.5 DESCRIPTION OF SUPPORT UNITS	14
4.6 TEST LOCATION	14
4.7 TEST FACILITY	14
4.8 TEST CONFIGURATION	14
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY	15
4.10 DEVIATION FROM STANDARDS	15
4.11 ABNORMALITIES FROM STANDARD CONDITIONS	15
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER	15
4.13 EQUIPMENT LIST	16
5 TEST RESULTS AND MEASUREMENT DATA	17
5.1 ANTENNA REQUIREMENT	17
5.2 CONDUCTED EMISSIONS	18
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	22
Test Result	23
Note: Duty cycle correction factor details please see section 4.4.	23
When Duty cycle >98%, D.C.F is not required.	23
Test Graphs	24
5.4 99% OCCUPIED BANDWIDTH	29
Test Result	30
Test Graphs	31
5.5 6dB OCCUPIED BANDWIDTH	36
Test Result	37
Test Graphs	38
5.6 POWER SPECTRAL DENSITY	43
Test Result	44
Test Graphs	45
5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS	50
Test Result	51
5.7.1 Test Graphs	52
5.8 RF CONDUCTED SPURIOUS EMISSIONS	56
Test Result	57
Test Graphs	59
5.9 RADIATED SPURIOUS EMISSIONS	74
5.9.1 Radiated emission below 1GHz	77
5.9.2 Transmitter emission above 1GHz	79
5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	87
6 PHOTOGRAPHS - EUT TEST SETUP	93
6.1 RADIATED SPURIOUS EMISSION	93

6.2 CONDUCTED EMISSION	94
6.3 RF CONDUCTED MEASUREMENT	96
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	97

4 General Information

4.1 Client Information

Applicant:	TOPDON TECHNOLOGY Co., Ltd.
Address of Applicant:	Unit 2005 20/F, Qianhai Shima Tower, Qianhai Shenzhen-Hong kong Cooperation Zone Shenzhen China
Manufacturer:	TOPDON TECHNOLOGY Co., Ltd.
Address of Manufacturer:	Unit 2005 20/F, Qianhai Shima Tower, Qianhai Shenzhen-Hong kong Cooperation Zone Shenzhen China
Factory:	TOPDON TECHNOLOGY Co., Ltd.
Address of Factory:	Unit 2005 20/F, Qianhai Shima Tower, Qianhai Shenzhen-Hong kong Cooperation Zone Shenzhen China

4.2 General Description of EUT

Product Name:	Automotive Diagnostic Tool, GOOLOO Diagnostic Tool
Model No.:	ArtiDiag900 Lite, UltraDiag, T-Ninja Pro, UltraDiag Moto, DS900
Test Model No.:	ArtiDiag900 Lite
Trade Mark:	
Software Version:	V2.01.002
Hardware Version:	R0.2
Power Supply:	Li-ion battery: DC 3.8V 10000mAh, Charge by DC 5V for adapter Adapter: Model:MX24Z1-1202000 Input:100-240V~50-60Hz 0.7A Output:12V 2.0A 24W
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g :

	6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Test Software of EUT:	Android
Antenna Type:	FPC antenna
Antenna Gain:	4.78dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz


For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

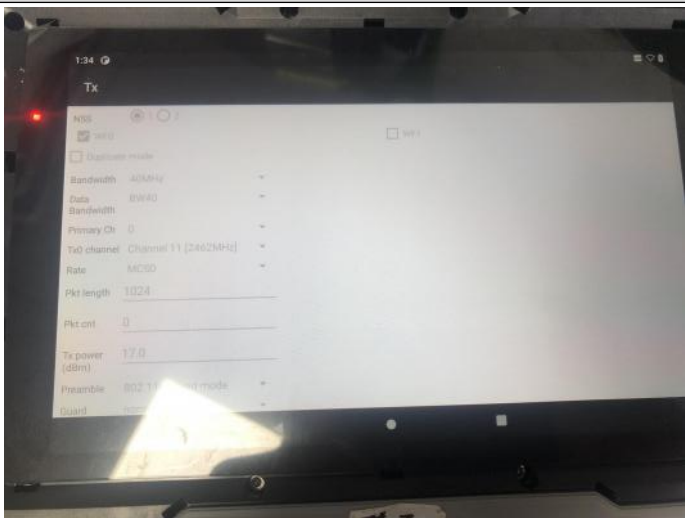
Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class17
Run Software:	
	

Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	50.00	50.00	100.00	/
IEEE802.11g	50.00	50.00	100.00	/
IEEE802.11n (HT20)	50.00	50.00	100.00	/
IEEE802.11n (HT40)	50.00	50.00	100.00	/

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_IEEE802.11b Duty Cycle:

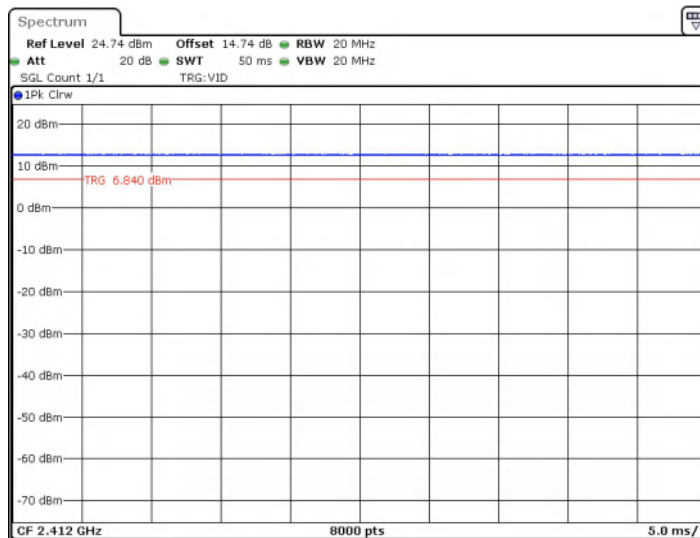


Date: 16 JUL 2025 12:55:10

Test Graph_IEEE802.11g Duty Cycle:

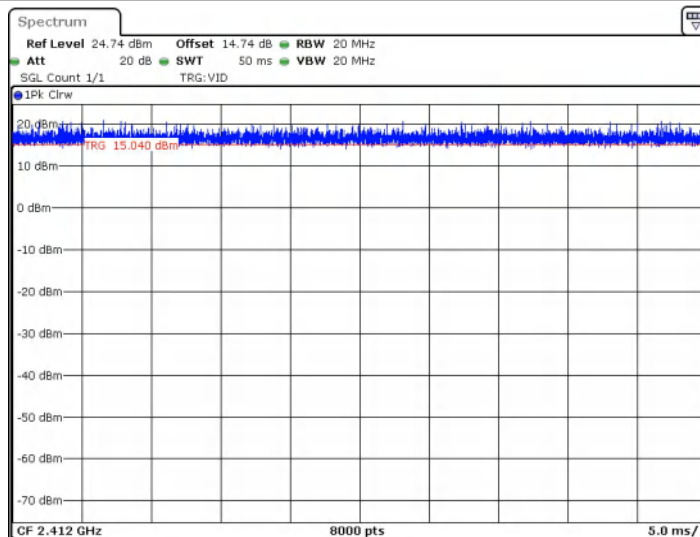


Date: 16 JUL 2025 12:34:00

Test Graph_IEEE802.11 n (HT20) Duty Cycle:

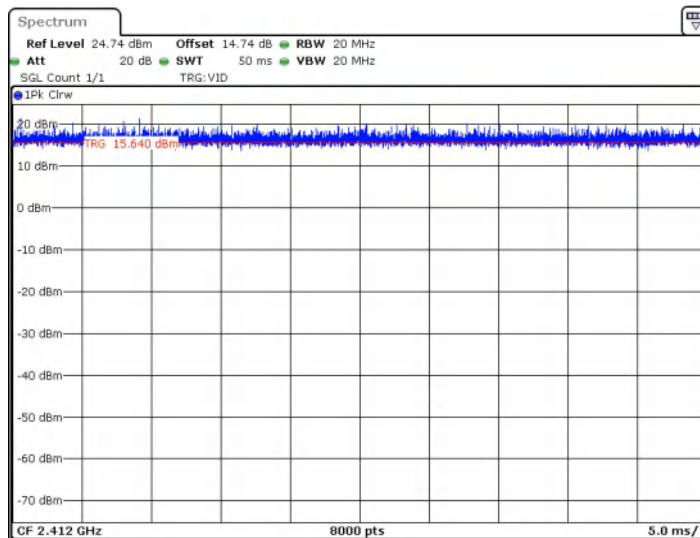

Date: 16 JUL 2025 12:44:10

Test Graph_IEEE802.11 n (HT40) Duty Cycle:

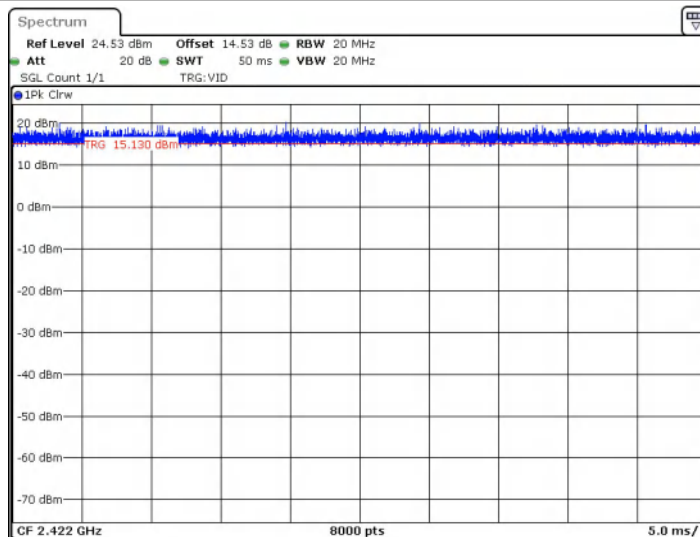

Date: 16 JUL 2025 12:49:38

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:


• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

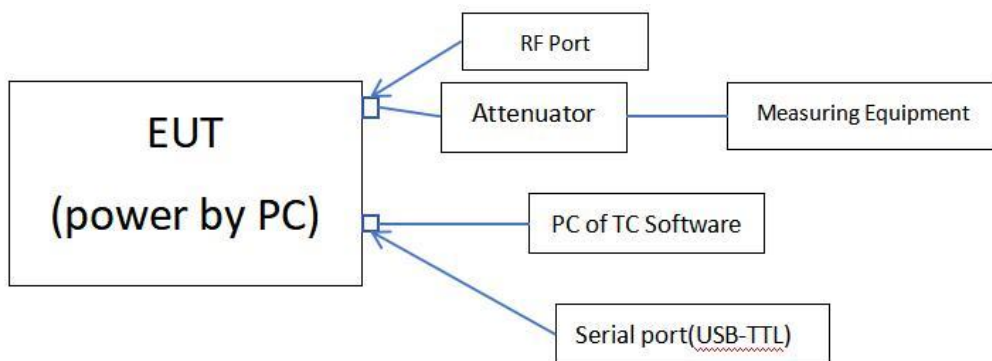

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Power meter	R&S	NRVD	CQA-029	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2	2025/9/1

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

5 Test results and Measurement Data

5.1 Antenna Requirement

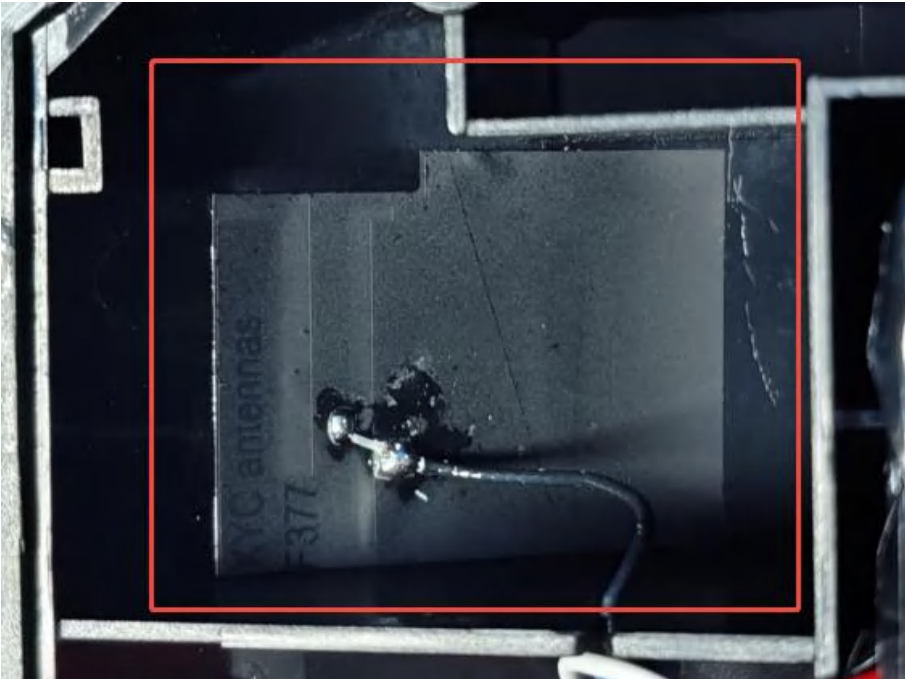Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is FPC antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling. This is either permanently attachment or a unique coupling that satisfies the requirement.	


5.2 Conducted Emissions

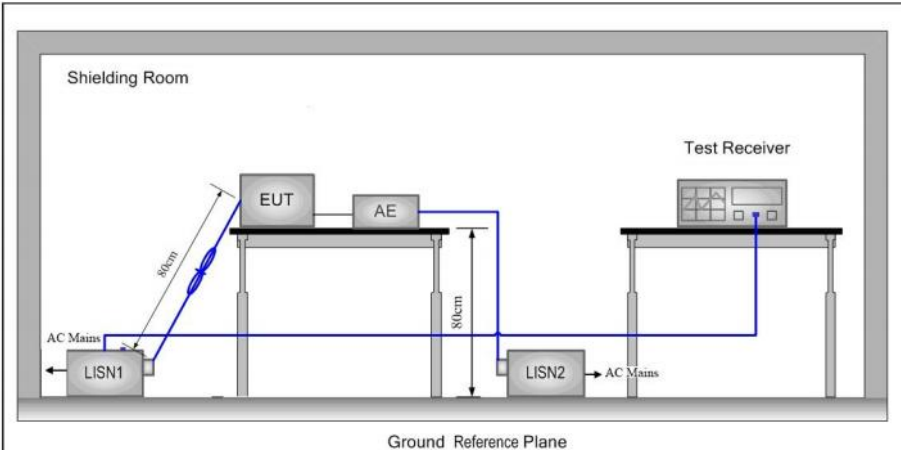Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

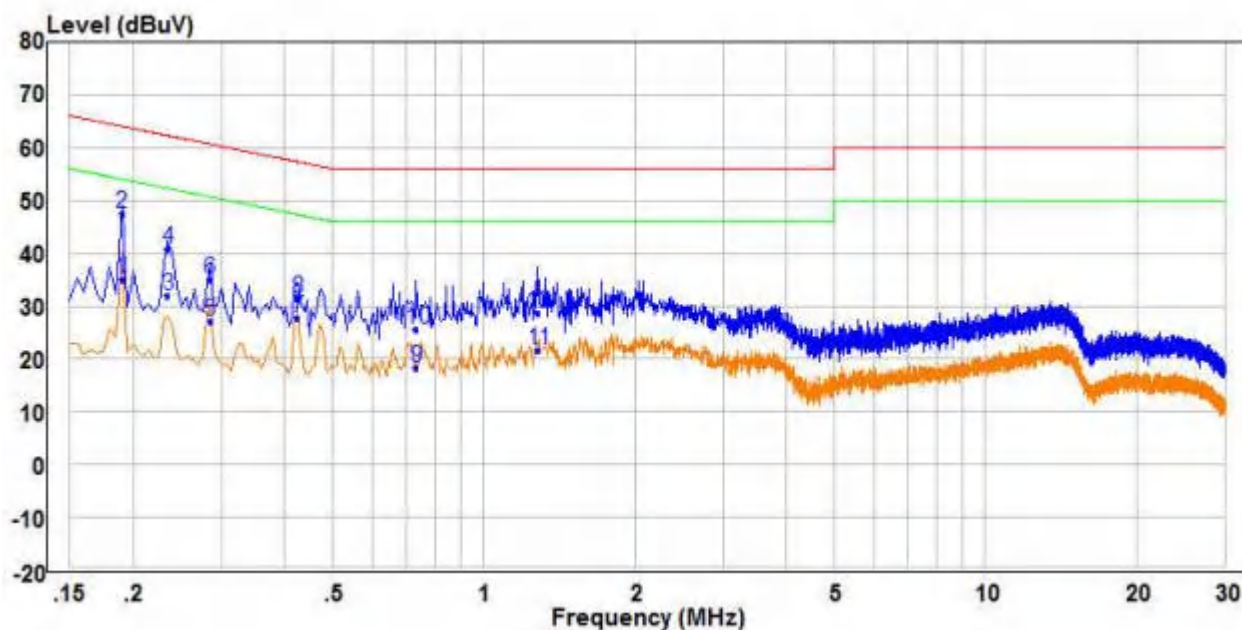


		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	AV	0.190	25.26	9.63	34.89	54.04	-19.15	Average	Line
2	PP	0.190	37.94	9.63	47.57	64.04	-16.47	QP	Line
3		0.235	22.39	9.56	31.95	52.27	-20.32	Average	Line
4		0.235	31.20	9.56	40.76	62.27	-21.51	QP	Line
5		0.285	17.49	9.51	27.00	50.67	-23.67	Average	Line
6		0.285	25.58	9.51	35.09	60.67	-25.58	QP	Line
7		0.425	17.95	9.63	27.58	47.35	-19.77	Average	Line
8		0.425	21.84	9.63	31.47	57.35	-25.88	QP	Line
9		0.735	8.33	9.88	18.21	46.00	-27.79	Average	Line
10		0.735	15.76	9.88	25.64	56.00	-30.36	QP	Line
11		1.285	11.29	10.40	21.69	46.00	-24.31	Average	Line
12		1.285	18.16	10.40	28.56	56.00	-27.44	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

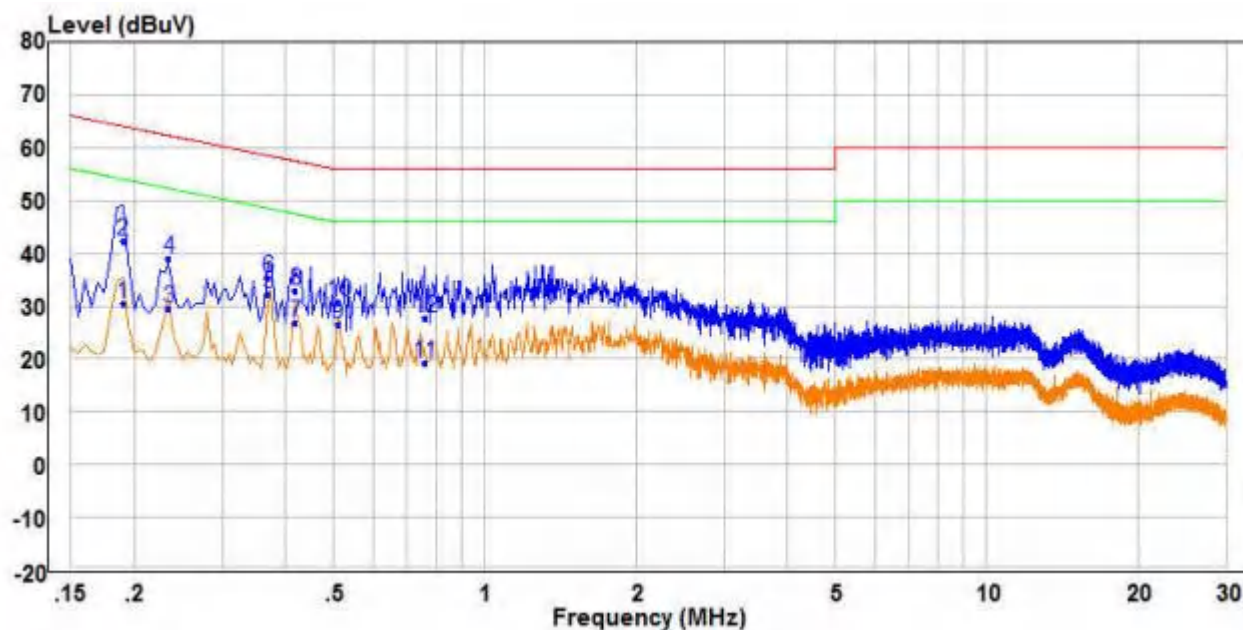


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.190	20.90	9.62	30.52	54.04	-23.52	Average	Neutral
2	QP 0.190	32.84	9.62	42.46	64.04	-21.58	QP	Neutral
3	0.235	19.94	9.56	29.50	52.27	-22.77	Average	Neutral
4	0.235	29.50	9.56	39.06	62.27	-23.21	QP	Neutral
5	PP 0.370	22.75	9.57	32.32	48.50	-16.18	Average	Neutral
6	0.370	25.61	9.57	35.18	58.50	-23.32	QP	Neutral
7	0.420	17.15	9.62	26.77	47.45	-20.68	Average	Neutral
8	0.420	23.35	9.62	32.97	57.45	-24.48	QP	Neutral
9	0.510	16.90	9.71	26.61	46.00	-19.39	Average	Neutral
10	0.510	21.21	9.71	30.92	56.00	-25.08	QP	Neutral
11	0.760	9.44	9.86	19.30	46.00	-26.70	Average	Neutral
12	0.760	17.89	9.86	27.75	56.00	-28.25	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	<i>Setup for Power meter measurement method</i>  <i>Setup for Spectrum analyser measurement method</i> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result


Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	10.21	≤30.00	PASS
	2437	11.65	≤30.00	PASS
	2462	10.72	≤30.00	PASS
11G	2412	9.91	≤30.00	PASS
	2437	11.08	≤30.00	PASS
	2462	10.32	≤30.00	PASS
11N20SISO	2412	9.66	≤30.00	PASS
	2437	10.85	≤30.00	PASS
	2462	10.25	≤30.00	PASS
11N40SISO	2422	10.25	≤30.00	PASS
	2437	10.63	≤30.00	PASS
	2452	10.25	≤30.00	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs

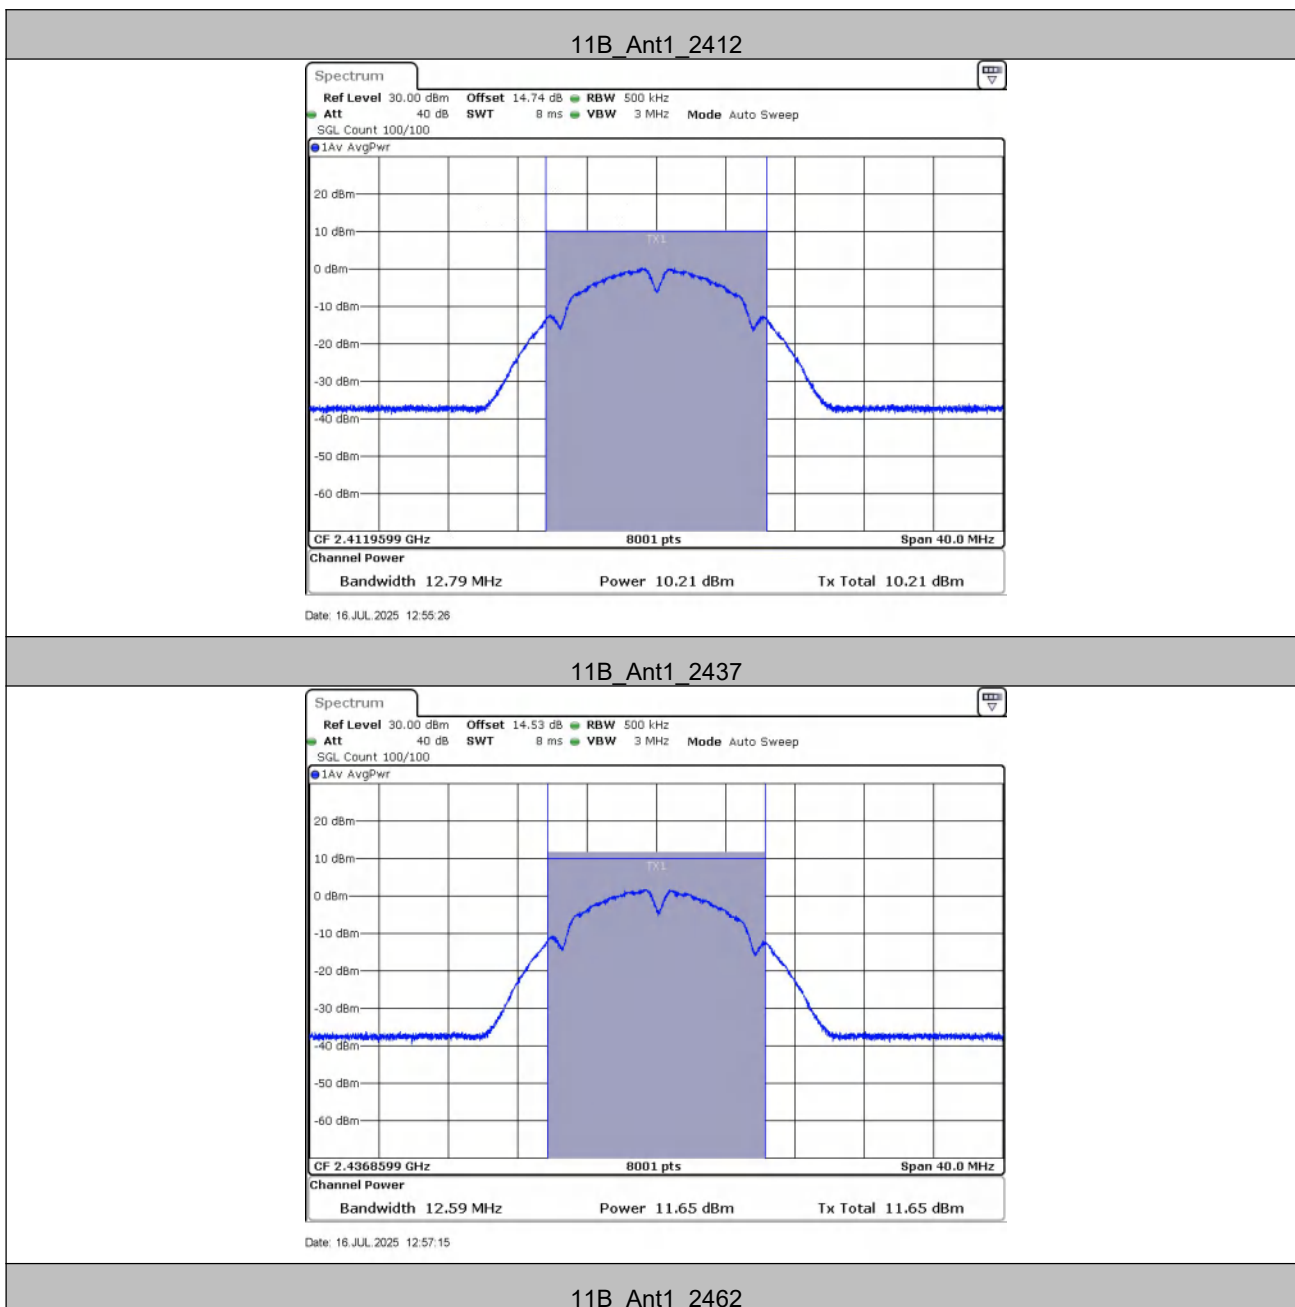


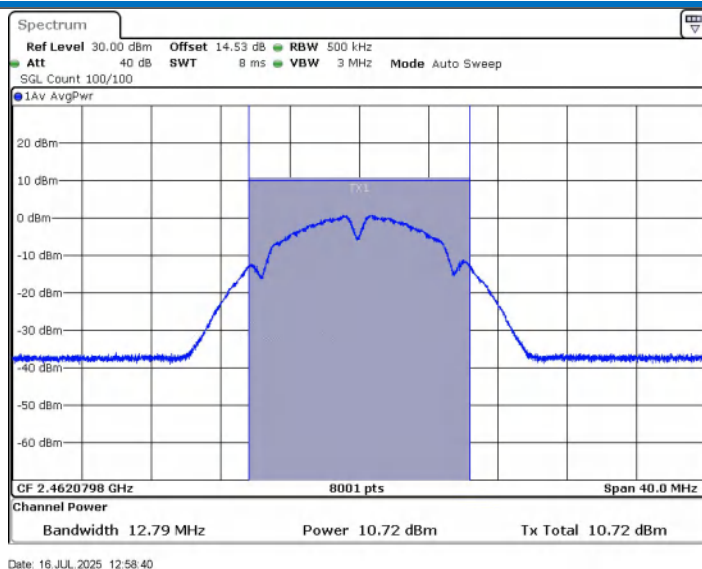


11G_Ant1_2412

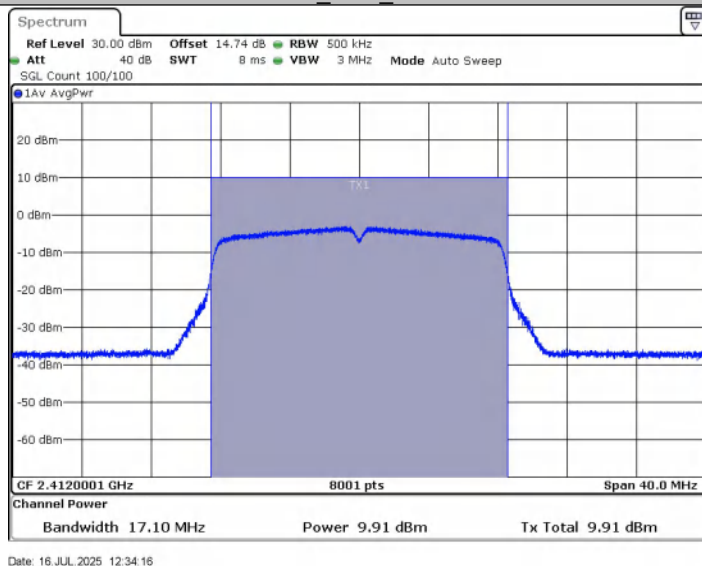

11G_Ant1_2437

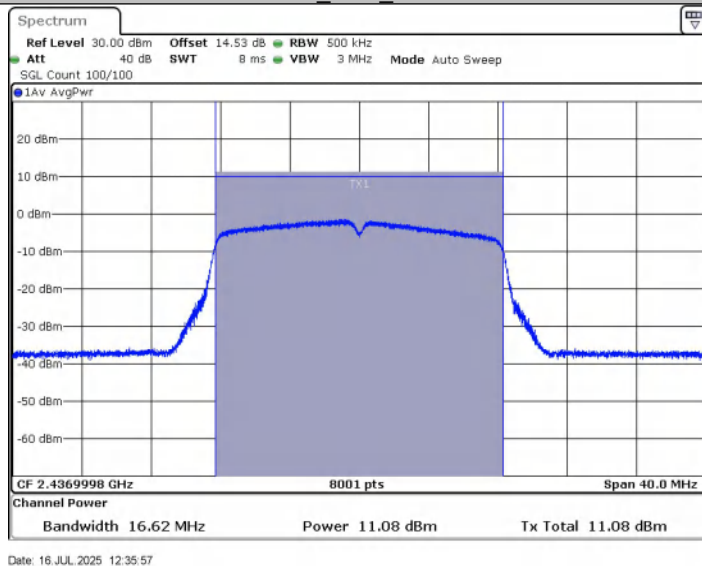


11G_Ant1_2462

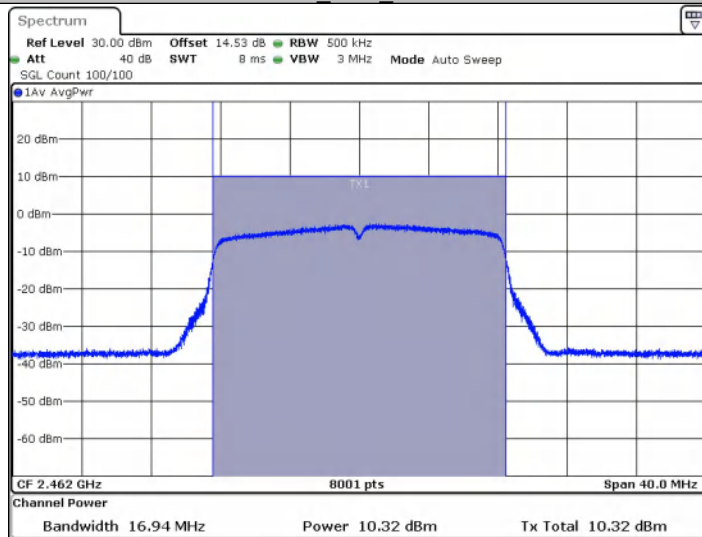


Date: 16 JUL 2025 12:37:33

11N20SISO_Ant1_2412

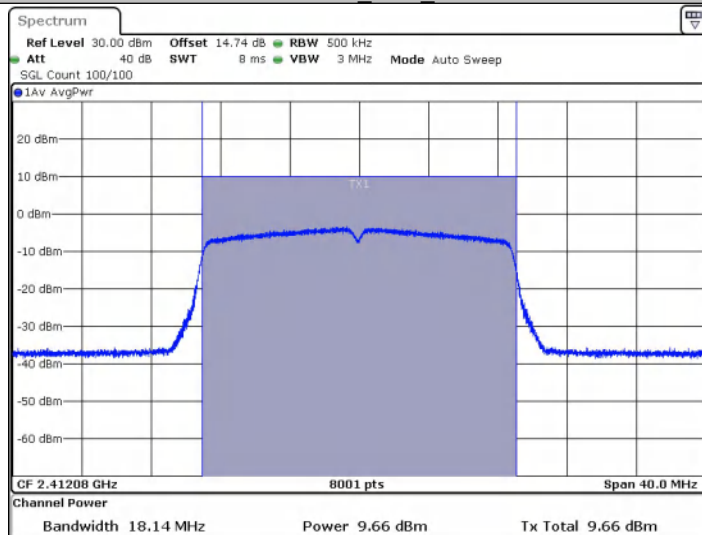


Date: 16 JUL 2025 12:44:26


11N20SISO_Ant1_2437

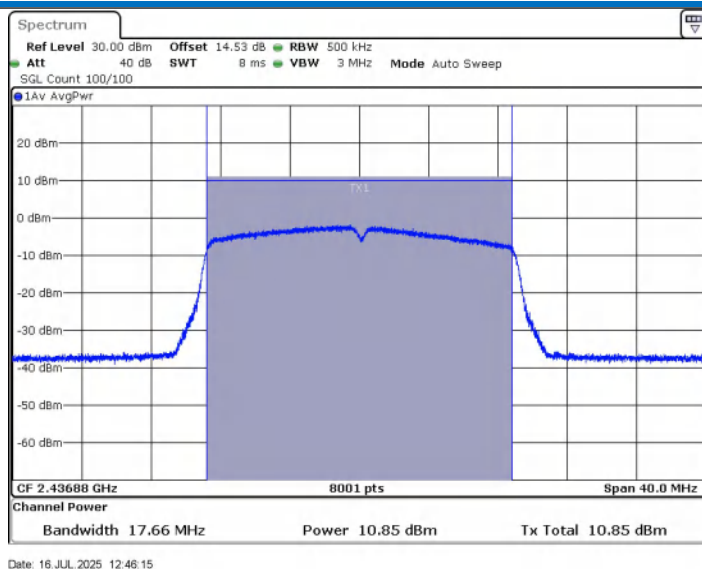


11N20SISO_Ant1_2462

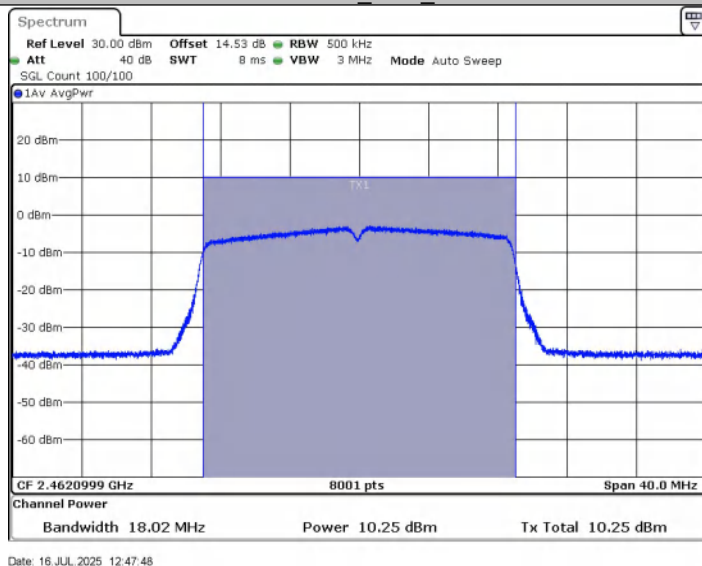

11N40SISO_Ant1_2422

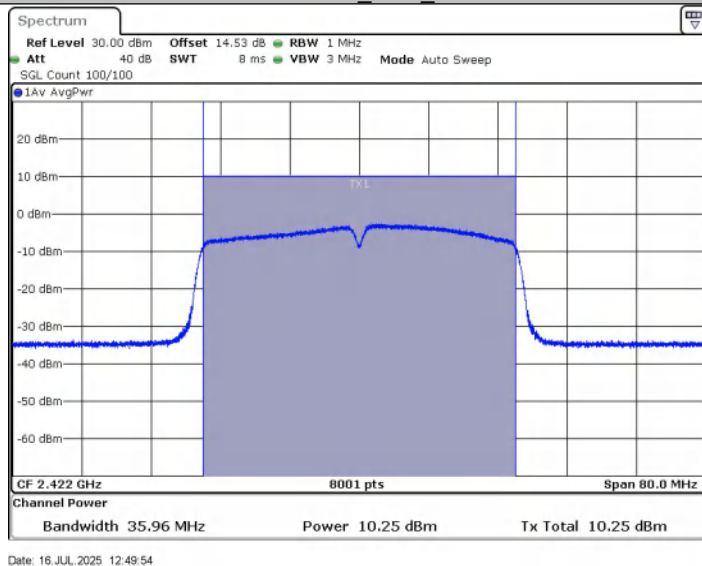


11N40SISO_Ant1_2437

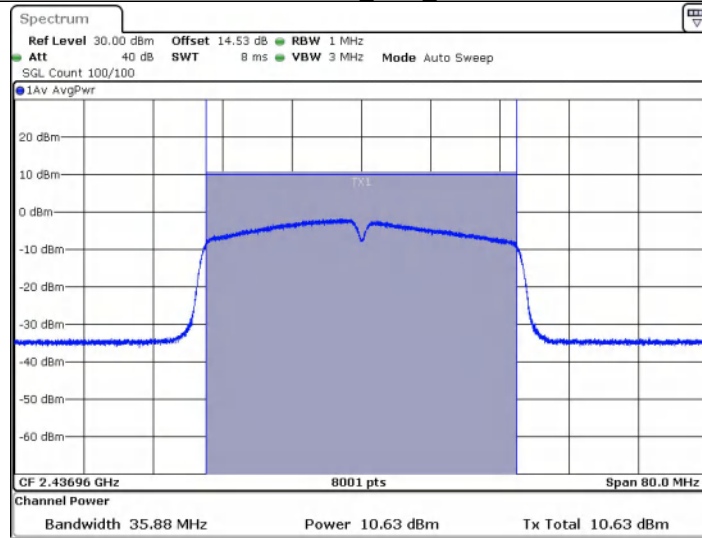


Date: 16 JUL 2025 12:51:37

11N40SISO_Ant1_2452

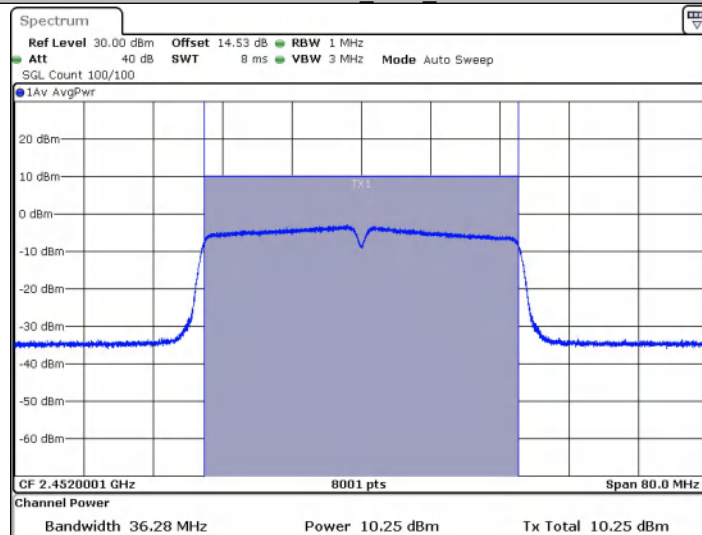

Date: 16 JUL 2025 12:53:38


5.4 99% Occupied Bandwidth


Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Test Result


TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	12.787	2405.5664	2418.3536
	2437	12.587	2430.5664	2443.1538
	2462	12.787	2455.6863	2468.4735
11G	2412	17.103	2403.4486	2420.5514
	2437	16.623	2428.6883	2445.3117
	2462	16.943	2453.5285	2470.4715
11N20SISO	2412	18.142	2403.0090	2421.1508
	2437	17.662	2428.0490	2445.7113
	2462	18.022	2453.0889	2471.1109
11N40SISO	2422	35.964	2404.0180	2439.9820
	2437	35.884	2419.0180	2454.9021
	2452	36.284	2433.8581	2470.1419

Test Graphs

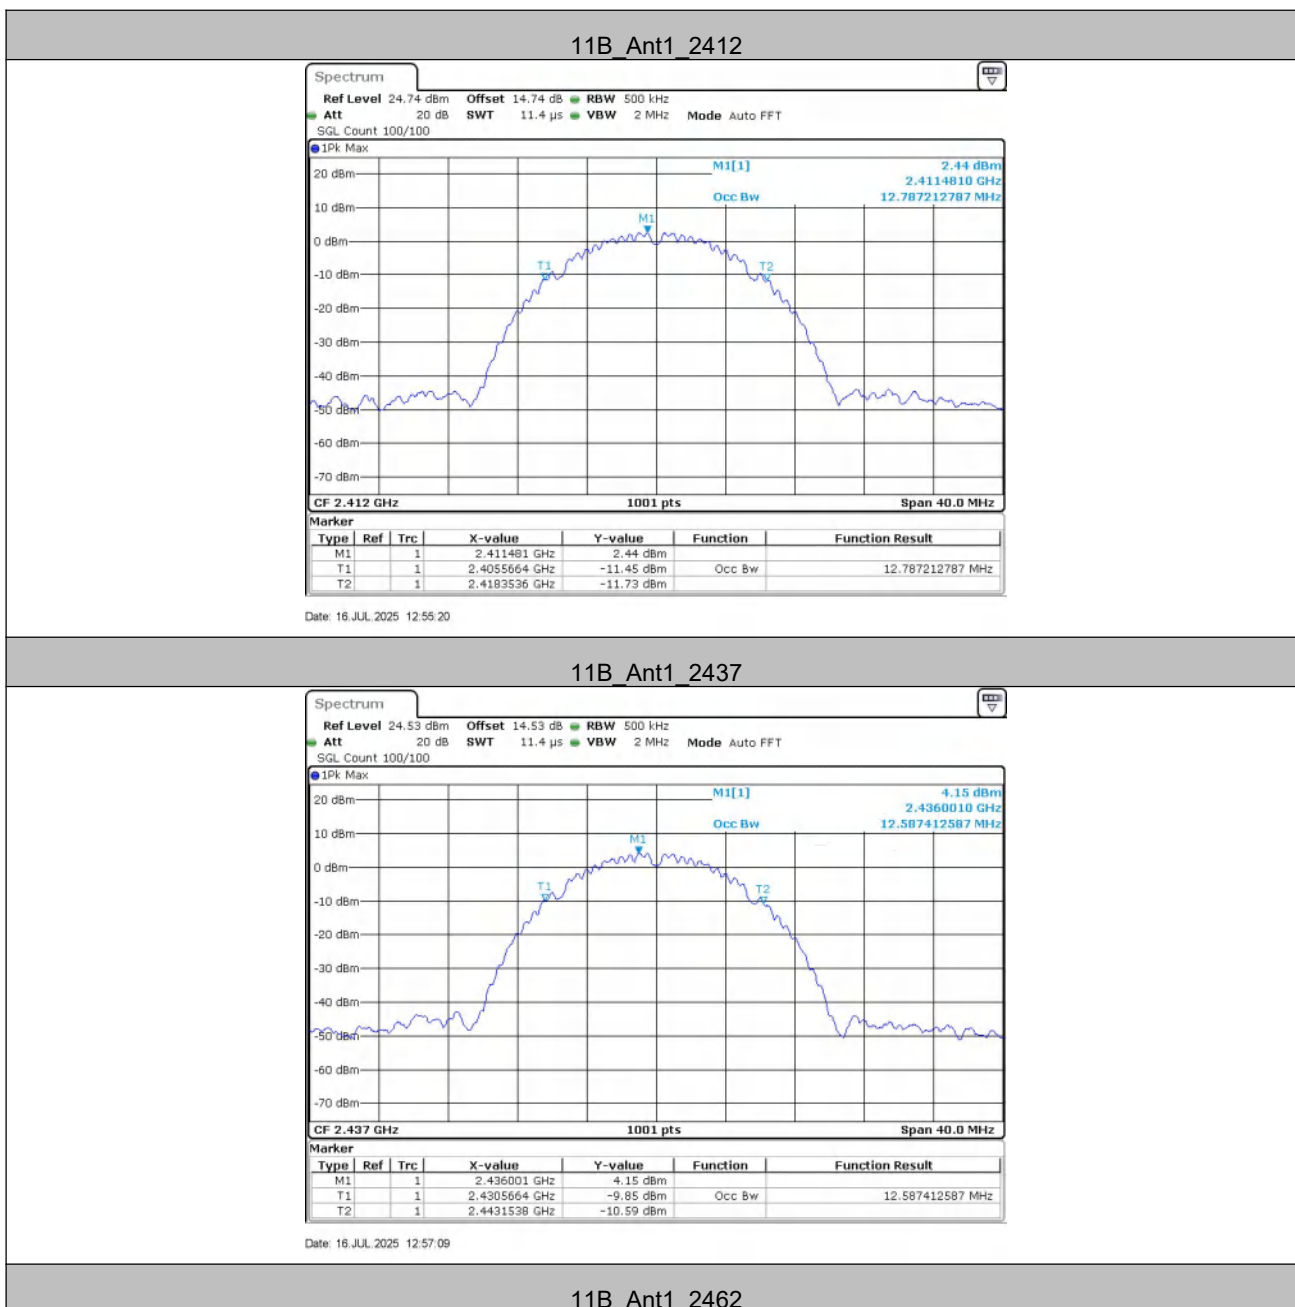


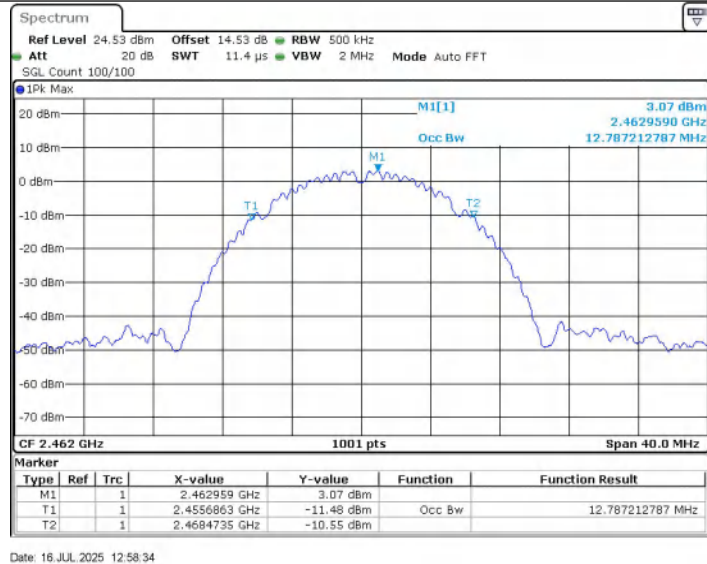


11G_Ant1_2412

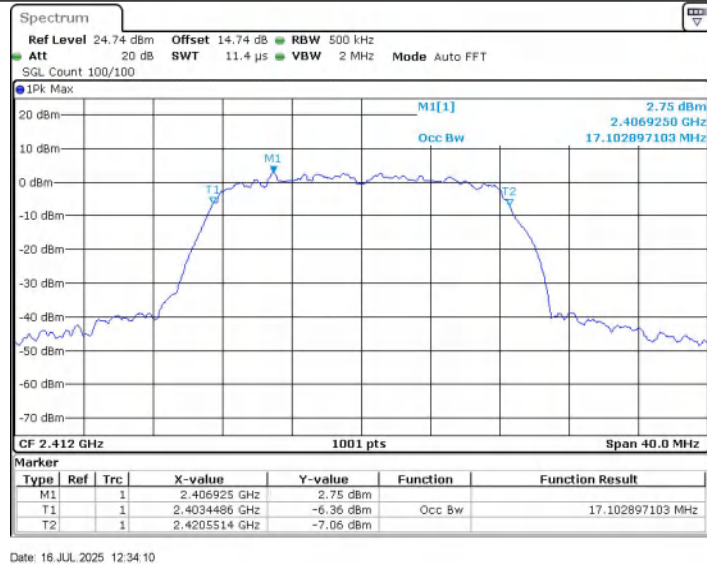

11G_Ant1_2437

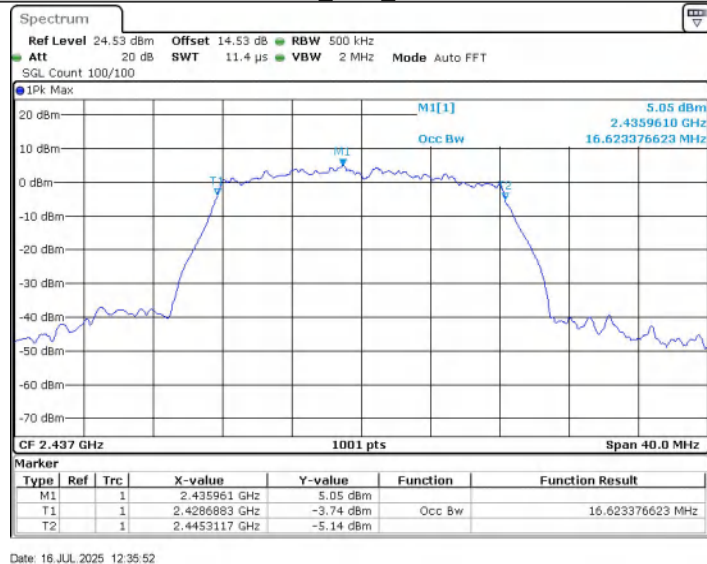


11G_Ant1_2462

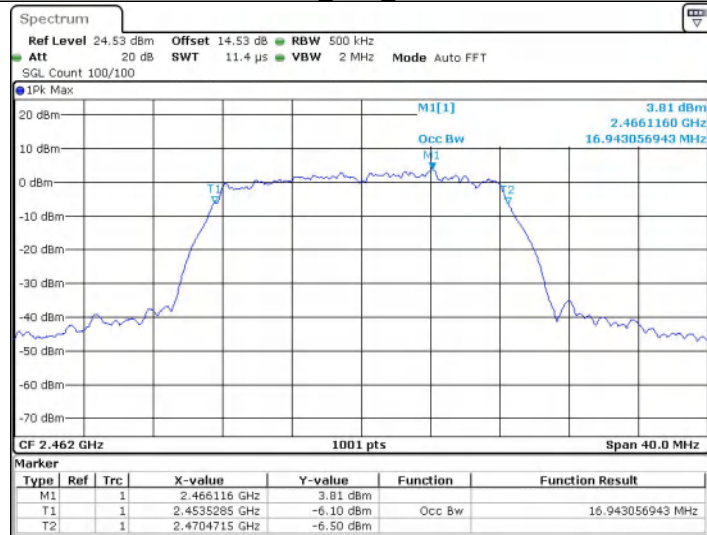


Date: 16 JUL 2025 12:37:27

11N20SISO_Ant1_2412

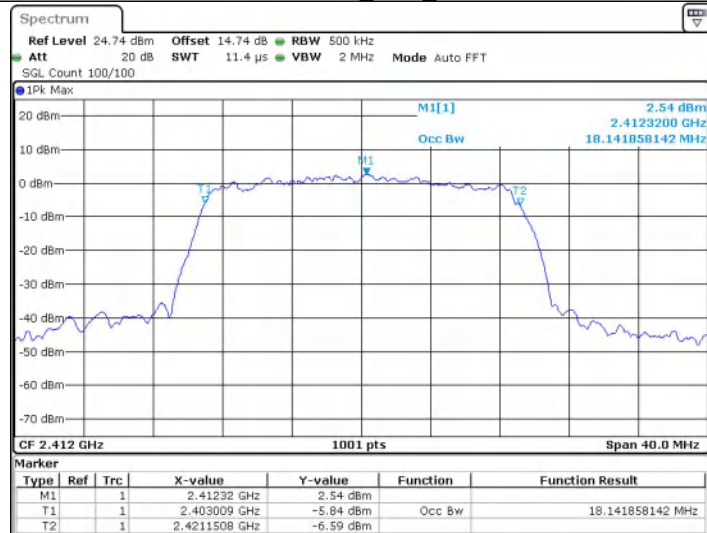


Date: 16 JUL 2025 12:44:20


11N20SISO_Ant1_2437

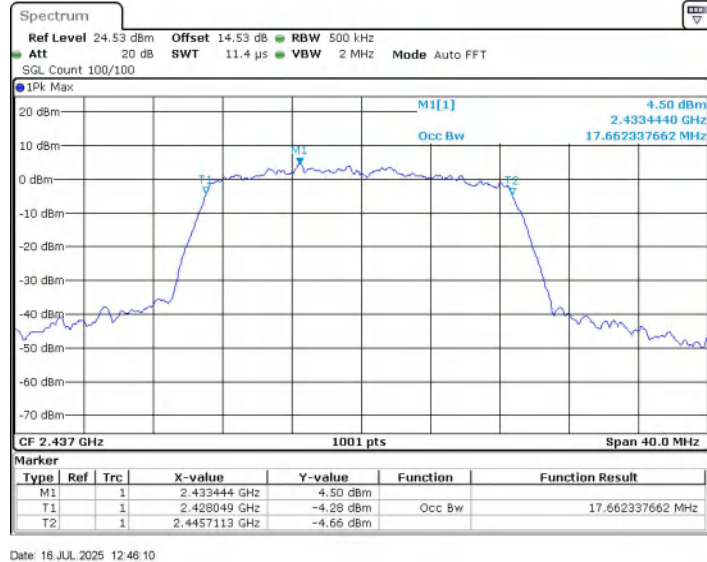


11N20SISO_Ant1_2462

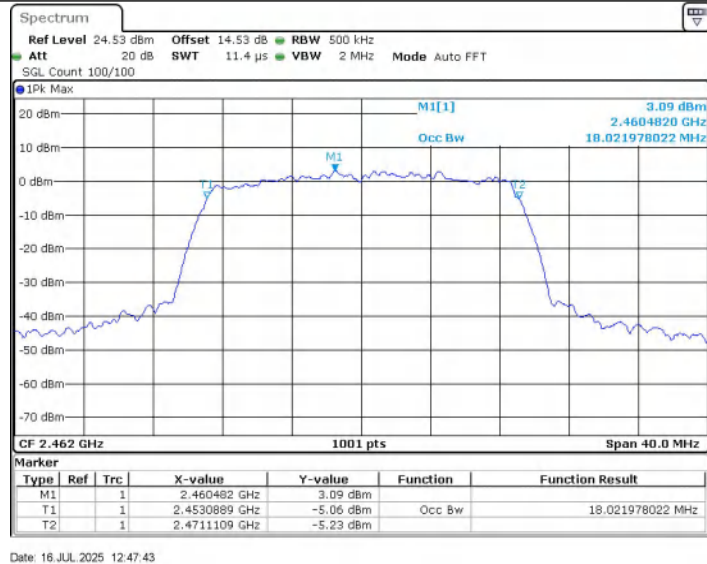

11N40SISO_Ant1_2422

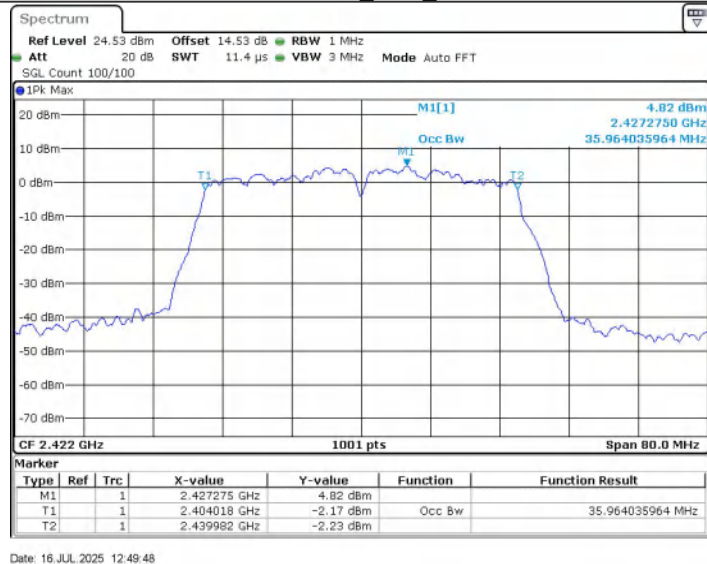


11N40SISO_Ant1_2437

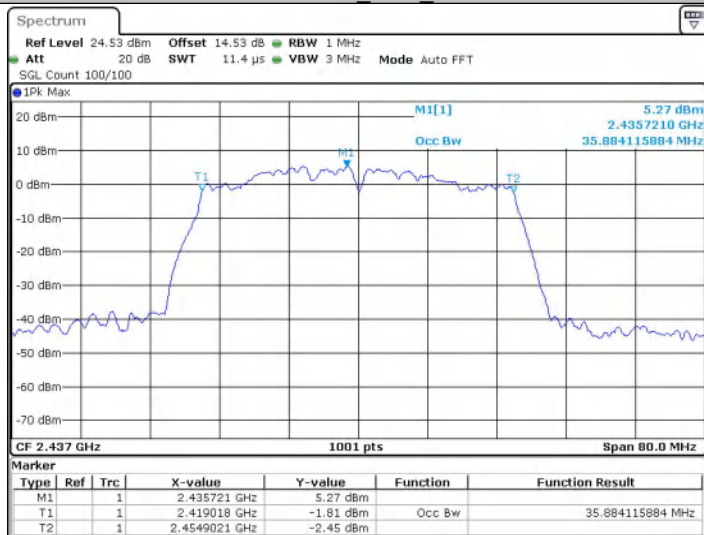


Date: 16 JUL 2025 12:51:32

11N40SISO_Ant1_2452

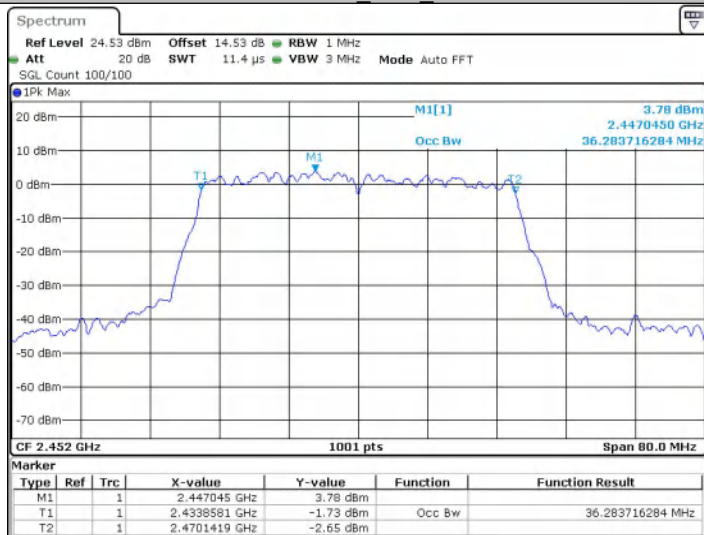

Date: 16 JUL 2025 12:53:33

5.5 6dB Occupied Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

Test Result

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	7.80	2407.96	2415.76	0.5	PASS
	2437	7.28	2433.24	2440.52	0.5	PASS
	2462	8.04	2458.44	2466.48	0.5	PASS
11G	2412	16.44	2403.72	2420.16	0.5	PASS
	2437	16.32	2428.80	2445.12	0.5	PASS
	2462	16.44	2453.80	2470.24	0.5	PASS
11N20SISO	2412	17.64	2403.16	2420.80	0.5	PASS
	2437	17.56	2428.20	2445.76	0.5	PASS
	2462	17.60	2453.20	2470.80	0.5	PASS
11N40SISO	2422	36.16	2404.00	2440.16	0.5	PASS
	2437	33.92	2419.08	2453.00	0.5	PASS
	2452	36.40	2433.76	2470.16	0.5	PASS


Test Graphs

11B_Ant1_2412

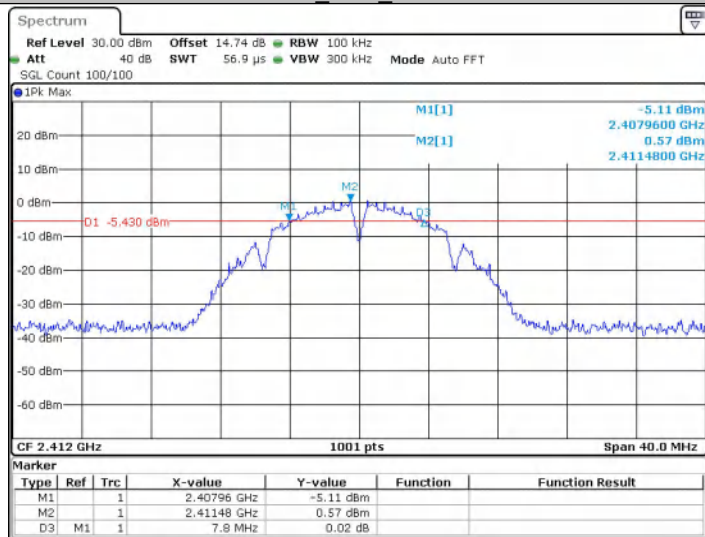

Date: 16 JUL 2025 12:55:16

11B_Ant1_2437

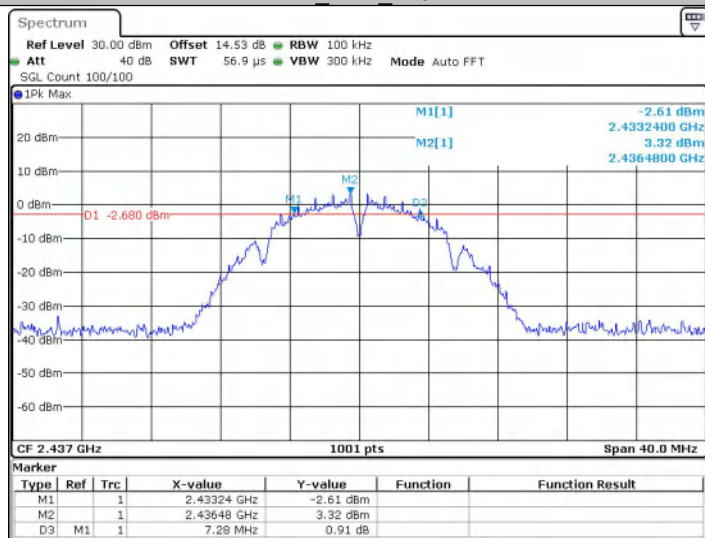


Date: 16 JUL 2025 12:57:05


11B_Ant1_2462




11G_Ant1_2412

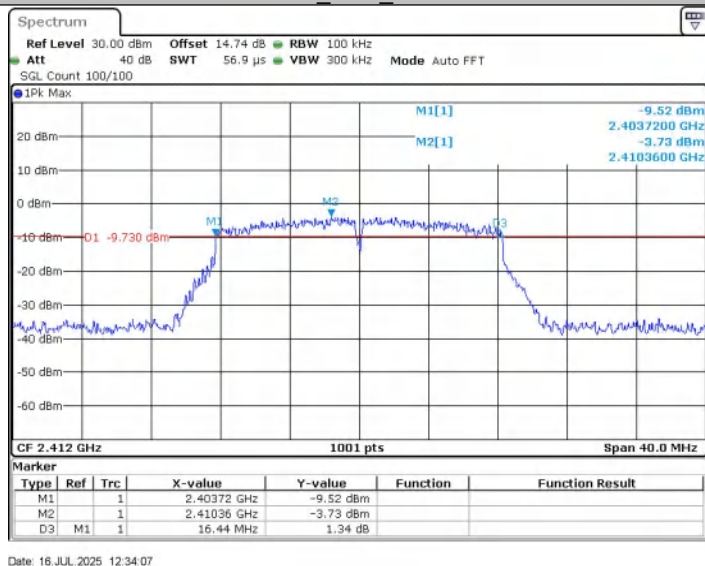

11G_Ant1_2437

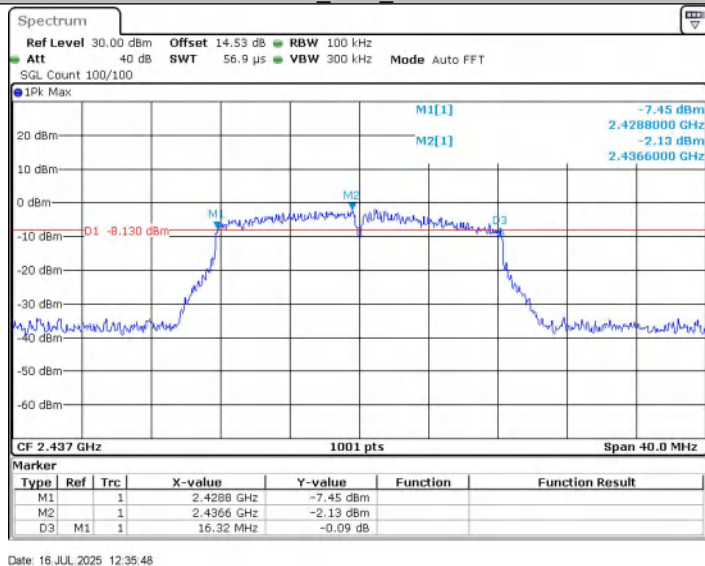


11G_Ant1_2462

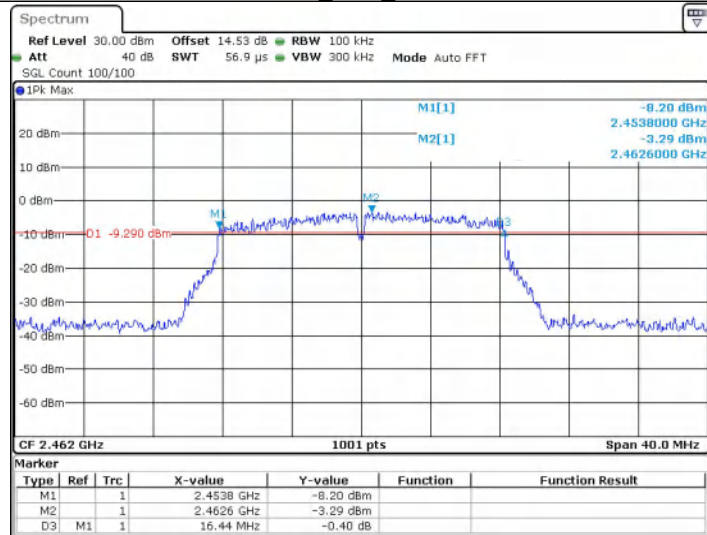


Date: 16 JUL 2025 12:37:23

11N20SISO_Ant1_2412

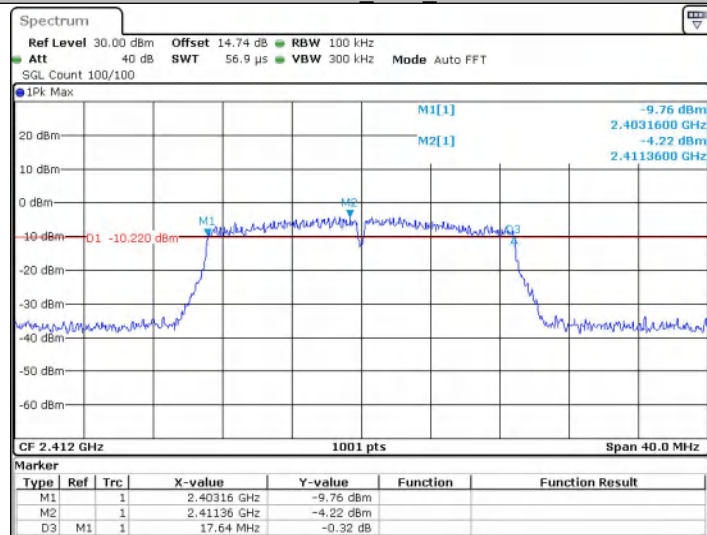


Date: 16 JUL 2025 12:44:16


11N20SISO_Ant1_2437

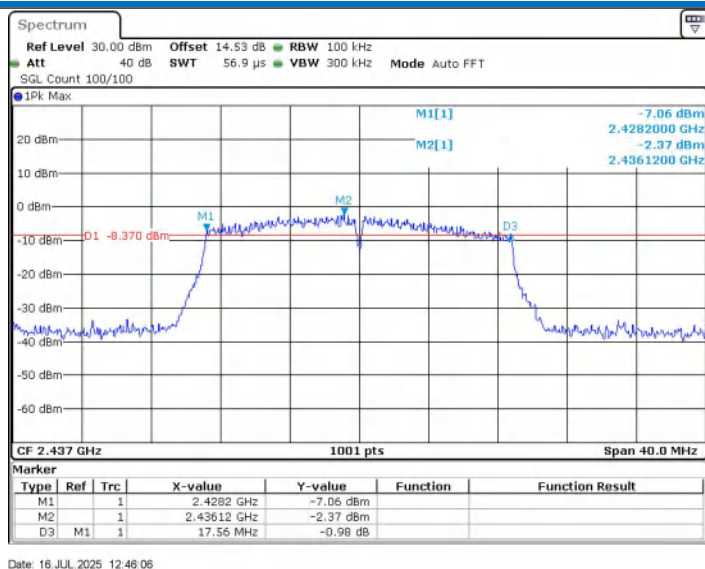


11N20SISO_Ant1_2462

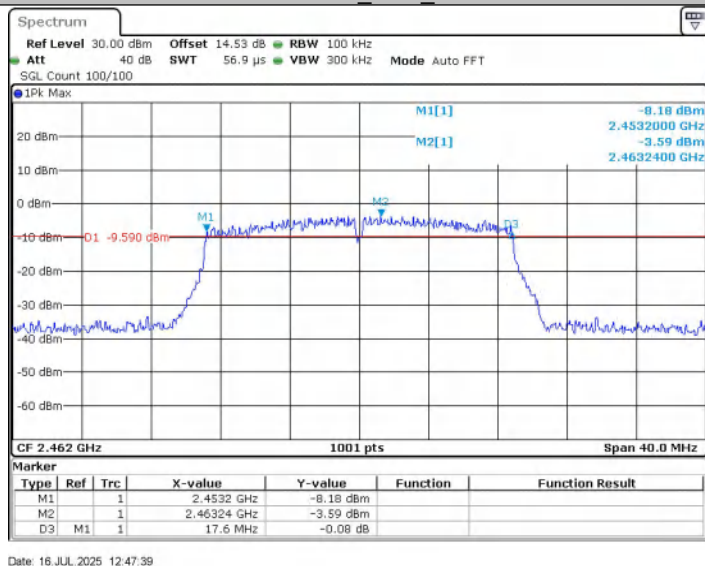

11N40SISO_Ant1_2422

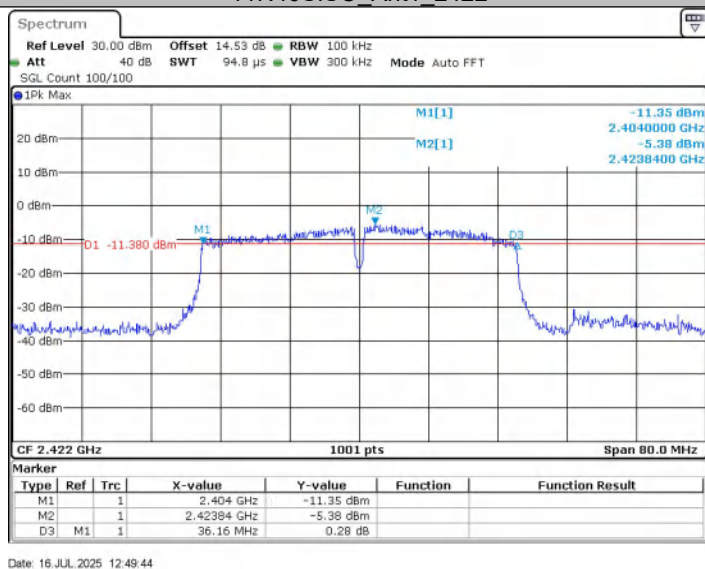


11N40SISO_Ant1_2437

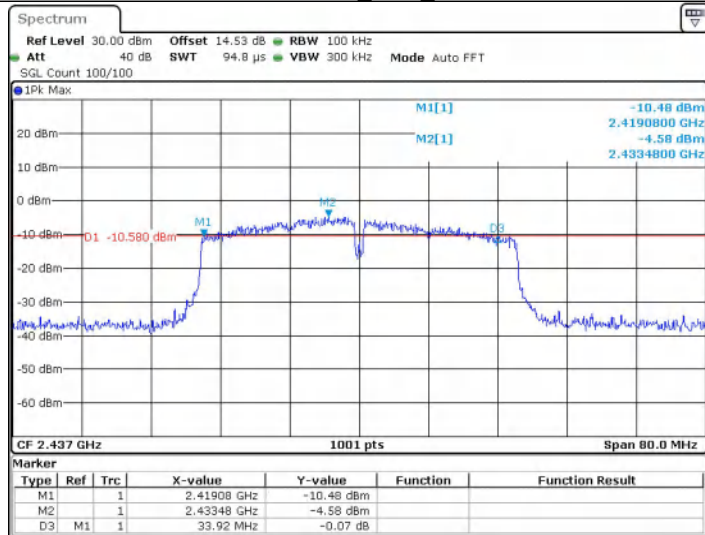


Date: 16 JUL 2025 12:51:27

11N40SISO_Ant1_2452

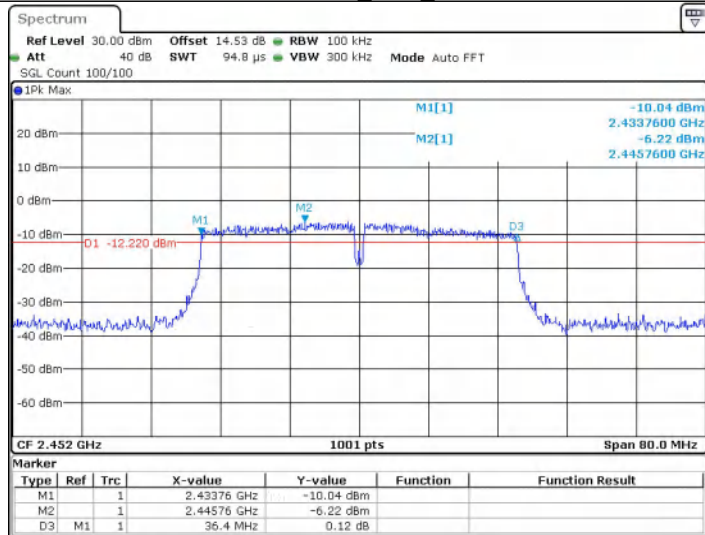

Date: 16 JUL 2025 12:53:28

5.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass

Test Result


TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-20.92	≤8.00	PASS
	2437	-19.09	≤8.00	PASS
	2462	-20.33	≤8.00	PASS
11G	2412	-23.17	≤8.00	PASS
	2437	-21.70	≤8.00	PASS
	2462	-20.38	≤8.00	PASS
11N20SISO	2412	-23.64	≤8.00	PASS
	2437	-22.08	≤8.00	PASS
	2462	-20.57	≤8.00	PASS
11N40SISO	2422	-25.60	≤8.00	PASS
	2437	-18.79	≤8.00	PASS
	2452	-20.28	≤8.00	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs


11B_Ant1_2412

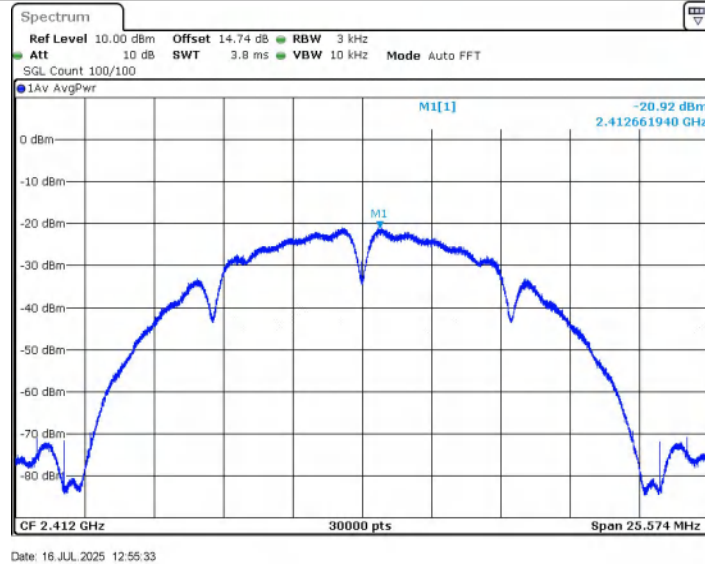


11B_Ant1_2437

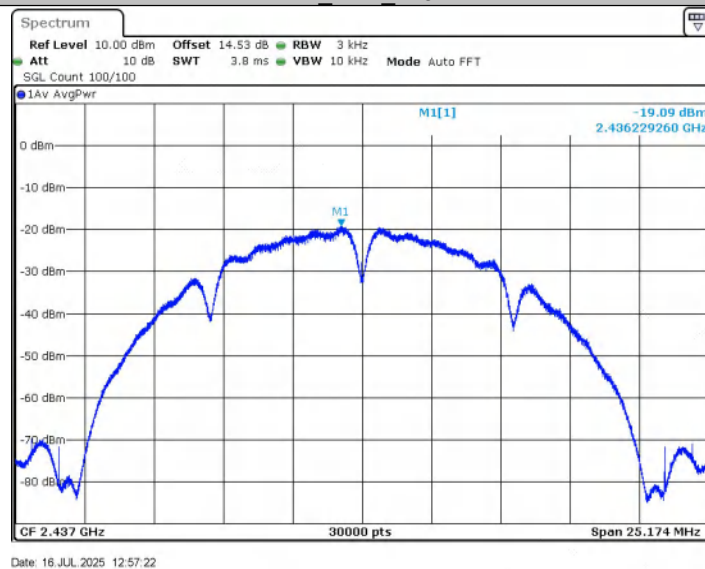


11B_Ant1_2462

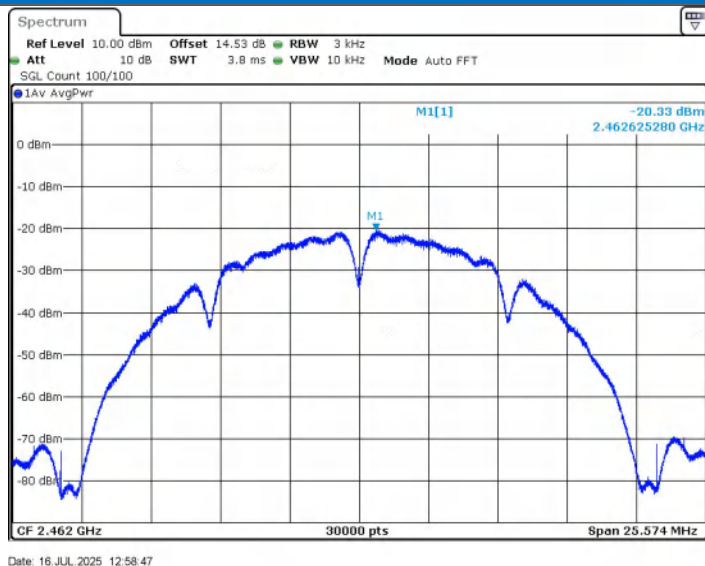


11G_Ant1_2412

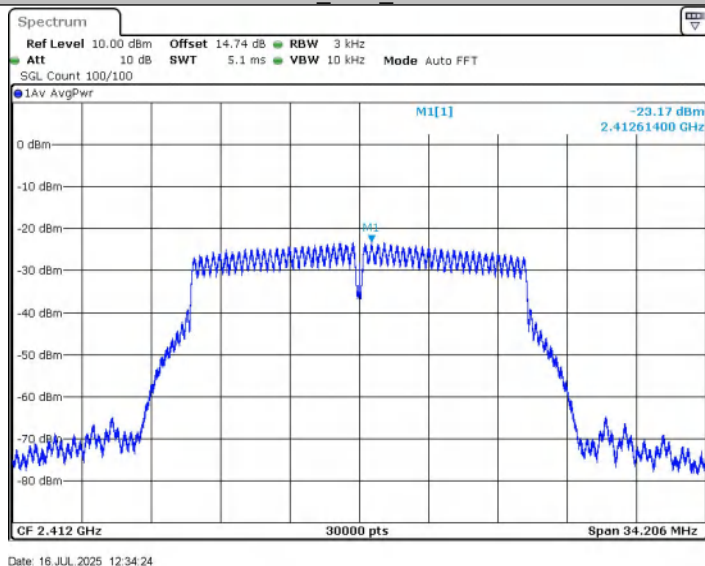

11G_Ant1_2437

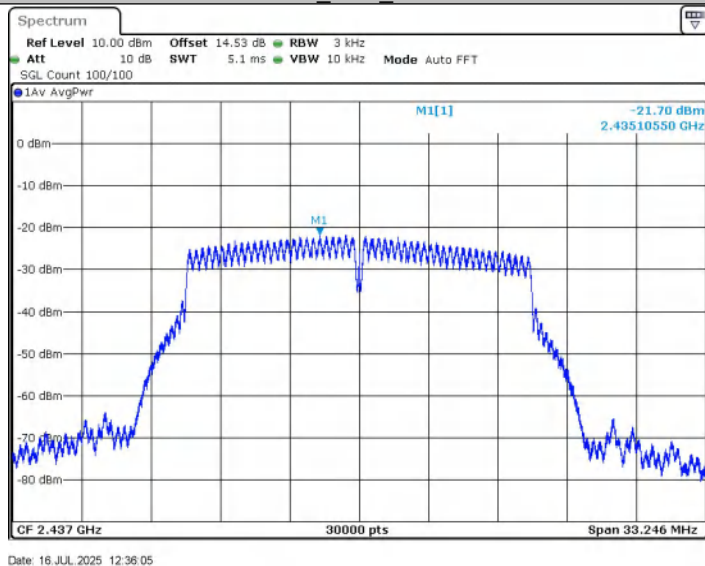


11G_Ant1_2462

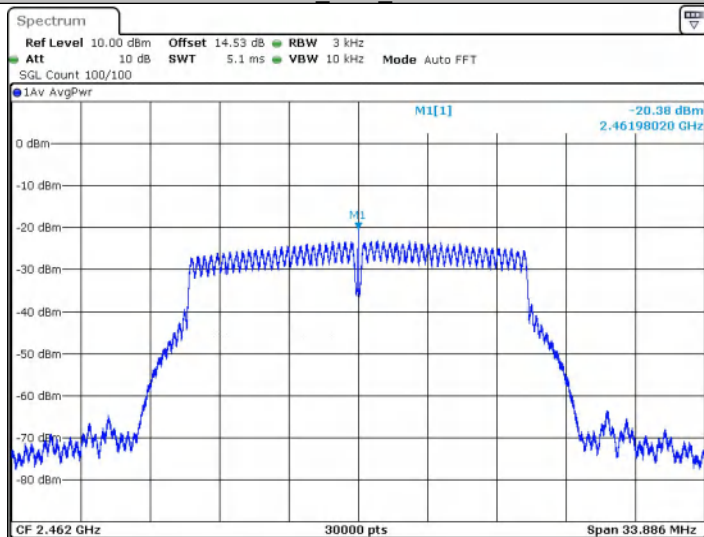


Date: 16 JUL 2025 12:37:41

11N20SISO_Ant1_2412

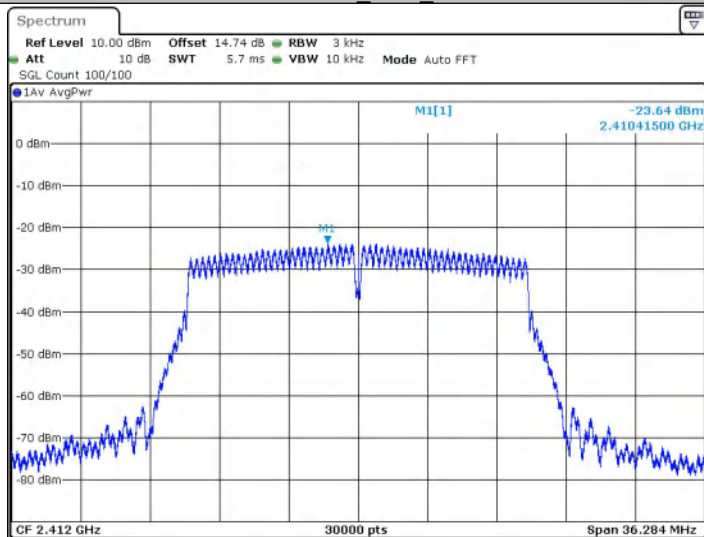


Date: 16 JUL 2025 12:44:34


11N20SISO_Ant1_2437

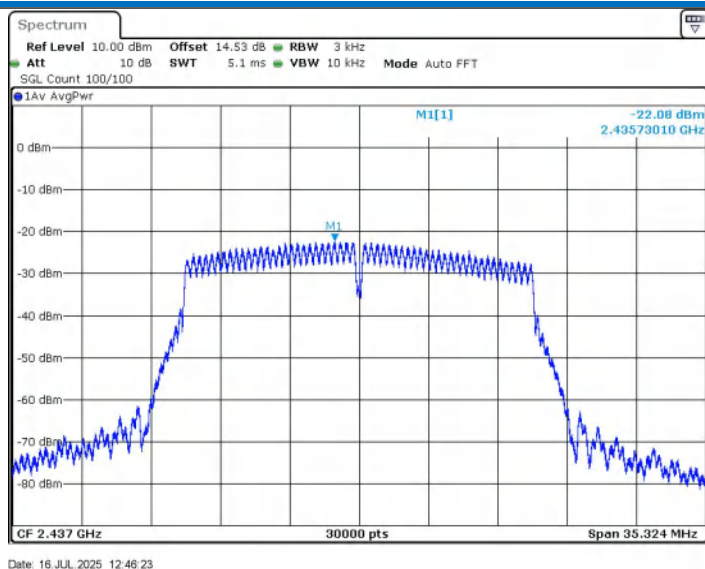


11N20SISO_Ant1_2462

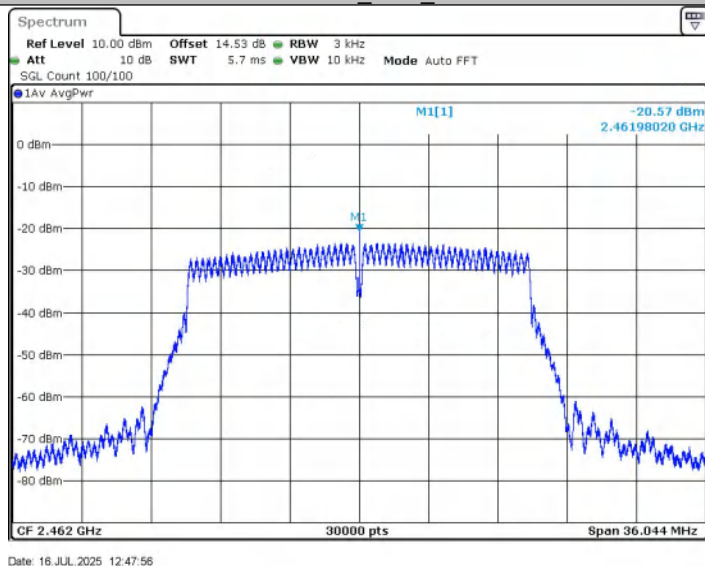

11N40SISO_Ant1_2422

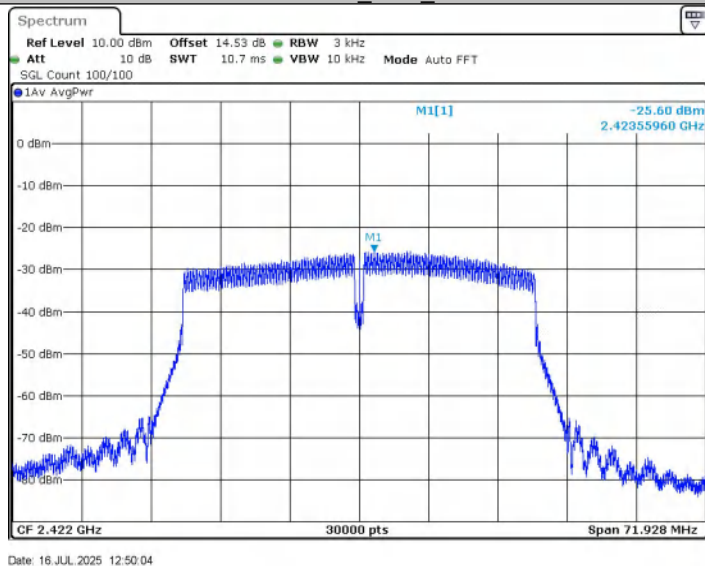


11N40SISO_Ant1_2437

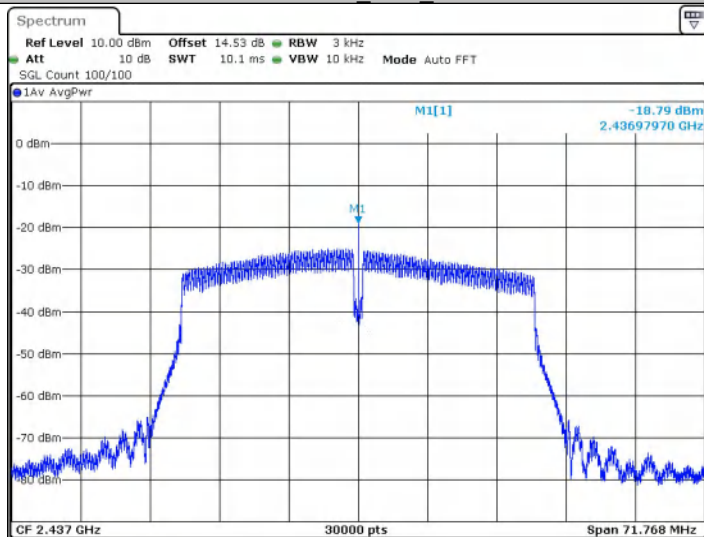


Date: 16 JUL 2025 12:51:46

11N40SISO_Ant1_2452

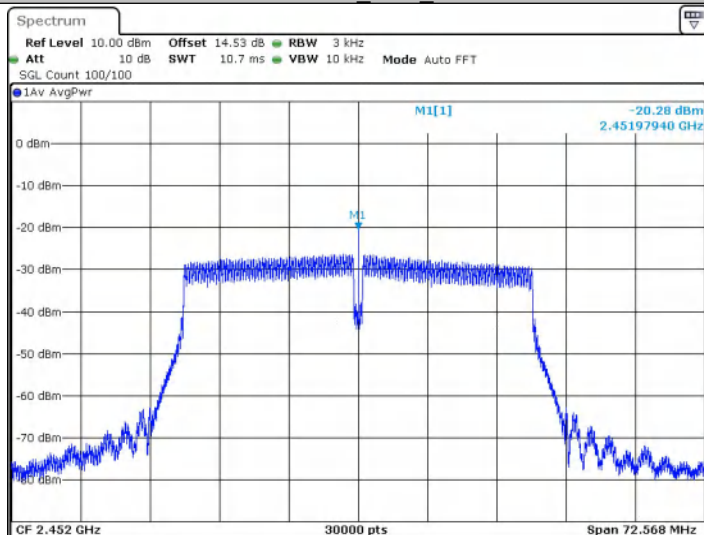

Date: 16 JUL 2025 12:53:48


5.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	1.44	-48.95	≤ -28.56	PASS
	High	2462	1.98	-50.96	≤ -28.02	PASS
11G	Low	2412	-3.44	-42.22	≤ -33.44	PASS
	High	2462	-3.26	-50.41	≤ -33.26	PASS
11N20SISO	Low	2412	-4.21	-42.48	≤ -34.21	PASS
	High	2462	-3.28	-49.62	≤ -33.28	PASS
11N40SISO	Low	2422	-5.29	-43.27	≤ -35.29	PASS
	High	2452	-5.76	-49.34	≤ -35.76	PASS


5.7.1 Test Graphs

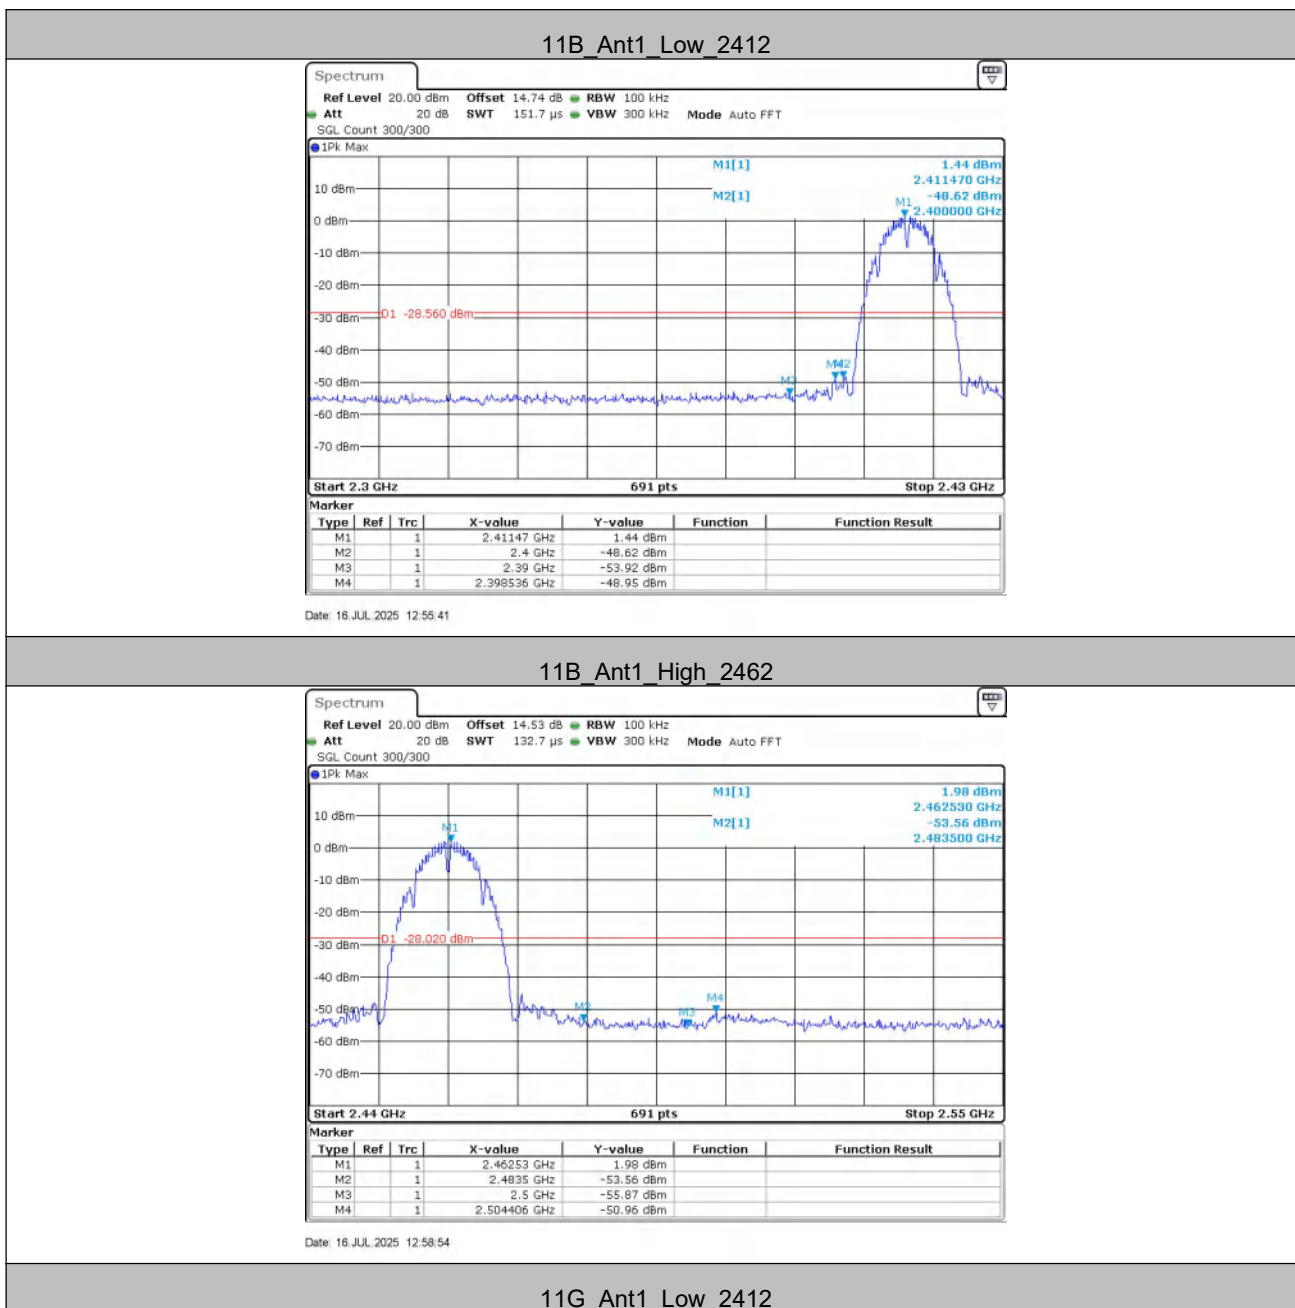



Date: 16 JUL 2025 12:34:32

11G_Ant1_High_2462

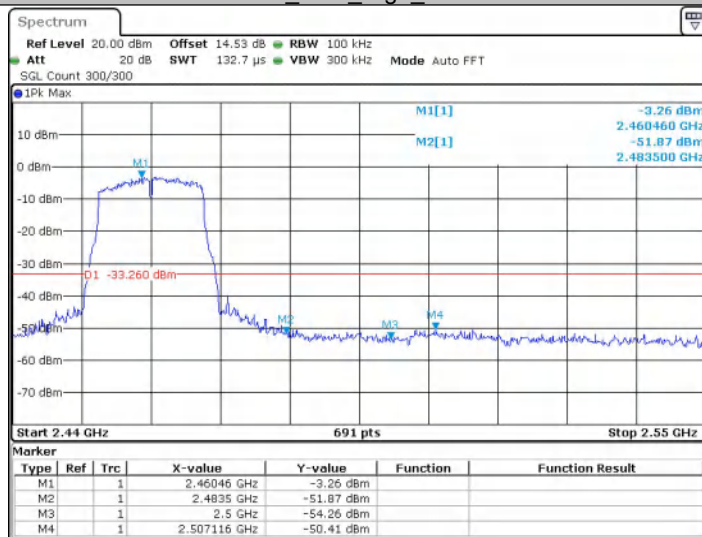


Date: 16 JUL 2025 12:37:48

11N20SISO_Ant1_Low_2412




Date: 16 JUL 2025 12:44:42

11N20SISO_Ant1_High_2462

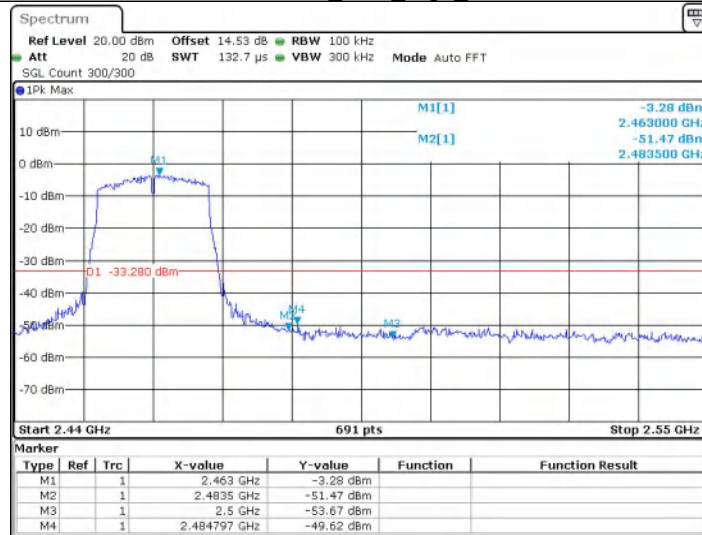


Date: 16 JUL 2025 12:48:04

11N40SISO_Ant1_Low_2422

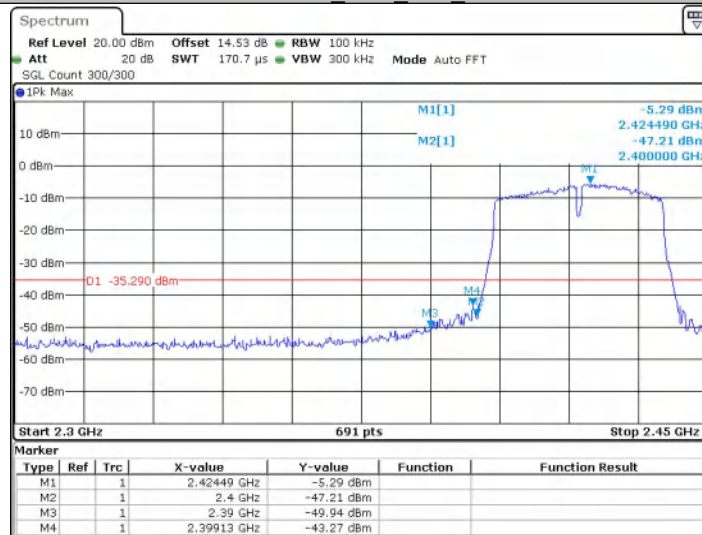


Date: 16 JUL 2025 12:50:13

11N40SISO_Ant1_High_2452

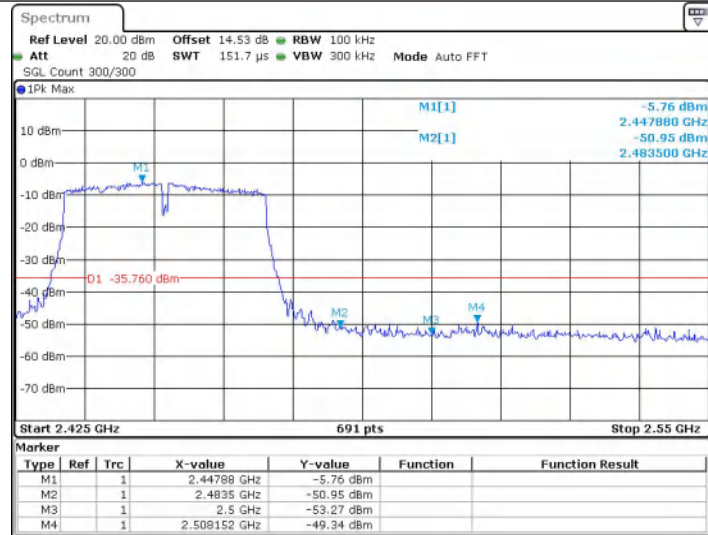

Date: 16 JUL 2025 12:53:56

5.8 RF Conducted Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	-0.79	-0.79	---	PASS
		30~1000	-0.79	-50.87	≤ -30.79	PASS
		1000~26500	-0.79	-47.47	≤ -30.79	PASS
	2437	Reference	0.49	0.49	---	PASS
		30~1000	0.49	-50.92	≤ -29.51	PASS
		1000~26500	0.49	-47.97	≤ -29.51	PASS
	2462	Reference	-0.21	-0.21	---	PASS
		30~1000	-0.21	-51.31	≤ -30.21	PASS
		1000~26500	-0.21	-47.42	≤ -30.21	PASS
11G	2412	Reference	-4.51	-4.51	---	PASS
		30~1000	-4.51	-50.25	≤ -34.51	PASS
		1000~26500	-4.51	-46.82	≤ -34.51	PASS
	2437	Reference	-3.03	-3.03	---	PASS
		30~1000	-3.03	-50.22	≤ -33.03	PASS
		1000~26500	-3.03	-48.13	≤ -33.03	PASS
	2462	Reference	-3.45	-3.45	---	PASS
		30~1000	-3.45	-50.45	≤ -33.45	PASS
		1000~26500	-3.45	-47.42	≤ -33.45	PASS
11N20SISO	2412	Reference	-4.79	-4.79	---	PASS
		30~1000	-4.79	-50.94	≤ -34.79	PASS
		1000~26500	-4.79	-47.58	≤ -34.79	PASS
	2437	Reference	-3.35	-3.35	---	PASS
		30~1000	-3.35	-51.56	≤ -33.35	PASS
		1000~26500	-3.35	-47.22	≤ -33.35	PASS
	2462	Reference	-3.96	-3.96	---	PASS
		30~1000	-3.96	-50.95	≤ -33.96	PASS
		1000~26500	-3.96	-48.33	≤ -33.96	PASS
11N40SISO	2422	Reference	-5.73	-5.73	---	PASS
		30~1000	-5.73	-51.01	≤ -35.73	PASS
		1000~26500	-5.73	-47.76	≤ -35.73	PASS
	2437	Reference	-5.51	-5.51	---	PASS
		30~1000	-5.51	-50.9	≤ -35.51	PASS
		1000~26500	-5.51	-48.16	≤ -35.51	PASS
	2452	Reference	-6.53	-6.53	---	PASS


		30~1000	-6.53	-51.11	≤ -36.53	PASS
		1000~26500	-6.53	-48.18	≤ -36.53	PASS

Test Graphs

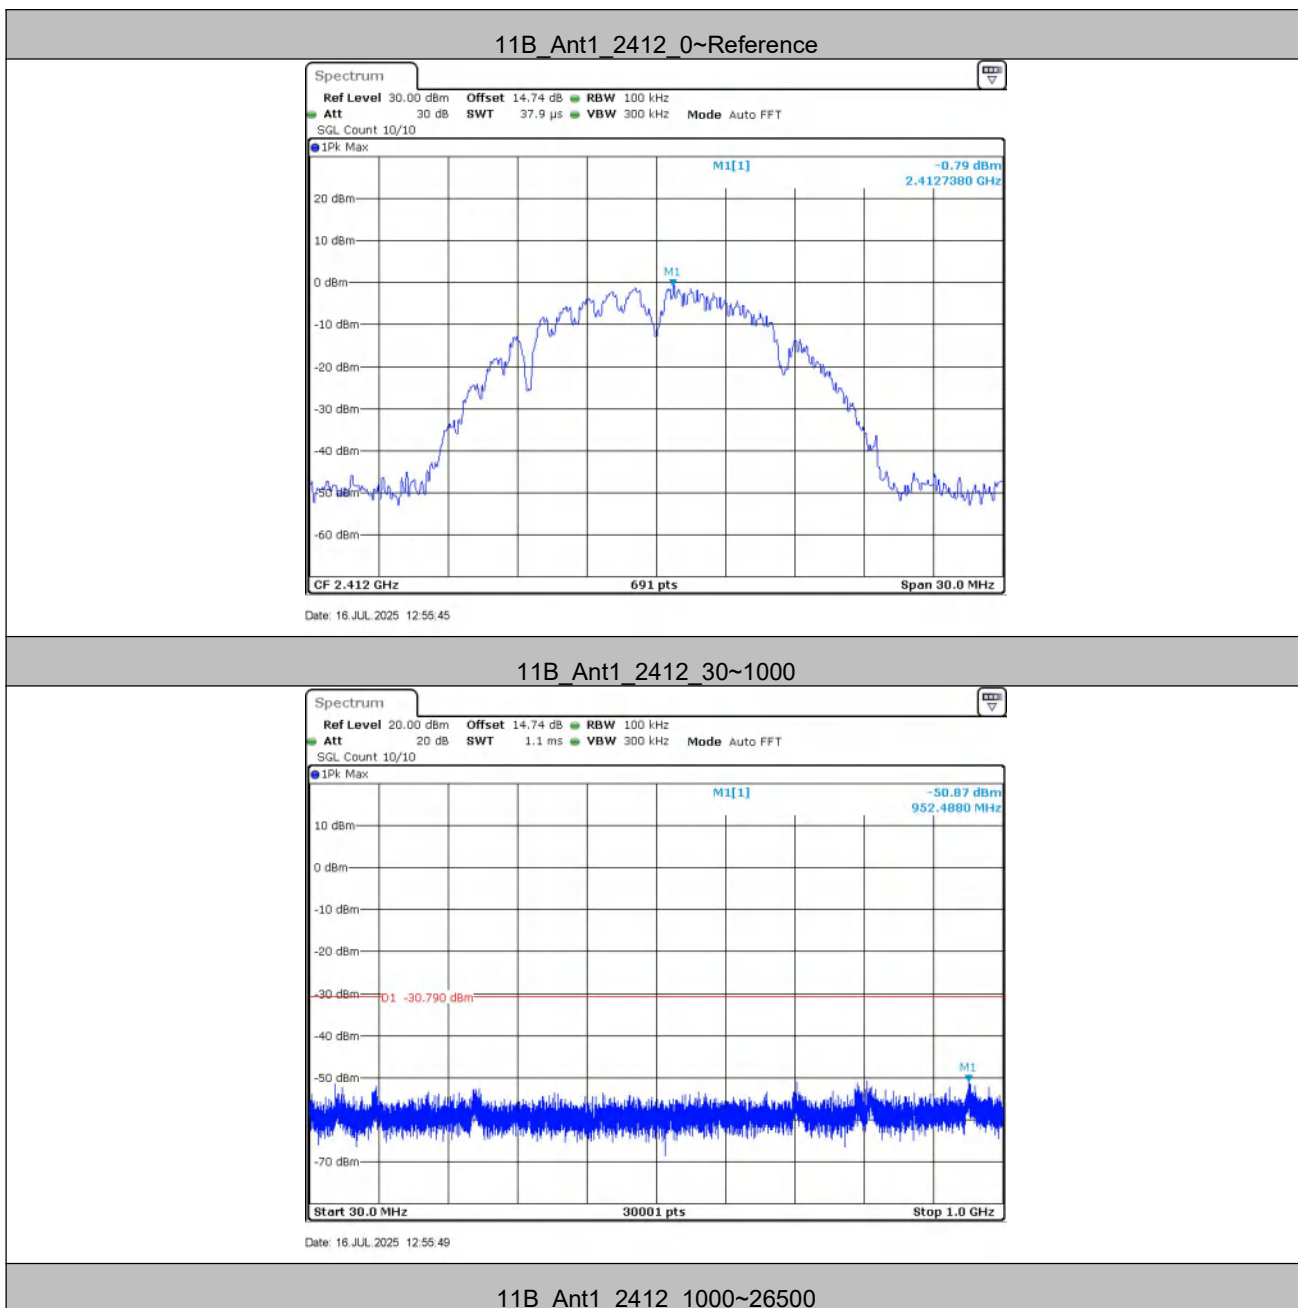


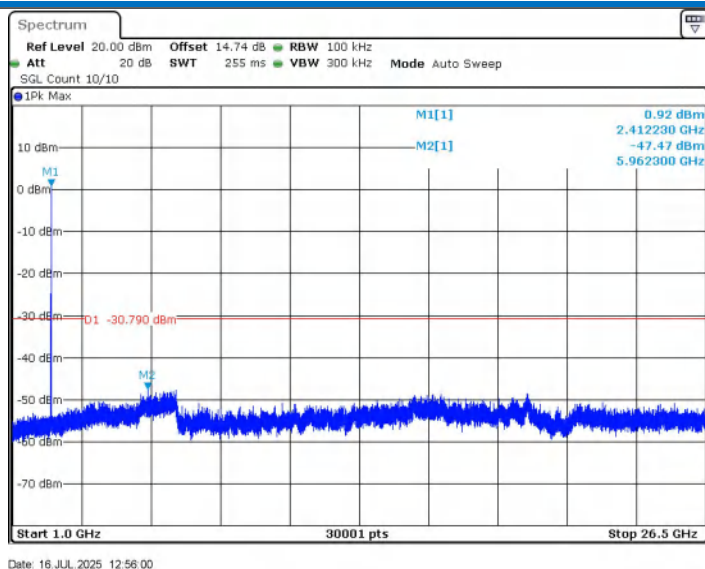


11B_Ant1_2437_0~Reference

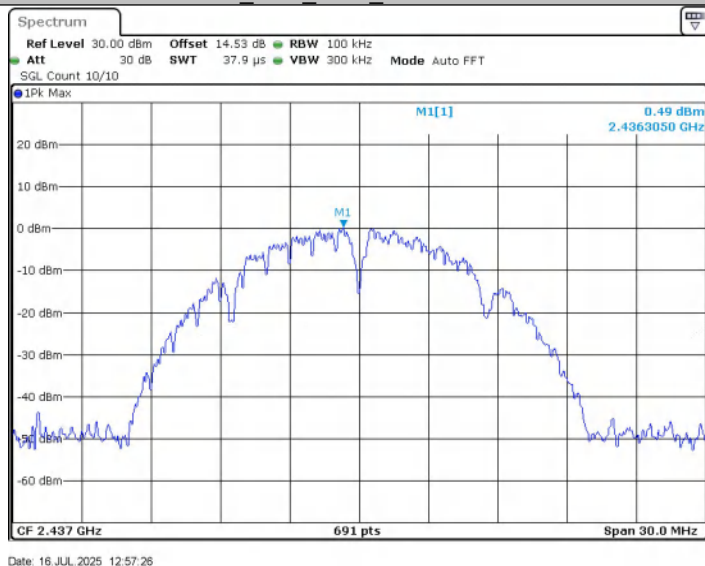

11B_Ant1_2437_30~1000

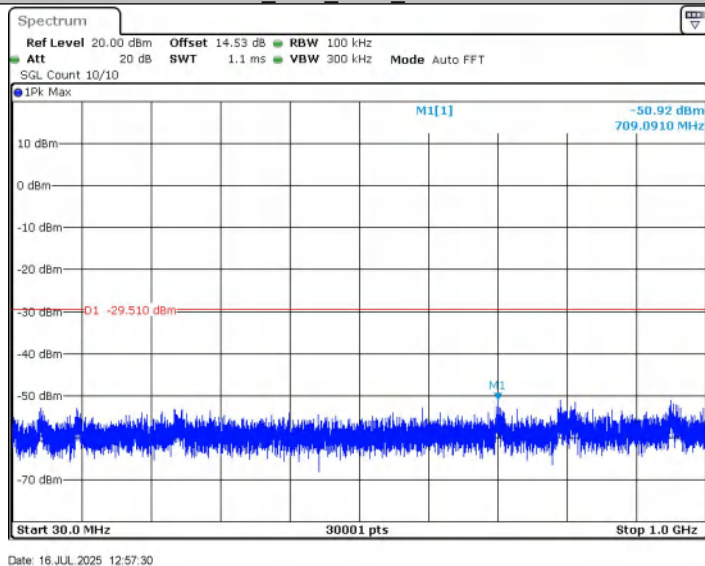


11B_Ant1_2437_1000~26500

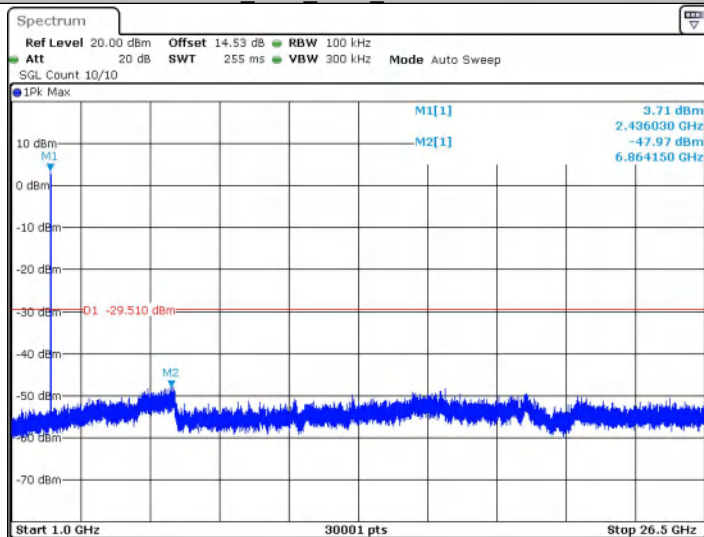


Date: 16 JUL 2025 12:57:41

11B_Ant1_2462_0~Reference

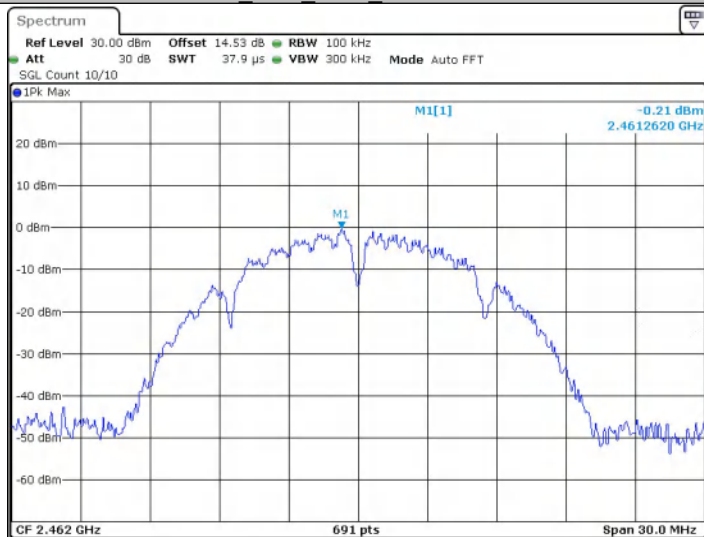


Date: 16 JUL 2025 12:58:58


11B_Ant1_2462_30~1000

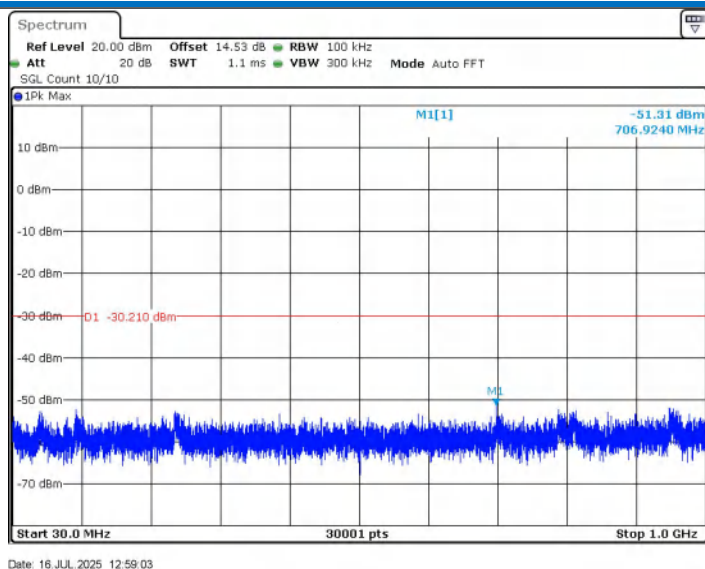


11B_Ant1_2462_1000~26500

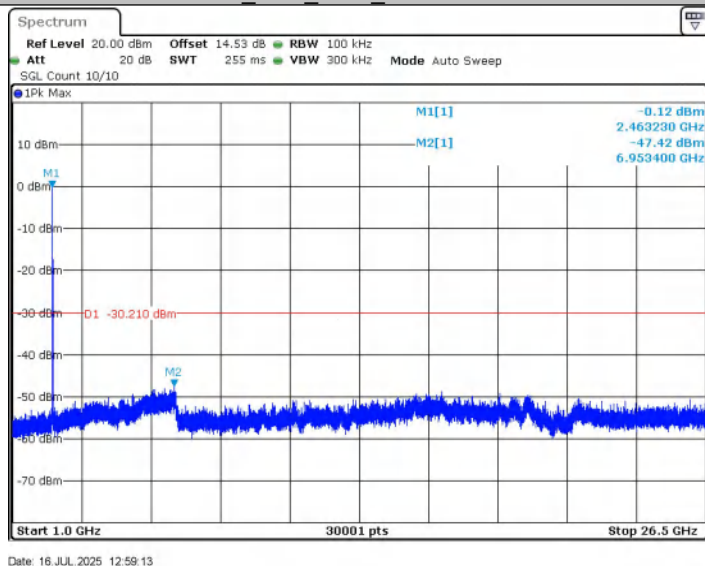

11G_Ant1_2412_0~Reference

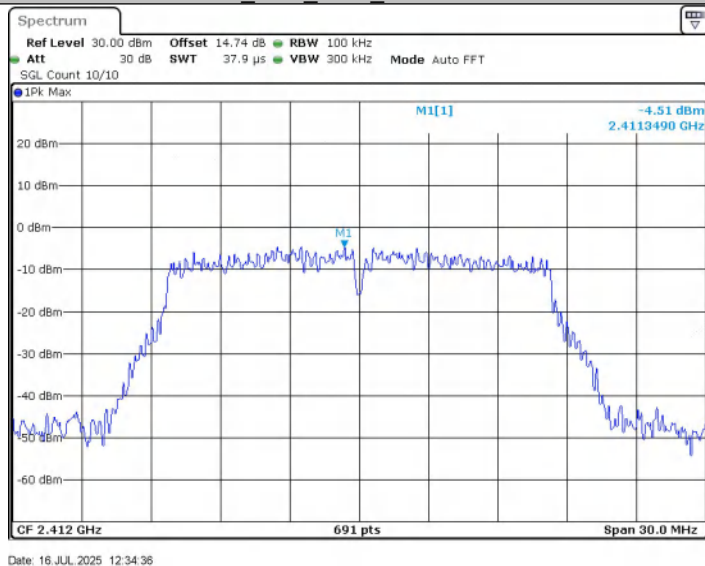


11G_Ant1_2412_30~1000

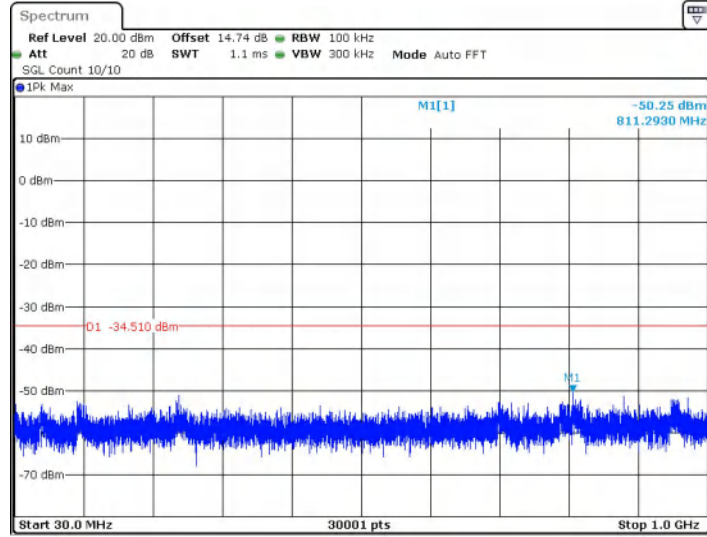


Date: 16 JUL 2025 12:34:40

11G_Ant1_2412_1000~26500

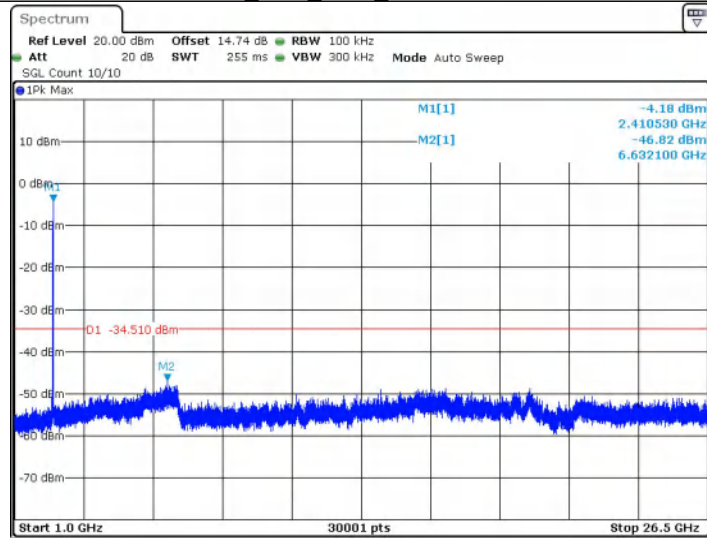


Date: 16 JUL 2025 12:34:51


11G_Ant1_2437_0~Reference

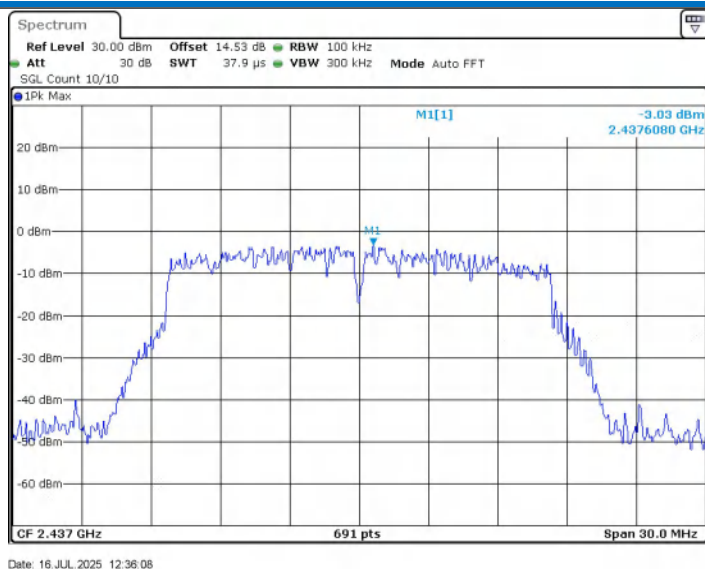


11G_Ant1_2437_30~1000

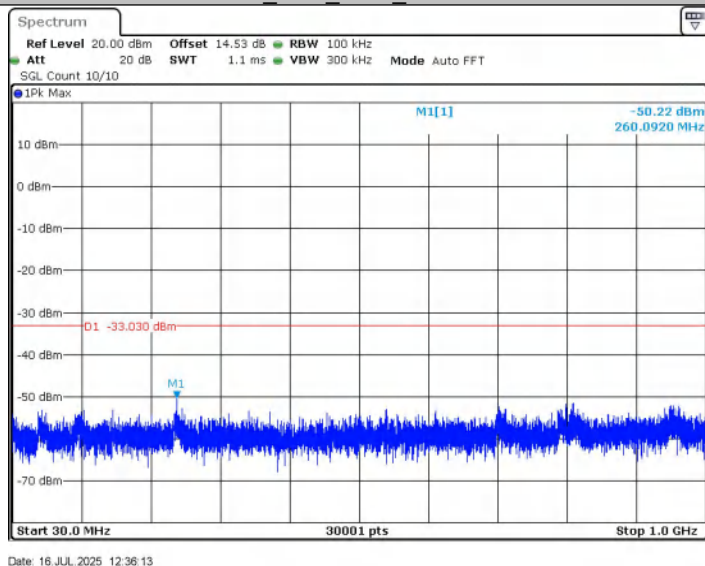


11G_Ant1_2437_1000~26500

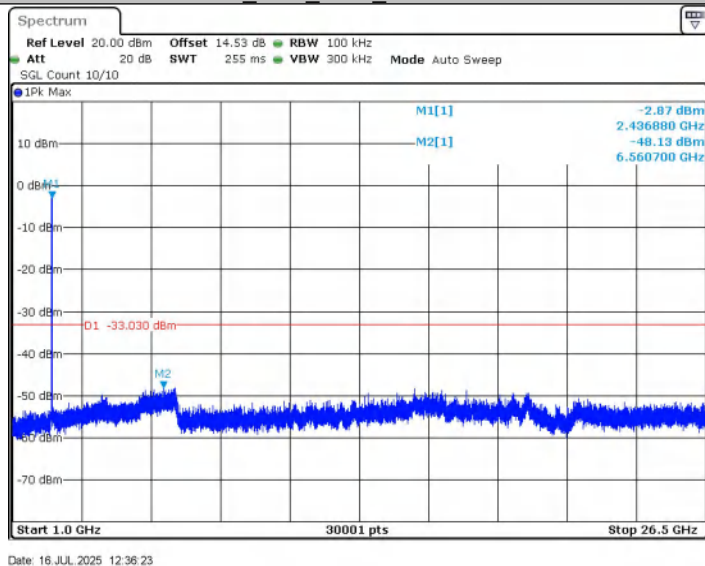


11G_Ant1_2462_0~Reference

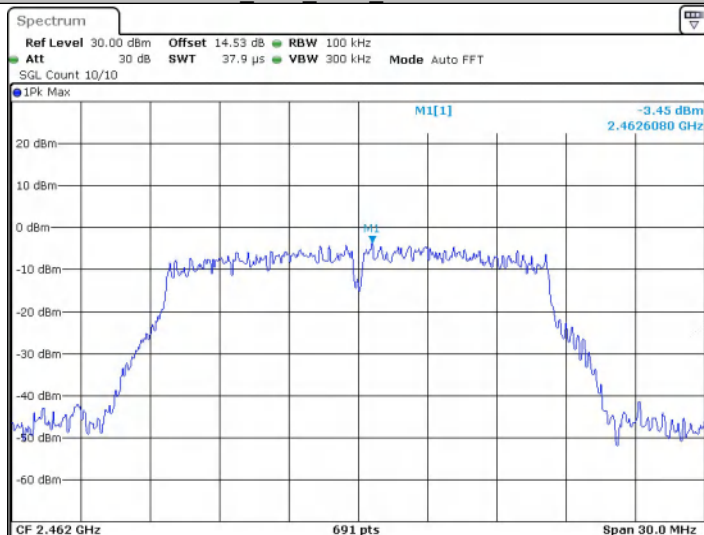


11G_Ant1_2462_30~1000

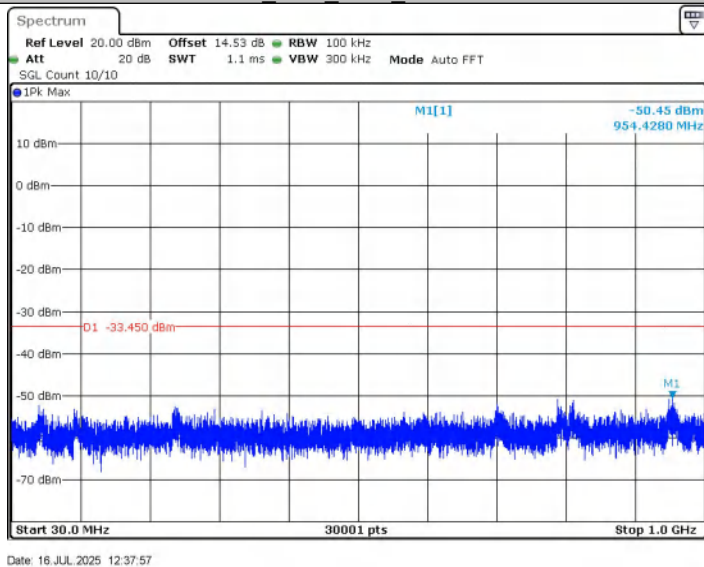


11G_Ant1_2462_1000~26500

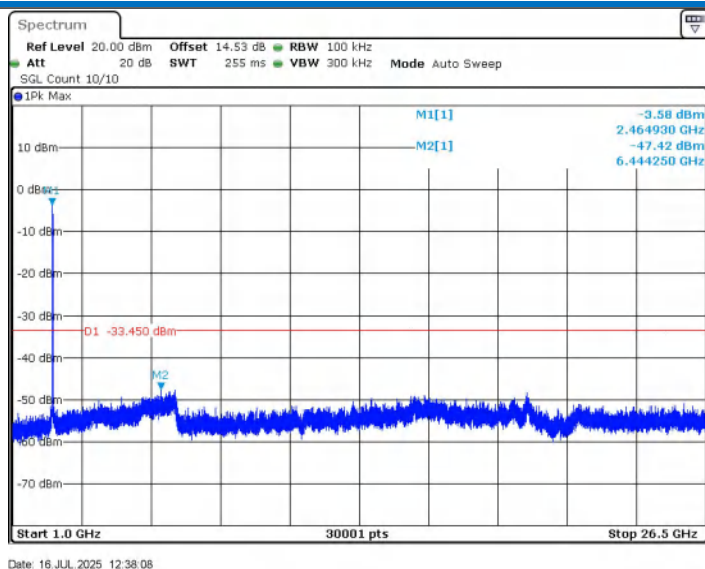


11N20SISO_Ant1_2412_0~Reference

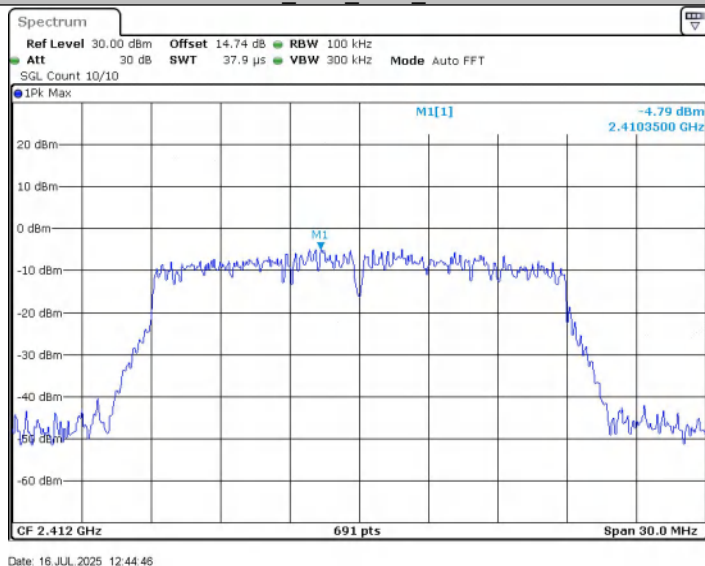

11N20SISO_Ant1_2412_30~1000

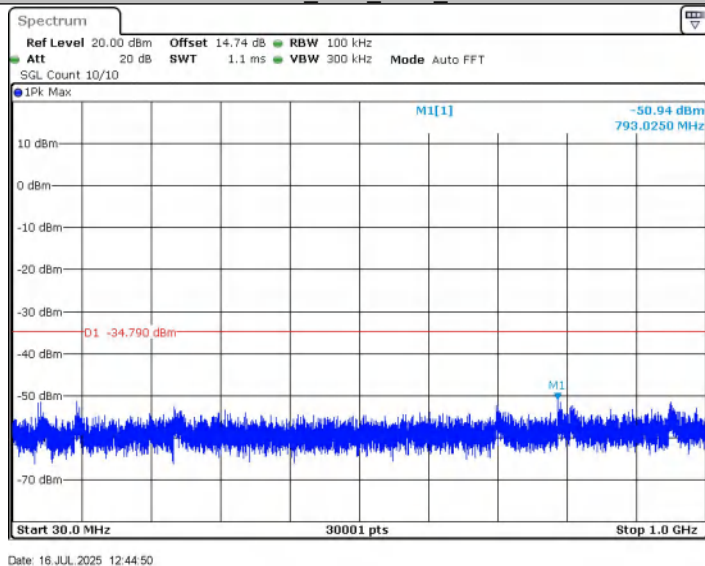


11N20SISO_Ant1_2412_1000~26500

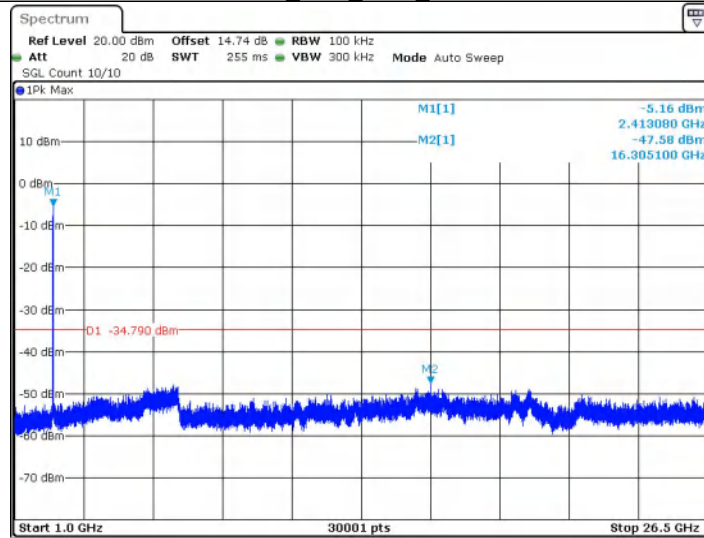


Date: 16 JUL 2025 12:45:01

11N20SISO_Ant1_2437_0~Reference

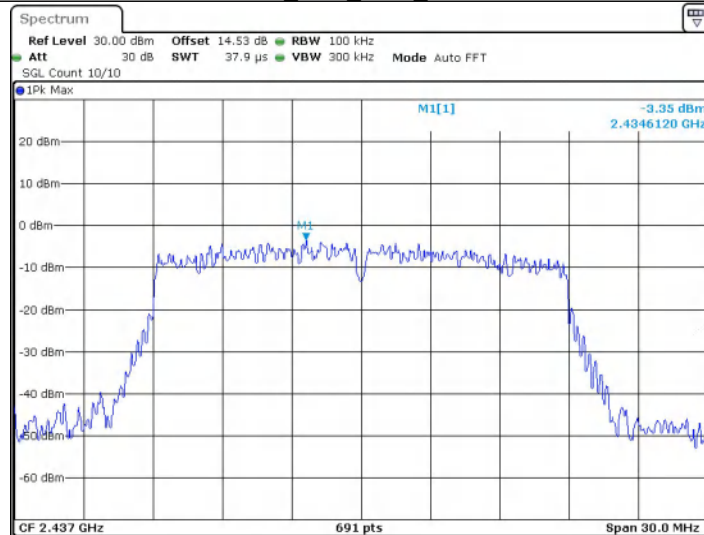


Date: 16 JUL 2025 12:46:27


11N20SISO_Ant1_2437_30~1000

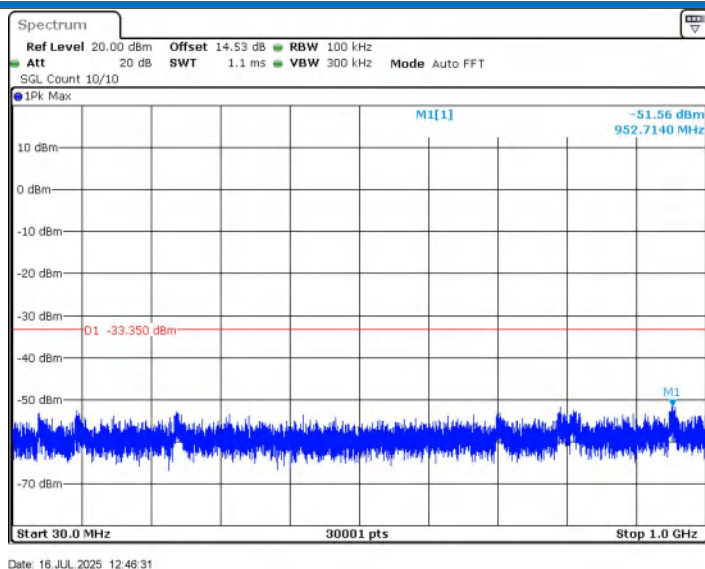


11N20SISO_Ant1_2437_1000~26500

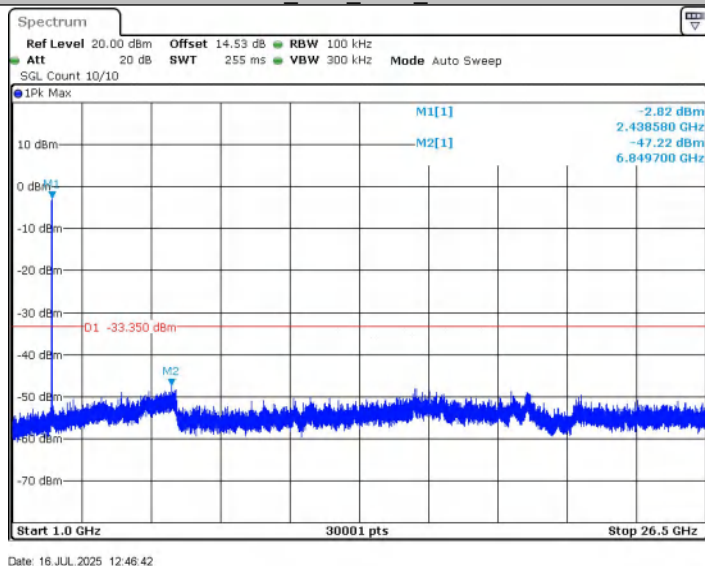

11N20SISO_Ant1_2462_0~Reference

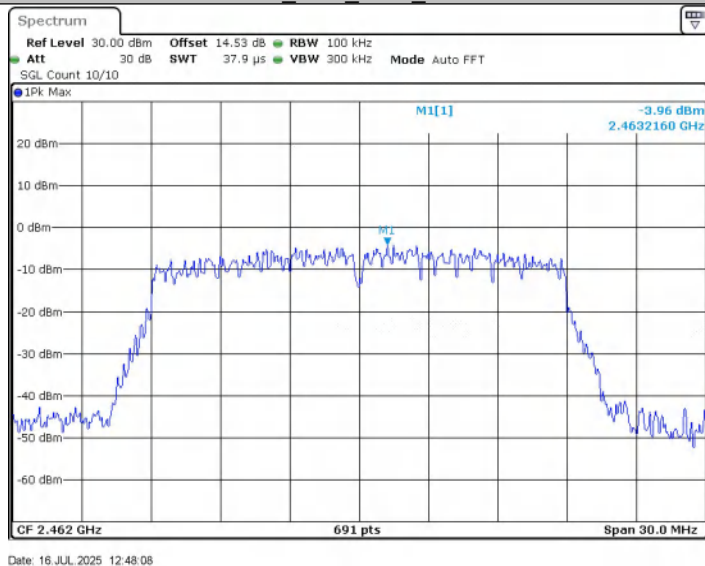


11N20SISO_Ant1_2462_30~1000

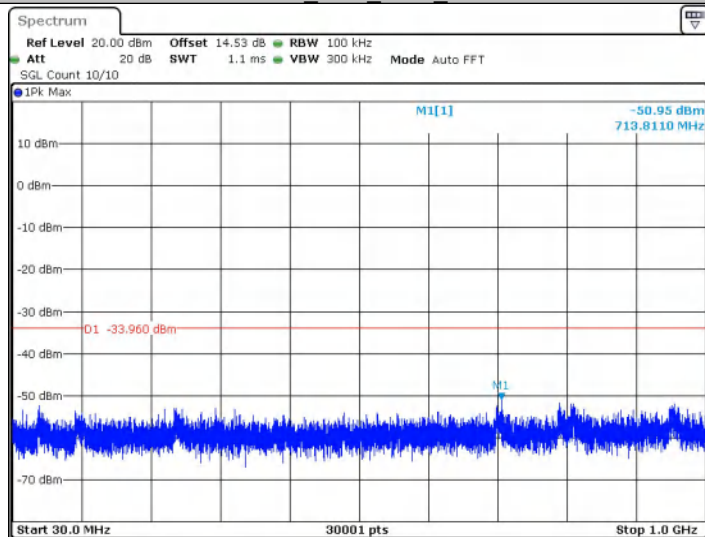


Date: 16 JUL 2025 12:48:12

11N20SISO_Ant1_2462_1000~26500

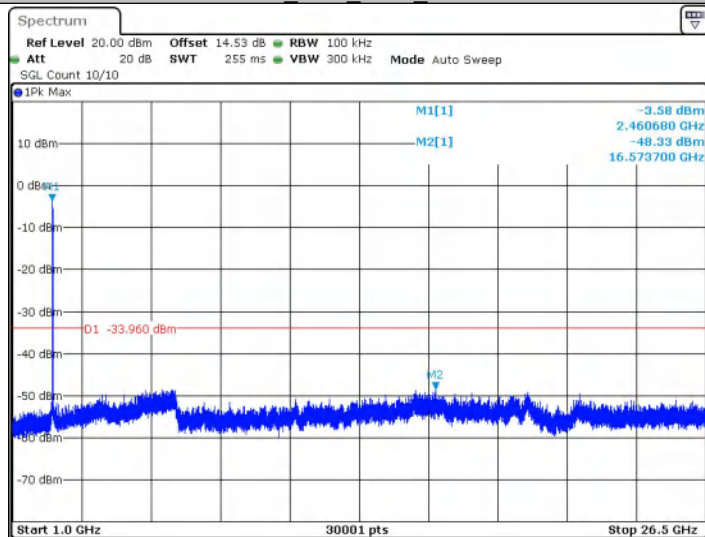


Date: 16 JUL 2025 12:48:23


11N40SISO_Ant1_2422_0~Reference

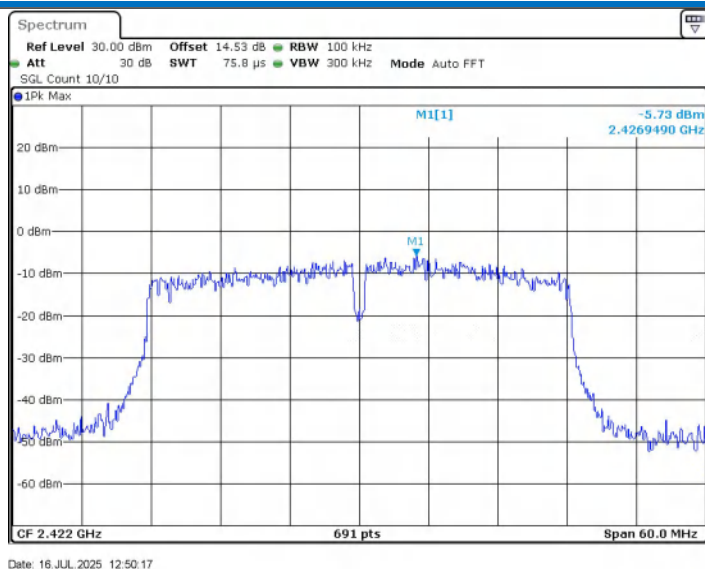


11N40SISO_Ant1_2422_30~1000

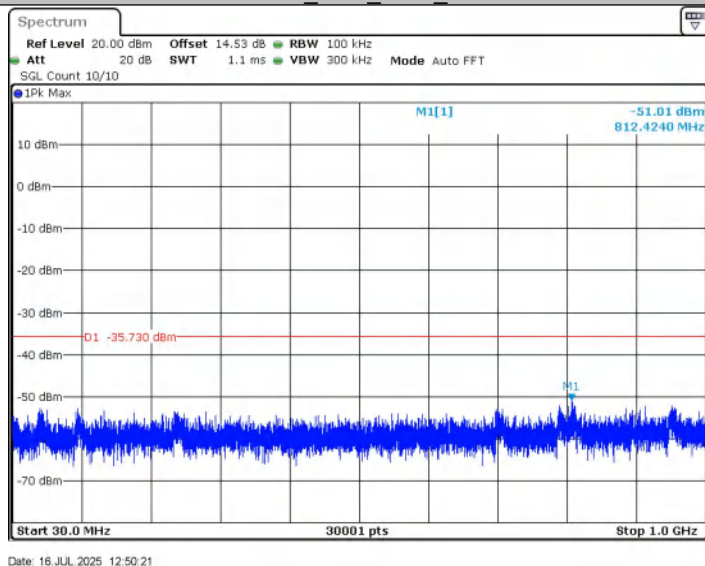

11N40SISO_Ant1_2422_1000~26500

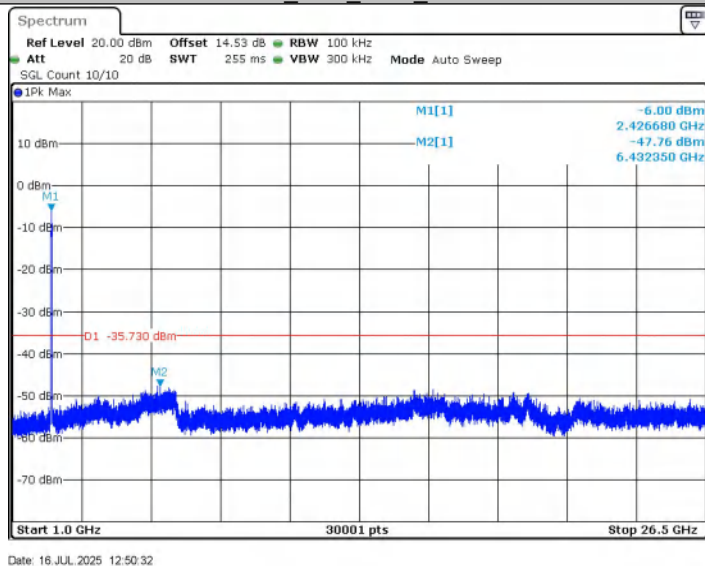


11N40SISO_Ant1_2437_0~Reference

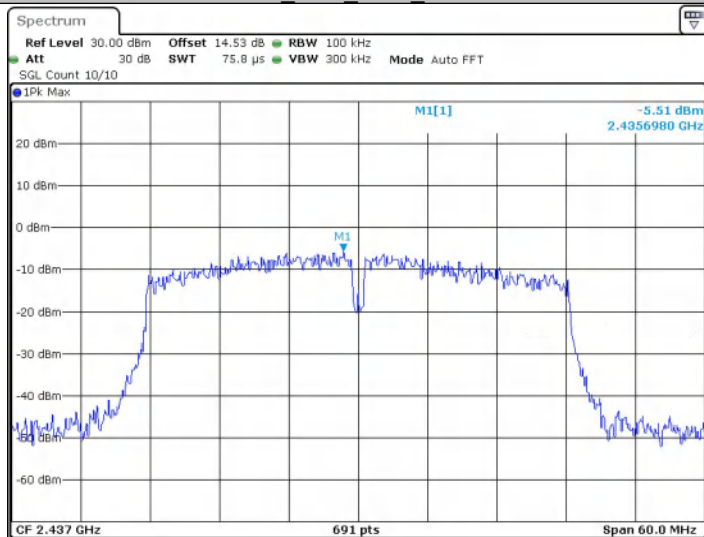


Date: 16 JUL 2025 12:51:50

11N40SISO_Ant1_2437_30~1000

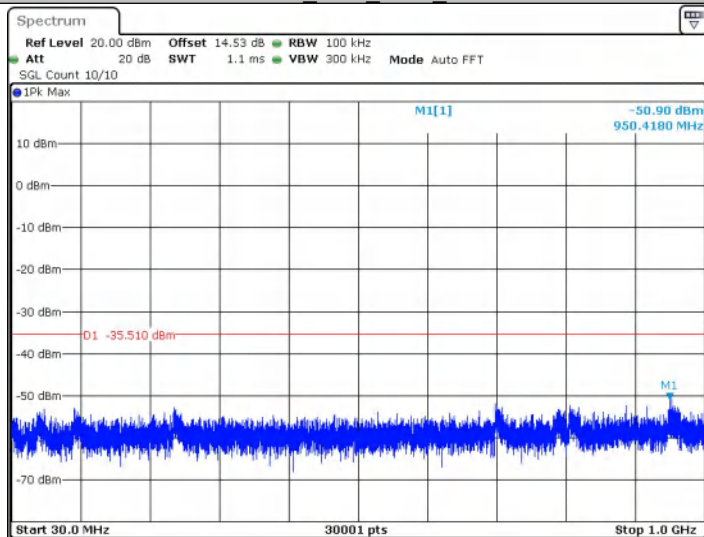


Date: 16 JUL 2025 12:51:54


11N40SISO_Ant1_2437_1000~26500

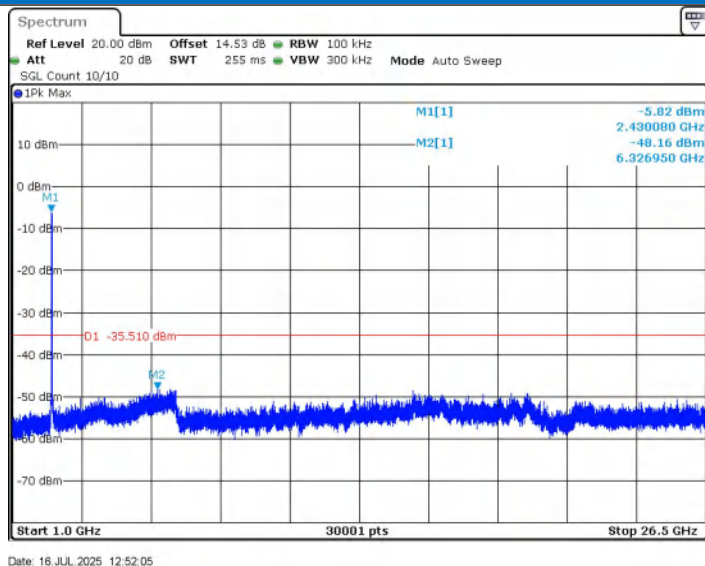


11N40SISO_Ant1_2452_0~Reference

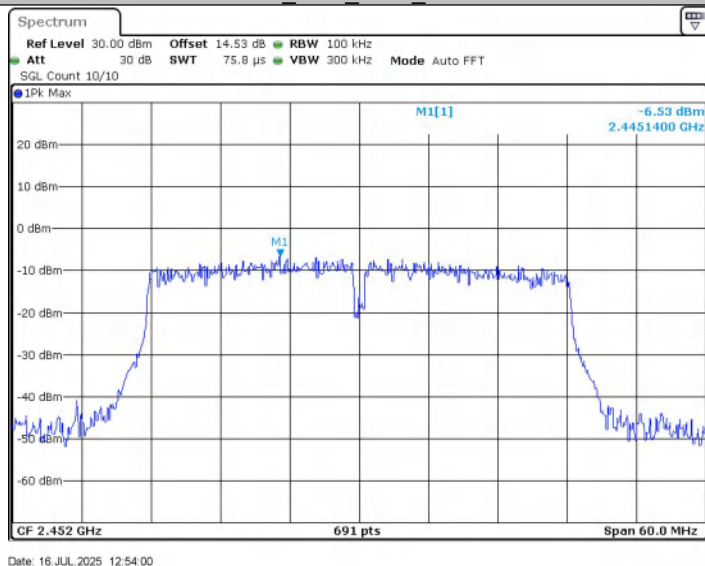

11N40SISO_Ant1_2452_30~1000

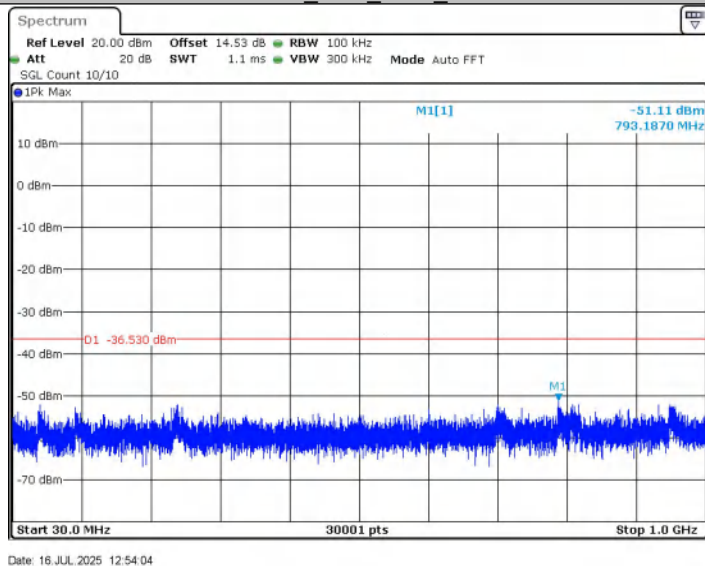

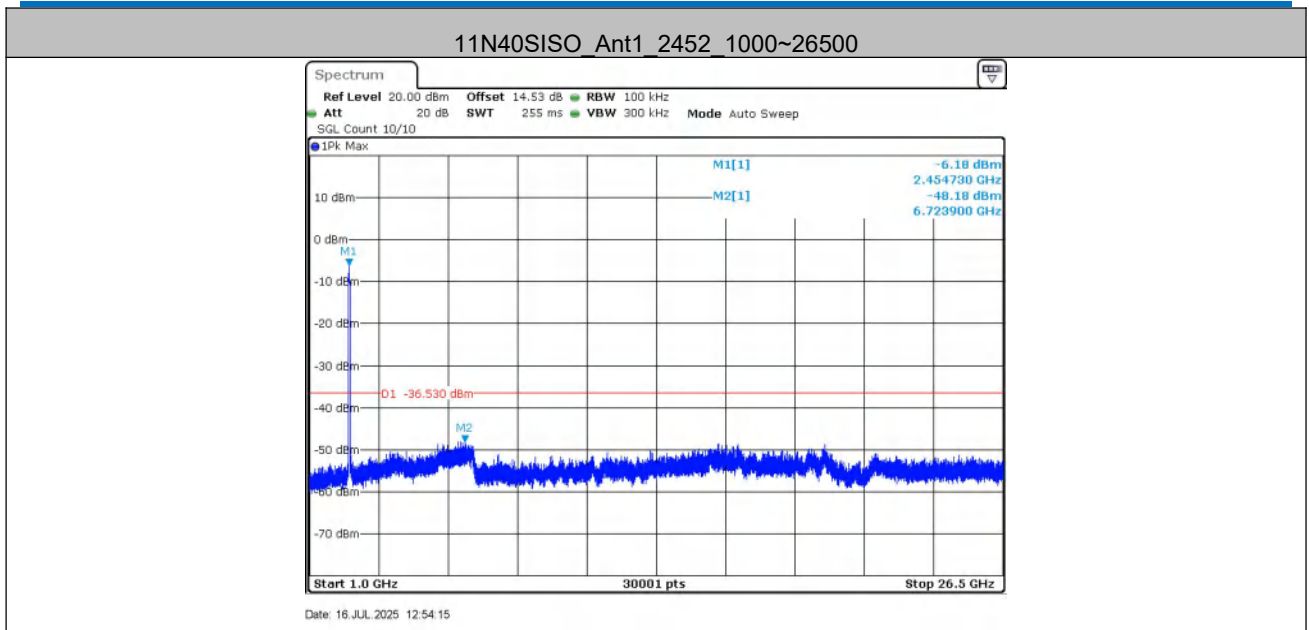

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

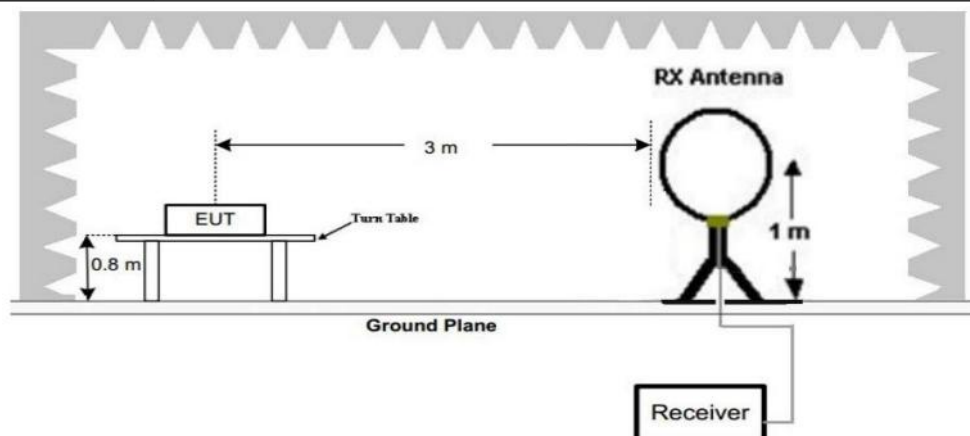


Figure 1. Below 30MHz

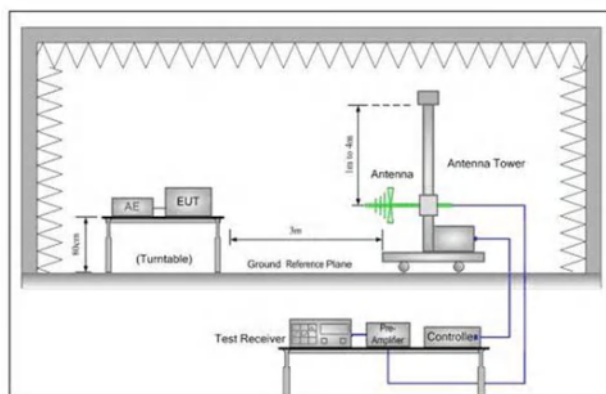


Figure 2. 30MHz to 1GHz

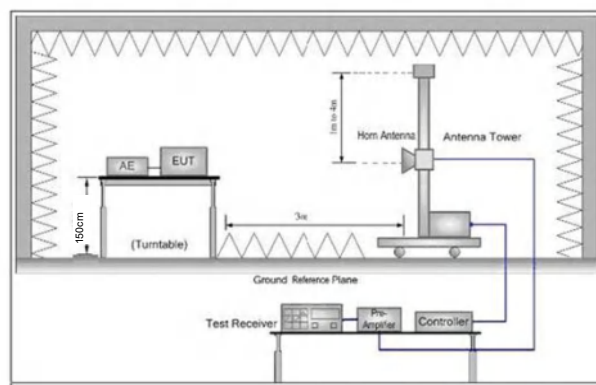


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.9.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

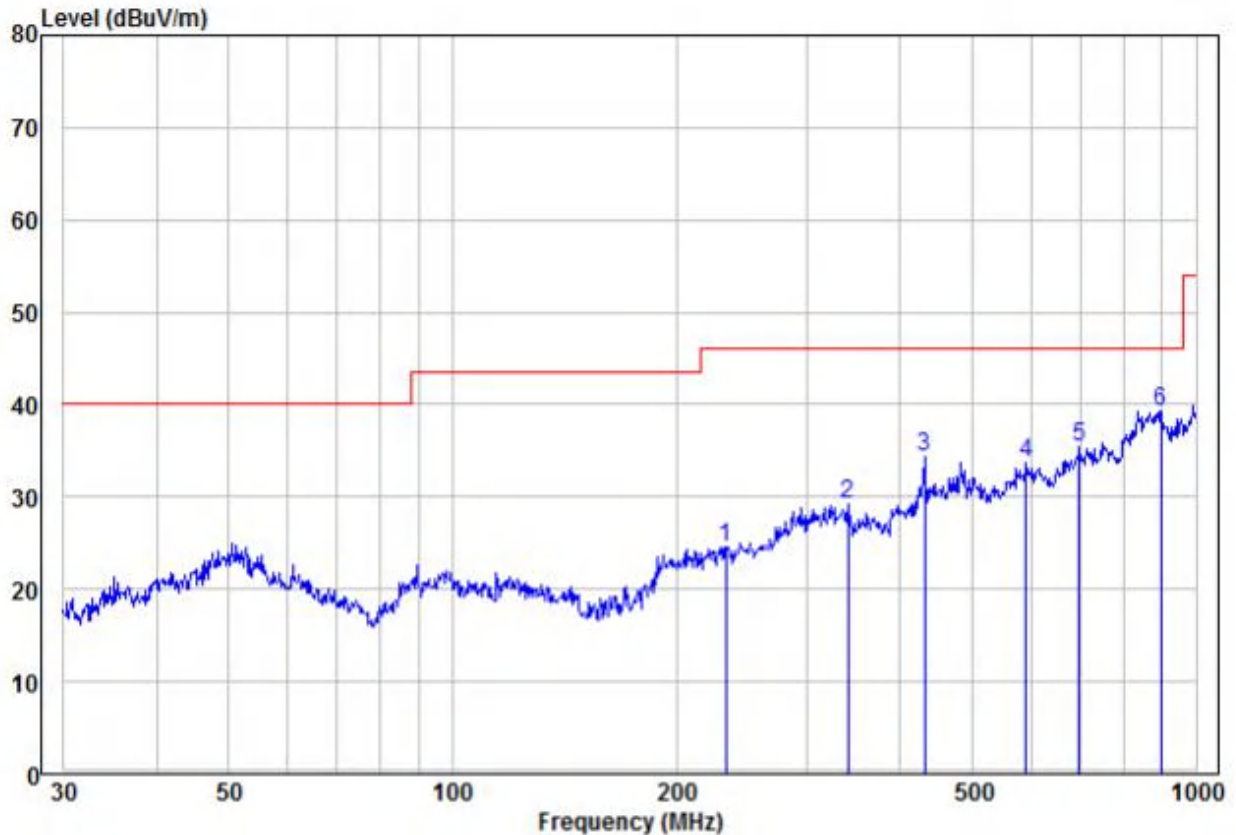

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	233.35	9.43	15.19	24.62	46.00	-21.38	Peak	VERTICAL	100	27
2	340.78	10.53	18.77	29.30	46.00	-16.70	Peak	VERTICAL	100	92
3	431.03	14.52	19.86	34.38	46.00	-11.62	Peak	VERTICAL	100	38
4	590.97	11.10	22.63	33.73	46.00	-12.27	Peak	VERTICAL	100	82
5	696.86	11.00	24.32	35.32	46.00	-10.68	Peak	VERTICAL	100	18
6 pp	897.00	9.66	29.56	39.22	46.00	-6.78	Peak	VERTICAL	100	108

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

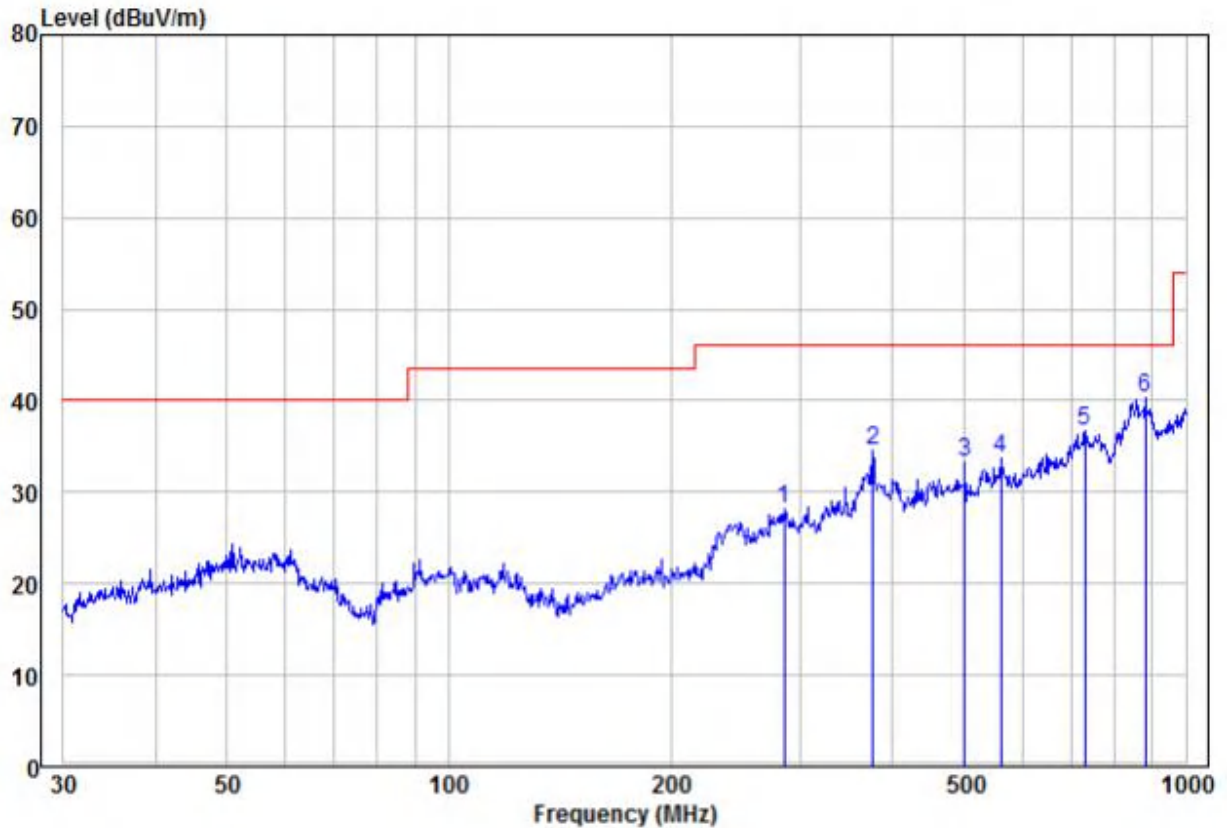

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	284.98	10.89	17.34	28.23	46.00	-17.77	Peak	HORIZONTAL	100	33
2	375.94	15.96	18.61	34.57	46.00	-11.43	Peak	HORIZONTAL	100	65
3	501.18	11.46	21.84	33.30	46.00	-12.70	Peak	HORIZONTAL	100	73
4	560.69	11.11	22.52	33.63	46.00	-12.37	Peak	HORIZONTAL	100	120
5	729.36	11.91	24.70	36.61	46.00	-9.39	Peak	HORIZONTAL	100	283
6 pp	881.41	10.84	29.52	40.36	46.00	-5.64	Peak	HORIZONTAL	100	52

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.9.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.47	-4.26	49.21	74	-24.79	peak	H	1.5	111
4824.000	36.50	-4.26	32.24	54	-21.76	AVG	H	1.5	352
7236.000	51.72	1.18	52.90	74	-21.10	peak	H	1.5	102
7236.000	38.86	1.18	40.04	54	-13.96	AVG	H	1.5	276
4824.000	54.78	-4.26	50.52	74	-23.48	peak	V	1.5	206
4824.000	38.87	-4.26	34.61	54	-19.39	AVG	V	1.5	212
7236.000	51.08	1.18	52.26	74	-21.74	peak	V	1.5	90
7236.000	36.04	1.18	37.22	54	-16.78	AVG	V	1.5	278

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.64	-4.12	48.52	74	-25.48	peak	H	1.5	256
4874.000	36.58	-4.12	32.46	54	-21.54	AVG	H	1.5	351
7311.000	49.89	1.46	51.35	74	-22.65	peak	H	1.5	156
7311.000	35.01	1.46	36.47	54	-17.53	AVG	H	1.5	251
4874.000	53.55	-4.12	49.43	74	-24.57	peak	V	1.5	234
4874.000	36.26	-4.12	32.14	54	-21.86	AVG	V	1.5	313
7311.000	49.48	1.46	50.94	74	-23.06	peak	V	1.5	169
7311.000	35.95	1.46	37.41	54	-16.59	AVG	V	1.5	143

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	51.53	-4.03	47.50	74	-26.50	peak	H	1.5	218
4924.000	37.00	-4.03	32.97	54	-21.03	AVG	H	1.5	236
7386.000	49.62	1.66	51.28	74	-22.72	peak	H	1.5	216
7386.000	37.63	1.66	39.29	54	-14.71	AVG	H	1.5	236
4924.000	53.44	-4.03	49.41	74	-24.59	peak	V	1.5	99
4924.000	37.07	-4.03	33.04	54	-20.96	AVG	V	1.5	308
7386.000	50.34	1.66	52.00	74	-22.00	peak	V	1.5	23
7386.000	37.66	1.66	39.32	54	-14.68	AVG	V	1.5	152

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	54.04	-4.26	49.78	74	-24.22	peak	H	1.5	343
4824.000	36.47	-4.26	32.21	54	-21.79	AVG	H	1.5	351
7236.000	52.05	1.18	53.23	74	-20.77	peak	H	1.5	90
7236.000	37.62	1.18	38.80	54	-15.20	AVG	H	1.5	93
4824.000	54.39	-4.26	50.13	74	-23.87	peak	V	1.5	328
4824.000	38.51	-4.26	34.25	54	-19.75	AVG	V	1.5	195
7236.000	51.23	1.18	52.41	74	-21.59	peak	V	1.5	139
7236.000	36.47	1.18	37.65	54	-16.35	AVG	V	1.5	11

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.31	-4.12	47.19	74	-26.81	peak	H	1.5	265
4874.000	37.72	-4.12	33.60	54	-20.40	AVG	H	1.5	75
7311.000	48.49	1.46	49.95	74	-24.05	peak	H	1.5	236
7311.000	36.54	1.46	38.00	54	-16.00	AVG	H	1.5	184
4874.000	52.68	-4.12	48.56	74	-25.44	peak	V	1.5	275
4874.000	37.38	-4.12	33.26	54	-20.74	AVG	V	1.5	223
7311.000	48.61	1.46	50.07	74	-23.93	peak	V	1.5	228
7311.000	36.52	1.46	37.98	54	-16.02	AVG	V	1.5	94

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	53.22	-4.03	49.19	74	-24.81	peak	H	1.5	315
4924.000	38.23	-4.03	34.20	54	-19.80	AVG	H	1.5	332
7386.000	50.32	1.66	51.98	74	-22.02	peak	H	1.5	65
7386.000	37.34	1.66	39.00	54	-15.00	AVG	H	1.5	15
4924.000	53.56	-4.03	49.53	74	-24.47	peak	V	1.5	113
4924.000	38.04	-4.03	34.01	54	-19.99	AVG	V	1.5	171
7386.000	49.83	1.66	51.49	74	-22.51	peak	V	1.5	341
7386.000	37.08	1.66	38.74	54	-15.26	AVG	V	1.5	86

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.85	-4.26	49.59	74	-24.41	peak	H	1.5	25
4824.000	36.31	-4.26	32.05	54	-21.95	AVG	H	1.5	248
7236.000	50.44	1.18	51.62	74	-22.38	peak	H	1.5	283
7236.000	37.91	1.18	39.09	54	-14.91	AVG	H	1.5	194
4824.000	55.00	-4.26	50.74	74	-23.26	peak	V	1.5	265
4824.000	39.11	-4.26	34.85	54	-19.15	AVG	V	1.5	162
7236.000	50.59	1.18	51.77	74	-22.23	peak	V	1.5	84
7236.000	36.02	1.18	37.20	54	-16.80	AVG	V	1.5	160

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	53.05	-4.12	48.93	74	-25.07	peak	H	1.5	300
4874.000	37.70	-4.12	33.58	54	-20.42	AVG	H	1.5	58
7311.000	48.66	1.46	50.12	74	-23.88	peak	H	1.5	162
7311.000	35.69	1.46	37.15	54	-16.85	AVG	H	1.5	235
4874.000	54.11	-4.12	49.99	74	-24.01	peak	V	1.5	25
4874.000	36.27	-4.12	32.15	54	-21.85	AVG	V	1.5	271
7311.000	48.31	1.46	49.77	74	-24.23	peak	V	1.5	268
7311.000	35.24	1.46	36.70	54	-17.30	AVG	V	1.5	79

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	52.32	-4.03	48.29	74	-25.71	peak	H	1.5	99
4924.000	38.35	-4.03	34.32	54	-19.68	AVG	H	1.5	107
7386.000	49.57	1.66	51.23	74	-22.77	peak	H	1.5	252
7386.000	36.70	1.66	38.36	54	-15.64	AVG	H	1.5	348
4924.000	54.96	-4.03	50.93	74	-23.07	peak	V	1.5	227
4924.000	37.58	-4.03	33.55	54	-20.45	AVG	V	1.5	212
7386.000	50.48	1.66	52.14	74	-21.86	peak	V	1.5	38
7386.000	36.87	1.66	38.53	54	-15.47	AVG	V	1.5	254

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.29	-4.24	48.05	74	-25.95	peak	H	1.5	256
4824.000	37.78	-4.24	33.54	54	-20.46	AVG	H	1.5	30
7236.000	50.55	1.2	51.75	74	-22.25	peak	H	1.5	65
7236.000	38.49	1.2	39.69	54	-14.31	AVG	H	1.5	223
4824.000	54.89	-4.24	50.65	74	-23.35	peak	V	1.5	34
4824.000	38.93	-4.24	34.69	54	-19.31	AVG	V	1.5	261
7236.000	51.78	1.2	52.98	74	-21.02	peak	V	1.5	200
7236.000	35.01	1.2	36.21	54	-17.79	AVG	V	1.5	166

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.05	-4.12	47.93	74	-26.07	peak	H	1.5	16
4874.000	37.71	-4.12	33.59	54	-20.41	AVG	H	1.5	114
7311.000	49.64	1.46	51.10	74	-22.90	peak	H	1.5	55
7311.000	36.87	1.46	38.33	54	-15.67	AVG	H	1.5	51
4874.000	53.72	-4.12	49.60	74	-24.40	peak	V	1.5	147
4874.000	37.20	-4.12	33.08	54	-20.92	AVG	V	1.5	345
7311.000	48.88	1.46	50.34	74	-23.66	peak	V	1.5	91
7311.000	35.32	1.46	36.78	54	-17.22	AVG	V	1.5	25

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	52.66	-4.05	48.61	74	-25.39	peak	H	1.5	296
4924.000	36.87	-4.05	32.82	54	-21.18	AVG	H	1.5	91
7386.000	50.68	1.64	52.32	74	-21.68	peak	H	1.5	69
7386.000	37.49	1.64	39.13	54	-14.87	AVG	H	1.5	43
4924.000	55.60	-4.05	51.55	74	-22.45	peak	V	1.5	135
4924.000	39.54	-4.05	35.49	54	-18.51	AVG	V	1.5	136
7386.000	50.58	1.64	52.22	74	-21.78	peak	V	1.5	313
7386.000	36.44	1.64	38.08	54	-15.92	AVG	V	1.5	238

Remark:

- 1) The MCS0 of rate of 802.11n40 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

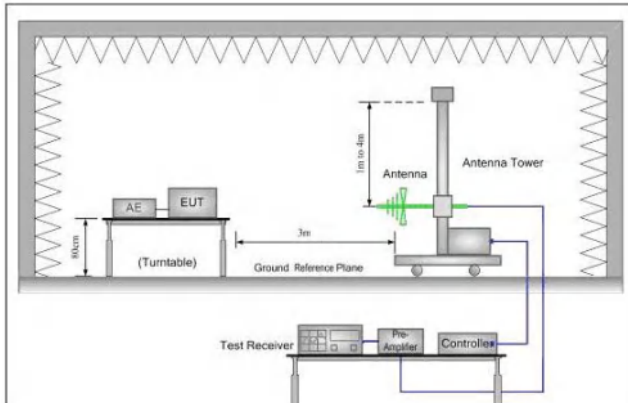


Figure 1. 30MHz to 1GHz

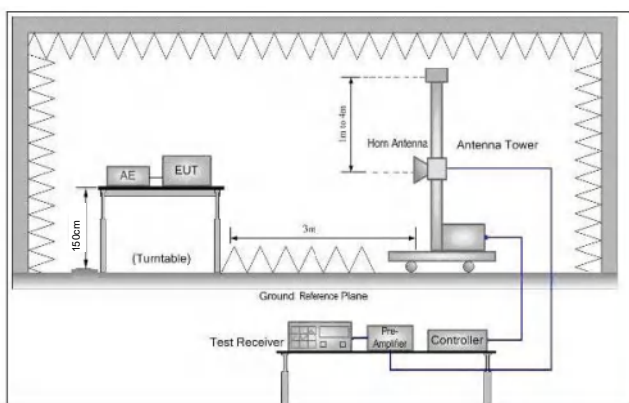


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	59.00	-9.2	49.80	74	-24.20	peak	H	1.5	157
2390.000	44.15	-9.2	34.95	54	-19.05	AVG	H	1.5	122
2400.000	59.82	-9.39	50.43	74	-23.57	peak	H	1.5	299
2400.000	46.73	-9.39	37.34	54	-16.66	AVG	H	1.5	193
2390.000	58.92	-9.2	49.72	74	-24.28	peak	V	1.5	286
2390.000	44.69	-9.2	35.49	54	-18.51	AVG	V	1.5	163
2400.000	59.45	-9.39	50.06	74	-23.94	peak	V	1.5	110
2400.000	46.86	-9.39	37.47	54	-16.53	AVG	V	1.5	356

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.87	-9.29	48.58	74	-25.42	peak	H	1.5	18
2483.500	43.76	-9.29	34.47	54	-19.53	AVG	H	1.5	310
2483.500	58.40	-9.29	49.11	74	-24.89	peak	V	1.5	227
2483.500	45.54	-9.29	36.25	54	-17.75	AVG	V	1.5	231

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.36	-9.2	49.16	74	-24.84	peak	H	1.5	128
2390.000	44.47	-9.2	35.27	54	-18.73	AVG	H	1.5	45
2400.000	59.51	-9.39	50.12	74	-23.88	peak	H	1.5	279
2400.000	46.68	-9.39	37.29	54	-16.71	AVG	H	1.5	255
2390.000	58.31	-9.2	49.11	74	-24.89	peak	V	1.5	108
2390.000	44.42	-9.2	35.22	54	-18.78	AVG	V	1.5	236
2400.000	60.16	-9.39	50.77	74	-23.23	peak	V	1.5	196
2400.000	46.85	-9.39	37.46	54	-16.54	AVG	V	1.5	103

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.76	-9.29	48.47	74	-25.53	peak	H	1.5	194
2483.500	43.48	-9.29	34.19	54	-19.81	AVG	H	1.5	231
2483.500	57.82	-9.29	48.53	74	-25.47	peak	V	1.5	148
2483.500	45.64	-9.29	36.35	54	-17.65	AVG	V	1.5	329

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	59.23	-9.2	50.03	74	-23.97	peak	H	1.5	106
2390.000	44.54	-9.2	35.34	54	-18.66	AVG	H	1.5	138
2400.000	59.73	-9.39	50.34	74	-23.66	peak	H	1.5	219
2400.000	46.08	-9.39	36.69	54	-17.31	AVG	H	1.5	6
2390.000	58.81	-9.2	49.61	74	-24.39	peak	V	1.5	23
2390.000	44.81	-9.2	35.61	54	-18.39	AVG	V	1.5	233
2400.000	60.13	-9.39	50.74	74	-23.26	peak	V	1.5	256
2400.000	46.27	-9.39	36.88	54	-17.12	AVG	V	1.5	192

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.39	-9.29	49.10	74	-24.90	peak	H	1.5	342
2483.500	43.50	-9.29	34.21	54	-19.79	AVG	H	1.5	283
2483.500	58.15	-9.29	48.86	74	-25.14	peak	V	1.5	62
2483.500	46.13	-9.29	36.84	54	-17.16	AVG	V	1.5	273

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	59.03	-9.2	49.83	74	-24.17	peak	H	1.5	148
2390.000	44.18	-9.2	34.98	54	-19.02	AVG	H	1.5	96
2400.000	59.35	-9.39	49.96	74	-24.04	peak	H	1.5	238
2400.000	46.71	-9.39	37.32	54	-16.68	AVG	H	1.5	309
2390.000	58.64	-9.2	49.44	74	-24.56	peak	V	1.5	268
2390.000	44.19	-9.2	34.99	54	-19.01	AVG	V	1.5	265
2400.000	59.56	-9.39	50.17	74	-23.83	peak	V	1.5	13
2400.000	46.71	-9.39	37.32	54	-16.68	AVG	V	1.5	169

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.96	-9.29	48.67	74	-25.33	peak	H	1.5	89
2483.500	43.59	-9.29	34.30	54	-19.70	AVG	H	1.5	13
2483.500	57.74	-9.29	48.45	74	-25.55	peak	V	1.5	253
2483.500	46.17	-9.29	36.88	54	-17.12	AVG	V	1.5	27

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission


9kHz~30MHz:

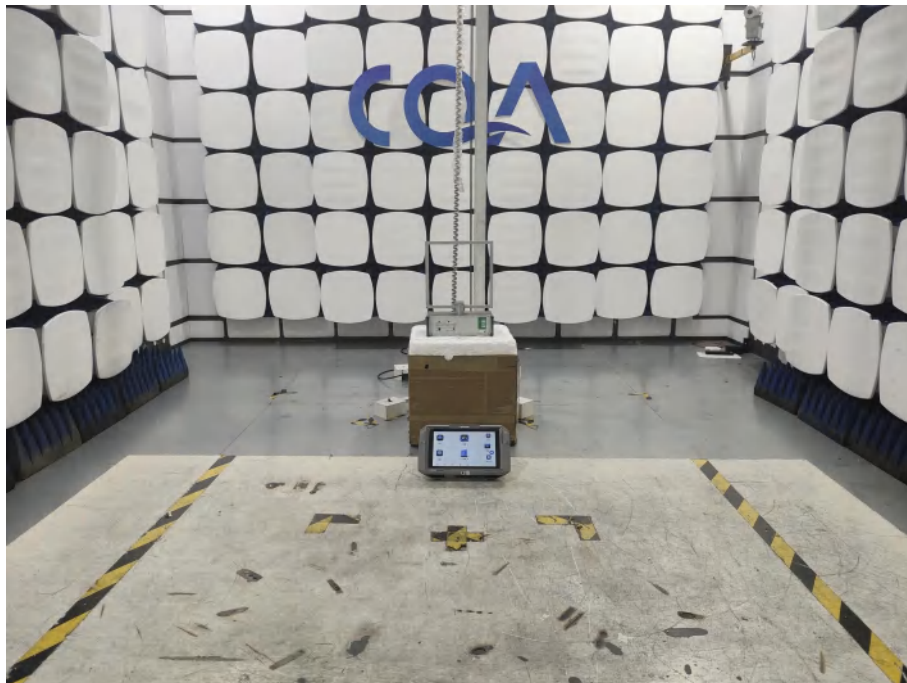

30MHz~1GHz:

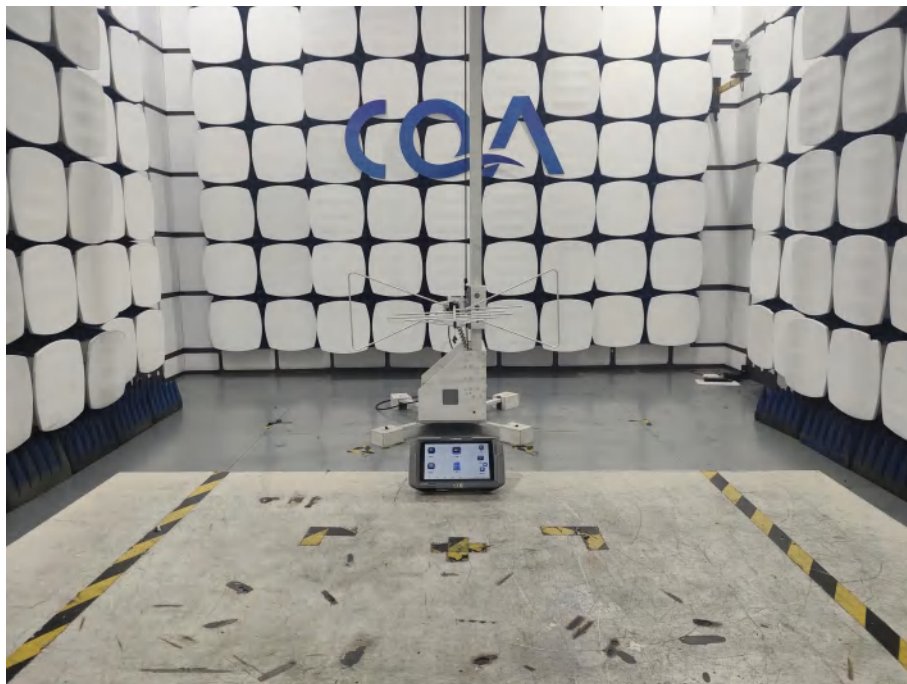

Above 1GHz:

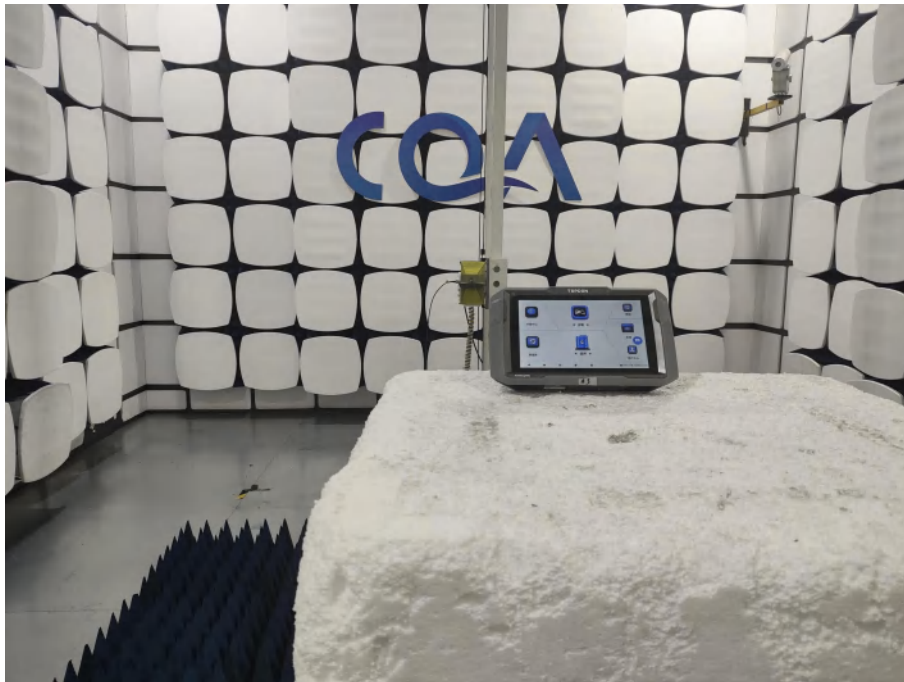

6.2 Conducted Emission





6.3 RF Conducted measurement



7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20250701536E-01.

*** END OF REPORT ***