

Prüfbericht-Nr.: Test report no.:	CN24LM90 002	Auftrags-Nr.: Order no.:	168485064	Seite 1 von 21 Page 1 of 21
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2024-09-27	
Auftraggeber: Client:	SAIC GM WULING AUTOMOBILE CO.,LTD 18th Hexi Road, Liuzhou City, Guangxi, Zhuang Autonomous Region, China			
Prüfgegenstand: Test item:	ICE (In Car Entertainment)			
Bezeichnung / Typ-Nr.: Identification / Type no.:	MP-202S-00			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2024-09-27			
Prüfmuster-Nr.: Test sample no.:	A003717814-001~003			
Prüfzeitraum: Testing period:	2024-10-27 - 2024-12-20			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date: 2025-05-20	Signed by: Jonathan Li		Ausstellungsdatum: Issue date: 2025-05-20	Signed by: Bell Hu
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	This report is for BDR/EDR operation. FCC ID: 2AVYX-MP202S00			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN24LM90 002
Test report no.:

Seite 2 von 21
Page 2 of 21

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 99% BANDWIDTH

RESULT: Pass

5.1.4 20dB BANDWIDTH

RESULT: Pass

5.1.5 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.6 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.7 TIME OF OCCUPANCY

RESULT: Pass

5.1.8 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.9 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2	TEST SITES.....	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	6
2.4	CALIBRATION.....	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS.....	7
3.3	INDEPENDENT OPERATION MODES.....	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	12
5.1.1	<i>Antenna Requirement.....</i>	<i>12</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>13</i>
5.1.3	<i>99% Bandwidth.....</i>	<i>14</i>
5.1.4	<i>20dB Bandwidth</i>	<i>15</i>
5.1.5	<i>Carrier Frequency Separation</i>	<i>16</i>
5.1.6	<i>Number of Hopping Frequency</i>	<i>17</i>
5.1.7	<i>Time of Occupancy.....</i>	<i>18</i>
5.1.8	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth.....</i>	<i>19</i>
5.1.9	<i>Radiated Spurious Emission</i>	<i>20</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	21
7	LIST OF TABLES.....	21

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Bluetooth BR/EDR mode

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street,
Longhua District, Shenzhen 518000, People's Republic of China

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	25.09.2025
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	25.09.2025
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	25.09.2025
DC Power Supply	Keysight	E3642A	MY61276100	25.09.2025
Wireless Connectivity Tester	R&S	CMW270	102505	25.09.2025
Power Control Unit	Tonscend	JS0806-4ADC	N/A	25.09.2025
Automation Control Unit	Tonscend	JS0806-2	21C8060396	25.09.2025
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	28.09.2025
Signal Analyzer	R&S	FSV 40	101439	28.09.2025
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	28.09.2025
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	28.09.2025
Amplifier	R&S	SCU-18F	180070	28.09.2025
Amplifier	R&S	SCU40A	100475	28.09.2025
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	27.09.2026
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	27.09.2026
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	27.09.2026
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	27.09.2026
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	13.09.2027

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	$\pm 2.08 \%$
RF output power, conducted	$\pm 0.99 \text{ dB}$
Unwanted Emissions, conducted	$\pm 0.89 \text{ dB}$
All emissions, radiated	$\pm 4.17 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at **Error! Reference source not found.** is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Headset which supports Classic Bluetooth wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Product Name:	ICE (In Car Entertainment)
Model No.:	MP-202S-00
Operating Voltage:	DC 12V
Testing Voltage:	DC 12 V
Operating Temperature Range:	-30 °C ~ 80 °C
Operating Temperature Range:	0 °C ~ 40 °C
Technical Specification of Bluetooth BR/EDR	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	79 channels
Channel Separation:	1MHz
Antenna Type:	Integral Antenna
Antenna Gain of Bluetooth:	1 dBi

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

Table 4: RF Channel and Frequency of Bluetooth BR/EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for Bluetooth BR/EDR

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Transmitting on Hopping channel
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

Prüfbericht - Nr.: CN24LM90 002
Test Report No.:

Seite 9 von 21
Page 9 of 21

3.5 Submitted Documents

- | | |
|----------------------------------|-------------------------|
| - Application Form | - Operation Description |
| - FCC/IC Label and Location Info | - Block Diagram |
| - Schematics | - PCB Layout |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model MP-202S-00 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

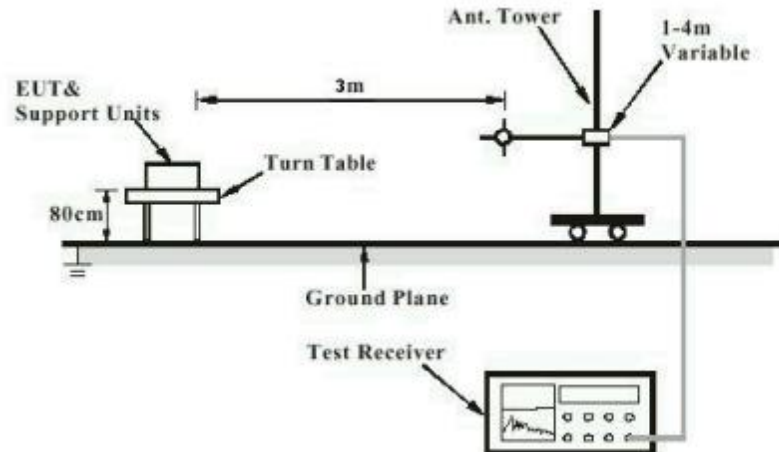


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


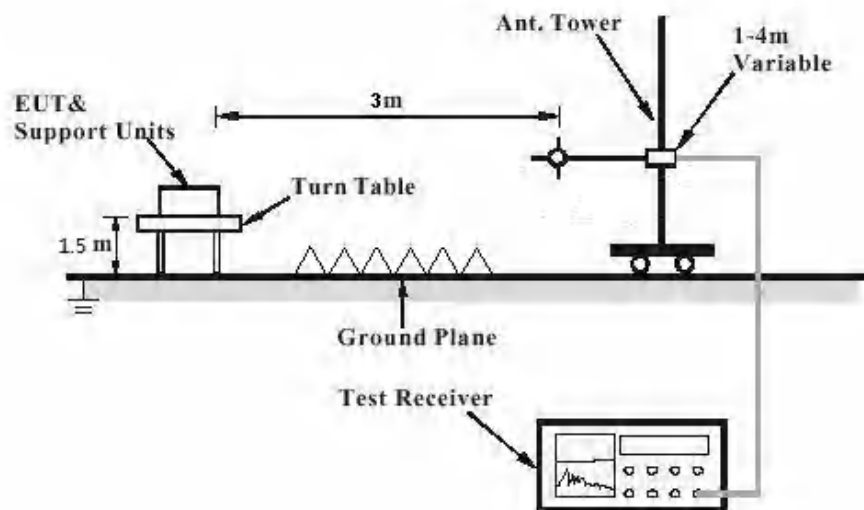


Diagram of Measurement Configuration for Conducted Transmitter Measurement

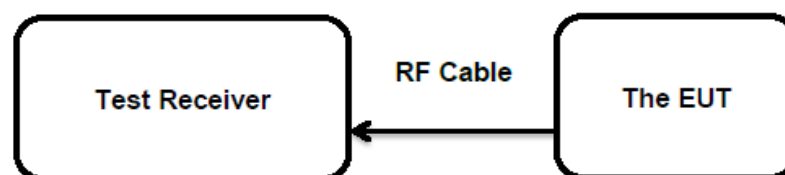

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has an Integral antenna, the directional gain of antenna is 1dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN24LM90 002
Test Report No.:

Seite 13 von 21
Page 13 of 21

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(1)
RSS-247 Clause 5.4(b)
Basic standard : ANSI C63.10: 2013
Limits : FHSS < 0.125 Watts
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-10-27 - 2024-12-20
Input voltage : DC 12.0V
Operation mode : B
Ambient temperature : 24.9 °C
Relative humidity : 41 %
Atmospheric pressure : 101 kPa

Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BR)	2402.0	7.34	0.0054	< 0.125
	2441.0	7.89	0.0062	
	2480.0	7.93	0.0062	
Maximum Measured Value		7.93	0.0062	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	6.69	0.0047	< 0.125
	2441.0	7.32	0.0054	
	2480.0	7.09	0.0051	
Maximum Measured Value		7.32	0.0054	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 1dBi

Prüfbericht - Nr.: CN24LM90 002
Test Report No.:

Seite 14 von 21
Page 14 of 21

5.1.3 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)
RSS-Gen Clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-10-27 - 2024-12-20
Input voltage : DC 12.0V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.9 °C
Relative humidity : 41 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN24LM90 002
Test Report No.:

Seite 15 von 21
Page 15 of 21

5.1.4 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
RSS-247 Clause 5.1(a)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-10-27 - 2024-12-20
Input voltage : DC 12.0V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.9 °C
Relative humidity : 41 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **CN24LM90 002**
Test Report No.:Seite 16 von 21
Page 16 of 21

5.1.5 Carrier Frequency Separation

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-10-27 - 2024-12-20
Input voltage	: DC 12.0V
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: $24.9\text{ }^{\circ}\text{C}$
Relative humidity	: 41 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN24LM90 002
Test Report No.:

Seite 17 von 21
Page 17 of 21

5.1.6 Number of Hopping Frequency

RESULT:

Pass

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 Clause 5.1(d)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-10-27 - 2024-12-20
Input voltage : DC 12.0V
Operation mode : B
Ambient temperature : 24.9 °C
Relative humidity : 41 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN24LM90 002
Test Report No.:

Seite 18 von 21
Page 18 of 21

5.1.7 Time of Occupancy

RESULT:

Pass

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 Clause 5.1(d)
Basic standard : ANSI C63.10: 2013
Limits : < 0.4s
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-10-27 - 2024-12-20
Input voltage : DC 12.0V
Operation mode : B
Ambient temperature : 24.9 °C
Relative humidity : 41 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **CN24LM90 002**
Test Report No.:Seite 19 von 21
Page 19 of 21**5.1.8 Conducted Spurious Emissions Measured in 100 kHz Bandwidth****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-10-27 - 2024-12-20
Input voltage	: DC 12.0V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.9 °C
Relative humidity	: 41 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **CN24LM90 002**
Test Report No.:Seite 20 von 21
Page 20 of 21

5.1.9 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(d) & FCC Part 15.205
RSS-247 Clause 3.3

Basic standard : ANSI C63.10: 2013

Limits : Refer to 15.209(a) of FCC part 15.247(d)
RSS-Gen Section 8.9 & 8.10

Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2024-10-27 - 2024-12-20

Input voltage : DC 12.0V

Operation mode : A

Test channel : Low / Middle / High

Ambient temperature : Refer to test result

Relative humidity : Refer to test result

Atmospheric pressure : 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT.....	7
Table 4: RF Channel and Frequency of Bluetooth BR/EDR.....	8
Table 5: Auxiliary Equipment Used during Test	10
Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR.....	13

Appendix A: Test Results of Bluetooth LE

APPENDIX A: TEST RESULTS OF BLUETOOTH LE	1
1.1 20dB EMISSION BANDWIDTH.....	2
1.1.1 Test Result	2
1.1.2 Test Graphs.....	3
1.2 OCCUPIED CHANNEL BANDWIDTH	6
1.2.1 Test Result	6
1.2.2 Test Graphs.....	7
1.3 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	10
1.3.1 Test Result PK.....	10
1.3.2 Test Result AV.....	10
1.3.3 Test Graphs PK.....	11
1.4 CARRIER FREQUENCY SEPARATION	14
1.4.1 Test Result	14
1.4.2 Test Graphs.....	15
1.5 TIME OF OCCUPANCY	16
1.5.1 Test Result	16
1.5.2 Test Graphs.....	17
1.6 NUMBER OF HOPPING CHANNELS	22
1.6.1 Test Result	22
1.6.2 Test Graphs.....	23
1.7 BAND EDGE MEASUREMENTS	24
1.7.1 Test Result	24
1.7.2 Test Graphs.....	25
1.8 CONDUCTED SPURIOUS EMISSION	28
1.8.1 Test Result	28
1.8.2 Test Graphs.....	29
1.9 DUTY CYCLE	36
1.9.1 Test Result	36
1.9.2 Test Graphs.....	37
1.10 TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	40
1.11 TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	54

1.1 20dB Emission Bandwidth

1.1.1 Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.936	2401.538	2402.474	---	---
		2441	0.945	2440.535	2441.480	---	---
		2480	0.942	2479.535	2480.477	---	---
3DH5	Ant1	2402	1.347	2401.319	2402.666	---	---
		2441	1.347	2440.319	2441.666	---	---
		2480	1.347	2479.319	2480.666	---	---

1.1.2 Test Graphs





3DH5 Ant1 2402



3DH5 Ant1 2441



3DH5 Ant1 2480




1.2 Occupied Channel Bandwidth

1.2.1 Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.90604	2401.5487	2402.4548	---	---
		2441	0.90623	2440.5460	2441.4522	---	---
		2480	0.90649	2479.5457	2480.4521	---	---
3DH5	Ant1	2402	1.2106	2401.3832	2402.5938	---	---
		2441	1.2068	2440.3860	2441.5928	---	---
		2480	1.2078	2479.3844	2480.5922	---	---

1.2.2 Test Graphs

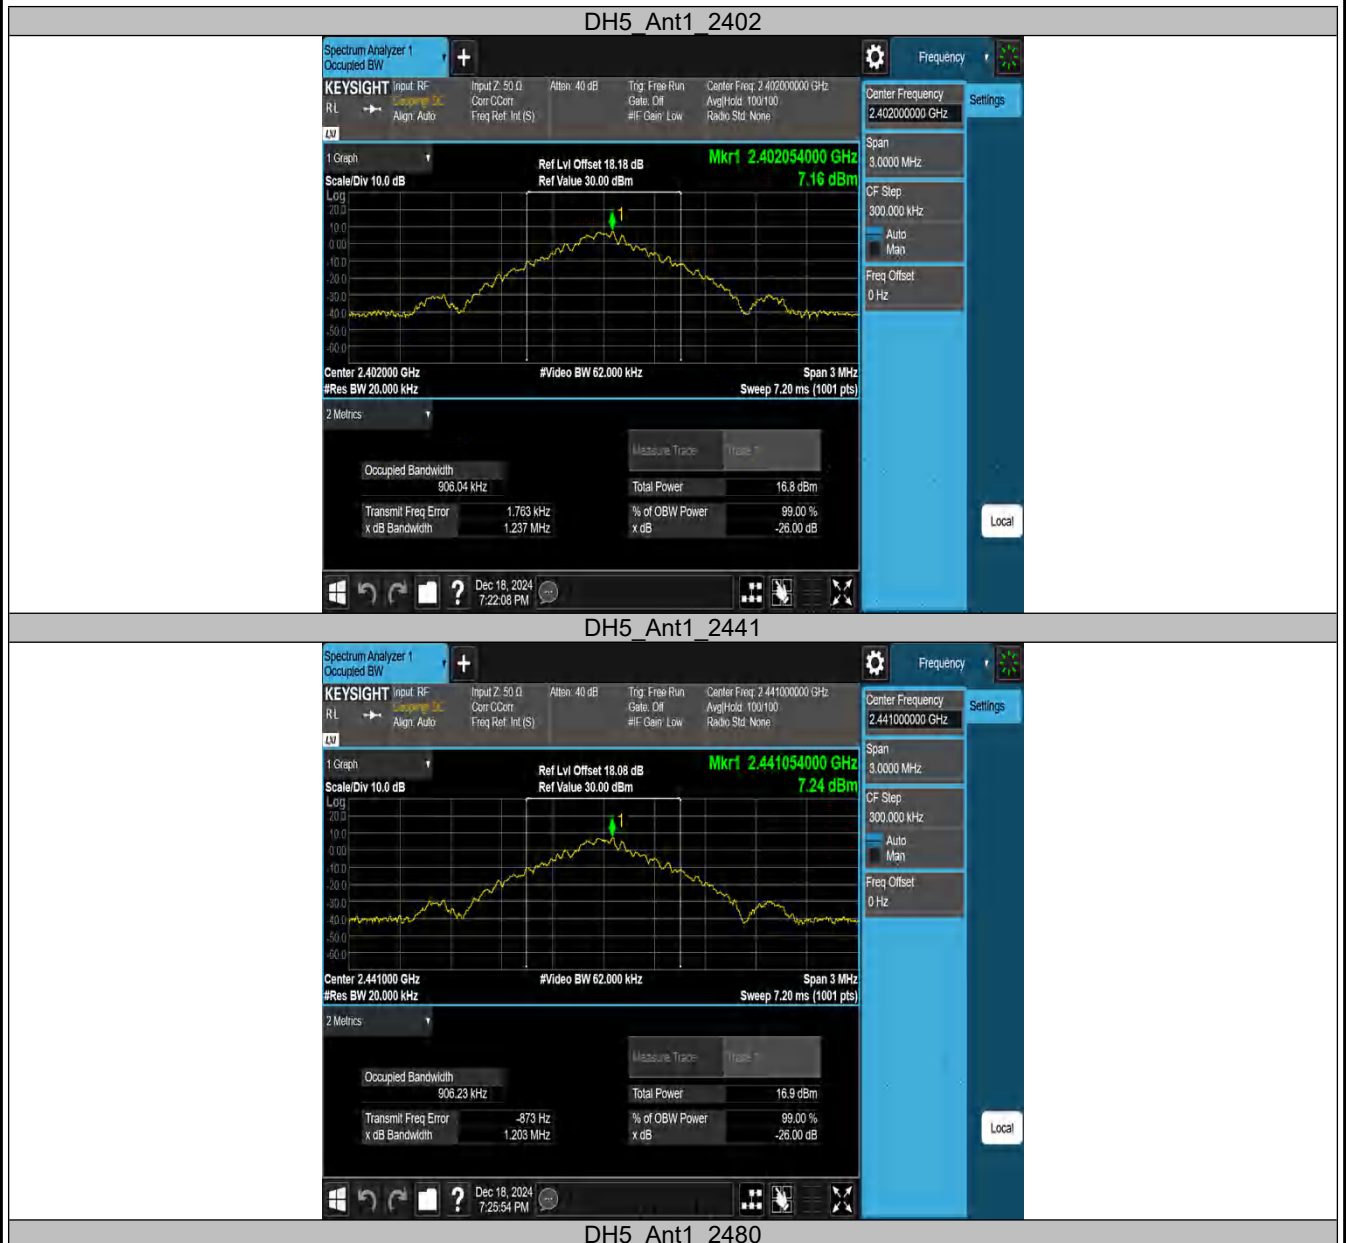




3DH5 Ant1_2402



3DH5 Ant1_2441

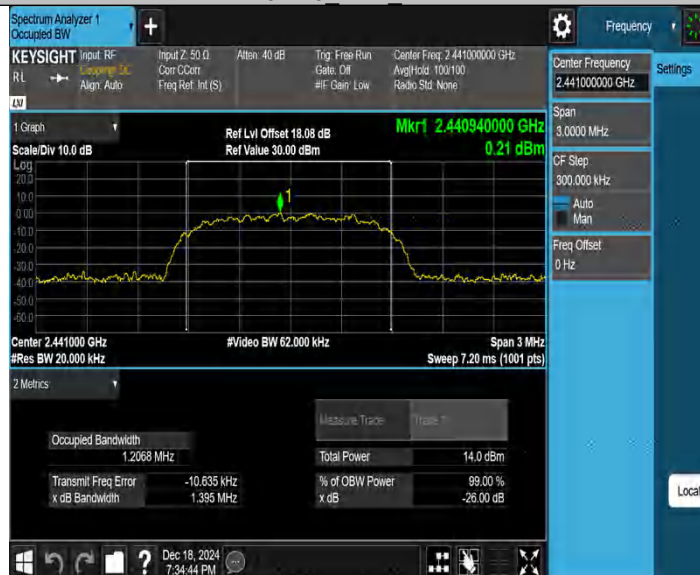

3DH5 Ant1_2480



1.3 Appendix C: Maximum conducted output power


1.3.1 Test Result PK

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	7.34	≤ 20.97	PASS
		2441	7.89	≤ 20.97	PASS
		2480	7.93	≤ 20.97	PASS
3DH5	Ant1	2402	6.69	≤ 20.97	PASS
		2441	7.32	≤ 20.97	PASS
		2480	7.09	≤ 20.97	PASS

1.3.2 Test Result AV

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	6.88	≤ 20.97	PASS
		2441	7.63	≤ 20.97	PASS
		2480	7.67	≤ 20.97	PASS
3DH5	Ant1	2402	3.77	≤ 20.97	PASS
		2441	4.62	≤ 20.97	PASS
		2480	4.64	≤ 20.97	PASS

1.3.3 Test Graphs PK

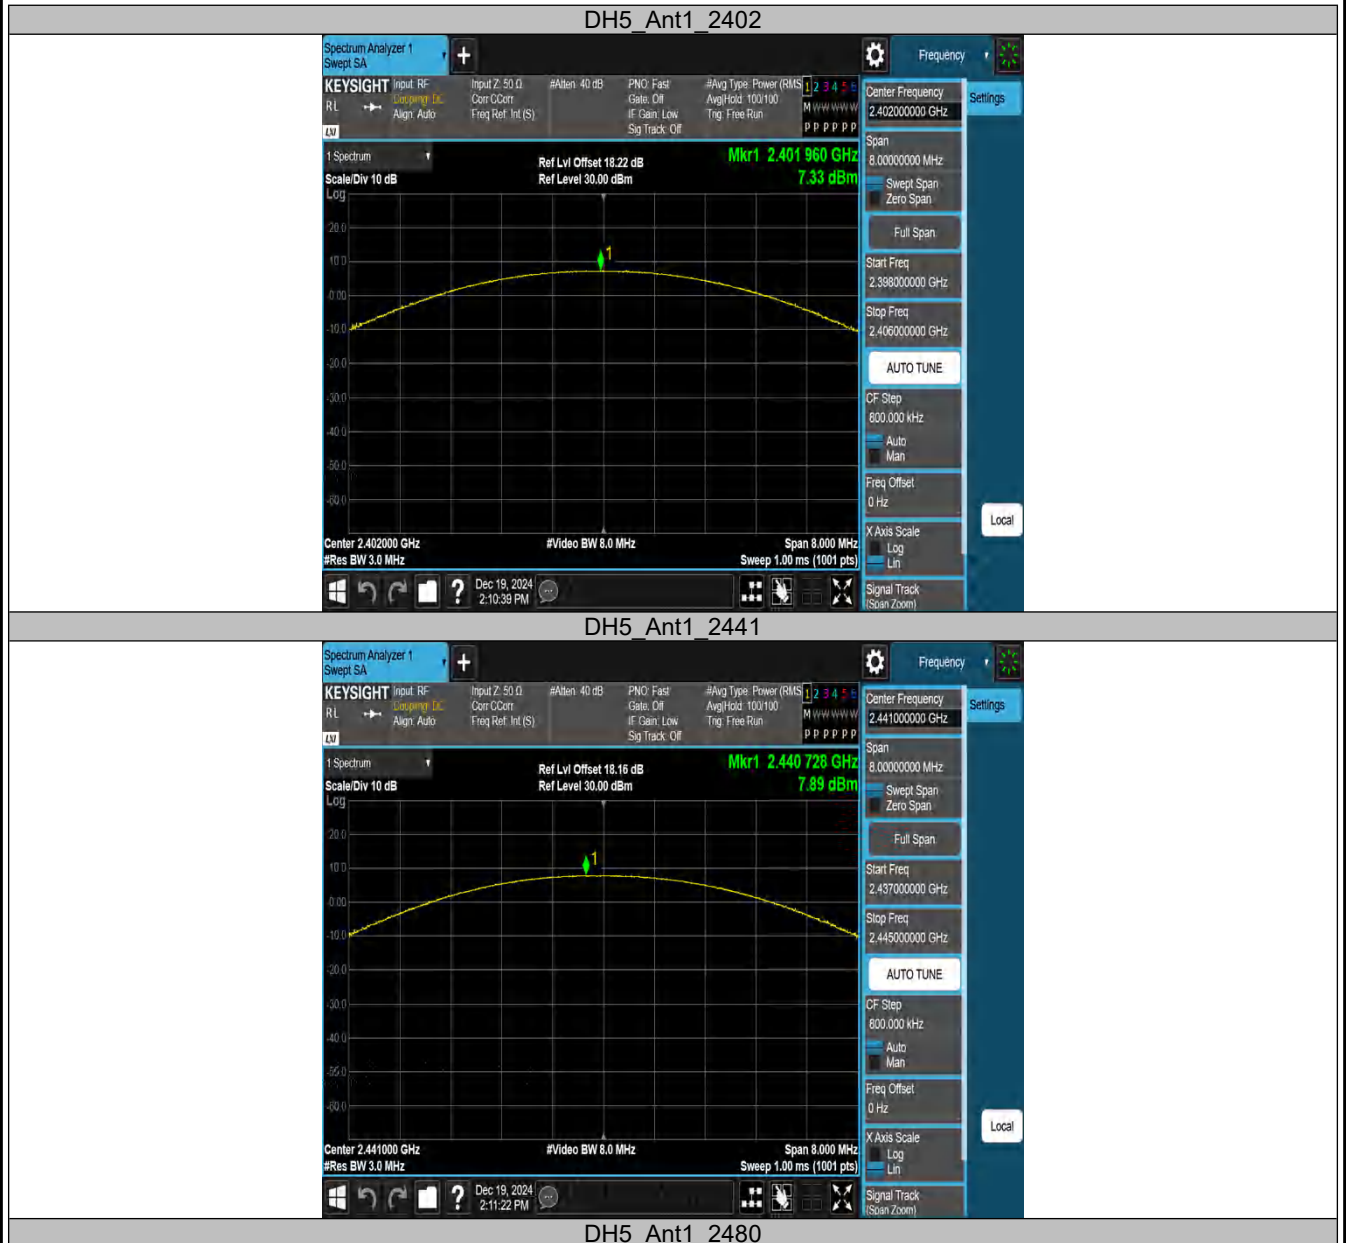



3DH5 Ant1 2402



3DH5 Ant1 2441



3DH5 Ant1 2480



1.4 Carrier frequency separation

1.4.1 Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.846	≥ 0.630	PASS
3DH5	Ant1	Hop	1.014	≥ 0.898	PASS

1.4.2 Test Graphs




1.5 Time of occupancy

1.5.1 Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.384	312	0.12	≤0.4	PASS
DH3	Ant1	Hop	0.391	158	0.062	≤0.4	PASS
DH5	Ant1	Hop	0.391	104	0.041	≤0.4	PASS
3DH1	Ant1	Hop	0.243	319	0.078	≤0.4	PASS
3DH3	Ant1	Hop	0.243	162	0.039	≤0.4	PASS
3DH5	Ant1	Hop	0.241	108	0.026	≤0.4	PASS

1.5.2 Test Graphs

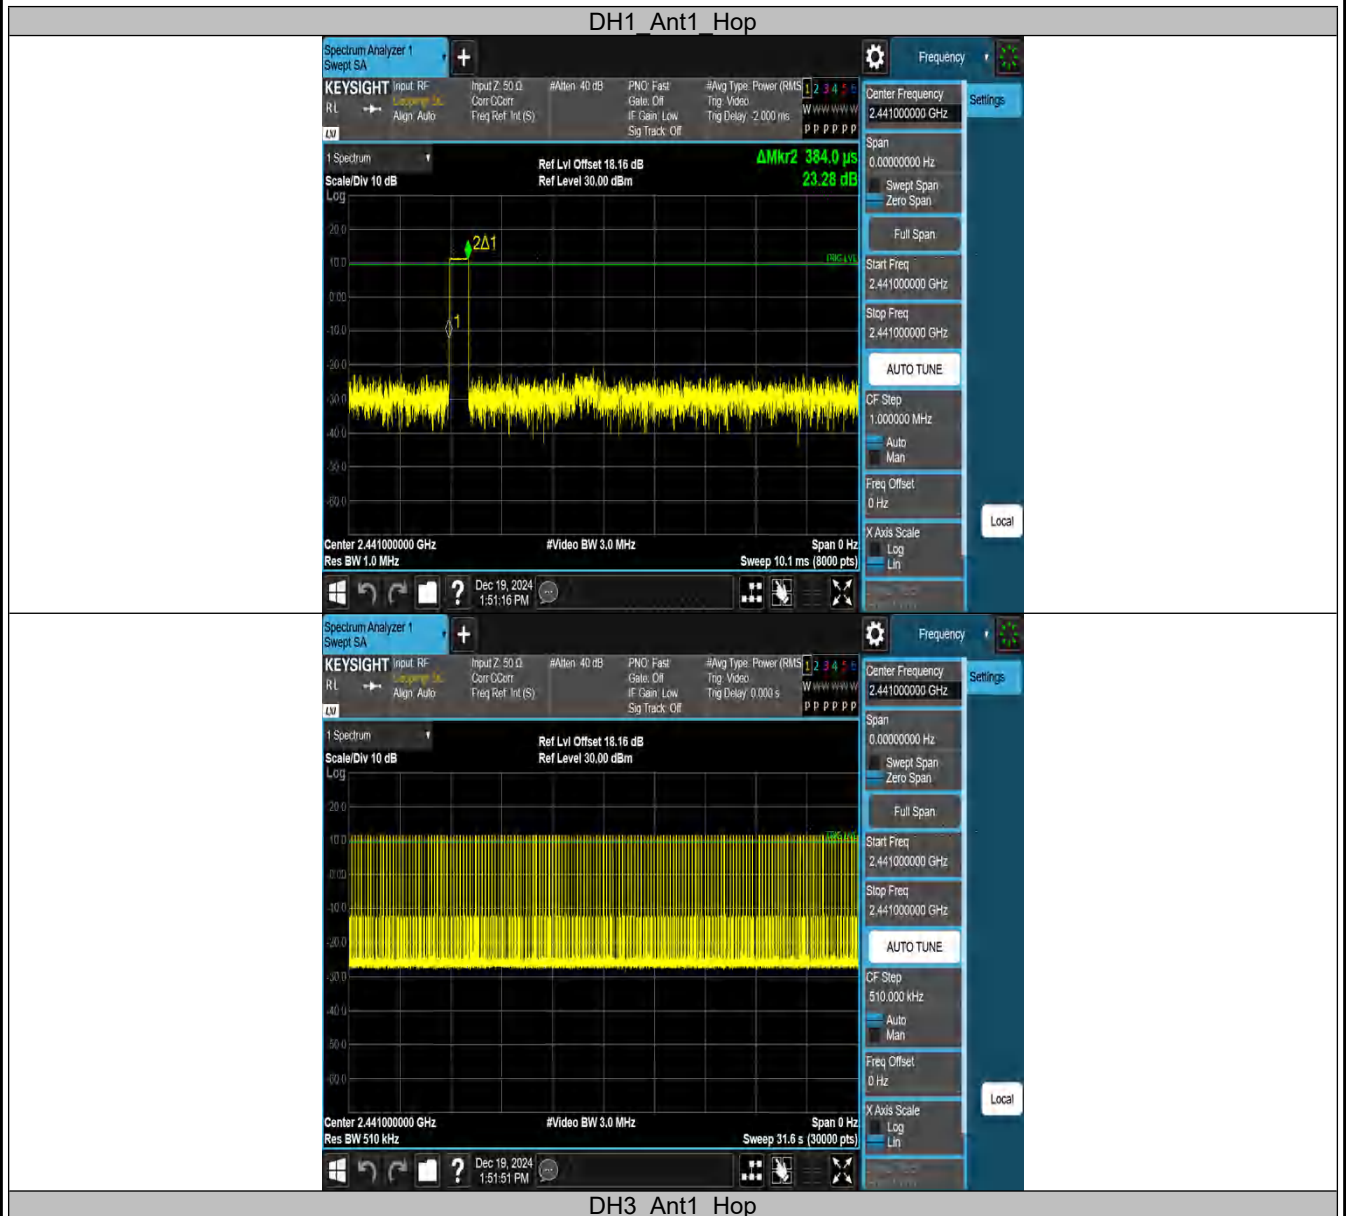



DH5 Ant1 Hop





3DH1_Ant1_Hop



3DH3_Ant1_Hop



3DH5 Ant1 Hop






1.6 Number of hopping channels

1.6.1 Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

1.6.2 Test Graphs

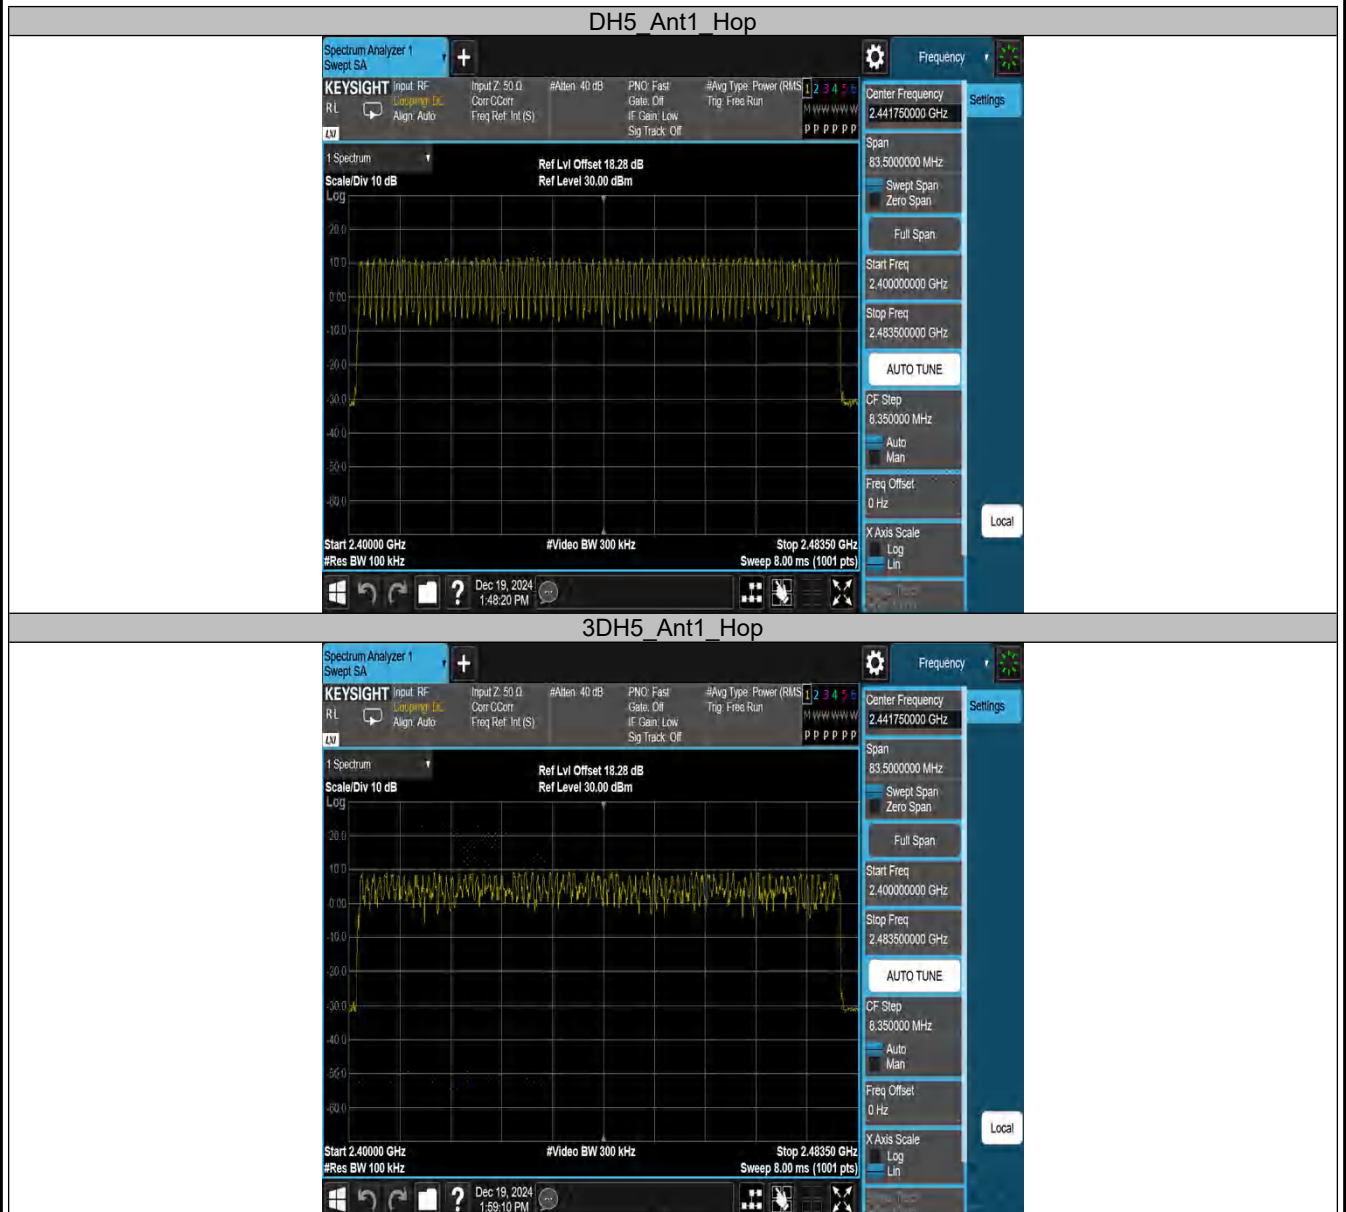

1.7 Band edge measurements

1.7.1 Test Result

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	8.41	-43.85	≤-11.59	PASS
		High	2480	8.38	-43.12	≤-11.63	PASS
3DH5	Ant1	Low	2402	3.70	-42.84	≤-16.30	PASS
		High	2480	3.71	-43.54	≤-16.29	PASS
DH5	Ant1	Hopping	2402	10.61	-43.77	≤-9.40	PASS
		Hopping	2480	10.52	-42.25	≤-9.48	PASS
3DH5	Ant1	Hopping	2402	7.91	-43.18	≤-12.09	PASS
		Hopping	2480	8.57	-42.32	≤-11.43	PASS

1.7.2 Test Graphs





DH5 Ant1 Hopping 2402



DH5 Ant1 Hopping 2480



3DH5 Ant1 Hopping 2402



3DH5_Ant1_Hopping_2480




1.8 Conducted Spurious Emission

1.8.1 Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	9.56	9.56	---	PASS
			30~1000	9.56	-41.95	≤-10.44	PASS
			1000~26500	9.56	-32.66	≤-10.44	PASS
		2441	Reference	9.77	9.77	---	PASS
			30~1000	9.77	-41.62	≤-10.23	PASS
			1000~26500	9.77	-32.88	≤-10.23	PASS
		2480	Reference	9.59	9.59	---	PASS
			30~1000	9.59	-42.11	≤-10.41	PASS
			1000~26500	9.59	-32.44	≤-10.41	PASS
3DH5	Ant1	2402	Reference	4.90	4.90	---	PASS
			30~1000	4.90	-42.42	≤-15.1	PASS
			1000~26500	4.90	-32.84	≤-15.1	PASS
		2441	Reference	5.24	5.24	---	PASS
			30~1000	5.24	-41.68	≤-14.76	PASS
			1000~26500	5.24	-32.48	≤-14.76	PASS
		2480	Reference	5.14	5.14	---	PASS
			30~1000	5.14	-41.68	≤-14.86	PASS
			1000~26500	5.14	-32.91	≤-14.86	PASS

1.8.2 Test Graphs

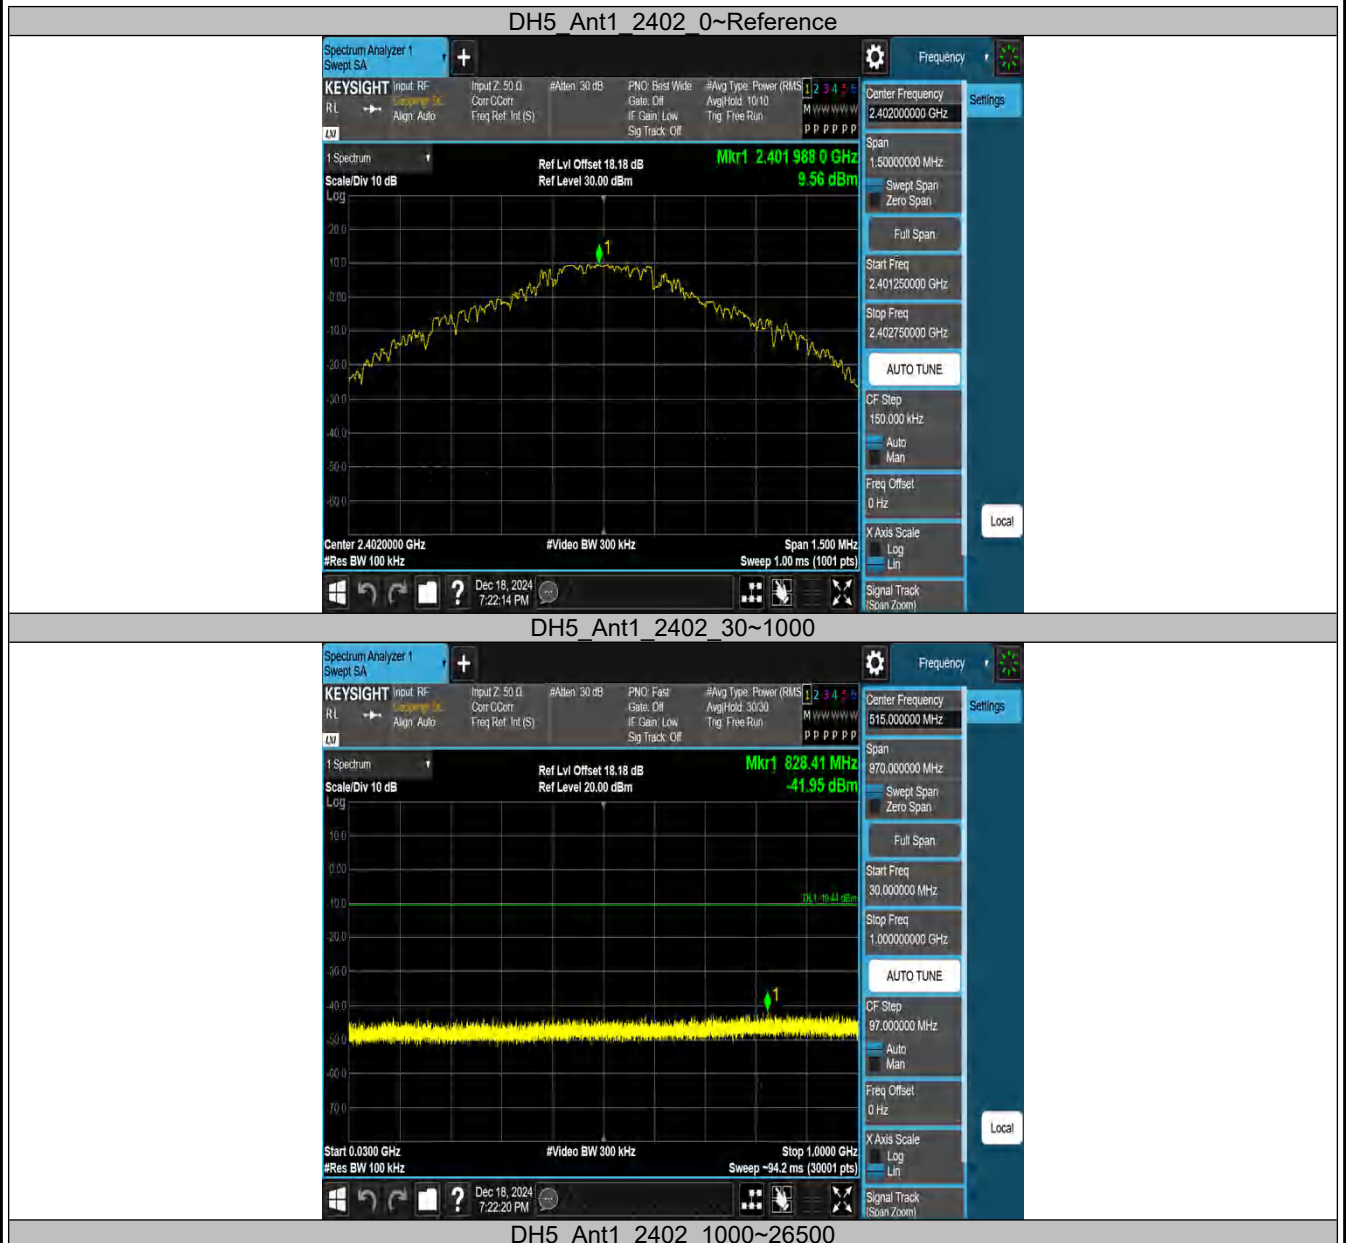




DH5_Ant1_2441_0~Reference



DH5_Ant1_2441_30~1000

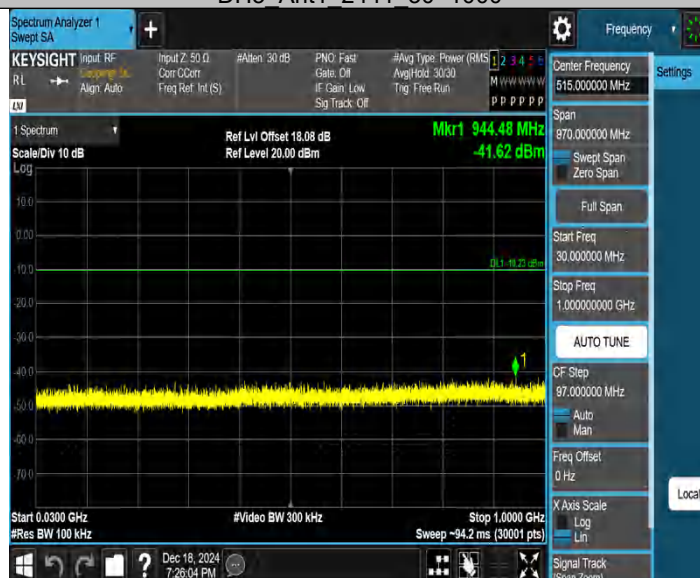

DH5_Ant1_2441_1000~26500



DH5 Ant1 2480 0~Reference



DH5 Ant1 2480 30~1000



DH5 Ant1 2480 1000~26500



3DH5_Ant1_2402_0~Reference



3DH5_Ant1_2402_30~1000



3DH5_Ant1_2402_1000~26500



3DH5_Ant1_2441_0~Reference



3DH5_Ant1_2441_30~1000



3DH5_Ant1_2441_1000~26500





1.9 Duty Cycle

1.9.1 Test Result

TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
DH5	Ant1	2402	20.26	20.26	1.0000	100.00	0.00	---	---
		2441	20.26	20.26	1.0000	100.00	0.00	---	---
		2480	30.00	30.00	1.0000	100.00	0.00	---	---
3DH5	Ant1	2402	30.00	30.00	1.0000	100.00	0.00	---	---
		2441	30.00	30.00	1.0000	100.00	0.00	---	---
		2480	30.00	30.00	1.0000	100.00	0.00	---	---

1.9.2 Test Graphs






3DH5 Ant1 2402



3DH5 Ant1 2441



3DH5 Ant1 2480

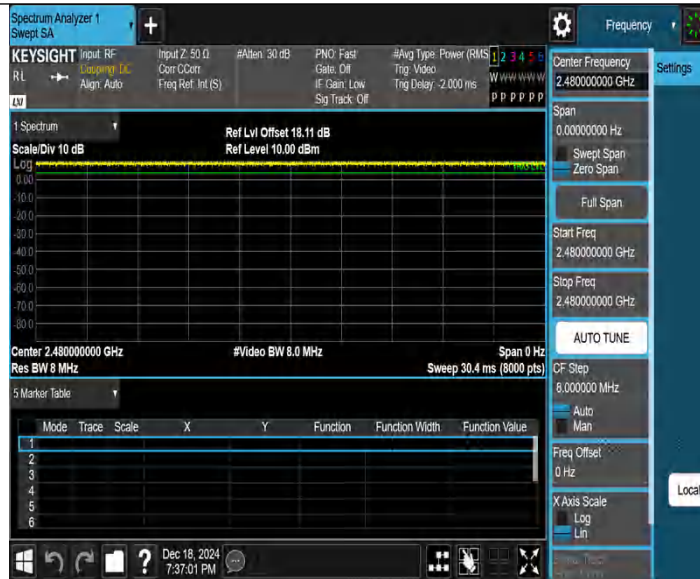

1.10 Test Results of Radiated Spurious Emissions


Note:

- 1) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.
30 MHz - 1GHz(Worst case)

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

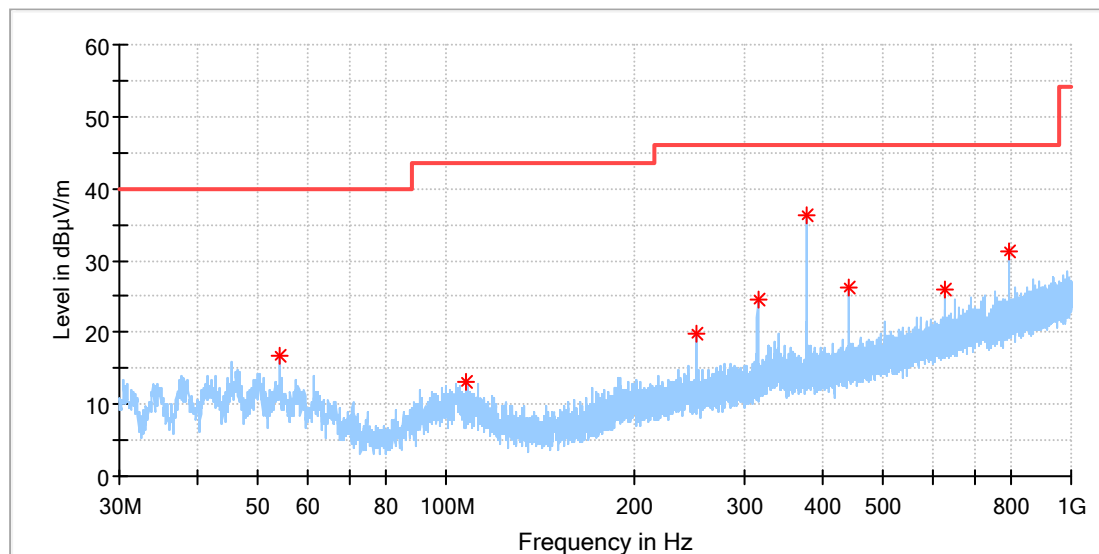

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.063462	16.76	40.00	23.24	100.0	H	78.0	-18.5
107.973077	13.00	43.50	30.50	100.0	H	183.0	-19.1
252.018077	19.74	46.00	26.26	100.0	H	328.0	-17.3
315.030769	24.63	46.00	21.37	100.0	H	60.0	-15.9
378.006154	36.26	46.00	9.74	100.0	H	217.0	-14.3
441.018846	26.15	46.00	19.85	100.0	H	233.0	-12.9
630.019615	25.85	46.00	20.15	100.0	H	0.0	-9.2
796.523846	31.26	46.00	14.74	100.0	H	127.0	-6.3


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

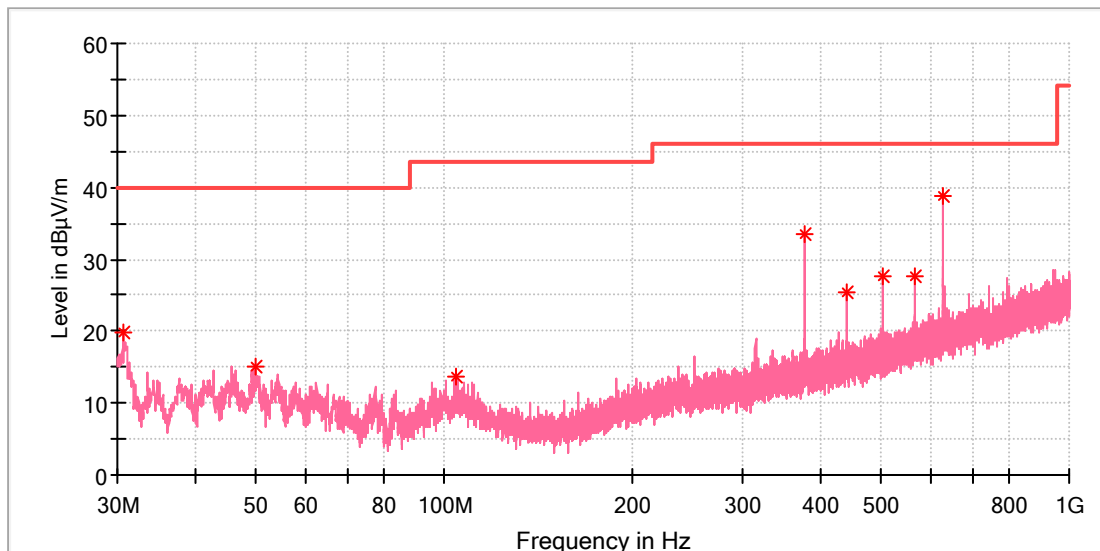

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.634231	19.77	40.00	20.23	100.0	V	57.0	-22.9
49.959615	14.99	40.00	25.01	100.0	V	0.0	-18.4
104.727308	13.78	43.50	29.72	100.0	V	293.0	-18.9
378.006154	33.55	46.00	12.45	100.0	V	96.0	-14.3
441.018846	25.38	46.00	20.62	100.0	V	185.0	-12.9
504.031539	27.55	46.00	18.46	100.0	V	177.0	-11.8
567.006923	27.75	46.00	18.25	100.0	V	152.0	-10.4
629.982308	38.85	46.00	7.15	100.0	V	152.0	-9.2

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Above 1G

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

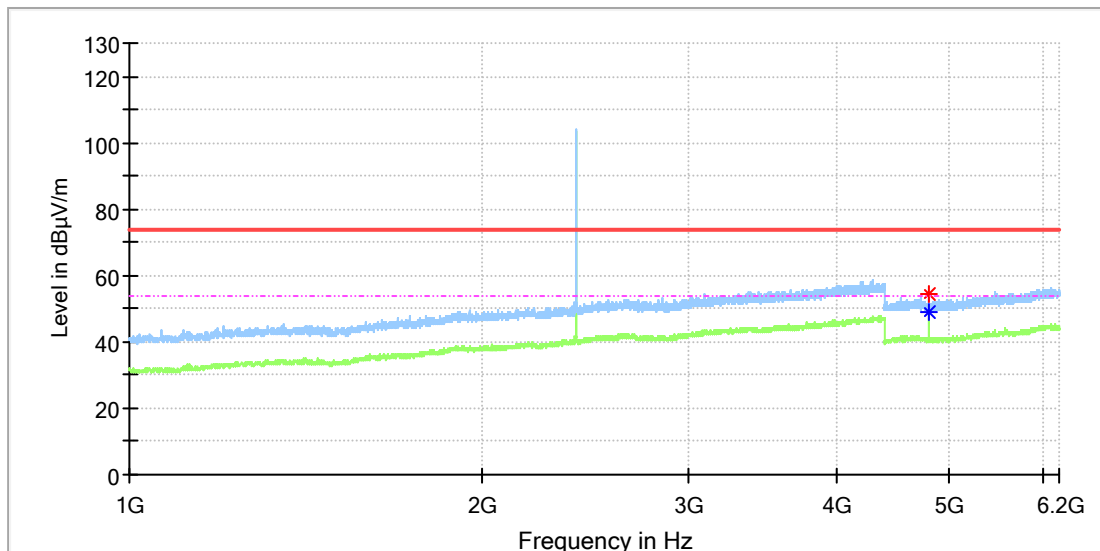

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	54.44	---	74.00	19.56	150.0	H	81.0	13.3
4804.000000	---	49.04	54.00	4.97	150.0	H	81.0	13.3


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

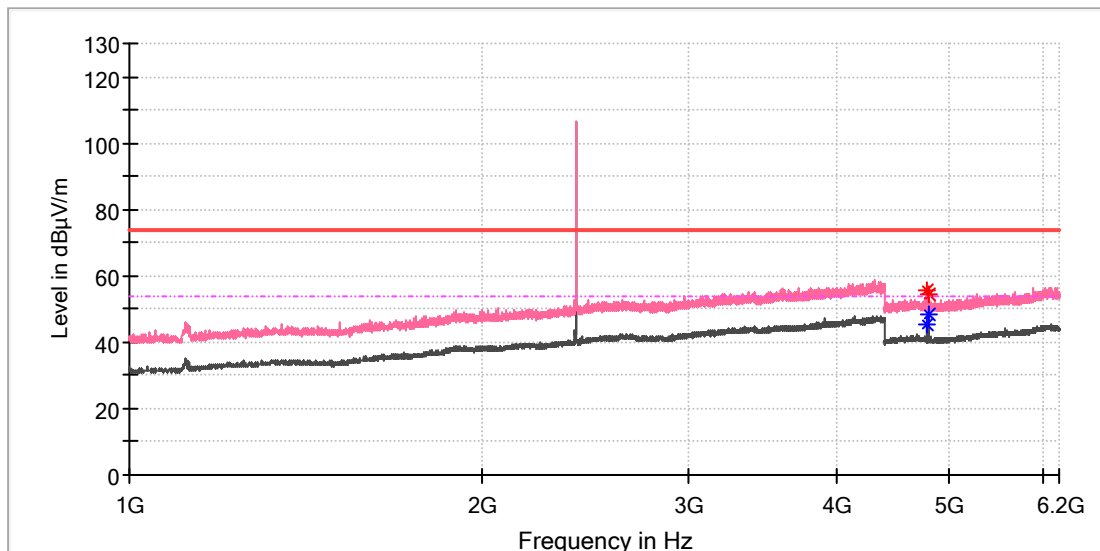

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4778.500000	---	45.21	54.00	8.79	150.0	V	3.0	13.3
4778.500000	55.84	---	74.00	18.16	150.0	V	3.0	13.3
4803.500000	54.72	---	74.00	19.28	150.0	V	98.0	13.3
4804.000000	---	48.57	54.00	5.43	150.0	V	98.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

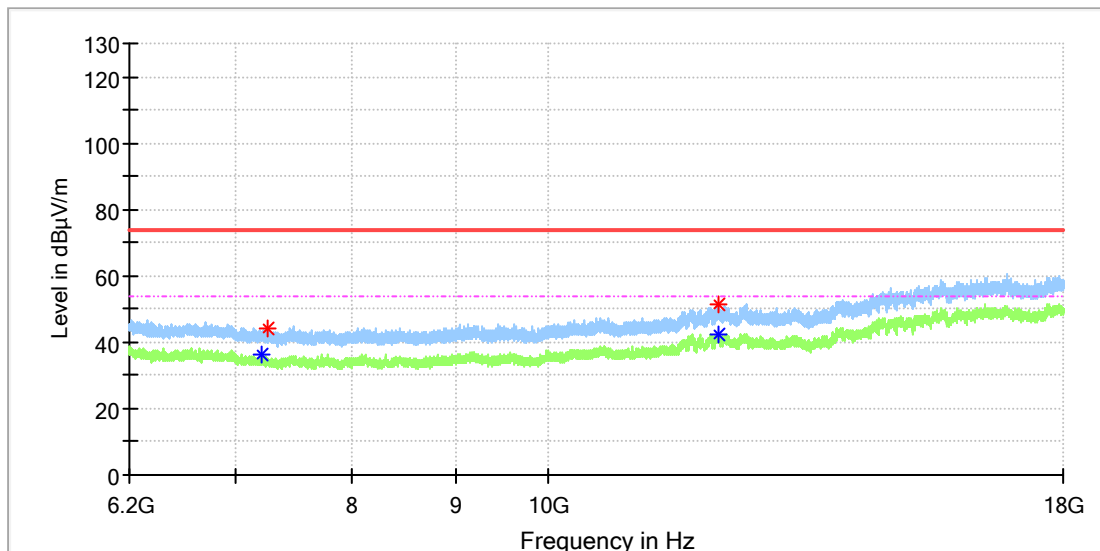

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	---	36.39	54.00	17.61	150.0	H	73.0	8.8
7266.916667	43.99	---	74.00	30.01	150.0	H	3.0	8.5
12148.183333	51.12	---	74.00	22.88	150.0	H	28.0	16.7
12151.625000	---	42.36	54.00	11.64	150.0	H	50.0	16.6


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

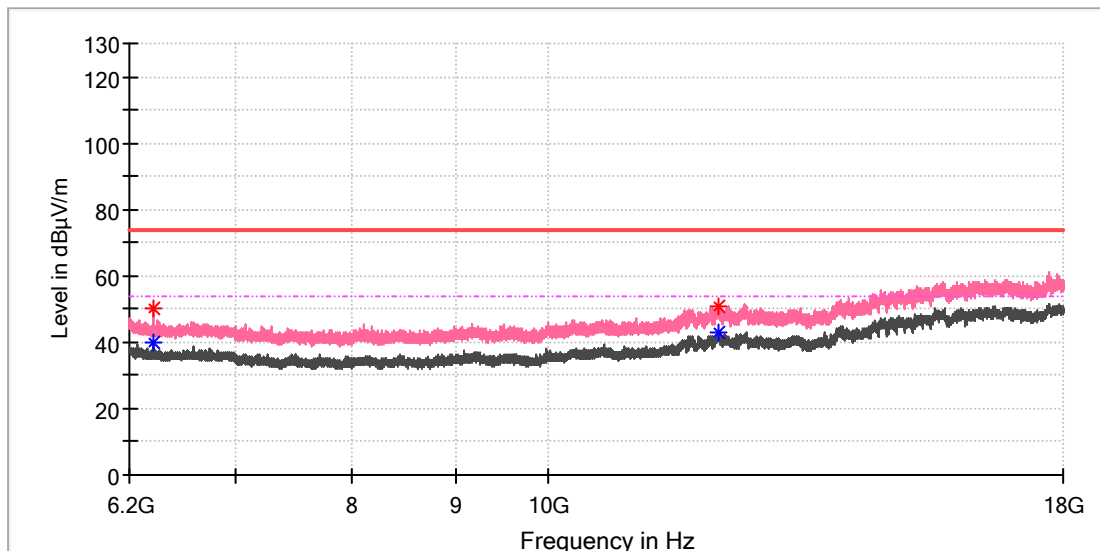

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6372.083333	---	40.11	54.00	13.89	150.0	V	328.0	8.9
6372.083333	50.13	---	74.00	23.87	150.0	V	328.0	8.9
12139.333333	50.89	---	74.00	23.11	150.0	V	306.0	16.5
12141.791667	---	43.02	54.00	10.98	150.0	V	148.0	16.5


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

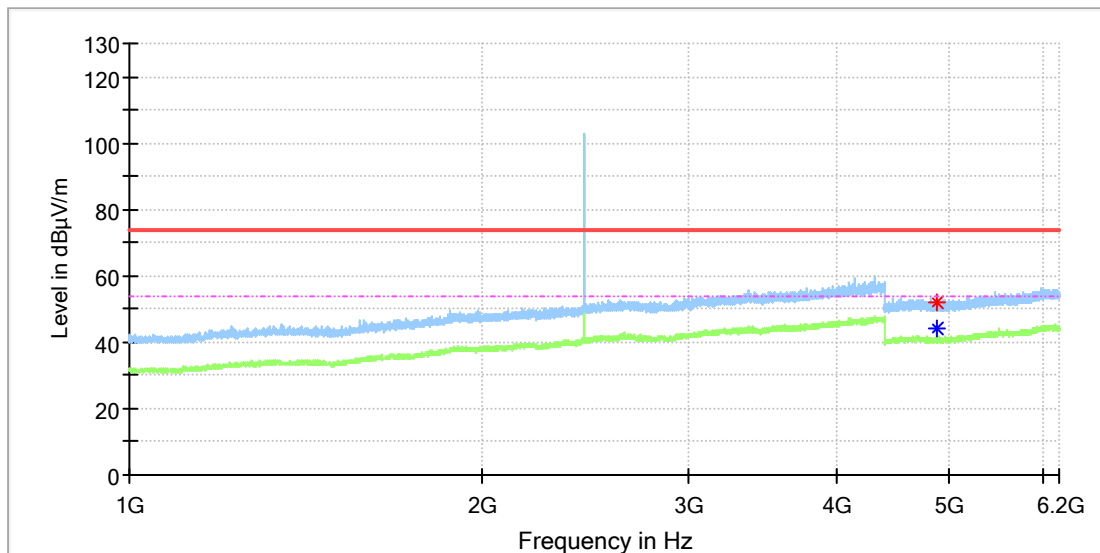

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4869.000000	52.29	---	74.00	21.71	150.0	H	111.0	13.3
4881.500000	---	43.89	54.00	10.11	150.0	H	80.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

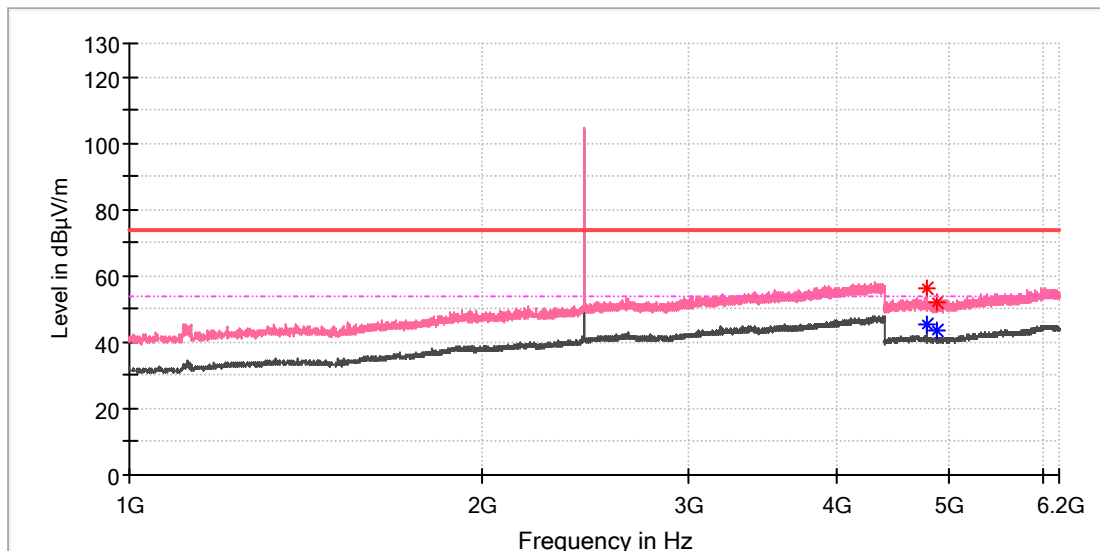

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4778.500000	56.22	---	74.00	17.78	150.0	V	343.0	13.3
4779.000000	---	45.60	54.00	8.40	150.0	V	4.0	13.3
4882.000000	51.72	---	74.00	22.28	150.0	V	15.0	13.3
4882.000000	---	43.33	54.00	10.67	150.0	V	15.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

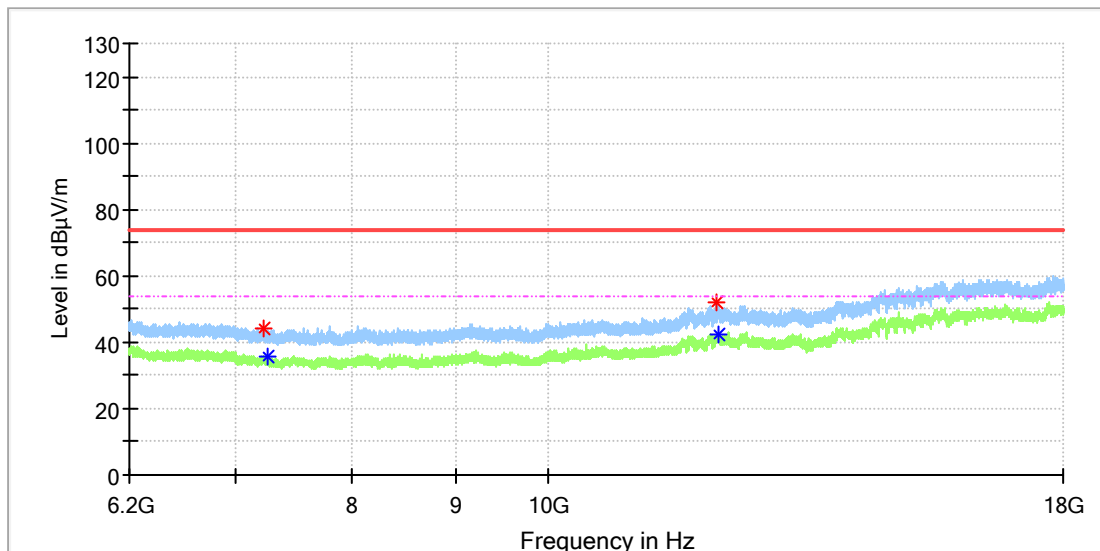

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7228.566667	44.00	---	74.00	30.00	150.0	H	260.0	8.7
7257.083333	---	35.97	54.00	18.03	150.0	H	359.0	8.5
12128.025000	52.06	---	74.00	21.94	150.0	H	194.0	16.2
12132.941667	---	42.62	54.00	11.38	150.0	H	308.0	16.3


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

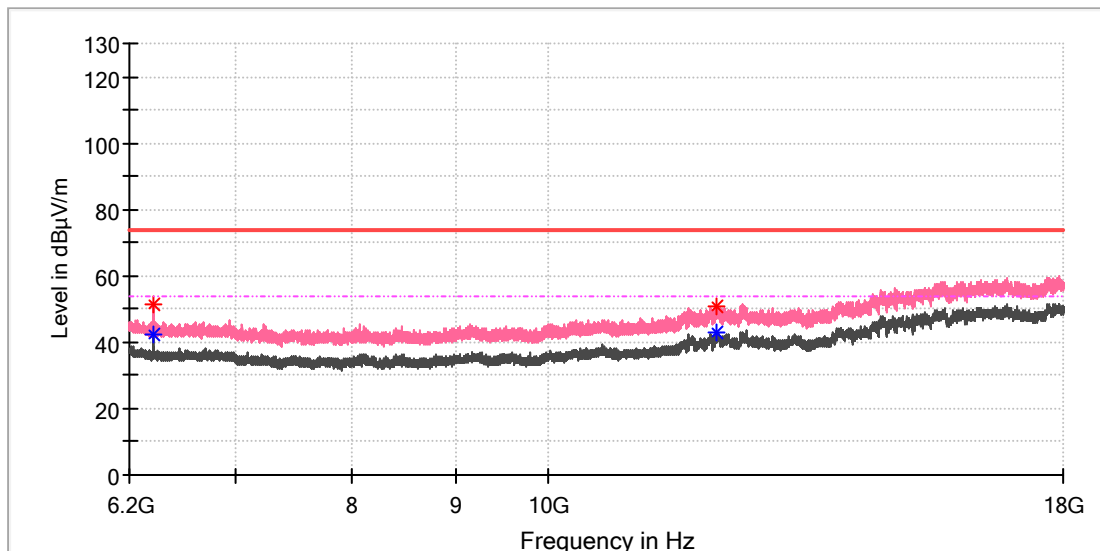

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6372.083333	51.54	---	74.00	22.46	150.0	V	340.0	8.9
6372.083333	---	42.27	54.00	11.73	150.0	V	340.0	8.9
12112.783333	---	42.69	54.00	11.31	150.0	V	0.0	15.8
12130.975000	51.07	---	74.00	22.93	150.0	V	202.0	16.2


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_High channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

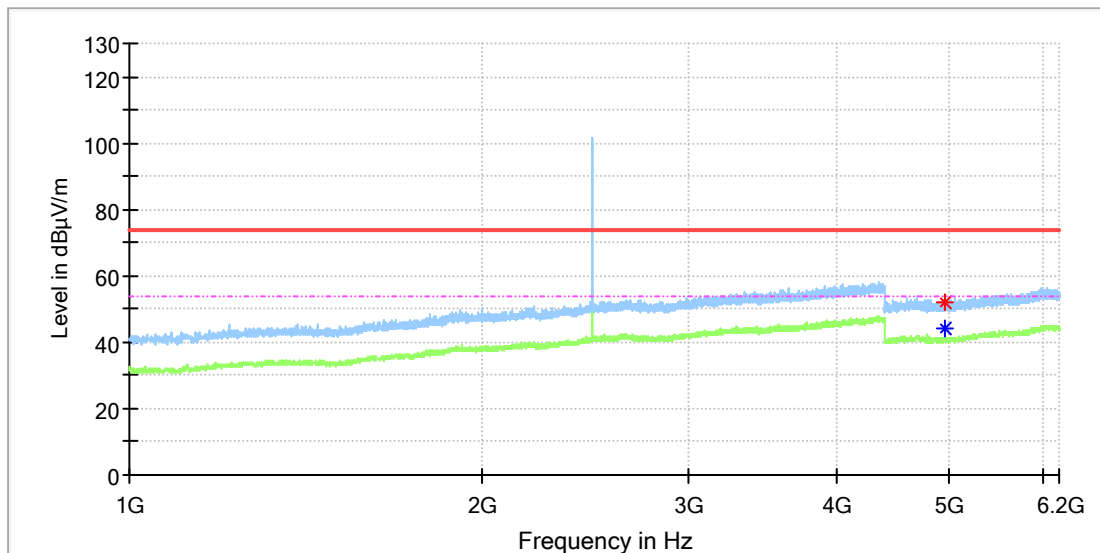

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4948.500000	52.23	---	74.00	21.77	150.0	H	226.0	13.3
4960.000000	---	44.12	54.00	9.88	150.0	H	77.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

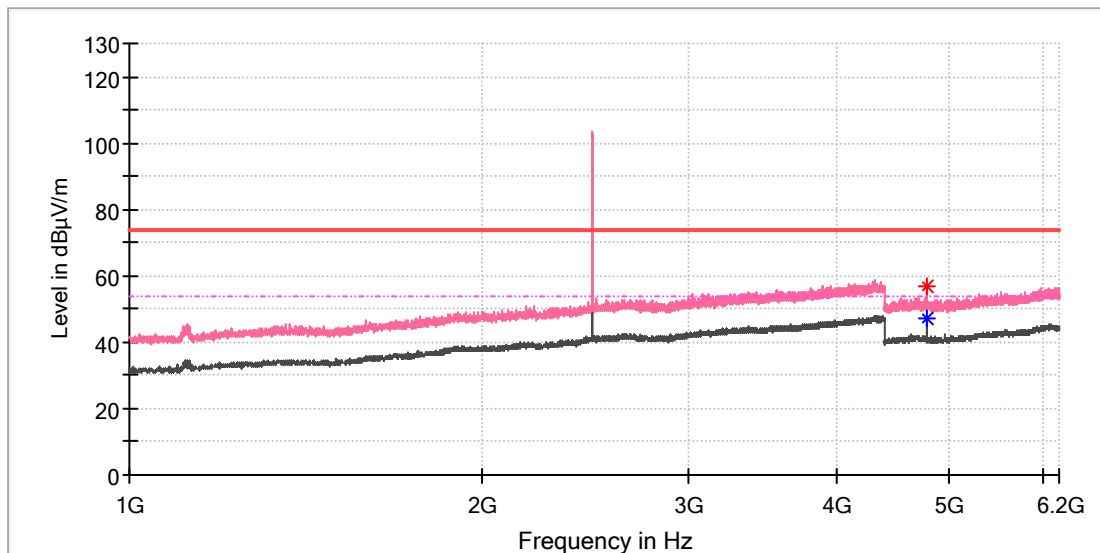

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4779.000000	56.65	---	74.00	17.35	150.0	V	3.0	13.3
4779.000000	---	47.27	54.00	6.73	150.0	V	3.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_High channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

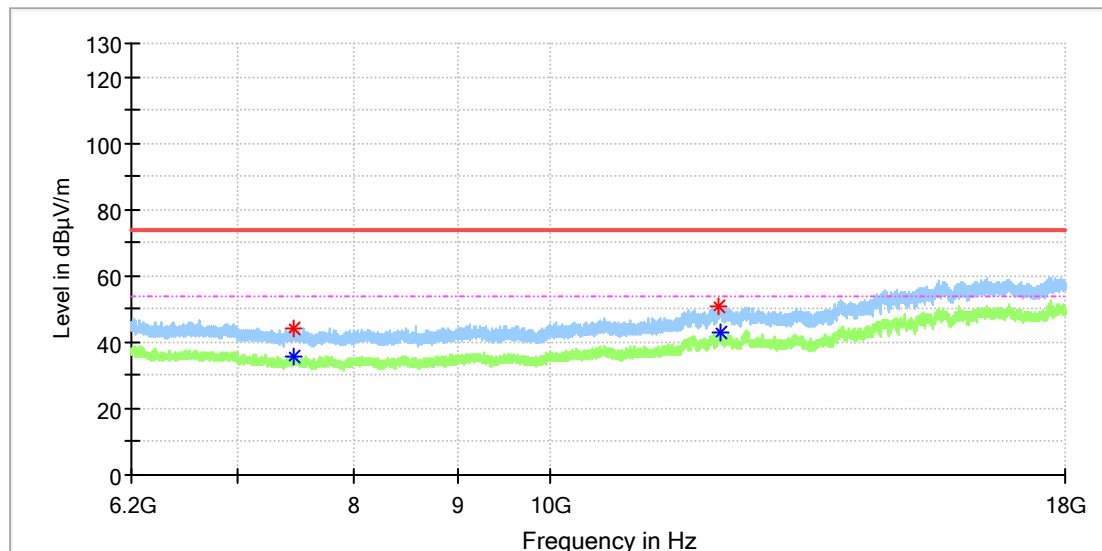

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7461.125000	---	35.77	54.00	18.23	150.0	H	142.0	8.5
7462.108333	44.15	---	74.00	29.85	150.0	H	314.0	8.6
12123.108333	51.04	---	74.00	22.96	150.0	H	177.0	16.0
12151.133333	---	42.74	54.00	11.26	150.0	H	76.0	16.7


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_High channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

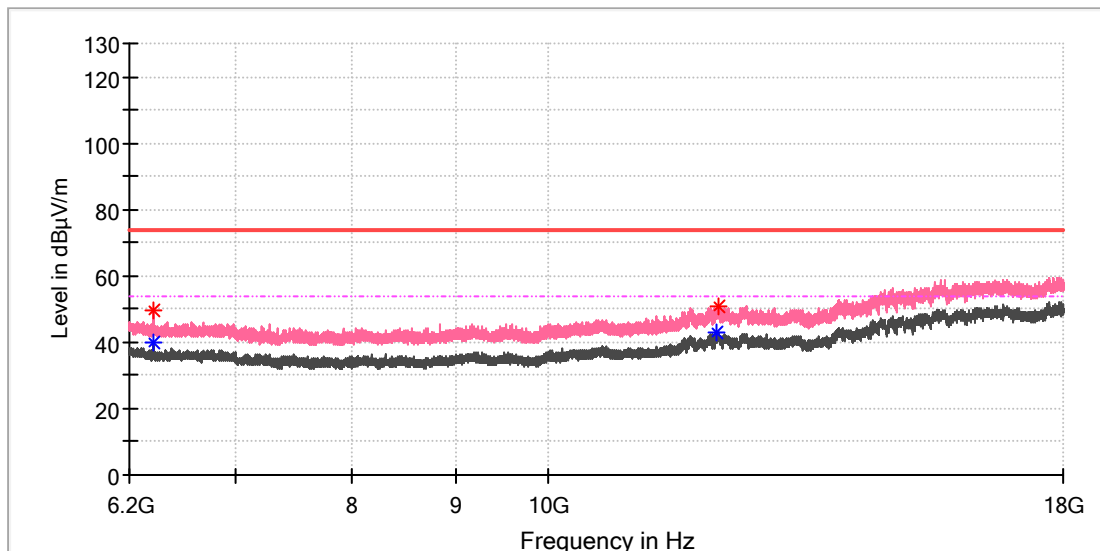

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6371.100000	49.34	---	74.00	24.66	150.0	V	339.0	8.9
6371.100000	---	39.92	54.00	14.08	150.0	V	339.0	8.9
12131.466667	---	42.94	54.00	11.06	150.0	V	161.0	16.2
12152.116667	50.71	---	74.00	23.29	150.0	V	295.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


1.11

Test Results of Radiated Emissions in Restricted Bands

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

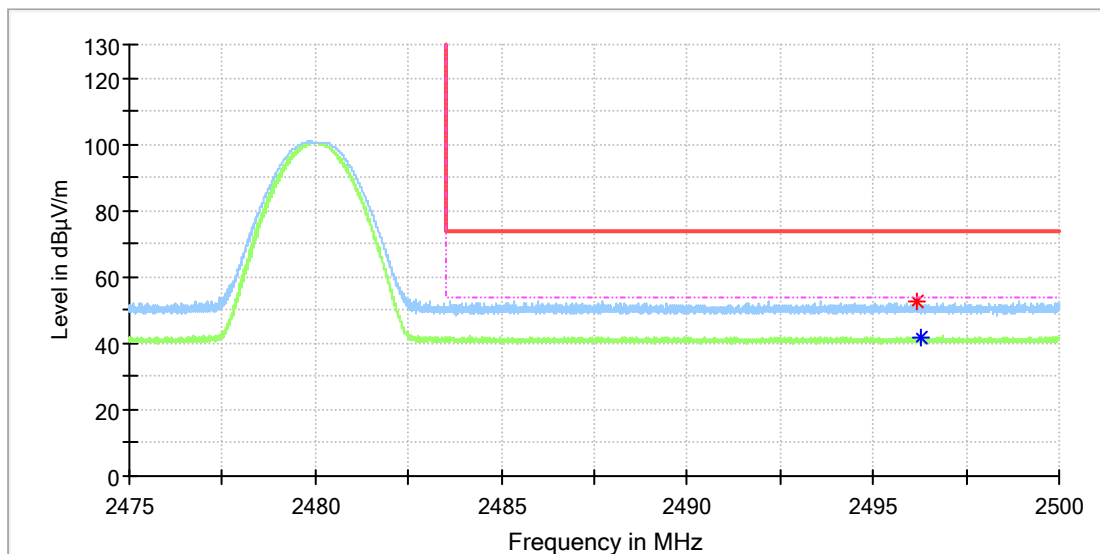

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2496.165441	52.60	---	74.00	21.40	150.0	H	322.0	9.0
2496.294118	---	41.89	54.00	12.11	150.0	H	99.0	9.0


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

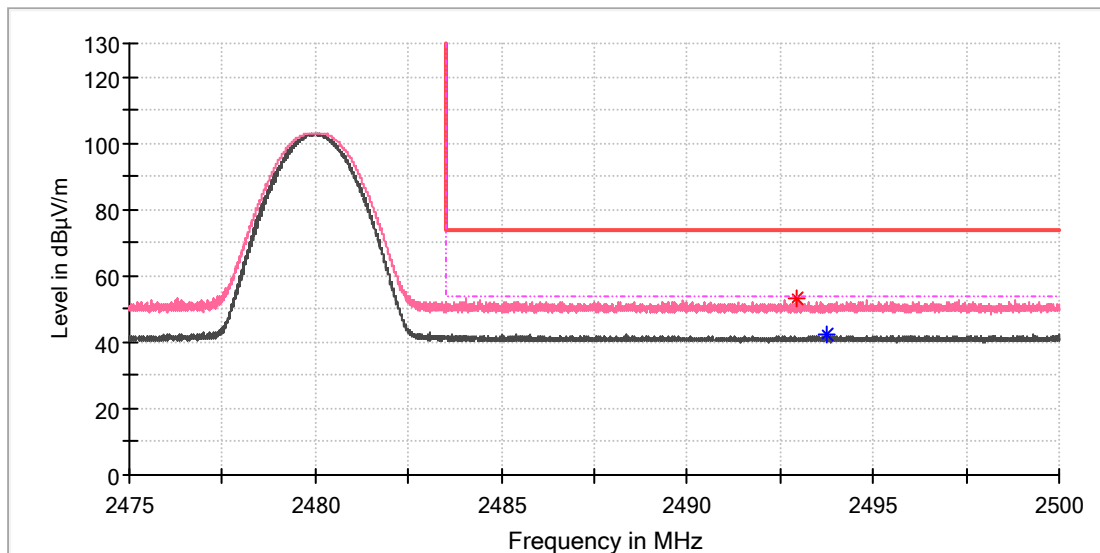

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2492.922794	53.35	---	74.00	20.65	150.0	V	71.0	9.0
2493.735294	---	42.12	54.00	11.88	150.0	V	113.0	9.0


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	Multimedia player
Model:	MP-202S-00
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168485064/A003865536-002
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

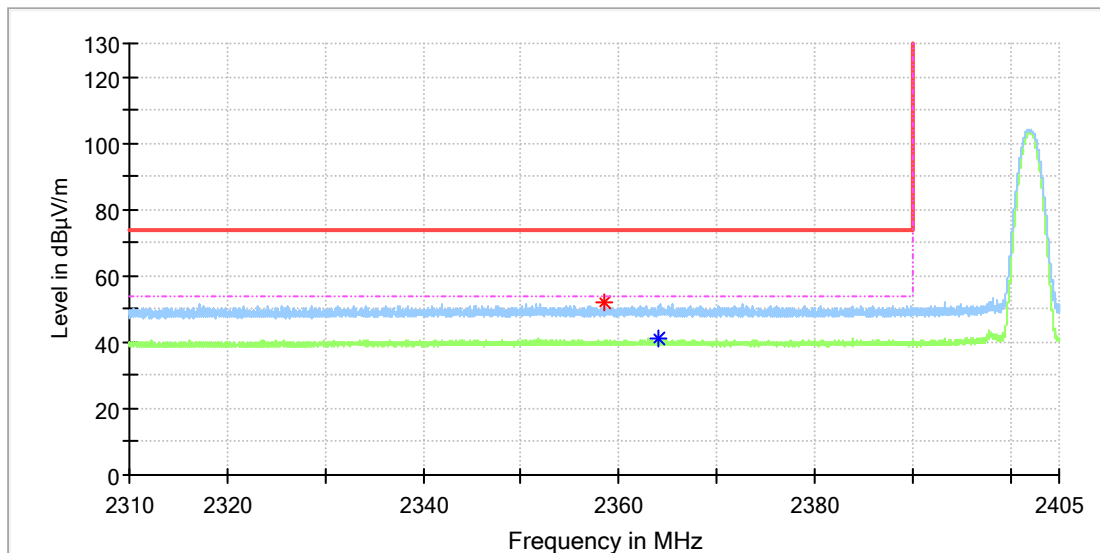

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2358.436030	51.86	---	74.00	22.14	150.0	H	67.0	8.5
2364.136030	---	41.23	54.00	12.77	150.0	H	284.0	8.5


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Multimedia player
Model: MP-202S-00
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168485064/A003865536-002
Test Voltage: DC 12V From DC Source
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

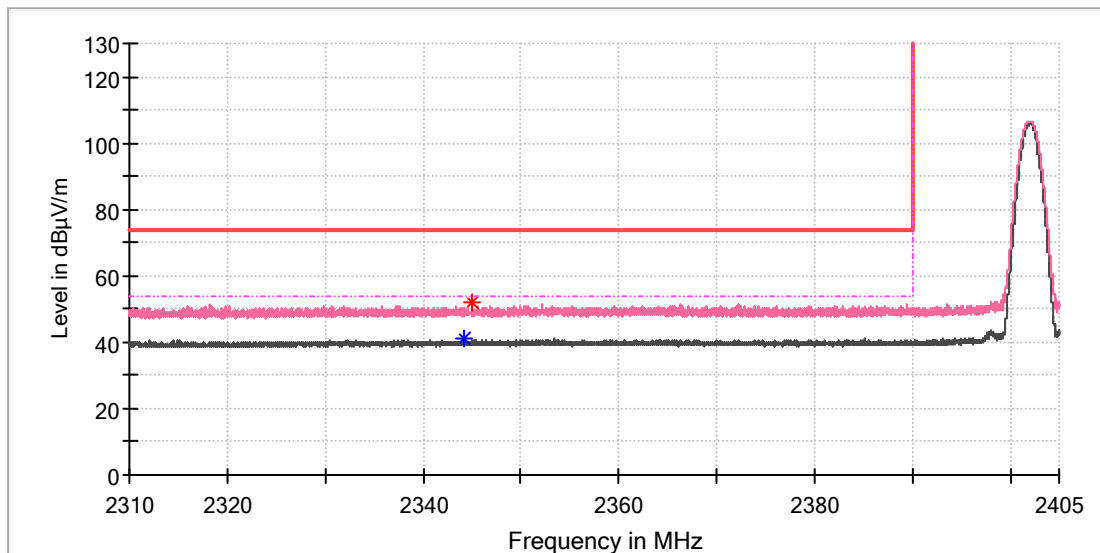

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2344.269853	---	40.93	54.00	13.07	150.0	V	306.0	8.4
2345.024265	52.22	---	74.00	21.78	150.0	V	48.0	8.4

Final Result


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

---End of appendix---

Appendix B: Photographs of the Test Set-Up

APPENDIX C: PHOTOGRAPHS OF THE TEST SET-UP	1
PHOTOGRAPH 1: SET-UP PHOTO FOR RADIATED SPURIOUS EMISSION, BELOW 1GHZ	2
PHOTOGRAPH 2: SET-UP PHOTO FOR RADIATED SPURIOUS EMISSION, ABOVE 1GHZ.....	2

Photograph 1: Set-up photo for Radiated Spurious Emission, below 1GHz

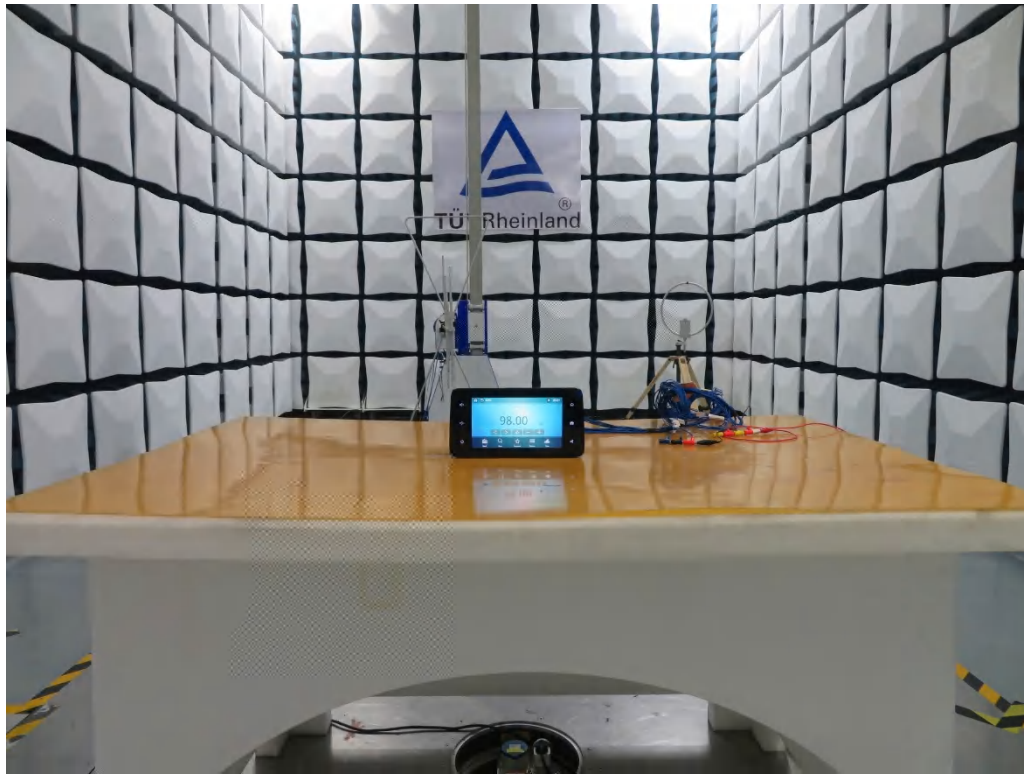

Photograph 2: Set-up photo for Radiated Spurious Emission, above 1GHz

