

A19-PA-ZigbeeLIC-TY-RGBCW 11W - E26 - 1100lm - 2000-6500K +RGB- Tunable White


ID CODE

Pantone Cool Grey 8C

UNTURNE

AE 270 T

Ø60±1

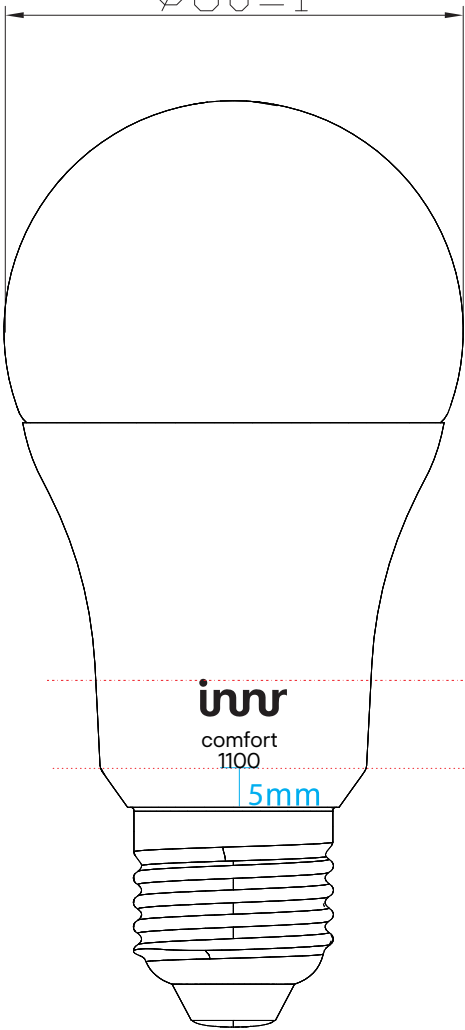

innr
comfort
1100


5mm

innr
comfort
1100

A19-PA-ZigbeeLIC-TY-RGBCW 11W
E26 1140 lumens 2000-6500K+RGB
120V/60Hz 10.7W 122mA
YYWW-D Made in China
www.innr.com
FCC ID: 2AVYZ-AE2NNM
IC: 25992-AE2NNM



CAUTION: CAUTION: DO NOT USE WITH DIMMERS.
NOT FOR USE IN TOTALLY ENCLOSED LUMINAIRES. RISK
OF ELECTRIC SHOCK - SUITABLE FOR DRY LOCATIONS ONLY.
ATTENTION: NE PAS UTILISER AVEC DES GRADATEURS.
NE CONVIENT PAS À DES LUMINAIRES TOTALEMENT
FERMÉS. RISQUE DE CHOC ÉLECTRIQUE - CONVIENT AUX
EMPLACEMENTS SECS UNIQUEMENT.

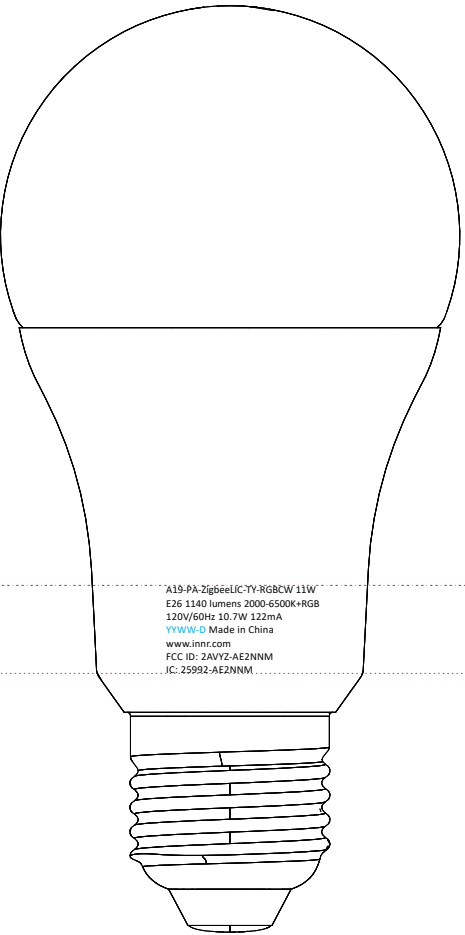

A19-PA-ZigbeeLIC-TY-RGBCW 11W
E26 1140 lumens 2000-6500K+RGB
120V/60Hz 10.7W 122mA
YYWW-D Made in China
www.innr.com
FCC ID: 2AVYZ-AE2NNM
IC: 25992-AE2NNM



CAUTION: CAUTION: DO NOT USE WITH DIMMERS.
NOT FOR USE IN TOTALLY ENCLOSED LUMINAIRES. RISK
OF ELECTRIC SHOCK - SUITABLE FOR DRY LOCATIONS ONLY.
ATTENTION: NE PAS UTILISER AVEC DES GRADATEURS.
NE CONVIENT PAS À DES LUMINAIRES TOTALEMENT
FERMÉS. RISQUE DE CHOC ÉLECTRIQUE - CONVIENT AUX
EMPLACEMENTS SECS UNIQUEMENT.



- Remark:
1. YYWW-D: Is the order batch information
 2. Intertek control number is TBD
 3. The laser graphic is located near the lower edges of the heat sink.
 4. Innr logo surface, parameter surface and warning words surface:
the space between the 3 surfaces should be uniform, not one big and one small
 5. The red dotted line is the alignment line, not actually laser