

FCC &ISED Radio Test Report**FCC ID: 2AW3X-APPP4S4U**
IC:26330-APPP4S4U**The report concerns: Original Grant**

Report Reference No.....: 20EFAS07087 6411
Date Sample(s) Received.....: 2020-07-20
Date of Tested.....: 2020-07-20 to 2020-08-06
Date of issue.....: 2020-08-07
Testing Laboratory: DongGuan ShuoXin Electronic Technology Co., Ltd.
Zone A, 1F, No. 6, XinGang Road YuanGang Street,
Address: XinAn District, ChangAn Town, DongGuan City,
GuangDong, China

Applicant's name: APONE TECHNOLOGY CO., LTD.
Address: 6F.,No.258, Sec.1, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24447, Taiwan
Manufacturer.....: APONE TECHNOLOGY CO., LTD.

Equipment.....: Wifi Smart Power Strip
Trade Mark: APONE
Model: APP-P4S4U
Ratings: I/P: AC 120V-240VAC, 50/60 Hz, 15A
1875W(Resistive)
O/P: AC 120V-240VAC, 50/60 Hz, 15A
USB:Output:5Vdc,3.1A (each USB port)

Test Engineer:


Blue Qiu

Responsible Engineer :


Smile Wang

Authorized Signatory:



King Wang

Table of Contents	Page
1 . TEST REPORT DECLARE	4
2 . SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 PARAMETERS OF TEST SOFTWARE	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 SUPPORT UNITS	10
3.6 TEST ENVIRONMENT CONDITIONS	10
3.7 DUTY CYCLE	11
4 . AC POWER LINE CONDUCTED EMISSIONS TEST	12
4.1 LIMIT	12
4.2 TEST PROCEDURE	12
4.3 MEASUREMENT INSTRUMENTS LIST	12
4.4 TESTSETUP	13
4.5 EUT OPERATION CONDITIONS	13
4.6 TEST RESULTS	14
5 . RADIATED EMISSIONSTEST	16
5.1 LIMIT	16
5.2 TEST PROCEDURE	17
5.3 MEASUREMENT INSTRUMENTS LIST	18
5.4 TESTSETUP	18
5.5 EUT OPERATIONCONDITIONS	19
5.6 TEST RESULTS - 9KHZ TO 30MHZ	20
5.7 TEST RESULTS - 30MHZTO 1000MHZ	21
5.8 TEST RESULTS- ABOVE 1000MHZ(BAND EDGE)	23
5.9 TEST RESULTS- ABOVE 1000MHZ(HARMONIC)	39
6 . BANDWIDTH TEST	63
6.1 LIMIT	63
6.2 TEST PROCEDURE AND SETTING	63
6.3 MEASUREMENT INSTRUMENTS LIST	63
6.4 TEST SETUP	63

Table of Contents	Page
6.5 EUT OPERATION CONDITIONS	63
6.6 TESTRESULTS	64
7 . MAXIMUM OUTPUT POWER TEST	68
7.1 LIMIT	68
7.2 TEST PROCEDURE AND SETTING	68
7.3 MEASUREMENT INSTRUMENTS LIST	68
7.4 TEST SETUP	68
7.5 EUT OPERATION CONDITIONS	68
7.6 TESTRESULTS	69
8 . CONDUCTED SPURIOUS EMISSIONS	70
8.1 LIMIT	70
8.2 TEST PROCEDURE AND SETTING	70
8.3 MEASUREMENT INSTRUMENTS LIST	70
8.4 TEST SETUP	70
8.5 EUT OPERATION CONDITIONS	70
8.6 TESTRESULTS	71
9 . POWER SPECTRAL DENSITY TEST	73
9.1 LIMIT	73
9.2 TEST PROCEDURE AND SETTING	73
9.3 MEASUREMENT INSTRUMENTS LIST	73
9.4 TEST SETUP	73
9.5 EUT OPERATION CONDITIONS	73
9.6 TESTRESULTS	74
10 . FREQUENCY STABILITY MEASUREMENT	76
10.1 LIMIT	76
10.2 TEST PROCEDURE AND SETTING	76
10.3 MEASUREMENT INSTRUMENTS LIST	76
10.4 TEST SETUP	76
10.5 EUT OPERATION CONDITIONS	76
10.6 TEST RESULTS	77

1. TEST REPORT DECLARE

Applicant	APONE TECHNOLOGY CO., LTD.
Address	6F.,No.258, Sec.1, Wenhua 1st Rd., Linkou Dist., New Taipei City 24447, Taiwan
Manufacturer	APONE TECHNOLOGY CO., LTD.
Address	6F.,No.258, Sec.1, Wenhua 1st Rd., Linkou Dist., New Taipei City 24447, Taiwan
Factory	APONE TECHNOLOGY CO., LTD.
Address	6F.,No.258, Sec.1, Wenhua 1st Rd., Linkou Dist., New Taipei City 24447, Taiwan
Equipment	Wifi Smart Power Strip
Model No.	APP-P4S4U
Trade Mark	APONE
Standard	FCC Part15, Subpart C (15.247) RSS-247 Issue 2, Feb. 2017 RSS-Gen Issue 5 March 2019 ANSI C63.10-2013

We Declare:

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

2. SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section		Test Item	Judgment	Remark
FCC	ISED			
15.207	RSS-Gen8.8	AC Power Line Conducted Emissions	PASS	-----
15.247(d) 15.205(a) 15.209(a)	RSS-247 5.5 RSS-Gen8.9 RSS-Gen8.10	Radiated Emissions	PASS	-----
15.247(a)(2)	RSS-247 5.2 (a) RSS-Gen6.7	Bandwidth	PASS	-----
15.247(b)(3)	RSS-247 5.4 (d)	Maximum Output Power	PASS	-----
15.247(d)	RSS-247 5.5	Conducted Spurious Emission	PASS	-----
15.247(e)	RSS-247 5.2 (b)	Power Spectral Density	PASS	-----
-	RSS-Gen 6.11	Frequency Stability	PASS	-----
15.203	-	Antenna Requirement	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	$\pm 0.048\text{kHz}$
Uncertainty for conducted RF Power	$\pm 0.32\text{dB}$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wifi Smart Power Strip	
Brand Name	APONE	
Test Model	APP-P4S4U	
Series Model	N/A	
Model Difference(s)	N/A	
Hardware Version	V1.0	
Software Version	V1.0	
PowerSource	100-125V AC,50/60Hz ,0.35A	
Power Rating	Current tap rating:125V AC 60 Hz 15A 1875W(Resistive)	
Operation Frequency	IEEE 802.11b;IEEE 802.11g;IEEE 802.11nHT20: 2412 MHz~2462 MHz IEEE 802.11nHT40: 2422 MHz~2452 MHz	
Modulation Technology	IEEE 802.11b:DSSS IEEE 802.11g:OFDM IEEE 802.11n:OFDM	
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps	
Operating Mode	IEEE 802.11b:1TX IEEE 802.11g:1TX IEEE 802.11n (HT20):1TX IEEE 802.11n (HT40):1TX	
Antenna Information	Antenna Type: PCB	Maximum Peak Gain:2 dBi
Max. Output Power	IEEE 802.11b: 14.27dBm(0.0267W) IEEE 802.11g: 20.46dBm(0.1112W) IEEE 802.11n (HT20):19.99dBm(0.0998W) IEEE 802.11n (HT40):16.24dBm(0.0421W)	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT has three model number of antenna, these antenna type are the same, the test was used maximum antenna gain of antenna.
3. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20) CH03-CH09 for IEEE 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel03/06/09
Mode 5	TX G Mode Channel 11

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 5	TX G Mode Channel 11

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 5	TX G Mode Channel 11

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel03/06/09

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel03/06/09

NOTE:

(1) The measurements are performed at the high, middle, low available channels.

(2) 802.11b mode: DBPSK (1Mbps)

802.11g mode: OFDM (6Mbps)

802.11n HT20 mode : BPSK (13Mbps)

802.11n HT40mode : BPSK (27Mbps)


For radiated emission tests, the highest output powers were set for final test.

(3) For radiated emission below 1GHz and AC power line conducted emissions test, the IEEE 802.11G channel 11 is found to be the worst case and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

Test Software	Wifi Test Tool V1.4.2		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	6	6	6
IEEE 802.11g	Default	Default	Default
IEEE 802.11n (HT20)	Default	Default	Default
Test Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	15	15	15

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
/	/	/	/	/

Item	Cable Type	Shielded Type	Ferrite Core	Length
/	/	/	/	/

3.6 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	AC 120V
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V
Radiated Emissions-30 MHz to 1GHz	24°C	68%	AC 120V
Radiated Emissions-Above 1000 MHz	24°C	68%	AC 120V
Bandwidth	24.8°C	40.9%	AC 120V
Maximum Output Power	24.8°C	40.9%	AC 120V
Conducted Spurious Emission	24.8°C	40.9%	AC 120V
Power Spectral Density	24.8°C	40.9%	AC 120V

3.7 DUTY CYCLE

All tests were performed under the condition of 100% Duty Cycle

NOTE:

For IEEE 802.11a, IEEE 802.11n (HT20)

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT40)

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

4. AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

4.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/11/2020
2	EMI Test Receiver	R&S	ESCI	101308	12/11/2020
3	LISN	AFJ	LS16	16011103219	06/10/2021
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/11/2020
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

4.4 TESTSETUP

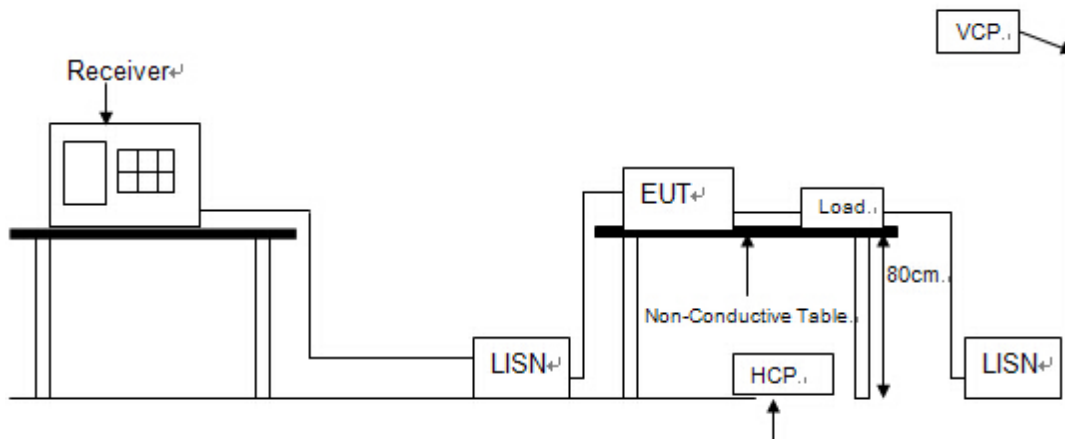


4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Test Mode: TX G Mode Channel 11

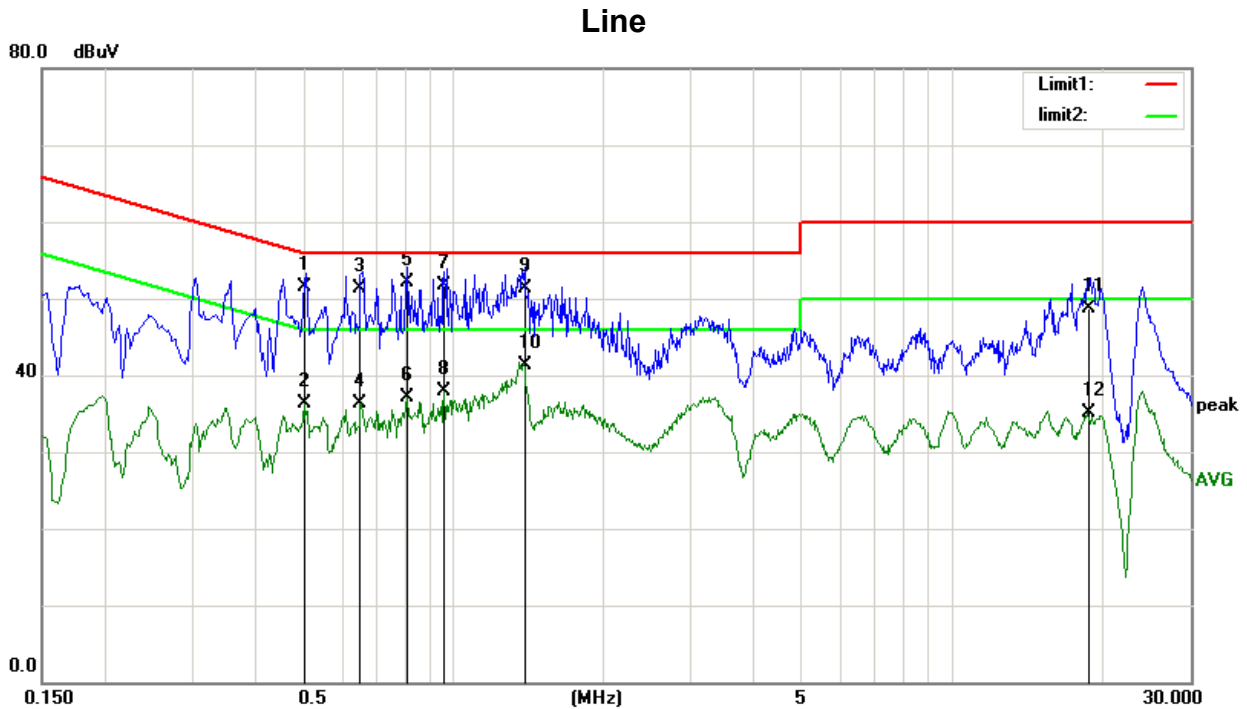

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5020	41.29	10.18	51.47	56.00	-4.53	QP
2	0.5020	26.03	10.18	36.21	46.00	-9.79	AVG
3	0.6540	41.22	10.13	51.35	56.00	-4.65	QP
4	0.6540	26.20	10.13	36.33	46.00	-9.67	AVG
5	0.8100	41.97	10.09	52.06	56.00	-3.94	QP
6	0.8100	27.01	10.09	37.10	46.00	-8.90	AVG
7	0.9620	41.69	10.09	51.78	56.00	-4.22	QP
8	0.9620	27.75	10.09	37.84	46.00	-8.16	AVG
9	1.3820	41.25	10.10	51.35	56.00	-4.65	QP
10	1.3820	31.30	10.10	41.40	46.00	-4.60	AVG
11	18.6379	38.52	10.16	48.68	60.00	-11.32	QP
12	18.6379	24.98	10.16	35.14	50.00	-14.86	AVG

Remarks:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

AC 120V 60Hz

Test Mode: TX G Mode Channel 11

Neutral

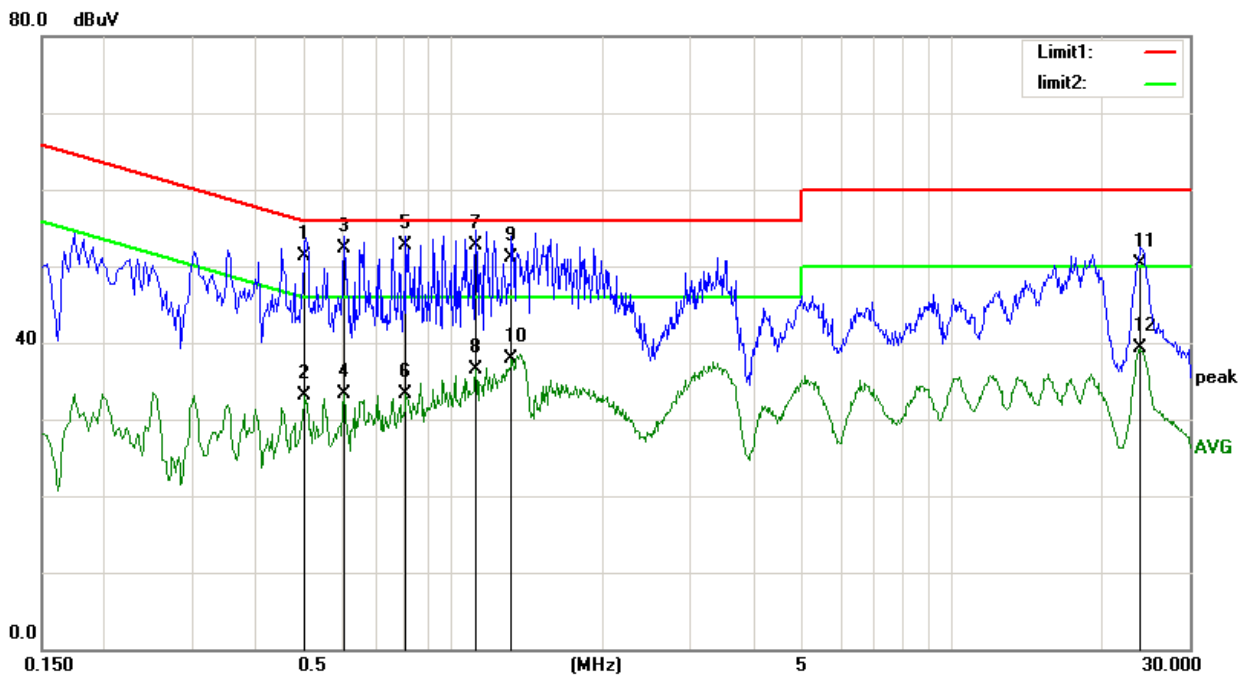

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5060	41.15	10.18	51.33	56.00	-4.67	QP
2	0.5060	23.00	10.18	33.18	46.00	-12.82	AVG
3	0.6060	42.16	10.15	52.31	56.00	-3.69	QP
4	0.6060	23.19	10.15	33.34	46.00	-12.66	AVG
5	0.8059	42.52	10.09	52.61	56.00	-3.39	QP
6	0.8059	23.18	10.09	33.27	46.00	-12.73	AVG
7	1.1140	42.66	10.10	52.76	56.00	-3.24	QP
8	1.1140	26.31	10.10	36.41	46.00	-9.59	AVG
9	1.3140	40.96	10.10	51.06	56.00	-4.94	QP
10	1.3140	27.77	10.10	37.87	46.00	-8.13	AVG
11	23.8700	40.17	10.19	50.36	60.00	-9.64	QP
12	23.8700	29.12	10.19	39.31	50.00	-10.69	AVG

Remarks:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

AC 120V 60Hz

5. RADIATED EMISSION TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) and RSS-Gen 8.10, then the 15.209(a) and RSS-Gen 8.9 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-30 MHz)

Frequency (MHz)	Magnetic field strength (H-Field) (μ A/m)	Measurement Distance (meters)
0.009-0.490	6.37/F(kHz)	300
0.490-1.705	6.37/F(kHz)	30
1.705-30.0	0.08	30

LIMITS OF RADIATED EMISSION MEASUREMENT (30 MHz-1000MHz)

Frequency (MHz)	Field Strength (μ V/m at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C and RSS-247.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (μ V/m).

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. The test result is calculated as the following:
 - (1) Result = Reading + Correct Factor
 - (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
 - (3) Margin = Result - Limit

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	12/12/2020
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/17/2020
3	Loop antenna	SCHWARZBECK K	FMZB1519	1519-062	12/14/2020
4	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	03/22/2021
5	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	04/21/2021
6	Preamplifier Amplifier	HP	8447F	3113A05680	12/11/2020
7	PRE-AMPLIFIER	CY	EMC011830	980136	12/11/2020
8	RF Cable	R&S	Test Cable 4	4	12/11/2020
9	RF Cable	R&S	Test Cable 5	5	12/11/2020
10	RF Cable	R&S	Test Cable 9	9	04/21/2021
11	RF Cable	R&S	Test Cable 10	10	12/11/2020
12	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

5.4 TESTSETUP


9 kHz-30 MHz

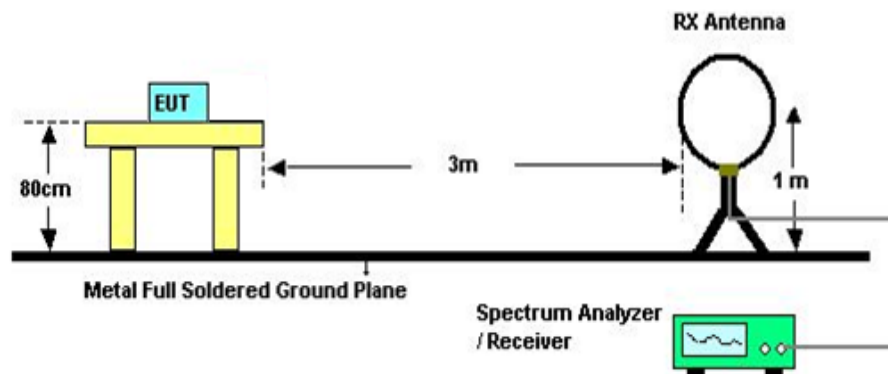

30 MHz to 1 GHz

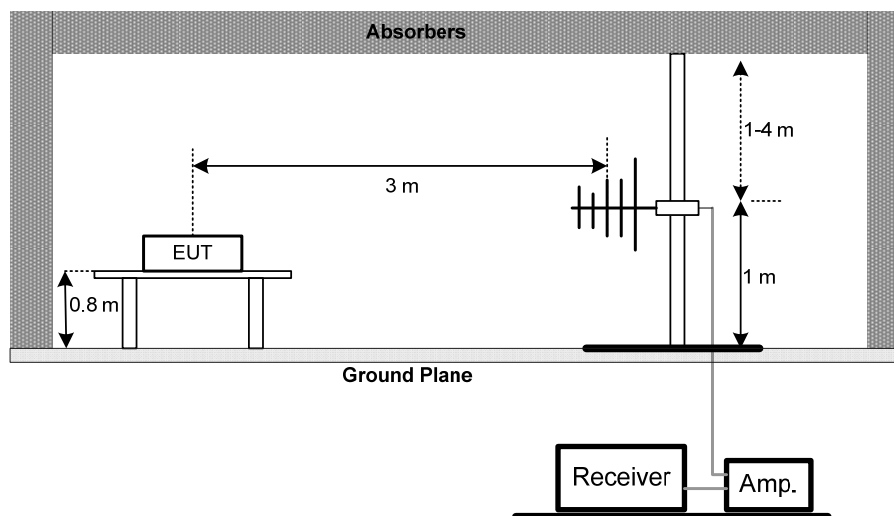

Above 1 GHz

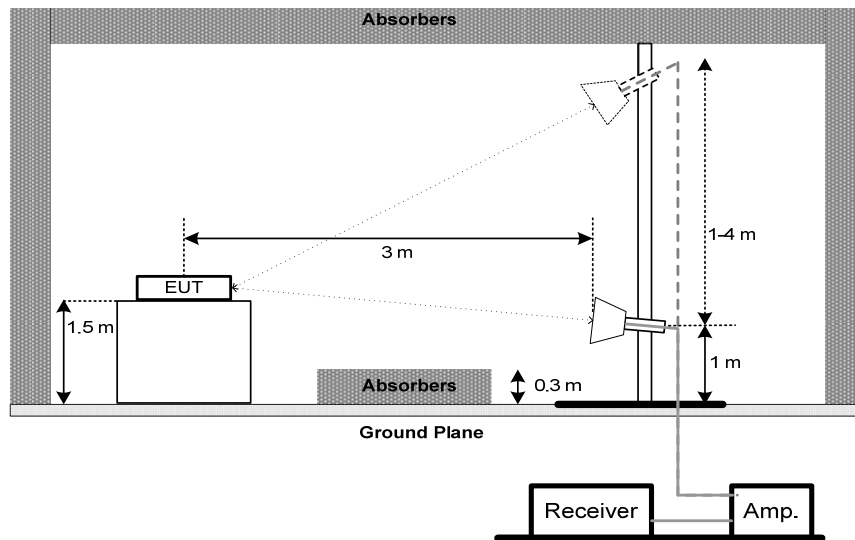

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9kHz TO 30MHz

Test Mode:	TX G Mode Channel 11
------------	----------------------

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor

5.7 TEST RESULTS - 30MHz TO 1000MHz


Test Mode : TX G Mode Channel 11

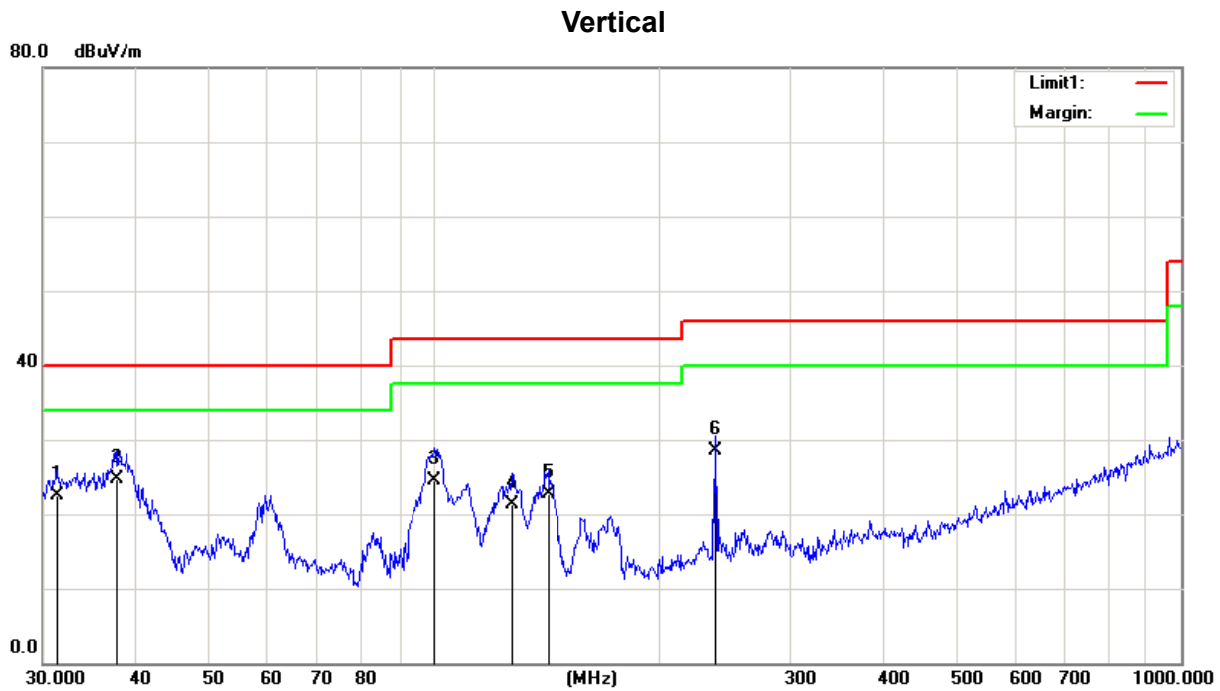

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.2893	34.22	-11.77	22.45	40.00	-17.55	QP
2	37.6798	37.88	-13.13	24.75	40.00	-15.25	QP
3	100.5806	38.95	-14.49	24.46	43.50	-19.04	QP
4	127.6645	33.21	-11.87	21.34	43.50	-22.16	QP
5	142.3243	35.19	-12.57	22.62	43.50	-20.88	QP
6	238.3102	37.12	-8.64	28.48	46.00	-17.52	QP

Test Mode : TX G Mode Channel 11


Horizontal

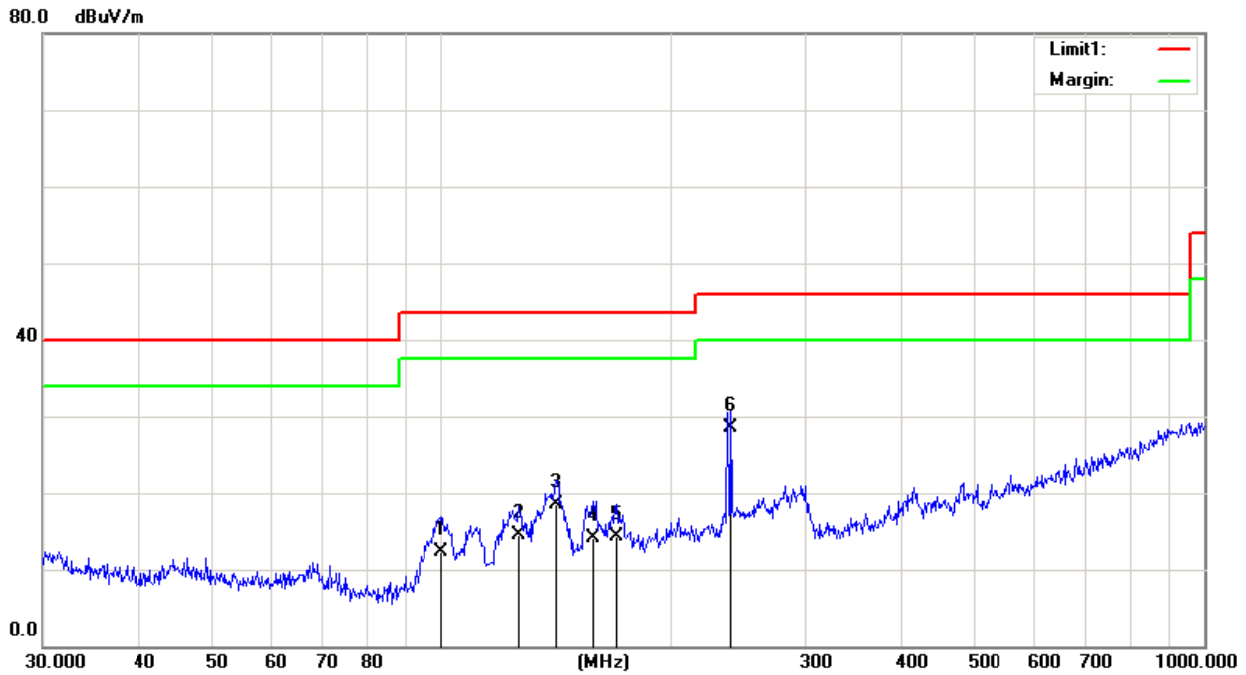

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	99.8777	28.75	-16.45	12.30	43.50	-31.20	QP
2	126.3286	27.24	-12.70	14.54	43.50	-28.96	QP
3	141.3298	31.70	-13.22	18.48	43.50	-25.02	QP
4	158.1123	26.61	-12.59	14.02	43.50	-29.48	QP
5	169.5990	24.64	-10.30	14.34	43.50	-29.16	QP
6	239.9874	34.68	-6.20	28.48	46.00	-17.52	QP

5.8 TEST RESULTS- ABOVE 1000MHz(BAND EDGE)


Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

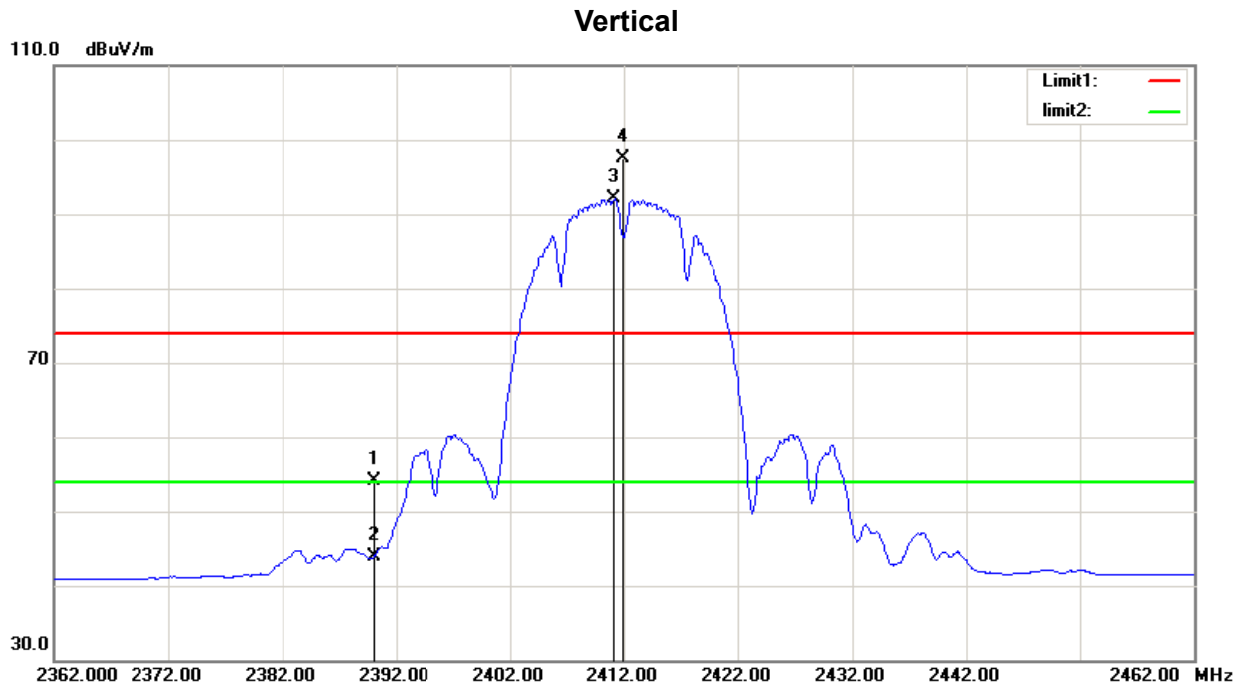

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	22.31	31.77	54.08	74.00	-19.92	peak
2	2390.000	12.07	31.77	43.84	54.00	-10.16	AVG
3	2411.200	60.20	31.84	92.04	/	/	AVG
4	2411.900	65.76	31.84	97.60	/	/	peak


Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

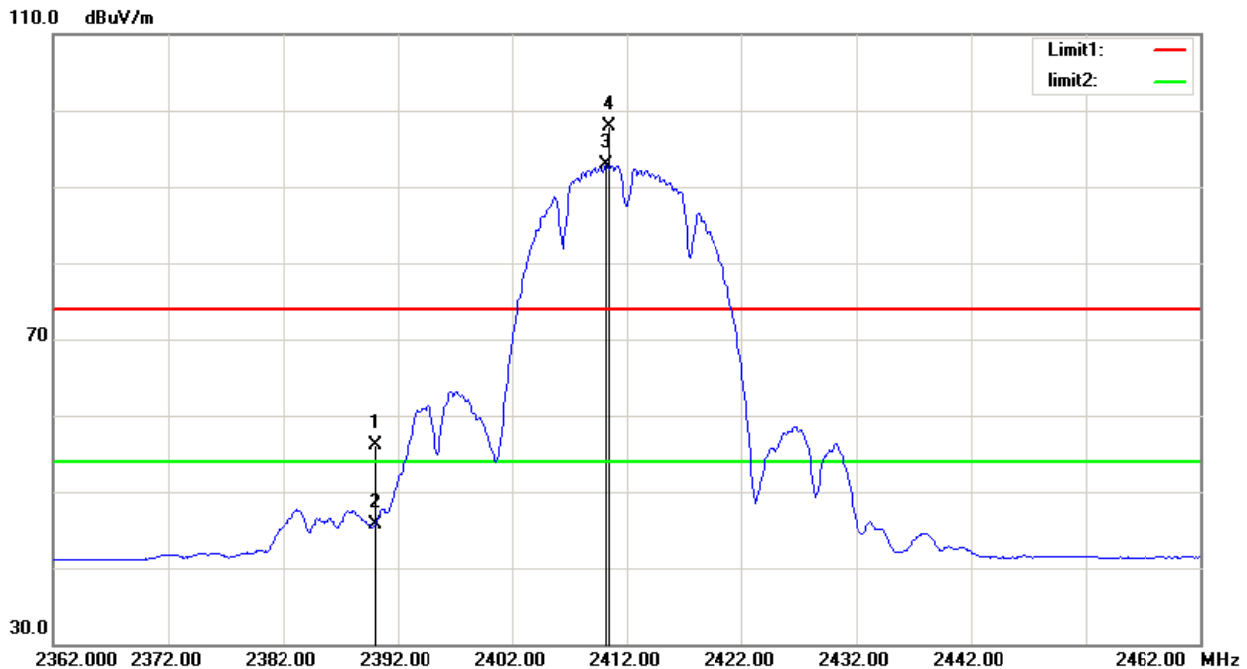


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	24.35	31.77	56.12	74.00	-17.88	peak
2	2390.000	14.01	31.77	45.78	54.00	-8.22	AVG
3	2410.200	60.98	31.84	92.82	/	/	AVG
4	2410.400	65.97	31.84	97.81	/	/	peak

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

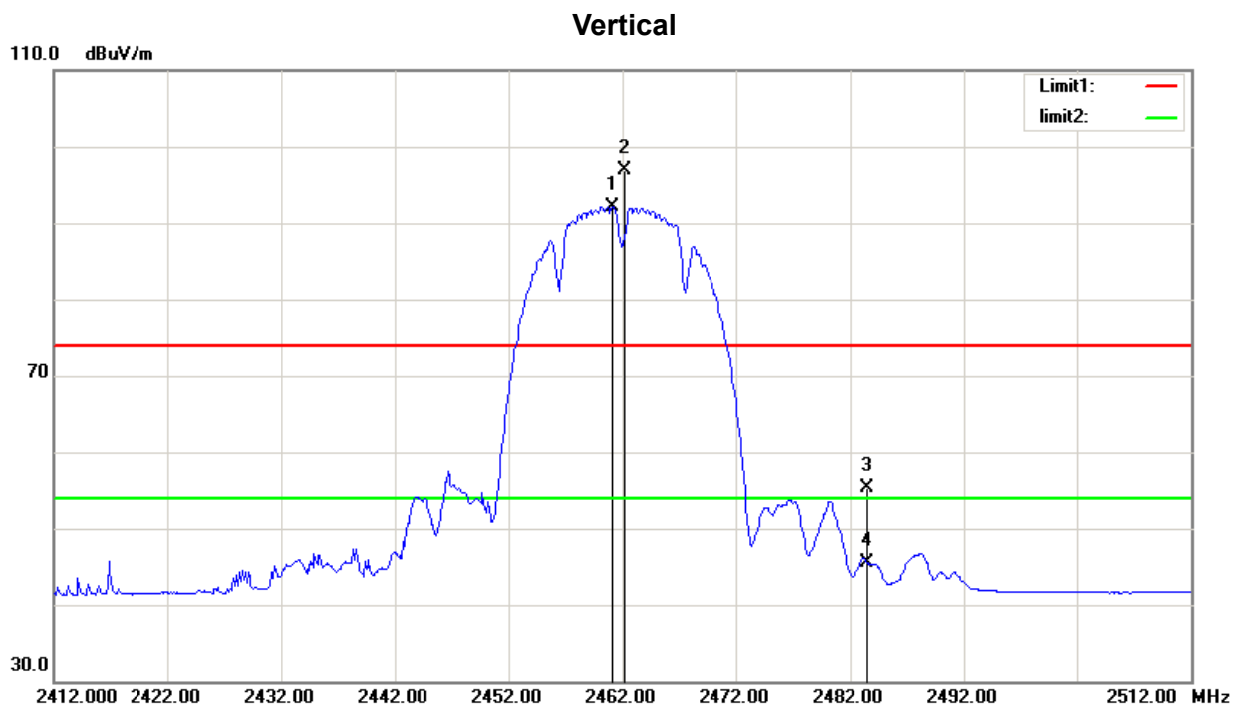


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.200	60.17	32.01	92.18	/	/	AVG
2	2462.200	64.86	32.01	96.87	/	/	peak
3	2483.500	23.24	32.08	55.32	74.00	-18.68	peak
4	2483.500	13.44	32.08	45.52	54.00	-8.48	AVG

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

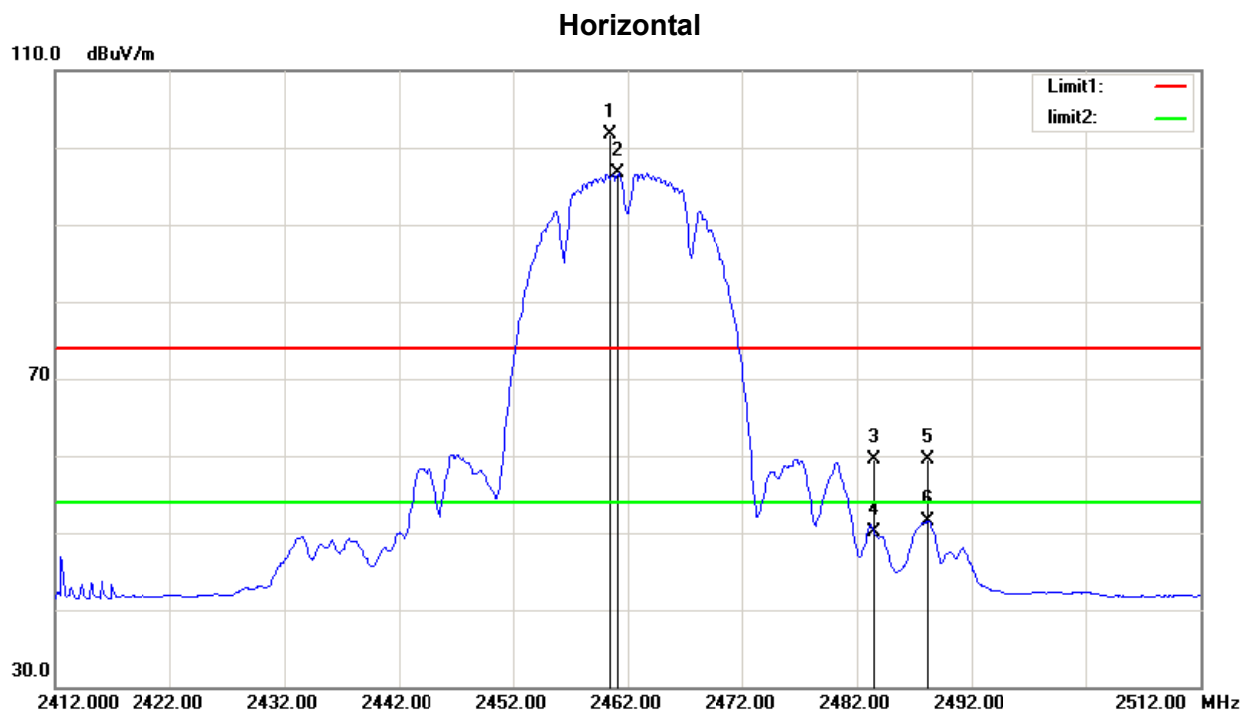


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.400	69.60	32.01	101.61	/	/	peak
2	2461.200	64.62	32.01	96.63	/	/	AVG
3	2483.500	27.45	32.08	59.53	74.00	-14.47	peak
4	2483.500	17.98	32.08	50.06	54.00	-3.94	AVG
5	2488.200	27.45	32.11	59.56	74.00	-14.44	peak
6	2488.200	19.47	32.11	51.58	54.00	-2.42	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

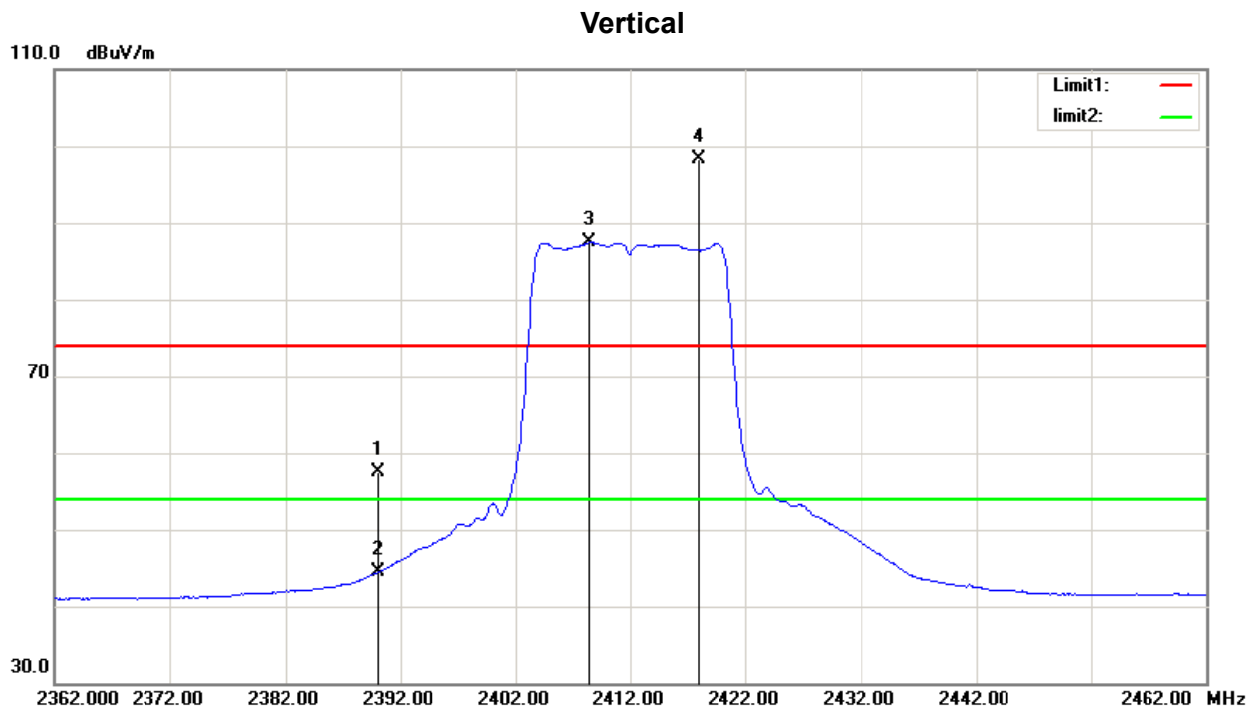


1	2390.000	25.82	31.77	57.59	74.00	-16.41	peak
2	2390.000	12.66	31.77	44.43	54.00	-9.57	AVG
3	2408.500	55.63	31.83	87.46	/	/	AVG
4	2417.900	66.37	31.86	98.23	/	/	peak

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

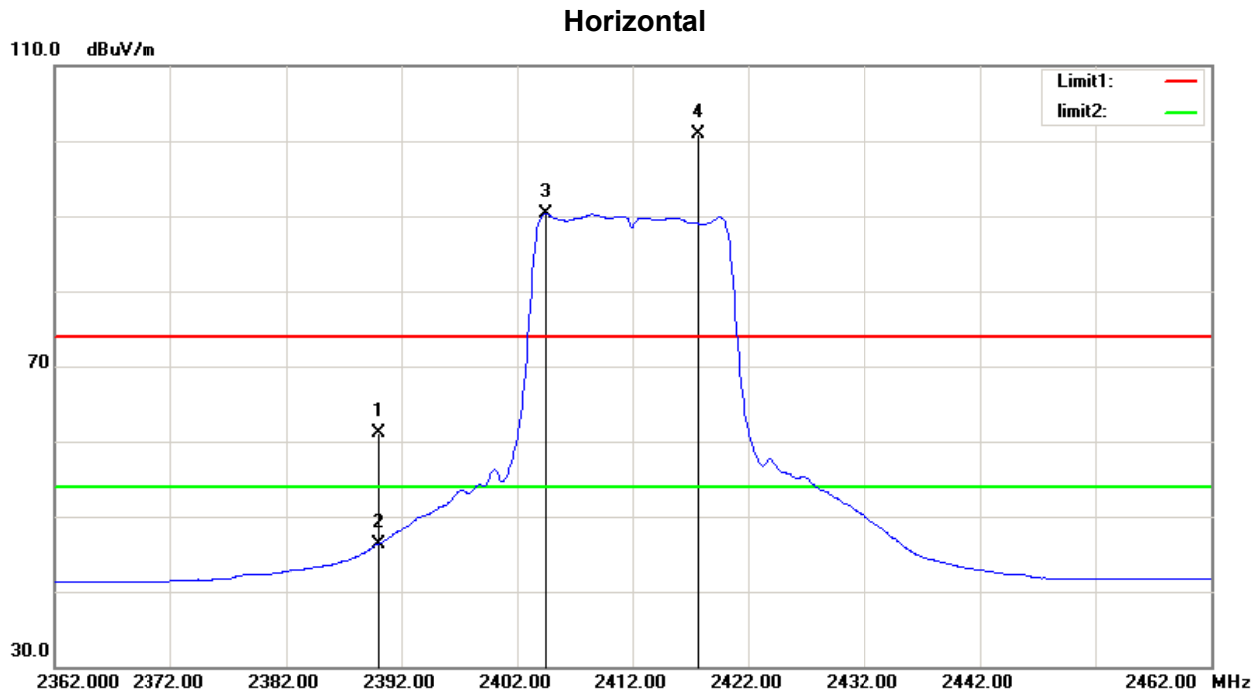


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.42	31.77	61.19	74.00	-12.81	peak
2	2390.000	14.54	31.77	46.31	54.00	-7.69	AVG
3	2404.400	58.48	31.81	90.29	/	/	AVG
4	2417.700	68.98	31.86	100.84	/	/	peak

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

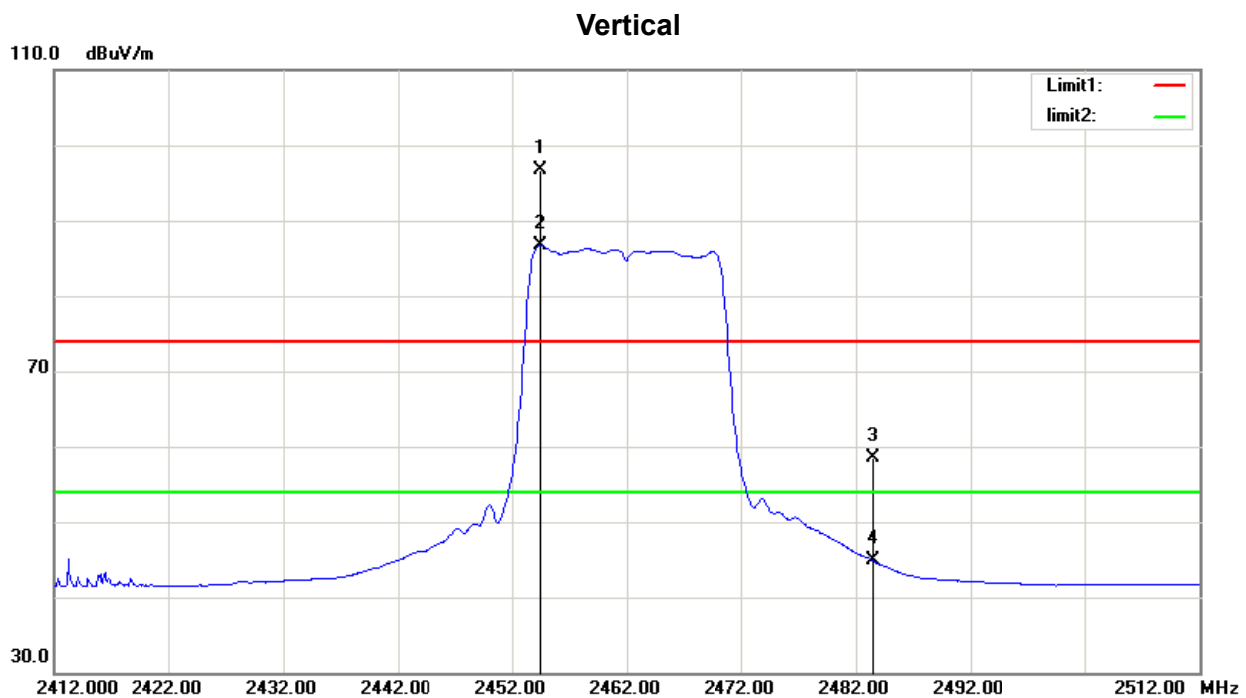


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.400	64.62	31.99	96.61	/	/	peak
2	2454.500	54.74	31.99	86.73	/	/	AVG
3	2483.500	26.49	32.08	58.57	74.00	-15.43	peak
4	2483.500	12.76	32.08	44.84	54.00	-9.16	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

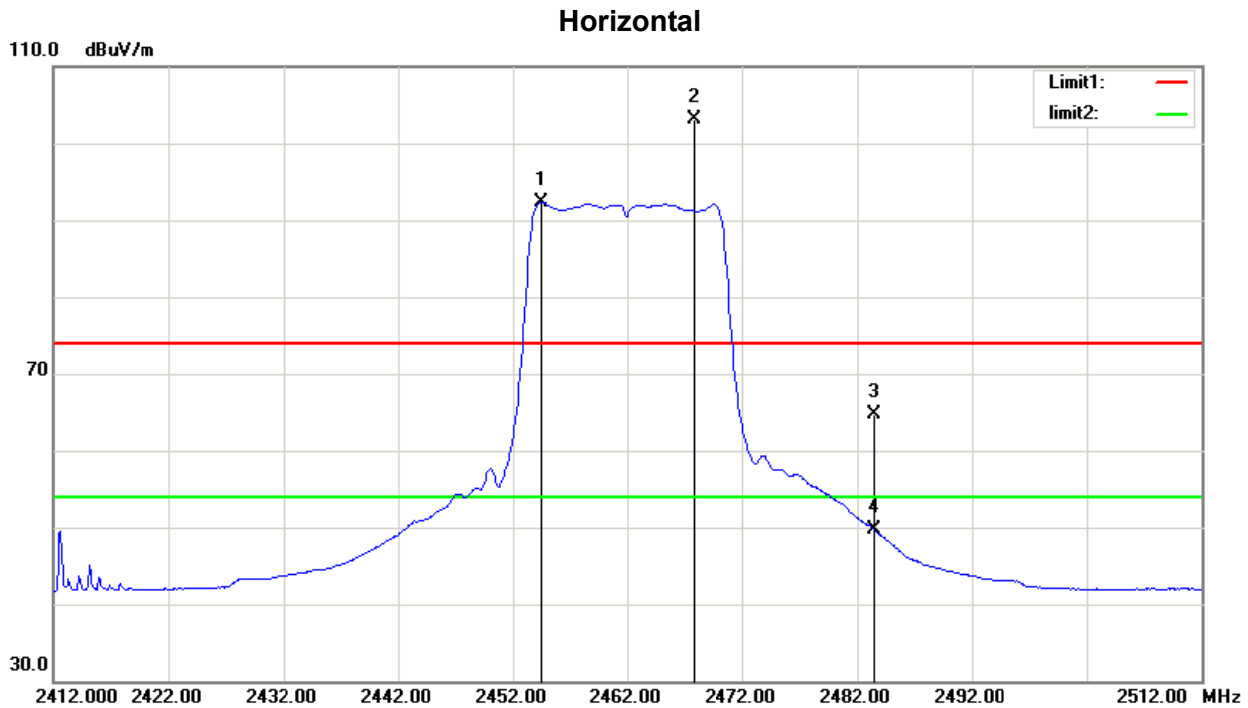

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.500	60.37	31.99	92.36	/	/	AVG
2	2467.800	71.00	32.03	103.03	/	/	peak
3	2483.500	32.62	32.08	64.70	74.00	-9.30	peak
4	2483.500	17.64	32.08	49.72	54.00	-4.28	AVG


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

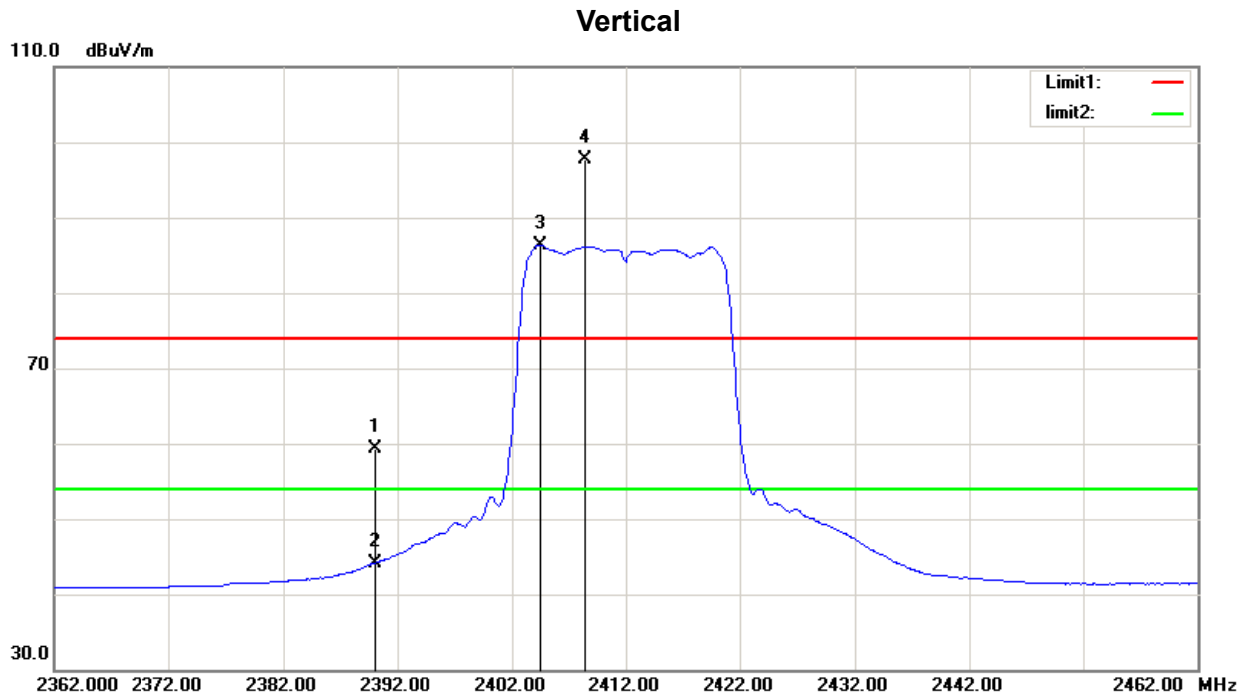

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.49	31.77	59.26	74.00	-14.74	peak
2	2390.000	12.35	31.77	44.12	54.00	-9.88	AVG
3	2404.400	54.49	31.81	86.30	/	/	AVG
4	2408.400	65.88	31.83	97.71	/	/	peak


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

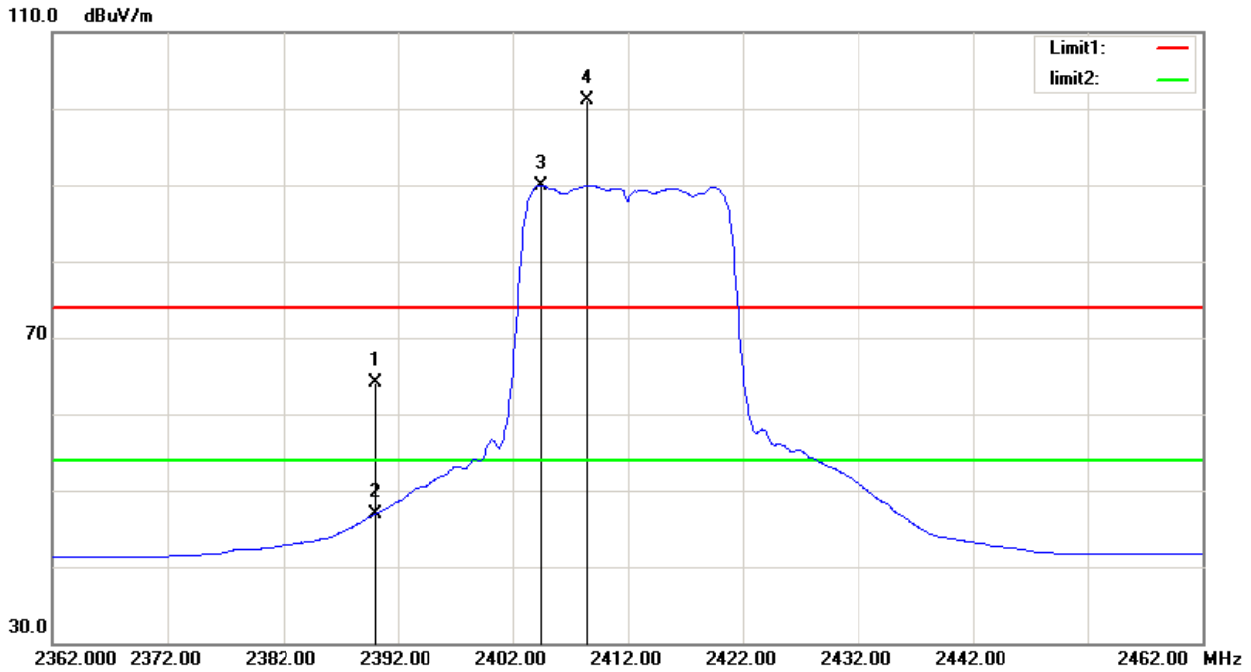


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	32.25	31.77	64.02	74.00	-9.98	peak
2	2390.000	15.14	31.77	46.91	54.00	-7.09	AVG
3	2404.500	58.19	31.81	90.00	/	/	AVG
4	2408.400	69.19	31.83	101.02	/	/	peak

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

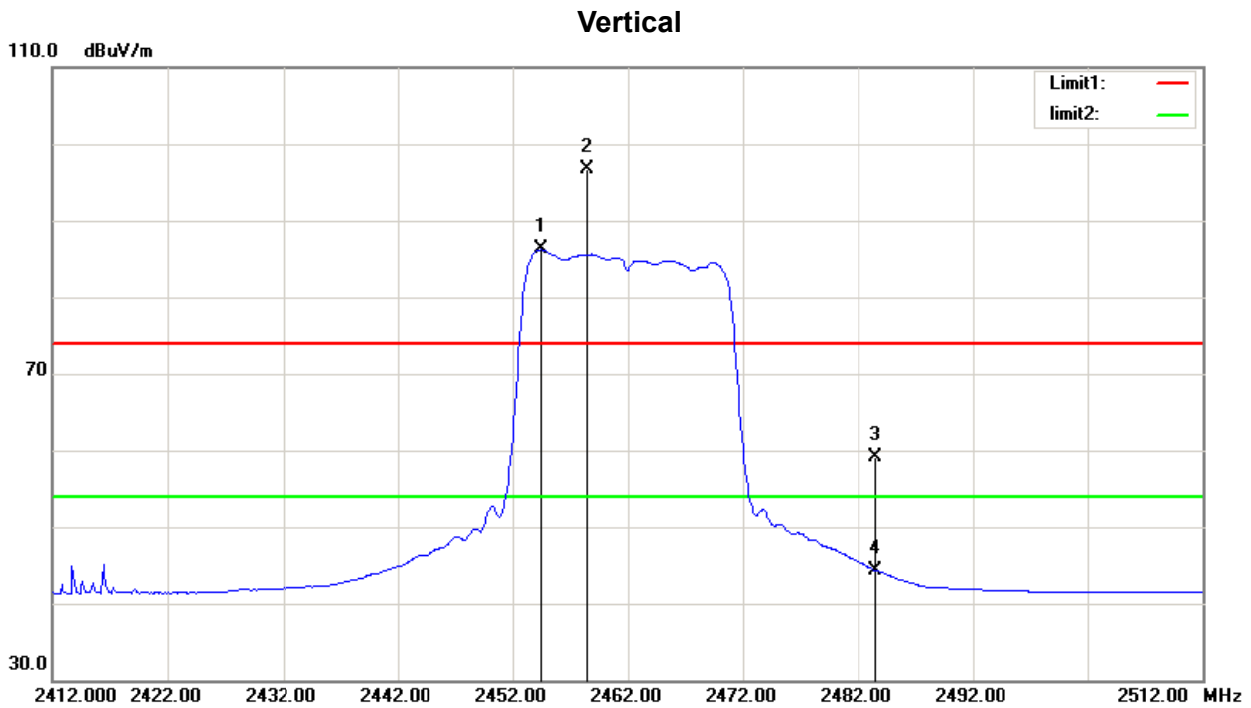

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.400	54.24	31.99	86.23	/	/	AVG
2	2458.400	64.76	32.00	96.76	/	/	peak
3	2483.500	27.09	32.08	59.17	74.00	-14.83	peak
4	2483.500	12.25	32.08	44.33	54.00	-9.67	AVG


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

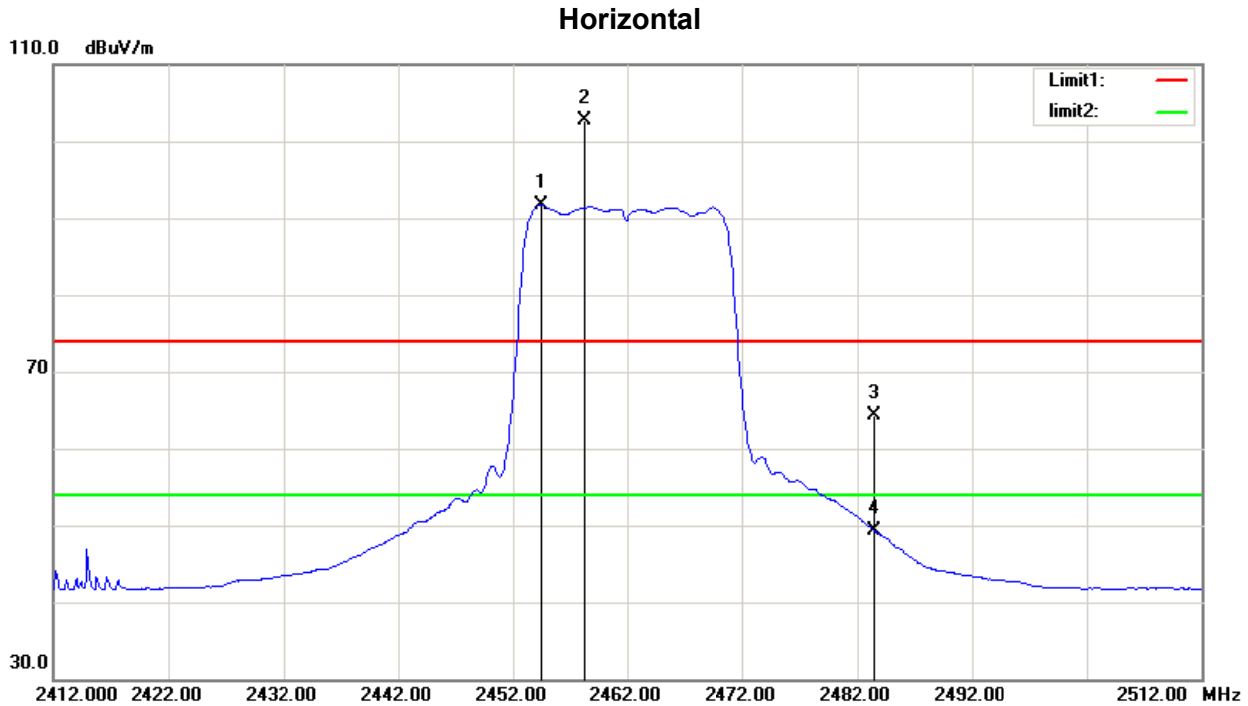

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.400	59.70	31.99	91.69	/	/	AVG
2	2458.300	70.65	32.00	102.65	/	/	peak
3	2483.500	32.27	32.08	64.35	74.00	-9.65	peak
4	2483.500	17.28	32.08	49.36	54.00	-4.64	AVG

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz


Vertical

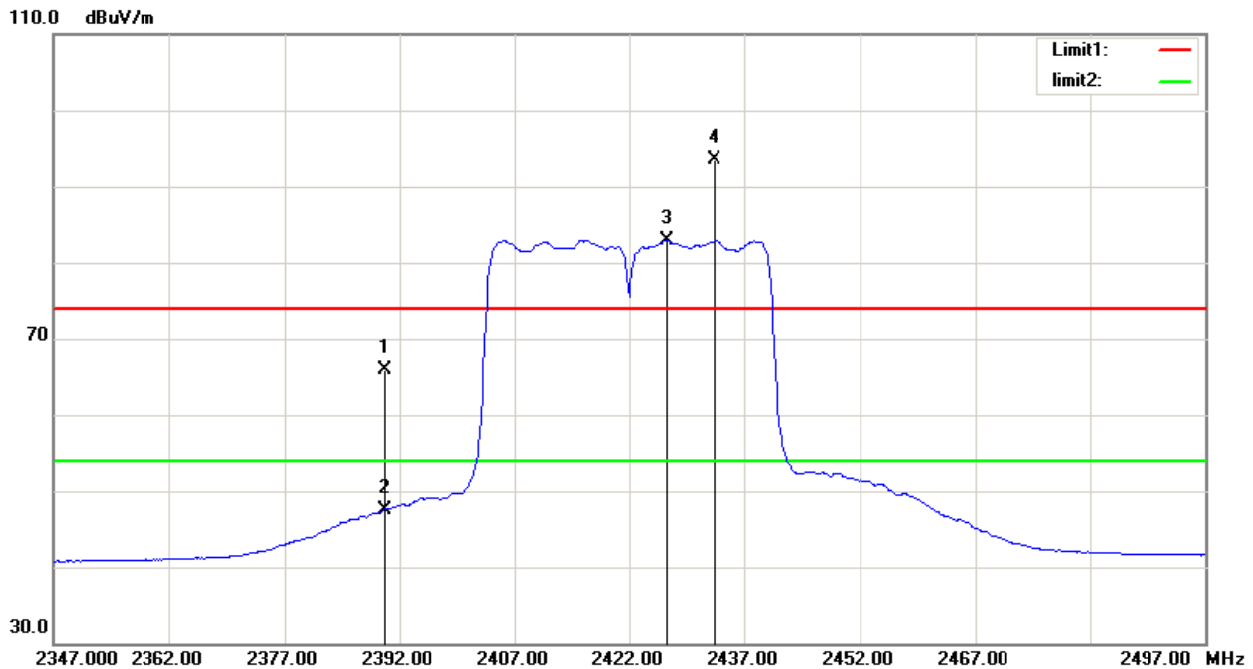

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	34.14	31.77	65.91	74.00	-8.09	peak
2	2390.000	15.83	31.77	47.60	54.00	-6.40	AVG
3	2426.800	51.10	31.90	83.00	/	/	AVG
4	2433.100	61.50	31.91	93.41	/	/	peak

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz


Horizontal

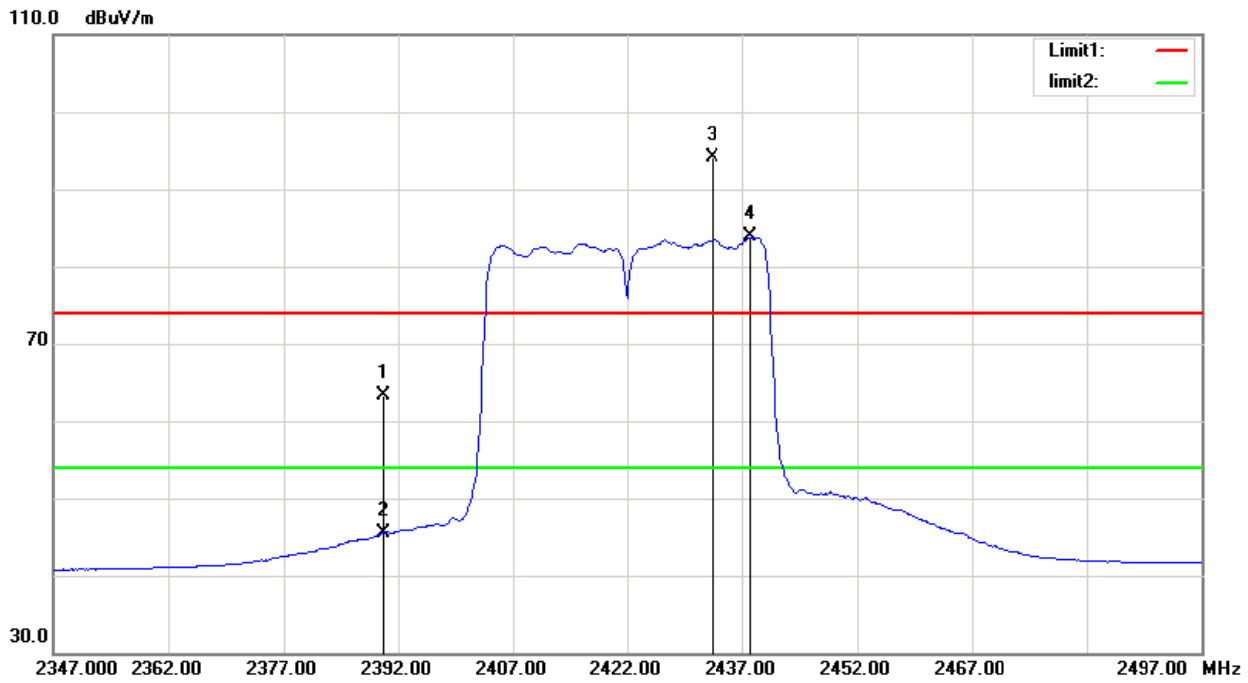

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	31.44	31.77	63.21	74.00	-10.79	peak
2	2390.000	13.78	31.77	45.55	54.00	-8.45	AVG
3	2433.100	62.14	31.91	94.05	/	/	peak
4	2438.200	51.87	31.94	83.81	/	/	AVG


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

Vertical

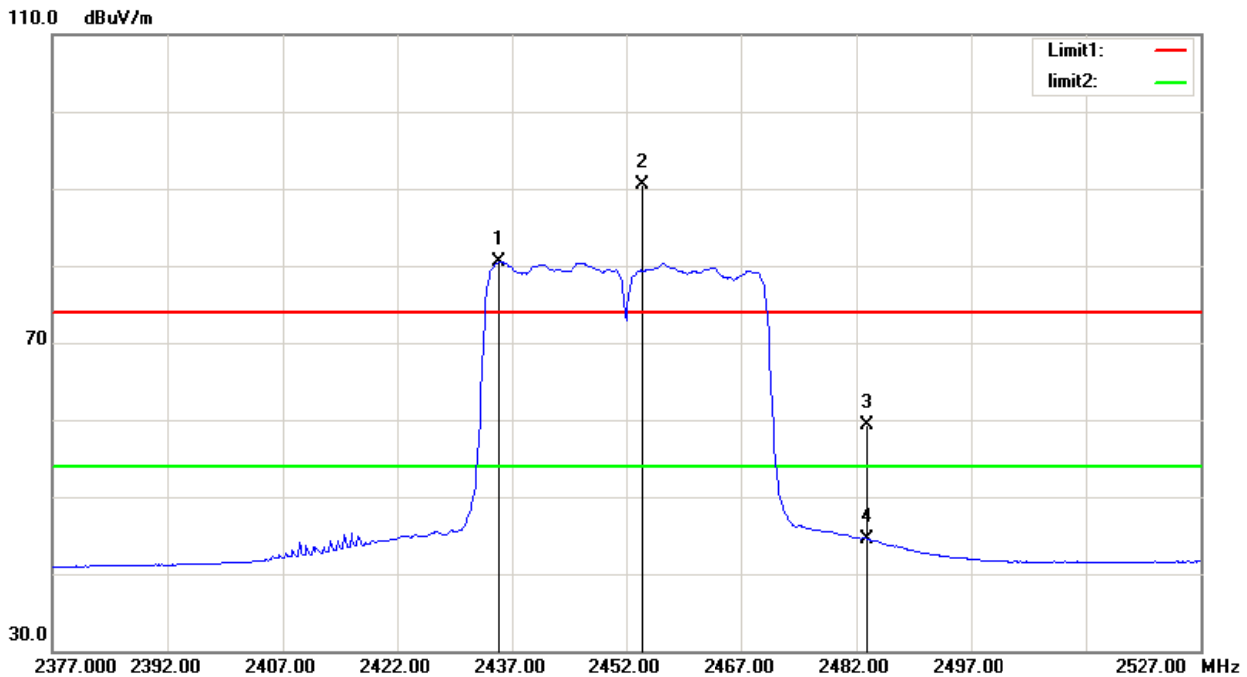

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2435.350	48.53	31.92	80.45	/	/	AVG
2	2454.100	58.61	31.99	90.60	/	/	peak
3	2483.500	27.25	32.08	59.33	74.00	-14.67	peak
4	2483.500	12.50	32.08	44.58	54.00	-9.42	AVG


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

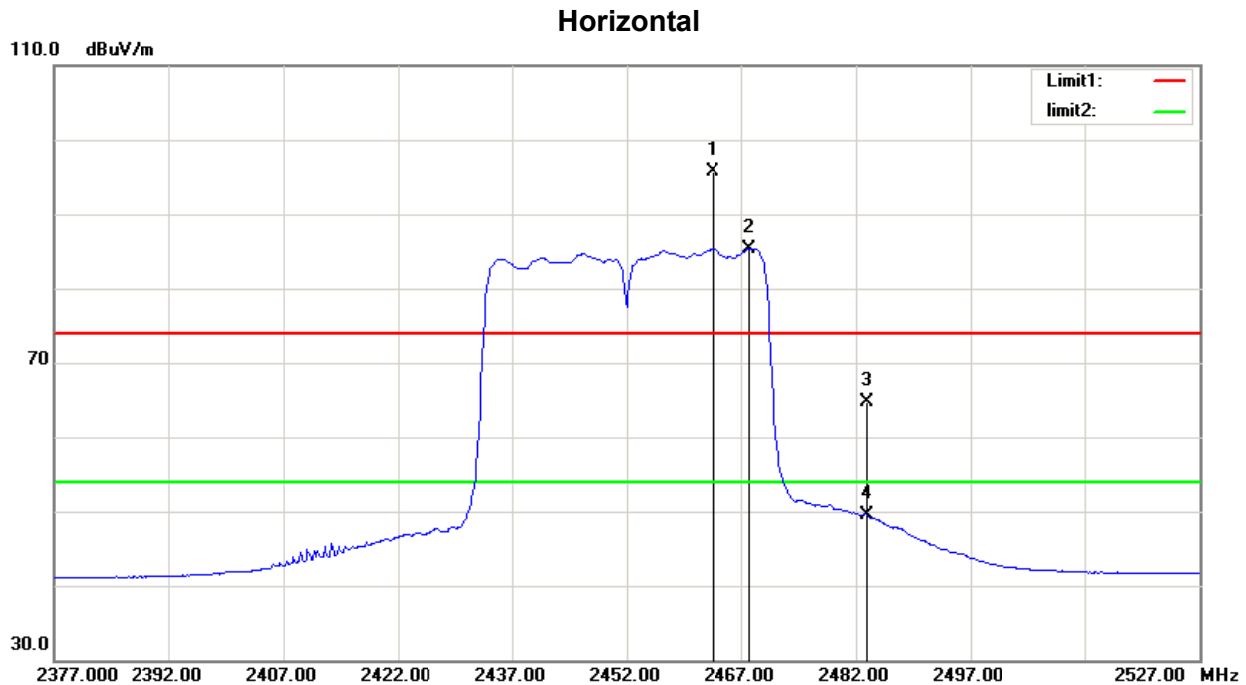

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.250	63.75	32.02	95.77	/	/	peak
2	2468.200	53.33	32.03	85.36	/	/	AVG
3	2483.500	32.72	32.08	64.80	74.00	-9.20	peak
4	2483.500	17.40	32.08	49.48	54.00	-4.52	AVG


5.9 TEST RESULTS- ABOVE 1000MHz(HARMONIC)

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

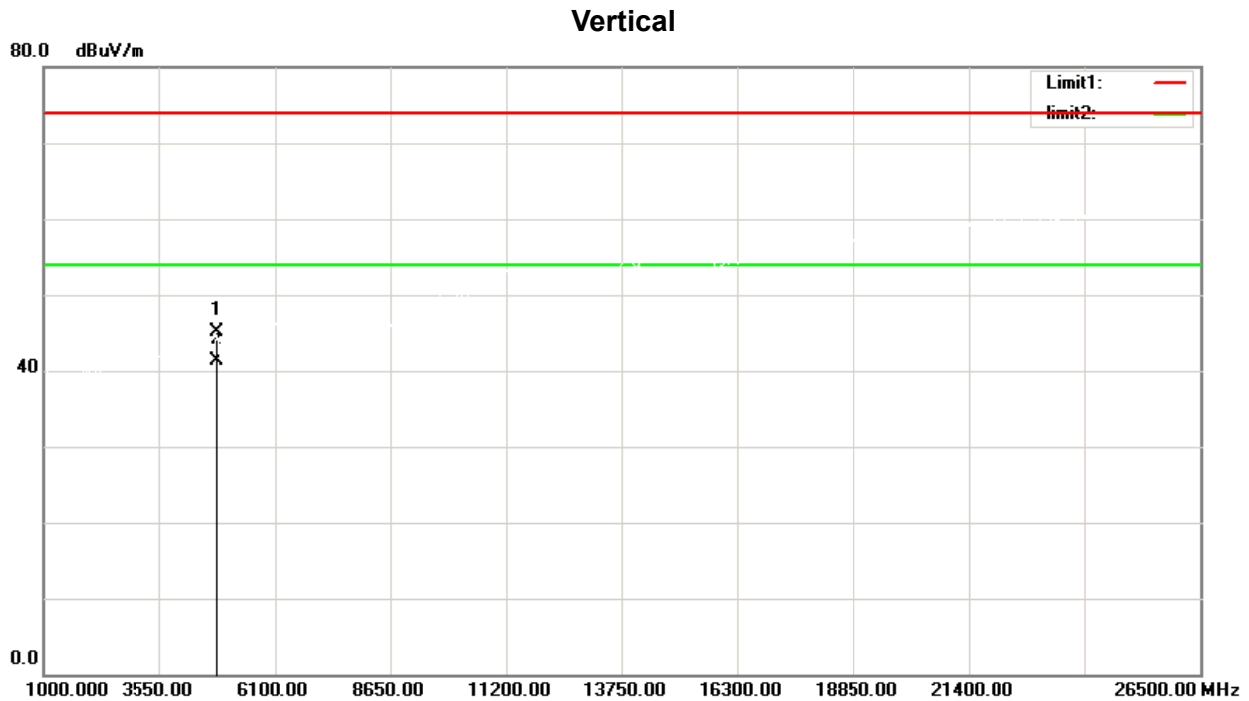


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	52.58	-7.48	45.10	74.00	-28.90	peak
2	4824.000	48.72	-7.48	41.24	54.00	-12.76	AVG

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

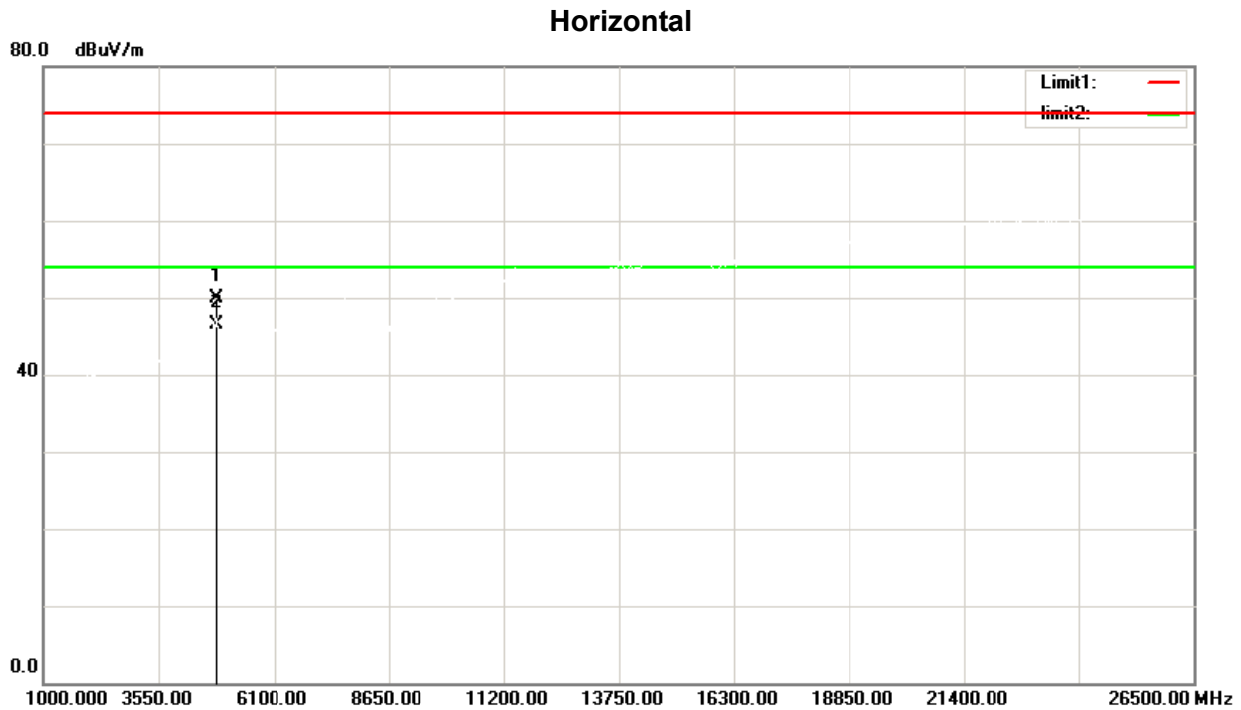


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	57.36	-7.48	49.88	74.00	-24.12	peak
2	4824.000	54.04	-7.48	46.56	54.00	-7.44	AVG

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

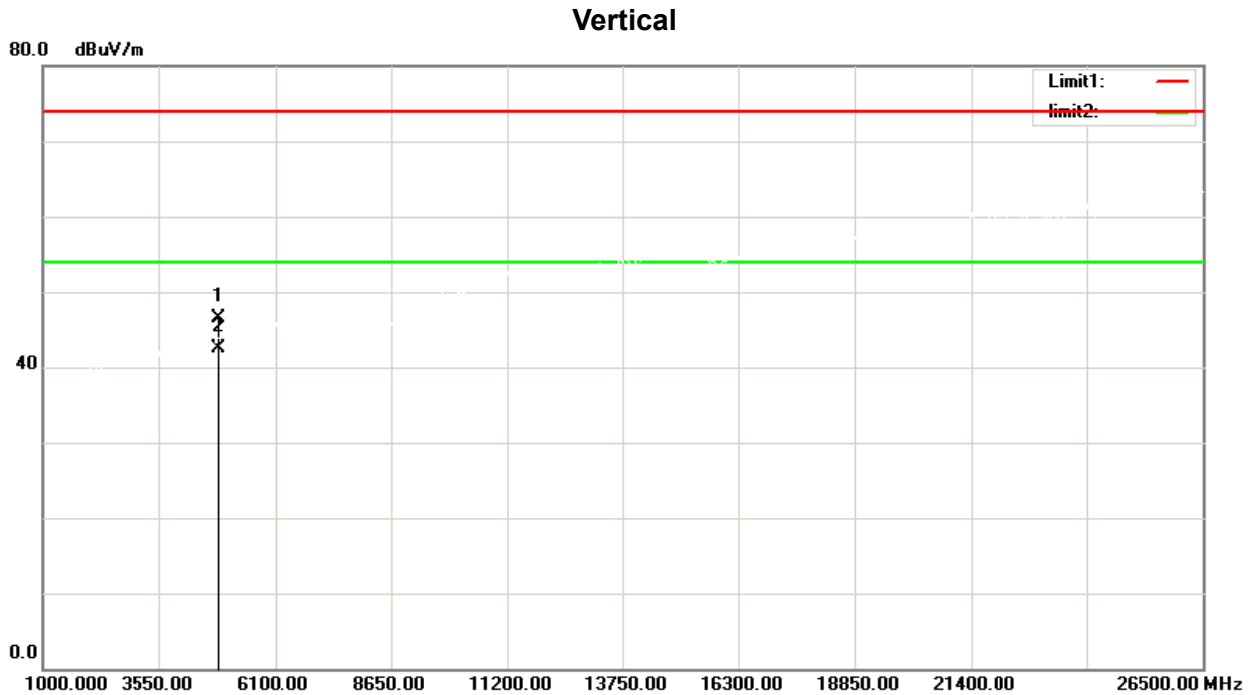


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	53.92	-7.34	46.58	74.00	-27.42	peak
2	4874.000	49.85	-7.34	42.51	54.00	-11.49	AVG

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

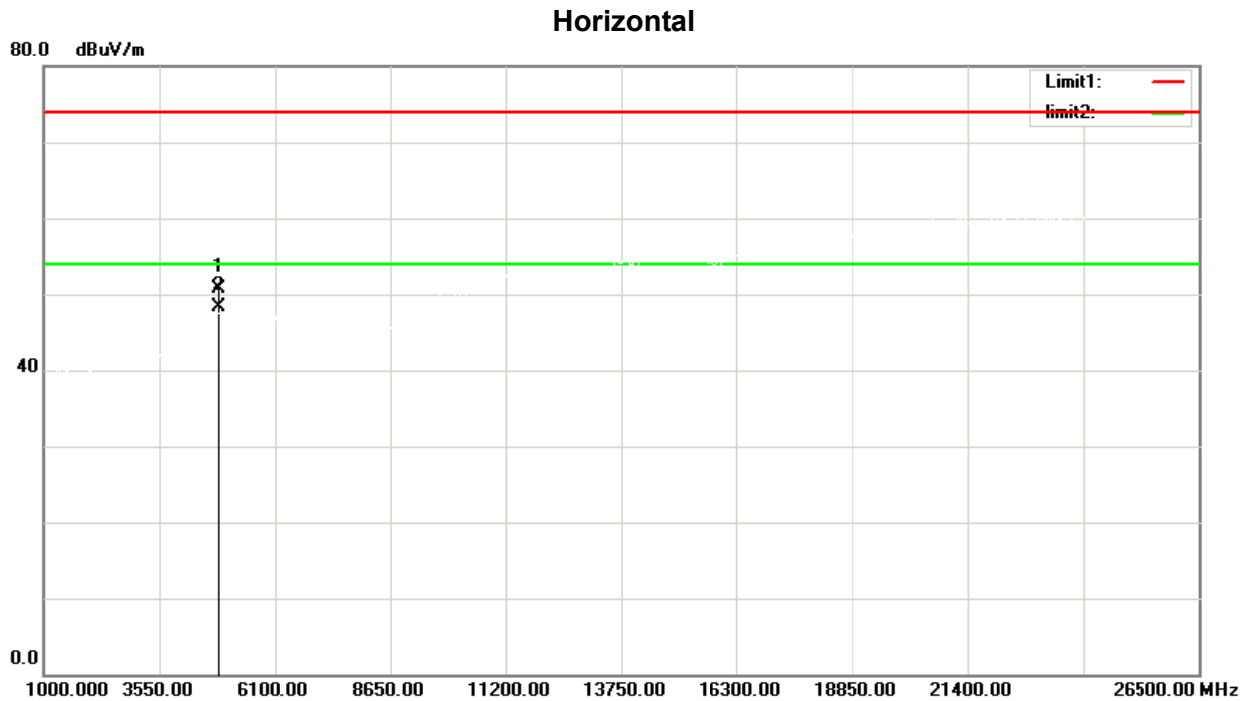


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	58.02	-7.34	50.68	74.00	-23.32	peak
2	4874.000	55.73	-7.34	48.39	54.00	-5.61	AVG

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

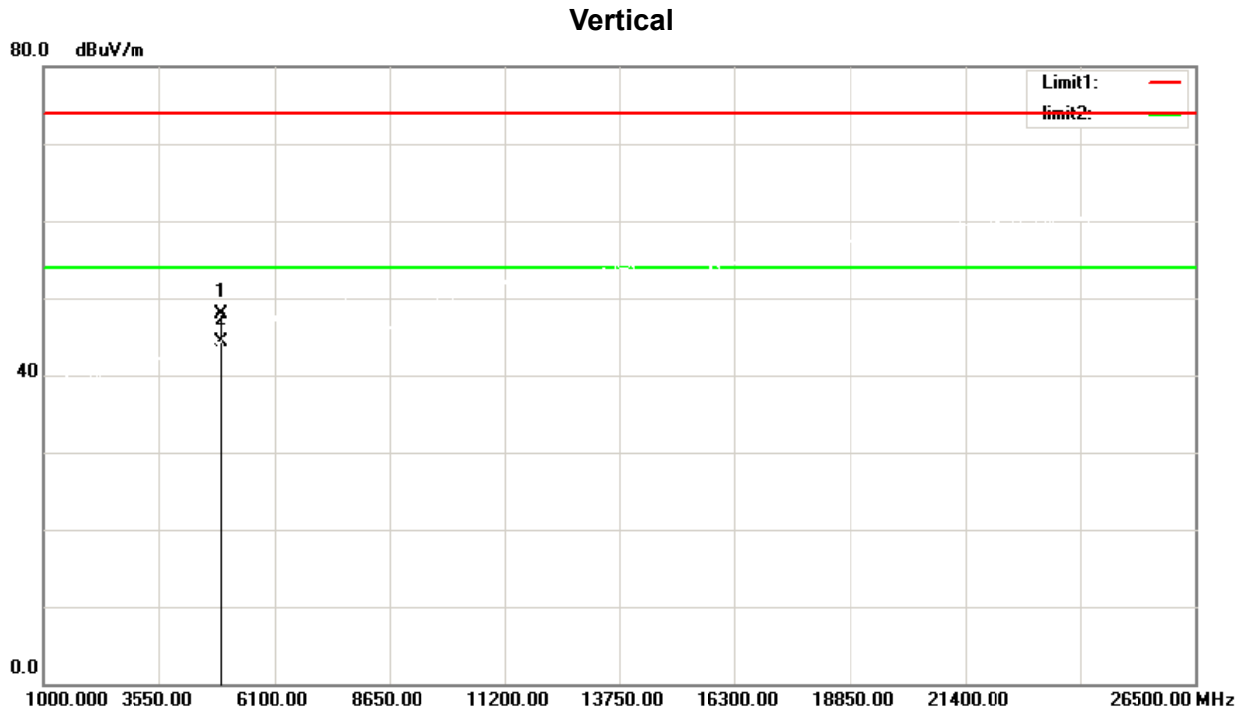


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	55.10	-7.20	47.90	74.00	-26.10	peak
2	4924.000	51.41	-7.20	44.21	54.00	-9.79	AVG

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

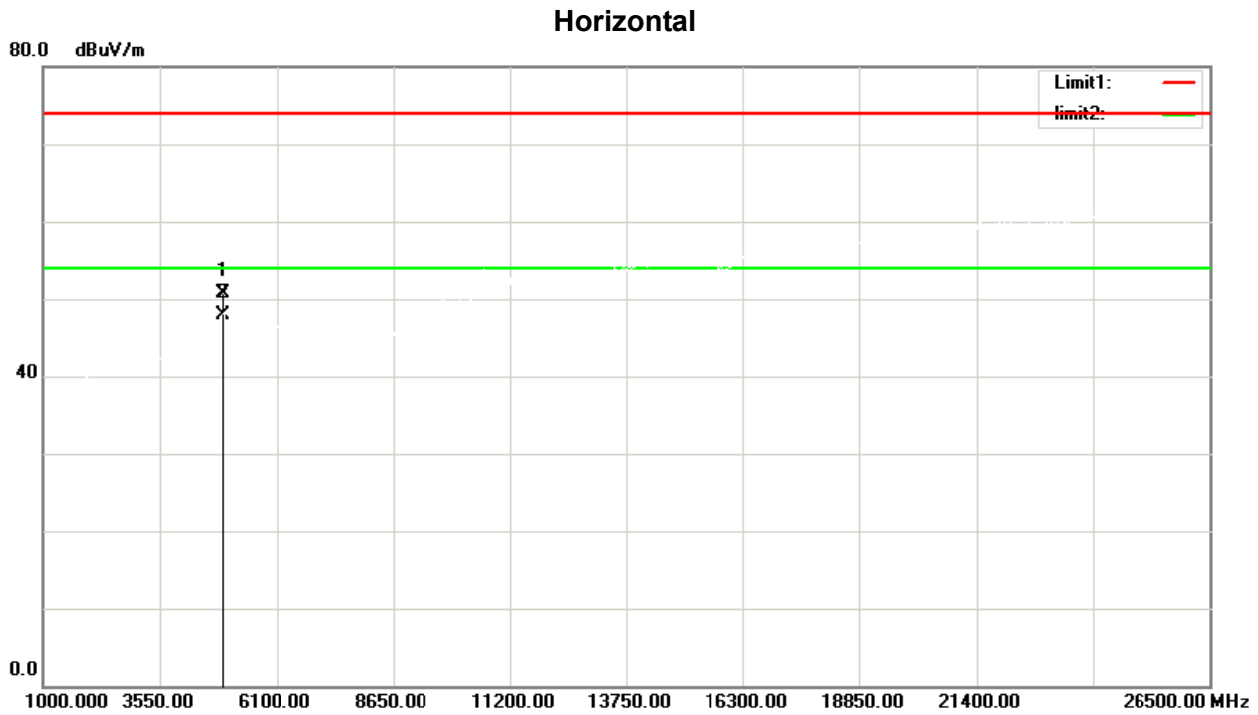


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	57.81	-7.20	50.61	74.00	-23.39	peak
2	4924.000	55.12	-7.20	47.92	54.00	-6.08	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

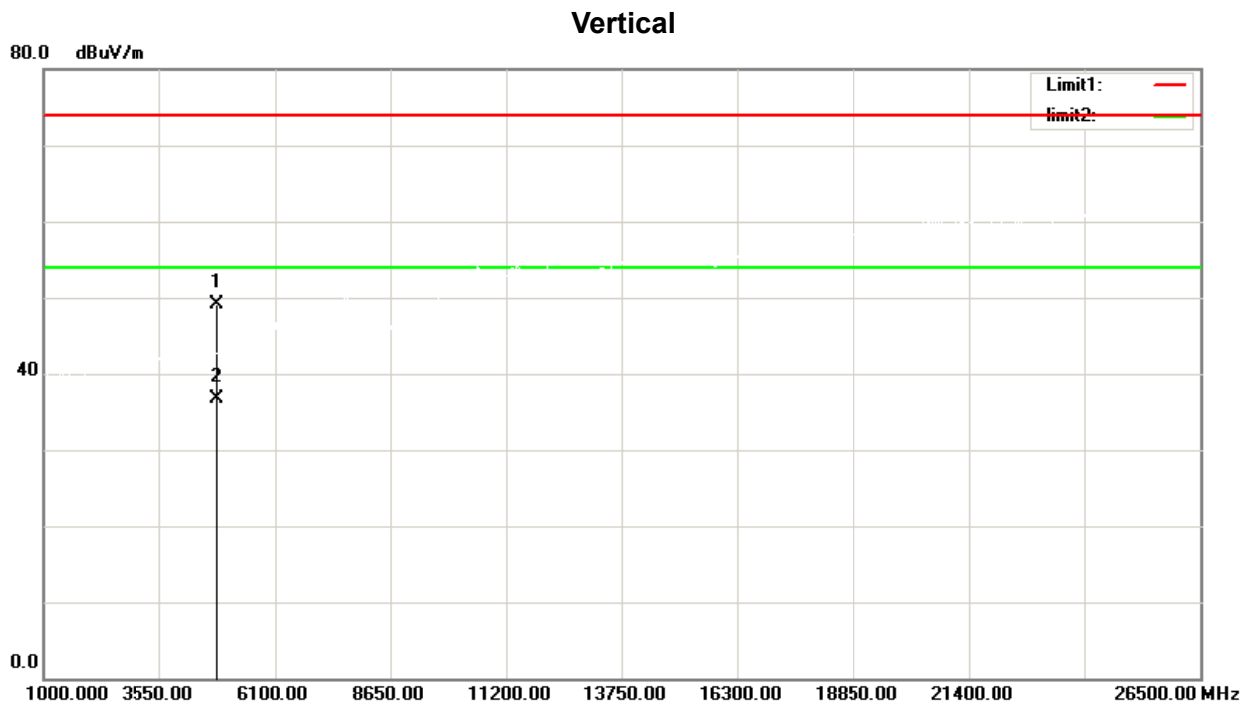


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.100	56.56	-7.48	49.08	74.00	-24.92	peak
2	4824.100	44.23	-7.48	36.75	54.00	-17.25	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

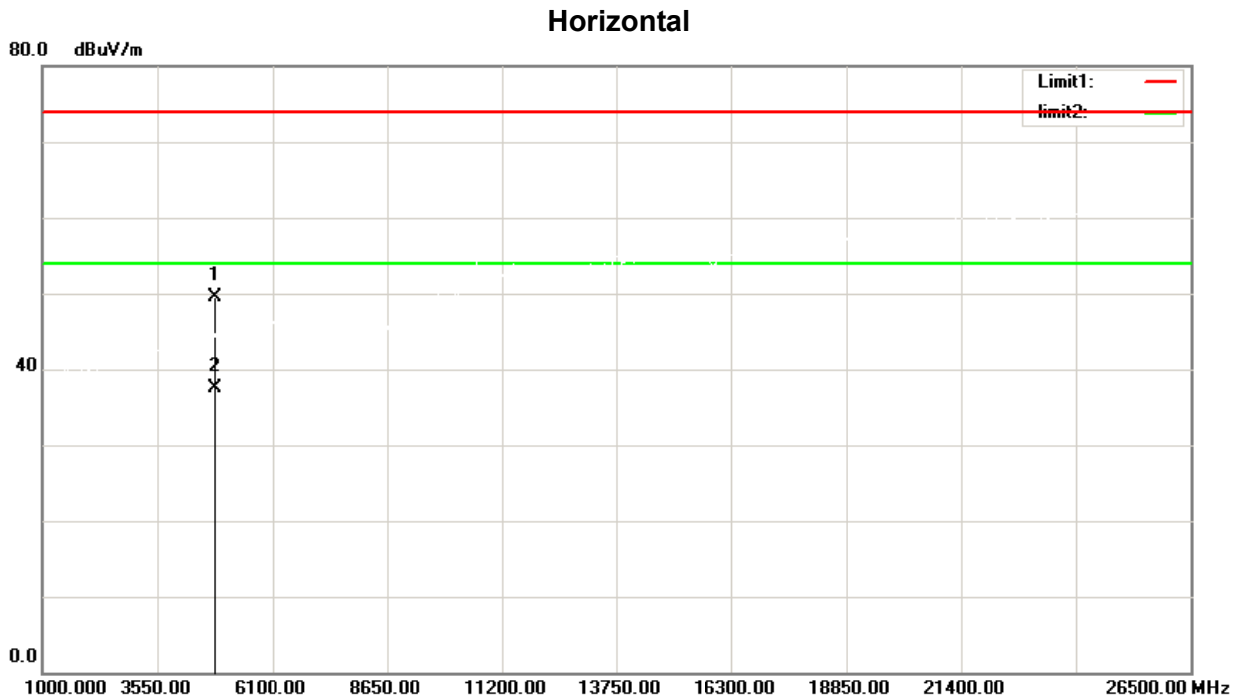


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	56.94	-7.48	49.46	74.00	-24.54	peak
2	4824.000	44.89	-7.48	37.41	54.00	-16.59	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

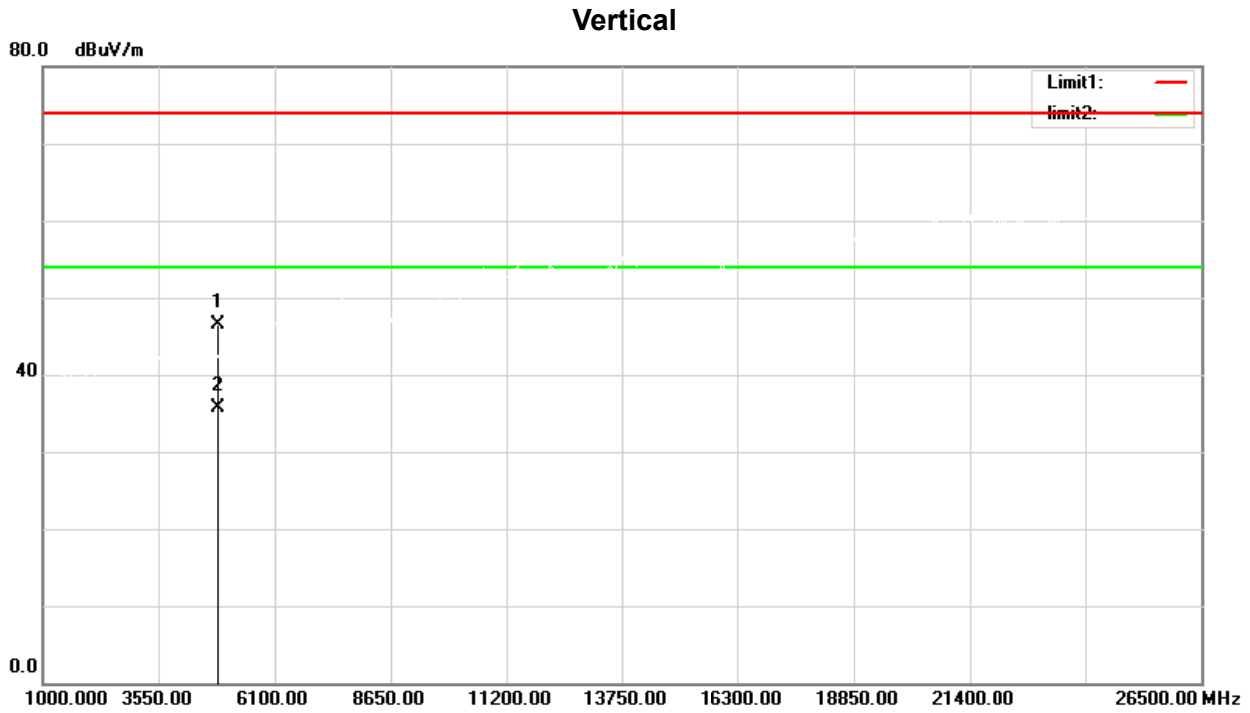


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	53.90	-7.34	46.56	74.00	-27.44	peak
2	4874.000	42.98	-7.34	35.64	54.00	-18.36	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

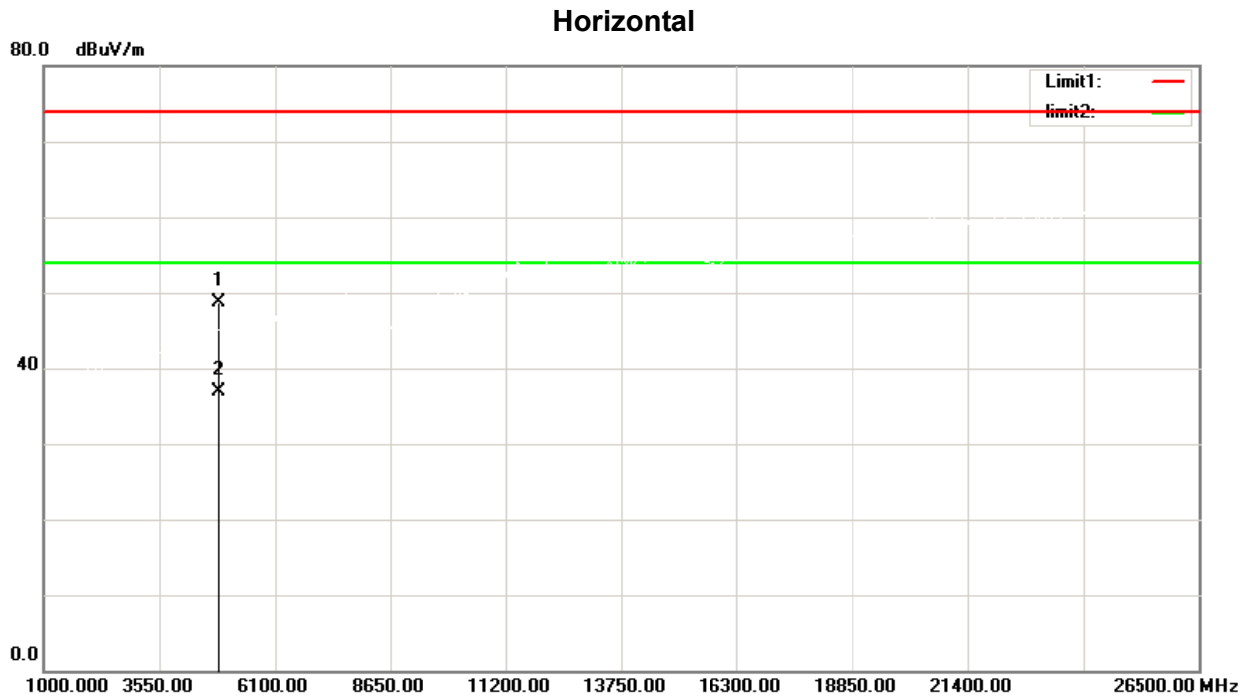


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	56.06	-7.34	48.72	74.00	-25.28	peak
2	4874.000	44.33	-7.34	36.99	54.00	-17.01	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

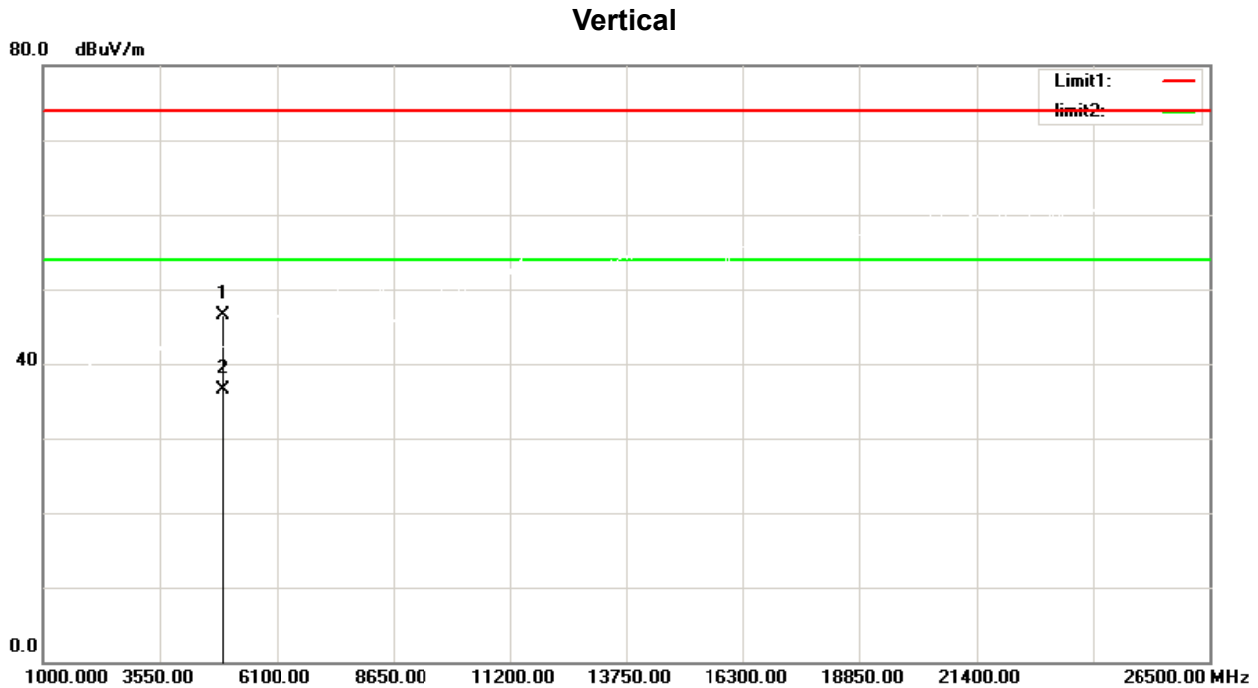


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	53.77	-7.20	46.57	74.00	-27.43	peak
2	4924.000	43.72	-7.20	36.52	54.00	-17.48	AVG

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

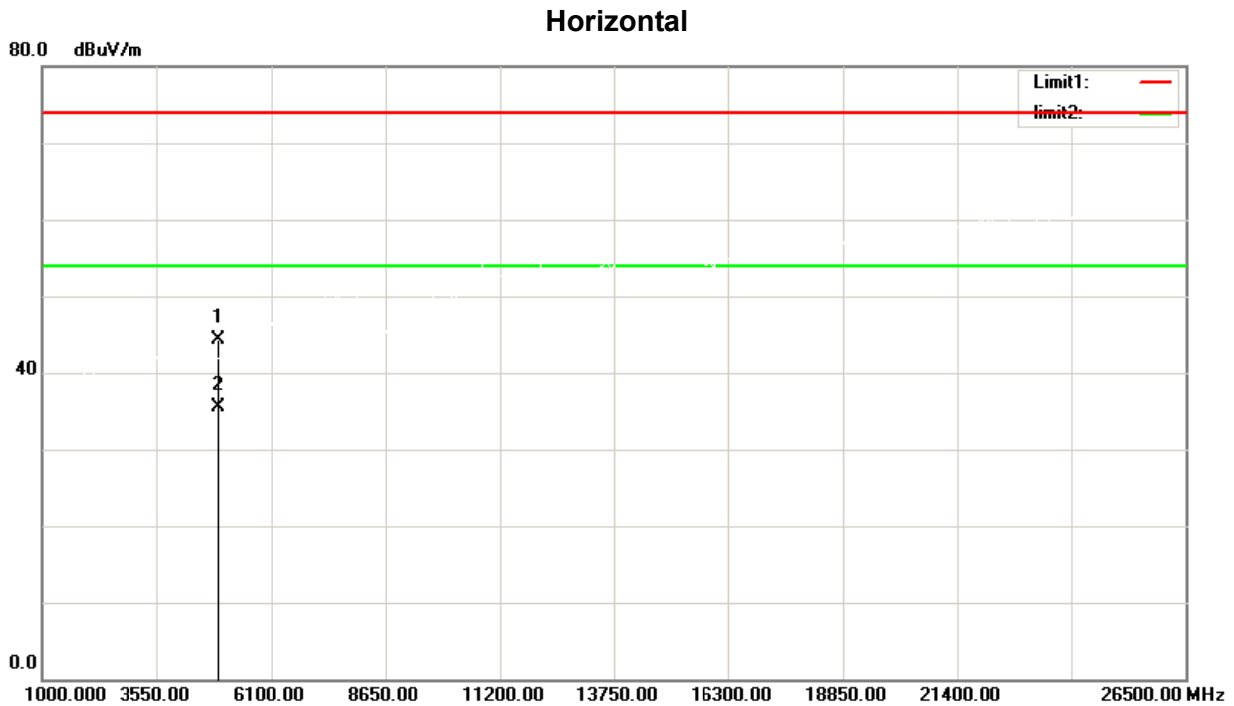


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	51.58	-7.20	44.38	74.00	-29.62	peak
2	4924.000	42.66	-7.20	35.46	54.00	-18.54	AVG

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

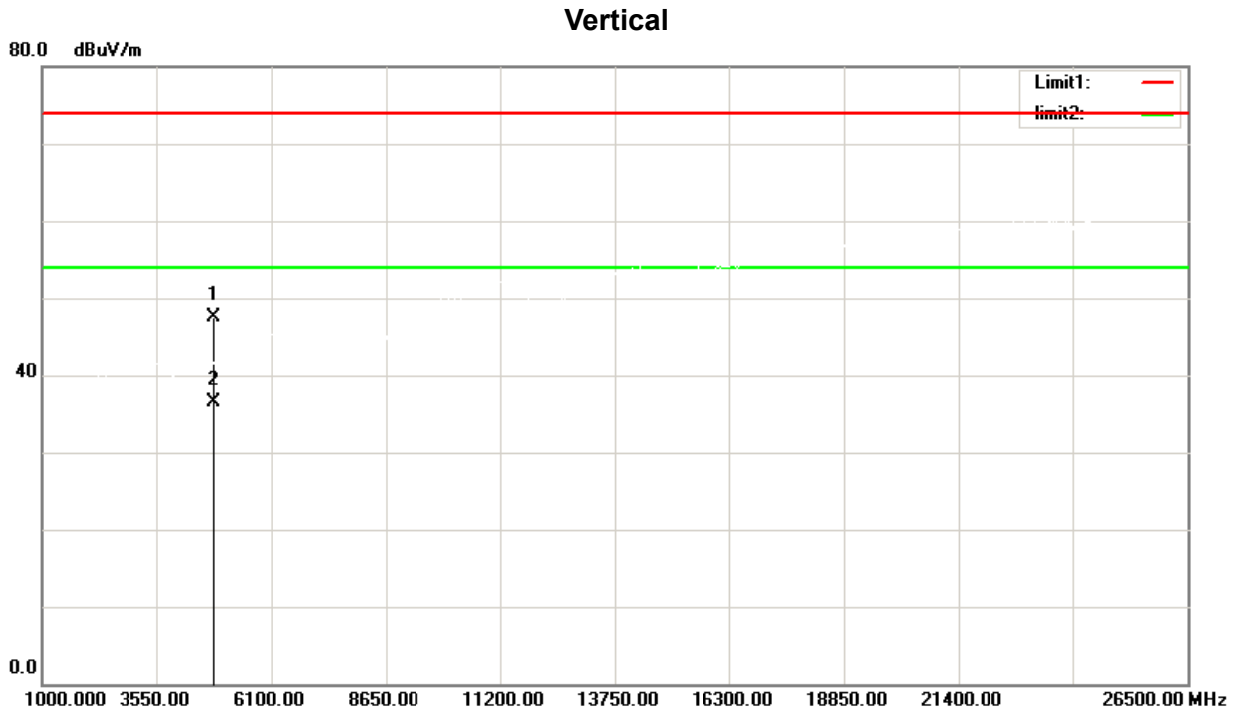


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.500	55.03	-7.48	47.55	74.00	-26.45	peak
2	4824.500	44.04	-7.48	36.56	54.00	-17.44	AVG

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

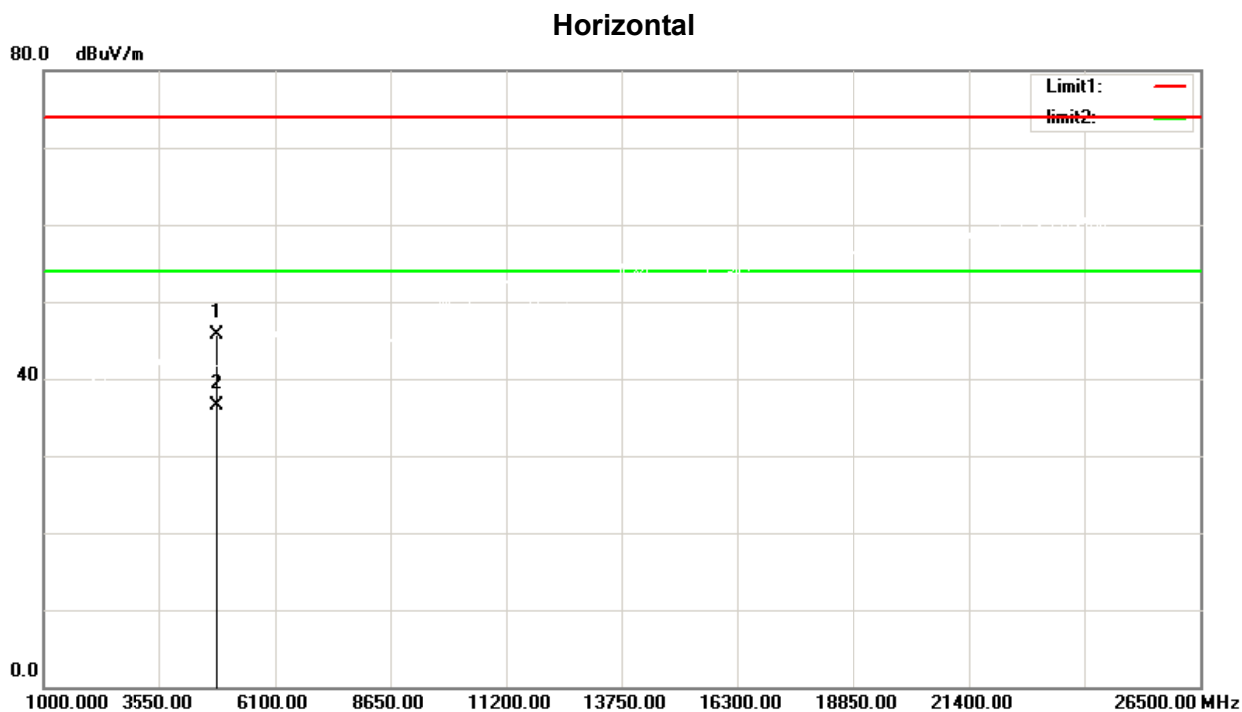

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	53.10	-7.48	45.62	74.00	-28.38	peak
2	4824.000	44.04	-7.48	36.56	54.00	-17.44	AVG


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

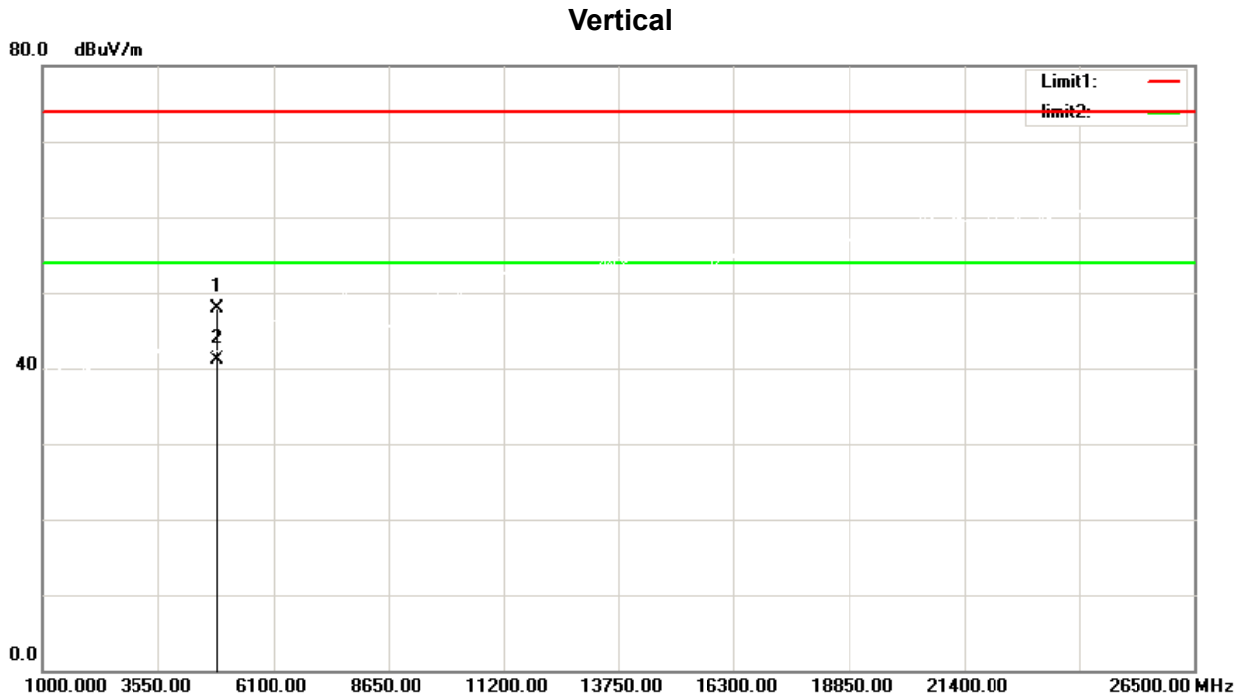

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	55.23	-7.34	47.89	74.00	-26.11	peak
2	4874.000	48.37	-7.34	41.03	54.00	-12.97	AVG


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

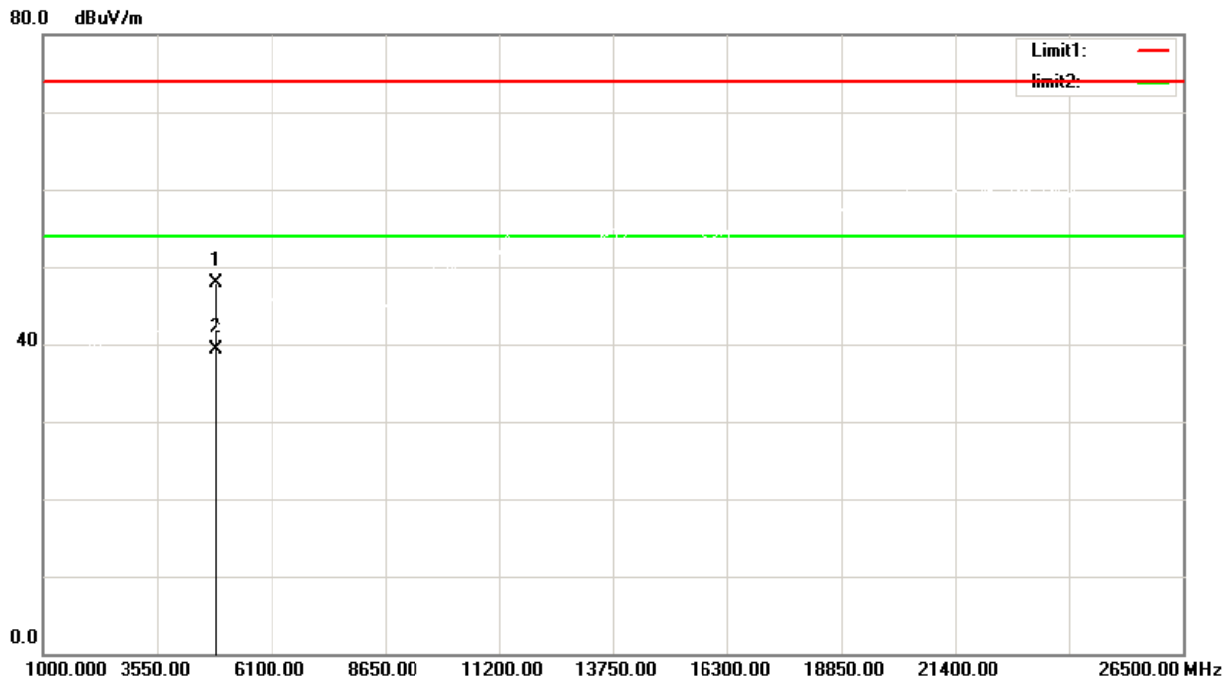


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	55.32	-7.34	47.98	74.00	-26.02	peak
2	4874.000	46.63	-7.34	39.29	54.00	-14.71	AVG

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

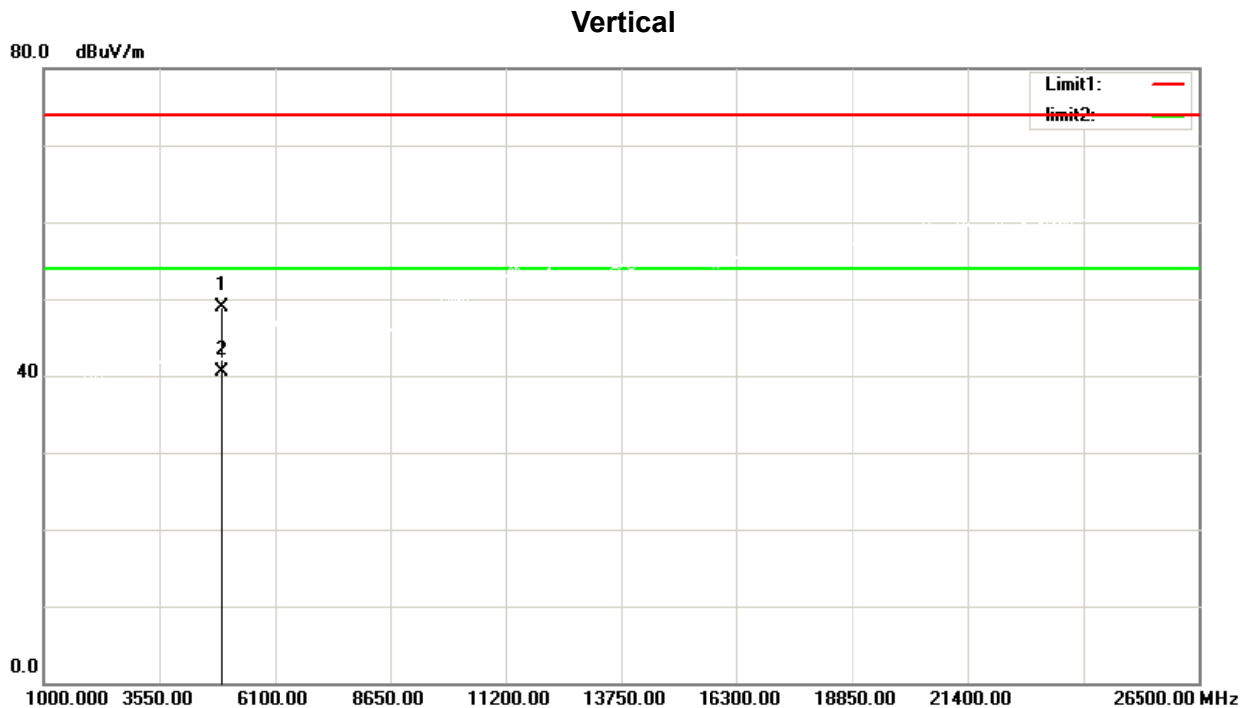


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	56.08	-7.20	48.88	74.00	-25.12	peak
2	4924.000	47.70	-7.20	40.50	54.00	-13.50	AVG

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

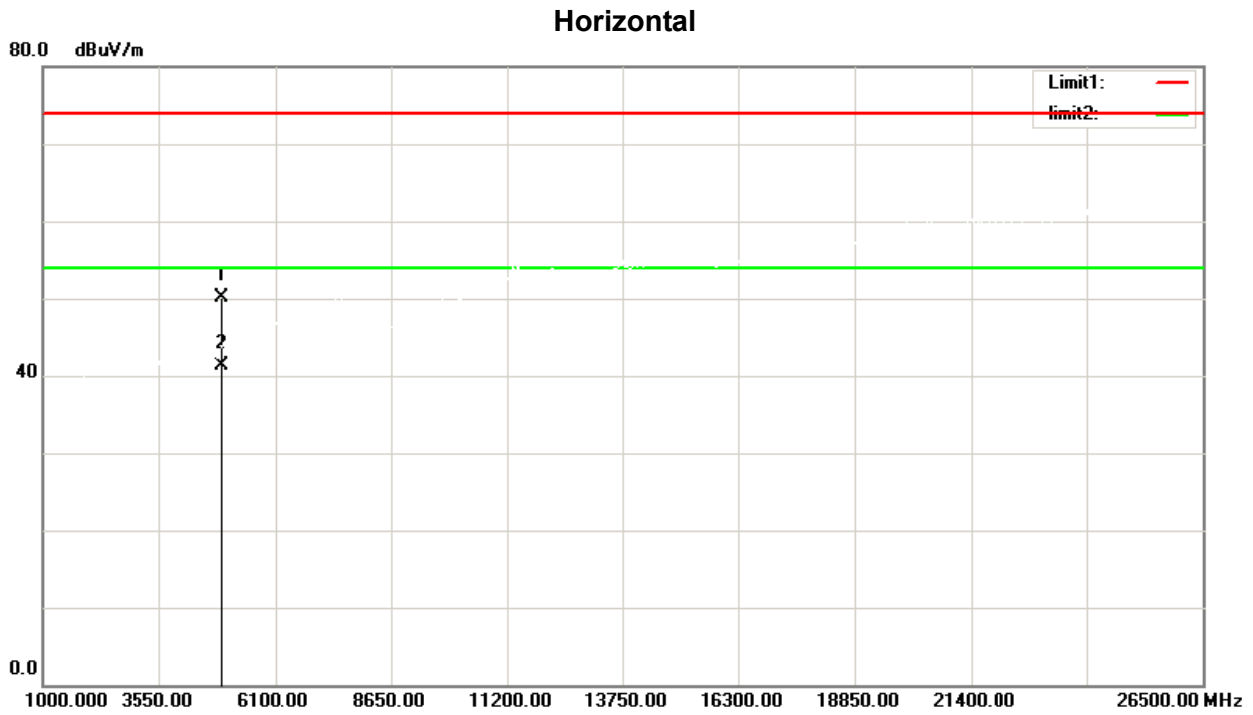


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	57.22	-7.20	50.02	74.00	-23.98	peak
2	4924.000	48.43	-7.20	41.23	54.00	-12.77	AVG

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

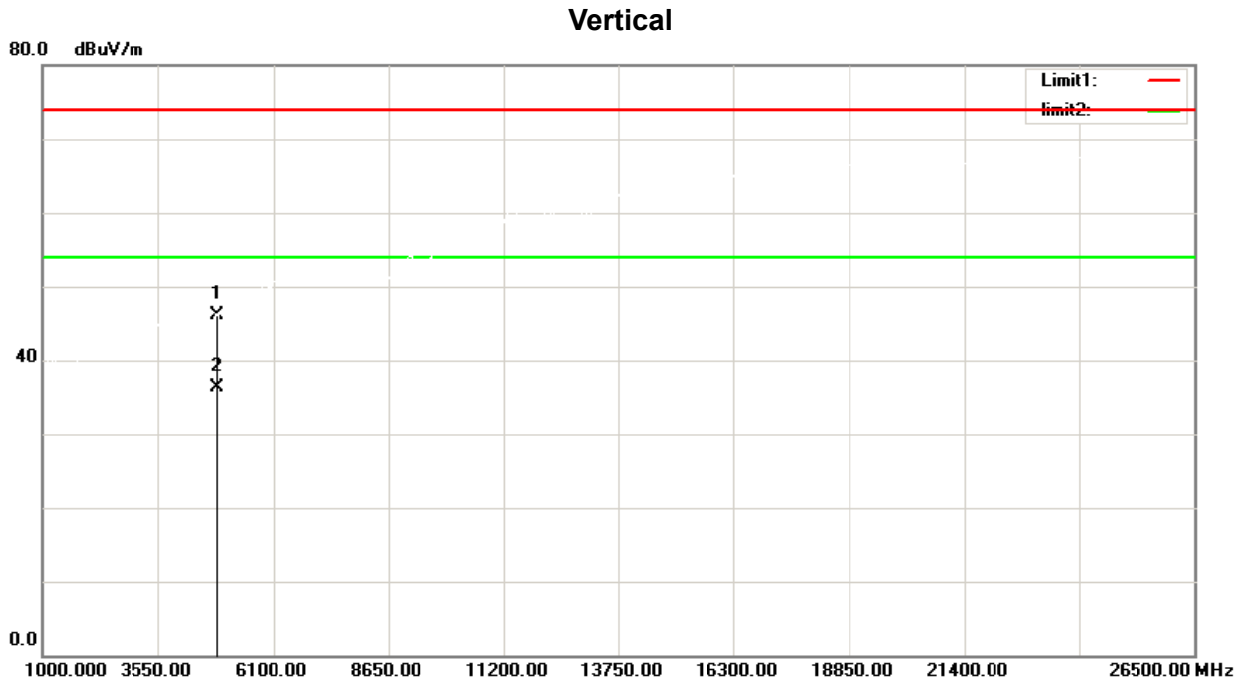


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	49.32	-3.29	46.03	74.00	-27.97	peak
2	4844.000	39.55	-3.29	36.26	54.00	-17.74	AVG

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

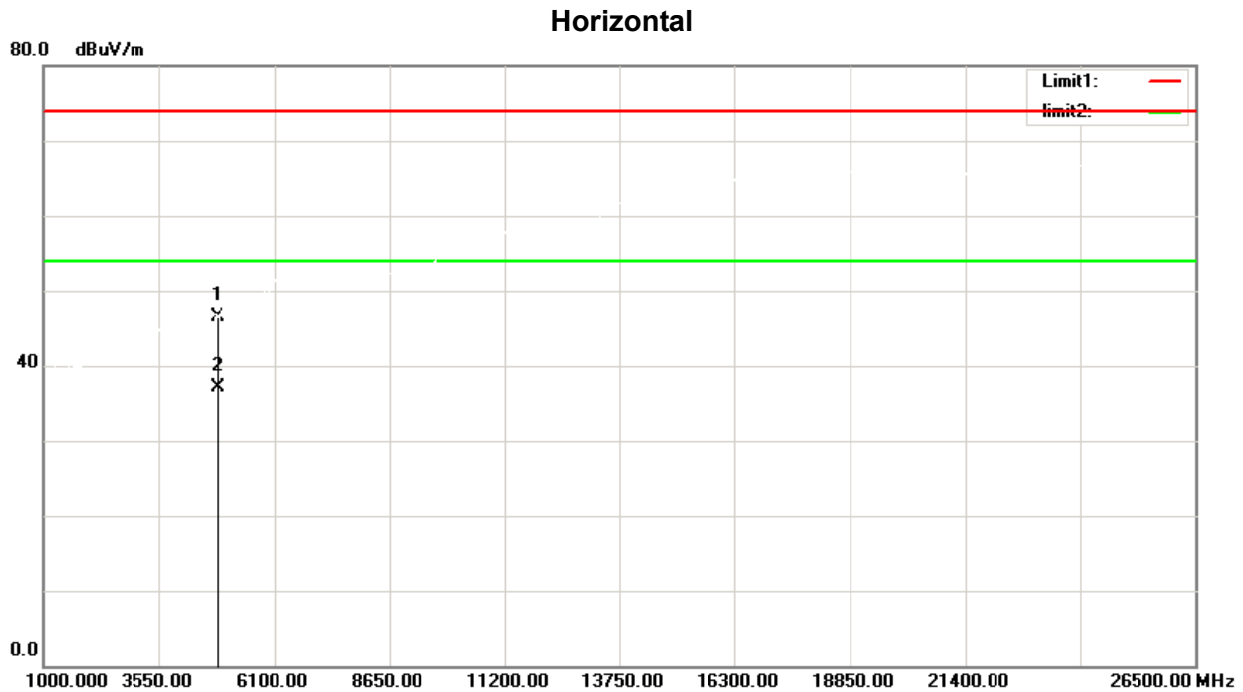


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	49.83	-3.29	46.54	74.00	-27.46	peak
2	4844.000	40.44	-3.29	37.15	54.00	-16.85	AVG

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

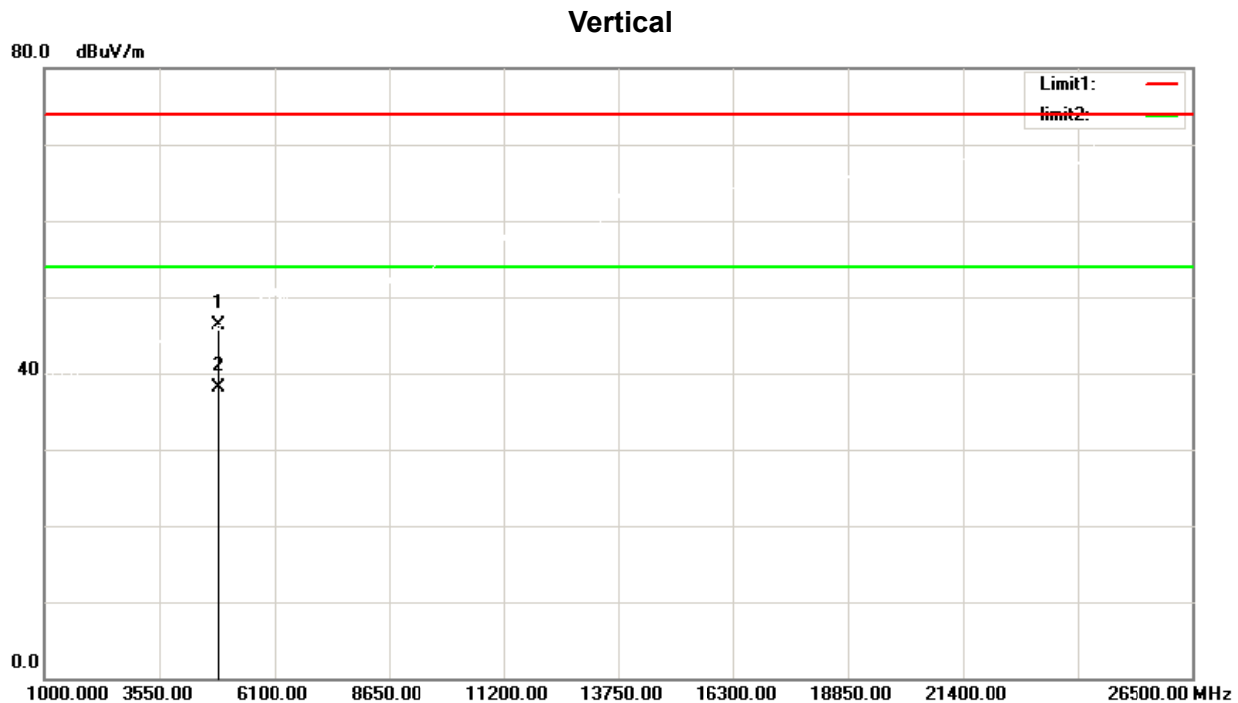


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.44	-3.18	46.26	74.00	-27.74	peak
2	4874.000	41.38	-3.18	38.20	54.00	-15.80	AVG

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

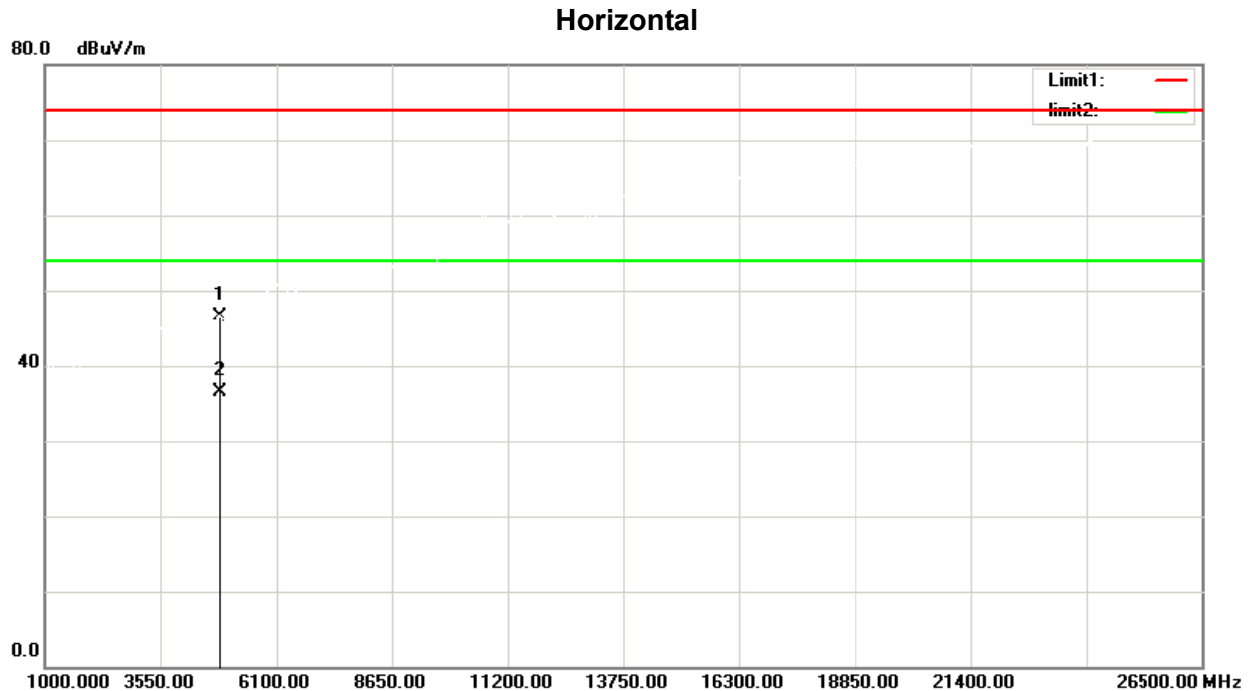


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.65	-3.18	46.47	74.00	-27.53	peak
2	4874.000	39.77	-3.18	36.59	54.00	-17.41	AVG

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

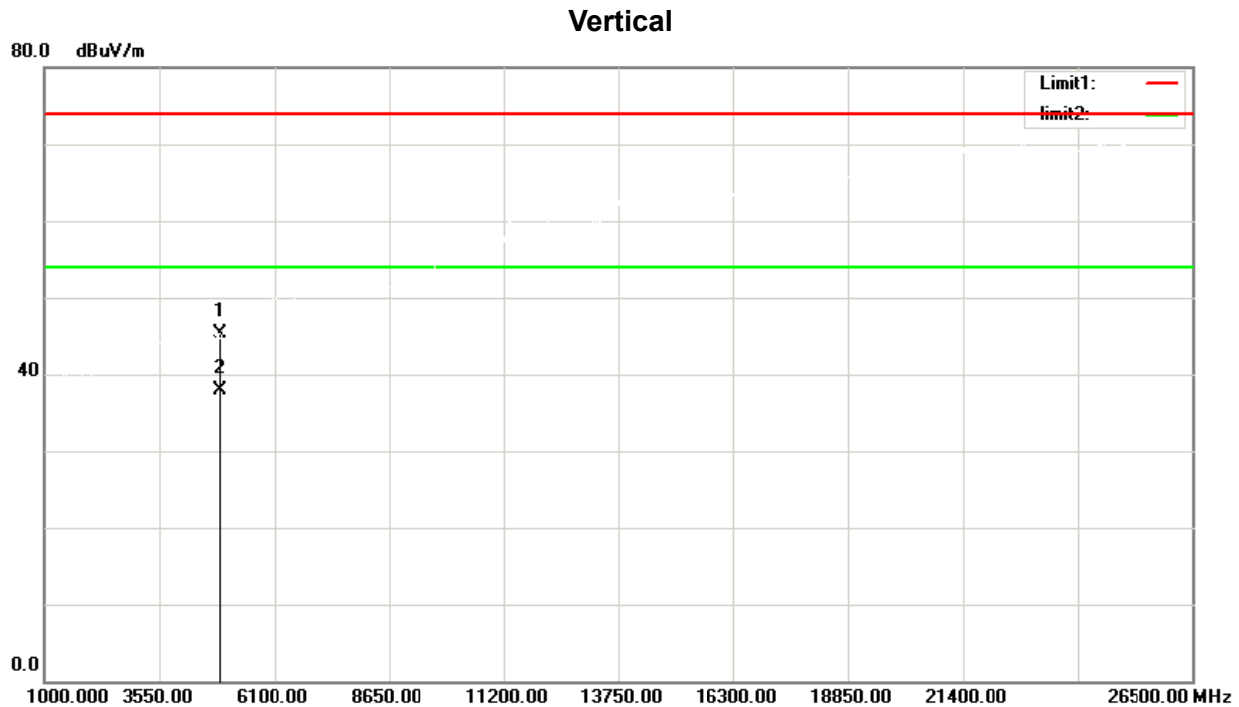

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	48.37	-3.06	45.31	74.00	-28.69	peak
2	4904.000	40.90	-3.06	37.84	54.00	-16.16	AVG

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

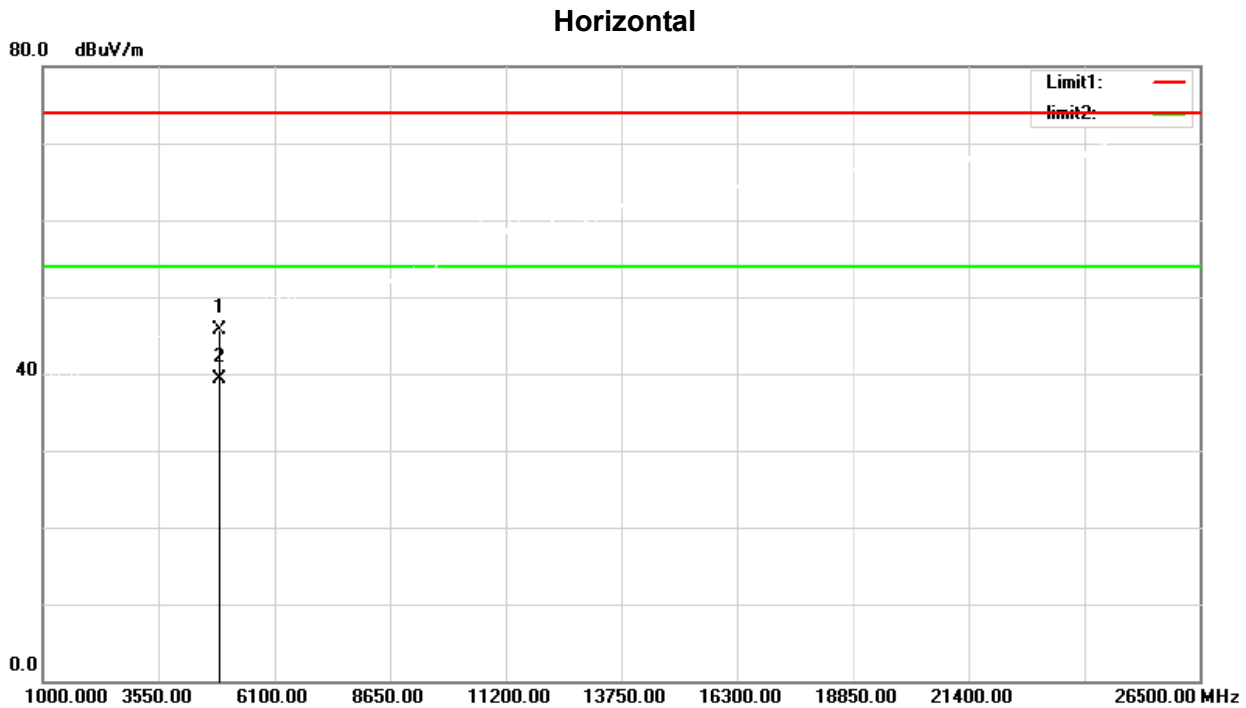

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	48.82	-3.06	45.76	74.00	-28.24	peak
2	4904.000	42.32	-3.06	39.26	54.00	-14.74	AVG

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)&RSS-Gen and RSS-247		
Section	Test Item	Limit
15.247(a)(2) RSS-Gen6.7 RSS-247 5.2 (a)	6dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- For 6dB Bandwidth Spectrum setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5ms.
For 99% OBW Spectrum Setting: RBW= 300KHz, VBW=1MHz,Sweep time = 2.5ms.
- The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

6.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2021/05/24
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TESTRESULTS


TX B Mode					
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	13.03	16.817	500	PASS
06	2437	12.56	16.620	500	PASS
11	2462	13.04	16.520	500	PASS

6dB


CH01

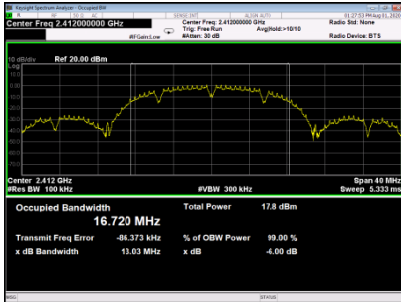

CH06

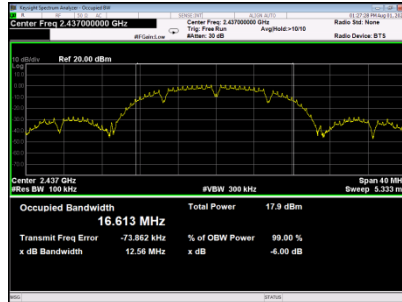


CH11

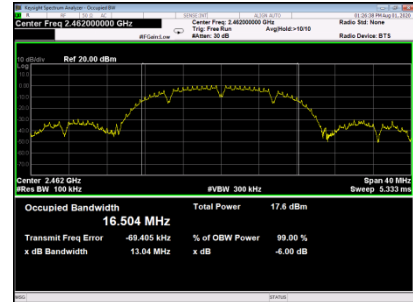


99%


CH01

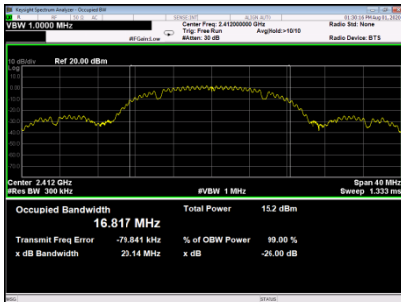

CH06

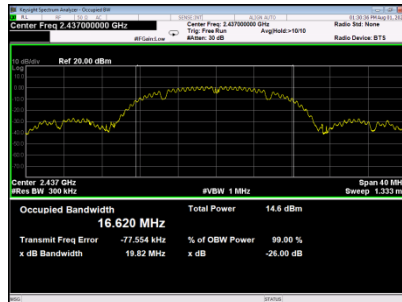

CH11

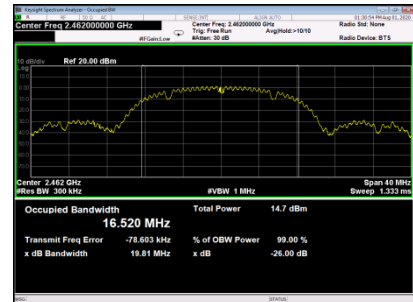


TX G Mode


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	16.35	17.074	500	PASS
06	2437	16.34	17.068	500	PASS
11	2462	16.35	17.121	500	PASS

6dB


CH01

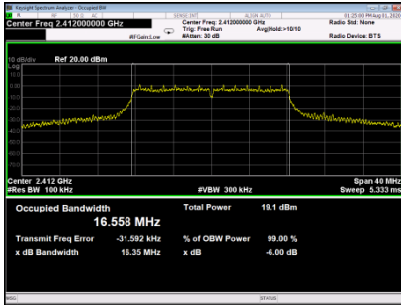

CH06

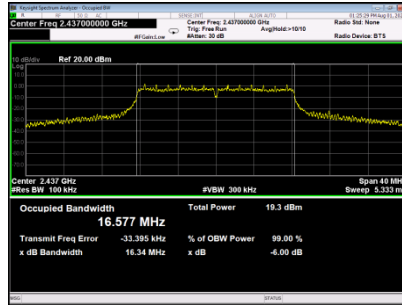


CH11

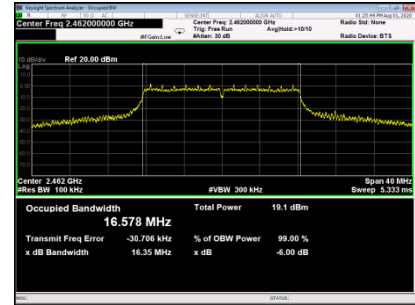


99%


CH01

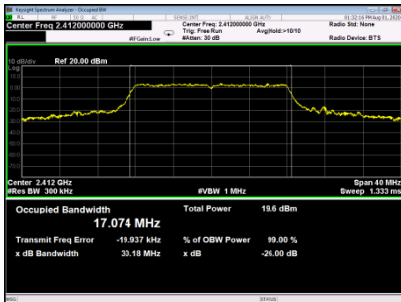

CH06

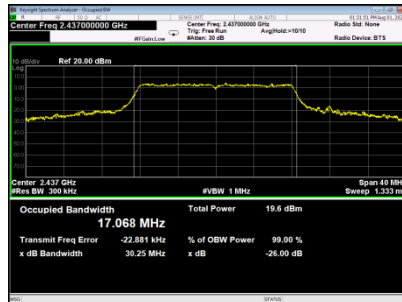

CH11

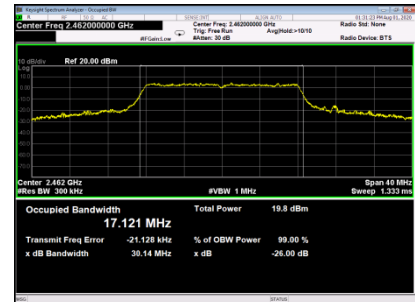


TX N (HT20) Mode


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	17.08	17.884	500	PASS
06	2437	17.03	17.928	500	PASS
11	2462	16.96	17.984	500	PASS

6dB


CH01

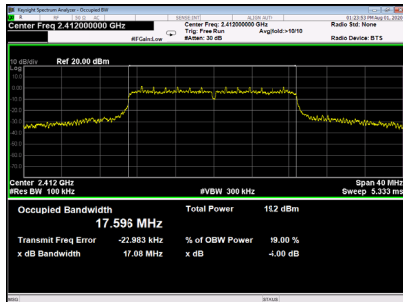

CH06

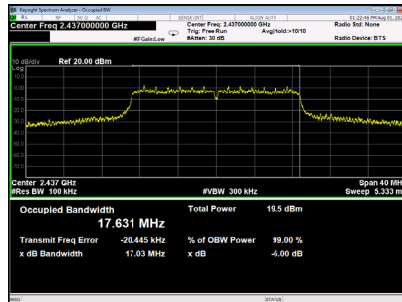


CH11

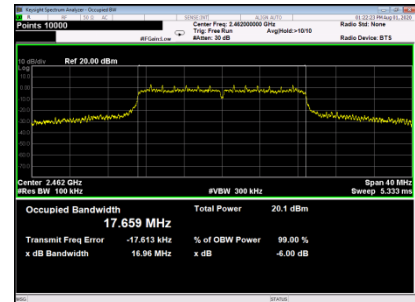


99%


CH01

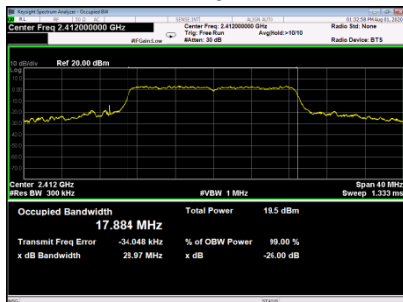

CH06

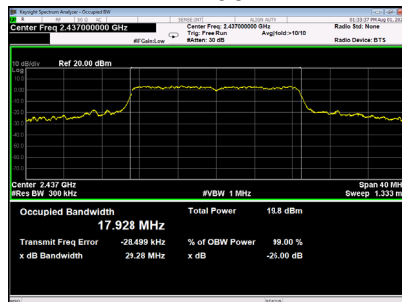

CH11

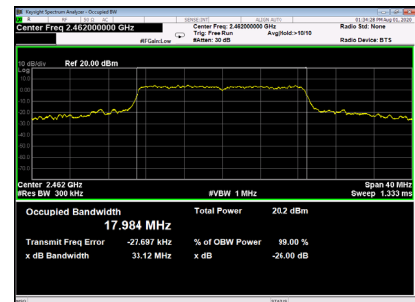


TX N (HT40) Mode


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
03	2422	35.47	36.979	500	PASS
06	2437	35.47	36.944	500	PASS
09	2452	35.47	36.899	500	PASS

6dB


CH03

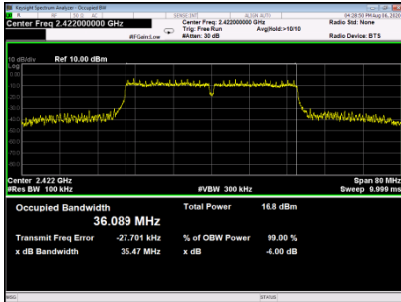

CH06

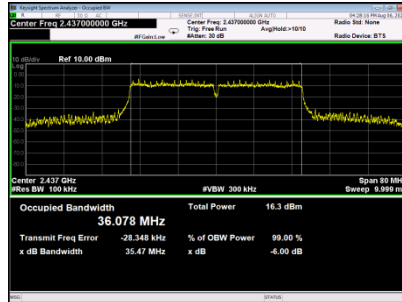


CH09

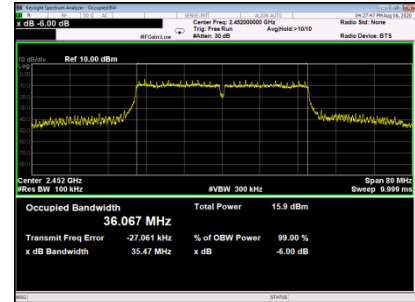


99%


CH03

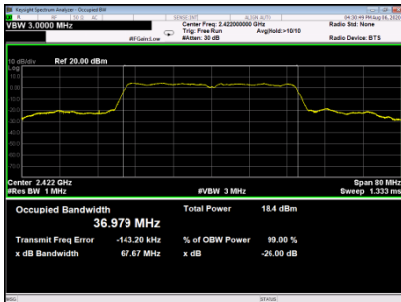

CH06

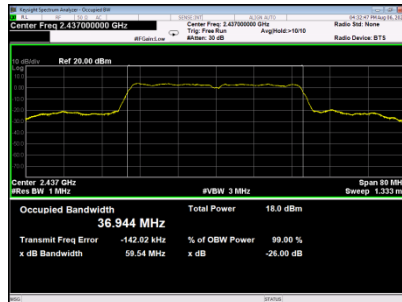

CH9

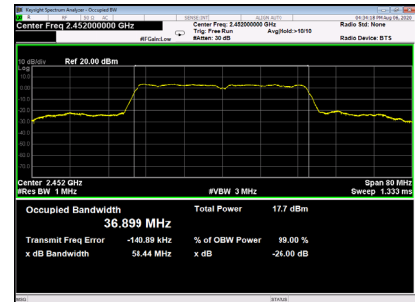

7. MAXIMUM OUTPUT POWER TEST

7.1 LIMIT

FCC Part15, Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(b)(3) RSS-2475.4 (d)	Maximum Output Power	1 Watt or 30dBm


7.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.1.3 of ANSI C63.10-2013.and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Power Sensor	KEYSIGHT	U2021XA	MY55240009	05/24/2021
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Micable	C10-01-01-1	100309	N/A
4	Test Software	KEYSIGHT	Power Panel	V3.11	N/A

7.4 TEST SETUP

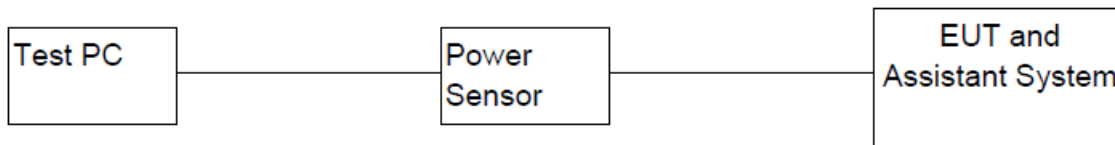

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TESTRESULTS

TX B Mode				
Channel	Frequency (MHz)	PK Output Power (dBm)	Output Power (W)	Result
01	2412	14.25	0.0266	PASS
06	2437	14.27	0.0267	PASS
11	2462	14.08	0.0256	PASS
Limit	30dBm / 1W			

TX G Mode				
Channel	Frequency (MHz)	PK Output Power (dBm)	Output Power (W)	Result
01	2412	19.44	0.0879	PASS
06	2437	20.06	0.1014	PASS
11	2462	20.46	0.1112	PASS
Limit	30dBm / 1W			

TX N (HT20)				
Channel	Frequency (MHz)	PK Output Power (dBm)	Output Power (W)	Result
01	2412	19.18	0.0828	PASS
06	2437	19.68	0.0929	PASS
11	2462	19.99	0.0998	PASS
Limit	30dBm / 1W			

TX N (HT40)				
Channel	Frequency (MHz)	PK Output Power (dBm)	Output Power (W)	Result
03	2422	16.24	0.0421	PASS
06	2437	15.95	0.0394	PASS
09	2452	15.66	0.0368	PASS
Limit	30dBm / 1W			

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

For FCC

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

For ISSED

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

8.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2021/05/24
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

8.4 TEST SETUP




8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TESTRESULTS

TX B Mode

Bandedge-CH01

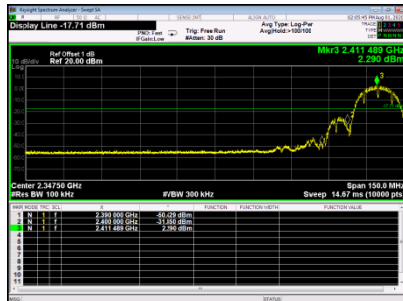


Bandedge-CH11




10th Harmonic of the fundamental frequency


CH01

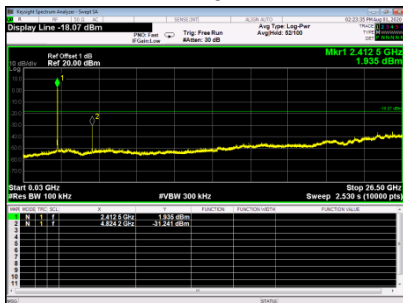

CH06

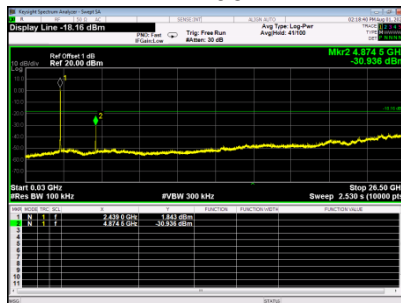

CH11

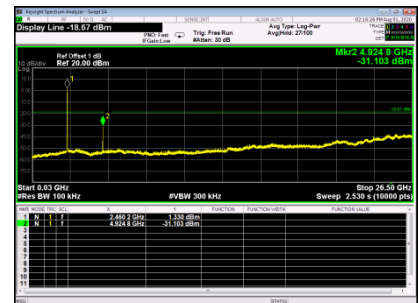

TX G Mode

Bandedge-CH01



Bandedge-CH11



10th Harmonic of the fundamental frequency

CH01



CH06




CH11



TX N (HT20) Mode

Bandedge-CH01

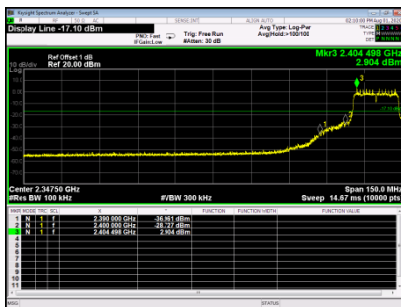

Bandedge-CH11




10th Harmonic of the fundamental frequency


CH01



CH06

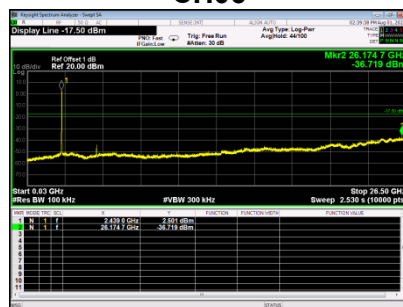


CH11

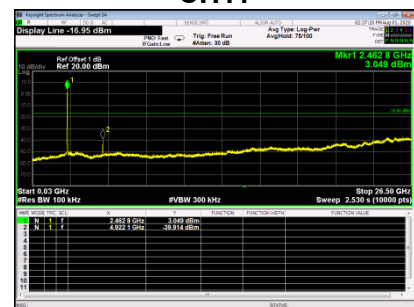


TX N (HT40) Mode

Bandedge-CH03

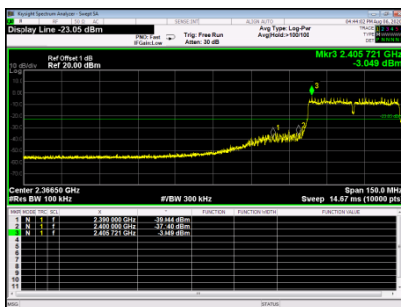


Bandedge-CH09

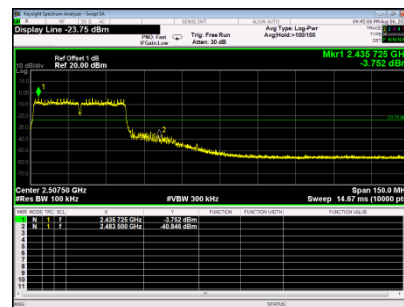


10th Harmonic of the fundamental frequency


CH03

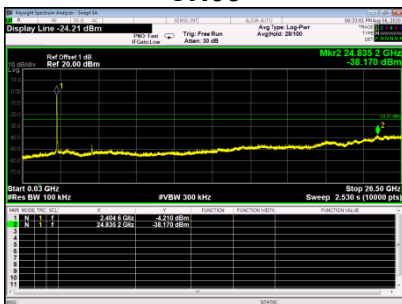

CH06

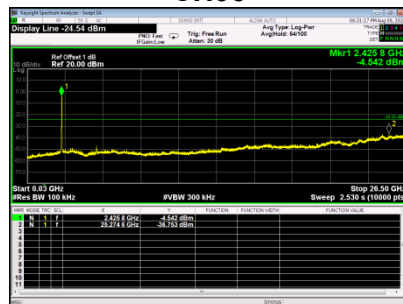

CH09

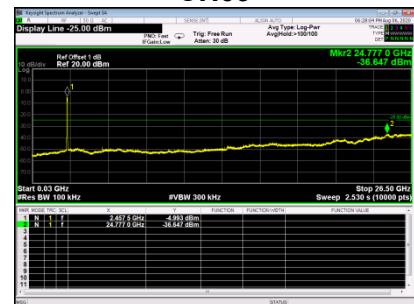

9. POWER SPECTRAL DENSITY TEST

9.1 LIMIT

FCC Part15, Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(e) RSS-2475.2 (b)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method11.10.2 of ANSI C63.10-2013.

9.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2021/05/24
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TESTRESULTS

TX B Mode				
Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-11.961	8	PASS
06	2437	-12.089	8	PASS
11	2462	-12.006	8	PASS


CH01

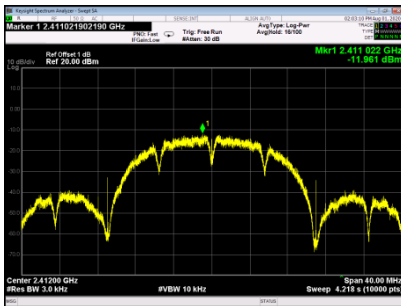

CH06

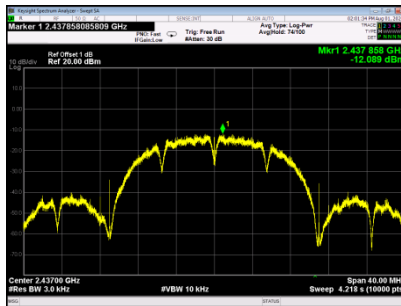


CH11

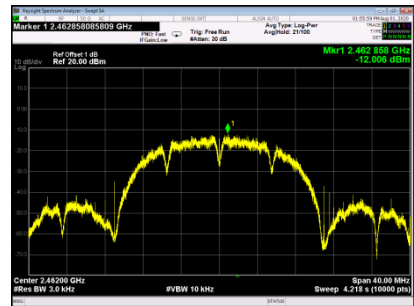


TX G Mode				
Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-11.159	8	PASS
06	2437	-10.903	8	PASS
11	2462	-10.814	8	PASS


CH01

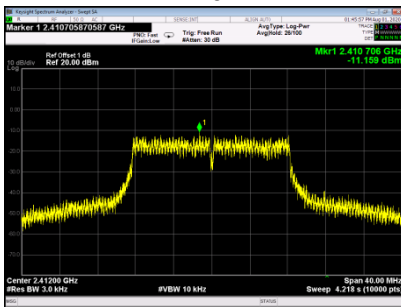

CH06

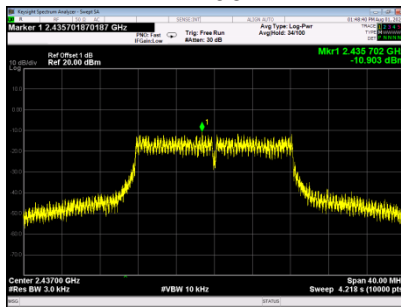


CH11

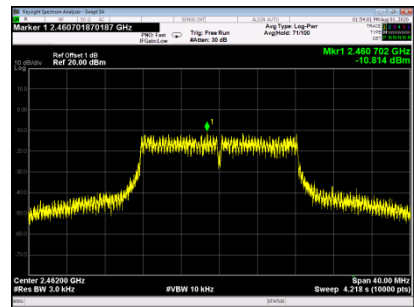


TX N (HT20) Mode

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-12.080	8	PASS
06	2437	-11.718	8	PASS
11	2462	-11.115	8	PASS


CH01

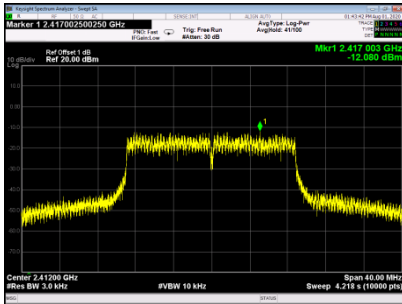

CH06

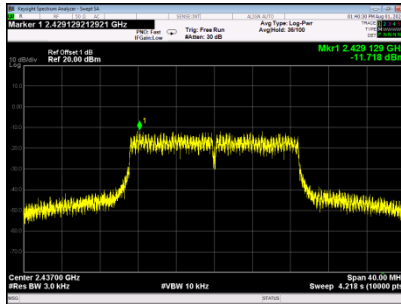


CH11

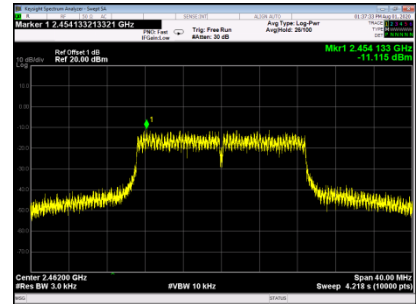


TX N (HT40) Mode

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
03	2412	-16.150	8	PASS
06	2437	-16.619	8	PASS
09	2452	-17.045	8	PASS


CH03

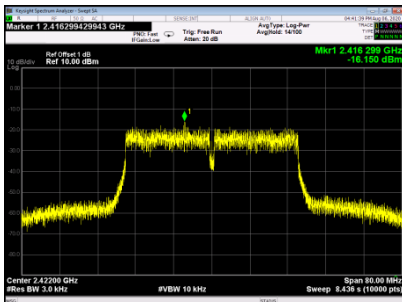

CH06

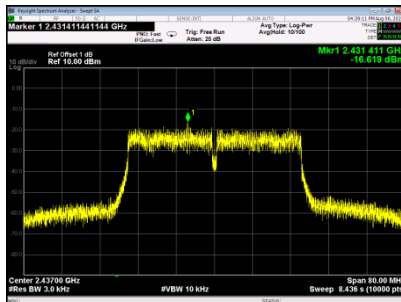

CH09

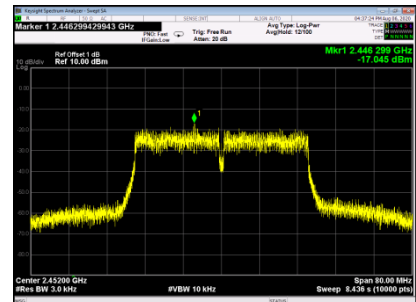

10. FREQUENCY STABILITY MEASUREMENT

10.1 LIMIT

RSS-Gen			
Section	Test Item	Limit	Frequency Range (MHz)
RSS-Gen 6.11	Frequency Stability	Specified in the user's manual	2412-2462

10.2 TEST PROCEDURE AND SETTING


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10kHz
Sweep Time	Auto

10.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2021/05/24
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A
4	Temperature conditioning	Guan Jian.HTH1000	-20-130°C	GJ1000-10D001	N/A
5	DC Power Supply	G.KE	IPR-10010D	010931954	N/A

10.4 TEST SETUP

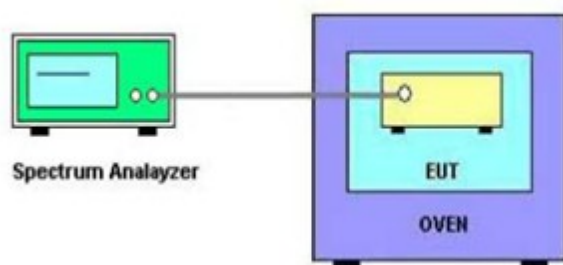

10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULTS

	Temperature vs. Frequency Stability	
Voltage	Temperature	Measurement Frequency (MHz)
120V	(°C)	2412
	-20	2411.948
	25	2411.945
	50	2411.951
90V	25	2411.946
Max. Deviation (MHz)		-0.055
Max. Deviation (ppm)		22.80

Note: 90V is the end point voltage, and products below 90V will cease working.

END OF TEST REPORT