

S

T

S

L

A

B



FCC SAR TEST REPORT

Report No.: STS2111153H01

Issued for

Excellus Communications, LLC

27298 Wetland Road, Suite 101 Harrisburg, SD 57032 USA


Product Name:	4G senior phone
Brand Name:	Snapfon
Model Name:	Snapfon ezFlip 4G v1.1
Series Model:	N/A
FCC ID:	2AW56-EZFLIP2
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report	Head: 0.455W/kg
SAR (1g):	Body: 0.912 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





Test Report Certification

Applicant's name : Excellus Communications, LLC
Address : 27298 Wetland Road, Suite 101 Harrisburg, SD 57032 USA
Manufacturer's Name : Ying Tai Electronics Co., Ltd
Address : ROOM 803, CHEVALIER HOUSE 45-51 CHATHAM ROAD
SOUTH, TSIM SHA TSUI, KOWLOON, HONG KONG

Product description

Product name : 4G senior phone
Brand name : Snapfon
Model name : Snapfon ezFlip 4G v1.1
Series Model..... : N/A

Standards : ANSI/IEEE Std. C95.1-1992
FCC 47 CFR Part 2 (2.1093)
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test..... :

Date (s) of performance of tests..... : 27 Nov. 2021 ~ 15 Dec. 2021

Date of Issue..... : 31 Dec. 2021

Test Result..... : **Pass**

Testing Engineer :

(Shifan. Lon)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	15
5.1 Validation System	15
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Antenna Location Sketch	17
7.1 SAR test exclusion consider table	18
8. EUT Test Position	23
8.1 Define Two Imaginary Lines on the Handset	23
8.2 Hotspot mode exposure position condition	24
9. Uncertainty	25
10. Conducted Power Measurement	26
10.1 Test Result	26
11. EUT and Test Setup Photo	44
11.1 EUT Photo	44
11.2 Setup Photo	48
12. SAR Result Summary	54
12.1 Head SAR	54
12.2 Body-worn and Hotspot SAR	57
12.3 repeated SAR measurement	61
13. Equipment List	65
Appendix A. System Validation Plots	66
Appendix B. SAR Test Plots	82
Appendix C. Probe Calibration and Dipole Calibration Report	110

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	31 Dec. 2021	STS2111153H01	ALL	Initial Issue





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	4G senior phone			
Brand Name	Snapfon			
Model Name	Snapfon ezFlip 4G v1.1			
Series Model	N/A			
Model Difference	N/A			
Battery	Rated Voltage: 3.7V Charge Limit Voltage: 4.2V Capacity: 1500mAh			
Device Category	Portable			
Product stage	Production unit			
RF Exposure Environment	General Population / Uncontrolled			
IMEI	358293089991441			
Hardware Version	P31-MB-V1.2			
Software Version	Snapfon_ezFlip_V2.0_20210929_1457			
Frequency Range	GSM 850: 824 MHz ~ 849 MHz PCS1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1700 MHz ~ 1780 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 820 MHz ~ 850 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN802.11b/g/n20: 2412 MHz ~ 2462 MHz WLAN802.11n40: 2422 MHz ~ 2452 MHz WLAN 802.11n20/n40: 5150 ~ 5250 MHz WLAN 802.11n20/n40: 5250 ~ 5350 MHz WLAN 802.11n20/n40:5470 ~ 5725 MHz WLAN 802.11n20/n40: 5725 ~ 5850 MHz Bluetooth: 2402 MHz to 2480 MHz			
Max. Reported SAR(1g): (Limit:1.6W/kg)	Band	Mode	Head (W/kg)	Body Worn and Hotspot(W/kg)
	PCE	GSM 850	0.455	0.492
	PCE	GSM 1900	0.124	0.400
	PCE	WCDMA Band II	0.234	0.577
	PCE	WCDMA Band IV	0.103	0.826
	PCE	WCDMA Band V	0.213	0.296
	PCE	LTE Band 2	0.288	0.723
	PCE	LTE Band 4	0.190	0.858
	PCE	LTE Band 5	0.236	0.185
	PCE	LTE Band 12	0.193	0.097



	PCE	LTE Band 66	0.227	0.912
	DTS	2.4G WLAN	0.384	0.108
	DTS	5.2G WLAN	0.160	0.080
	DTS	5.3G WLAN	0.085	0.026
	DTS	5.6G WLAN	0.188	0.188
	DTS	5.8G WLAN	0.142	0.080
	DSS	Bluetooth ^{Note}	0.105	0.105
1-g Sum SAR			0.839	1.099
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS)			
Operating Mode:	GSM: GSM Voice; GPRS Class 12 WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM WLAN: 802.11 a/b/g/n20/n40 Bluetooth:(GFSK + π /4DQPSK+8DPSK)			
Antenna Specification:	GSM/WCDMA/LTE: PIFA Antenna Bluetooth: PIFA Antenna WLAN: PIFA Antenna			
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time			
Hotspot Mode	Support			
DTM Mode	Not Support			
Note: 1. Bluetooth and 5.6wifi SAR was estimated 2. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active) 3. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests. 4. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power				



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

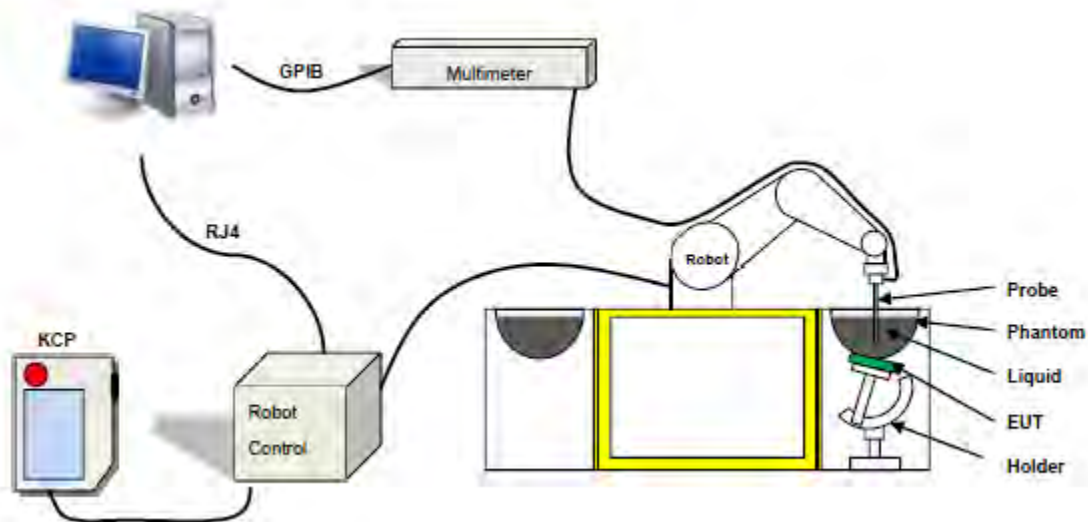

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 07/21 EPGO352 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 150 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

4. Tissue Simulating Liquids



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Head Tissue

Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

Body Tissue

Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS**

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency	Temp. [°C]					
2021/11/27	22.4	44	711 MHz	22.1	Permittivity	42.11	42.24	0.31	±5
					Conductivity	0.89	0.91	2.25	±5
2021/11/27	21.1	43	750 MHz	20.8	Permittivity	41.9	41.66	-0.57	±5
					Conductivity	0.89	0.87	-2.25	±5
2021/11/27	23.3	47	824.2 MHz	23.0	Permittivity	41.55	40.25	-3.13	±5
					Conductivity	0.9	0.93	3.33	±5
2021/11/27	21.9	48	826.4 MHz	21.6	Permittivity	41.54	41.20	-0.82	±5
					Conductivity	0.9	0.91	1.11	±5
2021/11/27	21.5	51	835 MHz	21.2	Permittivity	41.5	42.18	1.64	±5
					Conductivity	0.9	0.92	2.22	±5
2021/11/27	21.4	60	836.6 MHz	21.0	Permittivity	41.5	42.27	1.86	±5
					Conductivity	0.9	0.92	2.22	±5
2021/11/27	21.1	57	844 MHz	20.7	Permittivity	41.5	41.96	1.11	±5
					Conductivity	0.91	0.89	-2.20	±5
2021/11/27	20.1	40	848.8 MHz	19.8	Permittivity	41.5	41.35	-0.36	±5
					Conductivity	0.9	0.89	-1.11	±5
2021/11/28	22.9	49	1712.6 MHz	22.6	Permittivity	40.12	40.25	0.32	±5
					Conductivity	1.35	1.36	0.74	±5
2021/11/28	22.1	57	1720 MHz	21.8	Permittivity	40.11	39.04	-2.67	±5
					Conductivity	1.35	1.39	2.96	±5
2021/11/28	23.7	58	1732.5 MHz	23.5	Permittivity	40.1	39.15	-2.37	±5
					Conductivity	1.36	1.39	2.21	±5
2021/11/28	21.7	45	1740 MHz	21.3	Permittivity	40.09	41.28	2.97	±5
					Conductivity	1.37	1.40	2.19	±5
2021/11/28	21.3	48	1745 MHz	21.1	Permittivity	40.08	40.85	1.92	±5
					Conductivity	1.37	1.32	-3.65	±5
2021/11/28	21.0	57	1752.4 MHz	20.7	Permittivity	40.07	39.74	-0.82	±5
					Conductivity	1.37	1.38	0.73	±5
2021/11/28	21.2	53	1755 MHz	20.9	Permittivity	40.06	40.49	1.07	±5
					Conductivity	1.37	1.39	1.46	±5
2021/11/28	21.3	49	1770 MHz	21.0	Permittivity	40.04	38.97	-2.67	±5
					Conductivity	1.38	1.37	-0.72	±5




2021/11/28	20.4	40	1800 MHz	20.0	Permittivity	40	39.97	-0.08	±5
					Conductivity	1.4	1.42	1.43	±5
2021/11/28	20.4	47	1880 MHz	20.2	Permittivity	40	39.35	-1.63	±5
					Conductivity	1.4	1.45	3.57	±5
2021/12/10	23.8	59	1900 MHz	23.5	Permittivity	40	40.67	1.68	±5
					Conductivity	1.4	1.43	2.14	±5
2021/12/10	22.9	40	1907.4 MHz	22.5	Permittivity	40	40.23	0.57	±5
					Conductivity	1.4	1.40	0.00	±5
2021/12/11	24.0	42	2450 MHz	23.7	Permittivity	39.2	39.50	0.77	±5
					Conductivity	1.8	1.81	0.56	±5
2021/12/11	22.5	43	2462 MHz	22.2	Permittivity	39.18	38.47	-1.81	±5
					Conductivity	1.81	1.75	-3.31	±5
2021/12/12	21.9	44	5180 MHz	21.6	Permittivity	36.02	35.79	-0.64	±5
					Conductivity	4.64	4.52	-2.59	±5
2021/12/12	23.1	57	5200 MHz	22.8	Permittivity	36	34.99	-2.81	±5
					Conductivity	4.66	4.51	-3.22	±5
2021/12/13	22.3	53	5260 MHz	22.0	Permittivity	35.94	35.78	-0.45	±5
					Conductivity	4.72	4.73	0.21	±5
2021/12/13	21.3	46	5300 MHz	21.0	Permittivity	35.9	37.08	3.29	±5
					Conductivity	4.76	4.76	0.00	±5
2021/12/14	21.2	53	5600 MHz	20.9	Permittivity	35.55	35.53	-0.06	±5
					Conductivity	5.07	5.04	-0.59	±5
2021/12/14	21.2	59	5700 MHz	20.8	Permittivity	35.43	35.67	0.68	±5
					Conductivity	5.17	5.13	-0.77	±5
2021/12/15	21.7	58	5800MHz	21.3	Permittivity	35.3	35.54	0.68	±5
					Conductivity	5.27	5.15	-2.28	±5
2021/12/15	20.3	55	5825MHz	19.9	Permittivity	35.28	34.78	-1.42	±5
					Conductivity	5.3	5.27	-0.57	±5

5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

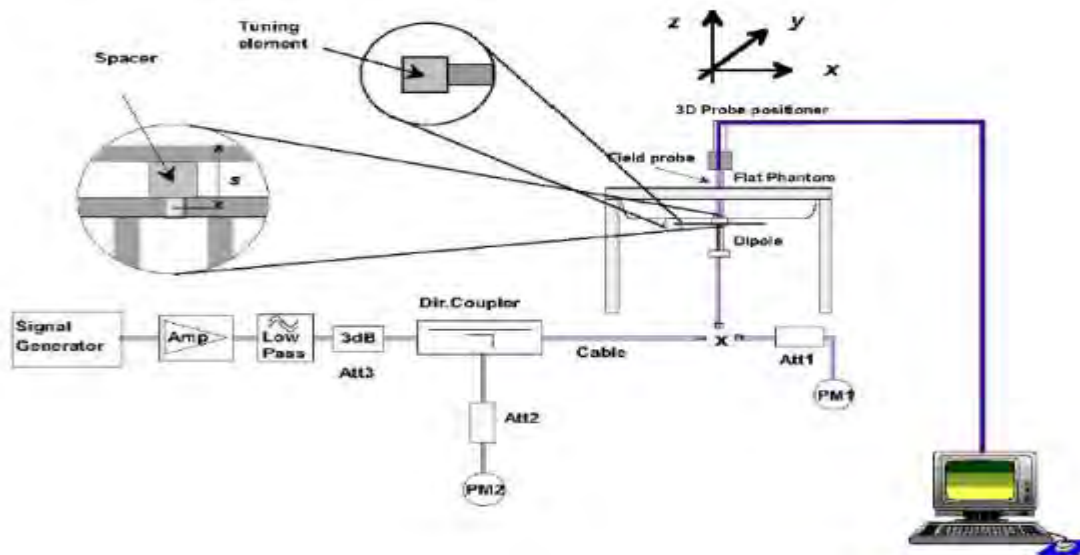

5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Date	Freq. (MHz)	Power (mW)	Tested Value (W/Kg)	Normalized SAR (W/kg)	Target SAR 1g(W/kg)	Tolerance (%)	Limit (%)
2021/11/27	750	100	0.857	8.57	8.49	0.94	10
2021/11/27	835	100	0.954	9.54	9.56	-0.21	10
2021/11/28	1800	100	3.769	37.69	38.40	-1.85	10
2021/12/10	1900	100	3.939	39.39	39.70	-0.78	10
2021/12/11	2450	100	5.461	54.61	52.40	4.22	10
2021/12/12	5200	100	15.821	158.21	159.00	-0.50	10
2021/12/13	5300	100	17.012	170.12	166.40	2.24	10
2021/12/14	5600	100	17.605	176.05	173.80	1.29	10
2021/12/15	5800	100	18.230	182.30	181.20	0.61	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position


- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below. When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a 4G senior phone, support GSM/WCDMA/LTE/WLAN/BT mode.

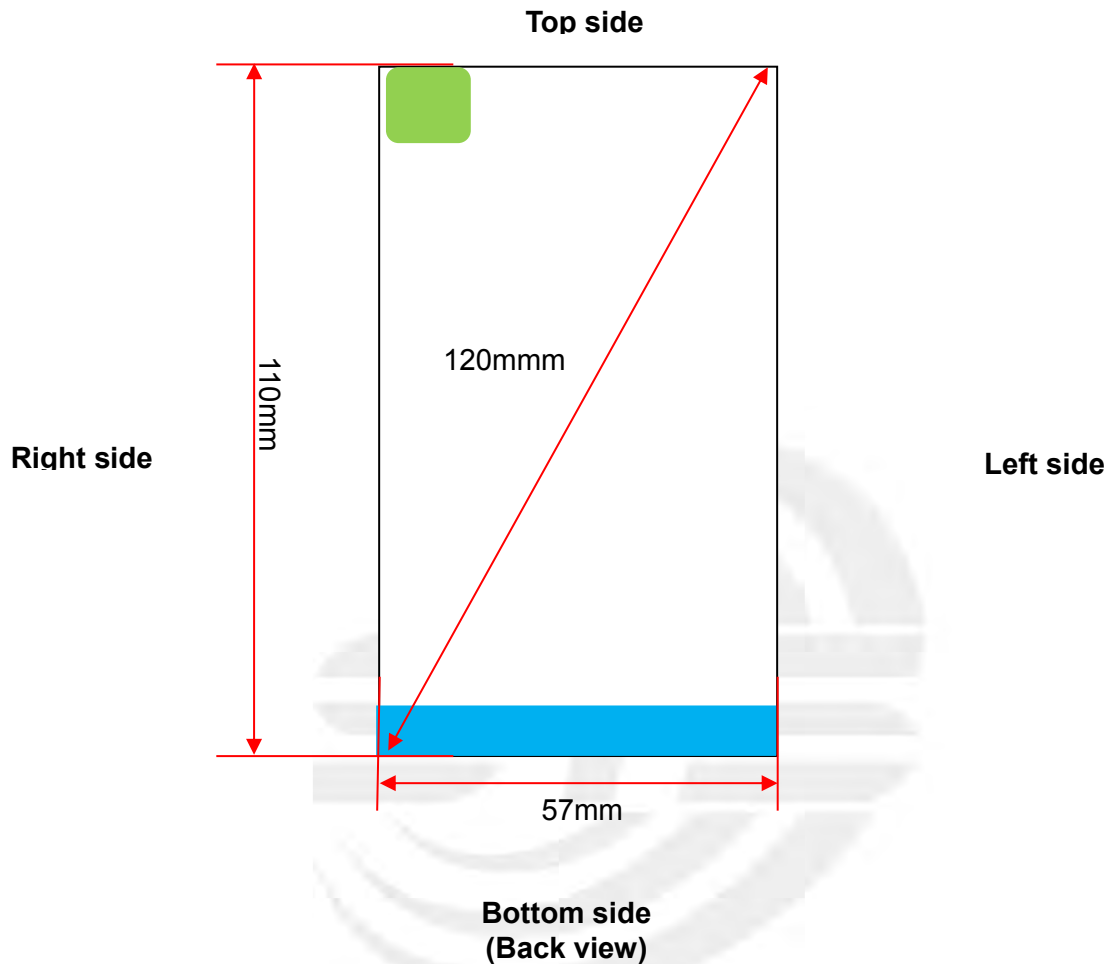

	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN	42	≤5	≤5	80
WLAN/BT	≤5	≤5	95	≤5

 WWAN Antenna

 WLAN/BT Antenna

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	GSM850	PCS1900	WCDMA II	WCDMA IV
	Calculated Frequency	848.8	1880	1907.4	1752.4
	Maximum Turn-up power (dBm)	33.1	29.6	23.2	23.2
	Maximum rated power(mW)	2041.74	912.01	208.93	208.93
Back Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.28	10.94	10.86	11.33
	Testing required?	YES	YES	YES	YES
Front Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.28	10.94	10.86	11.33
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.28	10.94	10.86	11.33
	Testing required?	YES	YES	YES	YES
Right Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.28	10.94	10.86	11.33
	Testing required?	YES	YES	YES	YES
Top Edge	Separation distance (mm)	95	95	95	95
	exclusion threshold(mW)	417.45	559.40	558.61	563.31
	Testing required?	YES	YES	NO	NO
Bottom Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.28	10.94	10.86	11.33
	Testing required?	YES	YES	YES	YES



Exposure Position	Wireless Interface	WCDMA V	LTE Band 2	LTE Band 4	LTE Band 5
	Calculated Frequency	826.4	1900	1745	844
	Maximum Turn-up power (dBm)	24	24	25	24.5
	Maximum rated power(mW)	251.19	251.19	316.23	281.84
Back Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.50	10.88	11.36	16.33
	Testing required?	YES	YES	YES	YES
Front Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.50	10.88	11.36	16.33
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.50	10.88	11.36	16.33
	Testing required?	YES	YES	YES	YES
Right Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.50	10.88	11.36	16.33
	Testing required?	YES	YES	YES	YES
Top Edge	Separation distance (mm)	95	95	95	95
	exclusion threshold(mW)	412.92	558.82	563.55	416.48
	Testing required?	NO	NO	NO	NO
Bottom Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	16.50	10.88	11.36	16.33
	Testing required?	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 12	LTE Band 66	BT	2.4G WLAN
	Calculated Frequency	711	1770	2402	2462
	Maximum Turn-up power (dBm)	24	24.5	4.5	11
	Maximum rated power(mW)	251.19	281.84	2.82	12.59
Back Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	17.79	11.27	9.68	9.56
	Testing required?	YES	YES	NO	YES
Front Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	17.79	11.27	9.68	9.56
	Testing required?	YES	YES	NO	YES
Left Edge	Separation distance (mm)	≤5	≤5	42	42
	exclusion threshold(mW)	17.79	11.27	81.30	80.30
	Testing required?	YES	YES	NO	NO
Right Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	17.79	11.27	9.68	9.56
	Testing required?	YES	YES	NO	YES
Top Edge	Separation distance (mm)	95	95	≤5	≤5
	exclusion threshold(mW)	391.19	562.75	9.68	9.56
	Testing required?	NO	NO	NO	YES
Bottom Edge	Separation distance (mm)	≤5	≤5	80	80
	exclusion threshold(mW)	17.79	11.27	396.78	395.60
	Testing required?	YES	YES	NO	NO



Exposure Position	Wireless Interface	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN
	Calculated Frequency	5180	5260	5700	5825
	Maximum Turn-up power (dBm)	10.5	8.5	6.5	9
	Maximum rated power(mW)	11.22	7.08	4.47	7.94
Back Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	6.59	6.54	6.28	6.22
	Testing required?	YES	YES	NO	YES
Front Side	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	6.59	6.54	6.28	6.22
	Testing required?	YES	YES	NO	YES
Left Edge	Separation distance (mm)	42	42	42	42
	exclusion threshold(mW)	55.36	54.94	52.78	52.21
	Testing required?	NO	NO	NO	NO
Right Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	6.59	6.54	6.28	6.22
	Testing required?	YES	YES	NO	YES
Top Edge	Separation distance (mm)	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	6.59	6.54	6.28	6.22
	Testing required?	YES	YES	NO	YES
Bottom Edge	Separation distance (mm)	80	80	80	80
	exclusion threshold(mW)	365.91	365.40	362.83	362.15
	Testing required?	NO	NO	NO	NO

**Note:**

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm, 25mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:
$$[(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, } f(\text{GHz}) \text{ is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation.}$$

The result is rounded to one decimal place for comparison

For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a) [threshold at 50mm in step 1] + (test separation distance - 50mm) * (f (MHz)/150)]mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step1] + (test separation distance - 50mm) * 10]mW at > 1500MHz and $\leq 6\text{GHz}$
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.

8. EUT Test Position


This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

8.1 Define Two Imaginary Lines on the Handset

(1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.

(2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.


(3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

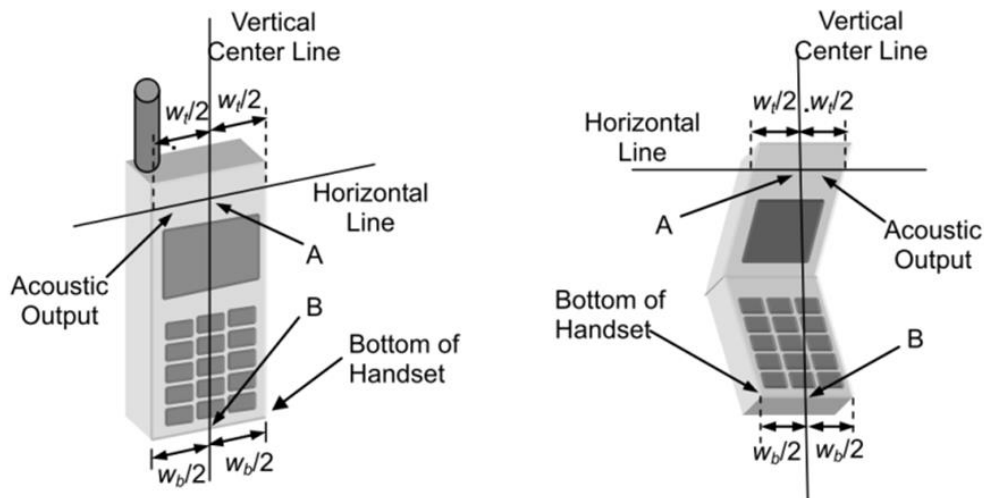

Cheek Position


1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

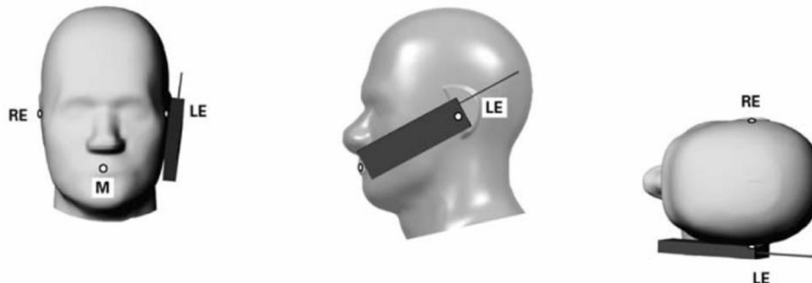


Title Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

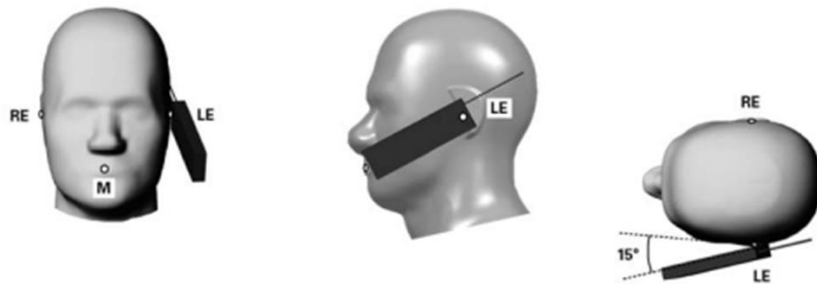


Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

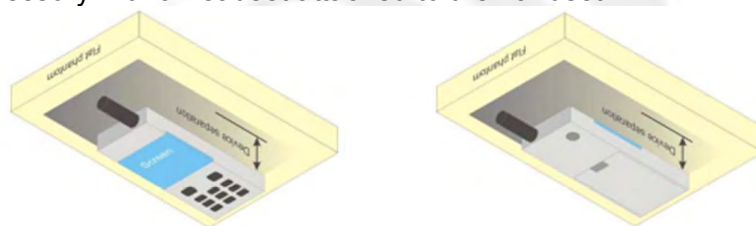

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

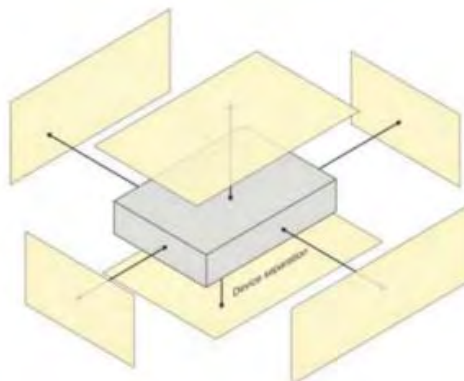



9. Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty Component	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/-%)	10g Ui (+/-%)	v_i
Measurement System								
Probe calibration	5.86	N	1	1	1	5.86	5.86	∞
Axial Isotropy	0.16	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.07	0.07	∞
Hemispherical Isotropy	1.06	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	1.27	R	$\sqrt{3}$	1	1	0.73	0.73	∞
System detection limits	1.23	R	$\sqrt{3}$	1	1	0.71	0.71	∞
Modulation response	3.6	R	$\sqrt{3}$	1	1	3.60	3.60	∞
Readout Electronics	0.28	N	1	1	1	0.28	0.28	∞
Response Time	0.19	R	$\sqrt{3}$	1	1	0.11	0.11	∞
Integration Time	1.47	R	$\sqrt{3}$	1	1	0.85	0.85	∞
RF ambient conditions- Noise	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	∞
RF ambient conditions- reflections	3.2	R	$\sqrt{3}$	1	1	1.85	1.85	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	3.1	N	1	1	1	3.10	3.10	∞
Device holder uncertainty	3.8	N	1	1	1	3.80	3.80	∞
SAR drift measurement	4.8	R	$\sqrt{3}$	1	1	2.77	2.77	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.95	1.78	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	0.92	1.04	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	1.95	1.78	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				10.60	10.51	
Expanded Uncertainty (95% Confidence interval)		K=2				21.21	21.03	



10. Conducted Power Measurement

10.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM(GMSK, 1-Slot)	32.89	33.05	33.04	29.43	29.51	29.65
GPRS (GMSK, 1-Slot)	32.83	32.99	33.00	29.42	29.51	29.18
GPRS (GMSK, 2-Slot)	32.35	32.51	32.51	28.93	29.09	28.70
GPRS (GMSK, 3-Slot)	31.85	32.03	32.09	28.52	28.69	28.28
GPRS (GMSK, 4-Slot)	31.39	31.59	31.60	28.10	28.24	28.10
Remark: GPRS, CS4 coding scheme. Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link						

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM(GMSK, 1-Slot)	23.86	24.02	24.01	20.40	20.48	20.62
GPRS (GMSK, 1-Slot)	23.80	23.96	23.97	20.39	20.48	20.15
GPRS (GMSK, 2-Slot)	26.33	26.49	26.49	22.91	23.07	22.68
GPRS (GMSK, 3-Slot)	27.59	27.77	27.83	24.26	24.43	24.02
GPRS (GMSK, 4-Slot)	28.38	28.58	28.59	25.09	25.23	25.09
Remark : 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum Burst - averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB						

**WCDMA**

Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V		
Channel	9262	9400	9538	1313	1450	1512	4133	4175	4323
Frequency (MHz)	1852.4	1880	1907.4	1712.6	1740	1752.4	826.4	836.6	846.4
RMC 12.2Kbps	22.55	22.79	23.13	22.68	23.14	23.15	23.99	22.92	23.13
HSDPA Subtest-1	22.51	22.67	23.08	22.41	24.04	22.57	22.82	22.48	23.87
HSDPA Subtest-2	22.04	22.27	22.64	21.97	23.61	22.14	22.42	22.04	23.45
HSDPA Subtest-3	21.71	21.85	22.33	21.55	23.21	21.73	22.12	21.56	23.12
HSDPA Subtest-4	21.23	21.35	21.96	21.10	22.77	21.37	21.81	21.23	22.73
HSUPA Subtest-1	23.05	22.55	21.97	22.47	22.67	21.81	22.72	22.27	23.76
HSUPA Subtest-2	22.22	21.60	21.05	21.62	21.73	20.81	21.89	21.33	22.83
HSUPA Subtest-3	22.05	21.18	20.60	21.42	21.30	20.36	21.81	20.90	22.47
HSUPA Subtest-4	21.73	20.79	20.24	20.98	20.96	20.02	21.42	20.57	22.04
HSUPA Subtest-5	20.26	19.36	18.75	19.49	19.49	18.54	20.02	19.11	20.64

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**2.4G WLAN**

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
802.11b	1	2412	10.63	11.56
	7	2437	10.83	12.11
	11	2462	10.93	12.39
802.11g	1	2412	10.17	10.40
	7	2437	10.73	11.83
	11	2462	10.18	10.42
802.11 n-HT20	1	2412	10.48	11.17
	7	2437	10.19	10.45
	11	2462	9.94	9.86
802.11 n-HT40	3	2422	9.98	9.95
	6	2437	9.91	9.79
	9	2452	10.05	10.12

Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	4.10	2.57
	39	2441	2.88	1.94
	78	2480	3.50	2.24
$\pi/4$ -QPSK(2Mbps)	0	2402	1.56	1.43
	39	2441	0.60	1.15
	78	2480	1.09	1.29
8DPSK(3Mbps)	0	2402	1.51	1.42
	39	2441	0.59	1.15
	78	2480	1.08	1.28

BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Average Power	Output Power
GFSK(1Mbps)	0	2402	3.88	2.44
	19	2440	2.44	1.75
	39	2480	3.35	2.16

**5.2G WIFI**

5.2G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11 n-HT20	36	5180	10.4	10.96
	40	5200	10.04	10.09
	48	5240	8.46	7.01
802.11 n-HT40	38	5190	9.6	9.12
	46	5230	8.92	7.80

5.3G WIFI

5.3G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11 n-HT20	52	5260	8.12	6.49
	60	5300	6.40	4.37
	64	5320	5.53	3.57
802.11 n-HT40	54	5270	7.38	5.47
	62	5310	6.21	4.18

5.6G WIFI

5.6G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11 n-HT20	100	5500	3.66	2.32
	116	5580	3.90	2.45
	140	5700	6.10	4.07
802.11 n-HT40	102	5510	3.70	2.34
	110	5550	3.79	2.39
	134	5670	5.17	3.29

5.8G WIFI

5.8G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11 n-HT20	149	5745	6.53	4.50
	157	5785	7.64	5.81
	165	5825	8.62	7.28
802.11 n-HT40	151	5755	6.75	4.73
	159	5795	7.76	5.97



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.99	23.02	23.12
1.4	1	2		22.82	23	23.07
1.4	1	5		22.74	22.94	23.04
1.4	3	0		22.67	22.89	22.85
1.4	3	1		22.65	22.83	22.73
1.4	3	2		22.49	22.65	22.65
1.4	6	0		22.37	22.62	22.58
1.4	1	0	16-QAM	22.81	22.86	23.11
1.4	1	2		22.67	22.84	22.97
1.4	1	5		22.7	22.84	22.89
1.4	3	0		22.54	22.86	22.71
1.4	3	1		22.45	22.65	22.71
1.4	3	2		22.37	22.53	22.53
1.4	6	0		22.22	22.56	22.4
3	1	0	QPSK	23.29	23.45	23.52
3	1	7		23.28	23.43	23.35
3	1	14		23.11	23.37	23.19
3	8	0		23	23.24	23.17
3	8	4		22.88	23.15	23.07
3	8	7		22.7	23.1	22.98
3	15	0		22.66	23.01	22.81
3	1	0	16-QAM	23.13	23.32	23.46
3	1	7		23.14	23.35	23.22
3	1	14		22.99	23.19	23.05
3	8	0		22.93	23.07	23.02
3	8	4		22.77	22.98	23.02
3	8	7		22.66	22.95	22.9
3	15	0		22.48	22.89	22.62



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.35	23.55	23.59
5	1	12		23.28	23.52	23.54
5	1	24		23.09	23.36	23.35
5	12	0		22.95	23.28	23.18
5	12	6		22.81	23.26	23.09
5	12	11		22.75	23.22	23.08
5	25	0		22.74	23.06	22.93
5	1	0	16-QAM	23.2	23.52	23.52
5	1	12		23.16	23.43	23.37
5	1	24		23	23.21	23.26
5	12	0		22.95	23.1	23.07
5	12	6		22.68	23.15	23.04
5	12	11		22.67	23.04	23.08
5	25	0		22.56	22.88	22.75
10	1	0	QPSK	23.56	23.62	23.63
10	1	24		23.43	23.48	23.46
10	1	49		23.26	23.37	23.39
10	25	0		23.07	23.34	23.25
10	25	12		22.97	23.21	23.08
10	25	24		22.81	23.15	23.05
10	50	0		22.68	23.03	23.03
10	1	0	16-QAM	23.53	23.6	23.56
10	1	24		23.43	23.43	23.39
10	1	49		23.08	23.24	23.23
10	25	0		22.88	23.16	23.11
10	25	12		22.94	23.21	23.04
10	25	24		22.63	22.98	22.85
10	50	0		22.67	22.87	23.01



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.65	23.68	23.72
15	1	37		23.63	23.6	23.55
15	1	74		23.49	23.43	23.44
15	36	0		23.36	23.25	23.34
15	36	18		23.2	23.19	23.28
15	36	39		23.2	23.05	23.12
15	75	0		23.18	22.99	23.04
15	1	0	16-QAM	23.48	23.62	23.66
15	1	38		23.53	23.43	23.53
15	1	75		23.37	23.41	23.26
15	36	0		23.24	23.21	23.3
15	36	18		23.19	23.03	23.27
15	36	39		23.12	22.87	22.96
15	75	0		23.15	22.92	22.88
20	1	0	QPSK	23.89	23.95	23.99
20	1	49		23.74	23.94	23.9
20	1	99		23.59	23.77	23.9
20	50	0		23.59	23.76	23.83
20	50	24		23.47	23.59	23.69
20	50	49		23.3	23.57	23.52
20	100	0		23.26	23.55	23.48
20	1	0	16-QAM	23.74	23.79	23.9
20	1	49		23.7	23.85	23.9
20	1	99		23.47	23.67	23.83
20	50	0		23.42	23.73	23.82
20	50	24		23.41	23.44	23.53
20	50	49		23.12	23.52	23.44
20	100	0		23.21	23.37	23.47



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.23	23.12	23.35
1.4	1	2		23.19	23.07	23.15
1.4	1	5		23.13	23.06	22.95
1.4	3	0		23.03	23.03	22.94
1.4	3	1		22.94	22.87	22.85
1.4	3	2		22.82	22.8	22.82
1.4	6	0		22.65	22.79	22.7
1.4	1	0	16-QAM	23.2	23.03	23.22
1.4	1	2		23.18	23.07	23.1
1.4	1	5		23.1	23.05	22.78
1.4	3	0		22.97	22.98	22.77
1.4	3	1		22.78	22.7	22.72
1.4	3	2		22.69	22.65	22.62
1.4	6	0		22.57	22.76	22.68
3	1	0	QPSK	23.22	23.26	23.34
3	1	7		23.08	23.22	23.16
3	1	14		22.94	23.18	23.03
3	8	0		22.83	23.03	22.99
3	8	4		22.65	22.86	22.91
3	8	7		22.46	22.71	22.85
3	15	0		22.3	22.69	22.73
3	1	0	16-QAM	23.11	23.19	23.26
3	1	7		22.93	23.15	22.99
3	1	14		22.94	22.99	22.95
3	8	0		22.8	22.85	22.94
3	8	4		22.62	22.7	22.78
3	8	7		22.37	22.53	22.79
3	15	0		22.11	22.57	22.65



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.32	23.39	23.45
5	1	12		23.27	23.23	23.36
5	1	24		23.25	23.06	23.3
5	12	0		23.09	22.88	23.11
5	12	6		22.89	22.77	23.07
5	12	11		22.7	22.63	22.88
5	25	0		22.69	22.49	22.73
5	1	0	16-QAM	23.2	23.23	23.33
5	1	12		23.25	23.07	23.29
5	1	24		23.21	23.03	23.21
5	12	0		23.02	22.69	22.94
5	12	6		22.75	22.77	23.01
5	12	11		22.52	22.47	22.87
5	25	0		22.5	22.41	22.71
10	1	0	QPSK	23.39	23.52	23.69
10	1	24		23.21	23.32	23.57
10	1	49		23.11	23.21	23.53
10	25	0		23.03	23.08	23.52
10	25	12		22.86	22.95	23.5
10	25	24		22.85	22.82	23.37
10	50	0		22.77	22.63	23.33
10	1	0	16-QAM	23.28	23.36	23.58
10	1	24		23.02	23.31	23.51
10	1	49		23.01	23.17	23.4
10	25	0		22.84	22.97	23.34
10	25	12		22.7	22.8	23.41
10	25	24		22.77	22.74	23.36
10	50	0		22.73	22.53	22.32



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.58	23.78	23.81
15	1	37		23.53	23.63	23.72
15	1	74		23.5	23.61	23.63
15	36	0		23.48	23.47	23.48
15	36	18		23.37	23.33	23.4
15	36	39		23.3	23.14	23.33
15	75	0		23.18	23.08	23.25
15	1	0	16-QAM	23.54	23.64	23.71
15	1	38		23.35	23.48	23.61
15	1	75		23.42	23.58	23.51
15	36	0		23.37	23.36	23.44
15	36	18		23.34	23.31	23.39
15	36	39		23.22	23.13	23.14
15	75	0		23.06	22.89	23.25
20	1	0	QPSK	24.23	24.35	24.69
20	1	49		24.16	24.31	24.5
20	1	99		24.11	24.15	24.43
20	50	0		23.95	24.05	24.32
20	50	24		23.91	23.92	24.18
20	50	49		23.79	23.72	24.08
20	100	0		23.76	23.57	23.9
20	1	0	16-QAM	24.19	24.34	24.59
20	1	49		24.08	24.13	24.42
20	1	99		24.07	24.01	24.26
20	50	0		23.84	23.88	24.32
20	50	24		23.79	23.81	24
20	50	49		23.75	23.65	23.98
20	100	0		23.57	23.38	23.9



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.68	23.75	23.79
1.4	1	2		23.67	23.61	23.74
1.4	1	5		23.6	23.47	23.63
1.4	3	0		23.55	23.28	23.45
1.4	3	1		23.47	23.21	23.41
1.4	3	2		23.45	23.2	23.4
1.4	6	0		23.31	23.17	23.26
1.4	1	0	16-QAM	23.55	23.59	23.76
1.4	1	2		23.51	23.53	23.61
1.4	1	5		23.54	23.38	23.61
1.4	3	0		23.4	23.16	23.38
1.4	3	1		23.29	23.11	23.4
1.4	3	2		23.26	23	23.23
1.4	6	0		23.22	23.15	23.1
3	1	0	QPSK	23.92	23.95	23.98
3	1	7		23.85	23.93	23.87
3	1	14		23.68	23.86	23.79
3	8	0		23.59	23.69	23.73
3	8	4		23.41	23.64	23.67
3	8	7		23.26	23.62	23.54
3	15	0		23.07	23.54	23.49
3	1	0	16-QAM	23.79	23.93	23.89
3	1	7		23.81	23.77	23.87
3	1	14		23.54	23.81	23.67
3	8	0		23.58	23.52	23.63
3	8	4		23.34	23.55	23.51
3	8	7		23.2	23.62	23.41
3	15	0		22.87	23.5	23.41



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.12	24.19	24.23
5	1	12		24.11	24.11	24.13
5	1	24		24.01	24	24.04
5	12	0		23.91	23.86	23.85
5	12	6		23.91	23.75	23.69
5	12	11		23.73	23.66	23.49
5	25	0		23.65	23.66	23.47
5	1	0	16-QAM	24.05	24.06	24.22
5	1	12		23.99	24.07	24
5	1	24		23.86	23.83	23.86
5	12	0		23.79	23.71	23.75
5	12	6		23.87	23.56	23.56
5	12	11		23.57	23.65	23.45
5	25	0		23.64	23.63	22.65
10	1	0	QPSK	24.22	24.35	24.42
10	1	24		24.08	24.19	24.37
10	1	49		23.9	24.06	24.34
10	25	0		23.88	23.88	24.26
10	25	12		23.74	23.77	24.17
10	25	24		23.62	23.63	23.97
10	50	0		23.47	23.48	23.86
10	1	0	16-QAM	24.03	24.3	24.22
10	1	24		23.95	24.17	24.26
10	1	49		23.79	24.01	24.24
10	25	0		23.74	23.82	24.24
10	25	12		23.68	23.6	24.16
10	25	24		23.48	23.49	23.92
10	50	0		23.39	23.45	23.74



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.89	22.91	22.93
1.4	1	2		22.82	22.79	22.86
1.4	1	5		22.82	22.69	22.72
1.4	3	0		22.71	22.62	22.7
1.4	3	1		22.53	22.5	22.58
1.4	3	2		22.46	22.31	22.42
1.4	6	0		22.42	22.19	22.28
1.4	1	0	16-QAM	22.71	22.87	22.88
1.4	1	2		22.64	22.72	22.85
1.4	1	5		22.75	22.64	22.59
1.4	3	0		22.65	22.48	22.68
1.4	3	1		22.43	22.34	22.41
1.4	3	2		22.42	22.18	22.38
1.4	6	0		22.25	22.01	22.1
3	1	0	QPSK	23.02	23.15	23.18
3	1	7		22.93	23	23.1
3	1	14		22.93	22.93	22.94
3	8	0		22.88	22.93	22.91
3	8	4		22.72	22.88	22.89
3	8	7		22.56	22.8	22.7
3	15	0		22.42	22.74	22.54
3	1	0	16-QAM	22.96	23.09	23.12
3	1	7		22.93	22.98	23.04
3	1	14		22.91	22.78	22.85
3	8	0		22.81	22.76	22.88
3	8	4		22.65	22.71	22.77
3	8	7		22.46	22.7	22.56
3	15	0		22.36	22.7	22.55



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.54	23.62	23.68
5	1	12		23.46	23.61	23.54
5	1	24		23.34	23.41	23.39
5	12	0		23.18	23.23	23.22
5	12	6		23.17	23.14	23.04
5	12	11		23.07	23.1	22.93
5	25	0		22.92	23.03	22.88
5	1	0	16-QAM	23.35	23.46	23.63
5	1	12		23.4	23.46	23.39
5	1	24		23.33	23.38	23.28
5	12	0		23	23.18	23.19
5	12	6		23.05	22.97	22.89
5	12	11		23.06	23	22.82
5	25	0		22.84	22.95	22.68
10	1	0	QPSK	23.85	23.89	23.95
10	1	24		23.66	23.69	23.86
10	1	49		23.49	23.65	23.78
10	25	0		23.33	23.46	23.58
10	25	12		23.31	23.38	23.42
10	25	24		23.21	23.18	23.22
10	50	0		23.12	23.11	23.15
10	1	0	16-QAM	23.82	23.78	23.95
10	1	24		23.58	23.55	23.83
10	1	49		23.33	23.57	23.68
10	25	0		23.14	23.36	23.57
10	25	12		23.29	23.23	23.4
10	25	24		23.17	23.14	23.2
10	50	0		22.95	23.06	23.11



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.28	23.32	23.35
1.4	1	2		23.25	23.21	23.21
1.4	1	5		23.24	23.11	23.19
1.4	3	0		23.18	22.92	23.01
1.4	3	1		23.04	22.74	22.86
1.4	3	2		23.01	22.73	22.67
1.4	6	0		22.94	22.56	22.53
1.4	1	0	16-QAM	23.11	23.18	23.33
1.4	1	2		23.18	23.07	23.18
1.4	1	5		23.12	23.07	23.11
1.4	3	0		23.17	22.73	22.88
1.4	3	1		22.93	22.66	22.76
1.4	3	2		22.93	22.72	22.61
1.4	6	0		22.82	22.46	22.48
3	1	0	QPSK	23.26	23.39	23.42
3	1	7		23.09	23.35	23.25
3	1	14		22.99	23.34	23.08
3	8	0		22.91	23.24	22.9
3	8	4		22.78	23.11	22.78
3	8	7		22.69	23	22.71
3	15	0		22.64	22.87	22.68
3	1	0	16-QAM	23.11	23.32	23.27
3	1	7		22.96	23.29	23.11
3	1	14		22.98	23.21	22.9
3	8	0		22.77	23.23	22.85
3	8	4		22.65	22.99	22.71
3	8	7		22.59	22.86	22.6
3	15	0		22.48	22.75	22.67



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.45	23.49	23.53
5	1	12		23.25	23.33	23.45
5	1	24		23.25	23.14	23.41
5	12	0		23.23	23.13	23.26
5	12	6		23.18	22.98	23.1
5	12	11		23.18	22.82	23.1
5	25	0		23.11	22.64	22.92
5	1	0	16-QAM	23.25	23.3	23.42
5	1	12		23.13	23.25	23.28
5	1	24		23.1	23.1	23.23
5	12	0		23.2	22.99	23.07
5	12	6		23.17	22.94	22.94
5	12	11		23.05	22.69	22.95
5	25	0		23.05	22.55	22.78
10	1	0	QPSK	23.68	23.75	23.82
10	1	24		23.57	23.69	23.82
10	1	49		23.43	23.57	23.67
10	25	0		23.31	23.47	23.65
10	25	12		23.19	23.36	23.59
10	25	24		23.09	23.25	23.43
10	50	0		23.03	23.16	23.37
10	1	0	16-QAM	23.66	23.66	23.7
10	1	24		23.47	23.52	23.75
10	1	49		23.31	23.57	23.49
10	25	0		23.22	23.34	23.55
10	25	12		23.06	23.25	23.41
10	25	24		23.01	23.08	23.42
10	50	0		22.86	23.06	23.22



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.89	23.95	23.99
15	1	37		23.77	23.75	23.84
15	1	74		23.63	23.59	23.74
15	36	0		23.52	23.47	23.55
15	36	18		23.44	23.27	23.55
15	36	39		23.4	23.23	23.49
15	75	0		23.33	23.22	23.45
15	1	0	16-QAM	23.87	23.76	23.79
15	1	38		23.64	23.58	23.76
15	1	75		23.57	23.5	23.57
15	36	0		23.47	23.44	23.49
15	36	18		23.33	23.14	23.44
15	36	39		23.27	23.18	23.4
15	75	0		23.18	23.07	23.25
20	1	0	QPSK	24.26	24.29	24.38
20	1	49		24.22	24.29	24.23
20	1	99		24.12	24.23	24.2
20	50	0		23.92	24.21	24.08
20	50	24		23.9	24.02	24.01
20	50	49		23.72	23.85	24
20	100	0		23.7	23.69	23.84
20	1	0	16-QAM	24.25	24.25	24.25
20	1	49		24.14	24.25	24.03
20	1	99		24.08	24.14	24.19
20	50	0		23.87	24.19	23.93
20	50	24		23.79	23.95	23.95
20	50	49		23.59	23.65	23.83
20	100	0		23.69	23.62	23.67

11. EUT and Test Setup Photo

11.1 EUT Photo

Front side




Back side




Top side




Bottom side

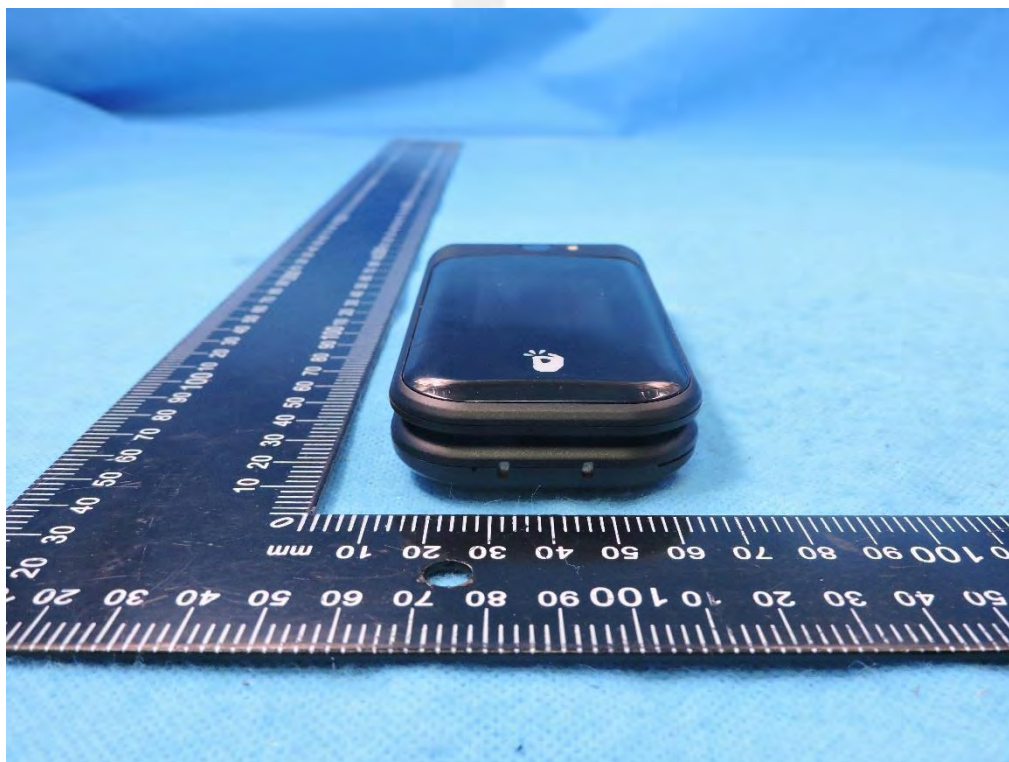

Left side

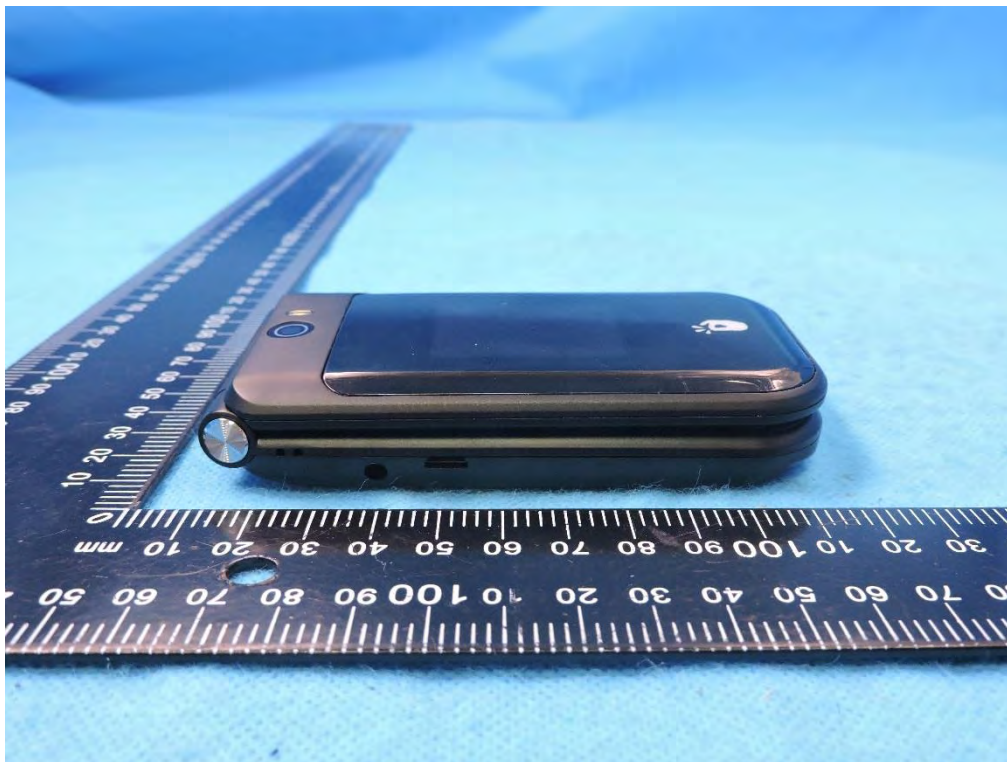

Right side

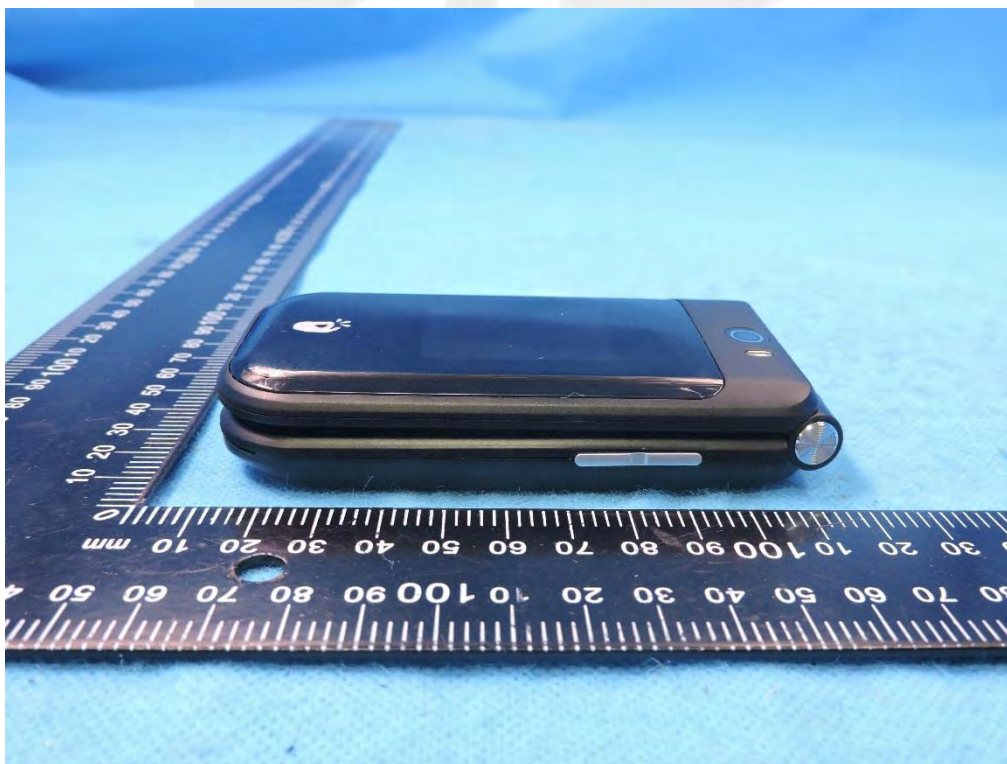




Open mode






11.2 Setup Photo


Right Touch

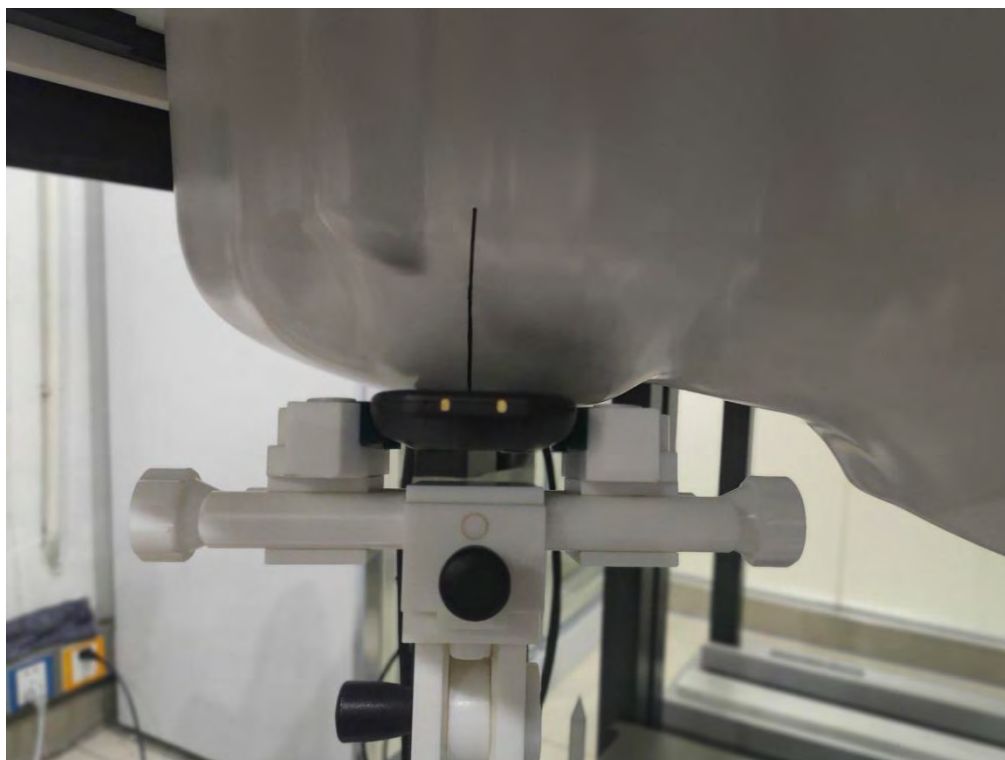

Right Tilt

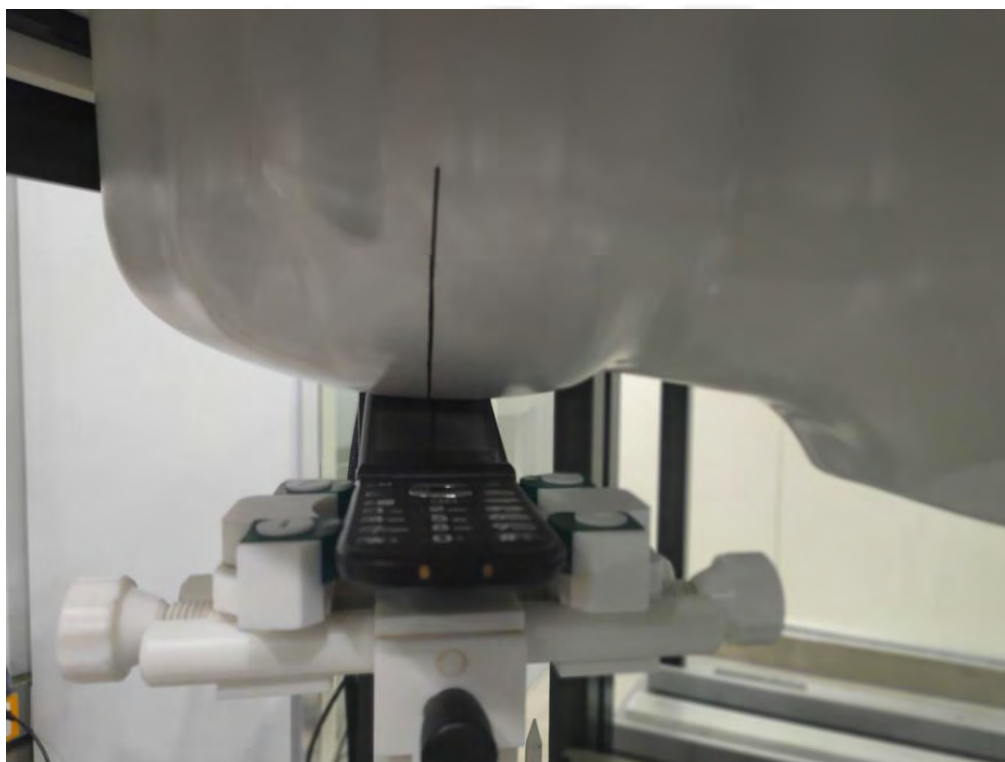


Left Touch

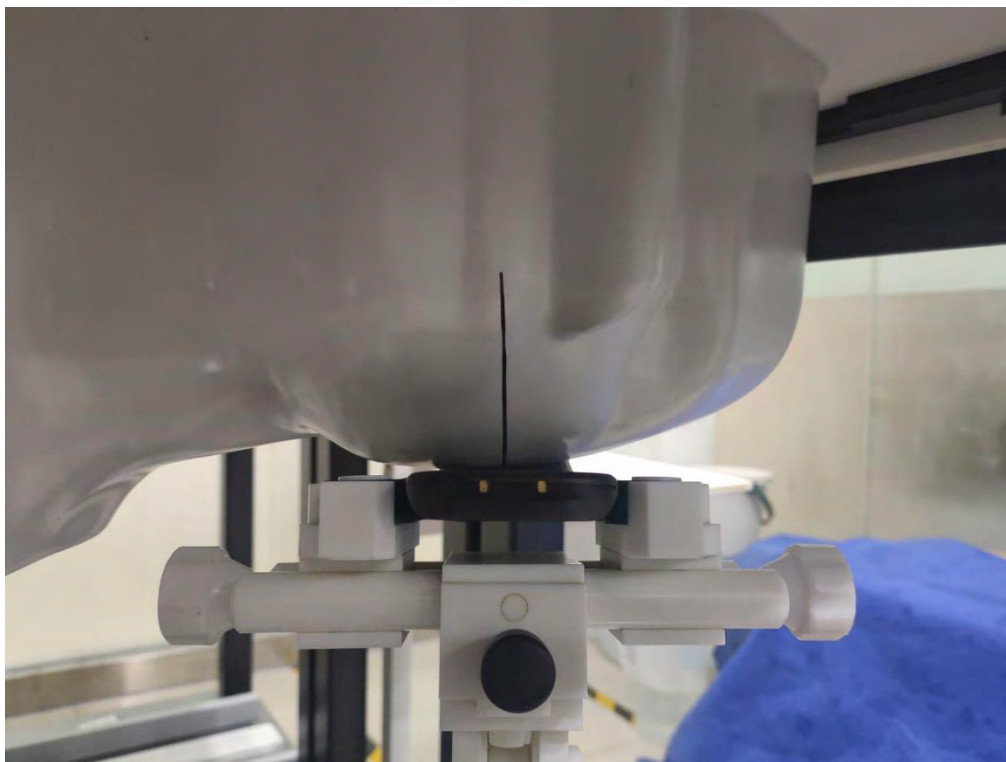


Left Tilt




Body Front side(separation distance is 10mm)

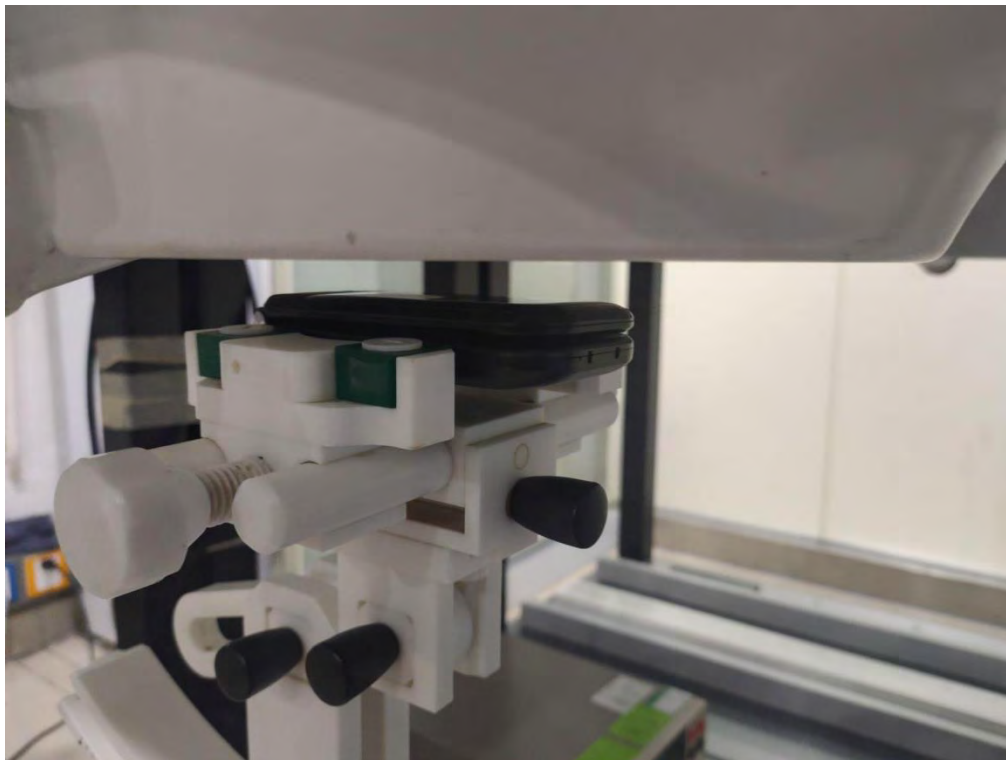


Body Back side(separation distance is 10mm)

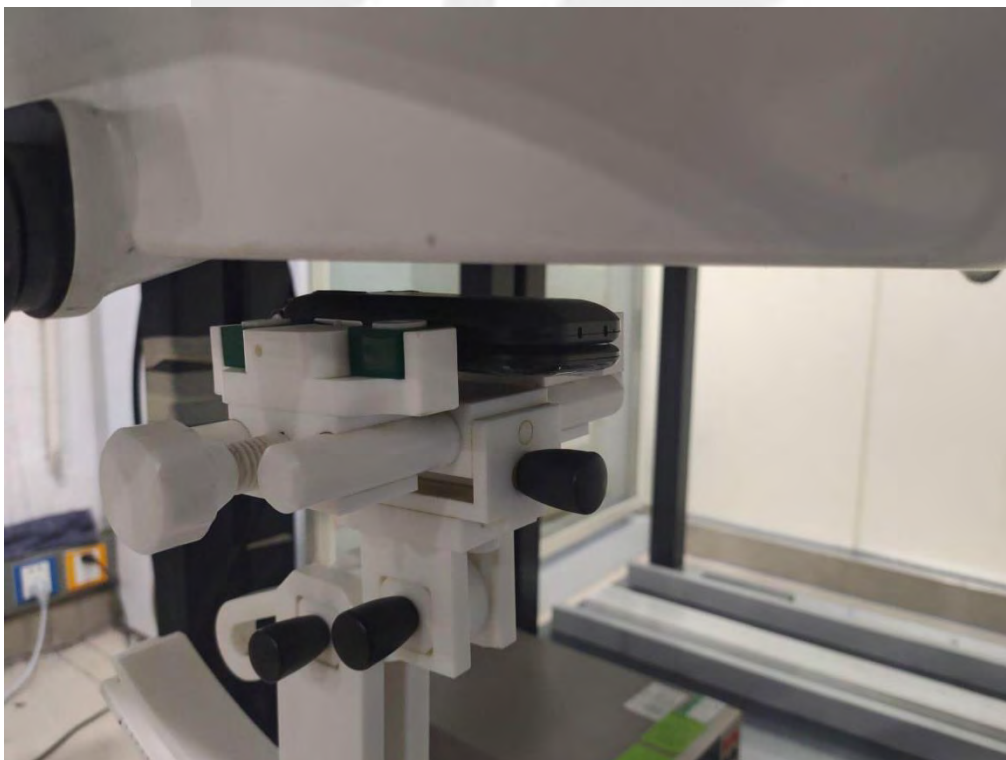


Body Left side(separation distance is 10mm)

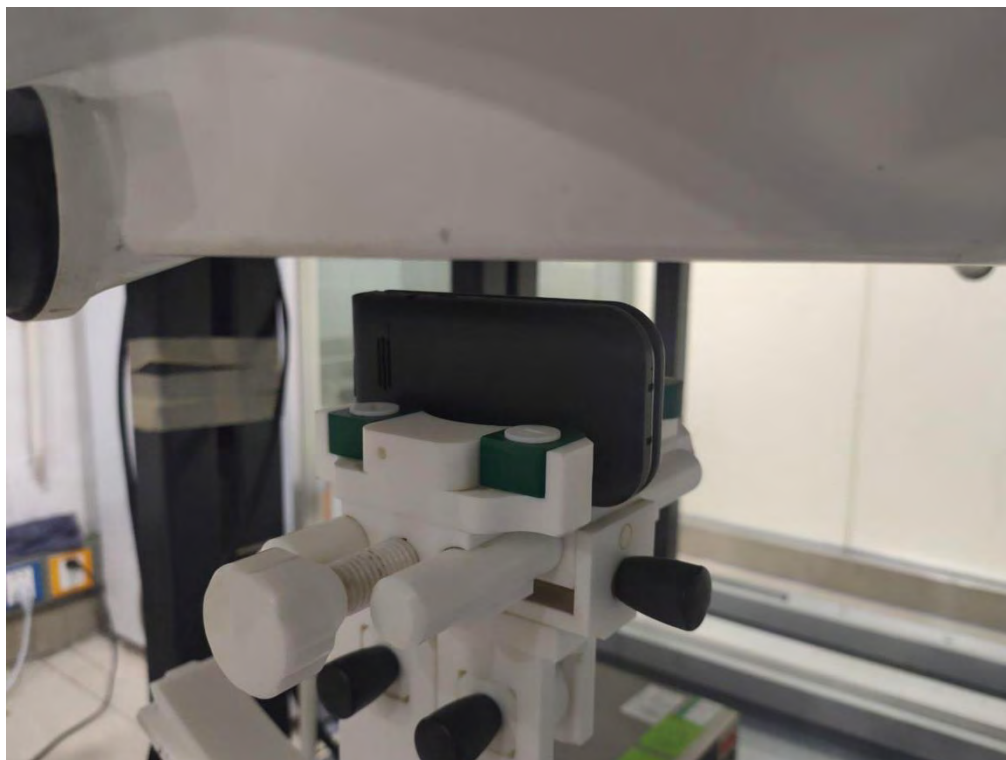

Body Right side(separation distance is 10mm)

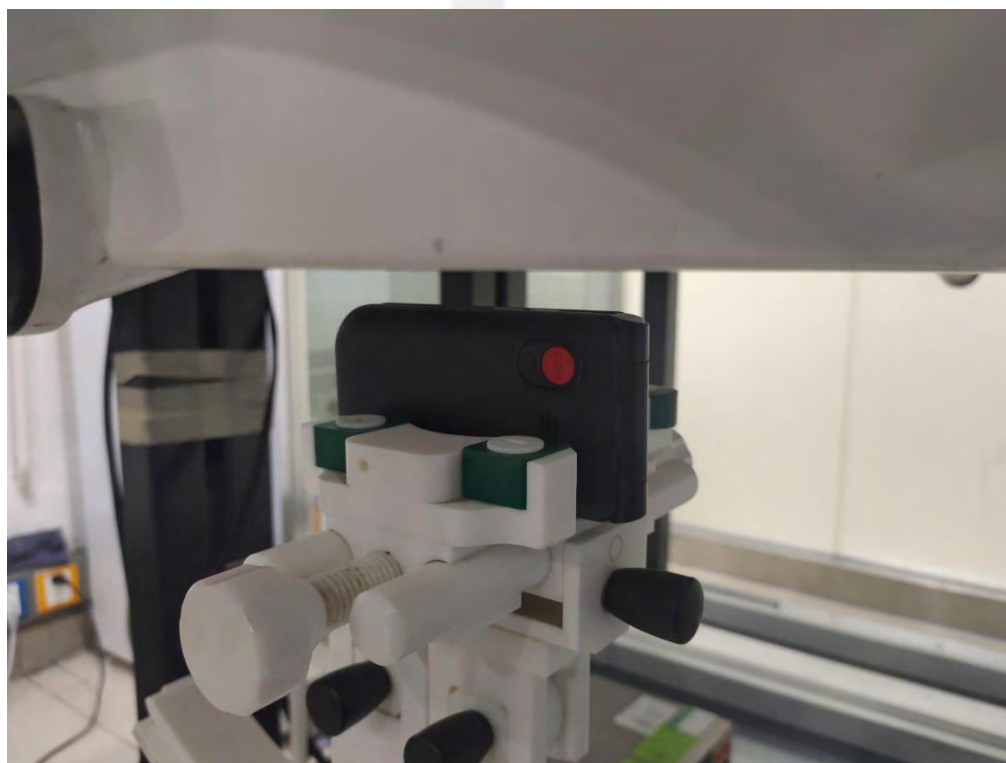


Body Bottom side(separation distance is 10mm)

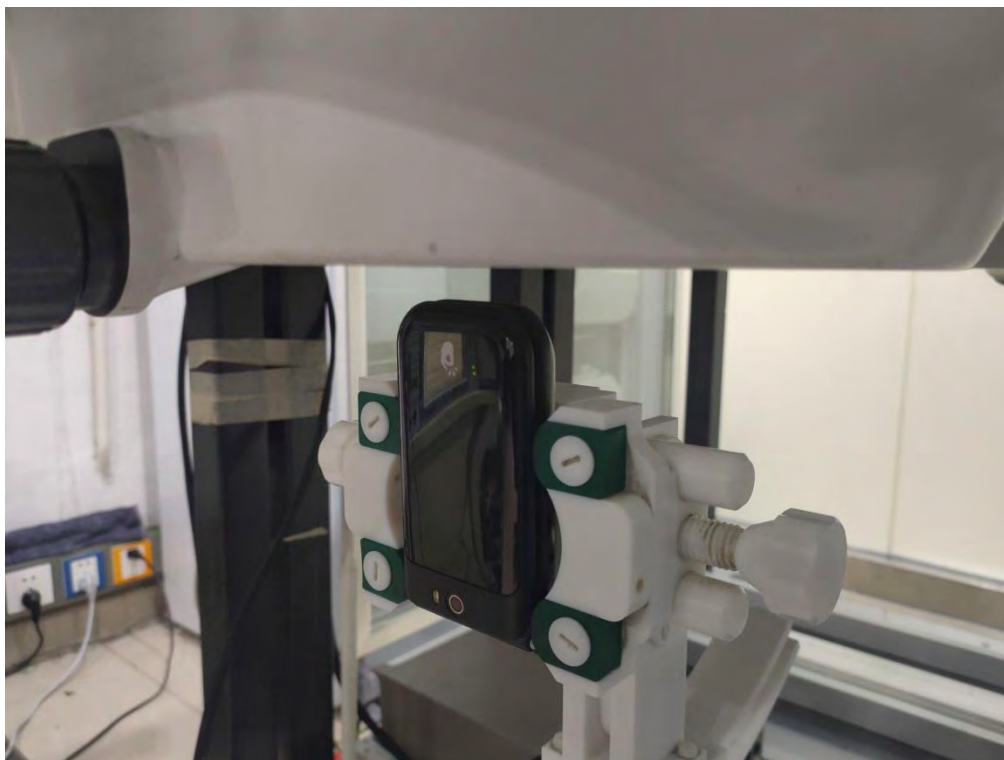

Body Top side(separation distance is 10mm)



Liquid depth (15 cm)

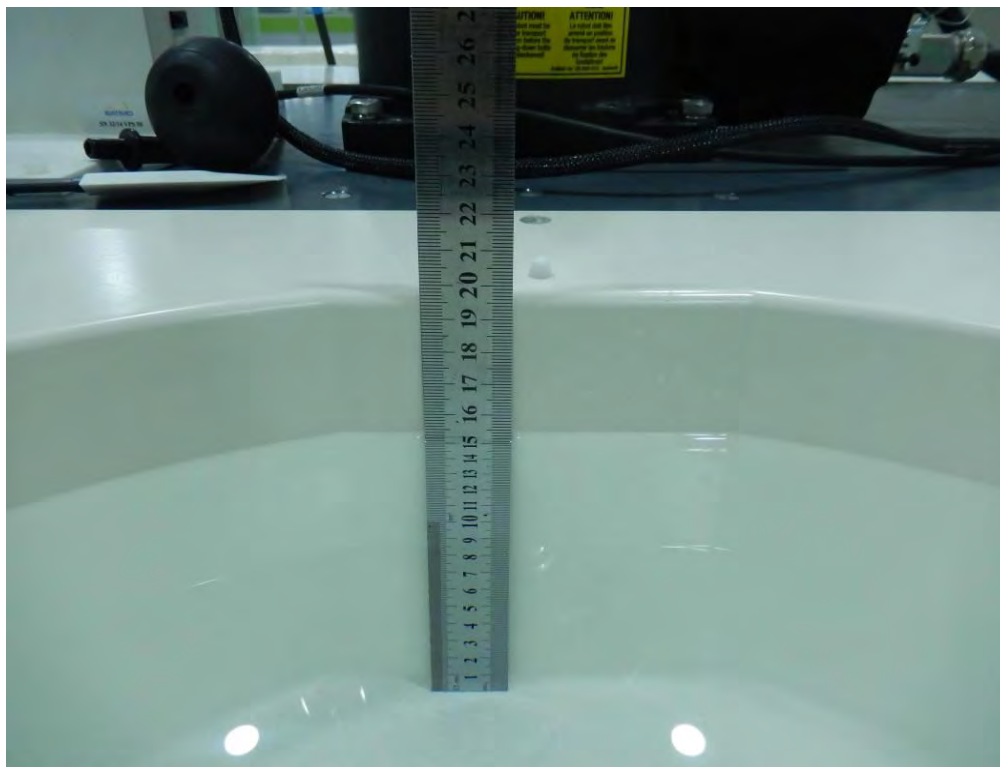



12. SAR Result Summary

12.1 Head SAR

Band	Model	Test Position	Frequency (MHz)	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
GSM850	GPRS Data-4 Slot	Right Cheek	824.2	0.384	-3.37	32.00	31.39	0.442	/
		Right Cheek	836.6	0.410	0.14	32.00	31.59	0.451	/
		Right Cheek	848.8	0.415	-1.54	32.00	31.60	0.455	1
		Right Tilt	848.8	0.203	-3.57	32.00	31.60	0.223	/
		Left Cheek	848.8	0.372	0.78	32.00	31.60	0.408	/
		Left Tilt	848.8	0.231	-2.79	32.00	31.60	0.253	/
GSM1900	GPRS Data-4 Slot	Right Cheek	1880	0.117	-0.52	28.50	28.24	0.124	3
		Right Tilt	1880	0.057	1.70	28.50	28.24	0.061	/
		Left Cheek	1880	0.110	1.78	28.50	28.24	0.117	/
		Left Tilt	1880	0.055	-1.20	28.50	28.24	0.058	/
WCDMA Band II	RMC	Right Cheek	1907.4	0.230	-2.91	23.20	23.13	0.234	5
		Right Tilt	1907.4	0.120	2.96	23.20	23.13	0.122	/
		Left Cheek	1907.4	0.210	-3.80	23.20	23.13	0.213	/
		Left Tilt	1907.4	0.101	-3.37	23.20	23.13	0.103	/
WCDMA Band V	RMC	Right Cheek	1752.4	0.102	-2.48	23.20	23.15	0.103	7
		Right Tilt	1752.4	0.051	-3.03	23.20	23.15	0.052	/
		Left Cheek	1752.4	0.098	2.92	23.20	23.15	0.099	/
		Left Tilt	1752.4	0.054	-2.34	23.20	23.15	0.055	/
WCDMA Band IV	RMC	Right Cheek	826.4	0.213	-3.15	24.00	23.99	0.213	9
		Right Tilt	826.4	0.102	-0.02	24.00	23.99	0.102	/
		Left Cheek	826.4	0.143	2.78	24.00	23.99	0.143	/
		Left Tilt	826.4	0.073	2.69	24.00	23.99	0.073	/
2.4G WLAN	802.11b	Right Cheek	2462	0.378	2.80	11.00	10.93	0.384	11
		Right Tilt	2462	0.144	0.66	11.00	10.93	0.146	/
		Left Cheek	2462	0.269	0.40	11.00	10.93	0.273	/
		Left Tilt	2462	0.136	-1.56	11.00	10.93	0.138	/
5.2G WLAN	802.11 n-HT20	Right Cheek	5180	0.156	2.93	10.50	10.40	0.160	13
		Right Tilt	5180	0.073	1.64	10.50	10.40	0.075	/
		Left Cheek	5180	0.150	3.98	10.50	10.40	0.153	/
		Left Tilt	5180	0.069	2.40	10.50	10.40	0.071	/
5.3G WLAN	802.11 n-HT20	Right Cheek	5260	0.078	2.71	8.50	8.12	0.085	15
		Right Tilt	5260	0.035	-1.63	8.50	8.12	0.038	/
		Left Cheek	5260	0.068	1.41	8.50	8.12	0.074	/
		Left Tilt	5260	0.034	-3.46	8.50	8.12	0.037	/
5.8G WLAN	802.11 n-HT20	Right Cheek	5825	0.130	-2.56	9.00	8.62	0.142	17
		Right Tilt	5825	0.070	-0.95	9.00	8.62	0.076	/
		Left Cheek	5825	0.110	-2.35	9.00	8.62	0.120	/
		Left Tilt	5825	0.061	-0.64	9.00	8.62	0.067	/



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Fre. (MHz)	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Right Cheek	1900	0.287	-2.31	24	23.99	0.288	19
			50	0	Right Cheek	1900	0.270	3.89	24	23.83	0.281	/
			1	0	Right Tilt	1900	0.143	0.59	24	23.99	0.143	/
			50	0	Right Tilt	1900	0.130	-0.01	24	23.83	0.135	/
			1	0	Left Cheek	1900	0.280	3.10	24	23.99	0.281	/
			50	0	Left Cheek	1900	0.265	1.65	24	23.83	0.276	/
			1	0	Left Tilt	1900	0.140	0.39	24	23.99	0.140	/
			50	0	Left Tilt	1900	0.132	2.28	24	23.83	0.137	/
LTE Band 4	20M	QPSK	1	0	Right Cheek	1745	0.177	2.77	25	24.69	0.190	21
			50	0	Right Cheek	1745	0.165	0.99	24	24.32	0.153	/
			1	0	Right Tilt	1745	0.085	-2.52	25	24.69	0.091	/
			50	0	Right Tilt	1745	0.080	-3.02	24	24.32	0.074	/
			1	0	Left Cheek	1745	0.170	-3.30	25	24.69	0.183	/
			50	0	Left Cheek	1745	0.155	2.03	24	24.32	0.144	/
			1	0	Left Tilt	1745	0.080	2.33	25	24.69	0.086	/
			50	0	Left Tilt	1745	0.040	-1.68	24	24.32	0.037	/
LTE Band 5	10M	QPSK	1	0	Right Cheek	844	0.232	1.93	24.5	24.42	0.236	23
			25	0	Right Cheek	844	0.195	3.70	24.5	24.26	0.206	/
			1	0	Right Tilt	844	0.121	-0.49	24.5	24.42	0.123	/
			25	0	Right Tilt	844	0.095	-3.85	24.5	24.26	0.100	/
			1	0	Left Cheek	844	0.200	-0.85	24.5	24.42	0.204	/
			25	0	Left Cheek	844	0.180	-0.38	24.5	24.26	0.190	/
			1	0	Left Tilt	844	0.100	2.89	24.5	24.42	0.102	/
			25	0	Left Tilt	844	0.090	0.08	24.5	24.26	0.095	/
LTE Band 12	10M	QPSK	1	0	Right Cheek	711	0.191	-3.95	24	23.95	0.193	25
			25	0	Right Cheek	711	0.165	1.87	24	23.58	0.182	/
			1	0	Right Tilt	711	0.154	2.64	24	23.95	0.156	/
			25	0	Right Tilt	711	0.132	3.79	24	23.58	0.145	/
			1	0	Left Cheek	711	0.180	1.80	24	23.95	0.182	/
			25	0	Left Cheek	711	0.154	-2.85	24	23.58	0.170	/
			1	0	Left Tilt	711	0.132	-3.76	24	23.95	0.134	/
			25	0	Left Tilt	711	0.111	-1.07	24	23.58	0.122	/



LTE Band 66	20M	QPSK	1	0	Right Cheek	1770	0.221	1.89	24.5	24.38	0.227	27
			50	0	Right Cheek	1755	0.198	-0.96	24.5	24.21	0.212	/
			1	0	Right Tilt	1770	0.110	-0.97	24.5	24.38	0.113	/
			50	0	Right Tilt	1755	0.131	0.89	24.5	24.21	0.140	/
			1	0	Left Cheek	1770	0.211	-2.05	24.5	24.38	0.217	/
			50	0	Left Cheek	1755	0.200	2.87	24.5	24.21	0.214	/
			1	0	Left Tilt	1770	0.100	-2.91	24.5	24.38	0.103	/
			50	0	Left Tilt	1755	0.050	3.97	24.5	24.21	0.053	/

Note:

1. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.222** W/Kg for Head)
3. Per KDB865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg

**12.2 Body-worn and Hotspot SAR**

Band	Model	Test Position	Frequency (MHz)	SAR (1g) (W/kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM850	GPRS Data-4 Slot	Front Side	848.8	0.154	1.30	32.00	31.60	0.169	/
		Back Side	848.8	0.449	1.71	32.00	31.60	0.492	2
		Left Edge	848.8	0.365	-1.25	32.00	31.60	0.400	/
		Right Edge	848.8	0.320	-0.75	32.00	31.60	0.351	/
		Top Edge	848.8	0.051	3.83	32.00	31.60	0.056	/
		Bottom Edge	848.8	0.083	-2.26	32.00	31.60	0.091	/
GSM1900	GPRS Data-4 Slot	Front Side	1880	0.043	-0.61	28.50	28.24	0.046	/
		Back Side	1880	0.377	-2.69	28.50	28.24	0.400	4
		Left Edge	1880	0.214	3.86	28.50	28.24	0.227	/
		Right Edge	1880	0.194	-1.54	28.50	28.24	0.206	/
		Top Edge	1880	0.124	0.45	28.50	28.24	0.132	/
		Bottom Edge	1880	0.202	2.41	28.50	28.24	0.214	/
WCDMA Band II	RMC	Front Side	1907.4	0.415	-0.87	23.20	23.13	0.422	/
		Back Side	1907.4	0.568	-2.87	23.20	23.13	0.577	6
		Left Edge	1907.4	0.365	3.84	23.20	23.13	0.371	/
		Right Edge	1907.4	0.332	-3.46	23.20	23.13	0.337	/
		Bottom Edge	1907.4	0.438	-0.03	23.20	23.13	0.445	/
WCDMA Band IV	RMC	Front Side	1752.4	0.101	1.45	23.20	23.15	0.102	/
		Back Side	1712.6	0.715	-1.37	23.20	22.68	0.806	/
		Back Side	1740	0.810	3.22	23.20	23.14	0.821	/
		Back Side	1752.4	0.817	-2.50	23.20	23.15	0.826	8
		Left Edge	1752.4	0.413	-0.29	23.20	23.15	0.418	/
		Right Edge	1752.4	0.398	1.25	23.20	23.15	0.403	/
		Bottom Edge	1752.4	0.324	-1.43	23.20	23.15	0.328	/
WCDMA Band V	RMC	Front Side	826.4	0.080	2.41	24.00	23.99	0.080	/
		Back Side	826.4	0.295	1.23	24.00	23.99	0.296	10
		Left Edge	826.4	0.189	-3.39	24.00	23.99	0.189	/
		Right Edge	826.4	0.175	2.28	24.00	23.99	0.175	/
		Bottom Edge	826.4	0.051	-2.96	24.00	23.99	0.051	/
2.4GHz WLAN	802.11b	Front Side	2462	0.073	3.48	11.00	10.93	0.074	/
		Back Side	2462	0.095	3.66	11.00	10.93	0.097	/
		Left Edge	2462	0.087	-0.71	11.00	10.93	0.088	/
		Right Edge	2462	0.024	3.44	11.00	10.93	0.024	/
		Top Edge	2462	0.106	-3.58	11.00	10.93	0.108	12
5.2GHz WLAN	802.11 n-HT20	Front Side	5180	0.041	2.39	10.50	10.40	0.042	/
		Back Side	5180	0.057	-1.50	10.50	10.40	0.058	/
		Left Edge	5180	0.035	-2.27	10.50	10.40	0.036	/
		Right Edge	5180	0.033	2.38	10.50	10.40	0.034	/
		Top Edge	5180	0.078	-2.52	10.50	10.40	0.080	14
5.3GHz WLAN	802.11 n-HT20	Front Side	5260	0.020	-0.82	8.50	8.12	0.022	/
		Back Side	5260	0.024	-0.26	8.50	8.12	0.026	16
		Left Edge	5260	0.015	-0.86	8.50	8.12	0.016	/
		Right Edge	5260	0.013	0.06	8.50	8.12	0.014	/
		Top Edge	5260	0.032	-0.95	8.50	8.12	0.035	/



5.8GHz WLAN	802.11 n- HT20	Front Side	5825	0.062	0.54	9.00	8.62	0.068	/
		Back Side	5825	0.073	0.41	9.00	8.62	0.080	18
		Left Edge	5825	0.054	-3.96	9.00	8.62	0.059	/
		Right Edge	5825	0.043	-0.67	9.00	8.62	0.047	/
		Top Edge	5825	0.072	3.25	9.00	8.62	0.079	/

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Fre. (MHz)	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Front side	1900	0.650	3.26	24	23.99	0.651	/
			50	0	Front side	1900	0.614	2.98	24	23.83	0.639	/
			1	0	Back Side	1900	0.721	-3.78	24	23.99	0.723	20
			50	0	Back Side	1900	0.674	3.51	24	23.83	0.701	/
			1	0	Left Side	1900	0.514	-1.66	24	23.99	0.515	/
			50	0	Left Side	1900	0.510	0.93	24	23.83	0.530	/
			1	0	Right Side	1900	0.487	1.67	24	23.99	0.488	/
			50	0	Right Side	1900	0.438	0.99	24	23.83	0.455	/
			1	0	Bottom Side	1900	0.555	-1.41	24	23.99	0.556	/
			50	0	Bottom Side	1900	0.545	0.59	24	23.83	0.567	/
LTE Band 4	20M	QPSK	1	0	Front side	1745	0.130	2.61	25	24.69	0.140	/
			50	0	Front side	1745	0.124	3.27	24	24.32	0.115	/
			1	0	Back Side	1720	0.690	1.27	25	24.23	0.824	/
			1	0	Back Side	1732.5	0.716	0.13	25	24.35	0.832	/
			1	0	Back Side	1745	0.799	2.01	25	24.69	0.858	22
			50	0	Back Side	1745	0.710	-0.41	24	24.32	0.660	/
			100	0	Back Side	1745	0.698	3.90	24	23.90	0.714	/
			1	0	Left Side	1745	0.654	-1.46	25	24.69	0.702	/
			50	0	Left Side	1745	0.612	-1.89	24	24.32	0.569	/
			1	0	Right Side	1745	0.578	-3.62	25	24.69	0.621	/
			50	0	Right Side	1745	0.547	-3.54	24	24.32	0.508	/
			1	0	Bottom Side	1745	0.569	-3.27	25	24.69	0.611	/
			50	0	Bottom Side	1745	0.550	2.91	24	24.32	0.511	/
			1	0	Front side	844	0.067	1.84	24.5	24.26	0.071	/
			25	0	Front side	844	0.065	-0.45	24.5	24.42	0.066	/
LTE Band 5	10M	QPSK	1	0	Back Side	844	0.175	3.68	24.5	24.26	0.185	24
			25	0	Back Side	844	0.161	3.08	24.5	24.42	0.164	/
			1	0	Left Side	844	0.132	2.10	24.5	24.26	0.139	/
			25	0	Left Side	844	0.128	1.54	24.5	24.42	0.130	/
			1	0	Right Side	844	0.111	-2.72	24.5	24.26	0.117	/
			25	0	Right Side	844	0.100	-1.72	24.5	24.42	0.102	/
			1	0	Bottom Side	844	0.098	-0.41	24.5	24.26	0.104	/
			25	0	Bottom Side	844	0.087	-2.45	24.5	24.42	0.089	/



LTE Band 12	10M	QPSK	1	0	Front side	711	0.070	0.28	24	23.95	0.071	/
			25	0	Front side	711	0.060	-0.19	24	23.58	0.066	/
			1	0	Back Side	711	0.096	2.35	24	23.95	0.097	26
			25	0	Back Side	711	0.078	-0.32	24	23.58	0.086	/
			1	0	Left Side	711	0.035	-3.59	24	23.95	0.035	/
			25	0	Left Side	711	0.030	0.77	24	23.58	0.033	/
			1	0	Right Side	711	0.021	0.91	24	23.95	0.021	/
			25	0	Right Side	711	0.011	-2.17	24	23.58	0.012	/
			1	0	Bottom Side	711	0.025	-1.97	24	23.95	0.025	/
			25	0	Bottom Side	711	0.020	-0.61	24	23.58	0.022	/
LTE Band 66	20M	QPSK	1	0	Front side	1770	0.647	-1.36	24.5	24.38	0.665	/
			50	0	Front side	1755	0.600	-1.35	24.5	24.21	0.641	/
			1	0	Back Side	1720	0.770	-3.78	24.5	24.26	0.814	/
			1	0	Back Side	1755	0.784	-1.85	24.5	24.29	0.823	/
			1	0	Back Side	1770	0.887	-1.20	24.5	24.38	0.912	28
			50	0	Back Side	1720	0.750	-1.46	24.3	23.92	0.819	/
			50	0	Back Side	1755	0.847	-2.18	24.3	24.21	0.865	/
			50	0	Back Side	1770	0.765	0.72	24.3	24.08	0.805	/
			100	0	Back Side	1720	0.710	3.75	24	23.7	0.761	/
			100	0	Back Side	1755	0.714	-0.14	24	23.69	0.767	/
			100	0	Back Side	1770	0.810	2.81	24	23.84	0.840	/
			1	0	Left Side	1770	0.645	2.41	24.5	24.38	0.663	/
			50	0	Left Side	1755	0.640	1.29	24.5	24.21	0.684	/
			1	0	Right Side	1770	0.598	-1.52	24.5	24.38	0.615	/
			50	0	Right Side	1755	0.574	3.70	24.5	24.21	0.614	/
			1	0	Bottom Side	1770	0.478	3.88	24.5	24.38	0.491	/
			50	0	Bottom Side	1755	0.468	3.27	24.5	24.21	0.500	/

Note:

- The test separation of all above table is 10mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.064** W/Kg for Body)
- When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Repeated SAR

Band	Mode	Test Position	Frequency (MHz)	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Right Cheek	824.2	0.378	-0.94	32	31.39	0.435	-
		Right Cheek	836.6	0.408	-1.60	32	31.59	0.448	-
		Right Cheek	848.8	0.396	3.38	32	31.60	0.434	-
WCDMA Band V	RMC	Back Side	1712.6	0.688	-1.29	23.2	22.68	0.776	-
		Back Side	1740	0.773	-2.39	23.2	23.14	0.784	-
		Back Side	1752.4	0.779	3.49	23.2	23.15	0.788	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 4	20M	QPSK	1	0	Back Side	1720	0.777	-1.88	25	24.23	0.928	-
			1	0	Back Side	1732.5	0.820	3.31	25	24.35	0.952	-
			1	0	Back Side	1745	0.803	0.43	25	24.69	0.862	-
LTE Band 66	20M	QPSK	1	0	Back Side	1720	0.756	-2.38	24.5	24.26	0.799	-
			1	0	Back Side	1755	0.698	-3.25	24.5	24.29	0.733	-
			1	0	Back Side	1770	0.674	-0.18	24.5	24.38	0.693	-
			50	0	Back Side	1720	0.760	2.07	24.3	23.92	0.829	-
			50	0	Back Side	1755	0.651	-1.67	24.3	24.21	0.665	-
			50	0	Back Side	1770	0.622	-3.38	24.3	24.08	0.654	-
			100	0	Back Side	1720	0.708	2.55	24	23.70	0.759	-
			100	0	Back Side	1755	0.692	-3.06	24	23.69	0.743	-
			100	0	Back Side	1770	0.801	0.20	24	23.84	0.831	-

**12.3 repeated SAR measurement**

Band	Mode	Test Position	Frequency (MHz)	Original Measured SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(W/kg)	2nd Repeated SAR 1g	Ratio
GSM 850	GPRS Data-4 Slot	Right Cheek	824.2	0.384	0.378	1.016	-	-	-
		Right Cheek	836.6	0.410	0.408	1.005	-	-	-
		Right Cheek	848.8	0.415	0.396	1.048	-	-	-
WCDMA Band V	RMC	Back Side	1712.6	0.715	0.688	1.039	-	-	-
		Back Side	1740	0.810	0.773	1.048	-	-	-
		Back Side	1752.4	0.817	0.779	1.049	-	-	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Original Measured SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Measured	2nd Repeated SAR 1g	Ratio
LTE Band 4	20M	QPSK	1	0	Back Side	1720	0.794	0.777	1.022	-	-	-
			1	0	Back Side	1732.5	0.825	0.820	1.006	-	-	-
			1	0	Back Side	1745	0.833	0.803	1.037	-	-	-
LTE Band 66	20M	QPSK	1	0	Back Side	1720	0.770	0.756	1.019	-	-	-
			1	0	Back Side	1755	0.784	0.775	1.012	-	-	-
			1	0	Back Side	1770	0.887	0.859	1.033	-	-	-
			50	0	Back Side	1720	0.750	0.735	1.020	-	-	-
			50	0	Back Side	1755	0.847	0.829	1.022	-	-	-
			50	0	Back Side	1770	0.765	0.736	1.039	-	-	-
			100	0	Back Side	1720	0.710	0.708	1.003	-	-	-
			100	0	Back Side	1755	0.714	0.692	1.032	-	-	-
			100	0	Back Side	1770	0.810	0.801	1.011	-	-	-

Note:

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$.
4. The ratio is the difference in percentage between original and repeated measured SAR.



Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous State
Head	1. GSM + 2.4/5GHz WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4/5GHz WLAN
	4. WCDMA + Bluetooth
	5. LTE +2.4/5GHz WLAN
	6. LTE + Bluetooth
Body	1. GSM + 2.4/5GHz WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4/5GHz WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4/5GHz WLAN
	6. LTE + Bluetooth

NOTE:

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. Based upon KDB 447498 D01, BT SAR is excluded as below table.
4. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
5. For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
6. The reported SAR summation is calculated based on the same configuration and test position.
7. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - a) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;
Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.

Estimated SAR		Maximum Turn-up Power		Antenna to user(mm)	Frequency(GHz)	Stand Alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	4	2.512	5	2.48	0.105
	Body			5	2.48	0.105
5.6G WLAN	Head	6.5	4.467	5	2.48	0.188
	Body			5	2.48	0.188



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
GSM + 2.4G WLAN	Head	GSM	0.455	0.839
		2.4G WLAN	0.384	
	Body	GSM	0.492	0.600
		2.4G WLAN	0.108	
GSM + Bluetooth	Head	GSM	0.455	0.561
		Bluetooth	0.105	
	Body	GSM	0.492	0.598
		Bluetooth	0.105	
GSM + 5G WLAN	Head	GSM	0.455	0.680
		5G WLAN	0.188	
	Body	GSM	0.492	0.680
		5G WLAN	0.188	
WCDMA + 2.4G WLAN	Head	WCDMA	0.234	0.618
		2.4G WLAN	0.384	
	Body	WCDMA	0.826	0.934
		2.4G WLAN	0.108	
WCDMA + Bluetooth	Head	WCDMA	0.234	0.339
		Bluetooth	0.105	
	Body	WCDMA	0.826	0.932
		Bluetooth	0.105	
WCDMA + 5G WLAN	Head	WCDMA	0.234	0.421
		5G WLAN	0.188	
	Body	WCDMA	0.826	1.014
		5G WLAN	0.188	
LTE + 2.4G WLAN	Head	LTE	0.288	0.672
		2.4G WLAN	0.384	
	Body	LTE	0.912	1.020
		2.4G WLAN	0.108	
LTE + Bluetooth	Head	LTE	0.288	0.393
		Bluetooth	0.105	
	Body	LTE	0.912	1.017
		Bluetooth	0.105	



LTE + 5G WLAN	Head	LTE	0.288	0.475
		5G WLAN	0.188	
	Body	LTE	0.912	1.099
		5G WLAN	0.188	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.





13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2020.07.14	2023.07.13
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2020.07.14	2023.07.13
1800MHz Dipole	MVG	SID1800	SN 30/14 DIP1G800-329	2020.07.14	2023.07.13
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2020.07.14	2023.07.13
2450MHz Dipole	MVG	SID2450	SN 30/14 DIP2G450-335	2020.07.14	2023.07.13
E-Field Probe	MVG	SSE2	SN 07/21 EPOG352	2021.03.01	2022.02.28
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2021.11.23	2022.11.22
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2021.09.29	2022.09.28
Multi Meter	Keithley	Multi Meter 2000	4050073	2021.10.08	2022.10.07
Signal Generator	Agilent	N5182A	MY50140530	2021.09.30	2022.09.29
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2021.09.30	2022.09.29
Wireless Communication Test Set	R&S	CMW500	117239	2021.09.30	2022.09.29
Power Amplifier	DESAY	ZHL-42W	9638	2021.10.09	2022.10.08
Power Meter	R&S	NRP	100510	2021.09.29	2022.09.28
Power Sensor	R&S	NRP-Z11	101919	2021.09.29	2022.09.28
Temperature hygrometer	SuWei	SW-108	N/A	2021.10.09	2022.10.08
Thermograph	Elitech	RC-4	S/N EF7176501537	2021.10.09	2022.10.08

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value Return-loss in within 20% of calibrated measurement



Appendix A. System Validation Plots

System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-11-27

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	41.66
Conductivity (S/m)	0.87
Probe	SN 07/21 EPGO352
ConvF	1.58
Crest factor	1:1

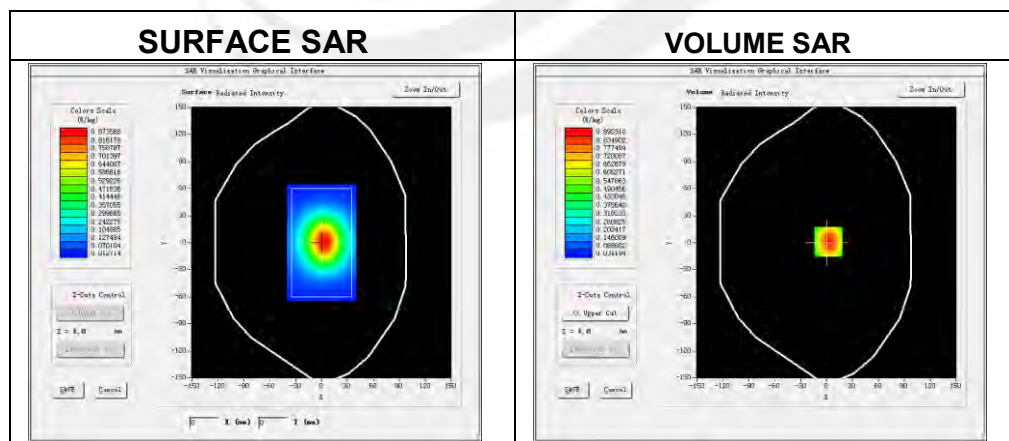

Maximum location: X=2.00, Y=1.00

SAR 10g (W/Kg)	0.557574
SAR 1g (W/Kg)	0.856627

Z Axis Scan

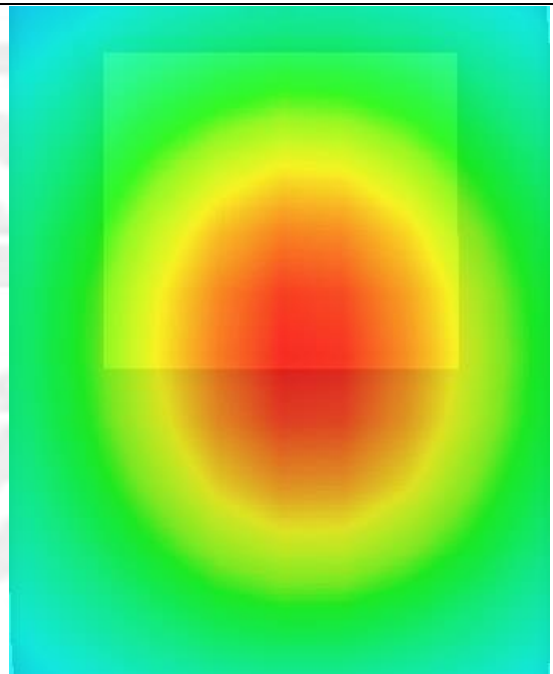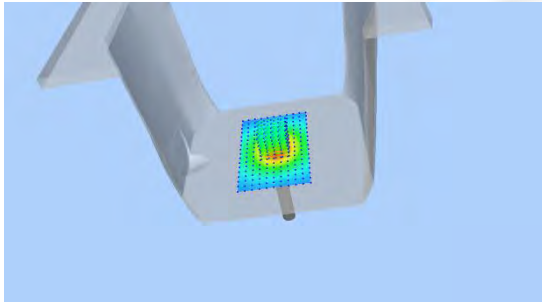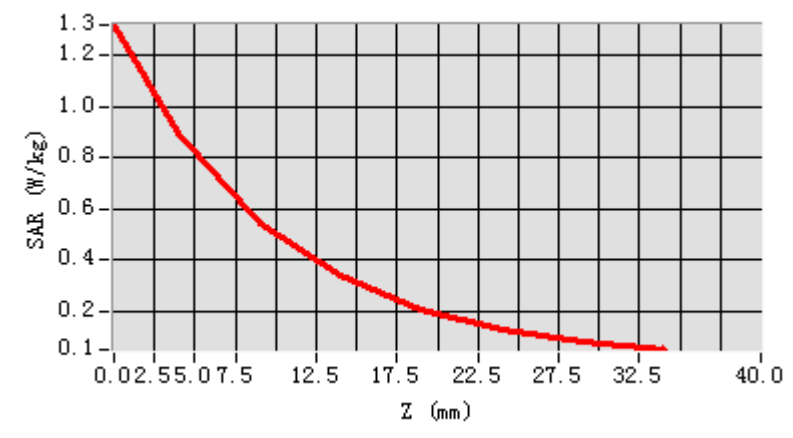

**System Performance Check Data (835MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-11-27




Experimental conditions

Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	42.18
Conductivity (S/m)	0.92
Probe	SN 07/21 EPG0352
ConvF:	1.57
Crest factor:	1:1

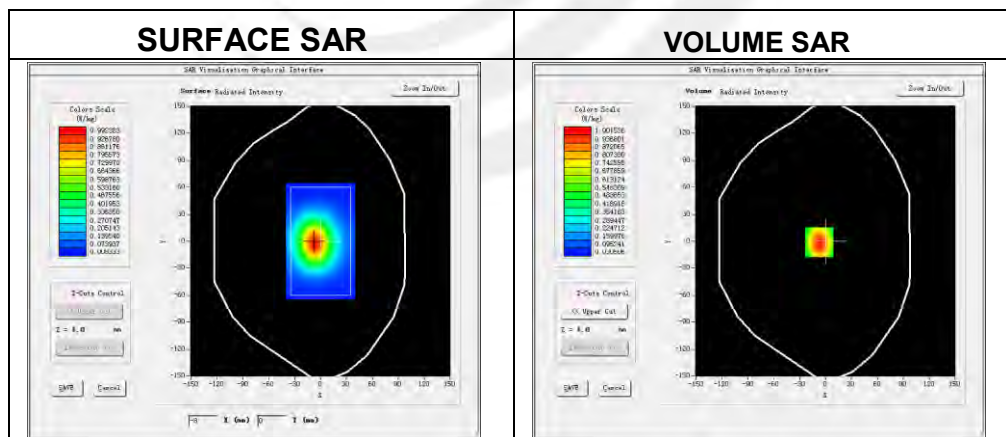**Maximum location: X=-7.00, Y=-1.00**

SAR 10g (W/Kg)	0.627311
SAR 1g (W/Kg)	0.966122

Z Axis Scan

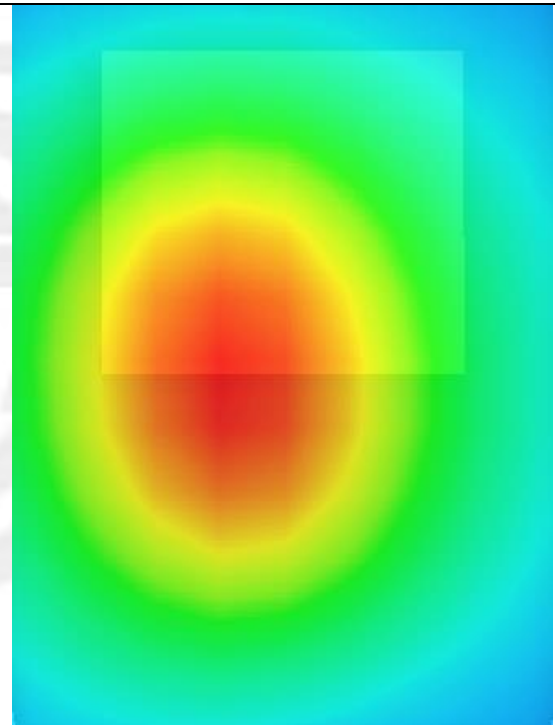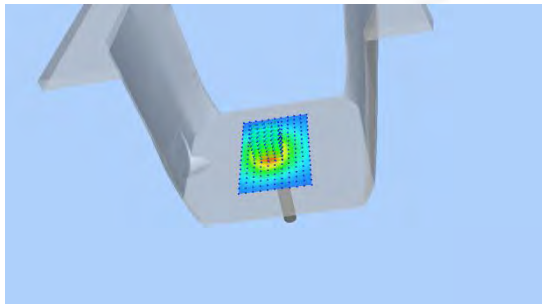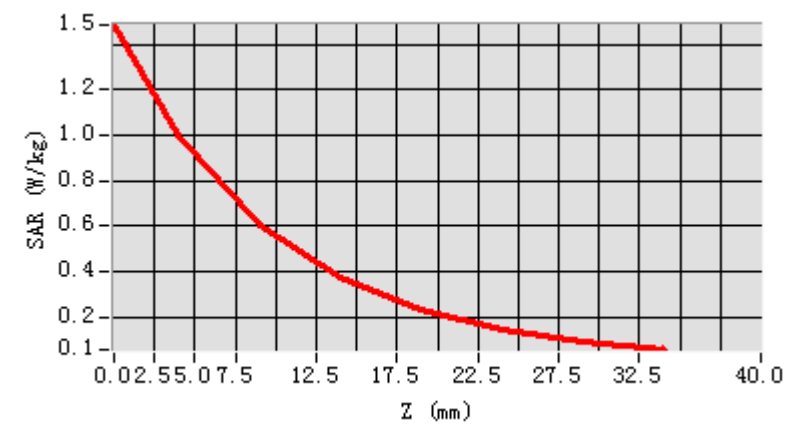



System Performance Check Data(1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-11-28

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	39.97
Conductivity (S/m)	1.42
Probe	SN 07/21 EPGO352
ConvF	1.60
Crest factor:	1:1

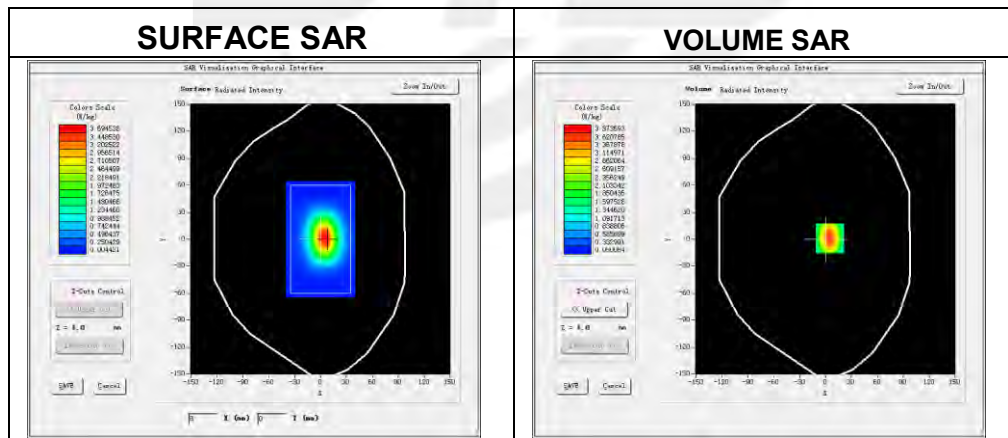

Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	2.075270
SAR 1g (W/Kg)	3.923658

Z Axis Scan

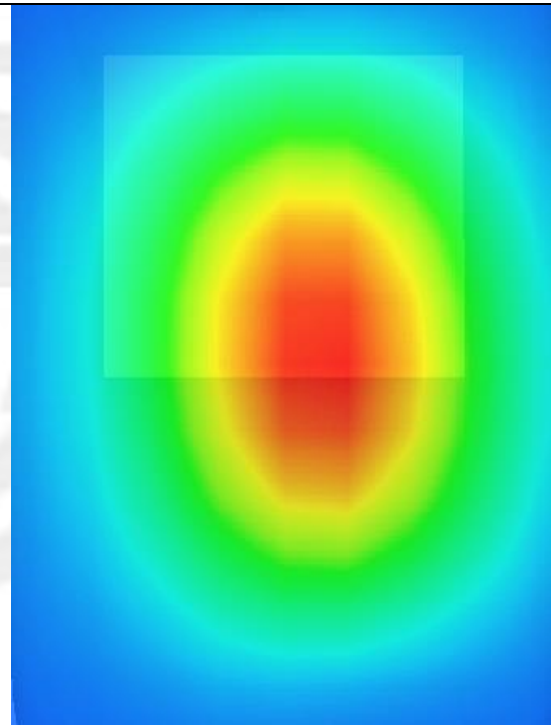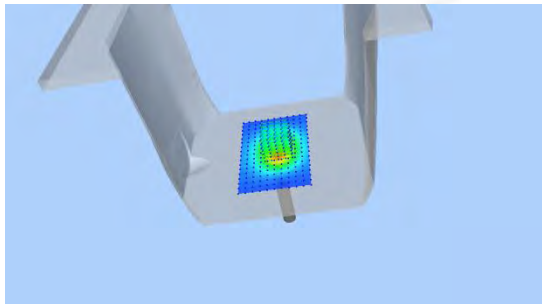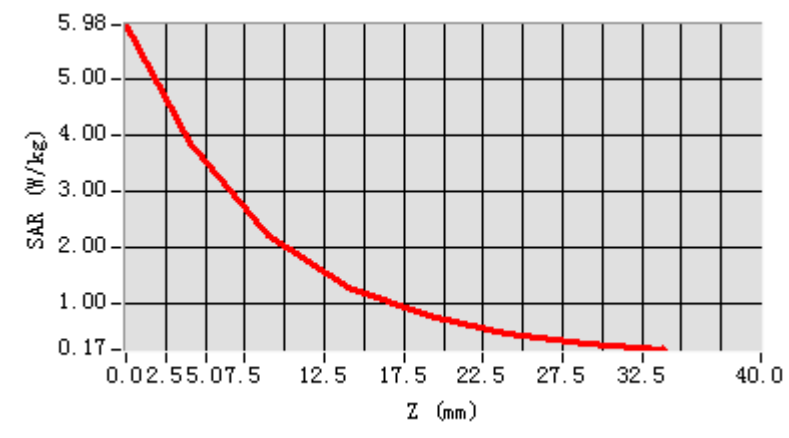

**System Performance Check Data (1900MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-12-10




Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	40.67
Conductivity (S/m)	1.43
Probe	SN 07/21 EPGO352
ConvF:	1.78
Crest factor:	1:1

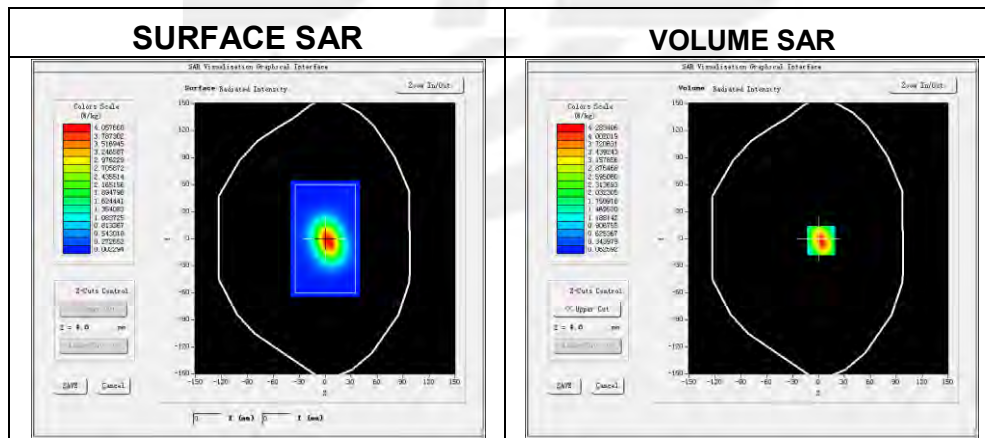**Maximum location: X=3.00, Y=-2.00**

SAR 10g (W/Kg)	2.035720
SAR 1g (W/Kg)	3.997746

Z Axis Scan

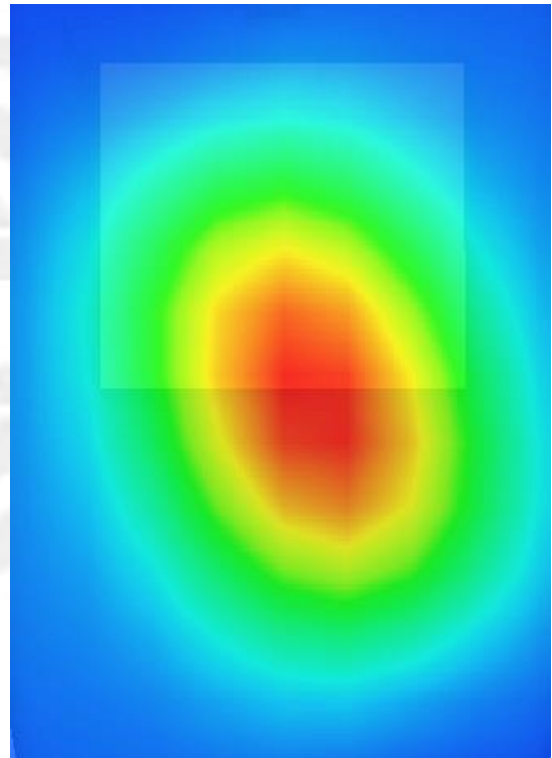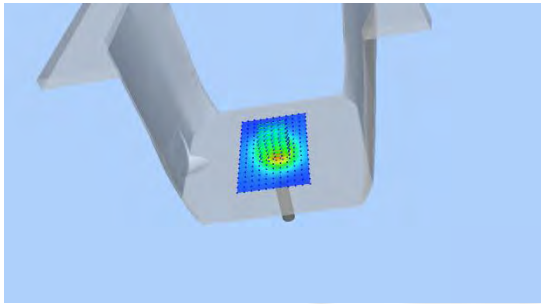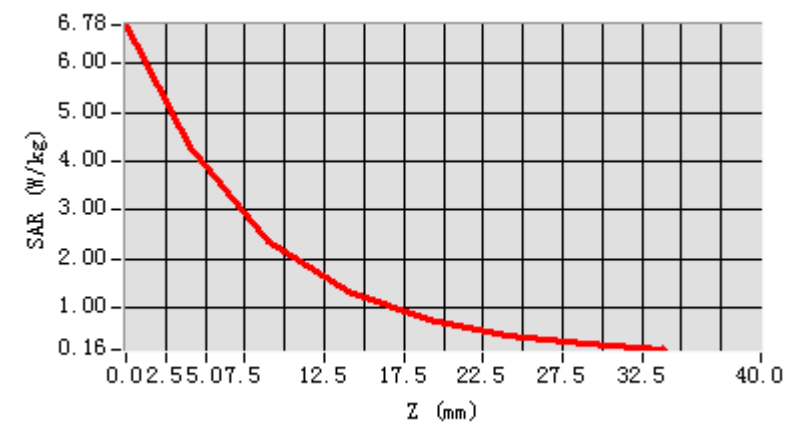

**System Performance Check Data (2450MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-12-11




Experimental conditions.

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	39.50
Conductivity (S/m)	1.81
Probe	SN 07/21 EPG0352
ConvF	1.75
Crest factor:	1:1

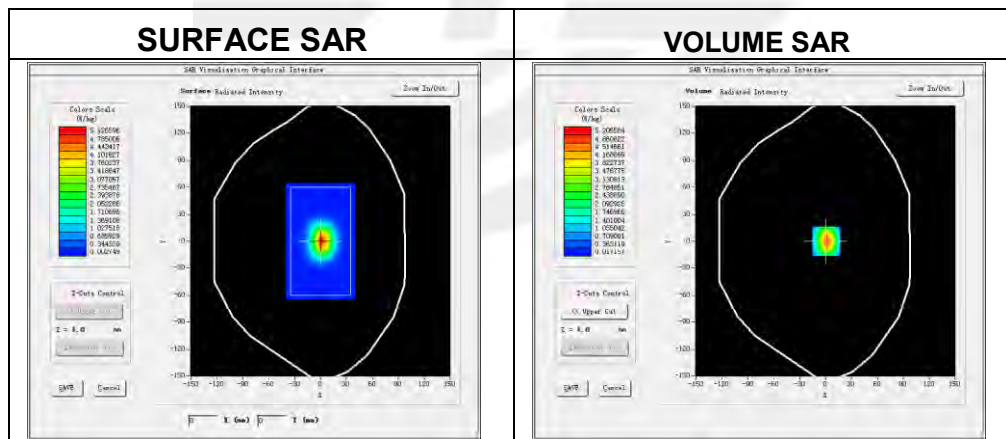**Maximum location: X=1.00, Y=0.00**

SAR 10g (W/Kg)	2.367417
SAR 1g (W/Kg)	5.149605

Z Axis Scan

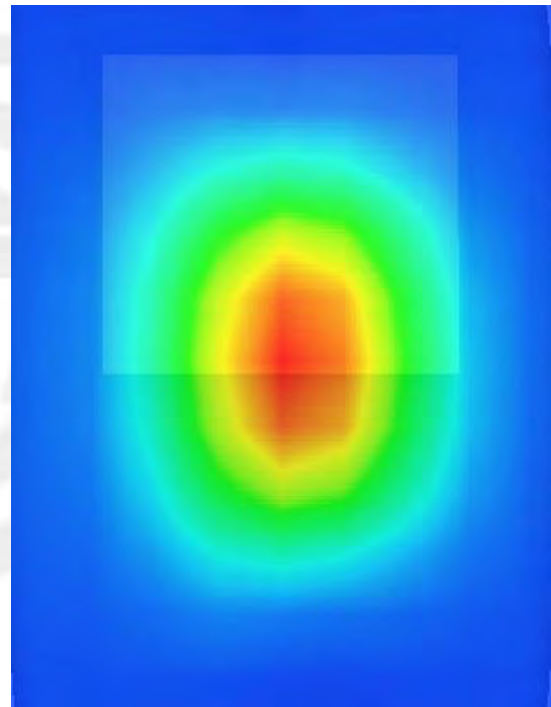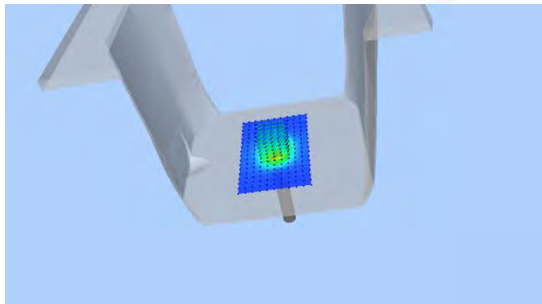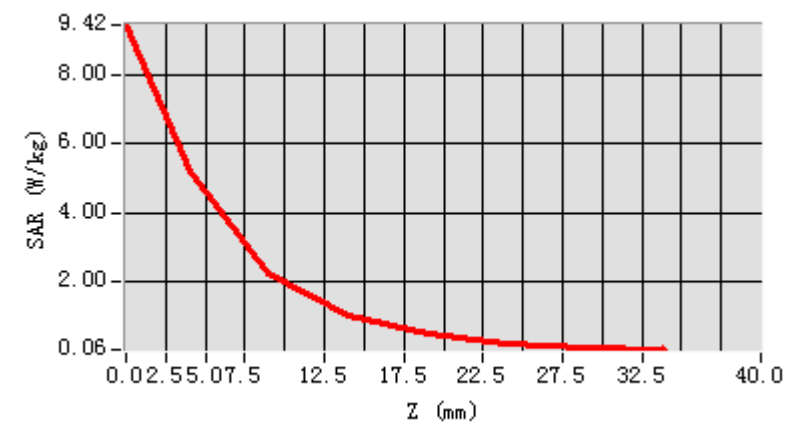



System Performance Check Data(5200MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2021-12-12

Experimental conditions.


Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	34.99
Conductivity (S/m)	4.51
Probe	SN 07/21 EPG0352
ConvF	1.47
Crest factor:	1:1

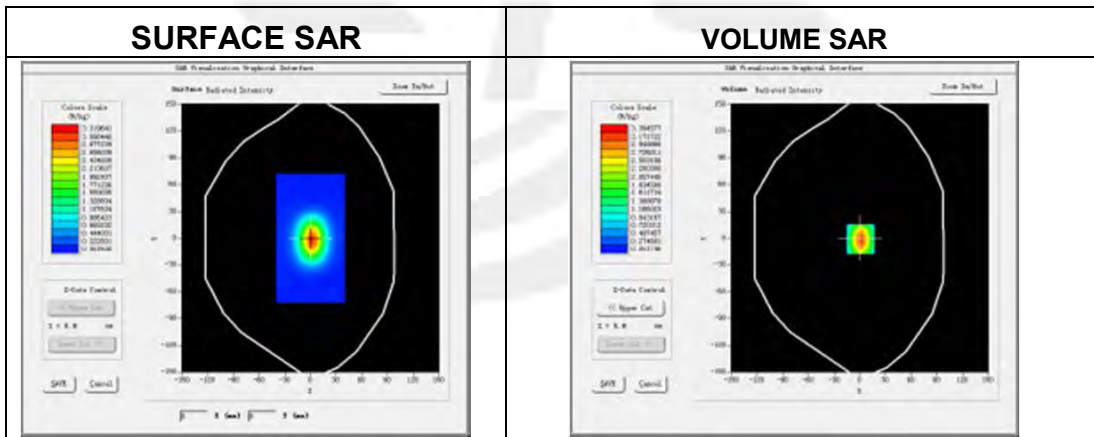

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.711572
SAR 1g (W/Kg)	15.523552

Z Axis Scan

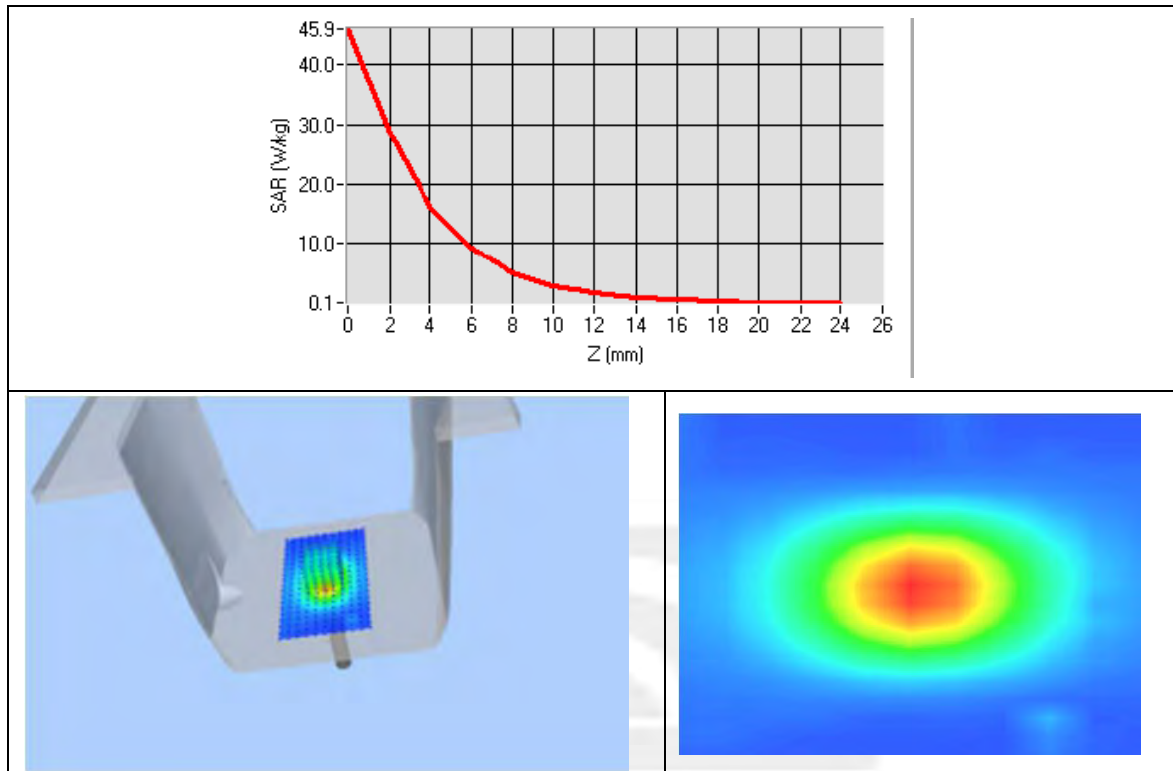



System Performance Check Data(5300MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2021-12-13

Experimental conditions.


Device Position	Validation plane
Band	5300 MHz
Channels	-
Signal	CW
Frequency (MHz)	5300
Relative permittivity	37.08
Conductivity (S/m)	4.76
Probe	SN 07/21 EPG0352
ConvF	1.65
Crest factor:	1:1

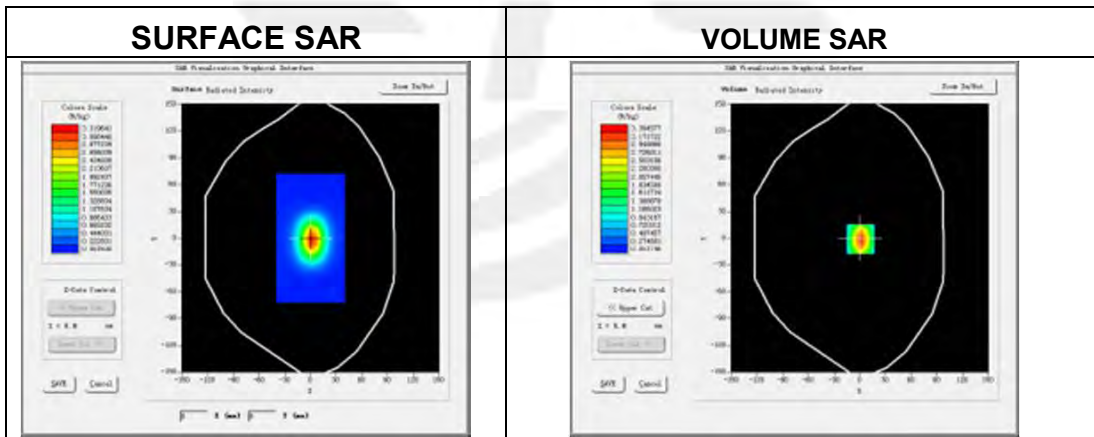

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.837410
SAR 1g (W/Kg)	16.222915

Z Axis Scan

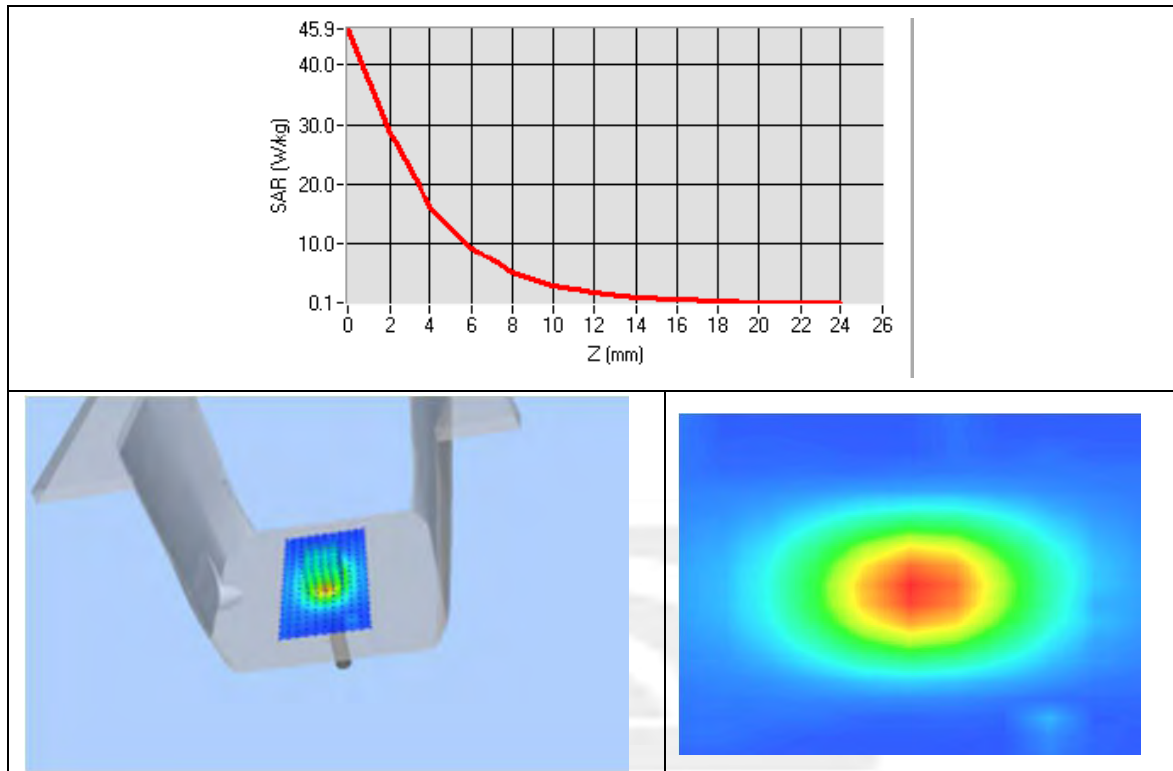



System Performance Check Data(5800MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-12-15

Experimental conditions.


Device Position	Validation plane
Band	5800 MHz
Channels	-
Signal	CW
Frequency (MHz)	5800
Relative permittivity	35.54
Conductivity (S/m)	5.15
Probe	SN 07/21 EPG0352
ConvF	1.64
Crest factor:	1:1

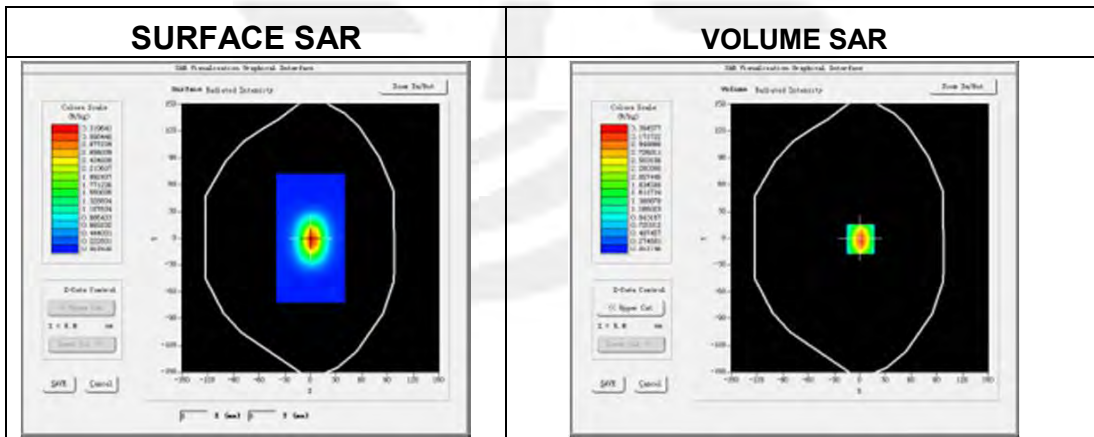

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.985531
SAR 1g (W/Kg)	17.988187

Z Axis Scan

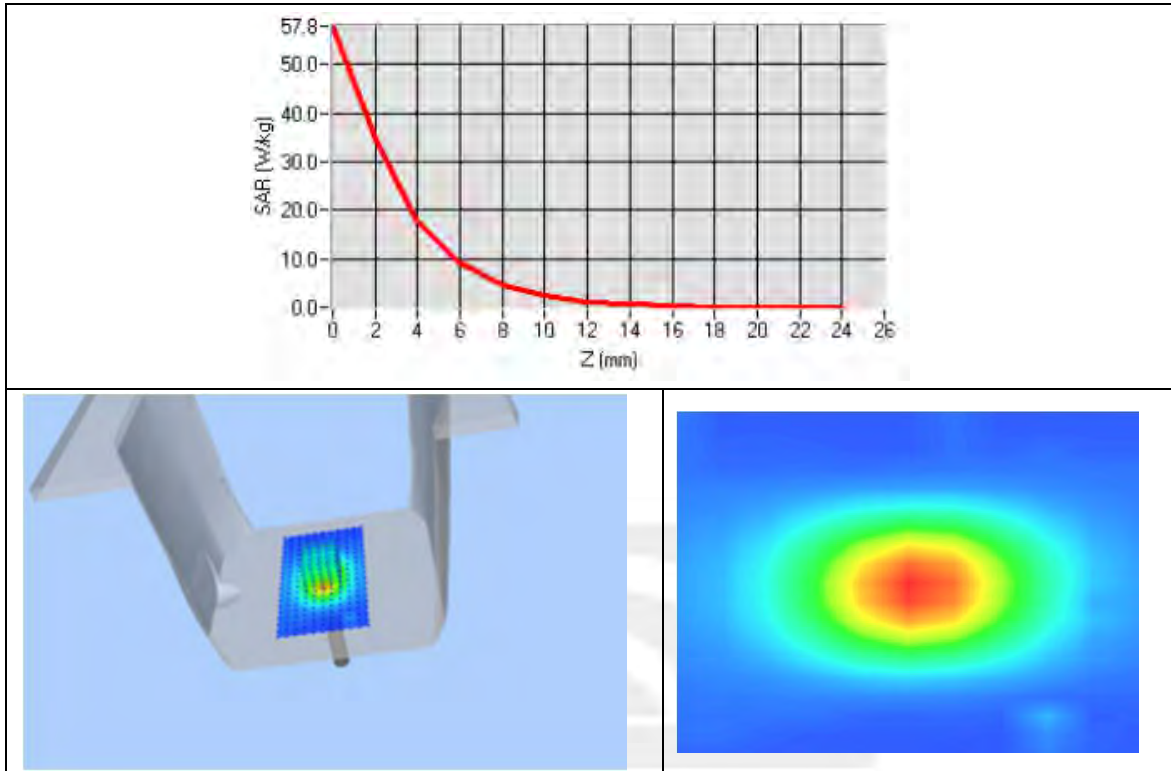

Appendix B. SAR Test Plots

Plot 1: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1


Test Date	2021-11-27
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	GPRS 850
Channels	High
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	848.8
Relative permittivity (real part)	41.35
Conductivity (S/m)	0.89

Maximum location: X=-55.00, Y=-42.00


SAR Peak: 0.61 W/kg

SAR 10g (W/Kg)	0.270376
SAR 1g (W/Kg)	0.414692


SURFACE SAR

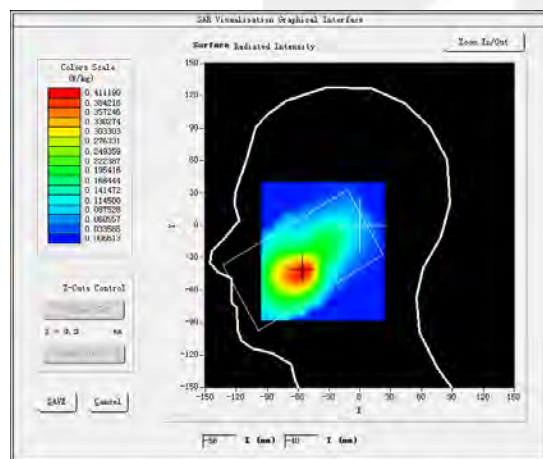


VOLUME SAR

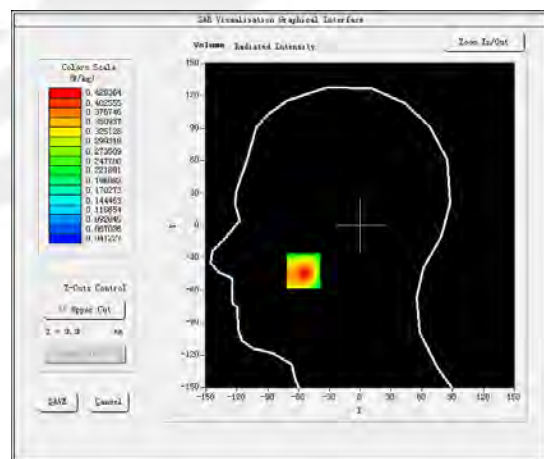

3D screen shot

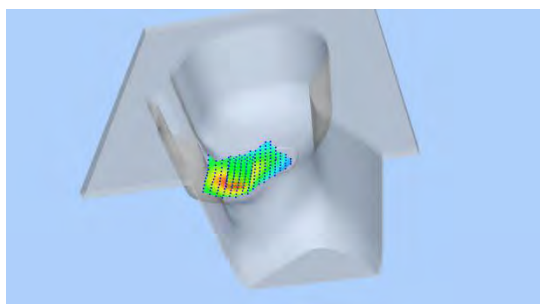

Z Axis Scan

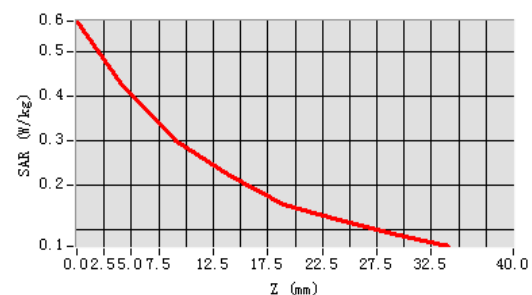


Plot 2: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-27
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 850
Channels	High
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	848.8
Relative permittivity (real part)	41.35
Conductivity (S/m)	0.89

Maximum location: X=-1.00, Y=34.00

SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.326498
SAR 1g (W/Kg)	0.448952

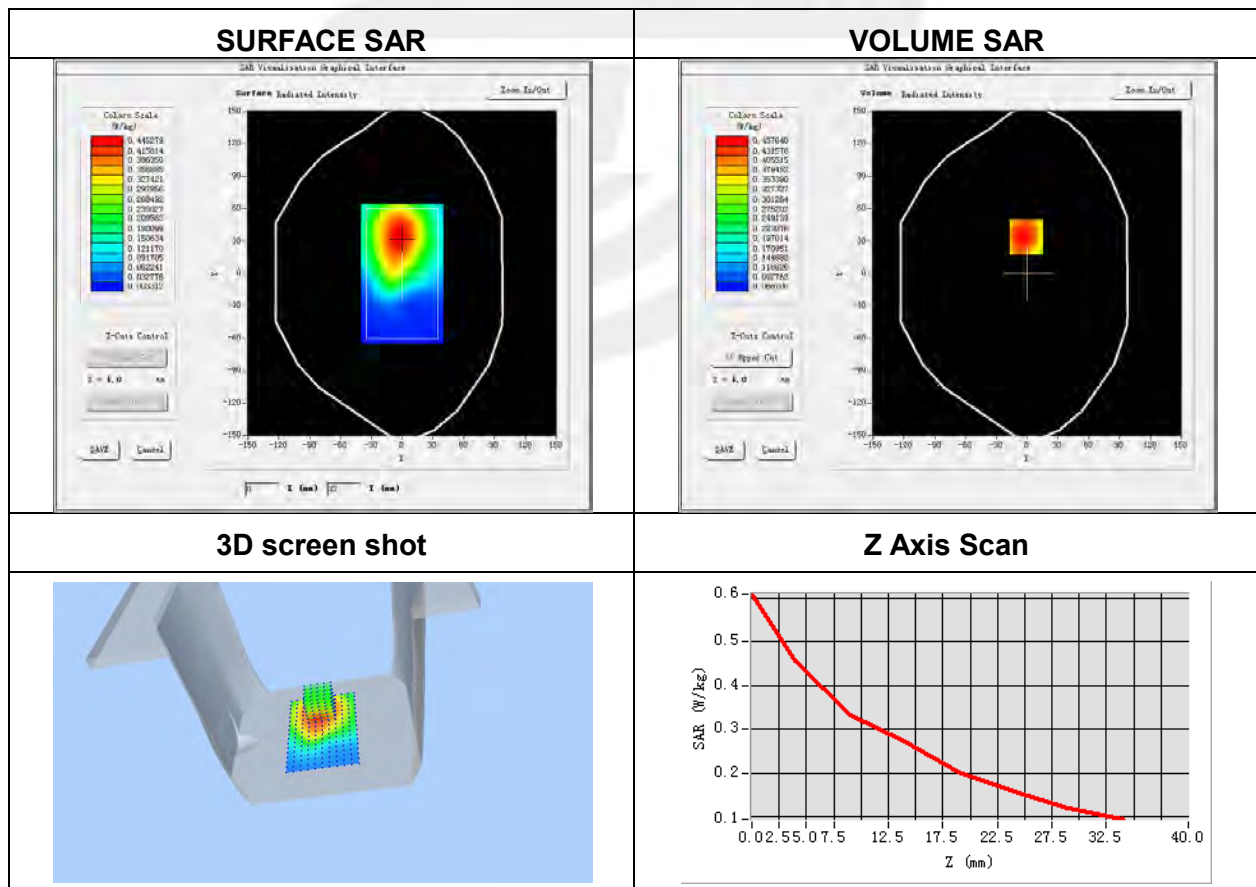





Plot 3: DUT: 4G senior phone; EUT Model: Snapfōn ezFlip 4G v1.1

Test Date	2021-12-10
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	GPRS 1900
Channels	Mid
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1880
Relative permittivity (real part)	39.35
Conductivity (S/m)	1.45

Maximum location: X=-77.00, Y=-68.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.070606
SAR 1g (W/Kg)	0.117000

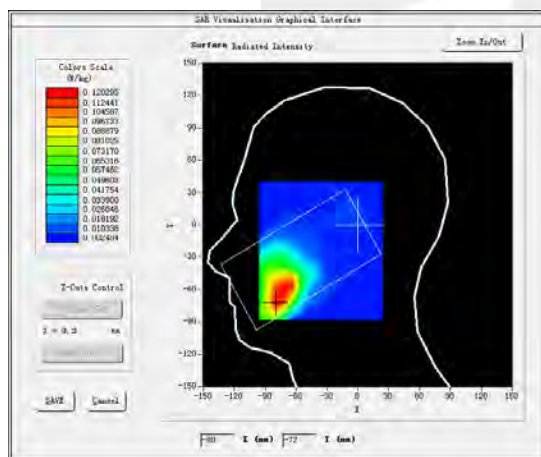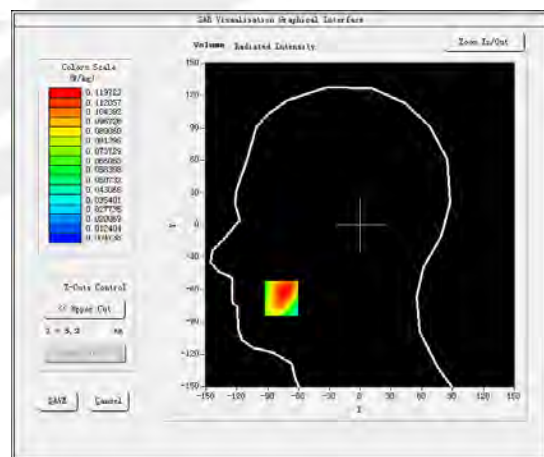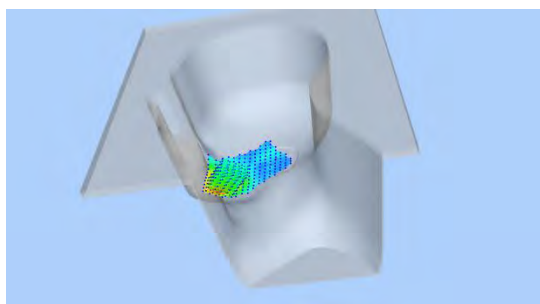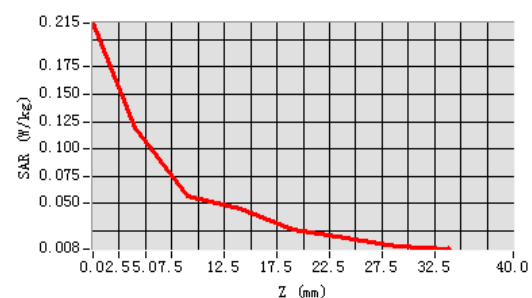SURFACE SAR

VOLUME SAR

3D screen shot

Z Axis Scan


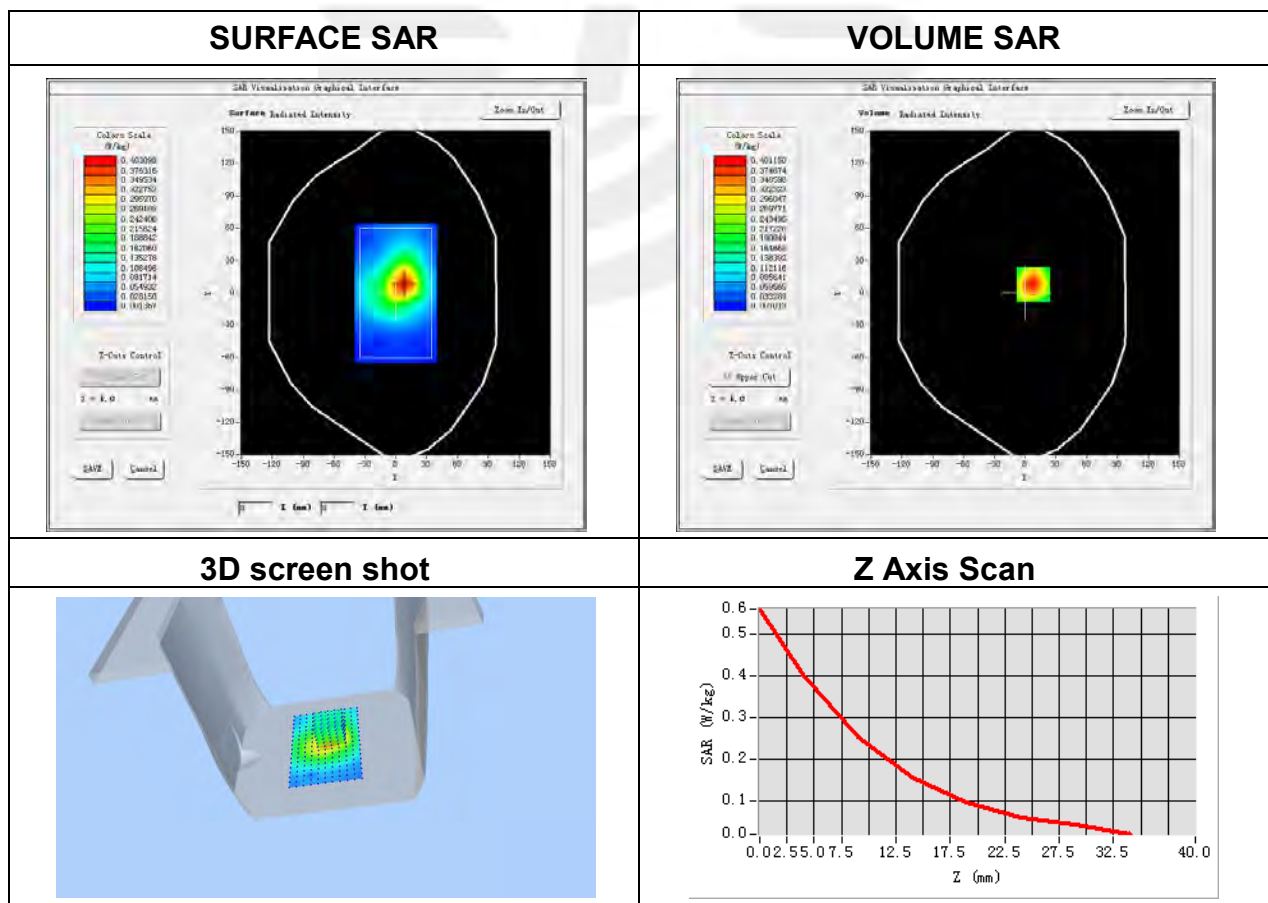
Plot 4: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-10
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 1900
Channels	Mid
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1880
Relative permittivity (real part)	39.35
Conductivity (S/m)	1.45

Maximum location: X=8.00, Y=8.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.218572
SAR 1g (W/Kg)	0.377406




Plot 5: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-10
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.4
Relative permittivity (real part)	39.33
Conductivity (S/m)	1.41

Maximum location: X=-76.00, Y=-69.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.130882
SAR 1g (W/Kg)	0.230068

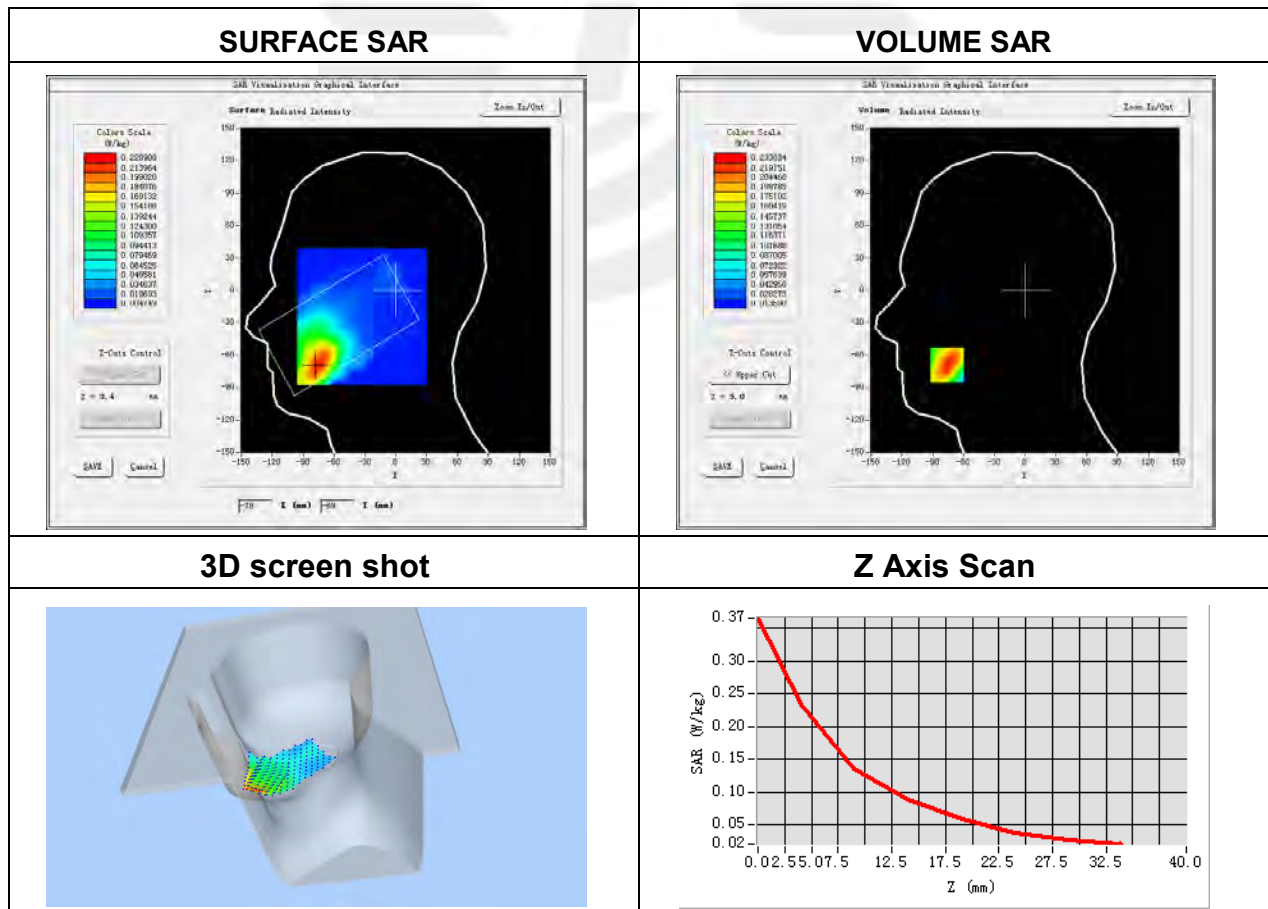


Plot 6: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2020-12-10
Probe	SN 07/21 EPGO352
ConvF	1.84
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Bottom Side
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.4
Relative permittivity (real part)	39.33
Conductivity (S/m)	1.41

Maximum location: X=14.00, Y=-2.00

SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.325398
SAR 1g (W/Kg)	0.568193

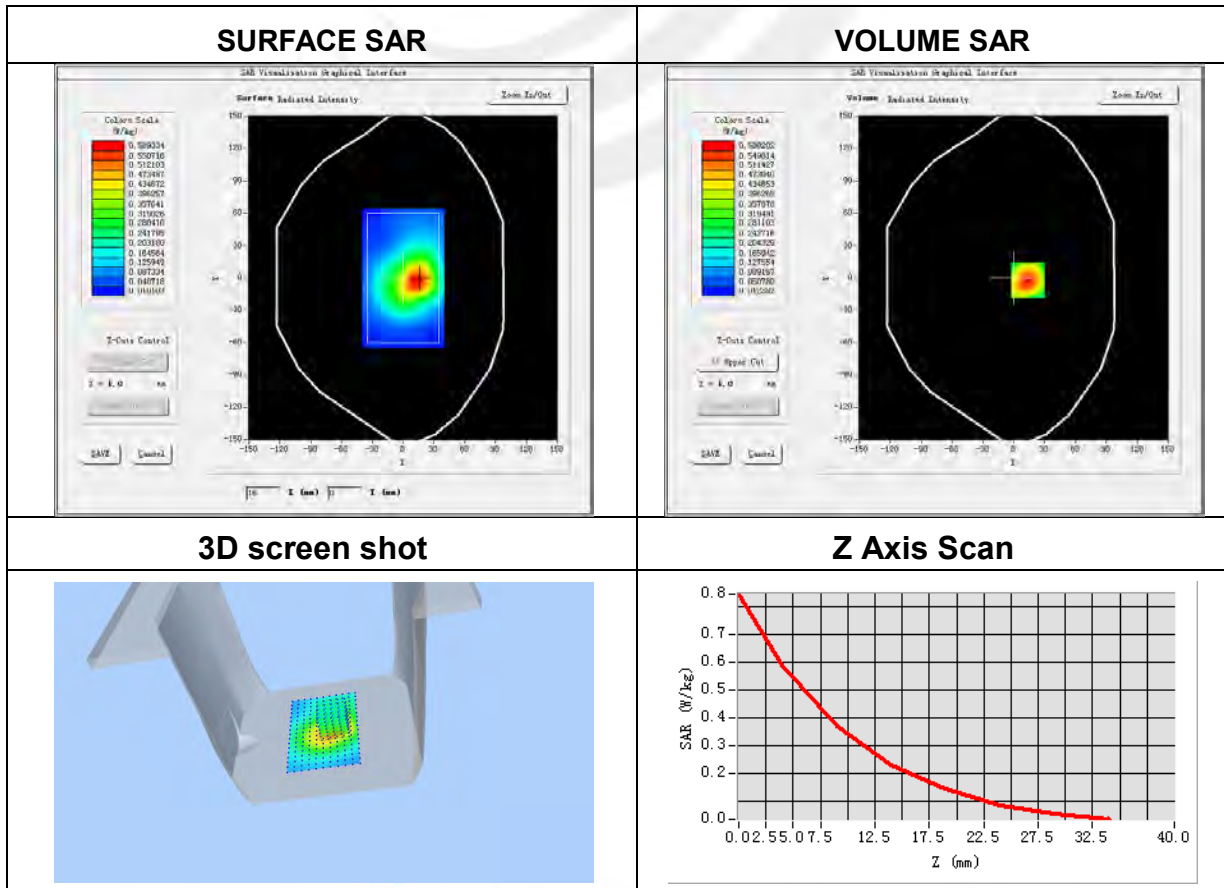





Plot 7: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-28
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA 4
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.4
Relative permittivity (real part)	39.74
Conductivity (S/m)	1.38

Maximum location: X=-71.00, Y=-59.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.068420
SAR 1g (W/Kg)	0.101989

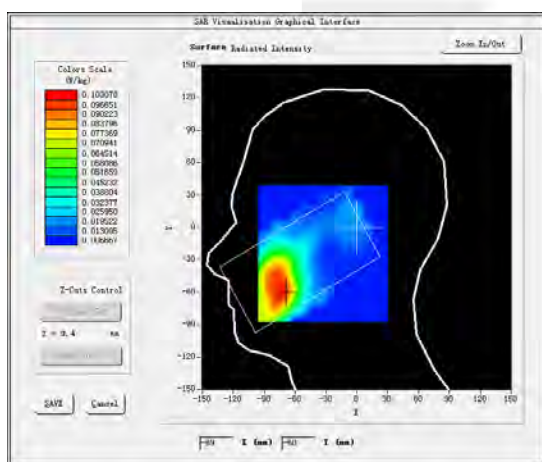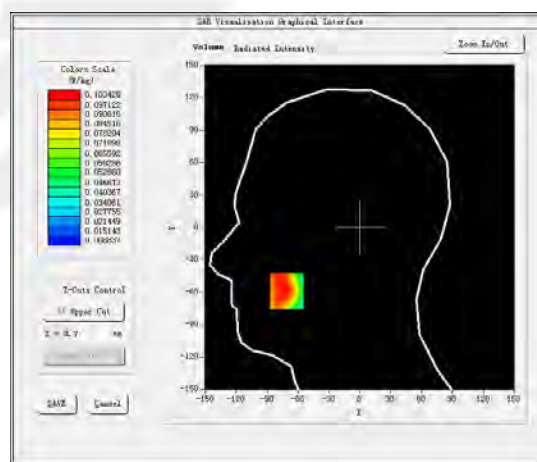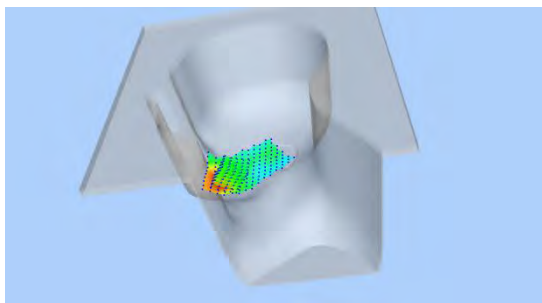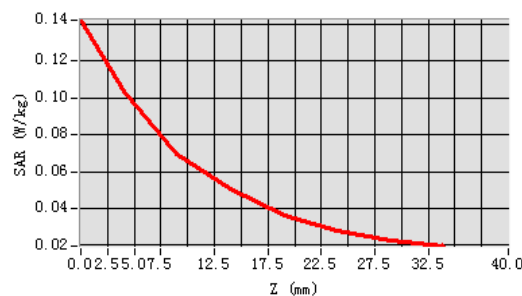SURFACE SAR

VOLUME SAR

3D screen shot

Z Axis Scan


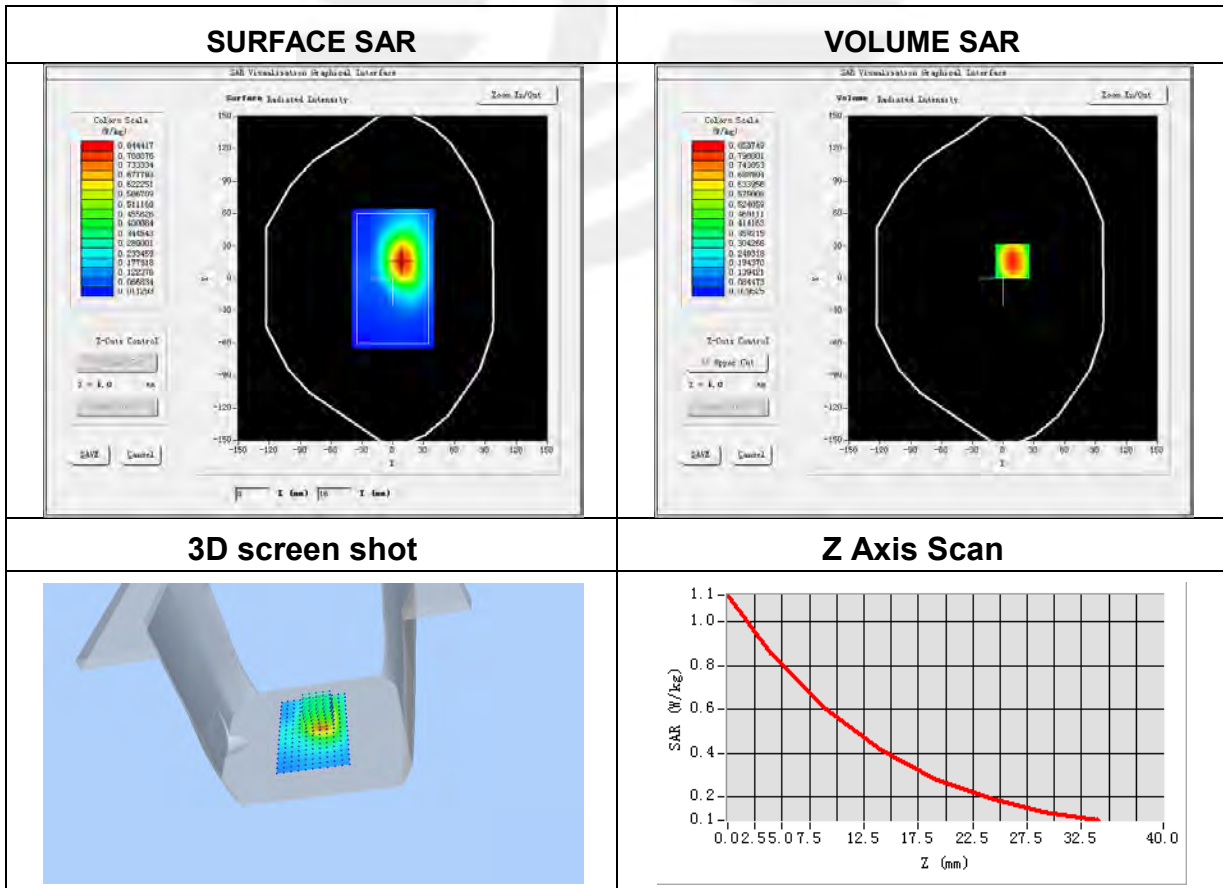
Plot 8: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-28
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA 4
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.4
Relative permittivity (real part)	39.74
Conductivity (S/m)	1.38

Maximum location: X=9.00, Y=16.00

SAR Peak: 1.13 W/kg

SAR 10g (W/Kg)	0.507032
SAR 1g (W/Kg)	0.816556







Plot 9: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-27
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA 5
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	41.20
Conductivity (S/m)	0.91

Maximum location: X=-49.00, Y=-40.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.136627
SAR 1g (W/Kg)	0.212894

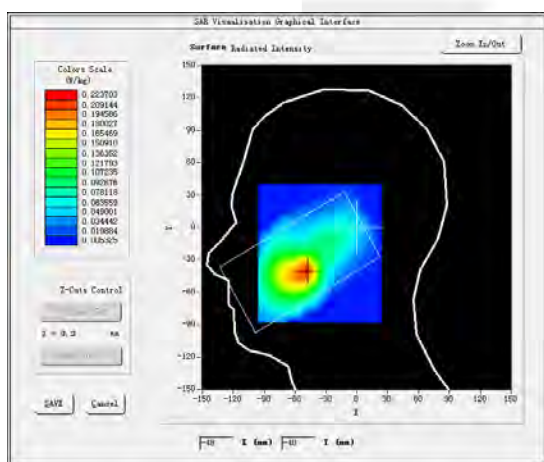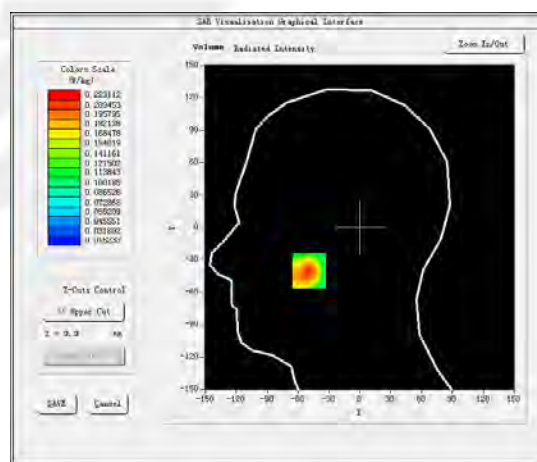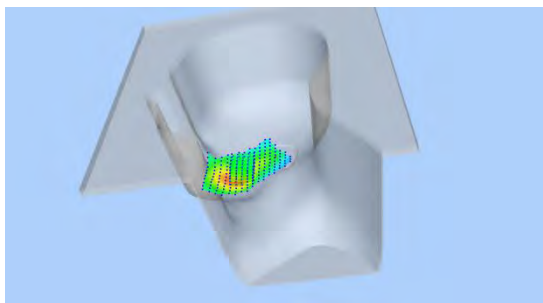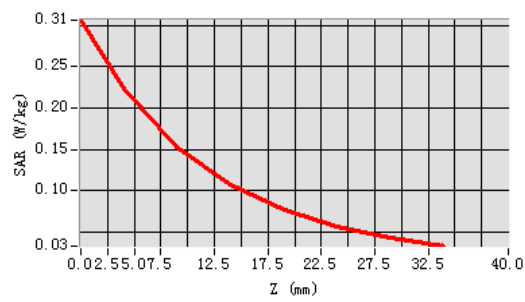SURFACE SAR

VOLUME SAR

3D screen shot

Z Axis Scan


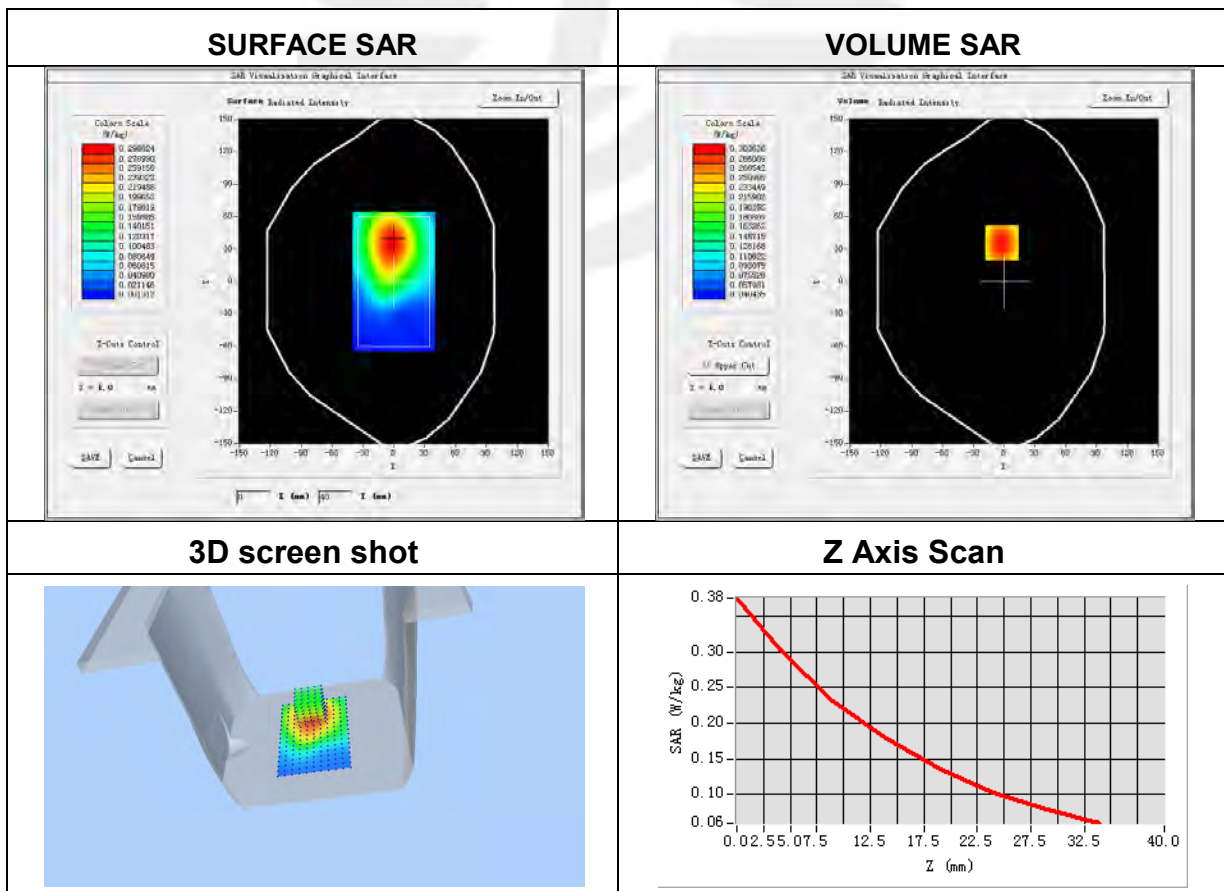
Plot 10: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-27
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA 5
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	41.20
Conductivity (S/m)	0.91

Maximum location: X=-2.00, Y=36.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.213632
SAR 1g (W/Kg)	0.295068




Plot 11: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-11
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	38.47
Conductivity (S/m)	1.75

Maximum location: X=-56.00, Y=-56.00

SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.160663
SAR 1g (W/Kg)	0.378136

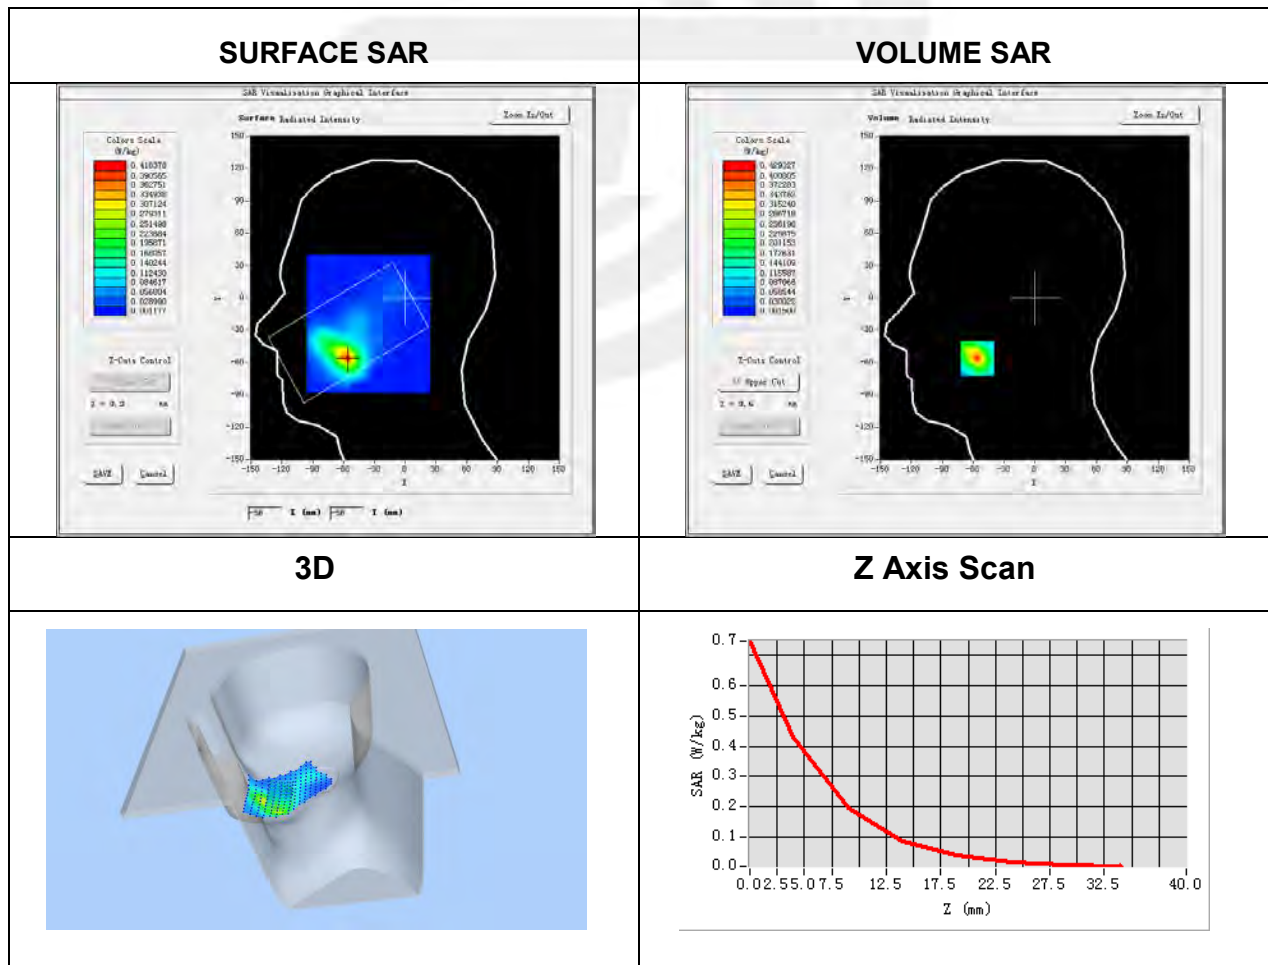



Plot 12: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-11
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Edge
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	38.47
Conductivity (S/m)	1.75

Maximum location: X=12.00, Y=20.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.056716
SAR 1g (W/Kg)	0.106395

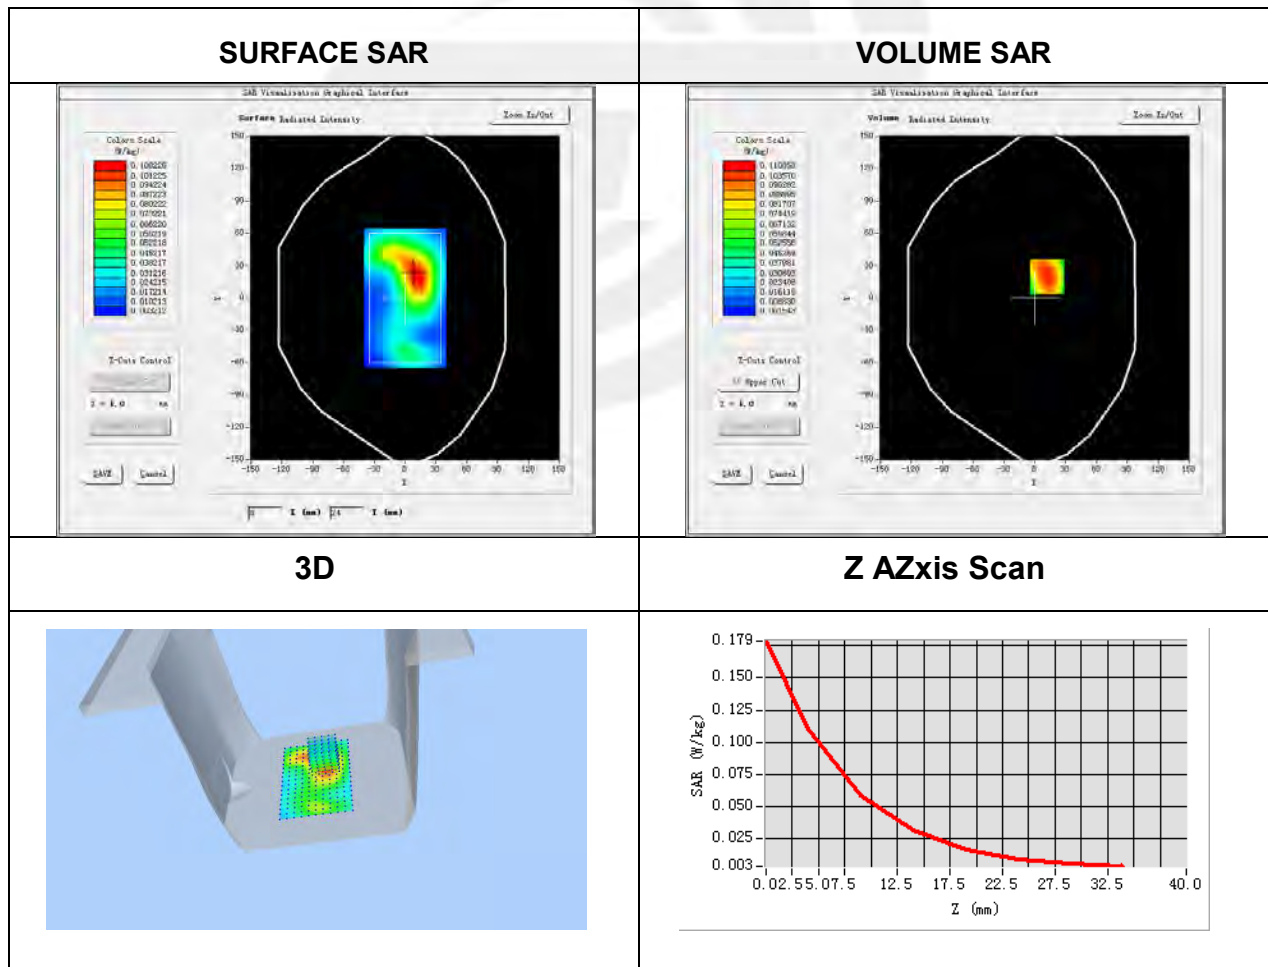




Plot 13: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	802.11 n-HT20
Channels	Low
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	35.82
Conductivity (S/m)	4.61

Maximum location: X=-49.00, Y=-64.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.067411
SAR 1g (W/Kg)	0.156086

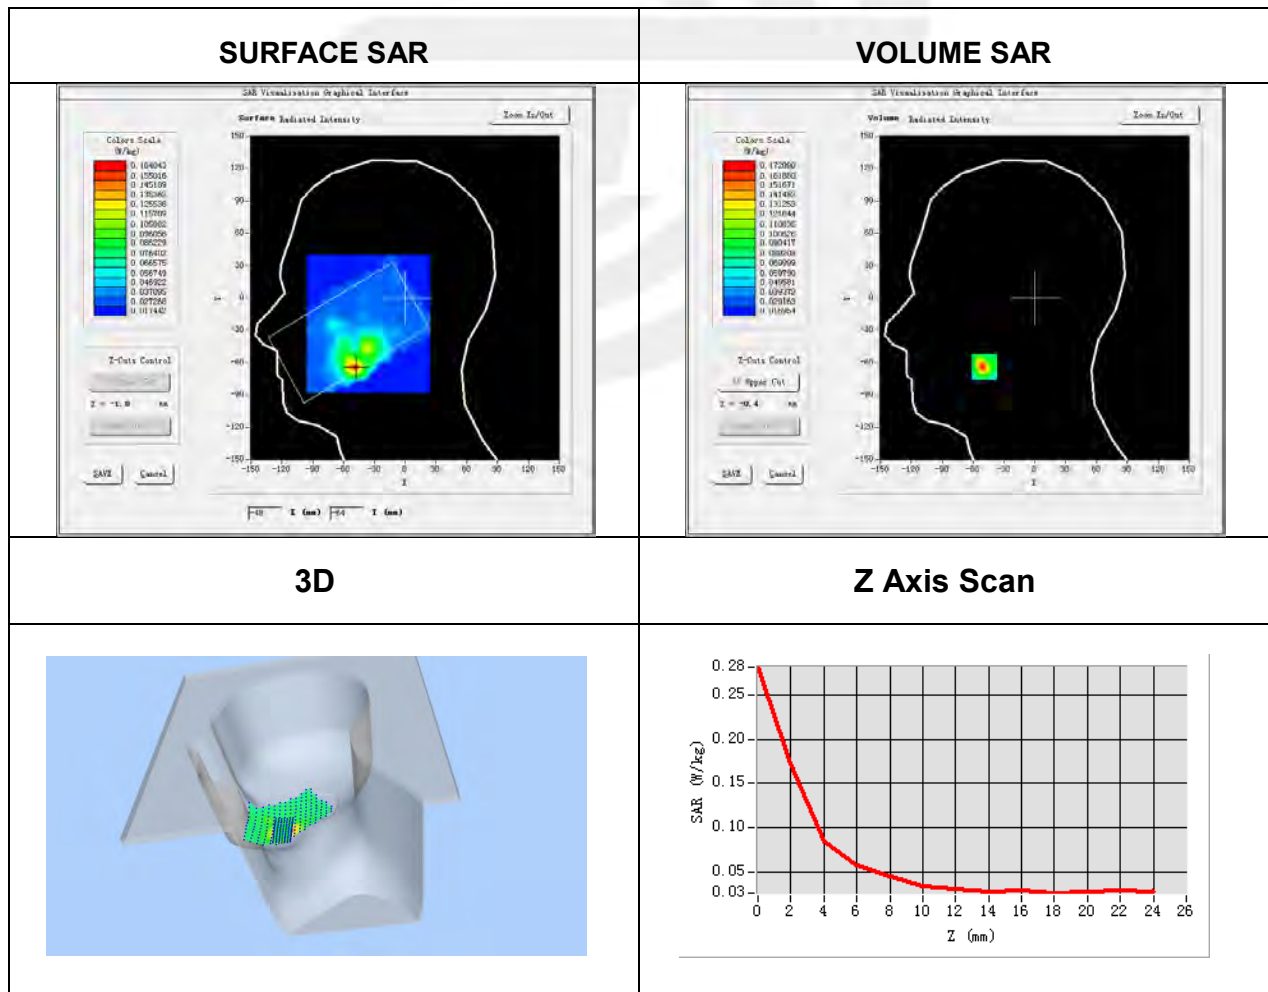


Plot 14: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Edge
Band	802.11 n-HT20
Channels	Low
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	35.79
Conductivity (S/m)	4.52

Maximum location: X=10.00, Y=-15.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.042566
SAR 1g (W/Kg)	0.078005

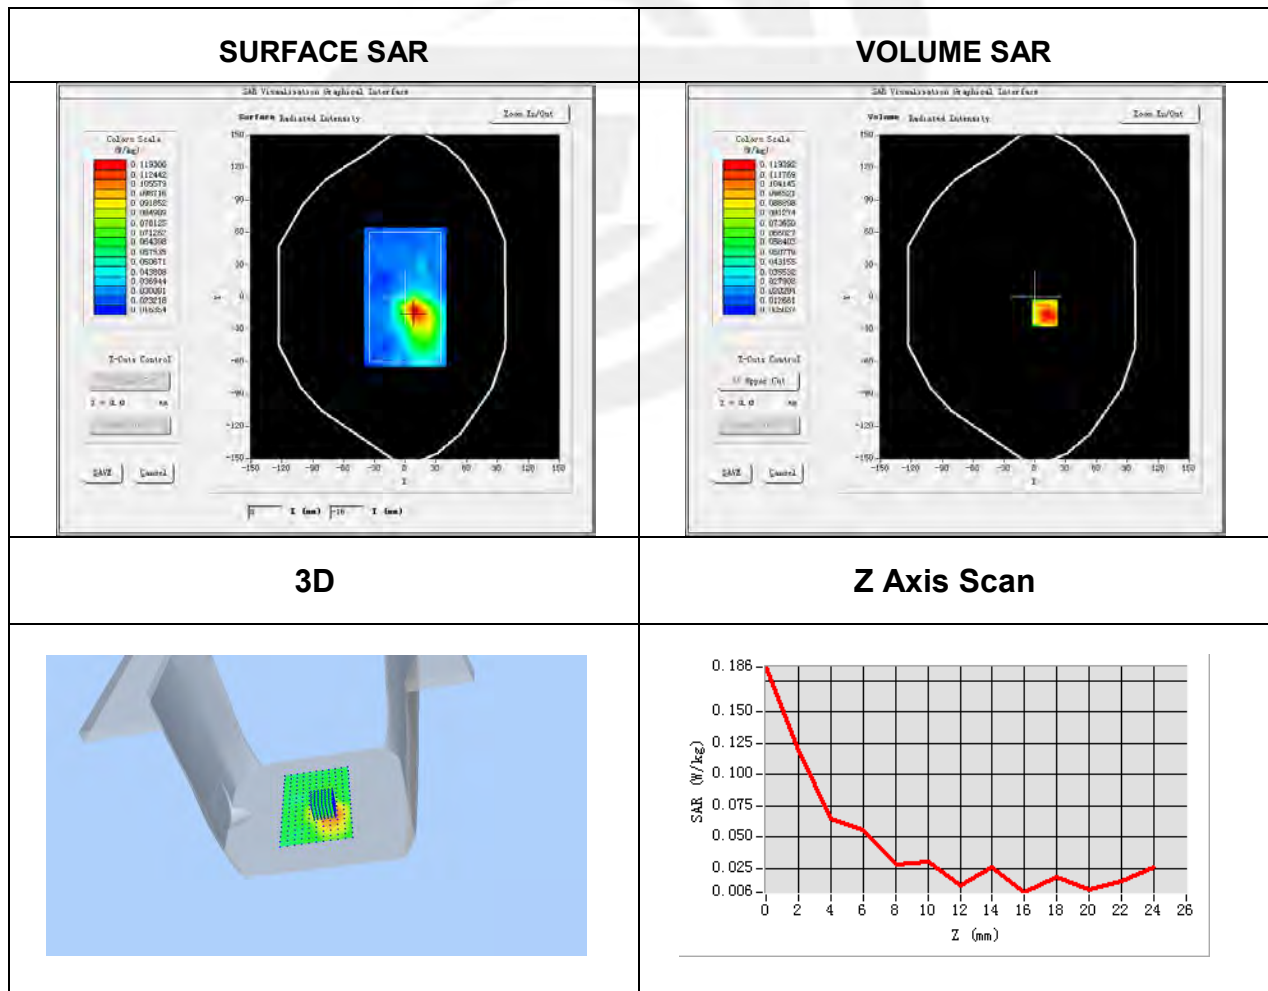


**Plot 15: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1**

Test Date	2021-12-13
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	802.11 n-HT20
Channels	Low
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5260
Relative permittivity (real part)	35.78
Conductivity (S/m)	4.73

Maximum location: X=-50.00, Y=-66.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.041284
SAR 1g (W/Kg)	0.077691

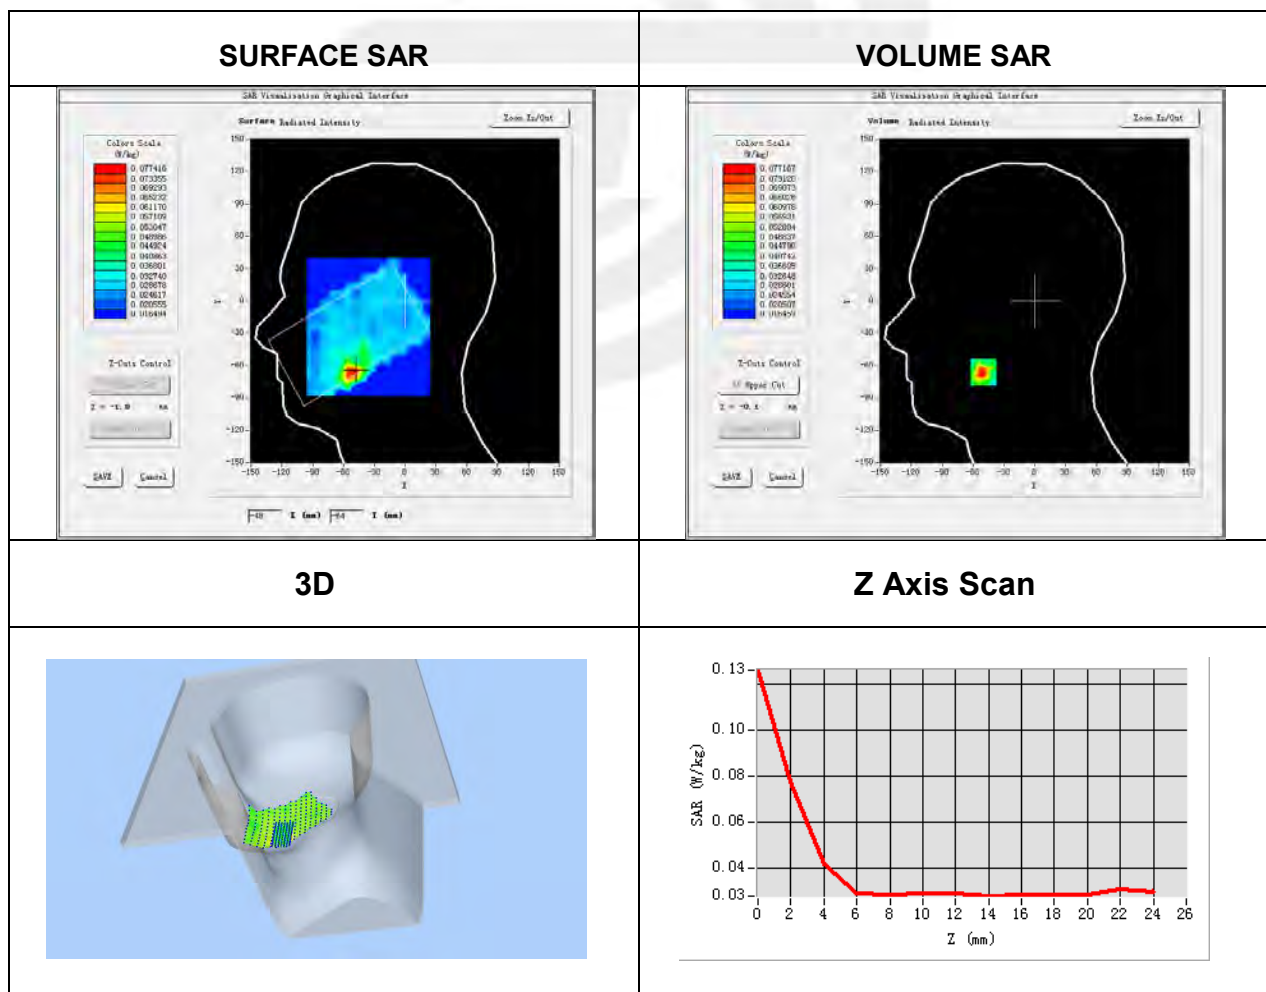


Plot 16: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-13
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	802.11 n-HT20
Channels	Low
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5260
Relative permittivity (real part)	35.78
Conductivity (S/m)	4.73

Maximum location: X=0.00, Y=-8.00

SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.020969
SAR 1g (W/Kg)	0.024275

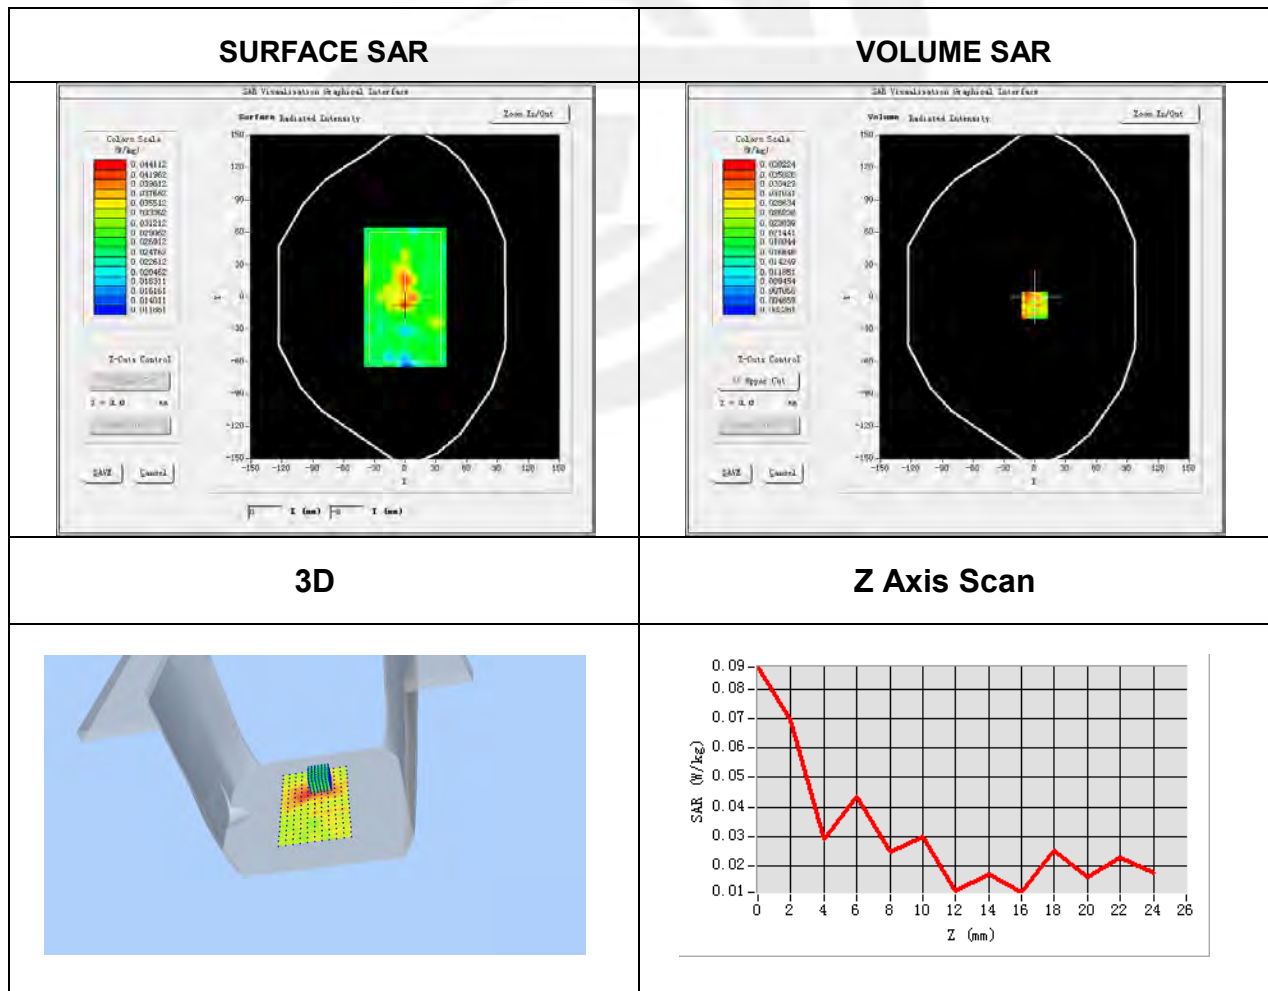



Plot 17: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-15
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	802.11 n-HT20
Channels	High
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	34.78
Conductivity (S/m)	5.27

Maximum location: X=-56.00, Y=-57.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.058928
SAR 1g (W/Kg)	0.130252

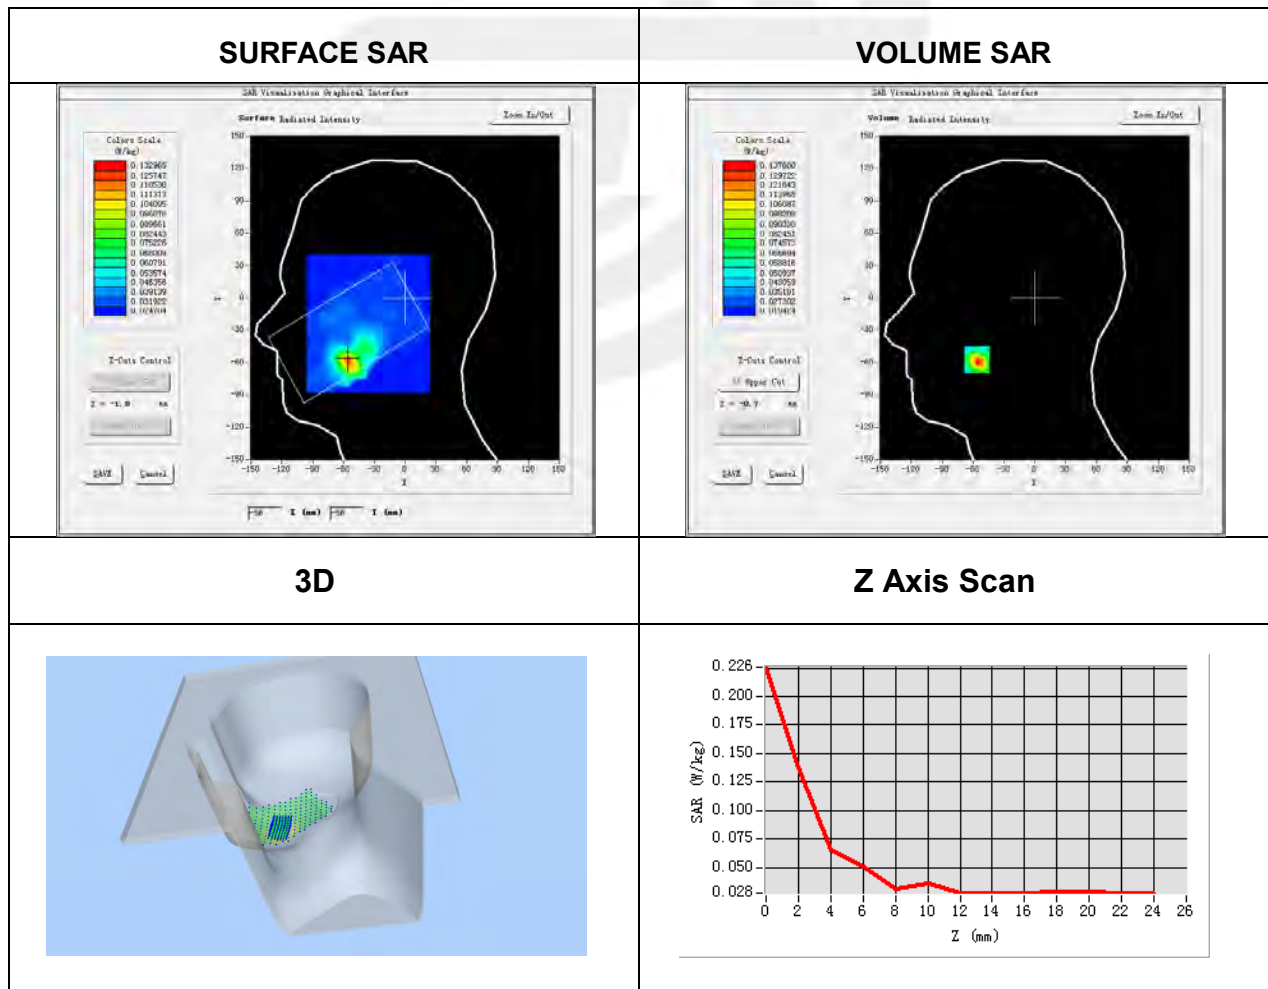



Plot 18: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-15
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	802.11 n-HT20
Channels	High
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	34.78
Conductivity (S/m)	5.27

Maximum location: X=-9.00, Y=15.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.045245
SAR 1g (W/Kg)	0.073080

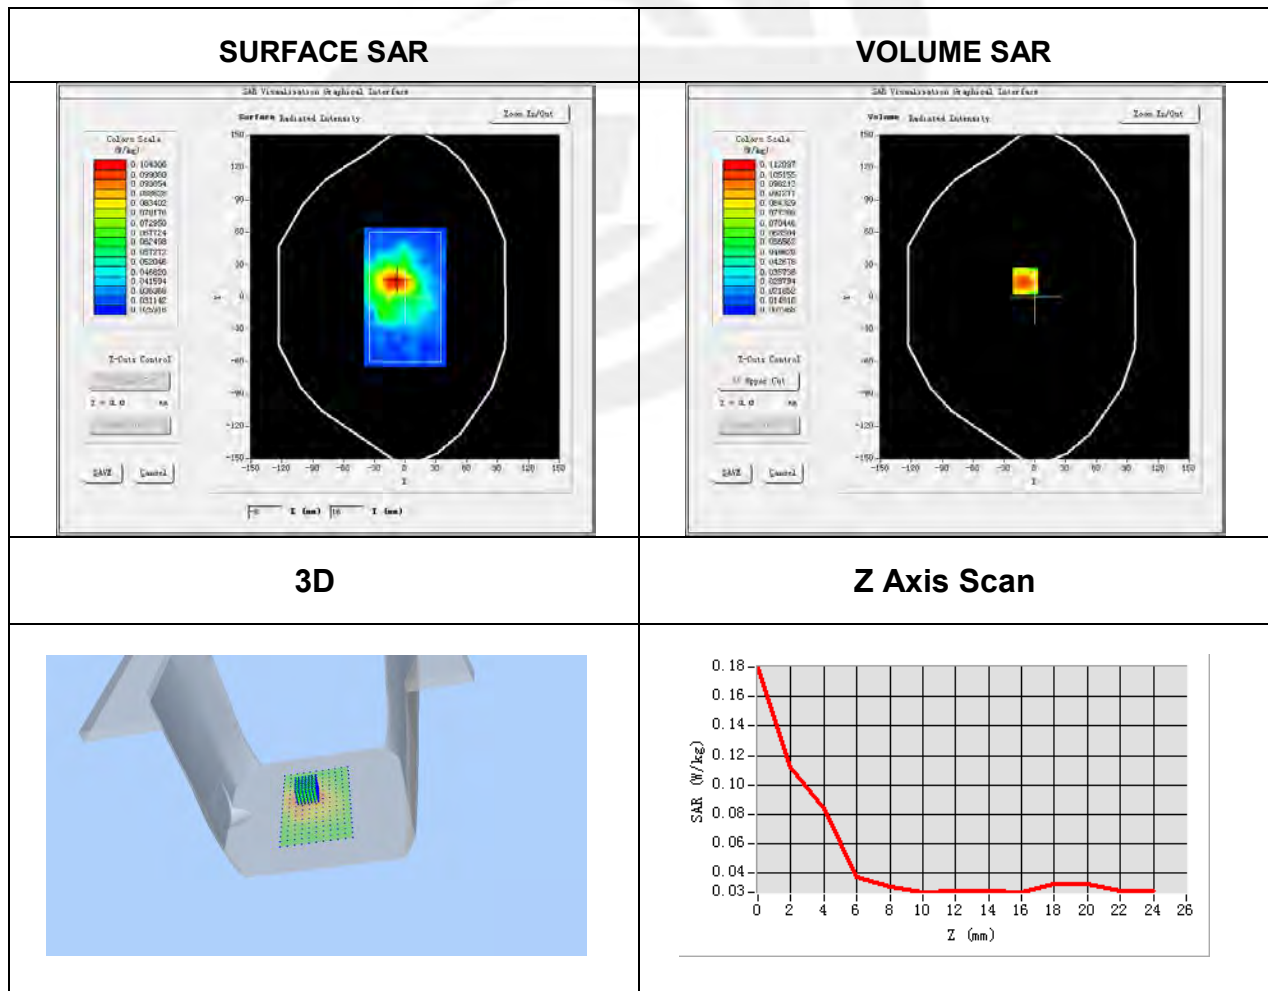


Plot 19: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-10
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 2 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	40.67
Conductivity (S/m)	1.43

Maximum location: X=-74.00, Y=-59.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.196008
SAR 1g (W/Kg)	0.287572

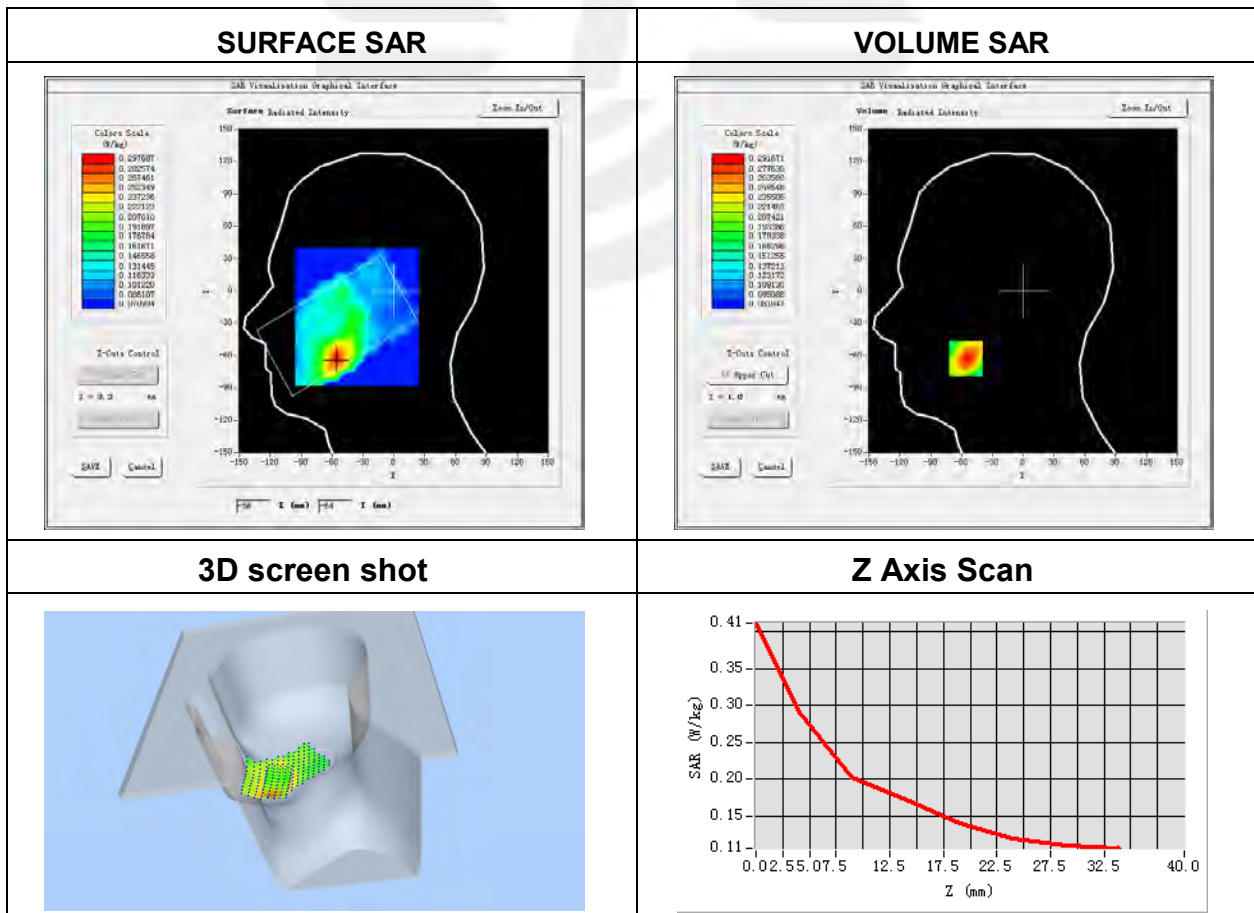


Plot 20: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-12-10
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 2(RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	40.67
Conductivity (S/m)	1.43

Maximum location: X=7.00, Y=11.00

SAR Peak: 1.09 W/kg

SAR 10g (W/Kg)	0.417513
SAR 1g (W/Kg)	0.720915

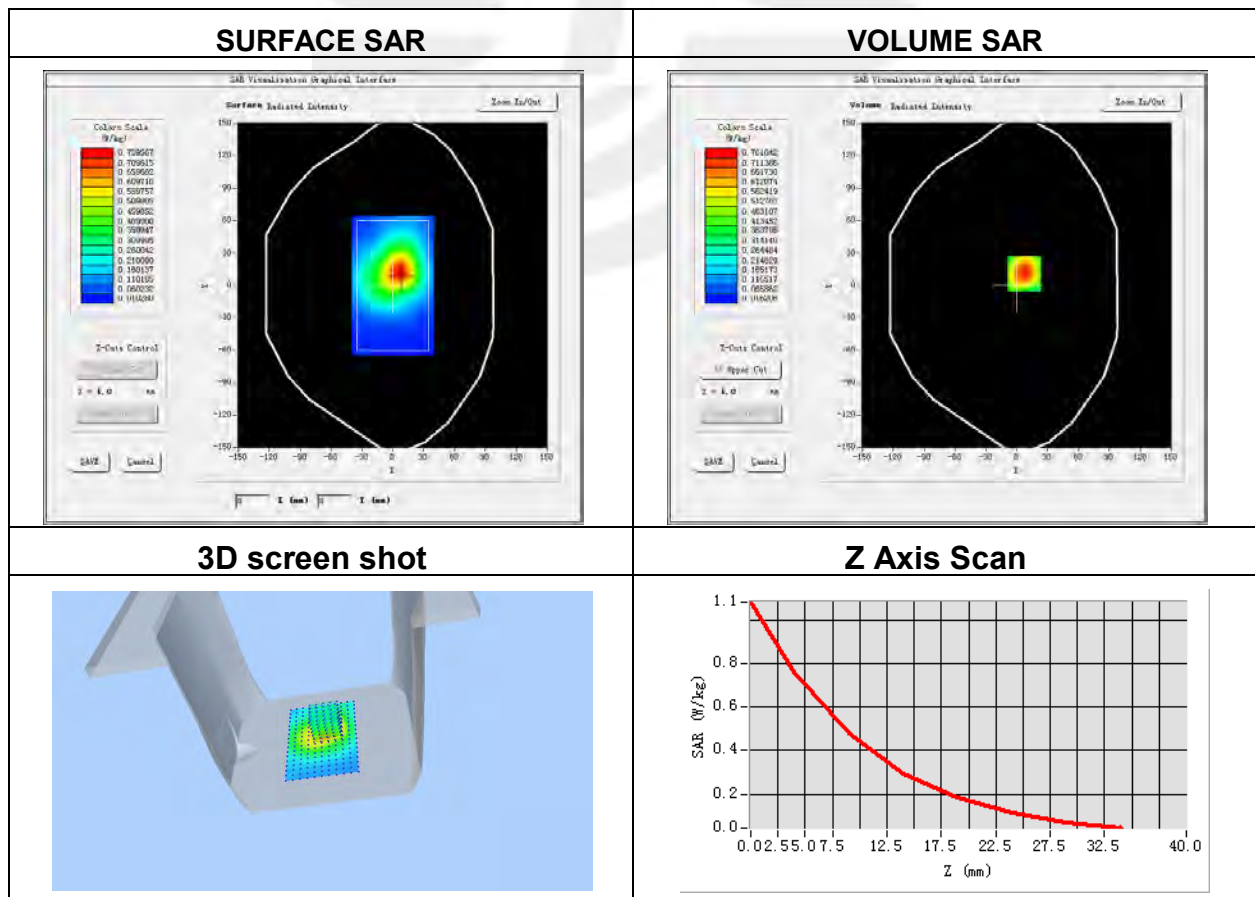


Plot 21: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-28
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 4 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	40.85
Conductivity (S/m)	1.32

Maximum location: X=-77.00, Y=-62.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.109876
SAR 1g (W/Kg)	0.176633

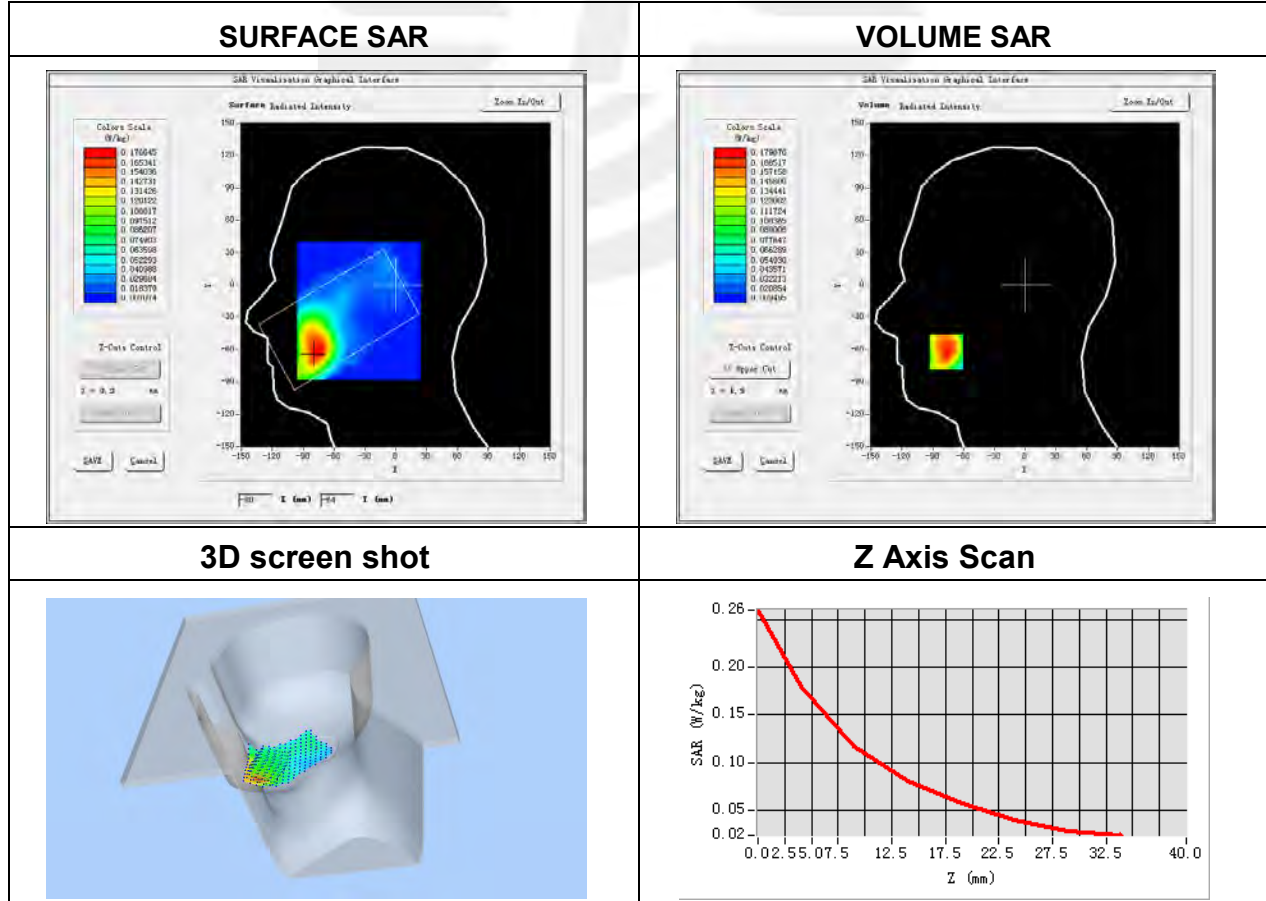



Plot 22: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-28
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 4 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	40.85
Conductivity (S/m)	1.32

Maximum location: X=9.00, Y=17.00

SAR Peak: 1.15 W/kg

SAR 10g (W/Kg)	0.489517
SAR 1g (W/Kg)	0.798954

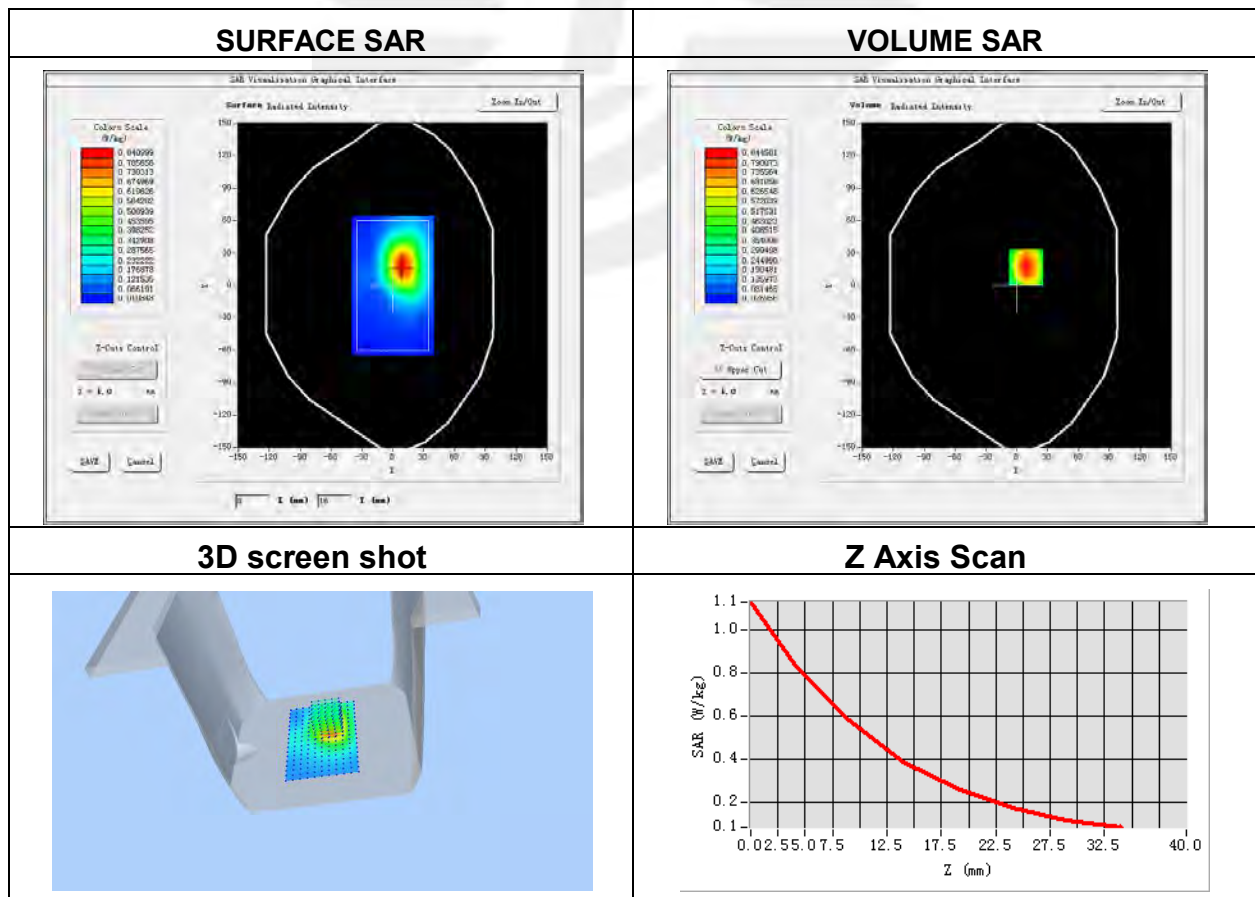


Plot 23: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-27
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	41.96
Conductivity (S/m)	0.89

Maximum location: X=-43.00, Y=-40.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.138449
SAR 1g (W/Kg)	0.232000

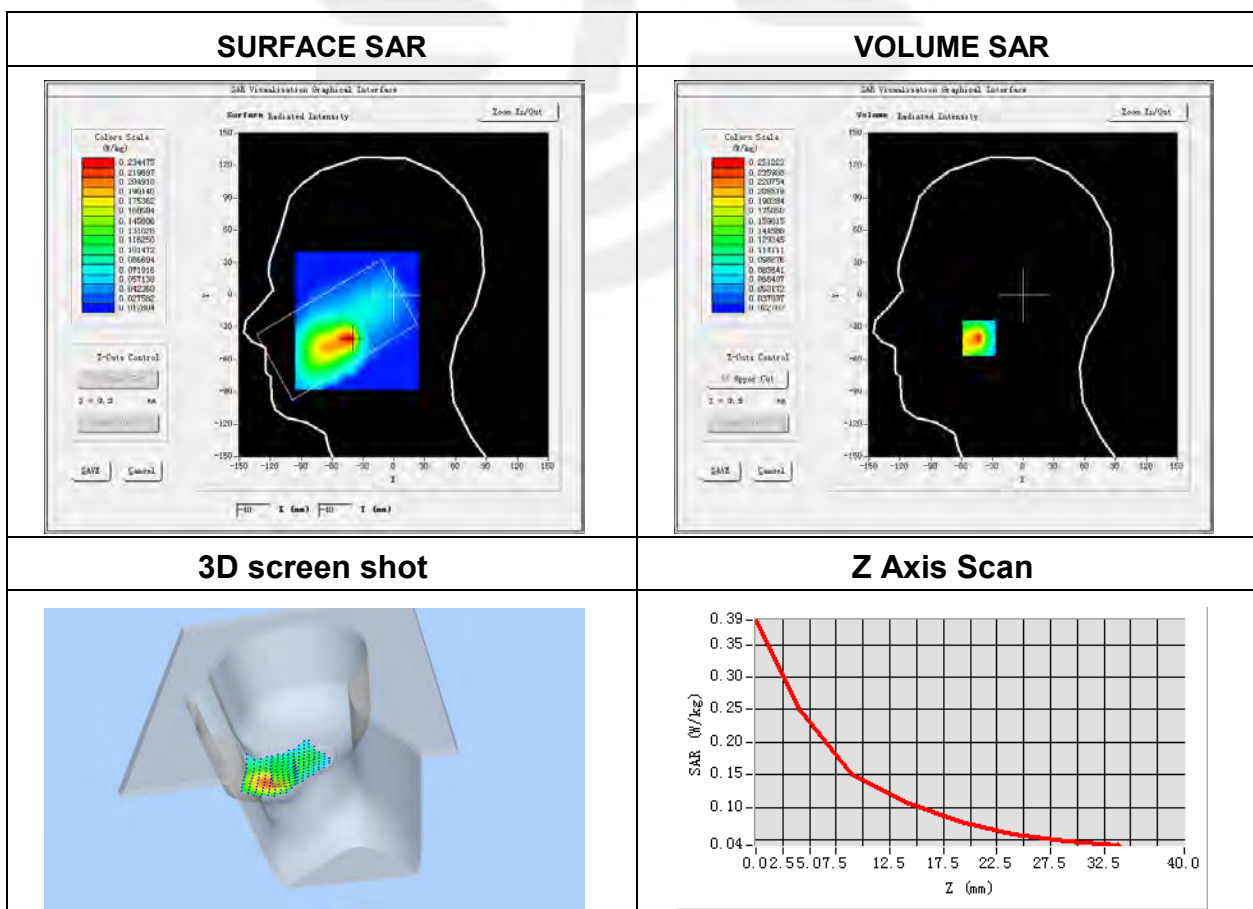


Plot 24: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-27
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	41.96
Conductivity (S/m)	0.89

Maximum location: X=-6.00, Y=-1.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.129153
SAR 1g (W/Kg)	0.174944

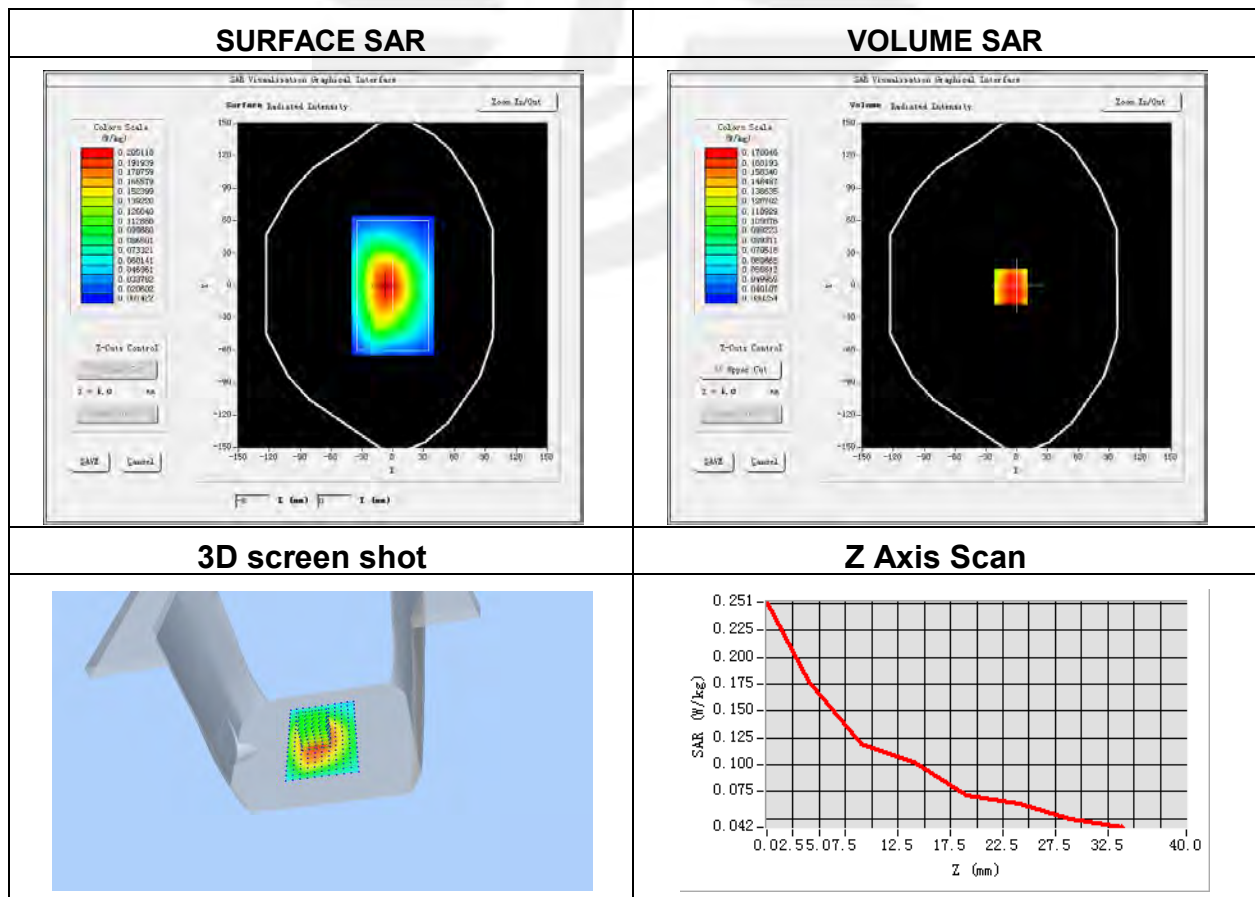


**Plot 25: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1**

Test Date	2021-11-27
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 12 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711
Relative permittivity (real part)	42.24
Conductivity (S/m)	0.91

Maximum location: X=-56.00, Y=-41.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.109763
SAR 1g (W/Kg)	0.191308

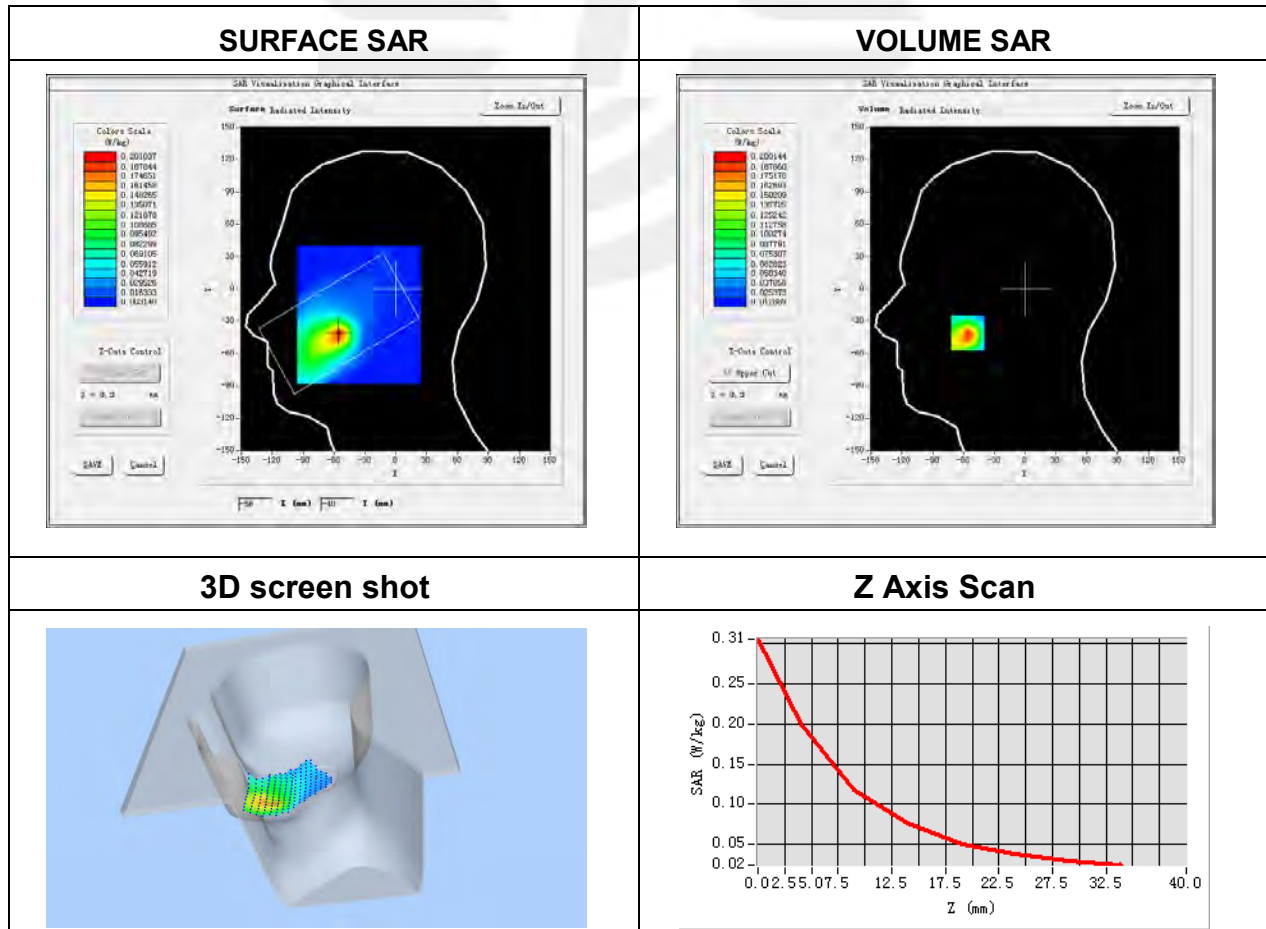


Plot 26: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-27
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711
Relative permittivity (real part)	42.24
Conductivity (S/m)	0.91

Maximum location: X=-2.00, Y=19.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.070874
SAR 1g (W/Kg)	0.096073

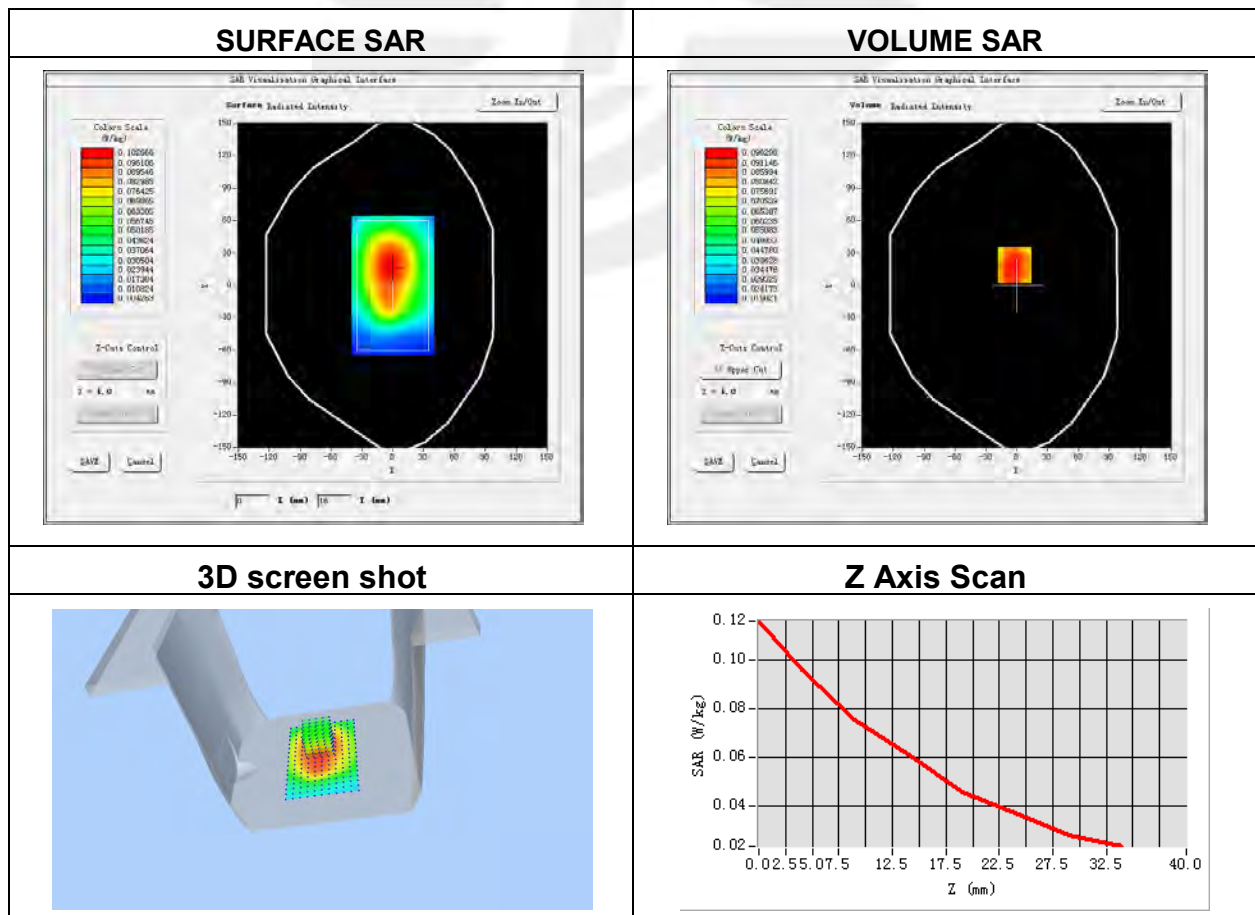


Plot 27: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-28
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 66 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	38.97
Conductivity (S/m)	1.37

Maximum location: X=-79.00, Y=-54.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.135768
SAR 1g (W/Kg)	0.221266

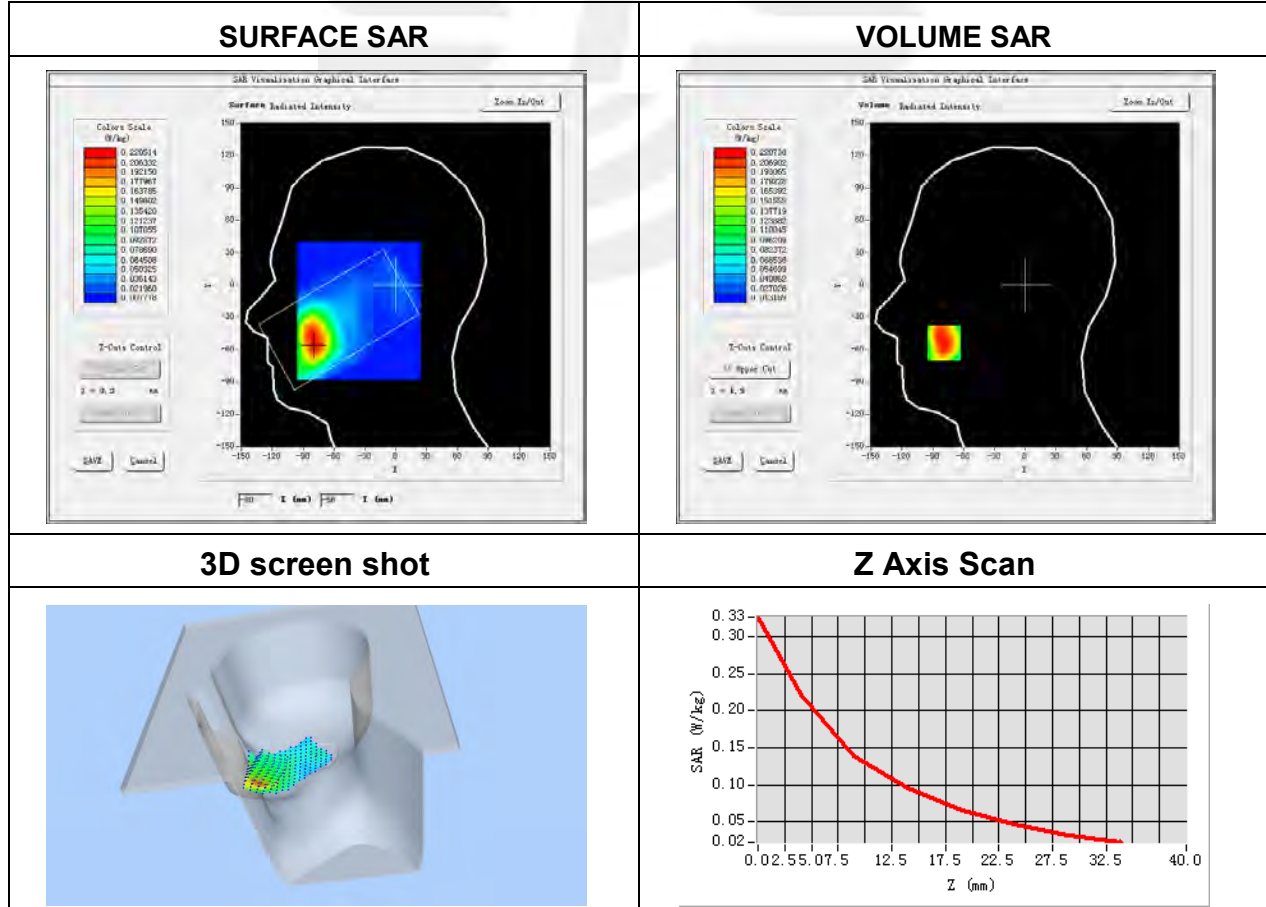


Plot 28: DUT: 4G senior phone; EUT Model: Snapfön ezFlip 4G v1.1

Test Date	2021-11-28
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	38.97
Conductivity (S/m)	1.37

Maximum location: X=9.00, Y=17.00

SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.536265
SAR 1g (W/Kg)	0.887307

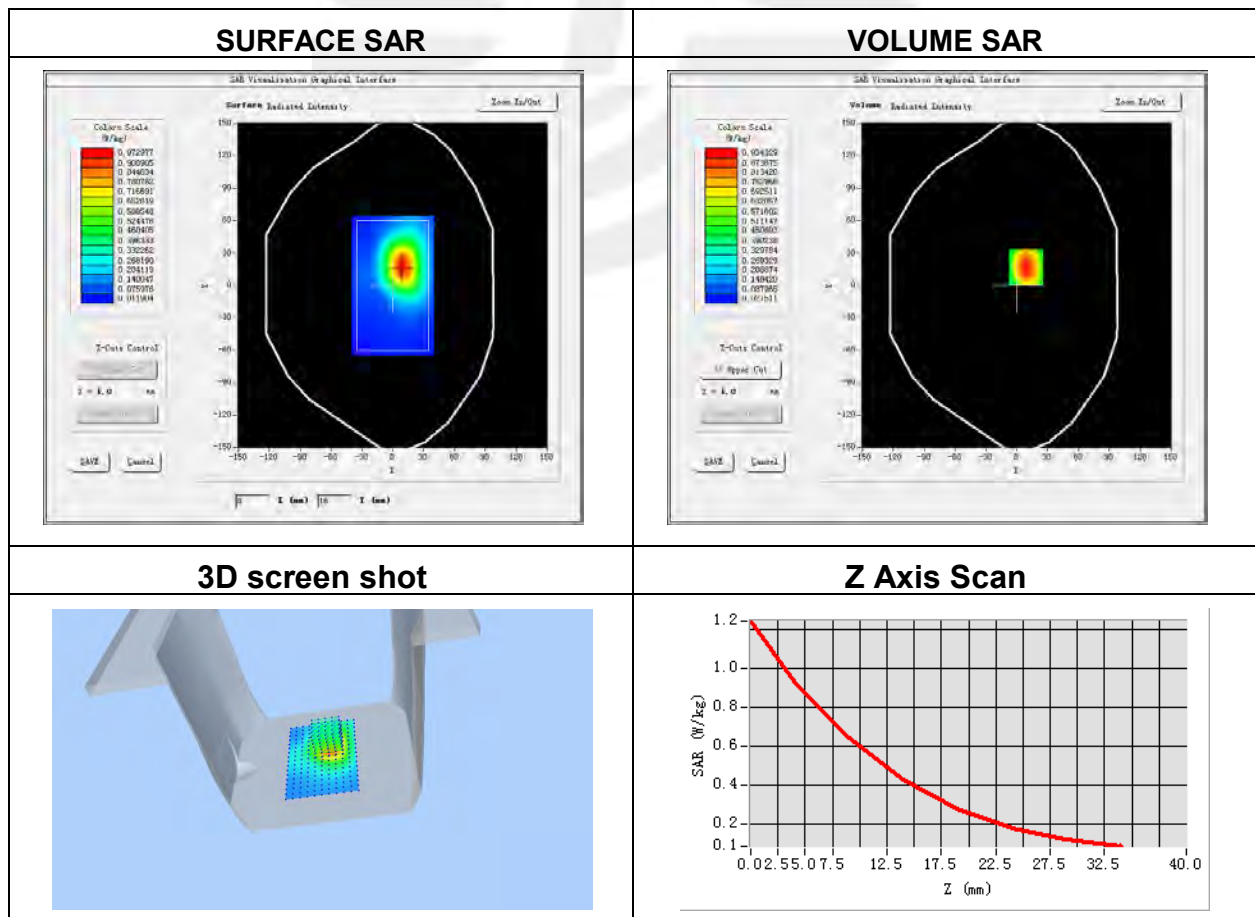



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※※

