

TEST REPORT

of

FCC Part 15 Subpart C AND CANADA RSS-247

New Application; Class I PC; Class II PC

Equipment Under Test: TASYL Track USB Memory stick

Brand: TASYL

Product name: P1MSBT

Model name: P1MSBT01; P1MSBT02

Product differences: Memory capacity (16GB/32GB/64Gb/128GB); Future color SKU's available but same plastic material, detail information refer to section 1.

FCC ID: 2AW5P-P1MSBT01

IC: 26402-P1MSBT01

FCC Rule Part: §15.247, Cat: DTS

IC Rule Part: RSS-247 issue 2: 2017

RSS-Gen issue 5: 2018

Applicant: Taranga Systems Limited

Address: Kemp House,152 - 160 City Road,London EC1V 2NX,United Kingdom

Test Performed by:

International Standards Laboratory Corp.

<LT Lab.>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW0997; TAF: 0997; IC: IC4067B-4

*Address:

No. 120, Lane 180, Hsin Ho Rd.

Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-20LR230FC

Issue Date : 2020/09/11

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

The uncertainty of the measurement does not include in consideration of the test result unless the customer required the determination of uncertainty via the agreement, regulation or standard document specification.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.



VERIFICATION OF COMPLIANCE

Applicant: Taranga Systems Limited

Equipment Under Test: TASYL Track USB Memory stick

Brand: TASYL

Product name: P1MSBT

Model name: P1MSBT01; P1MSBT02

Product differences: Memory capacity (16GB/32GB/64Gb/128GB); Future color SKU's available but same plastic material, detail information refer to section 1.

FCC ID: 2AW5P-P1MSBT01

IC: 26402-P1MSBT01

Date of test: 2020/08/03 ~ 2020/09/10

Date of EUT Received: 2020/08/03

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:

Weitin Chen

Date:

2020/09/11

Weitin Lee / Senior Engineer

Prepared By:

Gigi yeh

Date:

2020/09/11

Gigi Yeh / Senior Engineer

Approved By:

Jerry Liu

Date:

2020/09/11

Jerry Liu / Technical Manager

Version

| Version No. | Date | Description |
|-------------|------------|------------------------------|
| 00 | 2020/09/11 | Initial creation of document |
| | | |

Uncertainty of Measurement

| Description Of Test | Uncertainty |
|---------------------------------------|---|
| Conducted Emission (AC power line) | 2.586 dB |
| Field Strength of Spurious Radiation | ≤30MHz: 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB |
| Conducted Power | 2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB |
| Power Density | 2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB |
| Frequency | 0.0032% |
| Time | 0.01% |
| DC Voltage | 1% |

Table of Contents

| | | |
|-----------|---|-----------|
| 1 | General Information | 6 |
| 1.1 | Related Submittal(s) / Grant (s) | 8 |
| 1.2 | Test Methodology | 8 |
| 1.3 | Test Facility..... | 8 |
| 1.4 | Special Accessories..... | 8 |
| 1.5 | Equipment Modifications..... | 8 |
| 2 | System Test Configuration | 9 |
| 2.1 | EUT Configuration | 9 |
| 2.2 | EUT Exercise | 9 |
| 2.3 | Test Procedure..... | 9 |
| 2.4 | Configuration of Tested System..... | 10 |
| 3 | Summary of Test Results | 11 |
| 4 | Description of Test Modes | 11 |
| 5 | Conduced Emission Test | 12 |
| 5.1 | Standard Applicable: | 12 |
| 5.2 | Measurement Equipment Used: | 12 |
| 5.3 | EUT Setup: | 12 |
| 5.4 | Measurement Procedure: | 13 |
| 5.5 | Measurement Result: | 13 |
| 6 | Peak Output Power Measurement | 16 |
| 6.1 | Standard Applicable: | 16 |
| 6.2 | Measurement Equipment Used: | 17 |
| 6.3 | Test Set-up: | 17 |
| 6.4 | Measurement Procedure: | 17 |
| 6.5 | Measurement Result: | 18 |
| 7 | 6dB Bandwidth & 99% Bandwidth | 19 |
| 7.1 | Standard Applicable: | 19 |
| 7.2 | Measurement Equipment Used: | 19 |
| 7.3 | Test Set-up: | 19 |
| 7.4 | Measurement Procedure: | 19 |
| 7.5 | Measurement Result: | 20 |
| 8 | Spurious Radiated Emission Test | 27 |
| 8.1 | Standard Applicable | 27 |
| 8.2 | Measurement Equipment Used: | 28 |
| 8.3 | Test SET-UP: | 29 |
| 8.4 | Measurement Procedure: | 30 |
| 8.5 | Field Strength Calculation | 31 |
| 8.6 | Measurement Result: | 31 |
| 9 | 100kHz Bandwidth of Band Edges Measurement | 41 |
| 9.1 | Standard Applicable: | 41 |
| 9.2 | Measurement Equipment Used: | 41 |
| 9.3 | Test SET-UP: | 41 |
| 9.4 | Measurement Procedure: | 41 |
| 9.5 | Field Strength Calculation: | 41 |
| 9.6 | Measurement Result: | 41 |
| 10 | Peak Power Spectral Density | 46 |
| 10.1 | Standard Applicable: | 46 |
| 10.2 | Measurement Equipment Used: | 46 |
| 10.3 | Test Set-up: | 46 |

| | | |
|-----------|---------------------------------------|-----------|
| 10.4 | Measurement Procedure: | 46 |
| 10.5 | Measurement Result: | 46 |
| 11 | Antenna Requirement | 50 |
| 11.1 | Standard Applicable: | 50 |
| 11.2 | Antenna Connected Construction: | 50 |

1 General Information

General:

| | |
|-----------------------|------------------------------|
| Equipment Under Test: | TASYL Track USB Memory stick |
| Brand: | TASYL |
| Product name: | P1MSBT |
| Model name: | P1MSBT01; P1MSBT02 |
| Power Supply: | 5Vdc by USB port |

IC RSS-Gen:

| | |
|---|--|
| Product SW/HW version | P2.1 (Product HW version) |
| Radio SW/HW version | S140 v7.2.0 (Radio SW version) |
| PMN (Product Marketing Name) | P1MSBT |
| HVIN (Hardware Version Identification Number) | P1MSBT01 HVIN: P1.1 P1MSBT02 HVIN: P2.1 |
| FVIN (Firmware Version Identification Number) | N/A |
| Test SoftWare Version | W1952 |
| RF power setting: | 7 |

Bluetooth:

| | |
|----------------------|------------------------|
| Frequency Range: | 2402 – 2480MHz |
| Bluetooth Version: | V5.0 |
| Channel number: | 40 channels, 2MHz step |
| Modulation type | GFSK |
| Tune-up power | 8 dBm |
| Power Tolerance: | +/-0 dBm |
| Dwell Time: | N/A |
| Antenna Designation: | Chip Antennas, 0.5dBi |


Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Different model name:

| Product Series | P1MSBT | |
|-----------------------------------|--------------------------------|---|
| Product Model Number -> | P1MSBT01 | P1MSBT02 |
| Description -> | Standard USB 3.0 Flash Drive | USB 3.0 Flash Drive with hardware AES 256 Bit Encryption Decryption Capability. |
| PCBA Number -> | P091809FS0000M1A | B091916ES0000H3A-V2 |
| USB 3.0 Controller IC -> | PS2251 | |
| Flash Memory Type -> | Raw NAND (Bics3 NAND Flash) | eMMC (3D TLC Flash) |
| Bare PCB Dimensions -> | Identical | |
| Bluetooth Circuitry -> | Identical | |
| Memory size SKU range -> | 16GB - 128GB (for both) | |
| Product Plastics -> | Identical | |
| Screen print paint on plastics -> | No text on upper body plastic. | Some text screen printed on upper body plastic for marketing purposes. |

P1MSBT01 (Standard)

P1MSBT02 (Hardware Crpto Engine)

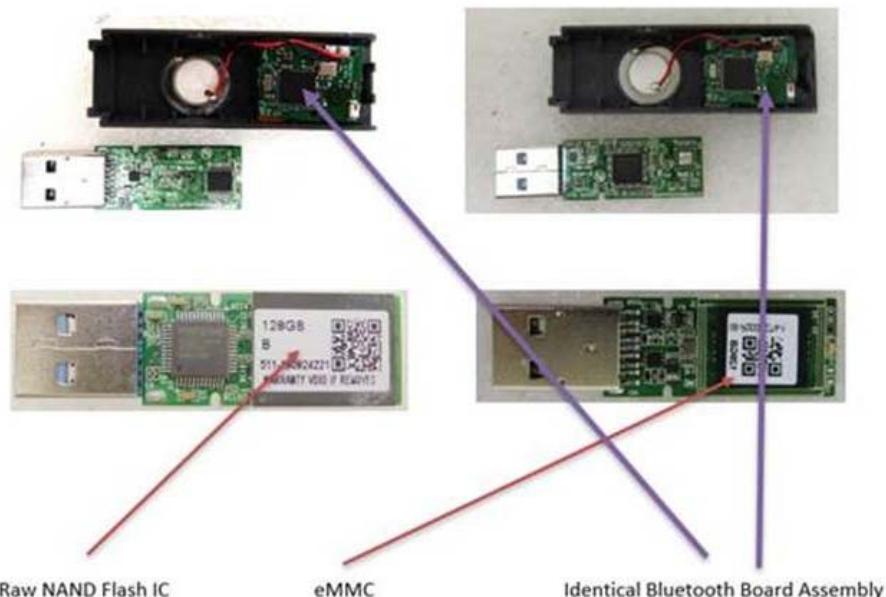

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AW5P-P1MSBT01** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and **IC: 26402-P1MSBT01** filing to comply with Industry Canada RSS-247 issue 2: 2017.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 15.247 Meas Guidance v05r02.

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory Corp.** <LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10: 2013. FCC Registration Number is: 487532; Designation Number is: TW0997, Canada Registration Number: 4067B-4.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 6 and RSS-Gen Issue 5, Amendment 1: 2019. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8/1.5 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” Is still within the 3dB illumination BW of the measurement antenna. According to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration

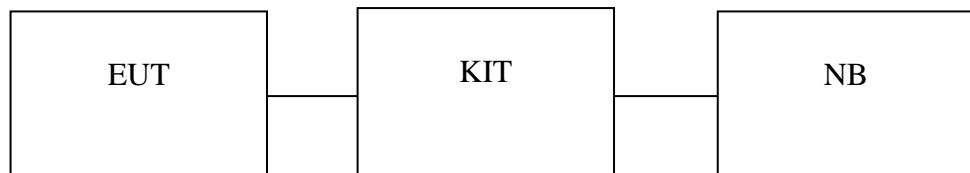


Table 2-1 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/ Type No. | Series No. | Data Cable | Power Cord |
|------|-----------|-----------|--------------------|------------|------------|------------|
| 1 | NB | ASUS | P2420L | NA | 180cm | 180cm |

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

3 Summary of Test Results

| FCC Rules | Description Of Test | Result | Test Model |
|---|---|-----------|----------------------|
| §15.207(a) RSS-Gen §8.8 | AC Power Line Conducted Emission | Compliant | P1MSBT01 |
| §15.247(b) (3),(4) RSS-247 issue 2,§5.4(4) | Peak Output Power/ EIRP | Compliant | P1MSBT01 |
| §15.247(a)(2) RSS-247 issue 2, §5.2(1) RSS-Gen §6.6 | 6dB & 99% Power Bandwidth | Compliant | P1MSBT01 |
| §15.247(d) RSS-247 issue 2, §5.5 | 100 kHz Bandwidth Of Frequency Band Edges | Compliant | P1MSBT01 |
| §15.247(d) RSS-247 issue 2, §5.5 | Spurious Emission | Compliant | P1MSBT01 P1MSBT02 |
| §15.247(e) RSS-247 issue 2, §5.2(2) | Peak Power Density | Compliant | P1MSBT01 |
| §15.203 RSS-GEN 8.3 | Antenna Requirement | Compliant | P1MSBT01 |

4 Description of Test Modes

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

BT LE mode: Channel low (2402MHz), mid (2442MHz) and high (2480MHz) are chosen for full testing.

Note: the difference between main, and serial model is flash drive. The main has been completed all the test item, while serial model has RSE below 1GHz retested only.

5 Conduced Emission Test

5.1 Standard Applicable:

According to §15.207 and RSS-Gen §7.2.4, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

| Frequency range MHz | Limits dB(uV) | |
|------------------------|------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

| Location Con03 | Equipment Name | Brand | Model | S/N | Last Cal. Date | Next Cal. Date |
|-------------------|-----------------------------|-----------------|------------|--------------------|-------------------|-------------------|
| Conduction 03 | EMI Receiver 15 | ROHDE & SCHWARZ | ESCI | 101166 | 07/29/2020 | 07/29/2021 |
| Conduction 03 | ISN T4 09 | Teseq GmbH | ISN T400A | 49914 | 08/10/2020 | 08/10/2021 |
| Conduction 03 | ISNT8 09 | Teseq GmbH | ISN T800 | 36190 | 09/20/2019 | 09/20/2020 |
| Conduction 03 | LISN 15 | R&S | ENV216 | 101335 | 12/12/2019 | 12/12/2020 |
| Conduction 03 | LISN 22 | R&S | ENV216 | 101478 | 08/10/2020 | 08/10/2021 |
| Conduction 03 | Conduction 04-3 Cable | WOKEN | CFD 300-NL | conduction 04-3 | 08/29/2020 | 08/29/2021 |
| Conduction 03 | Capacitive Voltage Probe | FCC | F-CVP-1 | 68 | 01/17/2020 | 01/17/2021 |
| Conduction 03 | Current Probe | SCHAFFNER | SMZ 11 | 18030 | 01/17/2020 | 01/17/2021 |

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10-2013.
2. The AC/DC Power adaptor of PC was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:


1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.
4. Both 120V & 240V have been verified, and 120V/60Hz was defined as the worst-case and record in the report.

5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.


Test model No.: P1MSBT01

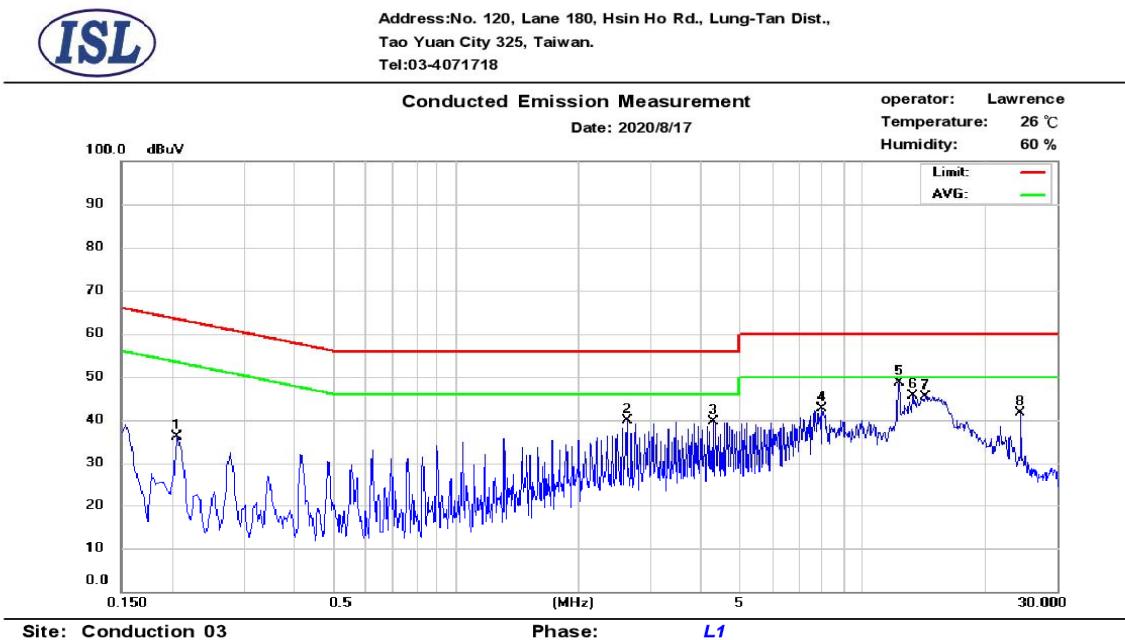

| No. | Frequency (MHz) | QP_R (dBuV) | AVG_R (dBuV) | Correct Factor (dB) | QP Emission (dBuV) | QP Limit (dBuV) | QP Margin (dB) | AVG Emission (dBuV) | AVG Limit (dBuV) | AVG Margin (dB) |
|-----|-----------------|-------------|--------------|---------------------|--------------------|-----------------|----------------|---------------------|------------------|-----------------|
| 1 | 0.206 | 25.12 | 22.61 | 9.62 | 34.74 | 63.37 | -28.63 | 32.23 | 53.37 | -21.14 |
| 2 | 2.626 | 28.52 | 25.96 | 9.70 | 38.22 | 56.00 | -17.78 | 35.66 | 46.00 | -10.34 |
| 3 | 4.286 | 28.80 | 28.34 | 9.74 | 38.54 | 56.00 | -17.46 | 38.08 | 46.00 | -7.92 |
| 4 | 7.950 | 31.32 | 28.98 | 9.83 | 41.15 | 60.00 | -18.85 | 38.81 | 50.00 | -11.19 |
| 5 | 12.278 | 34.56 | 31.45 | 9.90 | 44.46 | 60.00 | -15.54 | 41.35 | 50.00 | -8.65 |
| 6 | 13.318 | 31.70 | 26.36 | 9.91 | 41.61 | 60.00 | -18.39 | 36.27 | 50.00 | -13.73 |
| 7 | 14.214 | 31.52 | 26.24 | 9.91 | 41.43 | 60.00 | -18.57 | 36.15 | 50.00 | -13.85 |
| 8 | 24.494 | 30.49 | 26.03 | 10.00 | 40.49 | 60.00 | -19.51 | 36.03 | 50.00 | -13.97 |



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
 Tao Yuan City 325, Taiwan.
 Tel: 03-4071718

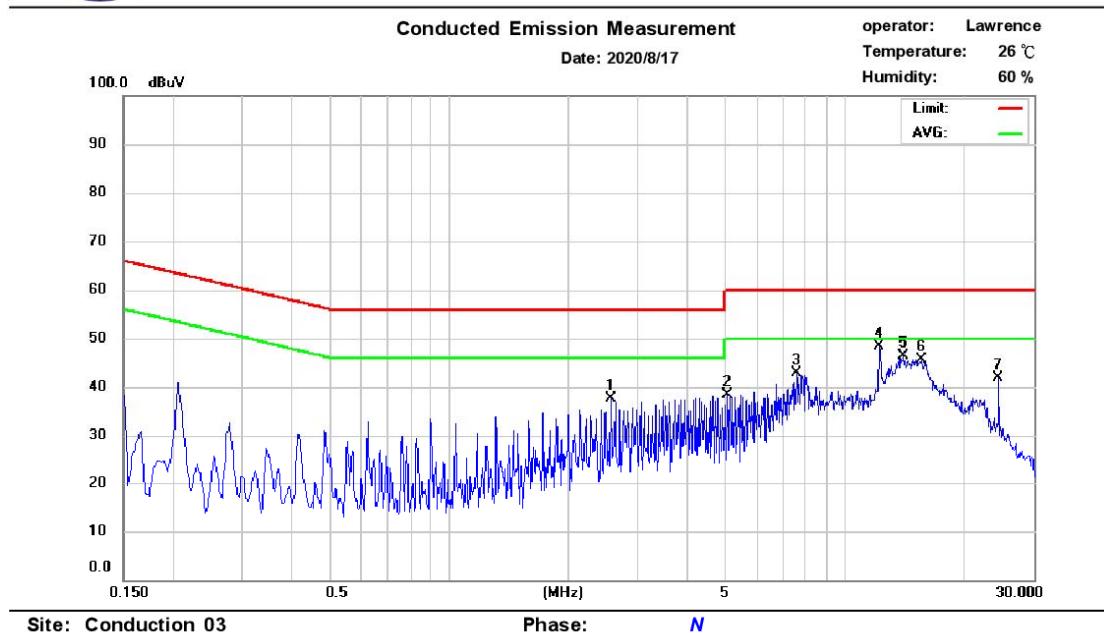

| No. | Frequency (MHz) | QP_R (dBuV) | AVG_R (dBuV) | Correct Factor (dB) | QP Emission (dBuV) | QP Limit (dBuV) | QP Margin (dB) | AVG Emission (dBuV) | AVG Limit (dBuV) | AVG Margin (dB) |
|-----|-----------------|-------------|--------------|---------------------|--------------------|-----------------|----------------|---------------------|------------------|-----------------|
| 1 | 2.558 | 26.90 | 24.50 | 9.71 | 36.61 | 56.00 | -19.39 | 34.21 | 46.00 | -11.79 |
| 2 | 5.046 | 27.66 | 27.18 | 9.78 | 37.44 | 60.00 | -22.56 | 36.96 | 50.00 | -13.04 |
| 3 | 7.534 | 30.50 | 28.89 | 9.83 | 40.33 | 60.00 | -19.67 | 38.72 | 50.00 | -11.28 |
| 4 | 12.242 | 33.98 | 26.41 | 9.92 | 43.90 | 60.00 | -16.10 | 36.33 | 50.00 | -13.67 |
| 5 | 14.082 | 32.57 | 27.18 | 9.94 | 42.51 | 60.00 | -17.49 | 37.12 | 50.00 | -12.88 |
| 6 | 15.694 | 31.94 | 26.71 | 9.95 | 41.89 | 60.00 | -18.11 | 36.66 | 50.00 | -13.34 |
| 7 | 24.494 | 30.82 | 26.49 | 10.03 | 40.85 | 60.00 | -19.15 | 36.52 | 50.00 | -13.48 |

6 Peak Output Power Measurement

6.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

According to RSS-247 issue 2,§5.4


(4) For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

6.2 Measurement Equipment Used:

| Location Conducted | Equipment Name | Brand | Model | S/N | Last Cal. Date | Next Cal. Date |
|--------------------|------------------------------|-------------|-------------------------|-----------------------|----------------|----------------|
| Conducted | Power Meter | Anritsu | ML2495A | 1116010 | 10/04/2019 | 10/04/2020 |
| Conducted | Power Sensor | Anritsu | MA2411B | 34NKF50 | 10/04/2019 | 10/04/2020 |
| Conducted | Power Sensor | DARE | RPR3006W | 13I00030SNO33 | 01/03/2020 | 01/03/2021 |
| Conducted | Power Sensor | DARE | RPR3006W | 13I00030SNO34 | 01/09/2020 | 01/09/2021 |
| Conducted | Power Sensor | DARE | RPR3006W | 14I00889SNO35 | 06/29/2020 | 06/29/2021 |
| Conducted | Power Sensor | DARE | RPR3006W | 14I00889SNO36 | 06/29/2020 | 06/29/2021 |
| Conducted | Temperature Chamber | KSON | THS-B4H100 | 2287 | 03/11/2020 | 03/11/2021 |
| Conducted | DC Power supply | ABM | 8185D | N/A | 01/03/2020 | 01/03/2021 |
| Conducted | AC Power supply | EXTECH | CFC105W | NA | N/A | N/A |
| Conducted | Spectrum analyzer | Keysight | N9010A | MY56070257 | 10/05/2019 | 10/05/2020 |
| Conducted | Spectrum analyzer | R&S | FSP40 | 100116 | 01/10/2020 | 01/10/2021 |
| Conducted | Test Software | DARE | Radiation Ver:2013.1.23 | NA | NA | NA |
| Conducted | Test Software | R&S | CMUGO Ver:2.0.0 | N/A | N/A | N/A |
| Conducted | Radio Communication Analyzer | R&S | CMU200 | 111968 | 11/29/2019 | 11/29/2020 |
| Conducted | Radio Communication Analyzer | R&S | CMW500 | 1201.002K501087 93-JG | 10/11/2019 | 10/11/2020 |
| Conducted | BT Simulator | Agilent | N4010A | MY48100200 | NA | NA |
| Conducted | GPS Simulator | Welnavigate | GS-50 | 701523 | NA | NA |

6.3 Test Set-up:

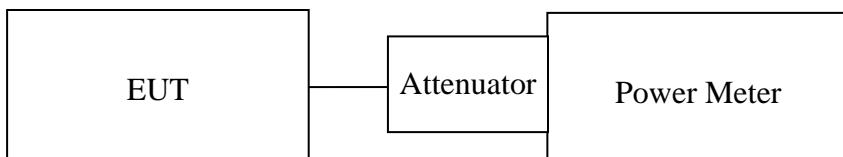

6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5 Measurement Result:

Test model No.: P1MSBT01

Peak Power

| Mode | Freq. (MHz) | Output Power (dBm) | Total Output Power (dBm) | Output Power Limit (dBm) |
|---------|----------------|--------------------|-----------------------------|-----------------------------|
| BLE 4.0 | 2402 | 7.536 | 7.54 | 30.00 |
| | 2442 | 7.645 | 7.65 | 30.00 |
| | 2480 | 7.924 | 7.92 | 30.00 |

Peak Power

| Mode | Freq. (MHz) | Output Power (dBm) | Total Output Power (dBm) | Output Power Limit (dBm) |
|---------|----------------|--------------------|-----------------------------|-----------------------------|
| BLE 5.0 | 2402 | 7.523 | 7.52 | 30.00 |
| | 2442 | 7.659 | 7.66 | 30.00 |
| | 2480 | 7.949 | 7.95 | 30.00 |

7 6dB Bandwidth & 99% Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

According to RSS-247 issue 2, §5.2

- (1) The minimum 6 dB bandwidth shall be 500 kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100kHz, VBW = 3*RBW, Span= cover the complete power envelope of the signal of the UUT Sweep=auto
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

7.5 Measurement Result:

Test model No.: P1MSBT01

BT 4.0

| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% OBW (MHz) | 6dB BW Limit (kHz) |
|--------------------|------------------------|------------------|-----------------------|
| 2402 | 0.72 | 1.0781 | > 500 |
| 2442 | 0.72 | 1.0654 | > 500 |
| 2480 | 0.73 | 1.0659 | > 500 |


BT 5.0

| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% OBW (MHz) | 6dB BW Limit (kHz) |
|--------------------|------------------------|------------------|-----------------------|
| 2402 | 0.72 | 1.0809 | > 500 |
| 2442 | 0.73 | 1.0668 | > 500 |
| 2480 | 0.75 | 1.0661 | > 500 |


Note: Refer to next page for plots.

BLE Mode 4.0


6dB Bandwidth Test Data CH-Low

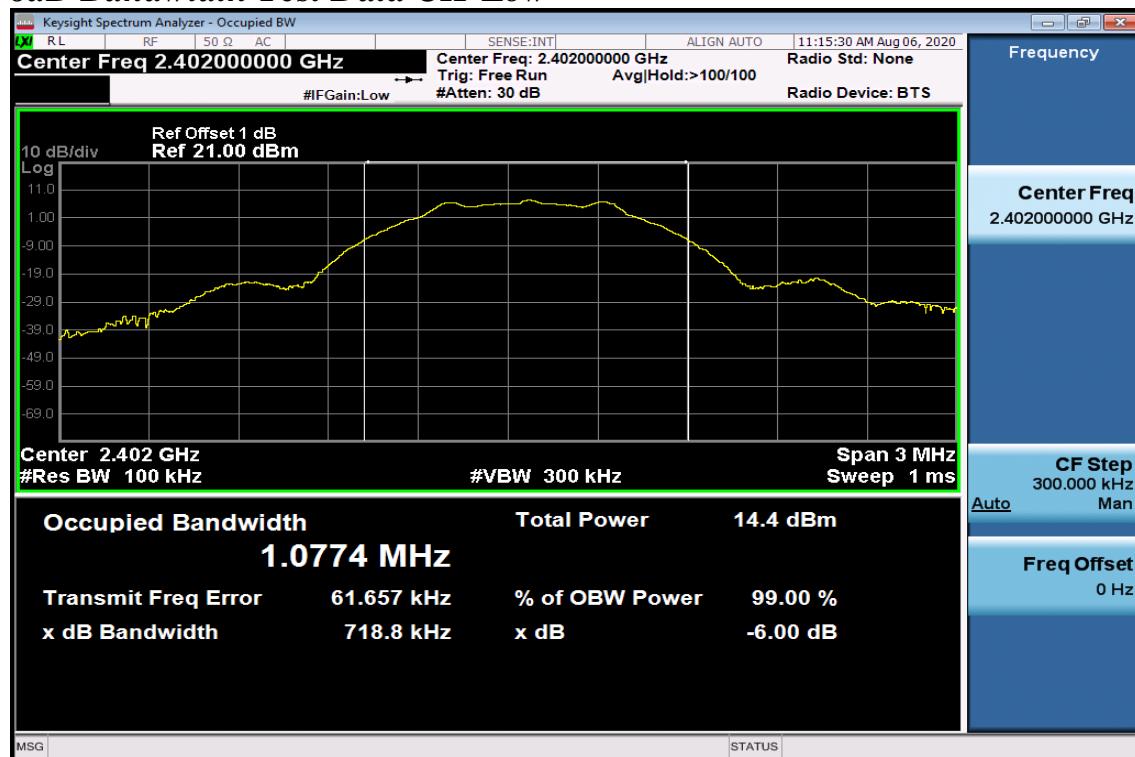

6dB Band Width Test Data CH-Mid

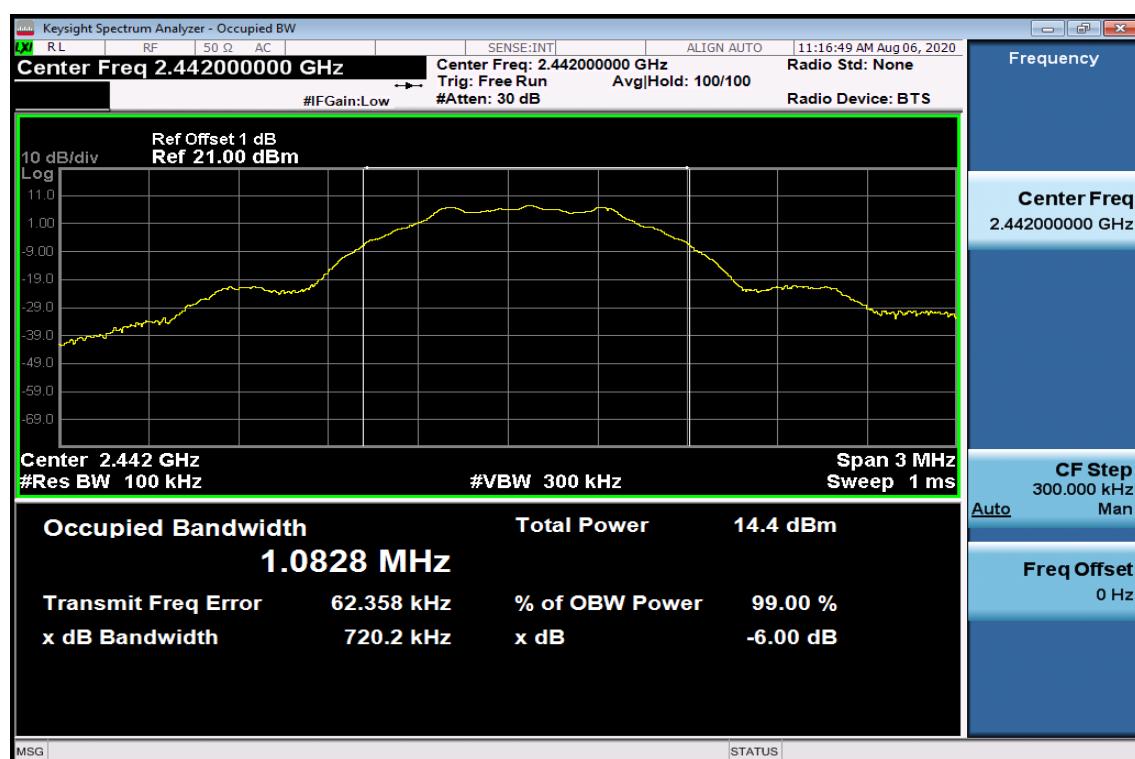


6dB Band Width Test Data CH-High

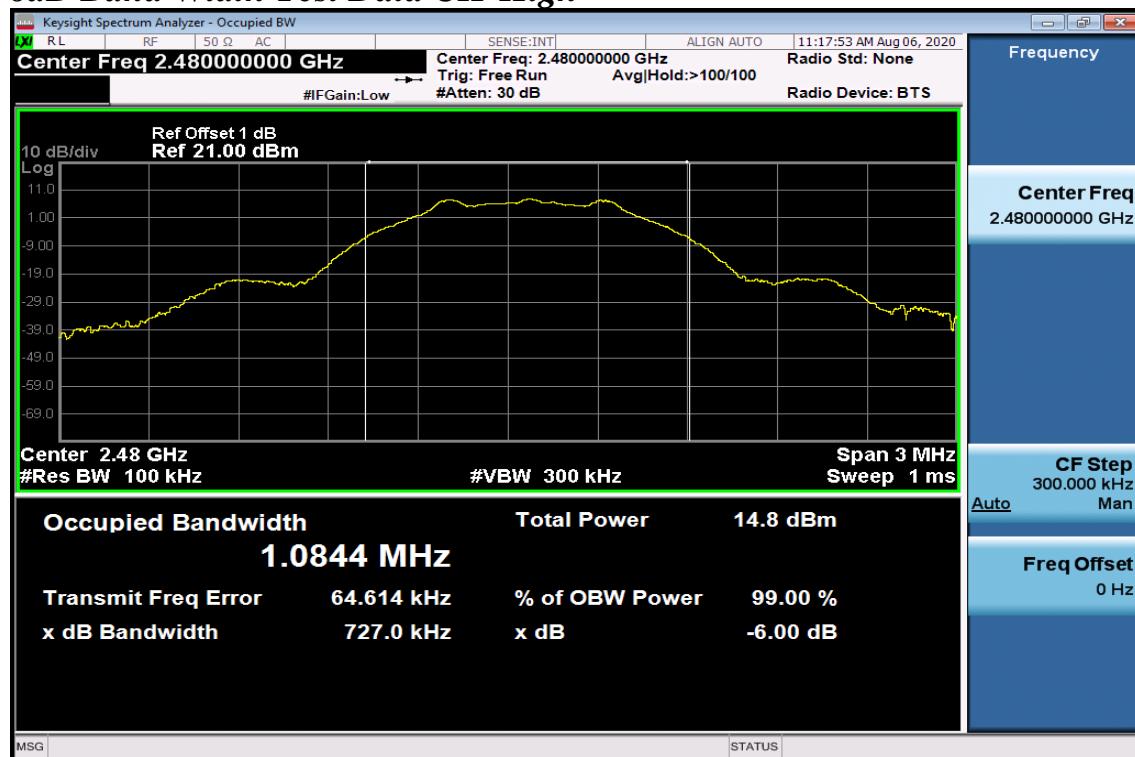


BLE Mode 4.0


99% Bandwidth Test Data CH-Low

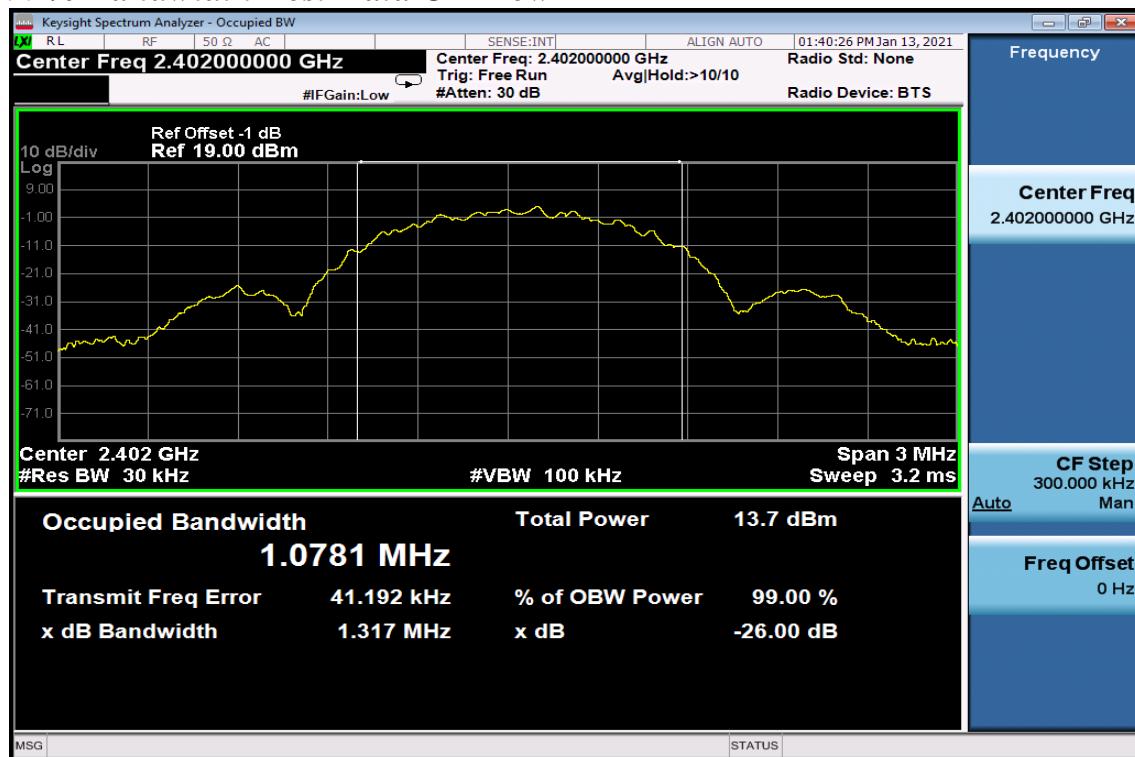

99% Band Width Test Data CH-Mid

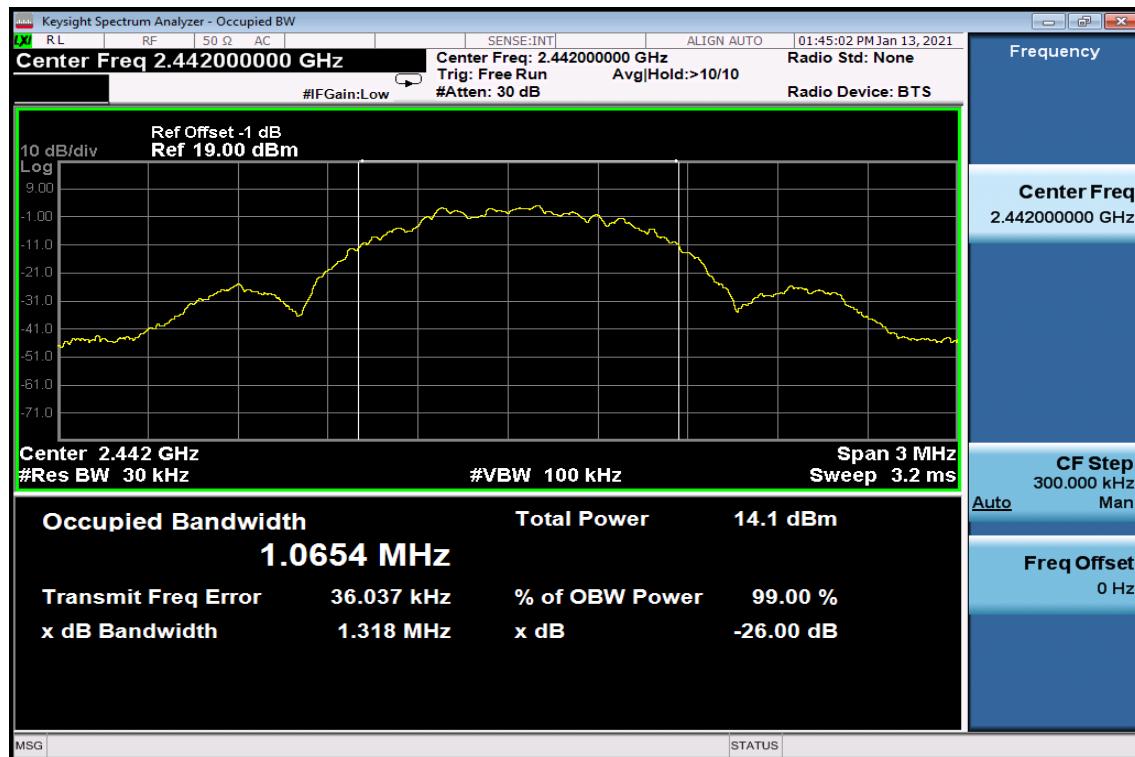


99% Band Width Test Data CH-High

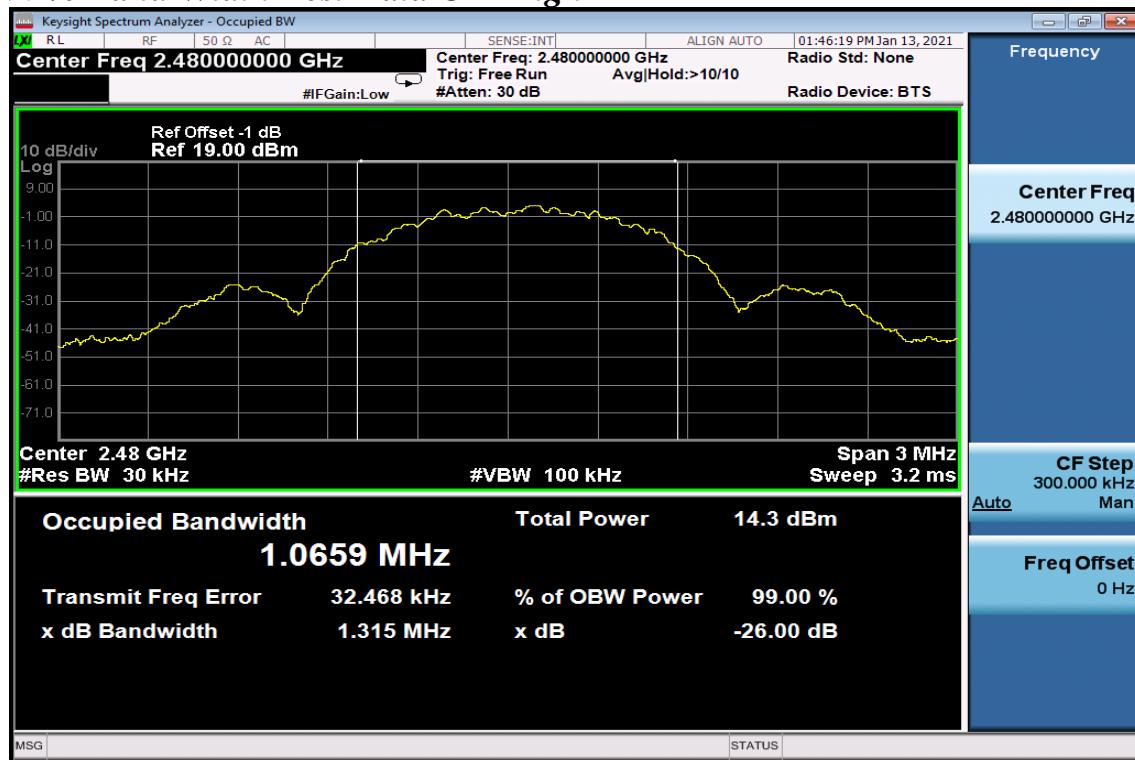


BLE Mode 5.0


6dB Bandwidth Test Data CH-Low

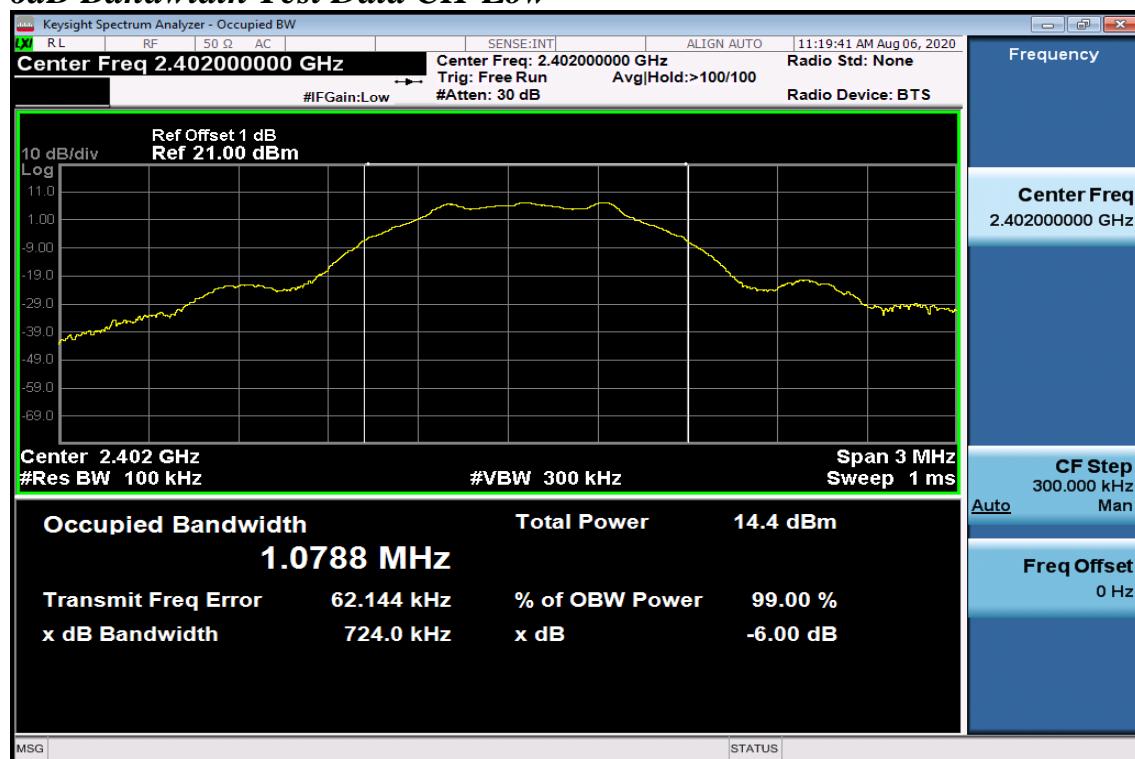

6dB Band Width Test Data CH-Mid

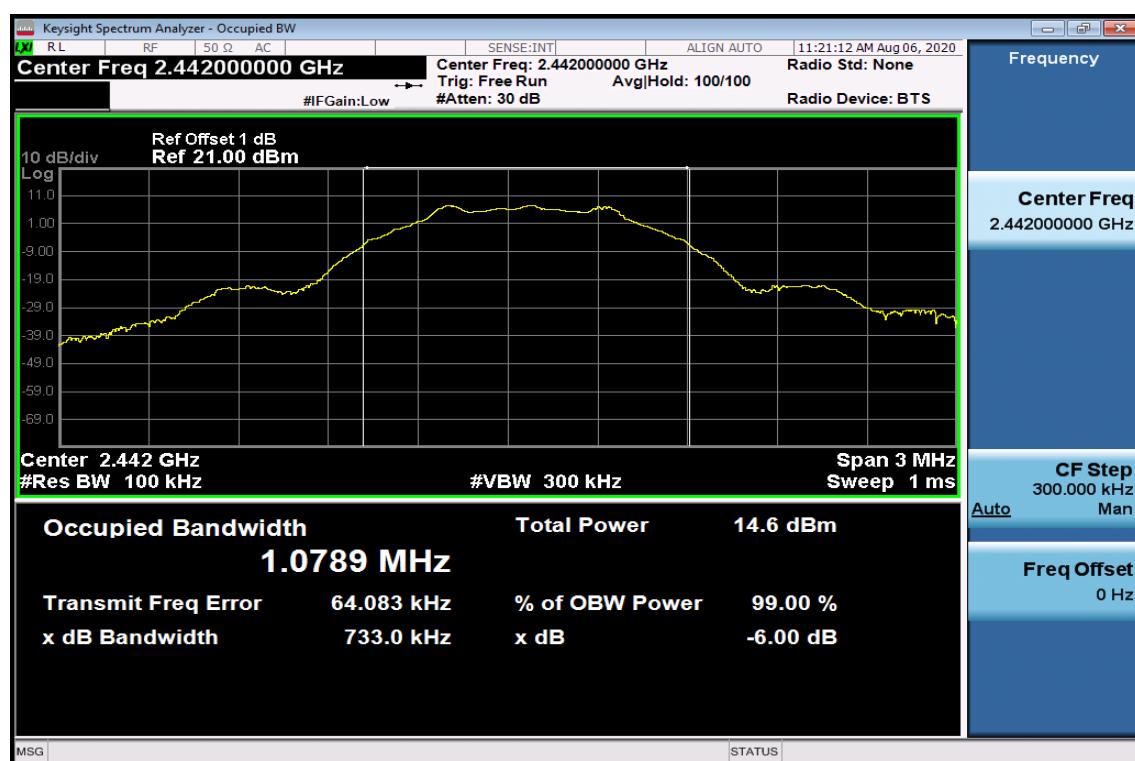


6dB Band Width Test Data CH-High

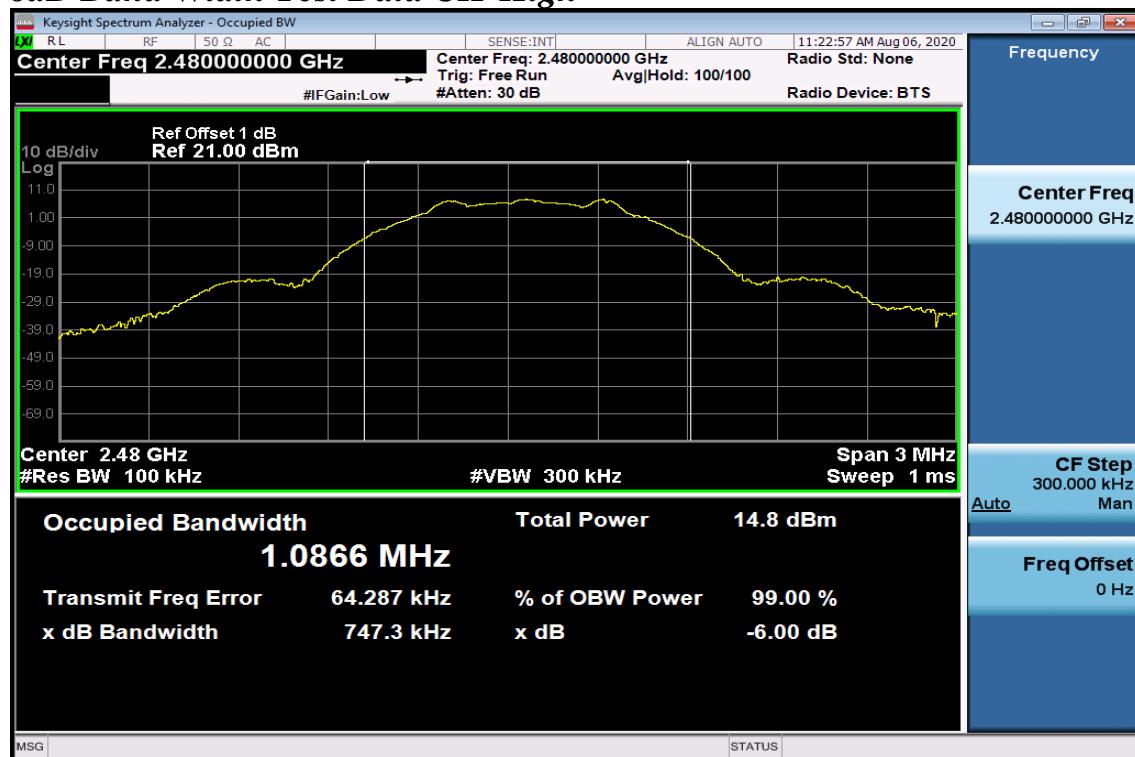


BLE Mode 5.0


99% Bandwidth Test Data CH-Low

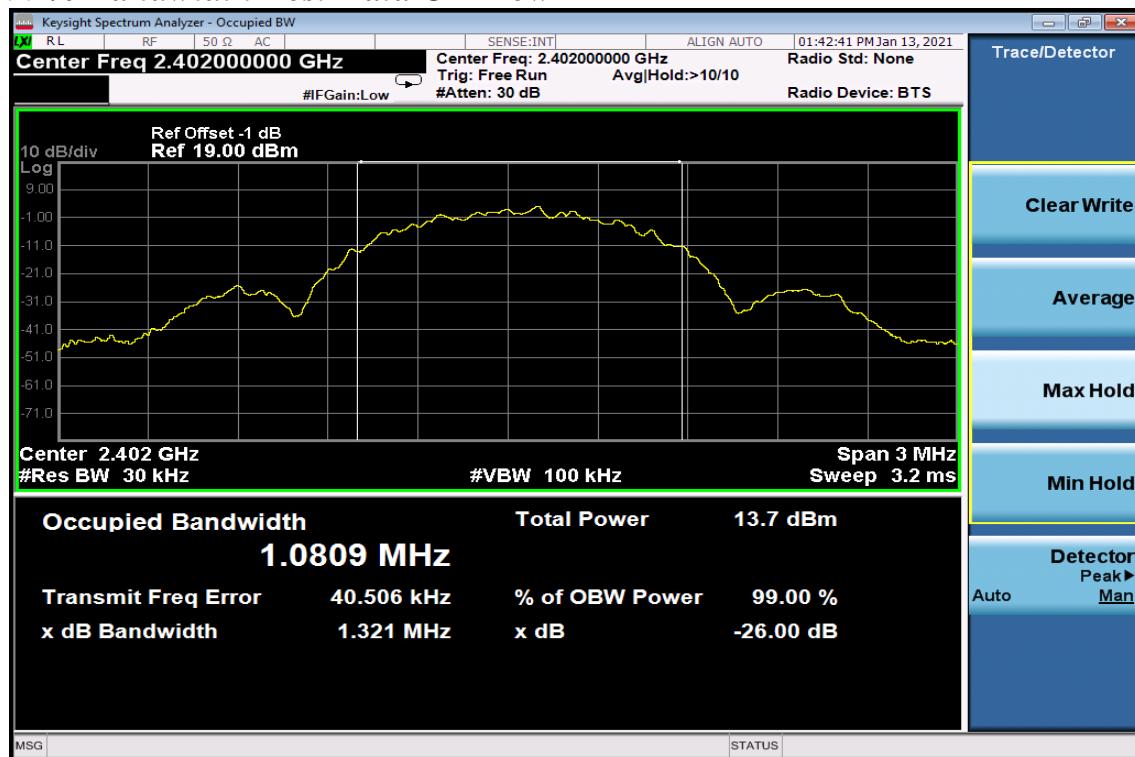

99% Band Width Test Data CH-Mid

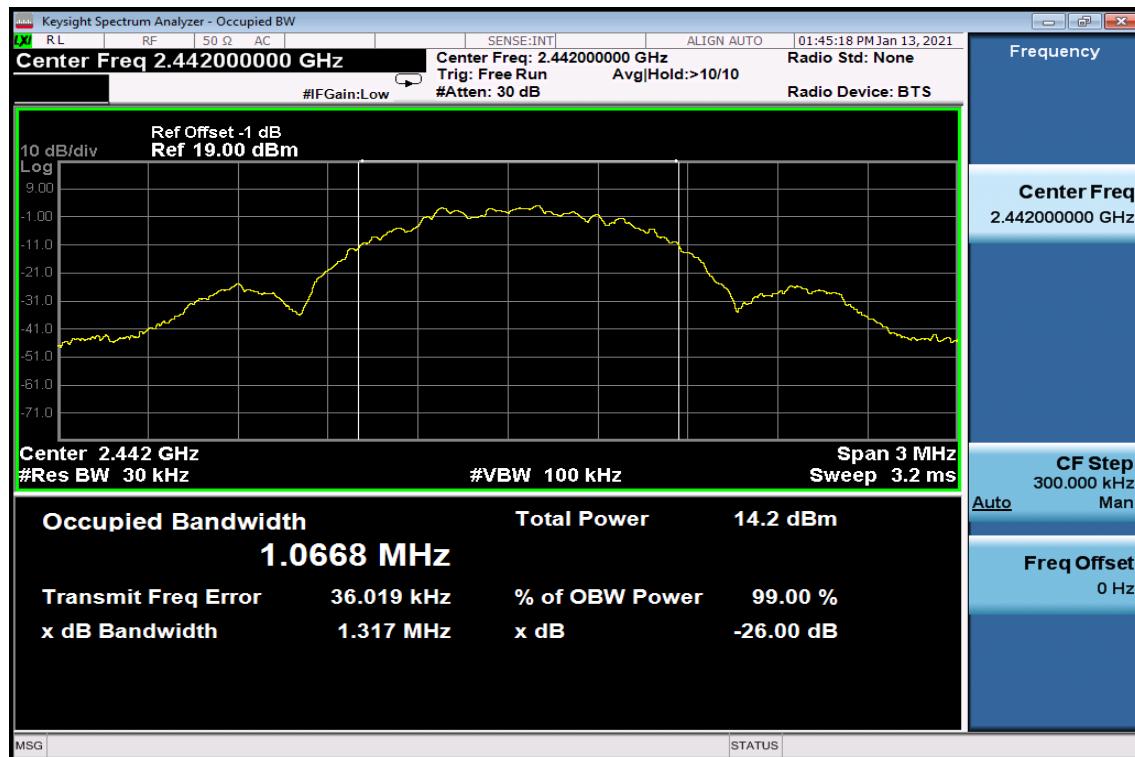

99% Band Width Test Data CH-High

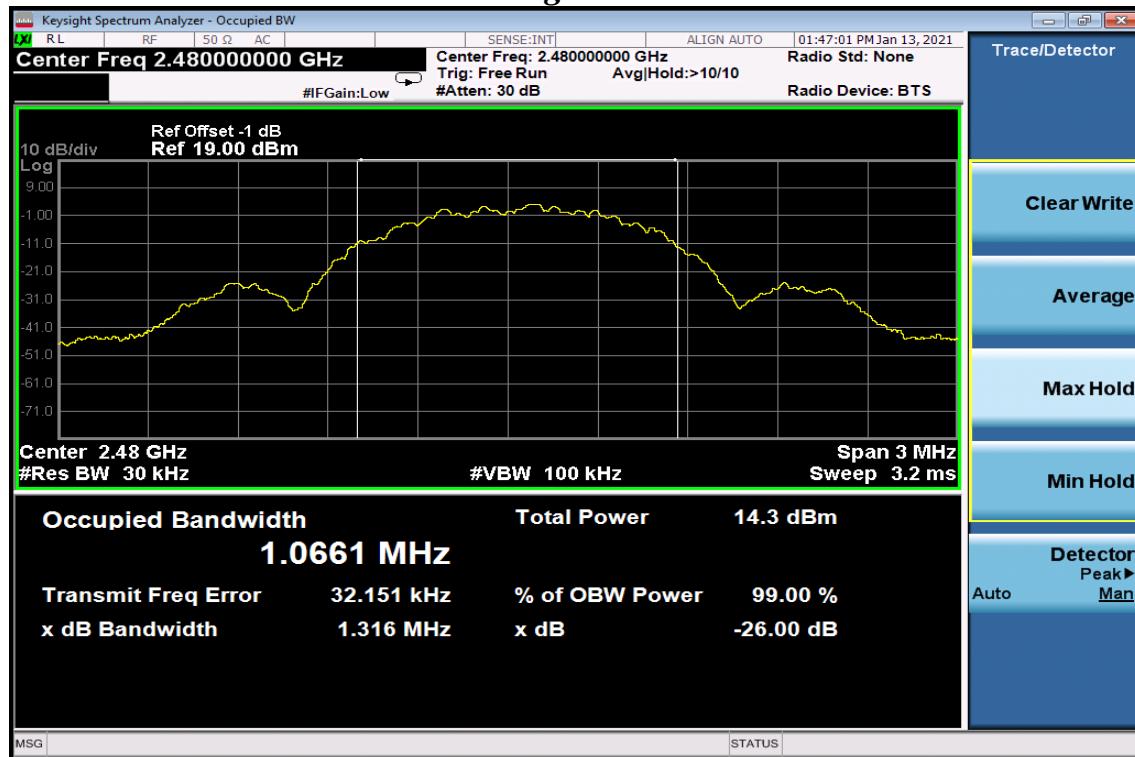

8 Spurious Radiated Emission Test

8.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-247 issue 2, §5.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.2 Measurement Equipment Used:


| Location | Equipment Name | Brand | Model | S/N | Last Cal. Date | Next Cal. Date |
|------------|--------------------------------|-------------------|------------------------|---------------------|----------------|----------------|
| Chamber 19 | Signal analyzer | R&S | FSV40 | 101884 | 11/14/2019 | 11/14/2020 |
| Chamber 19 | EMI Receiver | R&S | ESR3 | 102461 | 05/05/2020 | 05/05/2021 |
| Chamber 19 | Loop Antenna | EM | EM-6879 | 271 | 05/21/2020 | 05/21/2021 |
| Chamber 19 | Bilog Antenna (30MHz-1GHz) | Schwarzbeck | VULB9168 w 6dB Att. | 736 | 02/11/2020 | 02/11/2021 |
| Chamber 19 | Horn antenna (1GHz-18GHz) | EM | EM-AH-10180 | 2011090207 | 03/26/2020 | 03/26/2021 |
| Chamber 19 | Horn antenna (18GHz-26GHz) | Com-power | AH-826 | 081001 | 11/25/2019 | 11/25/2020 |
| Chamber 19 | Horn antenna (26GHz-40GHz) | Com-power | AH-640 | 100A | 03/13/2020 | 03/13/2021 |
| Chamber 19 | Preamplifier (9kHz-1GHz) | HP | 8447F | 3113A04621 | 06/19/2020 | 06/19/2021 |
| Chamber 19 | Preamplifier (1GHz - 26GHz) | EM | EM01M26G | 060681 | 05/04/2020 | 05/04/2021 |
| Chamber 19 | Preamplifier (26GHz-40GHz) | MITEQ | JS4-26004000- 27-5A | 818471 | 05/04/2020 | 05/04/2021 |
| Chamber 19 | RF Cable (9kHz-18GHz) | HUBER SU- HNER | Sucoflex 104A | MY1397/4A | 01/10/2020 | 01/10/2021 |
| Chamber 19 | RF Cable (18GHz-40GHz) | HUBER SU- HNER | Sucoflex 102 | 27963/2&374 21/2 | 11/21/2019 | 11/21/2020 |
| Chamber 19 | Signal Generator | Anritsu | MG3692A | 20311 | 01/06/2020 | 01/06/2021 |
| Chamber 19 | Test Software | Audix | E3 Ver:6.12023 | N/A | N/A | N/A |

8.3 Test SET-UP:

(A) Radiated Emission Test Setup for frequency below 1000MHz

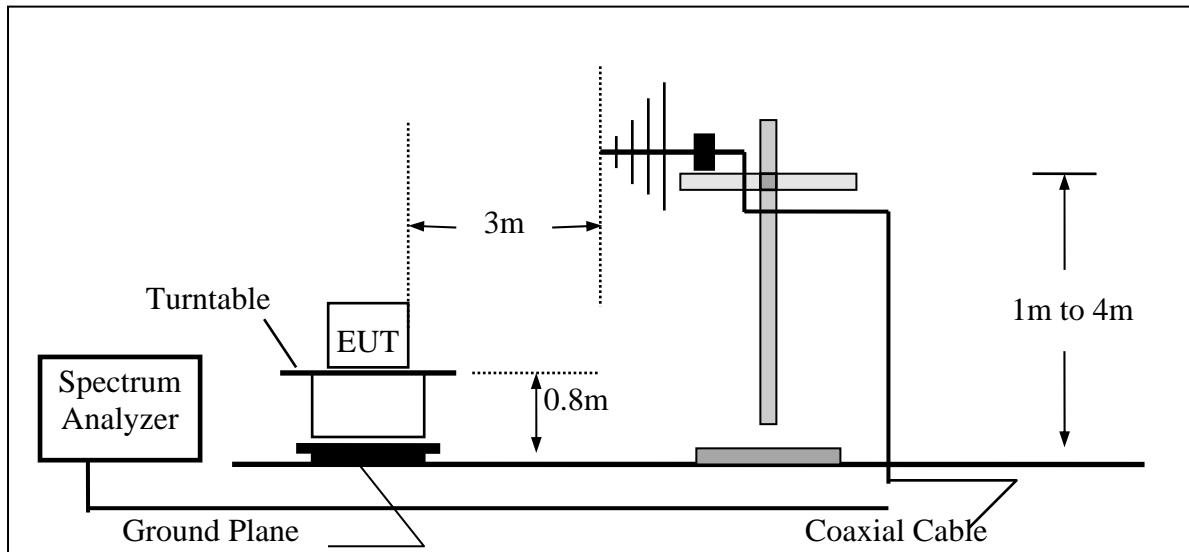

(B) Radiated Emission Test Setup Frequency above 1 GHz

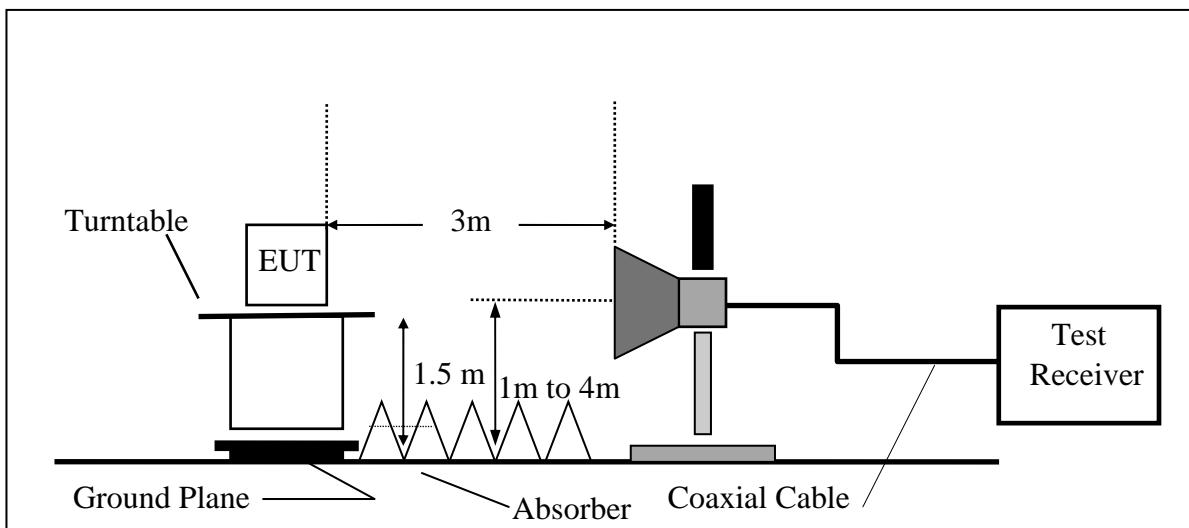

8.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

Test receiver setting : Blew 1GHz
 Detector : Average(9kHz – 90kHz, 110kHz – 90kHz), Quasi-Peak
 Bandwidth : 200Hz, 120kHz
 Test spectrum setting : Above 1GHz
 Peak : RBW=1MHz, VBW=3MHz, Sweep=auto

| Mode | ON time (ms) | Total time (ms) | Duty Cycle | Duty Factor | 1/Ton (kHz) | VBW for average detector (kHz) |
|------|--------------|-----------------|------------|-------------|-------------|--------------------------------|
| BLE | 2.110 | 4.190 | 50.358% | 2.98 | 0.474 | 1 |

Duty Cycle Correction:

For average radiated measurements, using a 0.47% duty cycle, the measured level was reduced by a factor of 46.55 dB. The duty cycle correction factor is determined using the formula: $20\log (0.47/100) = -46.55$ dB. A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying the original application for certification.

The average reading = peak reading + duty cycle Correction

8.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF - CL - AG}$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|-----------|-----------|------------|
| Operation Mode | TX CH Low | Test Date | 2020/08/11 |
| Fundamental Frequency | 2402MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT01 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 47.46 | 39.56 | -5.13 | 34.43 | 40.00 | -5.57 | Peak | VERTICAL |
| 2 | 119.24 | 47.91 | -7.76 | 40.15 | 43.50 | -3.35 | Peak | VERTICAL |
| 3 | 131.85 | 44.06 | -6.46 | 37.60 | 43.50 | -5.90 | Peak | VERTICAL |
| 4 | 203.63 | 41.92 | -7.40 | 34.52 | 43.50 | -8.98 | Peak | VERTICAL |
| 5 | 302.57 | 38.79 | -3.86 | 34.93 | 46.00 | -11.07 | Peak | VERTICAL |
| 6 | 833.16 | 32.00 | 5.14 | 37.14 | 46.00 | -8.86 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 71.71 | 41.18 | -8.07 | 33.11 | 40.00 | -6.89 | Peak | HORIZONTAL |
| 2 | 119.24 | 43.72 | -7.76 | 35.96 | 43.50 | -7.54 | Peak | HORIZONTAL |
| 3 | 167.74 | 44.08 | -4.95 | 39.13 | 43.50 | -4.37 | Peak | HORIZONTAL |
| 4 | 191.99 | 46.19 | -7.27 | 38.92 | 43.50 | -4.58 | Peak | HORIZONTAL |
| 5 | 209.45 | 42.44 | -7.18 | 35.26 | 43.50 | -8.24 | Peak | HORIZONTAL |
| 6 | 584.84 | 36.70 | 1.06 | 37.76 | 46.00 | -8.24 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|-----------|-----------|------------|
| Operation Mode | TX CH Mid | Test Date | 2020/08/11 |
| Fundamental Frequency | 2442MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT01 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 60.07 | 38.32 | -5.92 | 32.40 | 40.00 | -7.60 | Peak | VERTICAL |
| 2 | 120.21 | 46.85 | -7.68 | 39.17 | 43.50 | -4.33 | Peak | VERTICAL |
| 3 | 156.10 | 38.11 | -5.04 | 33.07 | 43.50 | -10.43 | Peak | VERTICAL |
| 4 | 227.88 | 39.96 | -6.84 | 33.12 | 46.00 | -12.88 | Peak | VERTICAL |
| 5 | 312.27 | 36.91 | -3.67 | 33.24 | 46.00 | -12.76 | Peak | VERTICAL |
| 6 | 596.48 | 28.97 | 1.42 | 30.39 | 46.00 | -15.61 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 71.71 | 37.72 | -8.07 | 29.65 | 40.00 | -10.35 | Peak | HORIZONTAL |
| 2 | 119.24 | 43.52 | -7.76 | 35.76 | 43.50 | -7.74 | Peak | HORIZONTAL |
| 3 | 143.49 | 42.05 | -5.20 | 36.85 | 43.50 | -6.65 | Peak | HORIZONTAL |
| 4 | 252.13 | 43.20 | -5.61 | 37.59 | 46.00 | -8.41 | Peak | HORIZONTAL |
| 5 | 568.35 | 37.99 | 0.77 | 38.76 | 46.00 | -7.24 | Peak | HORIZONTAL |
| 6 | 756.53 | 30.29 | 4.27 | 34.56 | 46.00 | -11.44 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|------------|-----------|------------|
| Operation Mode | TX CH High | Test Date | 2020/08/11 |
| Fundamental Frequency | 2480MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT01 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 47.46 | 43.56 | -5.13 | 38.43 | 40.00 | -1.57 | Peak | VERTICAL |
| 2 | 131.85 | 44.71 | -6.46 | 38.25 | 43.50 | -5.25 | Peak | VERTICAL |
| 3 | 143.49 | 42.10 | -5.20 | 36.90 | 43.50 | -6.60 | Peak | VERTICAL |
| 4 | 306.45 | 35.59 | -3.76 | 31.83 | 46.00 | -14.17 | Peak | VERTICAL |
| 5 | 398.60 | 31.47 | -2.06 | 29.41 | 46.00 | -16.59 | Peak | VERTICAL |
| 6 | 833.16 | 34.14 | 5.14 | 39.28 | 46.00 | -6.72 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 119.24 | 47.53 | -7.76 | 39.77 | 43.50 | -3.73 | Peak | HORIZONTAL |
| 2 | 143.49 | 44.53 | -5.20 | 39.33 | 43.50 | -4.17 | Peak | HORIZONTAL |
| 3 | 240.49 | 49.15 | -5.89 | 43.26 | 46.00 | -2.74 | Peak | HORIZONTAL |
| 4 | 288.02 | 38.01 | -4.14 | 33.87 | 46.00 | -12.13 | Peak | HORIZONTAL |
| 5 | 588.72 | 36.31 | 1.21 | 37.52 | 46.00 | -8.48 | Peak | HORIZONTAL |
| 6 | 849.65 | 31.34 | 5.31 | 36.65 | 46.00 | -9.35 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|-----------|-----------|------------|
| Operation Mode | TX CH Low | Test Date | 2020/08/11 |
| Fundamental Frequency | 2402MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT02 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 47.52 | 39.59 | -5.13 | 34.46 | 40.00 | -5.54 | Peak | VERTICAL |
| 2 | 119.28 | 48.00 | -7.76 | 40.24 | 43.50 | -3.26 | Peak | VERTICAL |
| 3 | 131.79 | 43.97 | -6.46 | 37.51 | 43.50 | -5.99 | Peak | VERTICAL |
| 4 | 203.59 | 41.99 | -7.40 | 34.59 | 43.50 | -8.91 | Peak | VERTICAL |
| 5 | 302.65 | 38.84 | -3.86 | 34.98 | 46.00 | -11.02 | Peak | VERTICAL |
| 6 | 833.06 | 32.03 | 5.14 | 37.17 | 46.00 | -8.83 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 71.81 | 41.15 | -8.07 | 33.08 | 40.00 | -6.92 | Peak | HORIZONTAL |
| 2 | 119.17 | 43.65 | -7.76 | 35.89 | 43.50 | -7.61 | Peak | HORIZONTAL |
| 3 | 167.70 | 44.14 | -4.95 | 39.19 | 43.50 | -4.31 | Peak | HORIZONTAL |
| 4 | 192.04 | 46.18 | -7.27 | 38.91 | 43.50 | -4.59 | Peak | HORIZONTAL |
| 5 | 209.50 | 42.43 | -7.18 | 35.25 | 43.50 | -8.25 | Peak | HORIZONTAL |
| 6 | 584.91 | 36.61 | 1.06 | 37.67 | 46.00 | -8.33 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|-----------|-----------|------------|
| Operation Mode | TX CH Mid | Test Date | 2020/08/11 |
| Fundamental Frequency | 2442MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT02 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 60.13 | 38.28 | -5.92 | 32.36 | 40.00 | -7.64 | Peak | VERTICAL |
| 2 | 120.25 | 46.82 | -7.68 | 39.14 | 43.50 | -4.36 | Peak | VERTICAL |
| 3 | 156.17 | 38.08 | -5.04 | 33.04 | 43.50 | -10.46 | Peak | VERTICAL |
| 4 | 227.88 | 39.87 | -6.84 | 33.03 | 46.00 | -12.97 | Peak | VERTICAL |
| 5 | 312.29 | 36.82 | -3.67 | 33.15 | 46.00 | -12.85 | Peak | VERTICAL |
| 6 | 596.39 | 29.00 | 1.42 | 30.42 | 46.00 | -15.58 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 71.64 | 37.65 | -8.07 | 29.58 | 40.00 | -10.42 | Peak | HORIZONTAL |
| 2 | 119.19 | 43.45 | -7.76 | 35.69 | 43.50 | -7.81 | Peak | HORIZONTAL |
| 3 | 143.58 | 42.07 | -5.20 | 36.87 | 43.50 | -6.63 | Peak | HORIZONTAL |
| 4 | 252.21 | 43.19 | -5.61 | 37.58 | 46.00 | -8.42 | Peak | HORIZONTAL |
| 5 | 568.39 | 38.05 | 0.77 | 38.82 | 46.00 | -7.18 | Peak | HORIZONTAL |
| 6 | 756.60 | 30.33 | 4.27 | 34.60 | 46.00 | -11.40 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|------------|-----------|------------|
| Operation Mode | TX CH High | Test Date | 2020/08/11 |
| Fundamental Frequency | 2480MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT02 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 47.42 | 43.64 | -5.13 | 38.51 | 40.00 | -1.49 | Peak | VERTICAL |
| 2 | 131.80 | 44.71 | -6.46 | 38.25 | 43.50 | -5.25 | Peak | VERTICAL |
| 3 | 143.47 | 42.00 | -5.20 | 36.80 | 43.50 | -6.70 | Peak | VERTICAL |
| 4 | 306.39 | 35.50 | -3.76 | 31.74 | 46.00 | -14.26 | Peak | VERTICAL |
| 5 | 398.55 | 31.37 | -2.06 | 29.31 | 46.00 | -16.69 | Peak | VERTICAL |
| 6 | 833.21 | 34.14 | 5.14 | 39.28 | 46.00 | -6.72 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 119.15 | 47.62 | -7.76 | 39.86 | 43.50 | -3.64 | Peak | HORIZONTAL |
| 2 | 143.51 | 44.48 | -5.20 | 39.28 | 43.50 | -4.22 | Peak | HORIZONTAL |
| 3 | 240.44 | 49.13 | -5.89 | 43.24 | 46.00 | -2.76 | Peak | HORIZONTAL |
| 4 | 288.05 | 37.93 | -4.14 | 33.79 | 46.00 | -12.21 | Peak | HORIZONTAL |
| 5 | 588.76 | 36.31 | 1.21 | 37.52 | 46.00 | -8.48 | Peak | HORIZONTAL |
| 6 | 849.59 | 31.40 | 5.31 | 36.71 | 46.00 | -9.29 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------|-----------|------------|
| Operation Mode | TX CH Low | Test Date | 2020/08/11 |
| Fundamental Frequency | 2402MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT01 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 4804.00 | 47.11 | -6.72 | 40.39 | 74.00 | -33.61 | Peak | VERTICAL |
| 2 | 9275.00 | 46.17 | 0.91 | 47.08 | 74.00 | -26.92 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 4804.00 | 46.30 | -6.72 | 39.58 | 74.00 | -34.42 | Peak | HORIZONTAL |
| 2 | 9275.00 | 46.42 | 0.91 | 47.33 | 74.00 | -26.67 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW \geq 1/Ton , Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------|-----------|------------|
| Operation Mode | TX CH Mid | Test Date | 2020/08/11 |
| Fundamental Frequency | 2442MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT01 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 4884.00 | 47.18 | -6.45 | 40.73 | 74.00 | -33.27 | Peak | VERTICAL |
| 2 | 8750.00 | 47.77 | -0.32 | 47.45 | 74.00 | -26.55 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 4884.00 | 46.76 | -6.45 | 40.31 | 74.00 | -33.69 | Peak | HORIZONTAL |
| 2 | 9200.00 | 46.49 | 0.83 | 47.32 | 74.00 | -26.68 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW \geq 1/Ton , Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|------------|-----------|------------|
| Operation Mode | TX CH High | Test Date | 2020/08/11 |
| Fundamental Frequency | 2480MHz | Test By | Weitin |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 60 % | Model No. | P1MSBT01 |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-----------|--------------|--------------|-----------|--------|------------|
| 1 | 4960.00 | 46.69 | -6.19 | 40.50 | 74.00 | -33.50 | Peak | VERTICAL |
| 2 | 9250.00 | 46.77 | 0.88 | 47.65 | 74.00 | -26.35 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 4960.00 | 45.90 | -6.19 | 39.71 | 74.00 | -34.29 | Peak | HORIZONTAL |
| 2 | 9225.00 | 47.31 | 0.86 | 48.17 | 74.00 | -25.83 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW \geq 1/Ton , Sweep time= 200 ms.

9 100kHz Bandwidth of Band Edges Measurement

9.1 Standard Applicable:

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

According to RSS-247 issue 2, §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB attenuation below the general field strength limits specified in RSS-Gen is not required.

9.2 Measurement Equipment Used:

Refer to section 8.2 for details.

9.3 Test SET-UP:

Refer to section 8.3 for details.

9.4 Measurement Procedure:

Refer to section 8.4 for details.

9.5 Field Strength Calculation:


Refer to section 8.5 for details.

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Radiated Emission:
Test model No.: P1MSBT01

 Operation Mode TX CH Low
 Fundamental Frequency 2402 MHz
 Temperature 25 °C

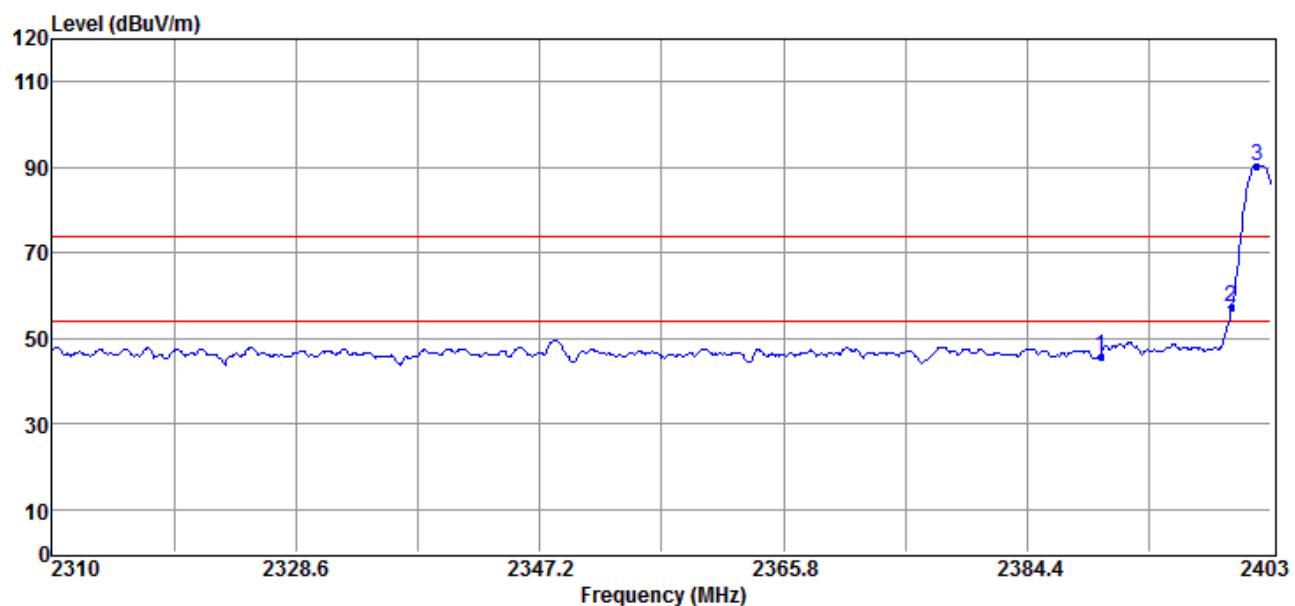 Test Date 2020/08/11
 Test By Weitin
 Humidity 60 %


| No | Freq MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-------------|--------------|--------------|-----------|--------|----------|
| 1 | 2390.00 | 57.35 | -11.45 | 45.90 | 74.00 | -28.10 | Peak | VERTICAL |
| 2 | 2400.00 | 68.62 | -11.42 | 57.20 | 70.42 | -13.22 | Peak | VERTICAL |
| 3 | 2401.88 | 101.82 | -11.40 | 90.42 | F | -- | Peak | VERTICAL |

Note: "F" denotes fundamental frequency

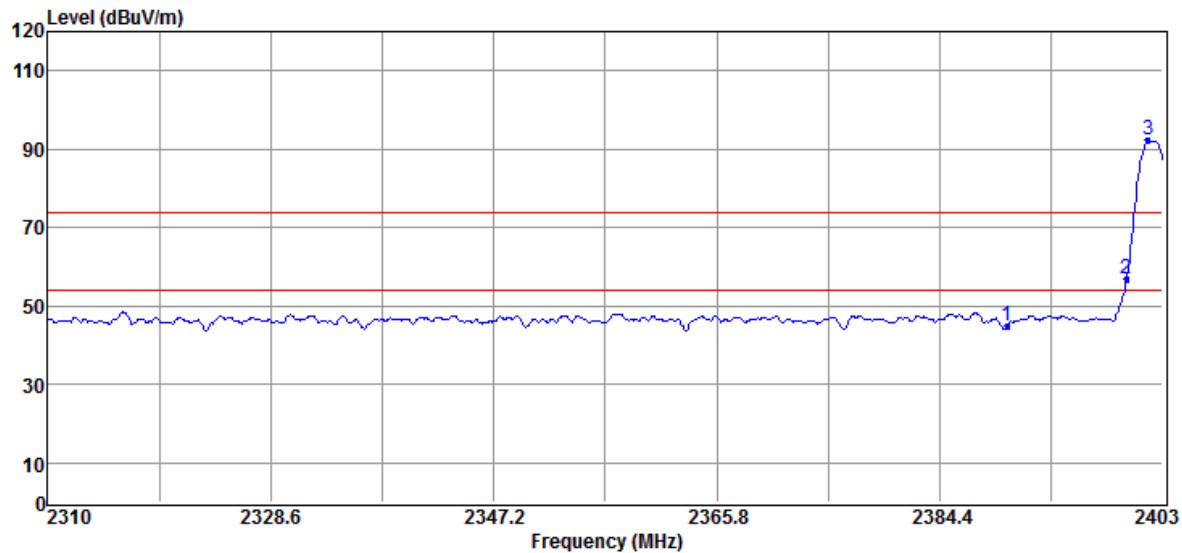


| No | Freq MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-------------|--------------|--------------|-----------|--------|------------|
| 1 | 2390.00 | 56.54 | -11.45 | 45.09 | 74.00 | -28.91 | Peak | HORIZONTAL |
| 2 | 2400.00 | 68.26 | -11.42 | 56.84 | 72.17 | -15.33 | Peak | HORIZONTAL |
| 3 | 2401.79 | 103.57 | -11.40 | 92.17 | F | -- | Peak | HORIZONTAL |

Note: "F" denotes fundamental frequency


Operation Mode TX CH High
 Fundamental Frequency 2480 MHz
 Temperature 25 °C

Test Date 2020/08/11
 Test By Weitin
 Humidity 60 %

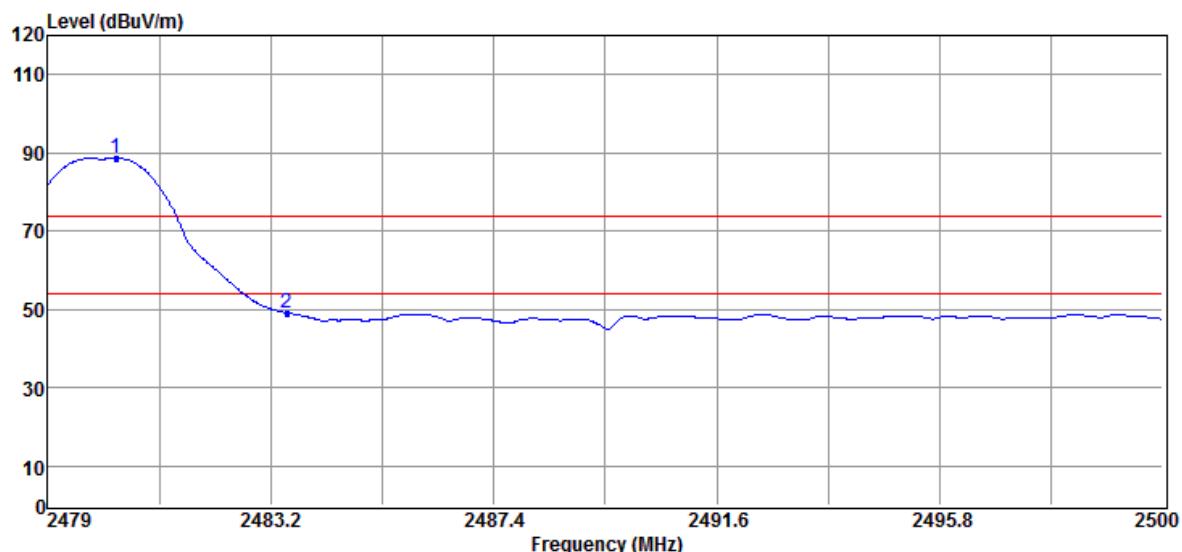

| No | Freq MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-------------|--------------|--------------|-----------|--------|----------|
| 1 | 2480.28 | 99.55 | -10.92 | 88.63 | F | --- | Peak | VERTICAL |
| 2 | 2483.50 | 60.04 | -10.89 | 49.15 | 74.00 | -24.85 | Peak | VERTICAL |

Note: "F" denotes fundamental frequency

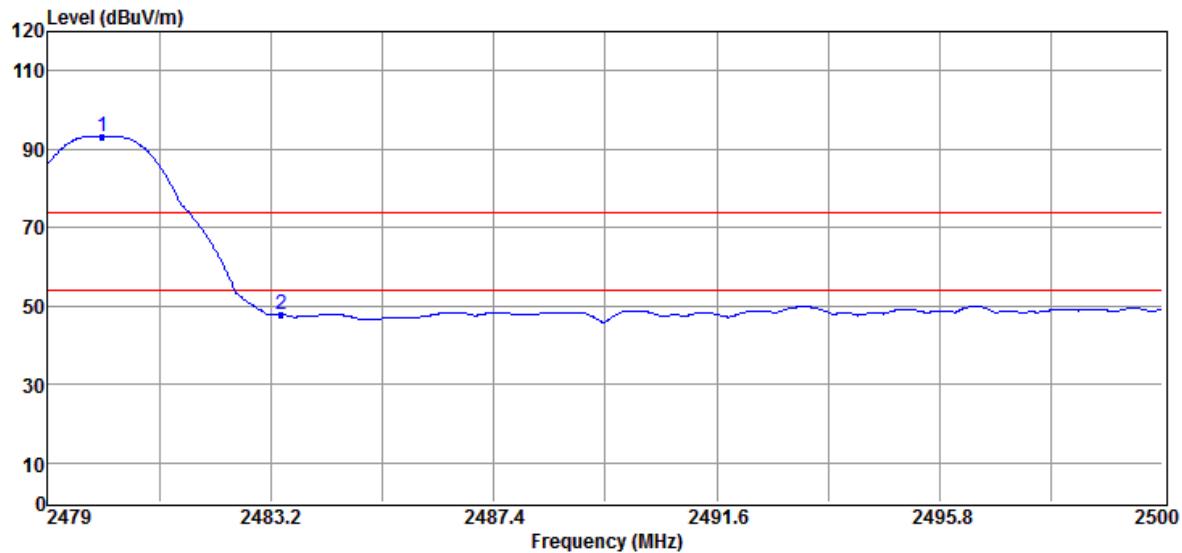

| No | Freq MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol V/H |
|----|----------|--------------|-------------|--------------|--------------|-----------|--------|------------|
| 1 | 2480.03 | 104.16 | -10.92 | 93.24 | F | --- | Peak | HORIZONTAL |
| 2 | 2483.40 | 58.53 | -10.89 | 47.64 | 74.00 | -26.36 | Peak | HORIZONTAL |

Note: "F" denotes fundamental frequency

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 issue 2, §5.2

(2)The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW =3kHz, VBW = 10kHz, Span =5 to 30% greater than emission BW, Sweep=Auto
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.


10.5 Measurement Result: Test model No.: P1MSBT01

| Mode | Frequency (MHz) | PSD (dBm/3kHz) | Duty Factor (dB) | Total PSD (dBm/3kHz) | PSD Limit (dBm/3kHz) |
|---------|-----------------|----------------|------------------|----------------------|----------------------|
| BLE 4.0 | 2402 | -5.579 | 2.98 | -2.60 | 8.00 |
| | 2442 | -5.845 | 2.98 | -2.87 | 8.00 |
| | 2480 | -4.303 | 2.98 | -1.32 | 8.00 |


| Mode | Frequency (MHz) | PSD (dBm/3kHz) | Duty Factor (dB) | Total PSD (dBm/3kHz) | PSD Limit (dBm/3kHz) |
|---------|-----------------|----------------|------------------|----------------------|----------------------|
| BLE 5.0 | 2402 | -4.929 | 2.98 | -1.95 | 8.00 |
| | 2442 | -5.103 | 2.98 | -2.12 | 8.00 |
| | 2480 | -4.981 | 2.98 | -2.00 | 8.00 |

BLE 4.0


Power Spectral Density Test Plot (CH-Low)

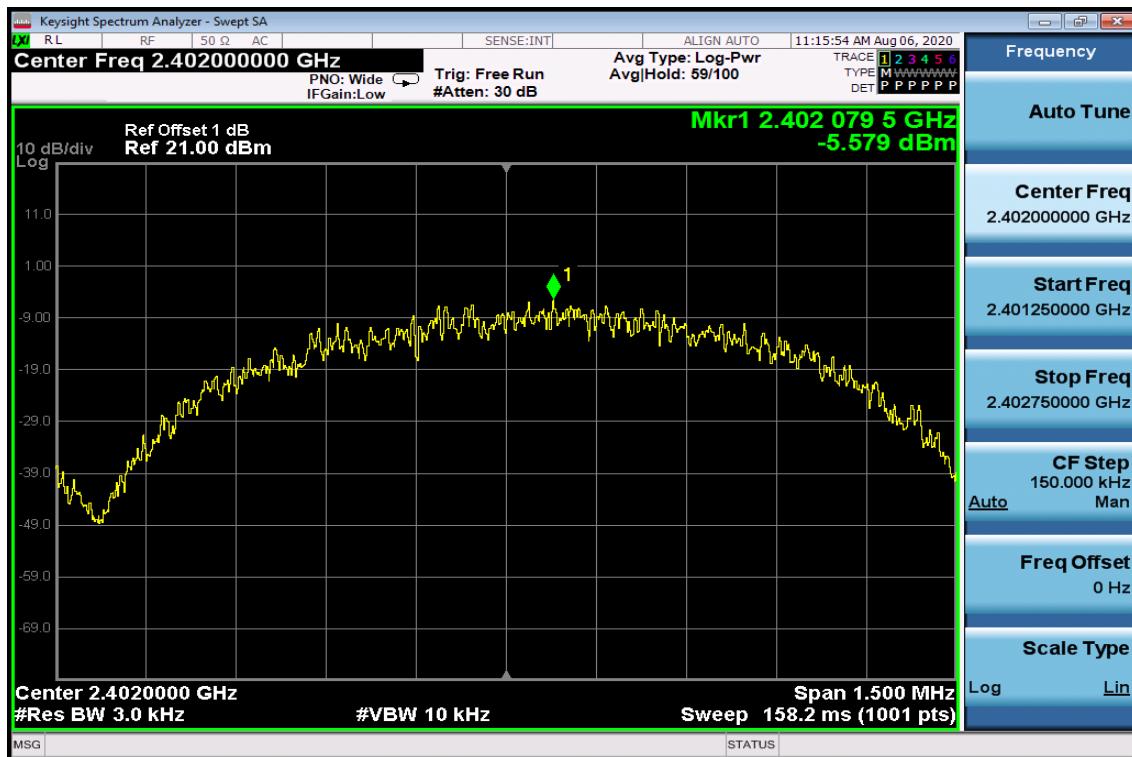

Power Spectral Density Test Plot (CH-Mid)

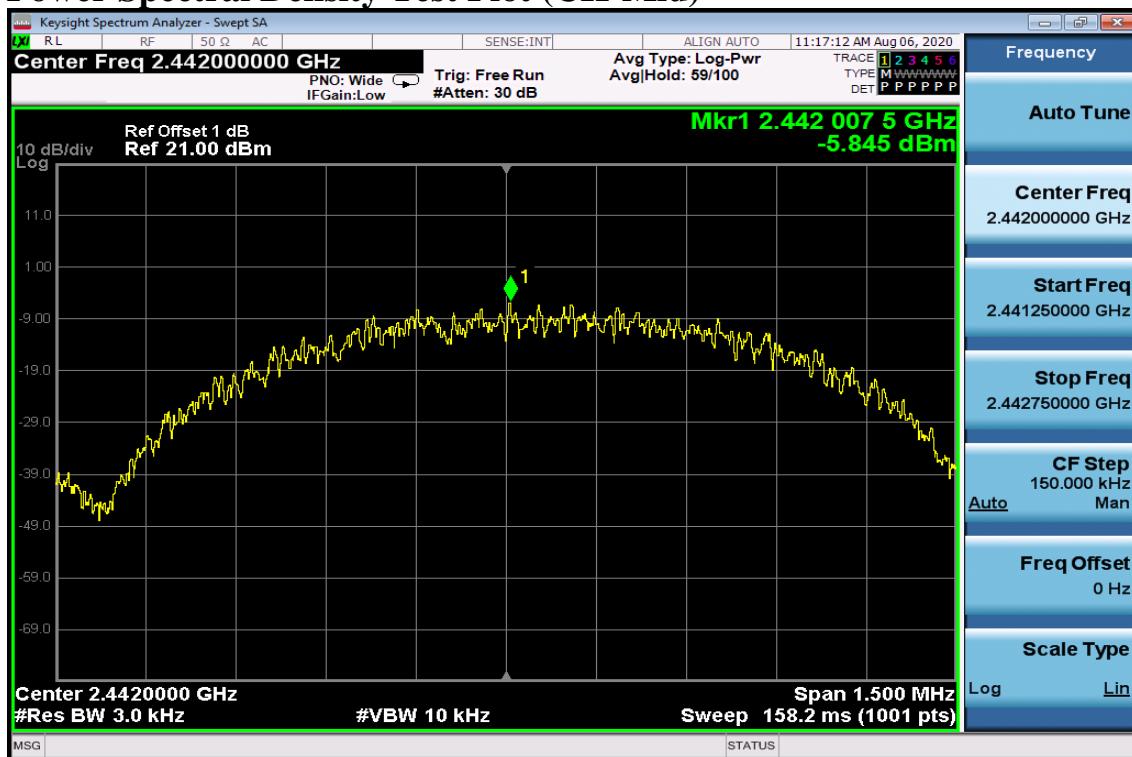


Power Spectral Density Test Plot (CH-High)

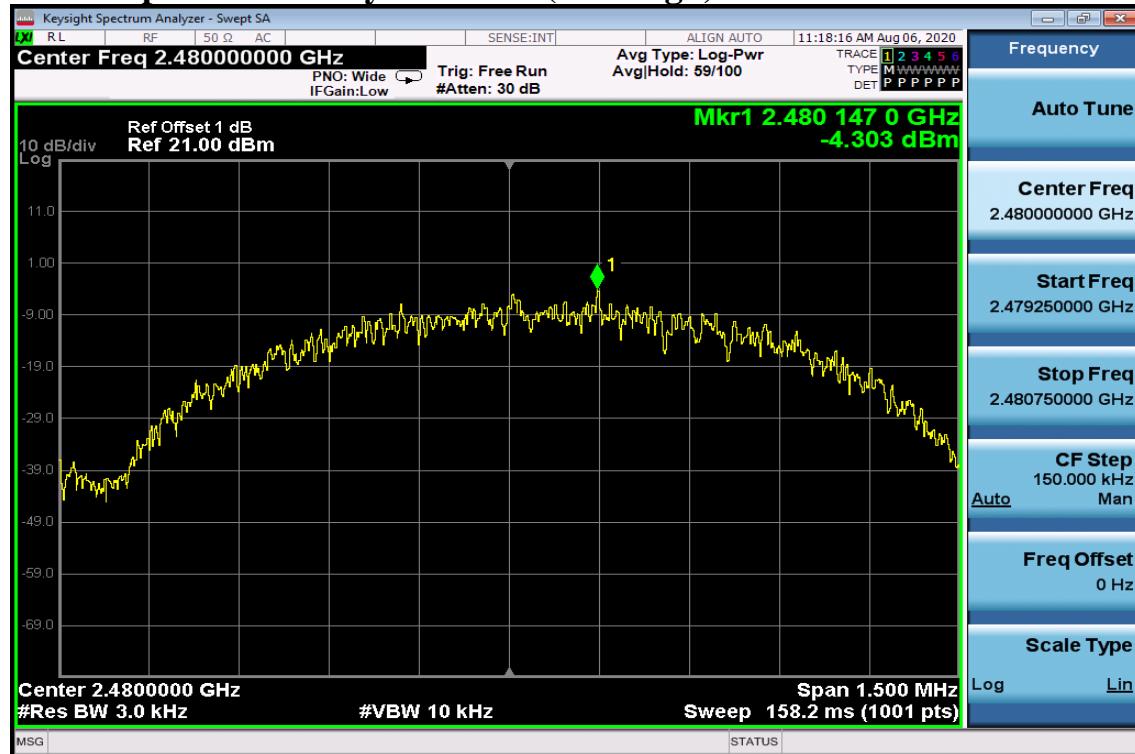


BLE 5.0


Power Spectral Density Test Plot (CH-Low)

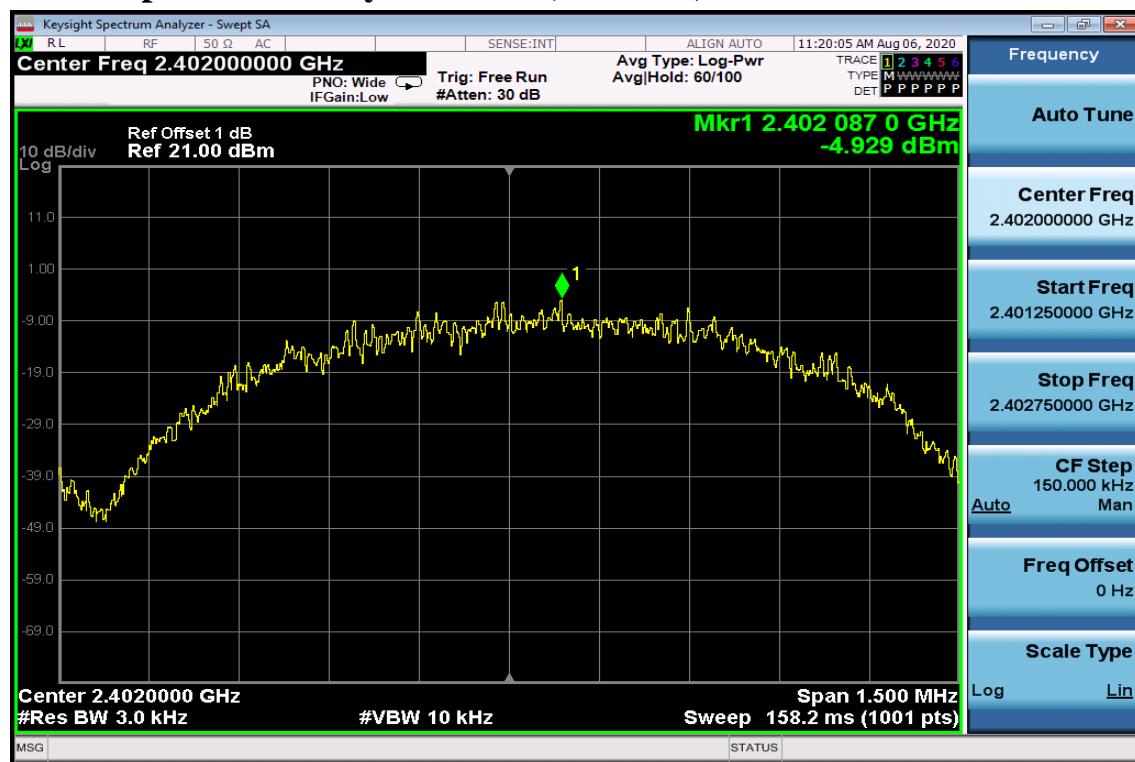

Power Spectral Density Test Plot (CH-Mid)

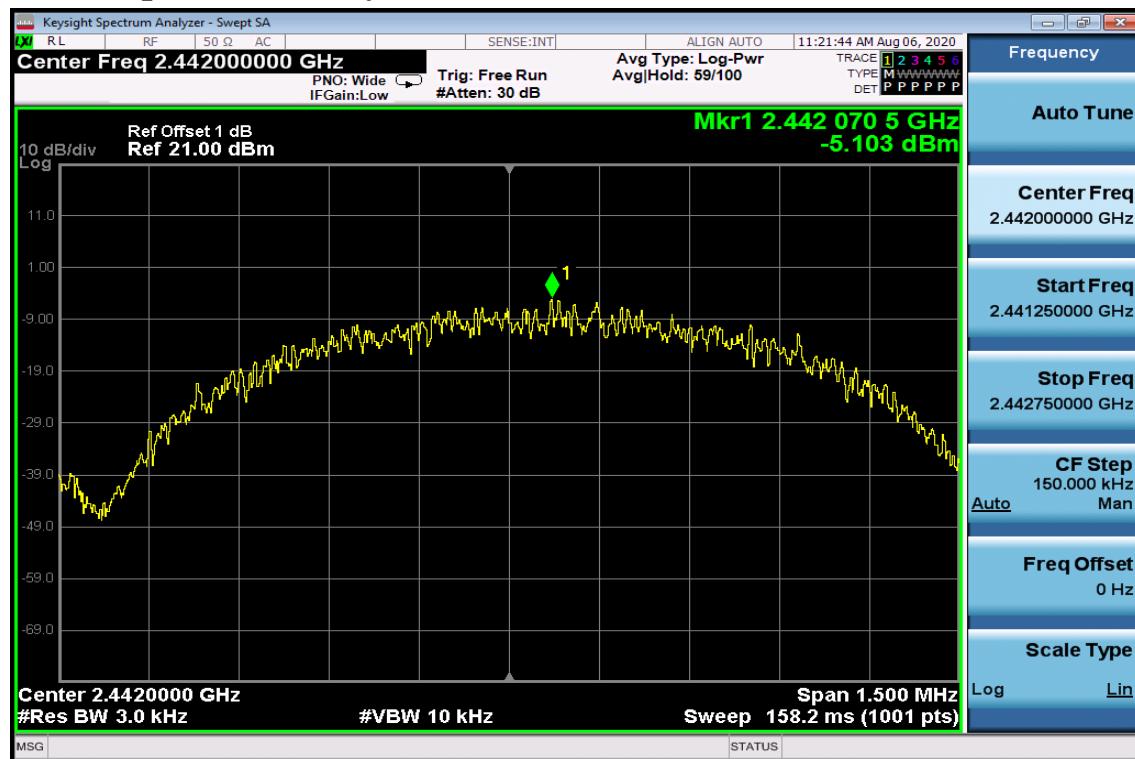

Power Spectral Density Test Plot (CH-High)

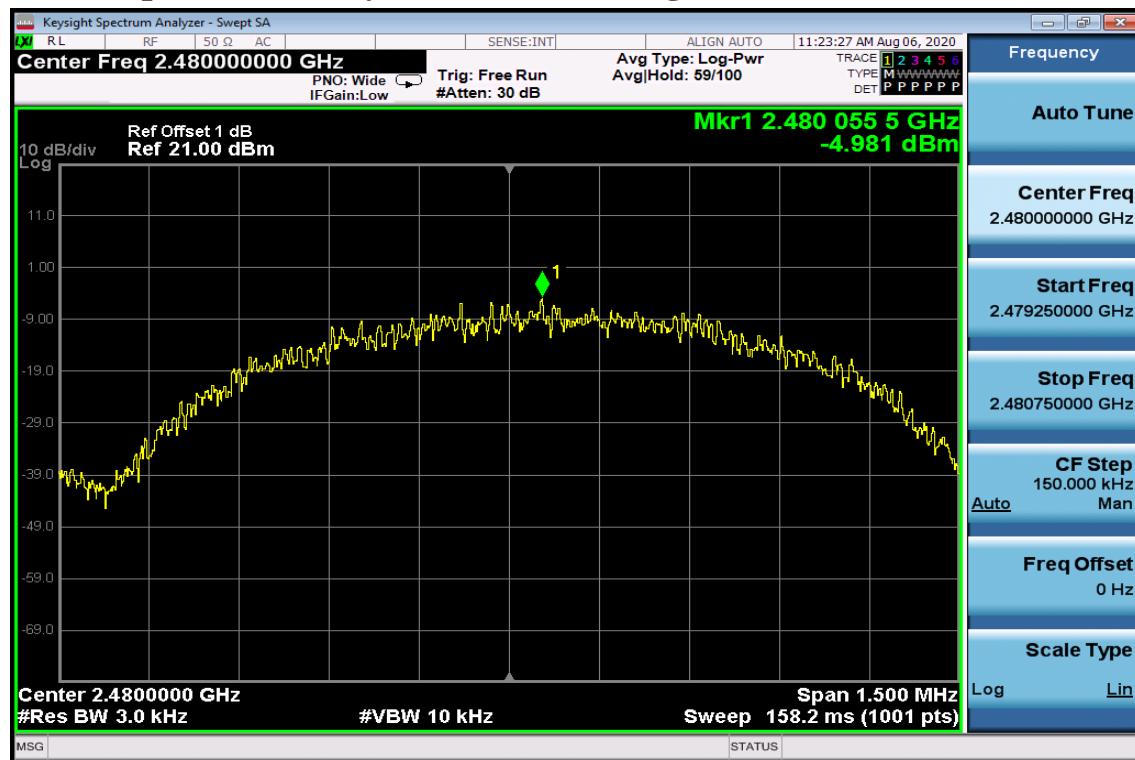

11 Antenna Requirement

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

According to RSS-GEN 6.8 antenna requirement: The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

11.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 0.5dBi. Please see EUT photo and antenna spec. for details.