

FCC RADIO TEST REPORT

FCC ID: 2AW68-DV8547

Product: 4K AOSP OTT BOX

Trade Mark: DIGICEL

Model No.: DV8547

Family Model: N/A

Report No.: S20082703602004

Issue Date: 21 Sep.2020

Prepared for

Shenzhen SDMC Technology Co.,Ltd.

19/F, Changhong Science & Technology Mansion, No.18, Keji South 12th Road,
High-tech Industrial Park, Nanshan District, Shenzhen, China, 518022

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

Tel:400-800-6106 , 0755-3699-5508

Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name: Shenzhen SDMC Technology Co.,Ltd.
 Address: 19/F, Changhong Science & Technology Mansion, No.18,
 Keji South 12th Road, High-tech Industrial Park,
 Nanshan District, Shenzhen, China, 518022
 Manufacturer's Name: Shenzhen SDMC Technology Co.,Ltd.
 Address: 19/F, Changhong Science & Technology Mansion, No.18,
 Keji South 12th Road, High-tech Industrial Park,
 Nanshan District, Shenzhen, China, 518022

Product description

Product name: 4K AOSP OTT BOX
 Model and/or type reference: DV8547
 Family Model: N/A

Standards: FCC Part15.407

Test procedure.....: ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures
 New Rules v02r01
 FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01
 FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01
 KDB 905462 D03 Client Without DFS New Rules v01r02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests 27 Aug. 2020 ~ 21 Sep. 2020

Date of Issue 21 Sep. 2020

Test Result **Pass**

Testing Engineer :



(Mary Hu)

Technical Manager :



(Jason Chen)

Authorized Signatory :



(Alex Li)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	8
1.1 FACILITIES AND ACCREDITATIONS	9
1.2 MEASUREMENT UNCERTAINTY	9
1 . GENERAL INFORMATION	10
1.1 GENERAL DESCRIPTION OF EUT	10
1.2 DESCRIPTION OF TEST MODES	13
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	15
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	16
2 . EMC EMISSION TEST	18
2.1 CONDUCTED EMISSION MEASUREMENT	18
2.1.1 APPLICABLE STANDARD	18
2.1.2 CONFORMANCE LIMIT	18
2.1.3 TEST CONFIGURATION	18
2.1.4 TEST PROCEDURE	18
2.2 RADIATED EMISSION MEASUREMENT	27
2.2.1 APPLICABLE STANDARD	27
2.2.2 CONFORMANCE LIMIT	27
2.2.3 MEASURING INSTRUMENTS	27
2.2.4 TEST CONFIGURATION	28
2.2.5 TEST PROCEDURE	29
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	30
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	31
2.2.8 TEST RESULTS (1GHZ-18GHZ)	39
2.2.10 TEST RESULTS (18GHZ-40GHZ)	47
3 . POWER SPECTRAL DENSITY TEST	58
3.1 APPLIED PROCEDURES / LIMIT	58
3.2 TEST PROCEDURE	59
3.3 DEVIATION FROM STANDARD	59
3.4 TEST SETUP	59
3.5 EUT OPERATION CONDITIONS	59
3.6 TEST RESULTS	60
4 . 26DB & 99% EMISSION BANDWIDTH	61
4.1 APPLIED PROCEDURES / LIMIT	61
4.2 TEST PROCEDURE	61
4.3 EUT OPERATION CONDITIONS	62
4.4 TEST RESULTS	62

Table of Contents

	Page
5 . MINIMUM 6 DB BANDWIDTH	63
5.1 APPLIED PROCEDURES / LIMIT	63
5.2 TEST PROCEDURE	63
5.3 DEVIATION FROM STANDARD	63
5.4 TEST SETUP	63
5.5 EUT OPERATION CONDITIONS	63
5.6 TEST RESULTS	64
6 . MAXIMUM CONDUCTED OUTPUT POWER	65
6.1 PPLIED PROCEDURES / LIMIT	65
6.2 TEST RESULTS	67
7 . OUT OF BAND EMISSIONS	68
7.1 APPLICABLE STANDARD	68
7.2 TEST PROCEDURE	68
7.3 DEVIATION FROM STANDARD	68
7.4 TEST SETUP	68
7.5 EUT OPERATION CONDITIONS	69
7.6 TEST RESULTS	70
8. FREQUENCY STABILITY MEASUREMENT	71
8.1 LIMIT	71
8.2 TEST PROCEDURES	71
8.3 TEST SETUP LAYOUT	71
8.4 EUT OPERATION DURING TEST	71
8.5 TEST RESULTS	72
9. DYNAMIC FREQUENCY SELECTION(DFS)	84
9.1 APPLICABILITY OF DFS REQUIREMENTS	84
9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	84
9.3 DFS RESPONSE REQUIREMENT VALUES	85
9.4 SHORT PULSE RADAR TEST WAVEFORMS	85
9.5 CALIBRATION SETUP AND DFS TEST RESULTS	86
9.6 CONDUCTED CALIBRATION SETUP	86
9.7 RADAR WAVEFORM CALIBRATION RESULT	87
9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	88
9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	89

Table of Contents

	Page
10. ANTENNA REQUIREMENT	90
10.1 STANDARD REQUIREMENT	90
10.2 EUT ANTENNA	90
11. TEST RESULTS	91
5.2G:	91
11.1.1 DUTY CYCLE	91
11.1.2 MAXIMUM CONDUCTED OUTPUT POWER	106
11.1.3 OCCUPIED CHANNEL BANDWIDTH	107
11.1.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	136
11.1.5 BAND EDGE	151
11.1.6 CONDUCTED RF SPURIOUS EMISSION	164
5.3G:	179
11.2.1 DUTY CYCLE	179
11.2.2 MAXIMUM CONDUCTED OUTPUT POWER	194
11.2.3 OCCUPIED CHANNEL BANDWIDTH	195
11.2.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	224
11.2.5 BAND EDGE	239
11.2.6 CONDUCTED RF SPURIOUS EMISSION	251
5.6G:	266
11.3.1 DUTY CYCLE	266
11.3.2 MAXIMUM CONDUCTED OUTPUT POWER	284
11.3.3 OCCUPIED CHANNEL BANDWIDTH	285
11.3.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	320
11.3.5 BAND EDGE	338
11.3.6 CONDUCTED RF SPURIOUS EMISSION	351
5.8G:	369
11.4.1 DUTY CYCLE	369
11.4.2 MAXIMUM CONDUCTED OUTPUT POWER	384
11.4.3 -6DB EMISSION BANDWIDTH	385
11.4.4 OCCUPIED CHANNEL BANDWIDTH	400
11.4.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL	429
11.4.6 BAND EDGE	444
11.4.7 CONDUCTED RF SPURIOUS EMISSION	457
DFS:	472

Revision History

[illegible]

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A.
CAB identifier: CN0074

FCC- Accredited Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4297.38
This laboratory is accredited in accordance with the recognized
International Standard ISO/IEC 17025:2005 General requirements for the
competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined
scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	4K AOSP OTT BOX	
Trade Mark	DIGICEL	
Model Name	DV8547	
Family Model	N/A	
Model Difference	N/A	
FCC ID	2AW68-DV8547	
Product Description	Mode Supported	☒ 802.11a ☒ 802.11n(HT20) ☒ 802.11n(HT40) ☒ 802.11ac(HT20) ☒ 802.11ac(HT40) ☒ 802.11ac(HT80)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM
	Operating Frequency Range	☒ U-NII-1: 5150 MHz ~5250MHz ☒ U-NII-2A: 5250MHz~5350MHz ☒ U-NII-2C: 5470MHz~5725MHz ☒ U-NII-3: 5725 MHz ~5850 MHz
	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client
	DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection
	Support TPC	☐ YES ☒ NO
	Antenna Type	Antenna 1: FPCB antenna Antenna 2: FPCB antenna
	Antenna Gain	Antenna 1: 3.86dBi Antenna 2: 3.65dBi
	Smart system	☐ SISO for 802.11a/n/ac ☒ MIMO for 802.11n/ac
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		
Ratings	☒ DC supply: DC 5V from adapter	
Adapter	☒ Adapter supply: Model:SA12BV-050200U Input: AC100-240V~50/60Hz 0.4A Output: DC5.0V---2A	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	V6	
SW Version	Android 9	

Note:


- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz
	56	5280 MHz	62	5310 MHz		
	60	5300 MHz				
	64	5320 MHz				
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz
	108	5540 MHz	118	5590 MHz		
	112	5560 MHz	126	5630 MHz		
	116	5580 MHz	134	5670 MHz		
	120	5600 MHz				
	124	5620 MHz				
	128	5640 MHz				
	132	5660 MHz				
	136	5680 MHz				
	140	5700 MHz				
U-NII-3	149	5745 MHz	151	5755 MHz	155	5775 MHz
	153	5765 MHz	159	5795 MHz		
	157	5785 MHz				
	161	5805 MHz				
	165	5825 MHz				

Table for Filed Antenna

Antenna	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPCB antenna	IPEX	3.86	Wifi Antenna
2	N/A	N/A	FPCB antenna	IPEX	3.65	Wifi Antenna

This EUT has supports Bluetooth, WIFI2.4G / 5G.

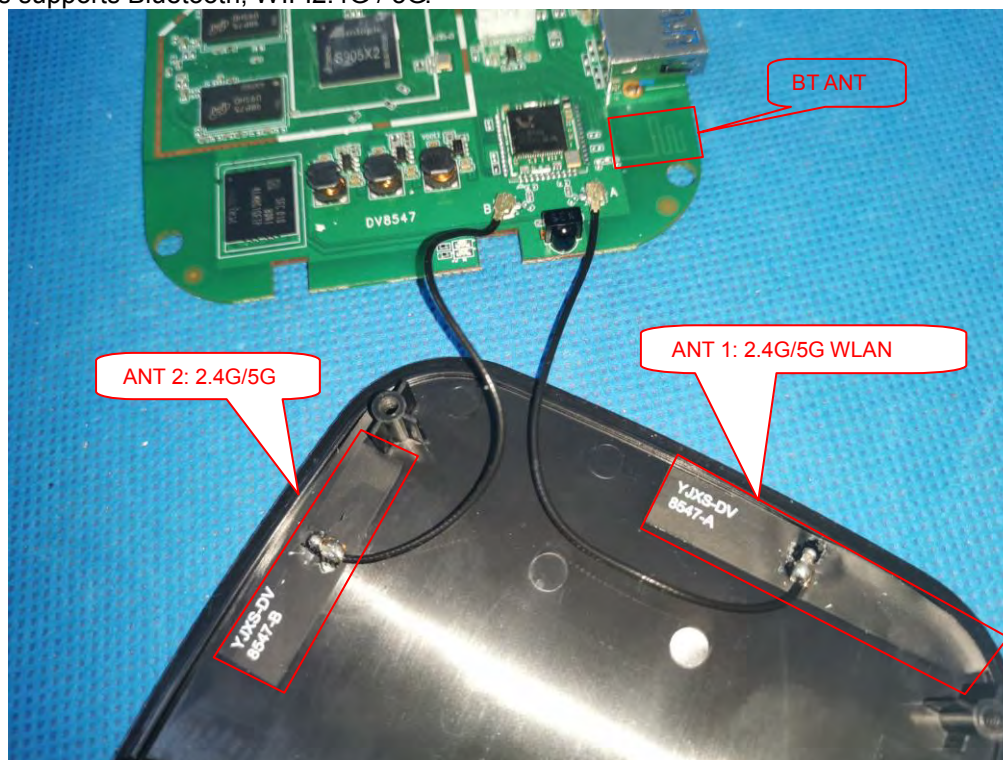

The module 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1TX, 1RX
802.11n/ac	2TX, 2RX

For 5GHz mode, Antenna 1,2 are transmitting, each with the same directional gain.
For MIMO mode, Directional gain= $[10\log(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ dBi = 6.77dBi in 5GHz
the 802.11n(20/40) ac(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.
G2 means antenna gain for ANT 2 in dBi.
 N_{ANT} means the number of Antennas.

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80 CH42/CH58/CH106/CH122/CH155


For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80 CH42/CH58/CH106/CH122/CH155

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode



For Radiated Test Cases



For Conducted Test Cases



Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	SA12BV-050200U	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	NO	1.2m	
C-2	RF Cable	YES	NO	0.1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.7.13	2021.7.12	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.08.07	2021.08.06	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
8	Amplifier	EMC	EMC051835SE	980246	2020.7.13	2021.7.12	1 year
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2019.12.11	2020.12.10	1 year
10	Power Meter	DARE	RPR3006W	15I00041SN084	2020.7.13	2021.7.12	1 year
11	USB RF Power Sensor	DARE	RPR3006W	15I00041SN084	2020.7.13	2021.7.12	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.6	2022.08.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2020.04.11	2021.04.10	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.7.13	2021.7.12	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
18	Low Noise Amplifier	B&Z	BZ-P540-550850-452727	16476-11729	2020.04.15	2021.04.14	1 year
19	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2019.12.11	2020.12.10	1 year
20	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.04.11	2021.04.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2021.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

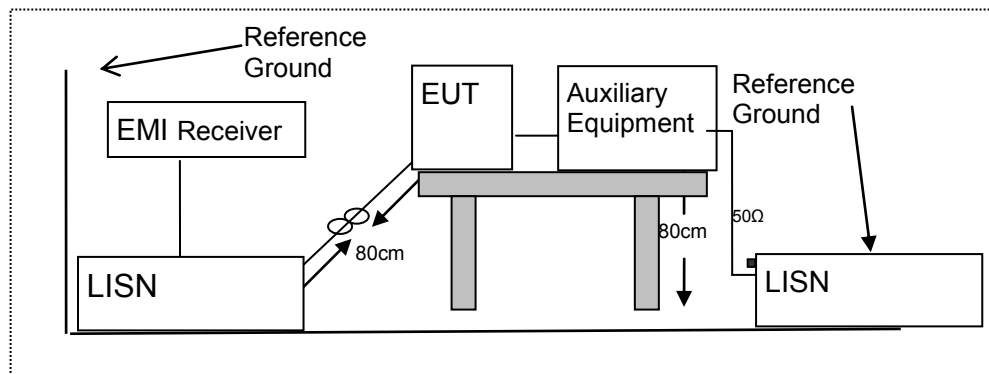

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1785	48.49	9.55	58.04	64.55	-6.51	QP
0.1785	31.45	9.55	41.00	54.55	-13.55	AVG
0.2220	43.41	9.55	52.96	62.74	-9.78	QP
0.2220	25.39	9.55	34.94	52.74	-17.80	AVG
0.3100	35.38	9.54	44.92	59.97	-15.05	QP
0.3100	20.22	9.54	29.76	49.97	-20.21	AVG
0.5660	29.23	9.55	38.78	56.00	-17.22	QP
0.5660	24.04	9.55	33.59	46.00	-12.41	AVG
1.5300	23.55	9.58	33.13	56.00	-22.87	QP
1.5300	13.15	9.58	22.73	46.00	-23.27	AVG
21.9100	28.97	9.95	38.92	60.00	-21.08	QP
21.9100	21.36	9.95	31.31	50.00	-18.69	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

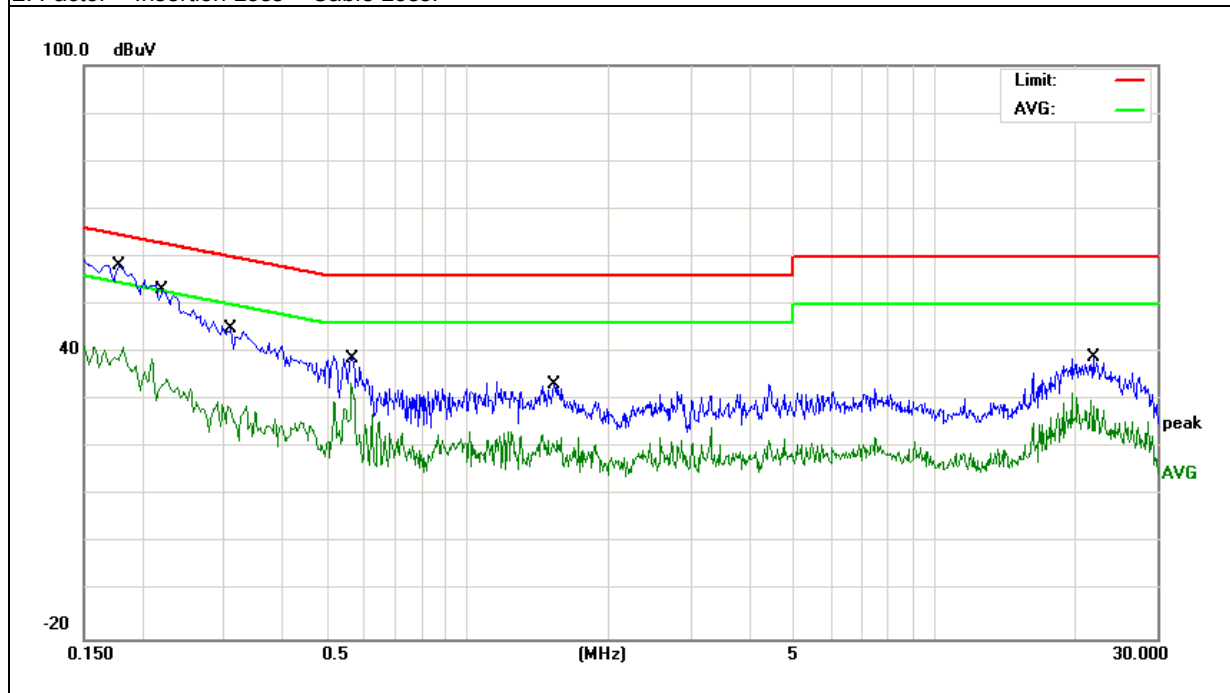


EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1700	46.70	9.55	56.25	64.96	-8.71	QP
0.1700	30.84	9.55	40.39	54.96	-14.57	AVG
0.2420	40.24	9.54	49.78	62.02	-12.24	QP
0.2420	23.78	9.54	33.32	52.02	-18.70	AVG
0.3500	32.44	9.53	41.97	58.96	-16.99	QP
0.3500	17.84	9.53	27.37	48.96	-21.59	AVG
0.5658	30.85	9.54	40.39	56.00	-15.61	QP
0.5699	25.98	9.54	35.52	46.00	-10.48	AVG
1.1460	25.34	9.55	34.89	56.00	-21.11	QP
1.1460	16.76	9.55	26.31	46.00	-19.69	AVG
23.1299	33.49	9.91	43.40	60.00	-16.60	QP
23.1299	21.30	9.91	31.21	50.00	-18.79	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

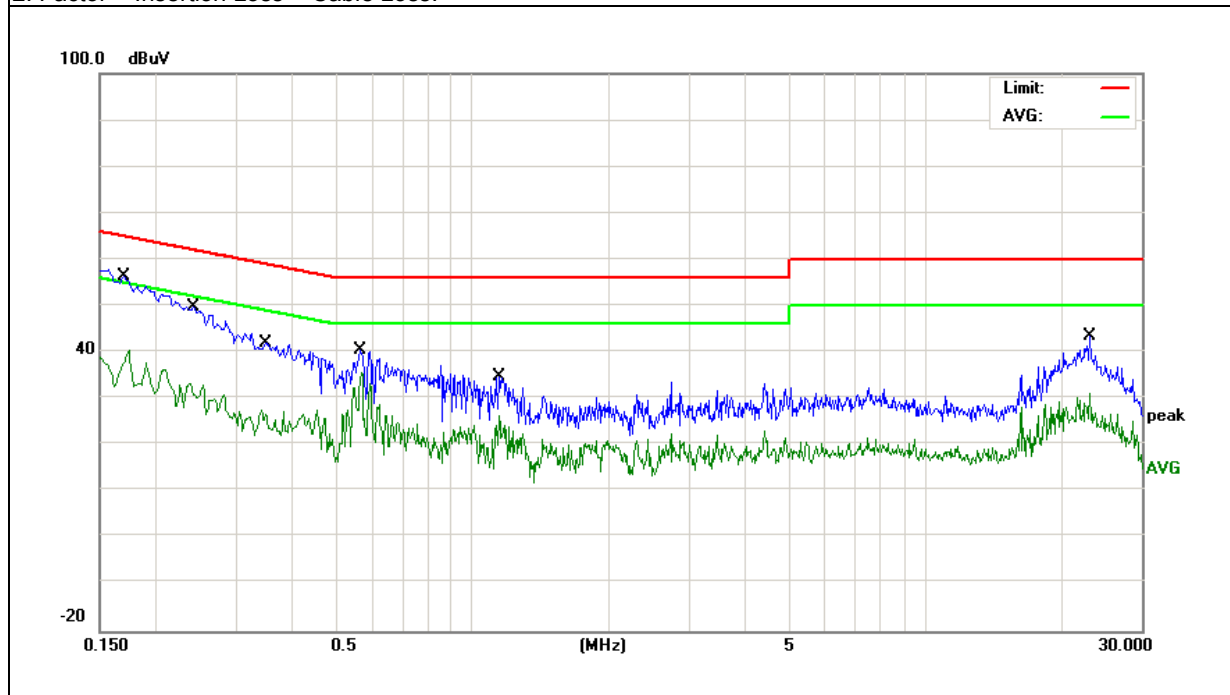


EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1700	48.13	9.56	57.69	64.96	-7.27	QP
0.1700	29.94	9.56	39.50	54.96	-15.46	AVG
0.2460	39.96	9.55	49.51	61.89	-12.38	QP
0.2460	23.43	9.55	32.98	51.89	-18.91	AVG
0.5820	28.33	9.55	37.88	56.00	-18.12	QP
0.5820	23.50	9.55	33.05	46.00	-12.95	AVG
1.2180	23.65	9.56	33.21	56.00	-22.79	QP
1.2180	11.83	9.56	21.39	46.00	-24.61	AVG
16.2299	25.07	9.81	34.88	60.00	-25.12	QP
16.2299	16.35	9.81	26.16	50.00	-23.84	AVG
21.6620	28.44	9.94	38.38	60.00	-21.62	QP
21.6620	20.38	9.94	30.32	50.00	-19.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

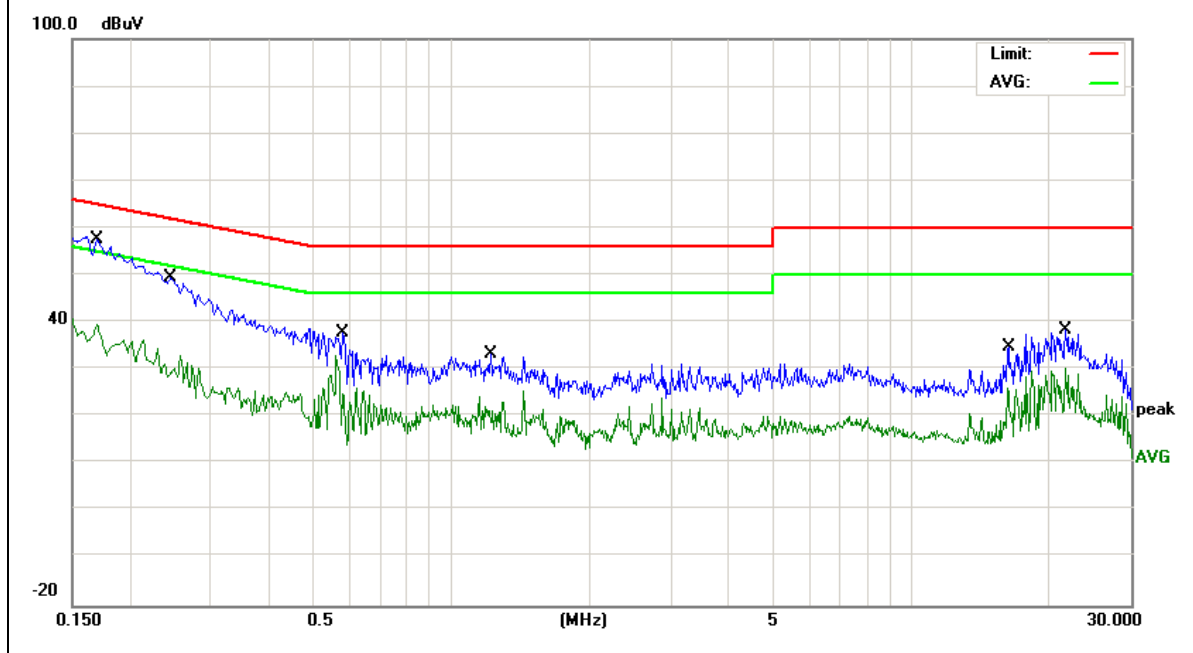


EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1556	47.27	9.55	56.82	65.69	-8.87	QP
0.1556	28.37	9.55	37.92	55.69	-17.77	AVG
0.1900	44.78	9.54	54.32	64.03	-9.71	QP
0.1900	26.44	9.54	35.98	54.03	-18.05	AVG
0.2340	41.00	9.54	50.54	62.30	-11.76	QP
0.2340	25.52	9.54	35.06	52.30	-17.24	AVG
0.5700	31.02	9.54	40.56	56.00	-15.44	QP
0.5700	24.43	9.54	33.97	46.00	-12.03	AVG
16.2299	24.76	9.79	34.55	60.00	-25.45	QP
16.2299	16.46	9.79	26.25	50.00	-23.75	AVG
23.1299	31.67	9.91	41.58	60.00	-18.42	QP
23.1299	21.48	9.91	31.39	50.00	-18.61	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

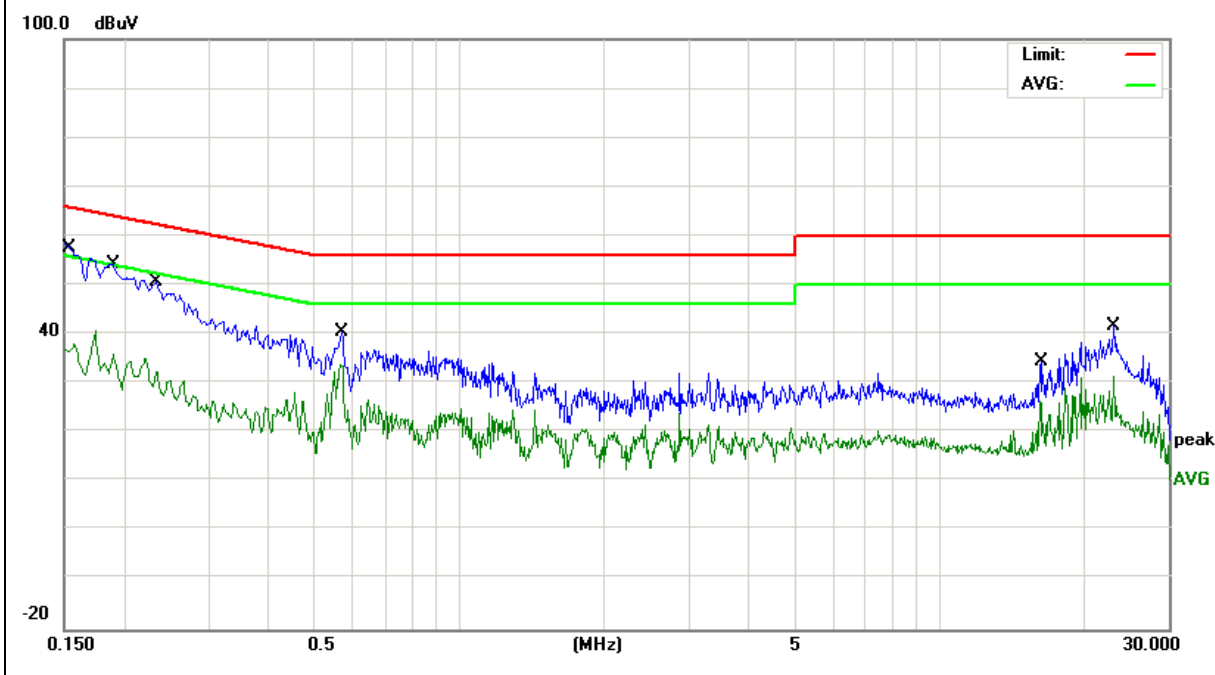


EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1524	48.26	9.56	57.82	65.86	-8.04	QP
0.1524	31.04	9.56	40.60	55.86	-15.26	AVG
0.1980	45.97	9.55	55.52	63.69	-8.17	QP
0.1980	27.59	9.55	37.14	53.69	-16.55	AVG
0.2540	39.81	9.54	49.35	61.62	-12.27	QP
0.2540	22.31	9.54	31.85	51.62	-19.77	AVG
0.5740	30.23	9.55	39.78	56.00	-16.22	QP
0.5740	22.73	9.55	32.28	46.00	-13.72	AVG
16.1659	25.06	9.80	34.86	60.00	-25.14	QP
16.1659	16.93	9.80	26.73	50.00	-23.27	AVG
19.7099	26.88	9.93	36.81	60.00	-23.19	QP
19.7099	18.50	9.93	28.43	50.00	-21.57	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

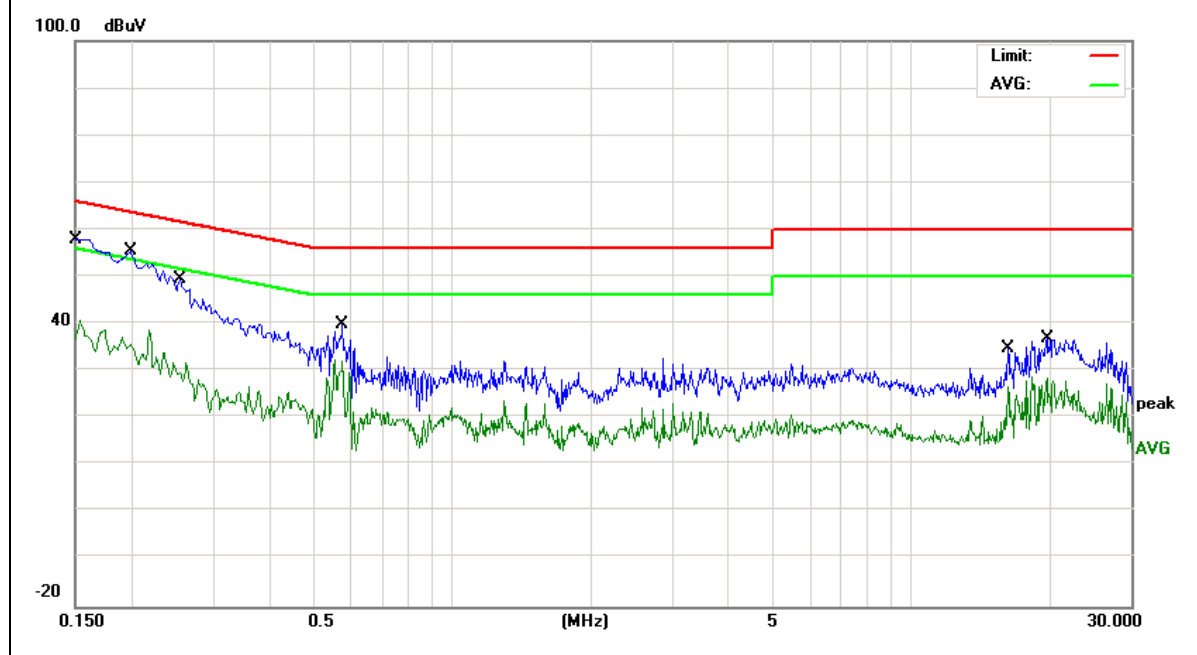


EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	48.56	9.55	58.11	65.78	-7.67	QP
0.1539	32.49	9.55	42.04	55.78	-13.74	AVG
0.2020	43.53	9.54	53.07	63.52	-10.45	QP
0.2020	24.09	9.54	33.63	53.52	-19.89	AVG
0.5660	30.73	9.54	40.27	56.00	-15.73	QP
0.5660	24.22	9.54	33.76	46.00	-12.24	AVG
1.2940	25.62	9.55	35.17	56.00	-20.83	QP
1.2940	14.99	9.55	24.54	46.00	-21.46	AVG
18.9139	26.42	9.89	36.31	60.00	-23.69	QP
18.9139	19.89	9.89	29.78	50.00	-20.22	AVG
22.8620	30.32	9.92	40.24	60.00	-19.76	QP
22.8620	20.24	9.92	30.16	50.00	-19.84	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

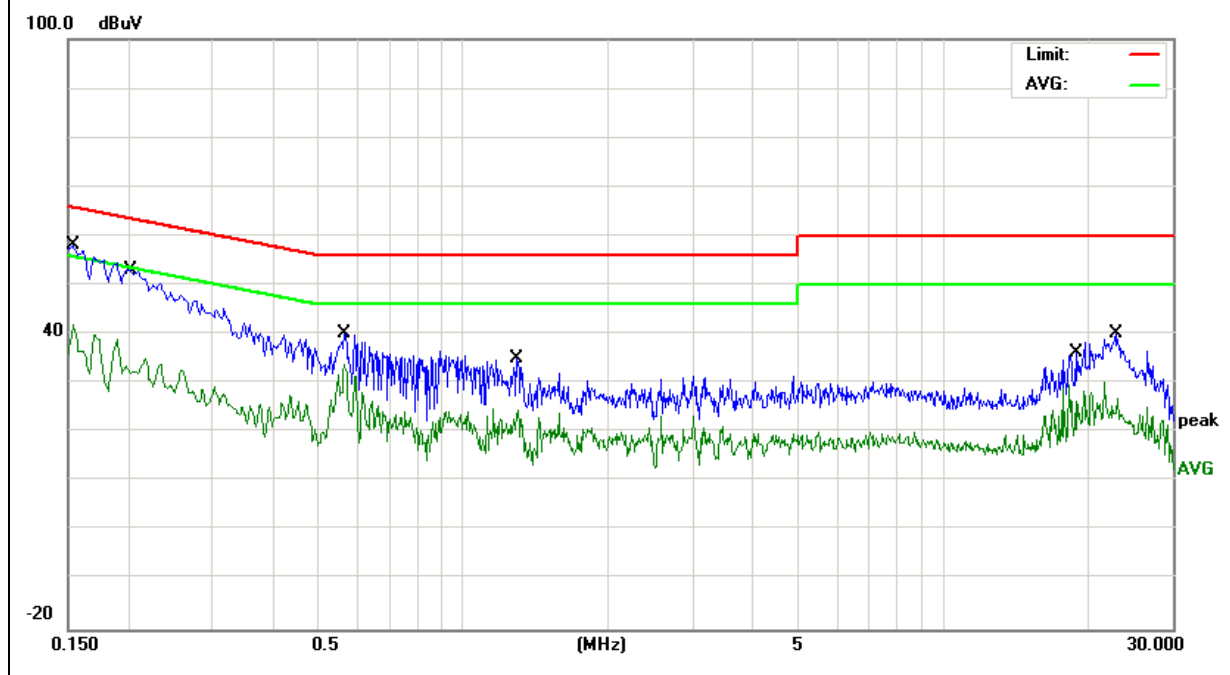


EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1833	44.75	9.55	54.30	64.33	-10.03	QP
0.1833	28.17	9.55	37.72	54.33	-16.61	AVG
0.2340	40.55	9.55	50.10	62.30	-12.20	QP
0.2340	23.54	9.55	33.09	52.30	-19.21	AVG
0.5100	33.85	9.55	43.40	56.00	-12.60	QP
0.5100	19.67	9.55	29.22	46.00	-16.78	AVG
0.5897	32.45	9.55	42.00	56.00	-14.00	QP
0.5897	25.02	9.55	34.57	46.00	-11.43	AVG
1.4416	23.88	9.56	33.44	56.00	-22.56	QP
1.4416	12.72	9.56	22.28	46.00	-23.72	AVG
20.9298	30.86	9.94	40.80	60.00	-19.20	QP
20.9298	22.38	9.94	32.32	50.00	-17.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

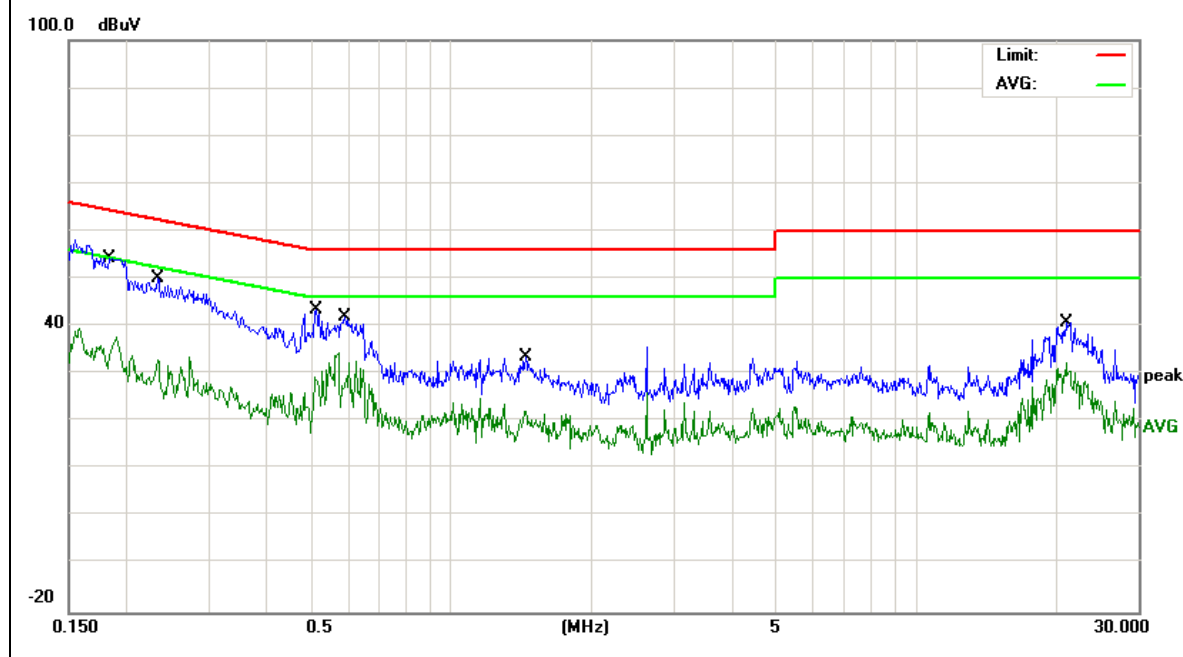


EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1607	49.05	9.55	58.60	65.42	-6.82	QP
0.1607	30.43	9.55	39.98	55.42	-15.44	AVG
0.2419	44.96	9.54	54.50	62.03	-7.53	QP
0.2419	26.96	9.54	36.50	52.03	-15.53	AVG
0.3518	35.17	9.53	44.70	58.92	-14.22	QP
0.3518	21.15	9.53	30.68	48.92	-18.24	AVG
0.7177	32.36	9.54	41.90	56.00	-14.10	QP
0.7177	23.77	9.54	33.31	46.00	-12.69	AVG
1.0540	27.17	9.55	36.72	56.00	-19.28	QP
1.0540	17.43	9.55	26.98	46.00	-19.02	AVG
21.4460	31.59	9.91	41.50	60.00	-18.50	QP
21.4460	21.37	9.91	31.28	50.00	-18.72	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

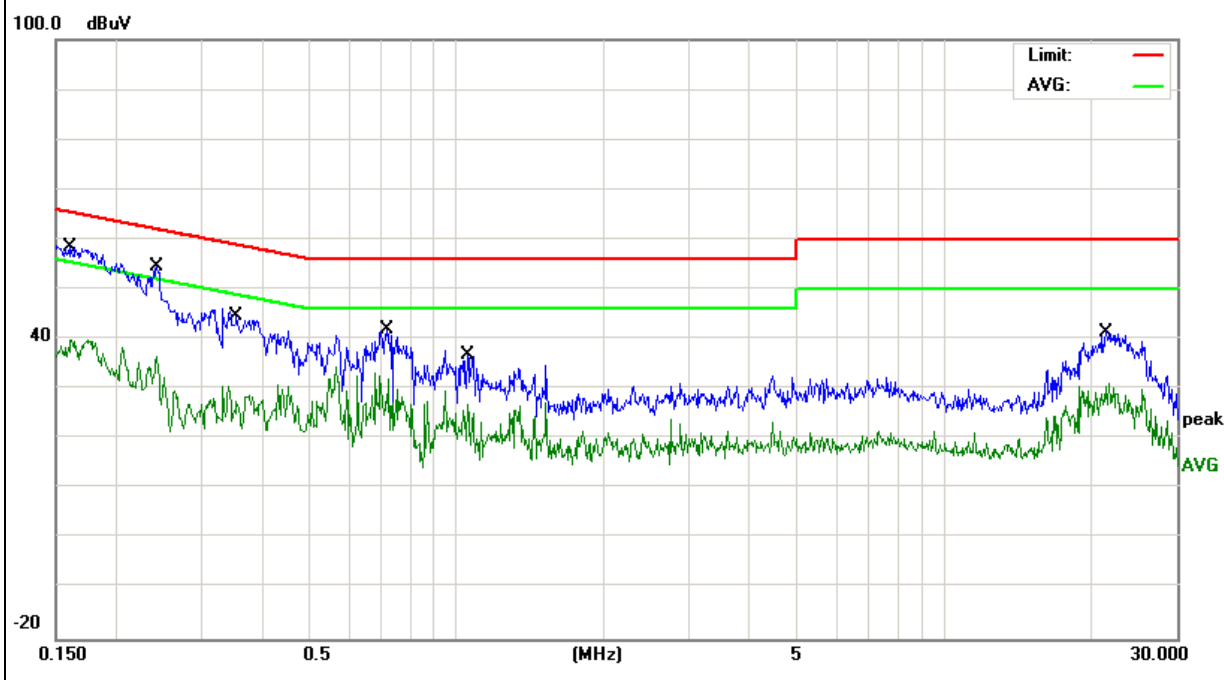

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

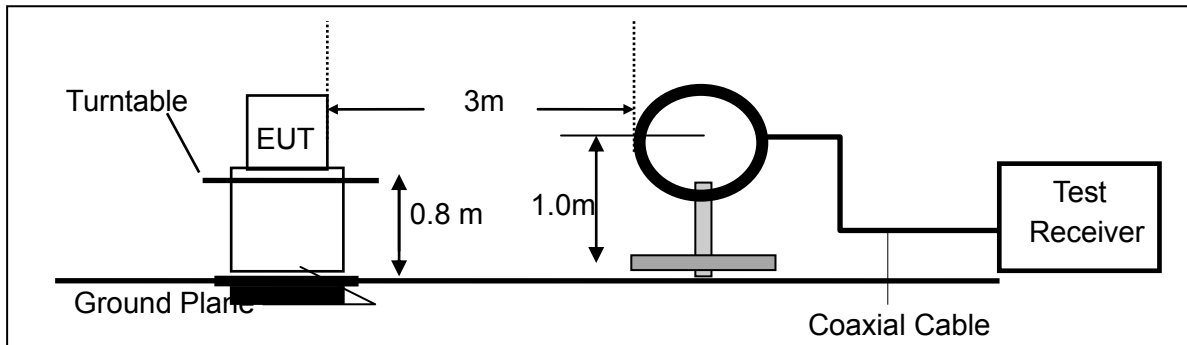

(b) For radiated emissions from 30MHz to 1000MHz

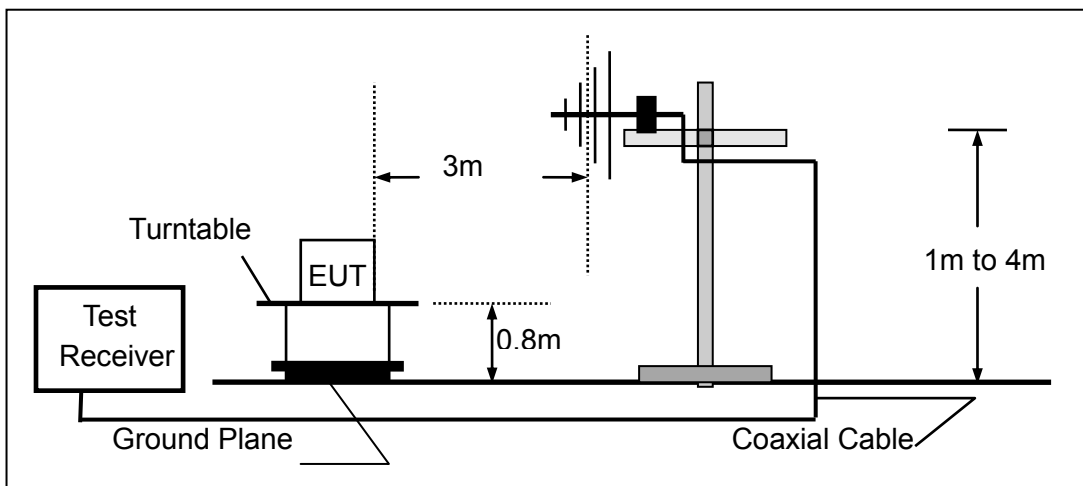

(c) For radiated emissions above 1000MHz

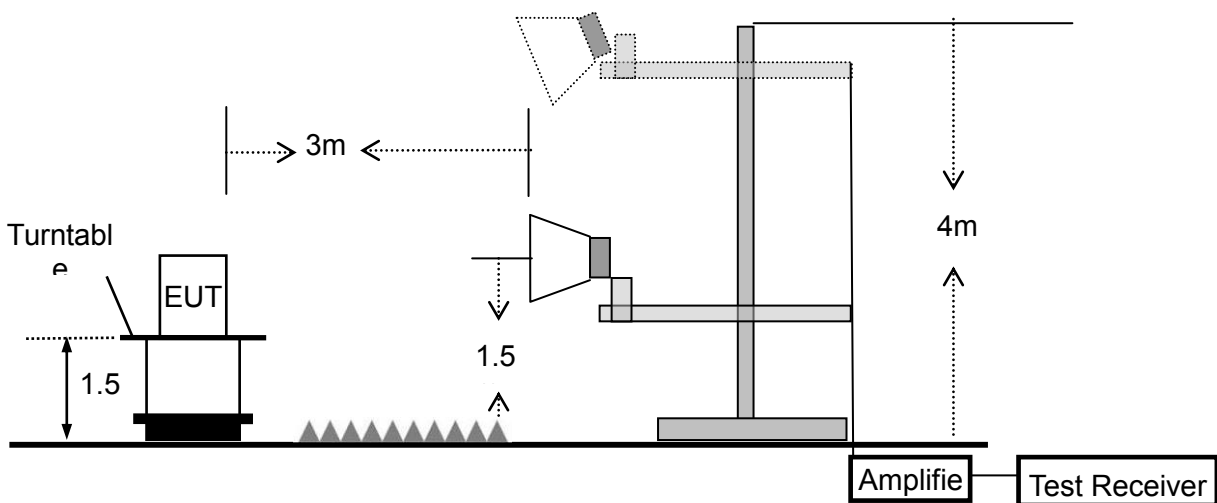

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	27 °C	Relative Humidity :	52%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.2G)- 802.11ac40 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	142.8243	17.07	12.20	29.27	43.50	-14.23	QP
V	149.4857	17.38	11.98	29.36	43.50	-14.14	QP
V	183.8440	21.08	9.76	30.84	43.50	-12.66	QP
V	227.6906	20.32	10.84	31.16	46.00	-14.84	QP
V	425.0280	16.86	18.27	35.13	46.00	-10.87	QP
V	562.6624	14.90	22.22	37.12	46.00	-8.88	QP

Remark:


Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

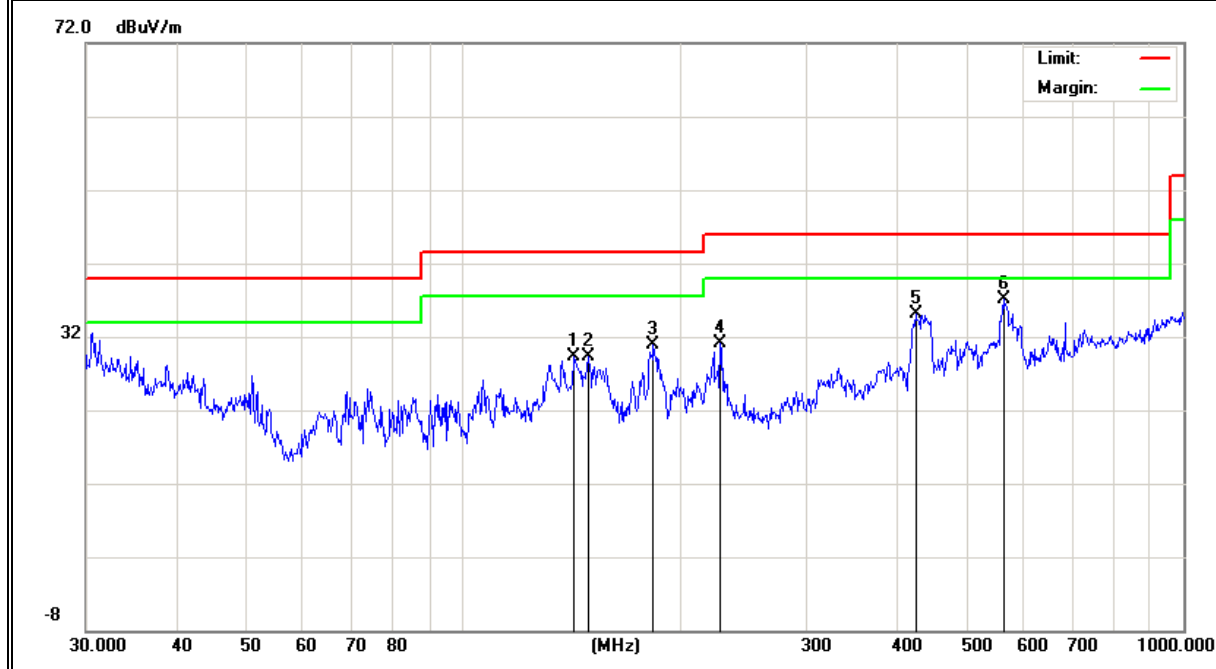

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	188.4124	18.73	9.35	28.08	43.50	-15.42	QP
H	222.9501	21.66	10.91	32.57	46.00	-13.43	QP
H	290.0172	16.86	14.32	31.18	46.00	-14.82	QP
H	343.1800	15.68	16.15	31.83	46.00	-14.17	QP
H	562.6624	15.06	22.22	37.28	46.00	-8.72	QP
H	593.0497	15.54	21.49	37.03	46.00	-8.97	QP

Remark:

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

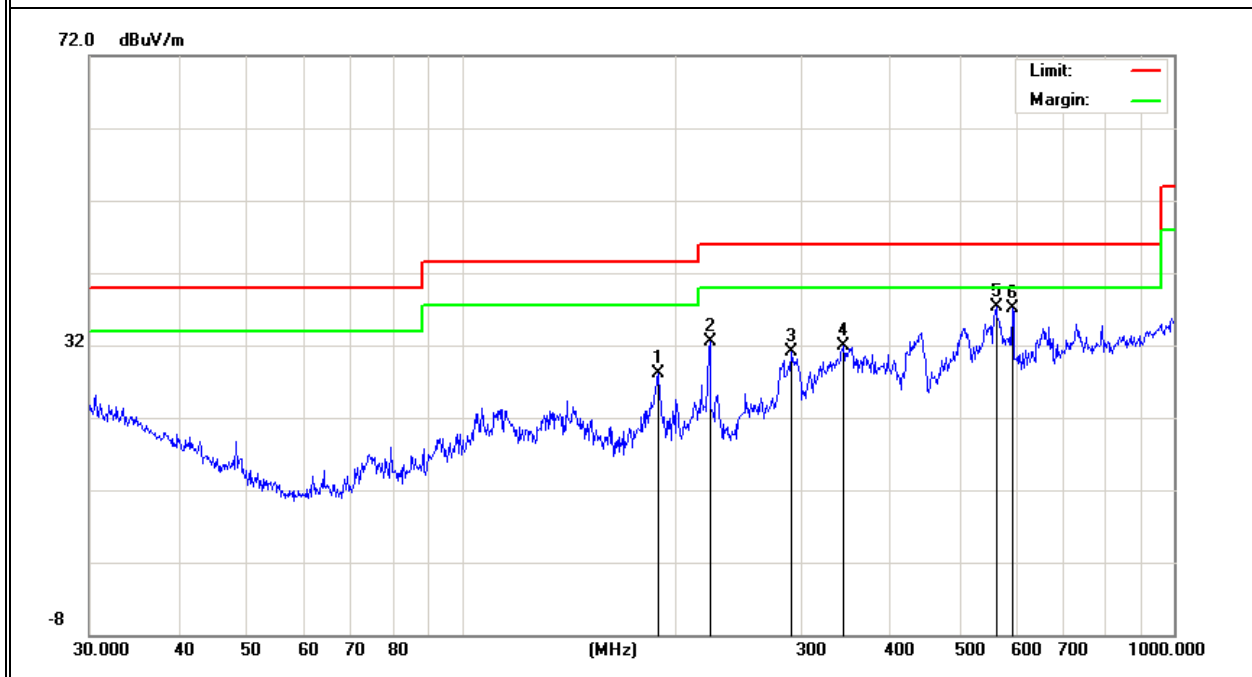


EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	27 °C	Relative Humidity :	52%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.3G)- 802.11n20 (Middle CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.3992	17.74	18.10	35.84	40.00	-4.16	QP
V	49.5328	22.13	9.55	31.68	40.00	-8.32	QP
V	143.3261	17.35	12.17	29.52	43.50	-13.98	QP
V	228.4902	20.65	10.82	31.47	46.00	-14.53	QP
V	390.7226	15.95	17.34	33.29	46.00	-12.71	QP
V	435.5898	16.75	18.47	35.22	46.00	-10.78	QP

Remark:


Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

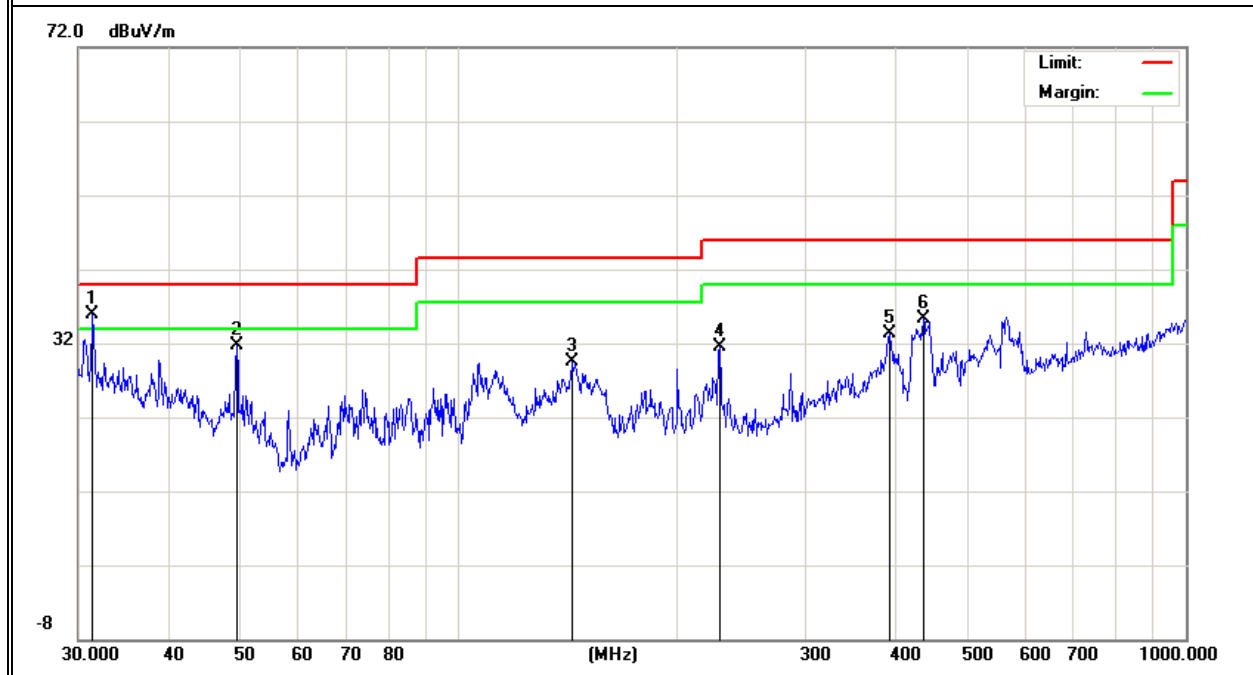

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	130.3789	12.98	12.56	25.54	43.50	-17.96	QP
H	190.4050	18.04	9.16	27.20	43.50	-16.30	QP
H	281.0075	15.67	15.67	31.34	46.00	-14.66	QP
H	440.1963	18.44	18.61	37.05	46.00	-8.95	QP
H	510.0436	15.11	20.66	35.77	46.00	-10.23	QP
H	539.4775	14.48	21.57	36.05	46.00	-9.95	QP

Remark:

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

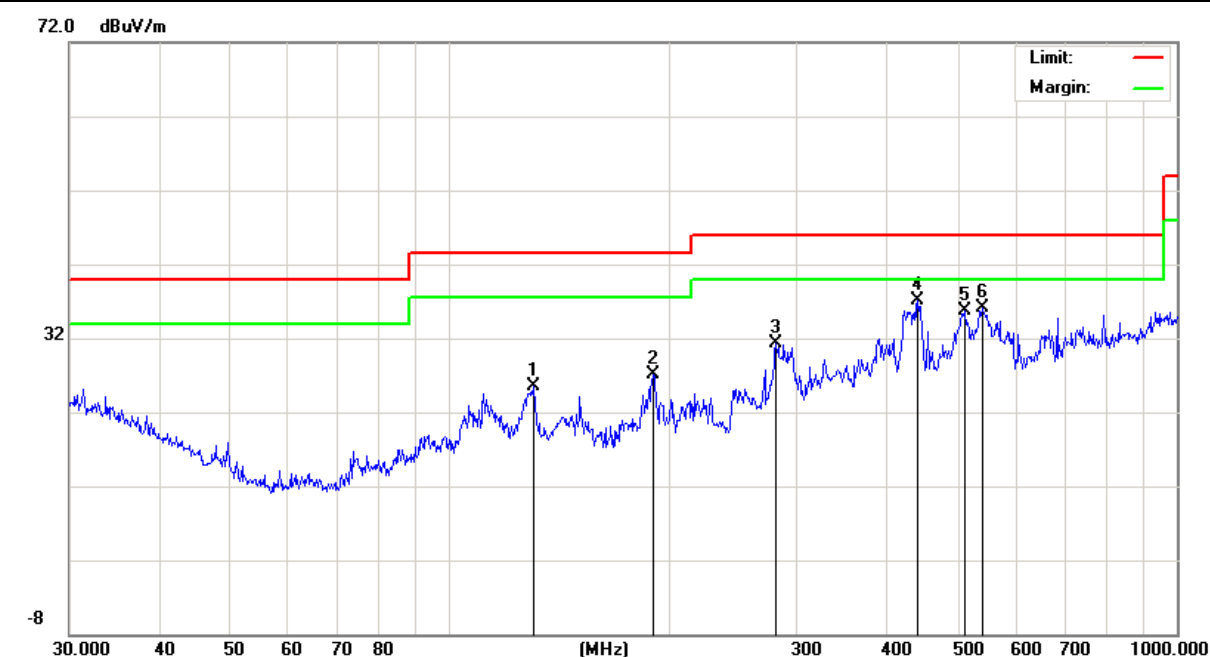


EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	27 °C	Relative Humidity :	52%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.6G)- 802.11ac20 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.2924	15.08	17.72	32.80	40.00	-7.20	peak
V	106.7587	18.57	11.14	29.71	43.50	-13.79	peak
V	143.3260	17.64	12.17	29.81	43.50	-13.69	peak
V	387.9920	16.28	17.24	33.52	46.00	-12.48	peak
V	504.7062	15.15	20.65	35.80	46.00	-10.20	peak
V	903.3093	10.78	26.32	37.10	46.00	-8.90	peak

Remark:


Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

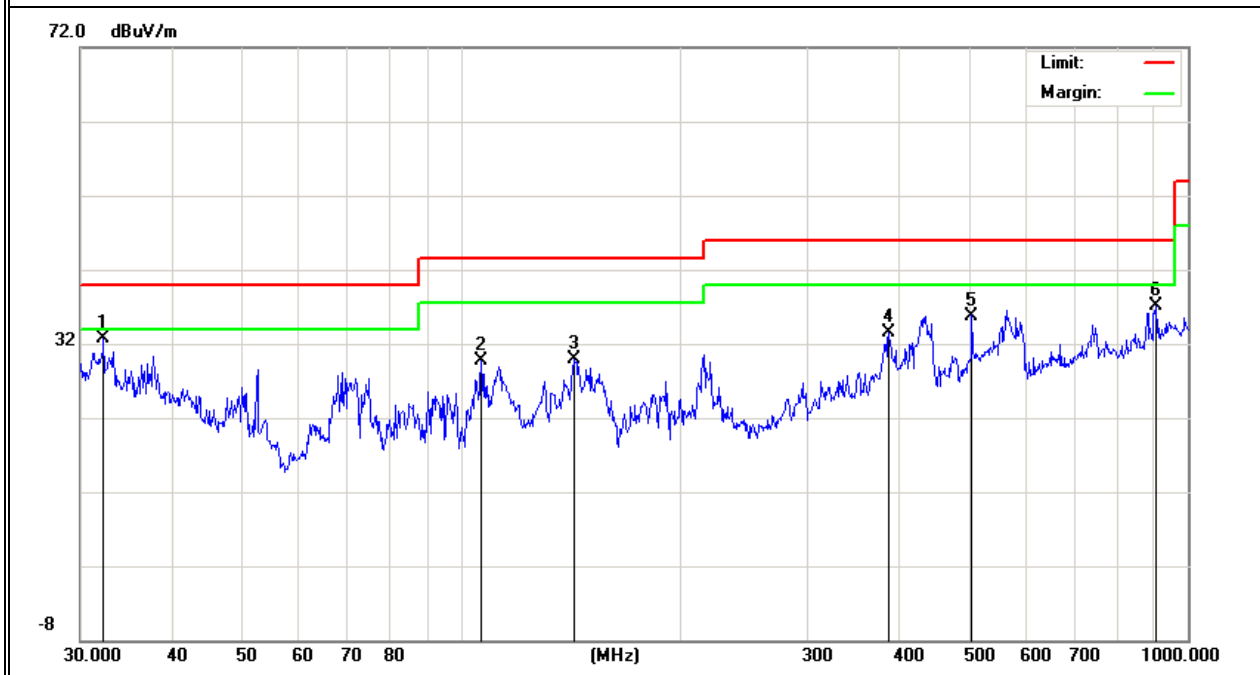

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	295.1469	22.26	14.24	36.50	46.00	-9.50	QP
H	383.9318	15.39	17.11	32.50	46.00	-13.50	QP
H	530.1014	18.30	20.90	39.20	46.00	-6.80	QP
H	562.6624	16.98	22.22	39.20	46.00	-6.80	QP
H	734.4913	9.19	25.15	34.34	46.00	-11.66	QP
H	793.3958	9.74	25.13	34.87	46.00	-11.13	QP

Remark:

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

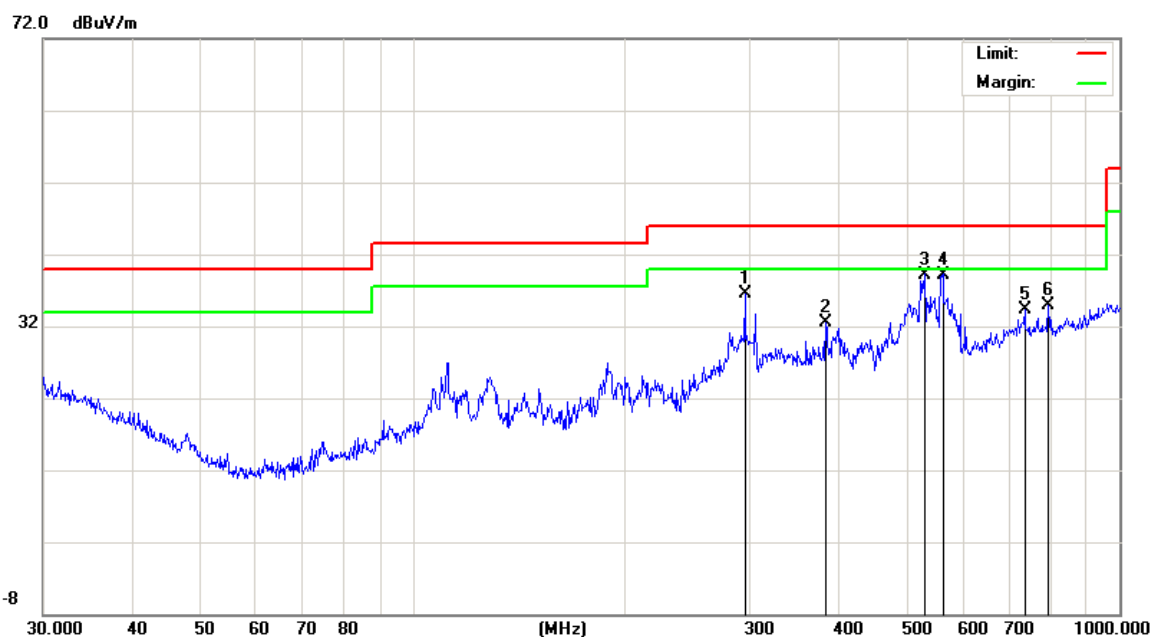


EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	27 °C	Relative Humidity :	52%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.8G) - 802.11n20 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.9618	14.85	18.33	33.18	40.00	-6.82	QP
V	41.4215	17.56	13.08	30.64	40.00	-9.36	QP
V	107.5100	24.11	11.15	35.26	43.50	-8.24	QP
V	438.6553	19.14	18.56	37.70	46.00	-8.30	QP
V	472.1759	16.69	19.17	35.86	46.00	-10.14	QP
V	599.3211	18.51	21.69	40.20	46.00	-5.80	QP

Remark:


Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

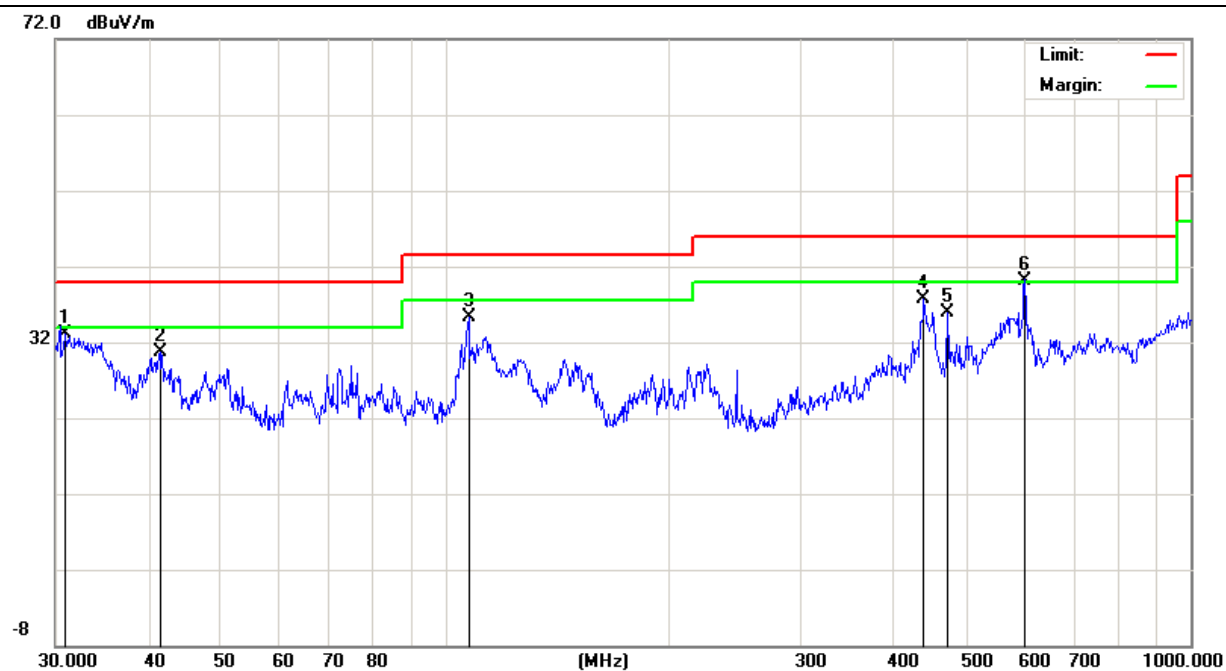

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	281.0074	17.05	15.67	32.72	46.00	-13.28	QP
H	293.0842	20.13	14.27	34.40	46.00	-11.60	QP
H	420.5803	18.63	18.27	36.90	46.00	-9.10	QP
H	522.7178	19.68	20.52	40.20	46.00	-5.80	QP
H	568.6127	17.87	21.93	39.80	46.00	-6.20	QP
H	668.1422	13.05	22.45	35.50	46.00	-10.50	QP

Remark:

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

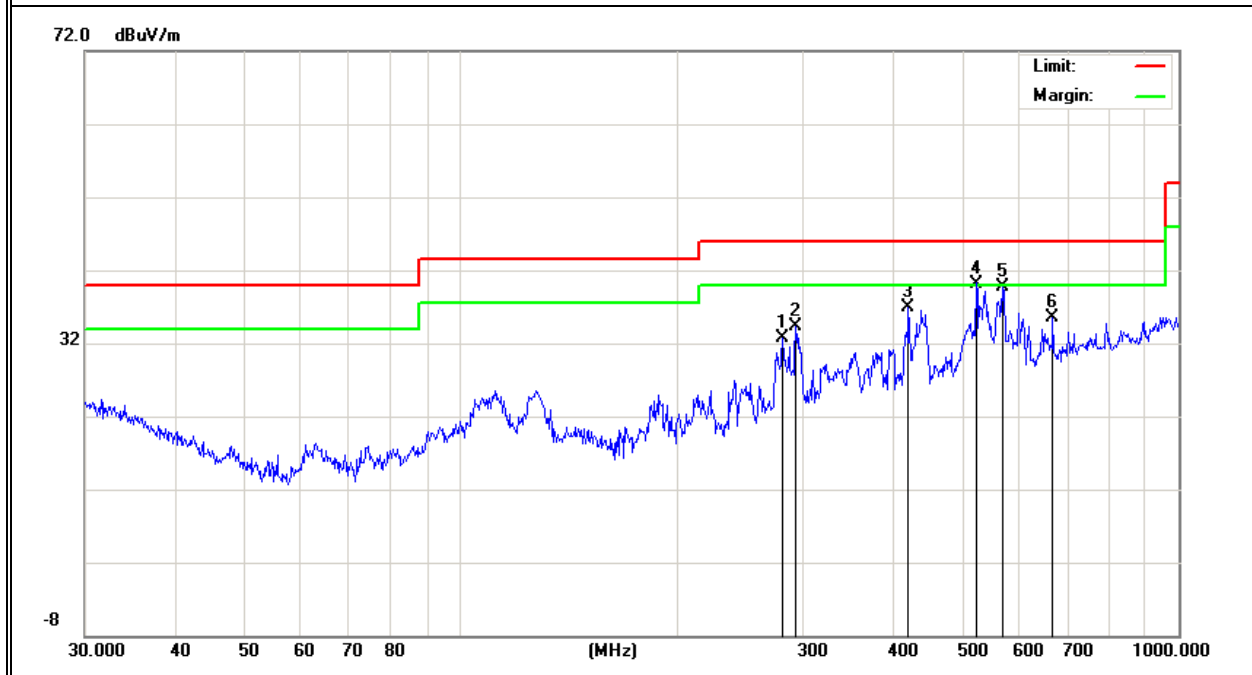

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.2G) - 802.11ac80_5180~5240MHz		

Polar	Frequency	ReadingLevel	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3015	61.47	5.94	35.40	44.00	58.81	68.2	-9.39	Pk
Vertical	10360	63.31	8.46	39.75	44.50	67.02	68.2	-1.18	Pk
Vertical	15540	61.58	10.12	38.80	44.10	66.40	74	-7.60	Pk
Vertical	15540	41.76	10.12	38.80	42.70	47.98	54	-6.02	AV
Horizontal	2981	62.46	5.94	35.18	44.00	59.58	68.2	-8.62	Pk
Horizontal	10360	60.13	8.46	38.71	44.50	62.80	68.2	-5.40	Pk
Horizontal	15540	59.67	10.12	38.38	44.10	64.07	74	-9.93	Pk
Horizontal	15540	39.33	10.12	38.38	44.10	43.73	54	-10.27	AV
Middle Channel (5200 MHz)-Above 1G									
Vertical	3561	63.77	6.48	36.35	44.05	62.55	68.2	-5.65	Pk
Vertical	10400	61.17	8.47	37.88	44.51	63.01	68.2	-5.19	Pk
Vertical	15600	59.87	10.12	38.8	44.1	64.69	74	-9.31	Pk
Vertical	15600	42.09	10.12	38.8	42.7	48.31	54	-5.69	AV
Horizontal	3363	63.00	6.48	36.37	44.05	61.80	68.2	-6.40	Pk
Horizontal	10400	59.83	8.47	38.64	44.5	62.44	68.2	-5.76	Pk
Horizontal	15600	59.65	10.12	38.38	44.1	64.05	74	-9.95	Pk
Horizontal	15600	43.39	10.12	38.38	44.1	47.79	54	-6.21	AV
High Channel (5240 MHz)-Above 1G									
Vertical	3926	63.23	7.1	37.24	43.5	64.07	74	-9.93	Pk
Vertical	3926	44.24	7.1	37.24	43.5	45.08	54	-8.92	AV
Vertical	10480	61.38	8.46	37.68	44.5	63.02	68.2	-5.18	Pk
Vertical	15720	57.27	10.12	38.8	44.1	62.09	74	-11.91	Pk
Vertical	15720	35.06	10.12	38.8	42.7	41.28	54	-12.72	AV
Horizontal	3885	65.23	7.1	37.24	43.5	66.07	74	-7.93	Pk
Horizontal	3885	40.34	7.1	37.24	43.5	41.18	54	-12.82	AV
Horizontal	10480	58.57	8.46	38.57	44.5	61.10	68.2	-7.10	Pk
Horizontal	15720	60.10	10.12	38.38	44.1	64.50	74	-9.50	Pk
Horizontal	15720	40.24	10.12	38.38	44.1	44.64	54	-9.36	AV

Note: "802.11ac80(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.3G) - 802.11ac20 _5260~5320MHz		

Polar	Frequency	ReadingLevel	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4633.53	61.31	5.44	35.40	44.00	58.15	74.00	-15.85	Pk
Vertical	4633.53	43.25	5.74	35.40	44.00	40.39	54.00	-13.61	AV
Vertical	10520.40	59.53	8.26	39.75	44.50	63.05	68.20	-5.15	Pk
Vertical	15780.62	60.66	10.12	38.80	44.10	65.48	74.00	-8.52	Pk
Vertical	15780.62	38.46	9.62	38.80	42.70	44.18	54.00	-9.82	AV
Horizontal	4366.43	64.11	5.57	35.18	44.00	60.85	74.00	-13.15	Pk
Horizontal	4366.43	43.34	5.74	35.18	44.00	40.26	54.00	-13.74	AV
Horizontal	10520.54	59.08	8.38	38.71	44.50	61.67	68.20	-6.53	Pk
Horizontal	15780.62	57.23	9.88	38.38	44.10	61.39	74.00	-12.61	Pk
Horizontal	15780.62	40.78	9.94	38.38	44.10	45.00	54.00	-9.00	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4122.62	58.91	6.08	36.35	44.05	57.29	74.00	-16.71	Pk
Vertical	4122.62	42.07	6.39	36.35	44.05	40.76	54.00	-13.24	AV
Vertical	10560.47	58.92	8.28	37.88	44.51	60.57	68.20	-7.63	Pk
Vertical	15840.64	60.56	9.79	38.8	44.10	65.05	74.00	-8.95	Pk
Vertical	15840.64	39.08	9.70	38.8	42.70	44.88	54.00	-9.12	AV
Horizontal	3869.76	57.71	6.11	36.37	44.05	56.14	74.00	-17.86	Pk
Horizontal	3869.76	45.30	6.27	36.37	44.05	43.89	54.00	-10.11	AV
Horizontal	10561.02	61.68	8.33	38.64	44.50	64.15	68.20	-4.05	Pk
Horizontal	15840.65	59.35	9.99	38.38	44.10	63.62	74.00	-10.38	Pk
Horizontal	15840.65	39.78	9.81	38.38	44.10	43.87	54.00	-10.13	AV

High Channel (5320 MHz)-Above 1G									
Vertical	5366.80	60.98	6.96	37.24	43.50	61.68	74.00	-12.32	Pk
Vertical	5366.80	43.07	7.07	37.24	43.50	43.88	54.00	-10.12	AV
Vertical	10640.86	60.11	8.14	37.68	44.50	61.43	74.00	-12.57	Pk
Vertical	10640.86	39.97	8.35	37.68	44.50	41.51	54.00	-12.49	AV
Vertical	15960.69	60.00	10.11	38.8	44.10	64.81	74.00	-9.19	Pk
Vertical	15960.69	37.89	9.64	38.8	42.70	43.63	54.00	-10.37	AV
Horizontal	5436.87	60.99	7.05	37.24	43.50	61.78	74.00	-12.22	Pk
Horizontal	5436.87	41.17	7.05	37.24	43.50	41.96	54.00	-12.04	AV
Horizontal	10640.52	59.50	8.20	38.57	44.50	61.76	74.00	-12.24	Pk
Horizontal	10640.52	42.67	8.03	38.57	44.50	44.77	54.00	-9.23	AV
Horizontal	15961.16	59.55	9.81	38.38	44.10	63.64	74.00	-10.36	Pk
Horizontal	15961.16	42.59	9.96	38.38	44.10	46.83	54.00	-7.17	AV

Note: ANT 1 802.11ac20(5G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.6G) - 802.11ac80 _5530~5600MHz		

Polar	Frequency	ReadingLevel	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5433.30	62.00	5.61	35.40	44.00	59.01	74.00	-14.99	Pk
Vertical	5433.30	42.91	5.61	35.40	44.00	39.92	54.00	-14.08	AV
Vertical	11000.32	57.37	8.24	39.75	44.50	60.86	74.00	-13.14	Pk
Vertical	11000.32	39.43	8.35	39.75	44.50	43.03	54.00	-10.97	AV
Vertical	16500.12	48.43	10.05	38.80	44.10	53.18	68.20	-15.02	Pk
Horizontal	5126.75	57.65	5.78	35.18	44.00	54.61	74.00	-19.39	Pk
Horizontal	5126.75	39.59	5.66	35.18	44.00	36.44	54.00	-17.56	AV
Horizontal	11000.32	55.51	8.22	38.71	44.50	57.94	74.00	-16.06	Pk
Horizontal	11000.32	38.99	8.14	38.71	44.50	41.34	54.00	-12.66	AV
Horizontal	16500.12	59.57	10.04	38.38	44.10	63.88	68.20	-4.32	Pk
High Channel (5600 MHz)-Above 1G									
Vertical	5647.61	59.86	6.79	37.24	43.50	60.39	68.20	-7.81	Pk
Vertical	11200.71	58.40	8.10	37.68	44.50	59.68	74.00	-14.32	Pk
Vertical	11200.71	40.33	8.23	37.68	44.50	41.74	54.00	-12.26	AV
Vertical	16800.00	59.05	9.70	38.80	44.10	63.45	68.20	-4.75	Pk
Horizontal	5433.54	58.00	6.74	37.24	43.50	58.48	74.00	-15.52	Pk
Horizontal	5433.54	40.21	6.74	37.24	43.50	40.69	54.00	-13.31	AV
Horizontal	11200.71	58.22	8.25	38.57	44.50	60.55	74.00	-13.45	Pk
Horizontal	11200.71	39.97	8.25	38.57	44.50	42.29	54.00	-11.71	AV
Horizontal	16800.00	59.72	10.09	38.38	44.10	64.08	68.20	-4.12	Pk
High Channel (5700 MHz)-Above 1G									
Vertical	5647.61	59.22	6.79	37.24	43.50	59.75	68.20	-8.45	Pk
Vertical	11400.54	58.45	8.10	37.68	44.50	59.73	74.00	-14.27	Pk
Vertical	11400.54	40.26	8.23	37.68	44.50	41.67	54.00	-12.33	AV
Vertical	17100.36	59.14	9.70	38.80	44.10	63.54	68.20	-4.66	Pk
Horizontal	5433.54	58.40	6.74	37.24	43.50	58.88	74.00	-15.12	Pk
Horizontal	5433.54	40.48	6.74	37.24	43.50	40.96	54.00	-13.04	AV
Horizontal	11400.54	58.04	8.25	38.57	44.50	60.36	74.00	-13.64	Pk
Horizontal	11400.54	39.81	8.25	38.57	44.50	42.13	54.00	-11.87	AV
Horizontal	17100.36	59.67	10.09	38.38	44.10	64.04	68.20	-4.16	Pk

Note: "802.11ac80(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.8G) -- 802.11ac20_5745~5825MHz		

Polar	Frequency	ReadingLevel	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2806.9	64.48	5.94	35.40	44.00	61.82	74.00	-12.18	Pk
Vertical	2806.9	45.58	5.94	35.40	44.00	42.92	54.00	-11.08	AV
Vertical	11490.56	63.3	8.46	39.75	44.50	67.01	74.00	-6.99	Pk
Vertical	11490.56	43.32	8.46	39.75	44.50	47.03	54.00	-6.97	AV
Vertical	17235.32	59.15	10.12	38.80	44.10	63.97	68.20	-4.23	Pk
Horizontal	2911.524	64.63	5.94	35.18	44.00	61.75	68.20	-6.45	Pk
Horizontal	11490.56	62.66	8.46	38.71	44.50	65.33	74.00	-8.67	Pk
Horizontal	11490.56	40.93	8.46	38.71	44.50	43.60	54.00	-10.40	AV
Horizontal	17235.56	58.85	10.12	38.38	44.10	63.25	68.20	-4.95	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	3763.083	64.22	6.48	36.35	44.05	63.00	74.00	-11.00	Pk
Vertical	3763.083	42.11	6.48	36.35	44.05	40.89	54.00	-13.11	AV
Vertical	11570.56	63.24	8.47	37.88	44.51	65.08	74.00	-8.92	Pk
Vertical	11570.56	45.28	8.47	37.88	44.51	47.12	54.00	-6.88	AV
Vertical	17355.56	63.84	10.12	38.8	44.10	68.66	68.20	0.46	Pk
Horizontal	3561.585	61.26	6.48	36.37	44.05	60.06	68.20	-8.14	Pk
Horizontal	11570.56	60.48	8.47	38.64	44.50	63.09	74.00	-10.91	Pk
Horizontal	11570.56	44.04	8.47	38.64	44.50	46.65	54.00	-7.35	AV
Horizontal	17355.56	63.70	10.12	38.38	44.10	68.10	74.00	-5.90	Pk
Horizontal	17355.35	43.63	10.12	38.38	44.10	48.03453	54.00	-5.96547	AV

High Channel (5825 MHz)-Above 1G									
Vertical	3907.168	60.84	7.10	37.24	43.50	61.68	74.00	-12.32	Pk
Vertical	3907.168	43.35	7.10	37.24	43.50	44.19	54.00	-9.81	AV
Vertical	11650.54	60.99	8.46	37.68	44.50	62.63	74.00	-11.37	Pk
Vertical	11650.54	43.03	8.46	37.68	44.50	44.67	54.00	-9.33	AV
Vertical	17475.54	59.56	10.12	38.8	44.10	64.38	68.20	-3.82	Pk
Horizontal	3912.779	61.83	7.10	37.24	43.50	62.67	74.00	-11.33	Pk
Horizontal	3912.779	43.25	7.10	37.24	43.50	44.09	54.00	-9.91	AV
Horizontal	11650.54	63.02	8.46	38.57	44.50	65.55	74.00	-8.45	Pk
Horizontal	11650.54	43.09	8.46	38.57	44.50	45.62	54.00	-8.38	AV
Horizontal	17475.54	60.51	10.12	38.38	44.10	64.91	68.20	-3.29	Pk

Note:"802.11ac20(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


2.2.10 TEST RESULTS (18GHz-40GHz)

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz; TX (5.3G)-802.11a 5260MHz~5320MHz; TX (5.6G)-802.11a 5500MHz~5700MHz; TX (5.8G)-802.11a 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 1G

Horizontal

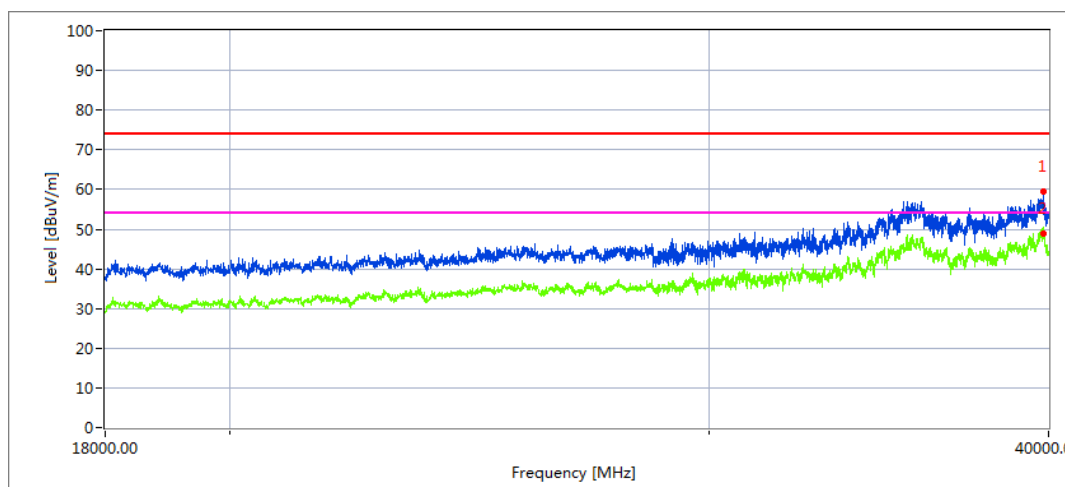

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.27	33.82	20.09	44.07	43.48	54.5	68.2	13.7	Peak


Vertical

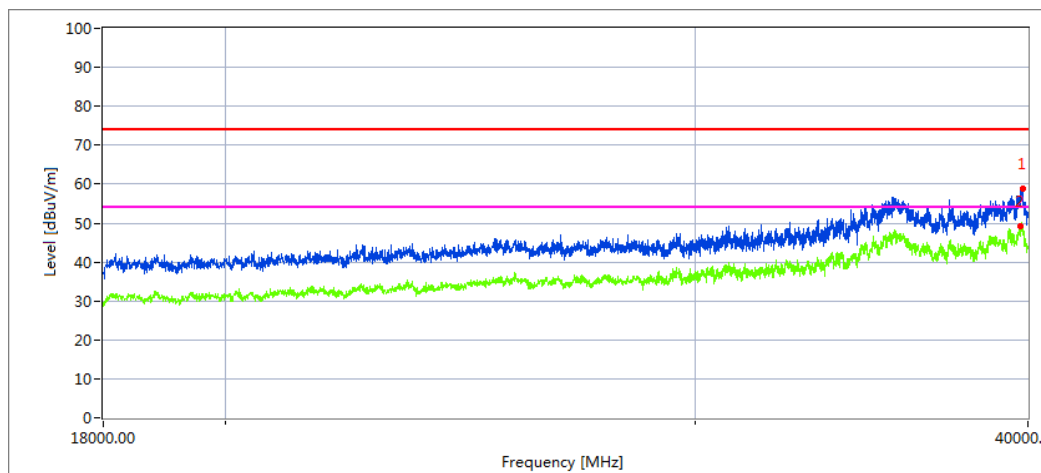

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.546	35.92	20.09	44.07	43.48	56.6	68.2	11.6	Peak


High Channel (5240 MHz)-Above 1G

Horizontal

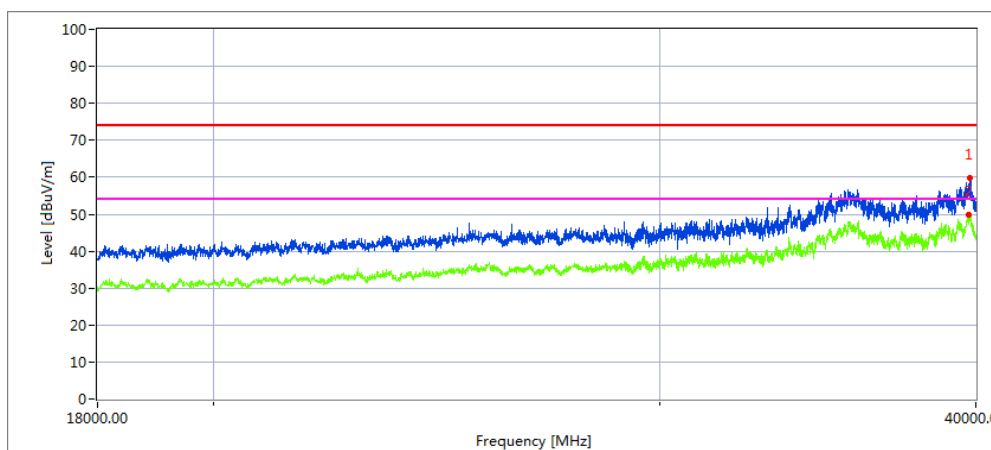

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39793.264	38.37	19.11	42.73	44.61	55.6	68.2	12.6	Peak

Vertical

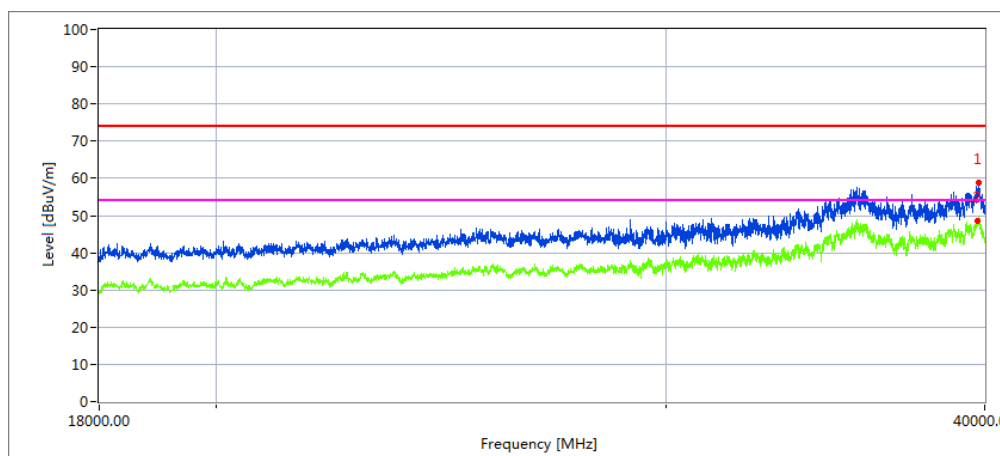


Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39795.968	35.42	20.09	44.07	43.48	56.1	68.2	12.1	Peak

Note: 802.11n20 MIMO mode is the worst mode.


Low Channel (5260 MHz)-Above 1G

Horizontal

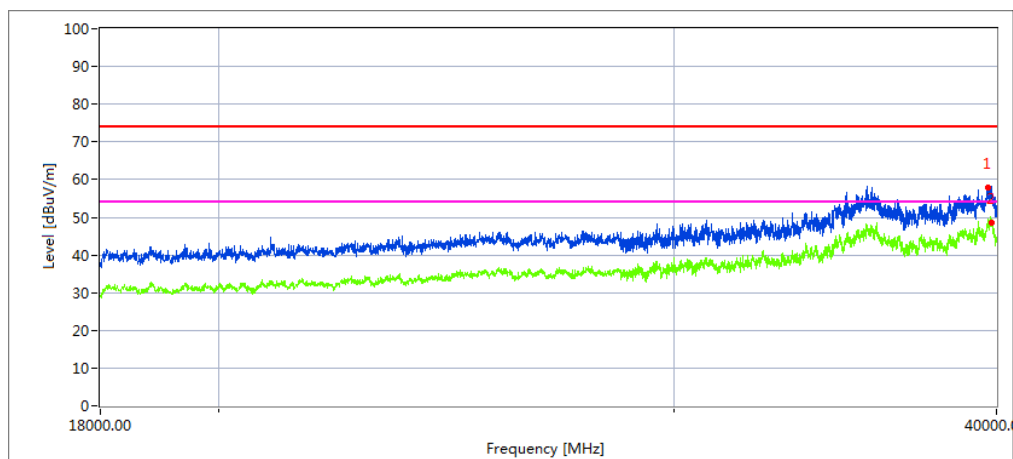

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39703.444	33.43	20.09	44.16	43.48	54.2	68.2	14	Peak


Vertical

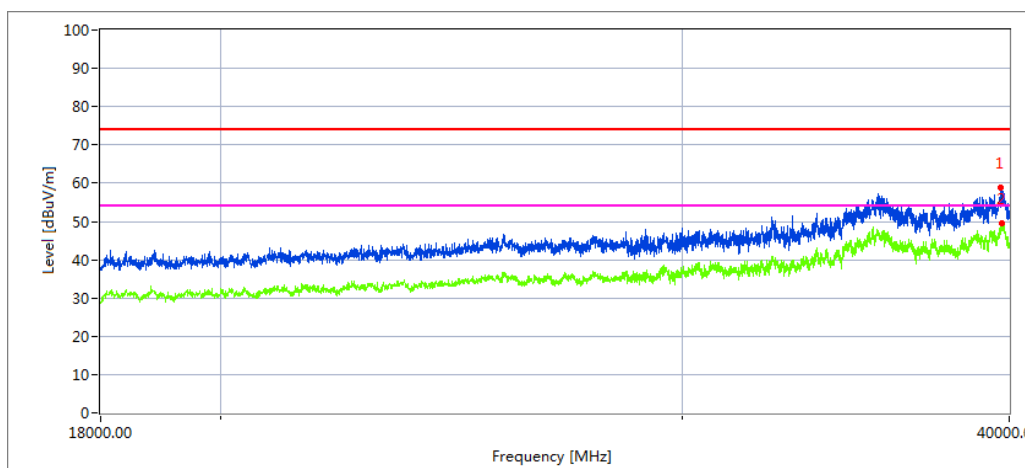

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39695.222	39769.476	35.42	20.09	44.07	43.48	56.1	68.2	Peak


High Channel (5320 MHz)-Above 1G

Horizontal

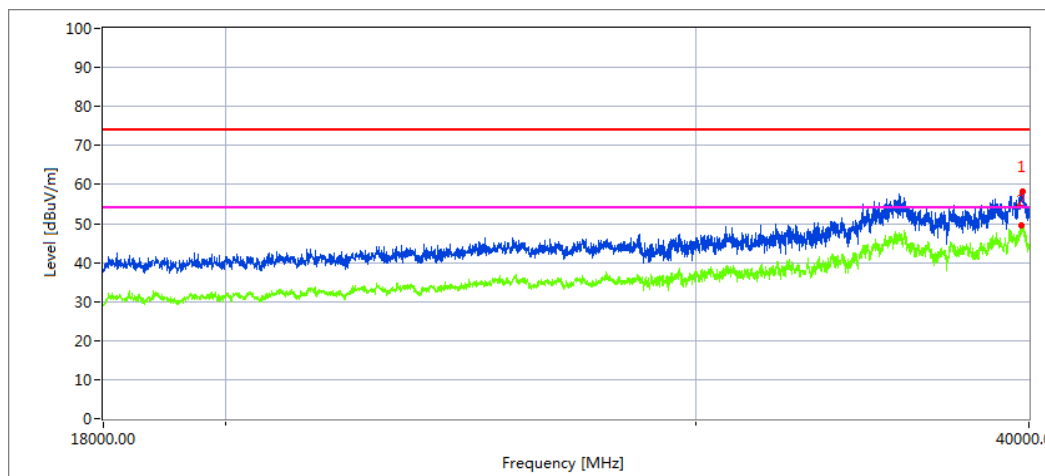

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39792.598	33.43	20.09	44.16	43.48	54.2	68.2	14	Peak

Vertical

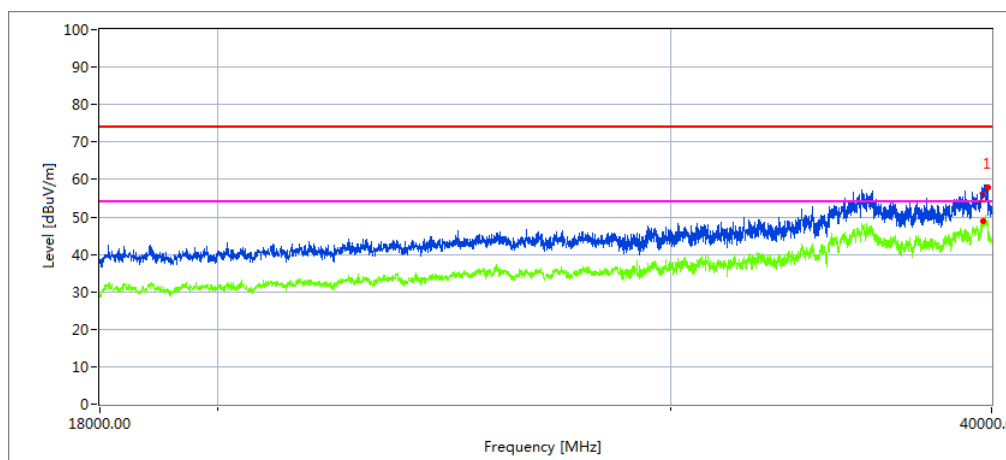


Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39849.346	36.58	20.06	44.07	43.21	57.5	68.2	10.7	Peak

Note:802.11n20 MIMO mode is the worst mode.


Low Channel (5500 MHz)-Above 1G

Horizontal

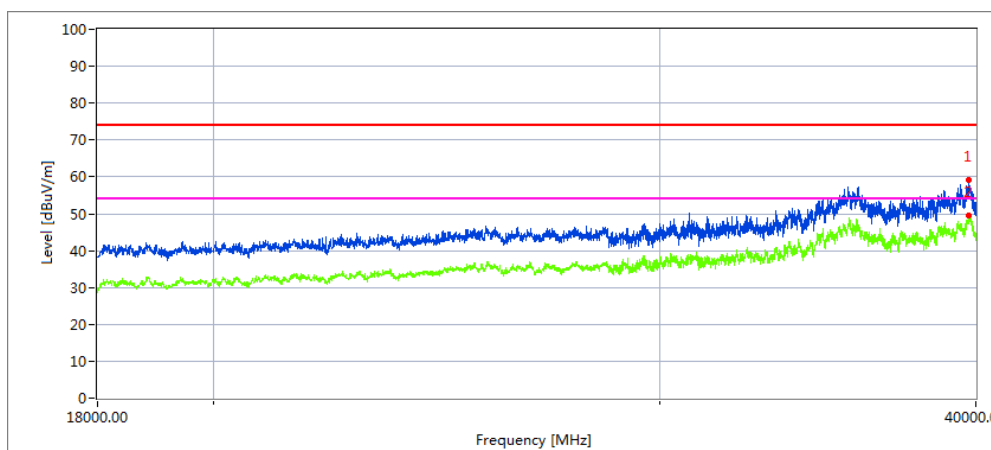

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39735.574	39670.224	33.43	20.09	44.16	43.48	54.2	68.2	Peak


Vertical

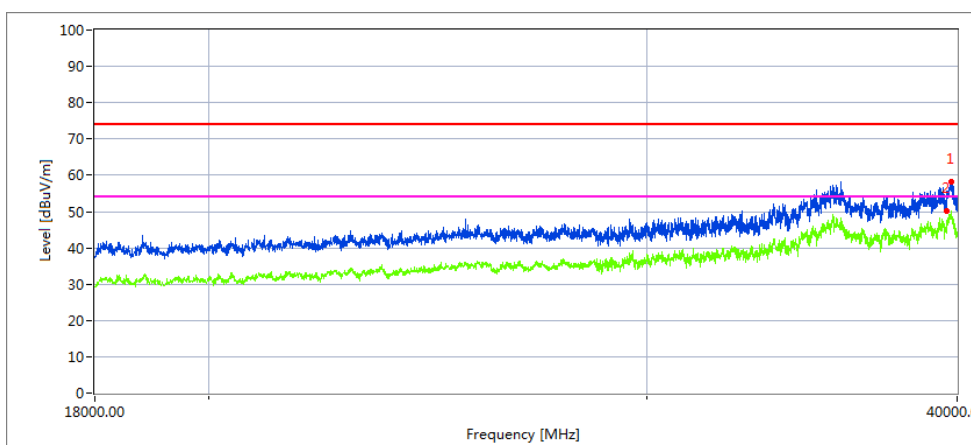

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39775.044	36.58	20.06	44.07	43.21	57.5	68.2	10.7	Peak


High Channel (5700 MHz)-Above 1G

Horizontal

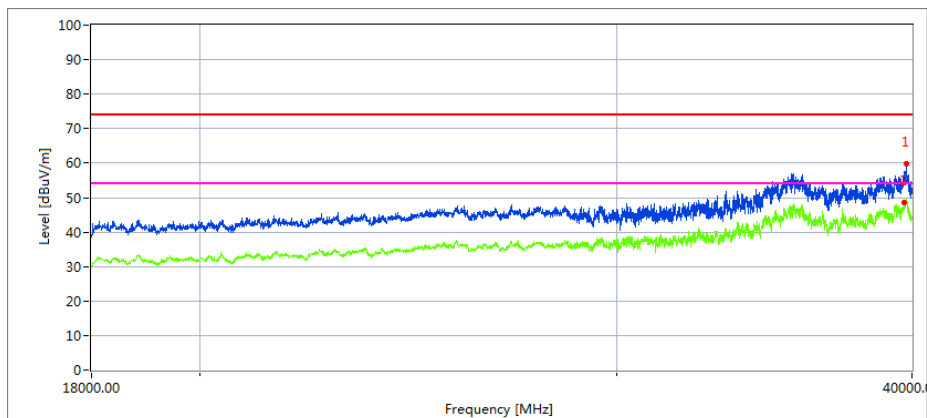

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39765.004	38.84	19.11	42.63	43.48	57.1	68.2	11.1	Peak

Vertical

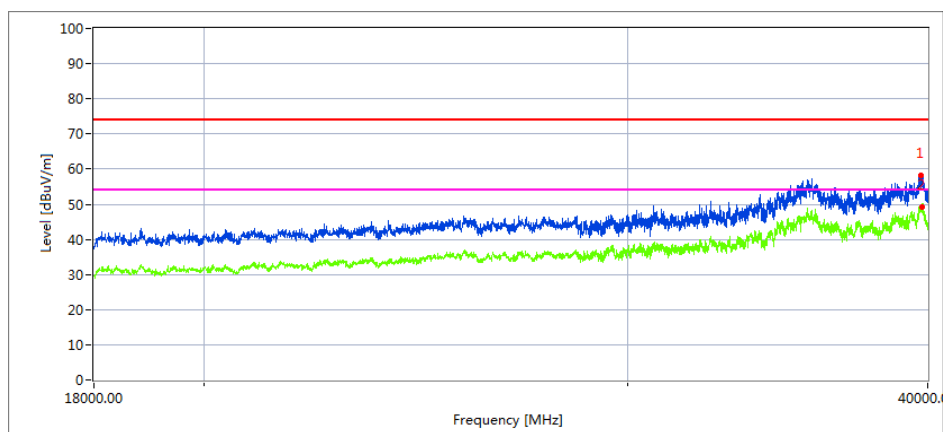


Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39765.004	34.92	20.1	44.1	43.22	55.9	68.2	12.3	Peak

Note:802.11n20 MIMO mode is the worst mode.


Low Channel (5745 MHz)-Above 1G

Horizontal

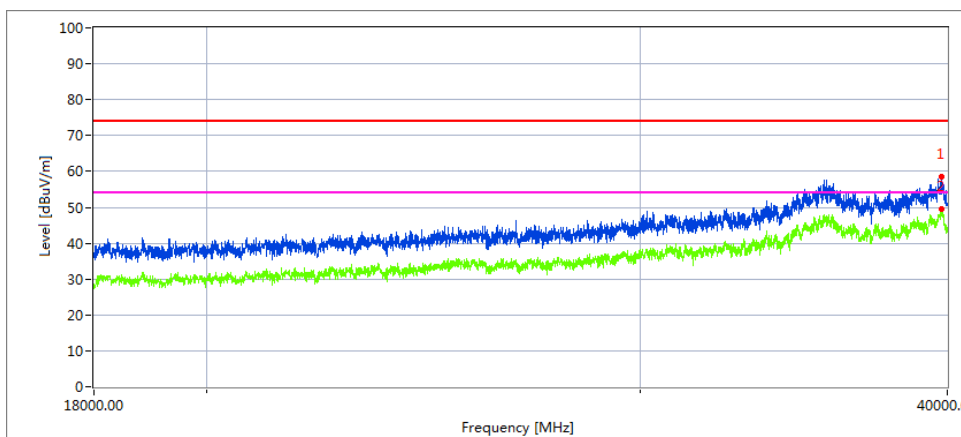

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.114	38.35	19.98	43.84	44.62	56.6	68.2	11.6	Peak


Vertical

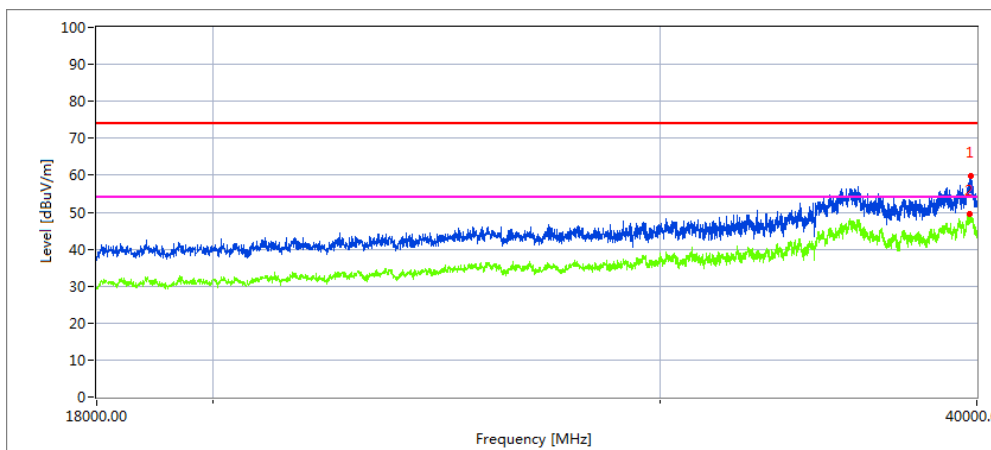

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39770.880	35.92	20.01	44.06	42.69	57.3	68.2	10.9	Peak


High Channel (5825 MHz)-Above 1G

Horizontal

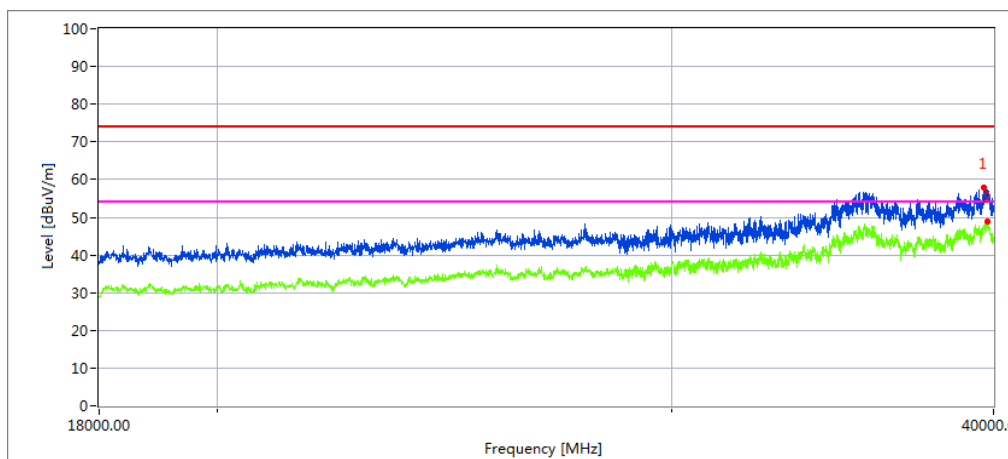

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39656.332	29.9	19.98	43.84	44.62	49.1	68.2	19.1	Peak

Vertical

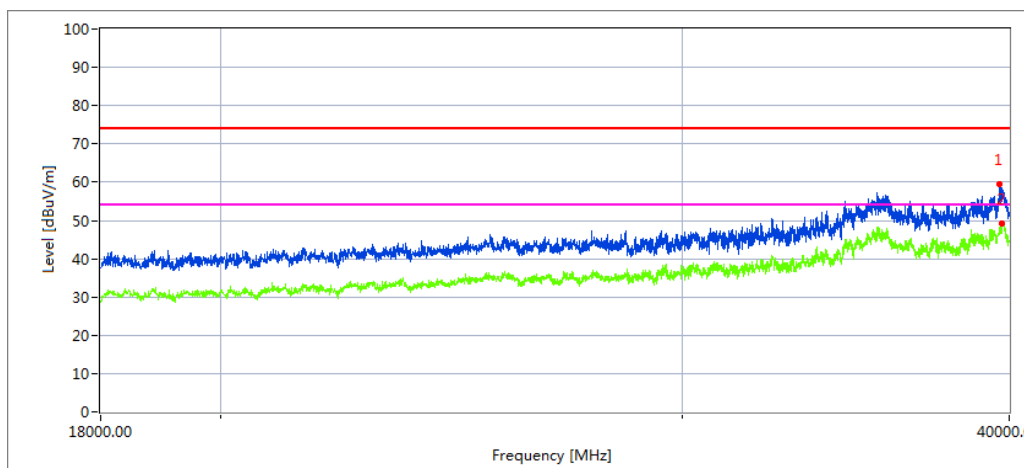

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39673.022	36.12	20.01	44.06	42.69	57.5	68.2	10.7	Peak

Note: 802.11n20 MIMO mode is the worst mode.

2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.2G)-802.11ac40 5150MHz~5250MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11ac40 Mode									
4500	63.73	5.2	35.6	44.2	60.33469	74	-13.67	Pk	Horizontal
4500	46.67	5.2	35.6	44.2	43.27	54	-10.73	AV	Horizontal
4500	54.43	5.2	35.6	44.2	51.03	74	-22.97	Pk	Horizontal
4500	40.49	5.2	35.6	44.2	37.09	54	-16.91	AV	Horizontal
5150	69.93	5.36	35.66	44.22	66.73	74	-7.27	Pk	Horizontal
5150	51.73	5.36	35.66	44.22	48.53	54	-5.47	AV	Horizontal
5150	69.86	5.36	35.66	44.22	66.66	74	-7.34	Pk	Vertical
5150	51.35	5.36	35.66	44.22	48.15	54	-5.85	AV	Vertical
5350	62.48	5.68	35.68	44.22	59.62	74	-14.38	Pk	Vertical
5350	42.07	5.68	35.68	44.22	39.21	54	-14.79	AV	Vertical
5350	55.17	5.68	35.68	44.22	52.31	74	-21.69	Pk	Horizontal
5350	38.66	5.68	35.68	44.22	35.80	54	-18.20	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac40 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.3G)-802.11n20 5250MHz~5350MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	ReadingLevel	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
High Channel (5320 MHz)-Above 1G									
5350.00	61.28	6.96	37.24	43.50	61.98	74.00	-12.02	Pk	Vertical
5350.00	41.02	7.07	37.24	43.50	41.83	54.00	-12.17	AV	Vertical
5350.00	53.72	7.05	37.24	43.50	54.52	74.00	-19.48	Pk	Horizontal
5350.00	38.71	7.05	37.24	43.50	39.50	54.00	-14.50	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.6G)-802.11ac20 5470MHz~5725MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	ReadingLevel	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (5500 MHz)-Above 1G									
5460.00	61.99	5.61	35.40	44.00	59.00	74.00	-15.00	Pk	Vertical
5460.00	43.00	5.76	35.40	44.00	40.17	54.00	-13.83	AV	Vertical
5460.00	54.83	5.78	35.18	44.00	51.79	74.00	-22.21	Pk	Horizontal
5460.00	39.59	5.66	35.18	44.00	36.43	54.00	-17.57	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP

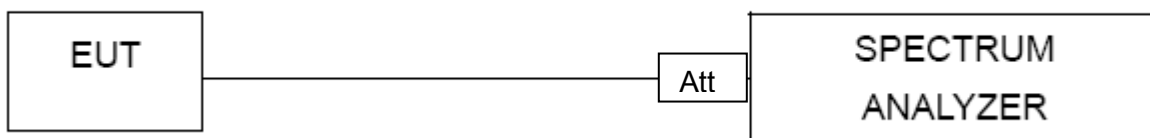

3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Note: Band1&Band2A&Band2C For 802.11n/ac 5GHz has MIMO mode. Directional gain=6.77dbi
 $6.77\text{dbi} > 6.0\text{dbi}$ so power limit is $\text{limit} = 11 - (6.77 - 6) = 10.23$ in dBm
 Band3 For 802.11n/ac 5GHz has MIMO mode. Directional gain=5.5dbi
 $6.77\text{dbi} > 6.0\text{dbi}$ so power limit is $\text{limit} = 30 - (6.77 - 6) = 29.23$ in dBm

Test data reference attachment.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

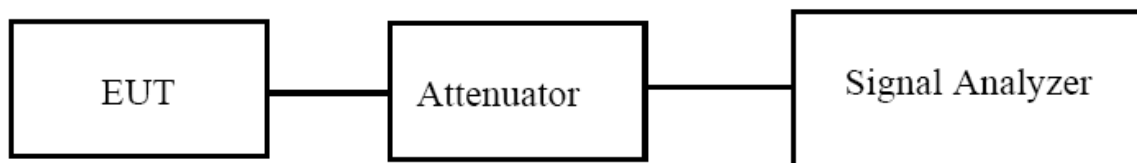

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

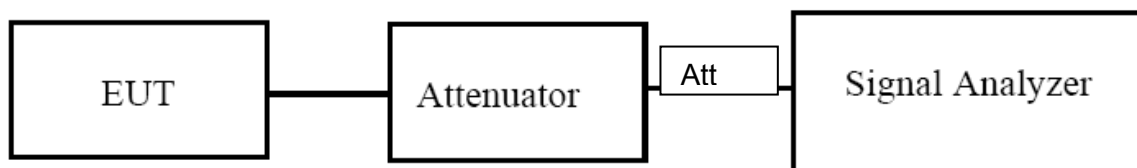

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B
5470~5725	250 mW or 11 dBm + 10 log B
5725~5850	1W

6.2 TEST PROCEDURE

· Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.

2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.

3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.


c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.

d) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

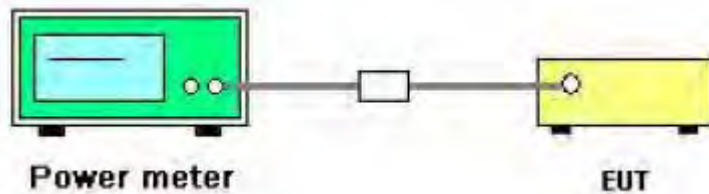

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Note: Band1&Band2A&Band2C For 802.11n/ac 5GHz has MIMO mode. Directional gain=6.77dbi
 6.77 dBi > 6.0 dBi so power limit=24-(6.77-6)=23.23 in dBm
 Band3 For 802.11n/ac 5GHz has MIMO mode. Directional gain=6.77dbi
 6.77 dBi > 6.0 dBi so power limit= 30.00-(6.77-6)=29.23 in dBm

Test data reference attachment.

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

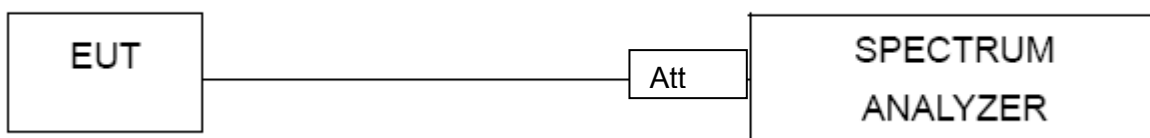

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	4K AOSP OTT BOX	Model Name :	DV8547
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V

Test data reference attachment.

8. Frequency Stability Measurement

8.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

8.3 TEST SETUP LAYOUT

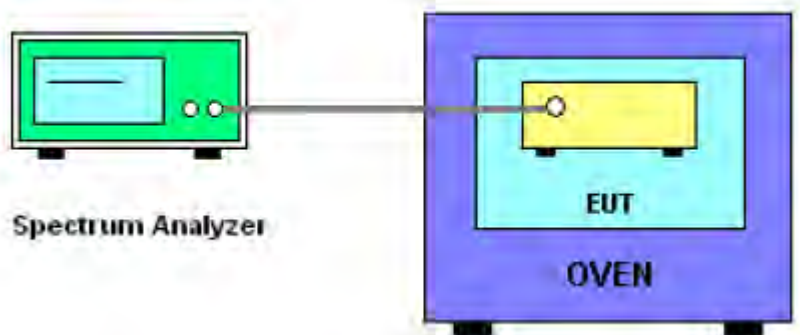

8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

8.5 TEST RESULTS

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5180.0005	5180	0.0005	0.0879
		V max (V)	5.75	5180.0017	5180	0.0017	0.3205
		V min (V)	4.25	5180.0016	5180	0.0016	0.3108
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5180.0003	5180	0.0003	0.0675
		T (°C)	-10	5180.0011	5180	0.0011	0.2184
		T (°C)	0	5180.0016	5180	0.0016	0.3013
		T (°C)	10	5180.0009	5180	0.0009	0.1734
		T (°C)	20	5180.0010	5180	0.0010	0.1848
		T (°C)	30	5180.0009	5180	0.0009	0.1704
		T (°C)	40	5180.0019	5180	0.0019	0.3702
		T (°C)	50	5180.0014	5180	0.0014	0.2641
		T (°C)	60	5180.0013	5180	0.0013	0.2548
		T (°C)	70	5180.0015	5180	0.0015	0.2850
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5200.0014	5200	0.0014	0.2650
		V max (V)	5.75	5200.0003	5200	0.0003	0.0574
		V min (V)	4.25	5200.0013	5200	0.0013	0.2471
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5200.0018	5200	0.0018	0.3429
		T (°C)	-10	5200.0020	5200	0.0020	0.3822
		T (°C)	0	5200.0014	5200	0.0014	0.2731
		T (°C)	10	5200.0015	5200	0.0015	0.2885
		T (°C)	20	5200.0013	5200	0.0013	0.2500
		T (°C)	30	5200.0014	5200	0.0014	0.2692
		T (°C)	40	5200.0001	5200	0.0001	0.0192
		T (°C)	50	5200.0007	5200	0.0007	0.1346
		T (°C)	60	5200.0010	5200	0.0010	0.1923
		T (°C)	70	5200.0012	5200	0.0012	0.2371
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5240.0001	5240	0.0001	0.0205
		V max (V)	5.75	5240.0019	5240	0.0019	0.3673
		V min (V)	4.25	5240.0015	5240	0.0015	0.2915
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5240.0007	5240	0.0007	0.1259
		T (°C)	-10	5240.0002	5240	0.0002	0.0366
		T (°C)	0	5240.0009	5240	0.0009	0.1668
		T (°C)	10	5240.0014	5240	0.0014	0.2682
		T (°C)	20	5240.0010	5240	0.0010	0.1872
		T (°C)	30	5240.0009	5240	0.0009	0.1782
		T (°C)	40	5240.0005	5240	0.0005	0.0908
		T (°C)	50	5240.0013	5240	0.0013	0.2500
		T (°C)	60	5240.0012	5240	0.0012	0.2357
		T (°C)	70	5240.0003	5240	0.0003	0.0533
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5260.0187	5260	0.0187	3.5551
		V max (V)	5.75	5260.0185	5260	0.0185	3.5171
		V min (V)	4.25	5260.0185	5260	0.0185	3.5171
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5260.0004	5260	0.0004	0.0760
		T (°C)	-10	5260.0013	5260	0.0013	0.2471
		T (°C)	0	5260.0013	5260	0.0013	0.2471
		T (°C)	10	5260.0019	5260	0.0019	0.3612
		T (°C)	20	5260.0015	5260	0.0015	0.2852
		T (°C)	30	5260.0013	5260	0.0013	0.2471
		T (°C)	40	5260.0002	5260	0.0002	0.0380
		T (°C)	50	5260.0005	5260	0.0005	0.0951
		T (°C)	60	5260.0012	5260	0.0012	0.2281
		T (°C)	70	5260.0005	5260	0.0005	0.0951
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	25	V nom (V)	5.00	5280.00230	5280	0.00230	0.4356
		V max (V)	5.75	5280.00090	5280	0.00090	0.1705
		V min (V)	4.25	5280.00040	5280	0.00040	0.0758
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5280.0014	5280	0.0014	0.2652
		T (°C)	-10	5280.0016	5280	0.0016	0.3030
		T (°C)	0	5280.0016	5280	0.0016	0.3030
		T (°C)	10	5280.0015	5280	0.0015	0.2841
		T (°C)	20	5280.0012	5280	0.0012	0.2273
		T (°C)	30	5280.0016	5280	0.0016	0.3030
		T (°C)	40	5280.0016	5280	0.0016	0.3030
		T (°C)	50	5280.0016	5280	0.0016	0.3030
		T (°C)	60	5280.0023	5280	0.0023	0.4356
		T (°C)	70	5280.0024	5280	0.0024	0.4545
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5320.0016	5320	0.0016	0.3008
		V max (V)	5.75	5320.0023	5320	0.0023	0.4323
		V min (V)	4.25	5320.0019	5320	0.0019	0.3571
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5320.0015	5320	0.0015	0.2820
		T (°C)	-10	5320.0013	5320	0.0013	0.2444
		T (°C)	0	5320.0002	5320	0.0002	0.0395
		T (°C)	10	5320.0056	5320	0.0056	1.0526
		T (°C)	20	5320.0026	5320	0.0026	0.4887
		T (°C)	30	5320.0019	5320	0.0019	0.3571
		T (°C)	40	5320.0014	5320	0.0014	0.2632
		T (°C)	50	5320.0054	5320	0.0054	1.0150
		T (°C)	60	5320.0026	5320	0.0026	0.4887
		T (°C)	70	5320.0048	5320	0.0048	0.9023
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5500.0038	5500	0.0038	0.6909
		V max (V)	5.75	5500.0017	5500	0.0017	0.3091
		V min (V)	4.25	5500.0015	5500	0.0015	0.2727
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5500.0058	5500	0.0058	1.0545
		T (°C)	-10	5500.0128	5500	0.0128	2.3273
		T (°C)	0	5500.0063	5500	0.0063	1.1455
		T (°C)	10	5500.0064	5500	0.0064	1.1636
		T (°C)	20	5500.0084	5500	0.0084	1.5273
		T (°C)	30	5500.0057	5500	0.0057	1.0364
		T (°C)	40	5500.0051	5500	0.0051	0.9273
		T (°C)	50	5500.0031	5500	0.0031	0.5636
		T (°C)	60	5500.0057	5500	0.0057	1.0364
		T (°C)	70	5500.0084	5500	0.0084	1.5273
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5600.0070	5600	0.0070	1.2429
		V max (V)	5.75	5600.0087	5600	0.0087	1.5536
		V min (V)	4.25	5600.0081	5600	0.0081	1.4464
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5600.0098	5600	0.0098	1.7500
		T (°C)	-10	5600.0035	5600	0.0035	0.6250
		T (°C)	0	5600.0033	5600	0.0033	0.5893
		T (°C)	10	5600.0080	5600	0.0080	1.4286
		T (°C)	20	5600.0106	5600	0.0106	1.8929
		T (°C)	30	5600.0043	5600	0.0043	0.7679
		T (°C)	40	5600.0073	5600	0.0073	1.3036
		T (°C)	50	5600.0075	5600	0.0075	1.3393
		T (°C)	60	5600.0111	5600	0.0111	1.9821
		T (°C)	70	5600.0055	5600	0.0055	0.9786
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5700.0061	5700	0.0061	1.0702
		V max (V)	5.75	5700.0083	5700	0.0083	1.4579
		V min (V)	4.25	5700.0083	5700	0.0083	1.4526
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5700.0097	5700	0.0097	1.7018
		T (°C)	-10	5700.0045	5700	0.0045	0.7895
		T (°C)	0	5700.0035	5700	0.0035	0.6140
		T (°C)	10	5700.0023	5700	0.0023	0.4035
		T (°C)	20	5700.0083	5700	0.0083	1.4561
		T (°C)	30	5700.0104	5700	0.0104	1.8246
		T (°C)	40	5700.0062	5700	0.0062	1.0877
		T (°C)	50	5700.0021	5700	0.0021	0.3684
		T (°C)	60	5700.0042	5700	0.0042	0.7368
		T (°C)	70	5700.0042	5700	0.0042	0.7368
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	4K AOSP OTT BOX	Model Name. :	DV8547
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency(5745-5850MHz)		

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (° C)	20	V nom (V)	5.00	5745.0006	5745	0.0006	0.1044
		V max (V)	5.75	5745.0018	5745	0.0018	0.3133
		V min (V)	4.25	5745.0003	5745	0.0003	0.0574
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5745.0014	5745	0.0014	0.2437
		T (°C)	-10	5745.0010	5745	0.0010	0.1741
		T (°C)	0	5745.0015	5745	0.0015	0.2611
		T (°C)	10	5745.0016	5745	0.0016	0.2785
		T (°C)	20	5745.0008	5745	0.0008	0.1393
		T (°C)	30	5745.0004	5745	0.0004	0.0696
		T (°C)	40	5745.0010	5745	0.0010	0.1741
		T (°C)	50	5745.0013	5745	0.0013	0.2343
		T (°C)	60	5745.0040	5745	0.0040	0.6963
		T (°C)	70	5745.0014	5745	0.0014	0.2437
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5785.0005	5785	0.00050	-0.0864
		V max (V)	5.75	5785.0009	5785	0.00090	-0.1556
		V min (V)	4.25	5785.0008	5785	0.00085	-0.1465
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5785.0006	5785	0.0006	0.1037
		T (°C)	-10	5785.0007	5785	0.0007	0.1289
		T (°C)	0	5785.0001	5785	0.0001	0.0173
		T (°C)	10	5785.0018	5785	0.0018	0.3111
		T (°C)	20	5785.0010	5785	0.0010	0.1729
		T (°C)	30	5785.0019	5785	0.0019	0.3284
		T (°C)	40	5785.0003	5785	0.0003	0.0519
		T (°C)	50	5785.0013	5785	0.0013	0.2247
		T (°C)	60	5785.0019	5785	0.0019	0.3284
		T (°C)	70	5785.0008	5785	0.0008	0.1383
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5825.0012	5825	0.0012	0.2043
		V max (V)	5.75	5825.0018	5825	0.0018	0.3090
		V min (V)	4.25	5825.0011	5825	0.0011	0.1871
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5825.0009	5825	0.0009	0.1545
		T (°C)	-10	5825.0004	5825	0.0004	0.0687
		T (°C)	0	5825.0009	5825	0.0009	0.1545
		T (°C)	10	5825.0013	5825	0.0013	0.2232
		T (°C)	20	5825.0003	5825	0.0003	0.0429
		T (°C)	30	5825.0016	5825	0.0016	0.2747
		T (°C)	40	5825.0011	5825	0.0011	0.1888
		T (°C)	50	5825.0018	5825	0.0018	0.3090
		T (°C)	60	5825.0002	5825	0.0002	0.0343
		T (°C)	70	5825.0006	5825	0.0006	0.1030
Limits				Within 5745-5850MHz			
Result				Complies			

Note: antenna 1 is the worst case.

9. DYNAMIC FREQUENCY SELECTION(DFS)

9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note

Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain.

9.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

9.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{min}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

9.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 3\text{dBi} + 1\text{dB} = -59\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 3\text{dBi} + 1\text{dB} = -59\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

9.6 CONDUCTED CALIBRATION SETUP

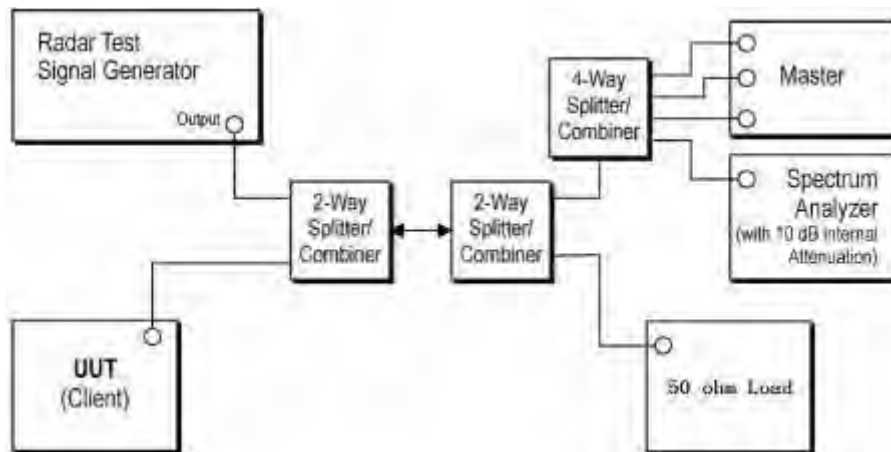

Wireless AP	Manufacturer	LINKSYS LLC
	Model NO.	WRT32X
	FCC ID	Q87-WRT3200ACM


9.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

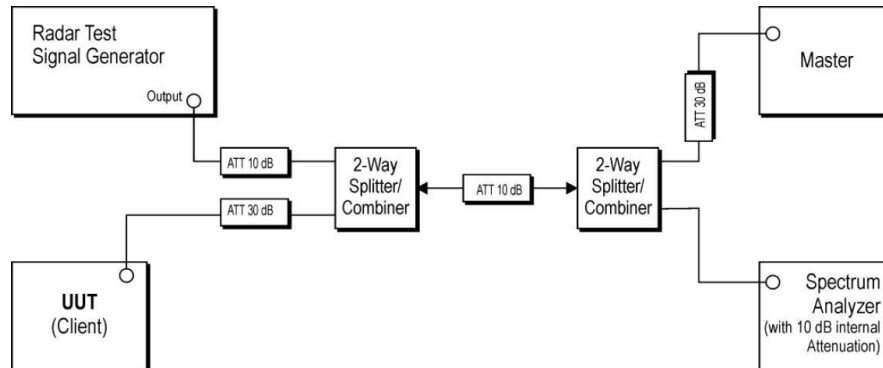

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Please refer to the clause 2.2

**9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND
NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST**

Test data reference attachment.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

This EUT has supports Bluetooth, WIFI2.4G / 5G.

The module for 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1TX, 1RX
802.11n/ac	2TX, 2RX

For 5GHz mode, Antenna A, B are transmitting, each with the same directional gain.
 For MIMO mode, Directional gain= $[10\log(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ dBi = 6.77 dBi in 5GHz
 the 802.11n(20/40) ac(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT A in dBi.

G2 means antenna gain for ANT B in dBi.

N_{ANT} means the number of Antennas.

The antenna is permanently fixed, It complies with the standard requirement.


11. TEST RESULTS

5.2G:

11.1.1 DUTY CYCLE


Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
Ant 1	NVNT	802.11a	5180	100	0
Ant 1	NVNT	802.11a	5200	100	0
Ant 1	NVNT	802.11a	5240	100	0
Ant 2	NVNT	802.11a	5180	100	0
Ant 2	NVNT	802.11a	5200	100	0
Ant 2	NVNT	802.11a	5240	100	0
Ant 1	NVNT	802.11ac20	5180	100	0
Ant 1	NVNT	802.11ac20	5200	100	0
Ant 1	NVNT	802.11ac20	5240	100	0
Ant 2	NVNT	802.11ac20	5180	100	0
Ant 2	NVNT	802.11ac20	5200	100	0
Ant 2	NVNT	802.11ac20	5240	100	0
Ant 1	NVNT	802.11ac40	5190	100	0
Ant 1	NVNT	802.11ac40	5230	100	0
Ant 2	NVNT	802.11ac40	5190	100	0
Ant 2	NVNT	802.11ac40	5230	100	0
Ant 1	NVNT	802.11ac80	5210	100	0
Ant 2	NVNT	802.11ac80	5210	100	0
Ant 1	NVNT	802.11n(HT20)	5180	100	0
Ant 1	NVNT	802.11n(HT20)	5200	100	0
Ant 1	NVNT	802.11n(HT20)	5240	100	0
Ant 2	NVNT	802.11n(HT20)	5180	100	0
Ant 2	NVNT	802.11n(HT20)	5200	100	0
Ant 2	NVNT	802.11n(HT20)	5240	100	0
Ant 1	NVNT	802.11n(HT40)	5190	100	0
Ant 1	NVNT	802.11n(HT40)	5230	100	0
Ant 2	NVNT	802.11n(HT40)	5190	100	0
Ant 2	NVNT	802.11n(HT40)	5230	100	0

Duty Cycle NVHT 802.11a 5180MHz Ant 1

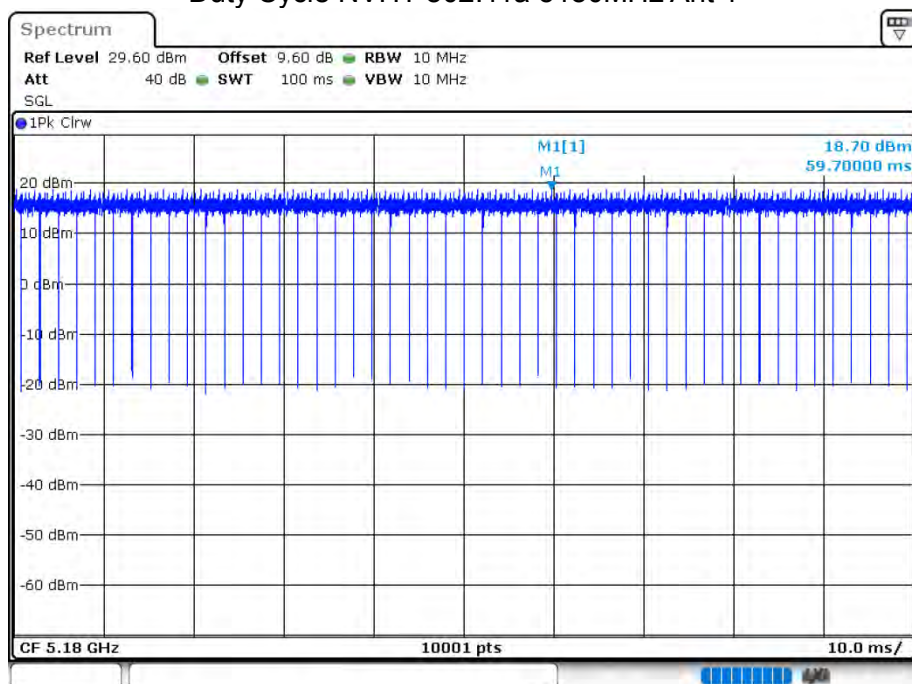


Date: 2.SEP.2020 10:53:03

Duty Cycle NVHT 802.11a 5200MHz Ant 1

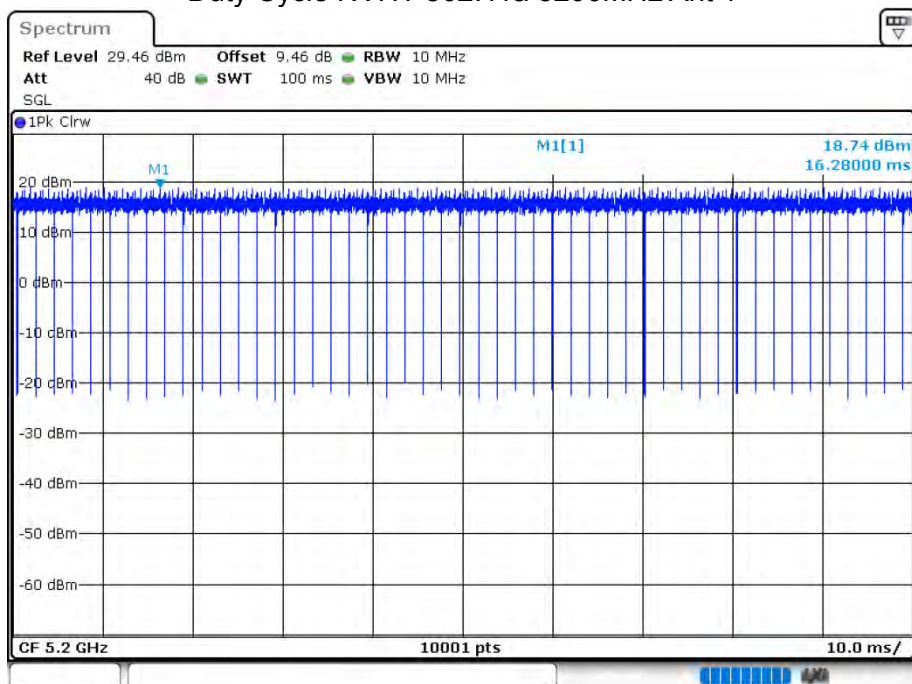


Date: 2.SEP.2020 10:58:07

Duty Cycle NVHT 802.11a 5240MHz Ant 1

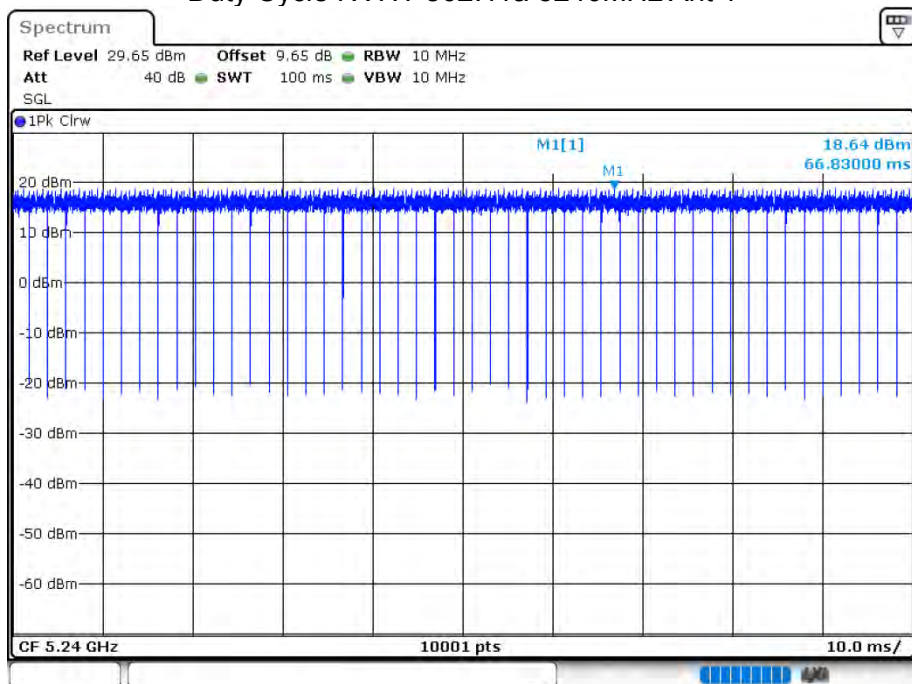


Date: 2.SEP.2020 11:00:00

Duty Cycle NVNT 802.11a 5180MHz Ant 2

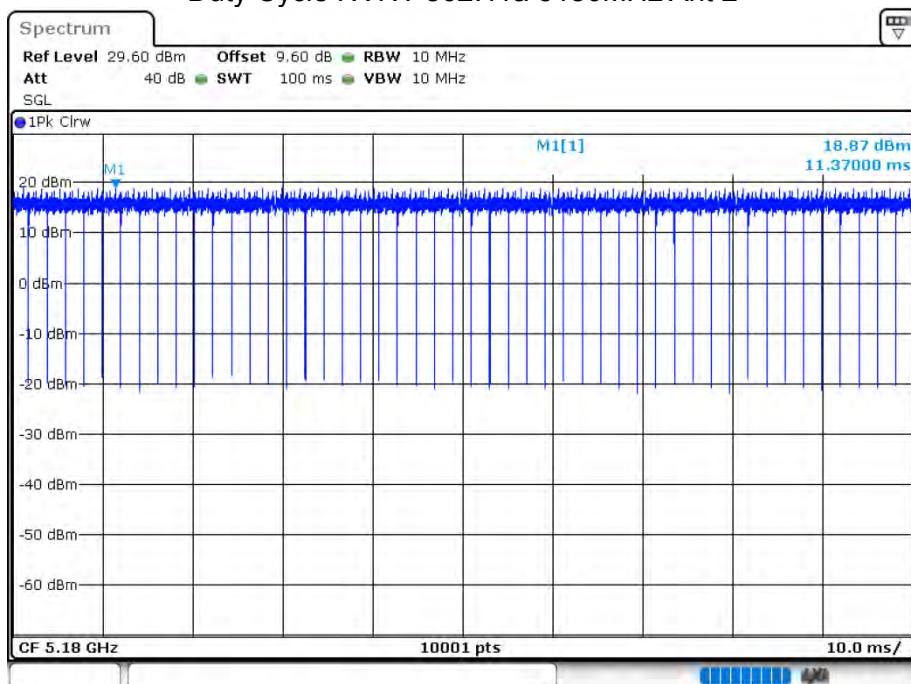


Date: 2.SEP.2020 18:20:40

Duty Cycle NVNT 802.11a 5200MHz Ant 2

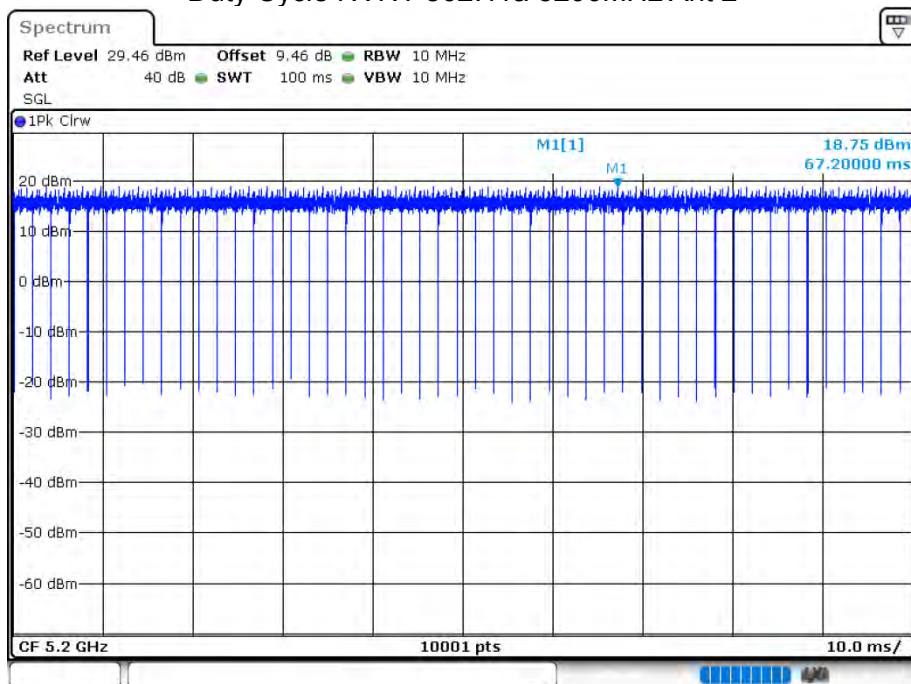


Date: 2.SEP.2020 18:23:03

Duty Cycle NVNT 802.11a 5240MHz Ant 2

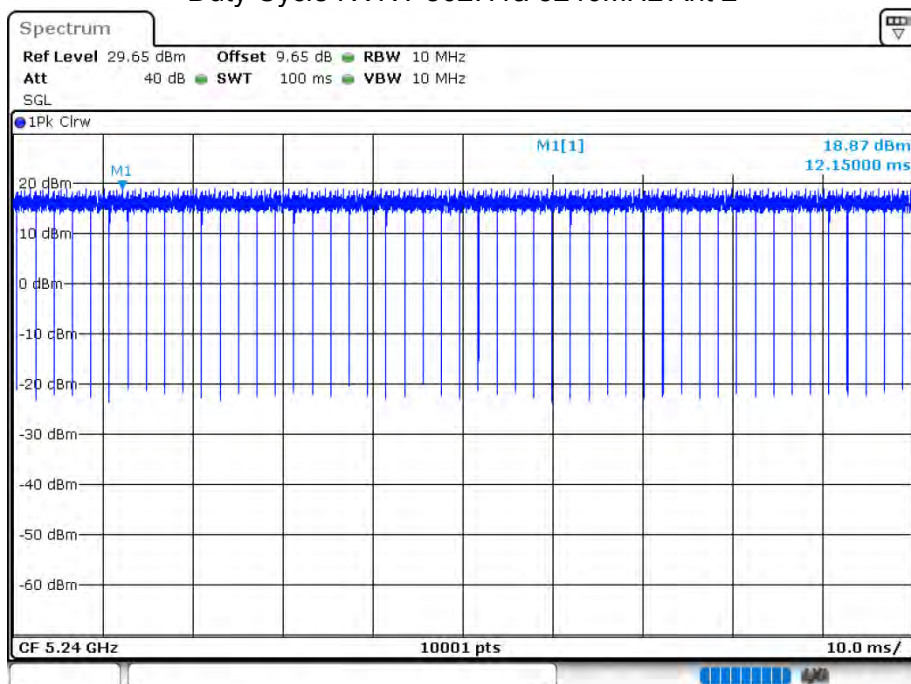


Date: 2.SEP.2020 18:24:17

Duty Cycle NVHT 802.11ac20 5180MHz Ant 1

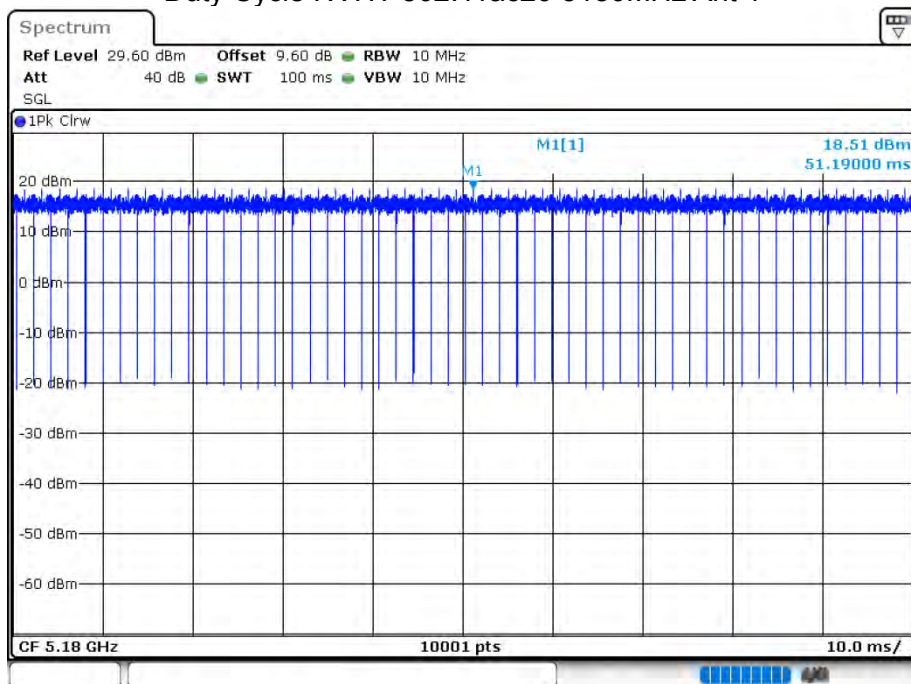


Date: 2.SEP.2020 11:31:48

Duty Cycle NVHT 802.11ac20 5200MHz Ant 1

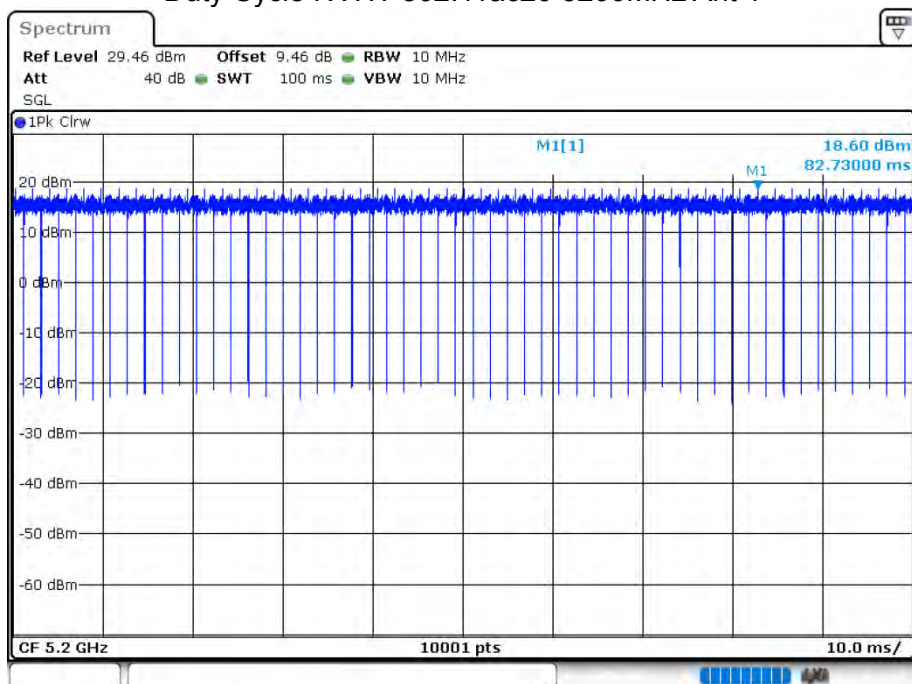


Date: 2.SEP.2020 11:33:13

Duty Cycle NVHT 802.11ac20 5240MHz Ant 1

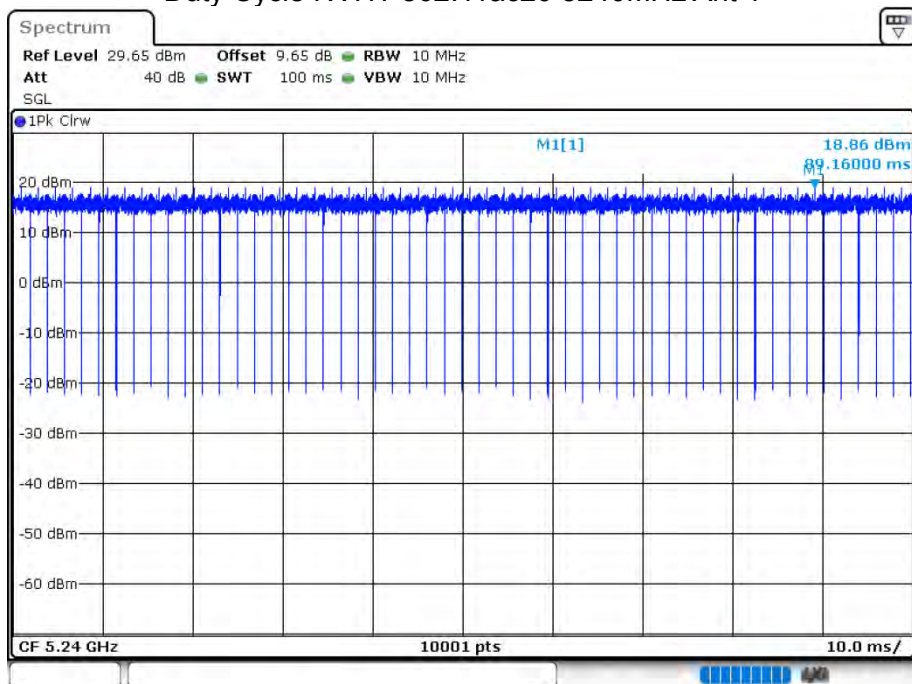


Date: 2.SEP.2020 11:34:41

Duty Cycle NVNT 802.11ac20 5180MHz Ant 2

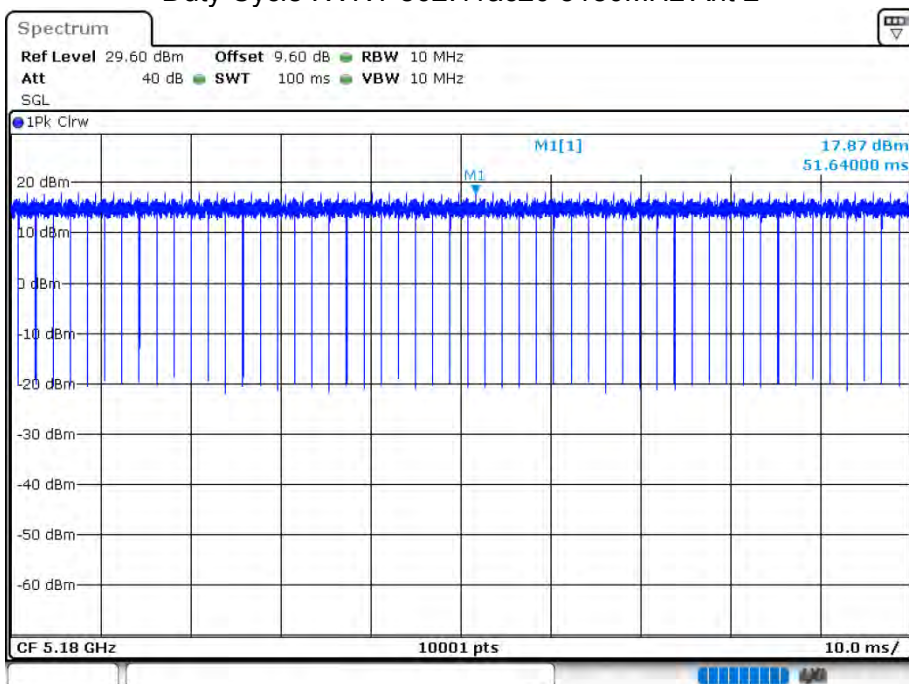


Date: 2.SEP.2020 19:26:22

Duty Cycle NVNT 802.11ac20 5200MHz Ant 2

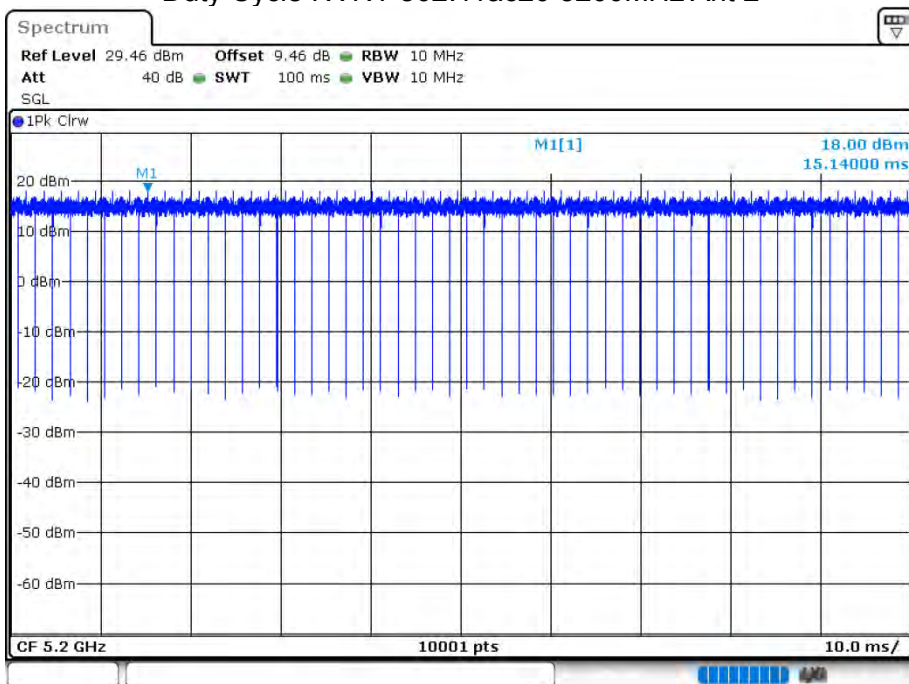


Date: 2.SEP.2020 19:28:00

Duty Cycle NVNT 802.11ac20 5240MHz Ant 2

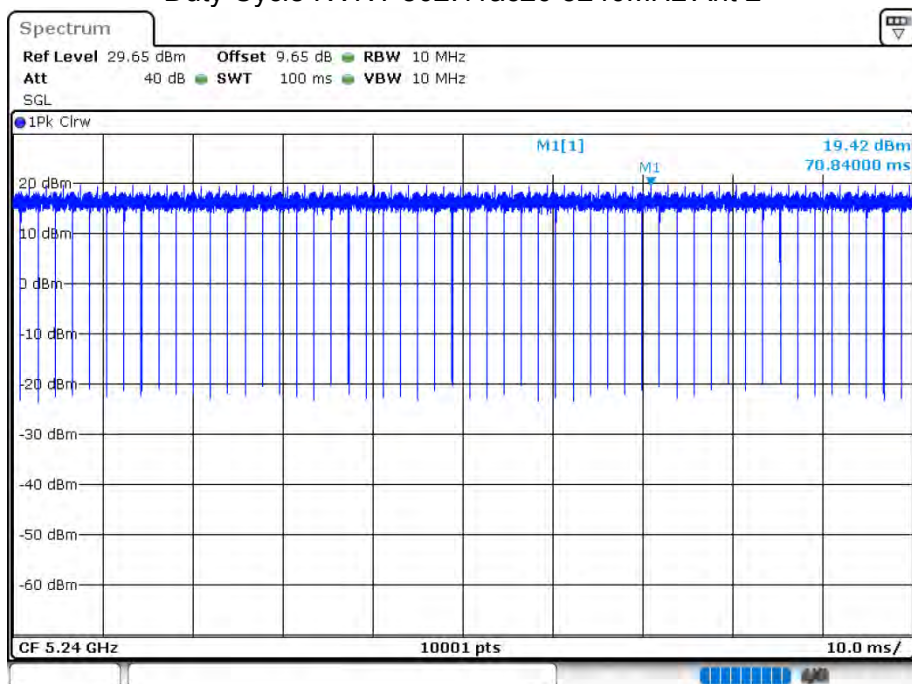


Date: 2.SEP.2020 19:29:38

Duty Cycle NVHT 802.11ac40 5190MHz Ant 1

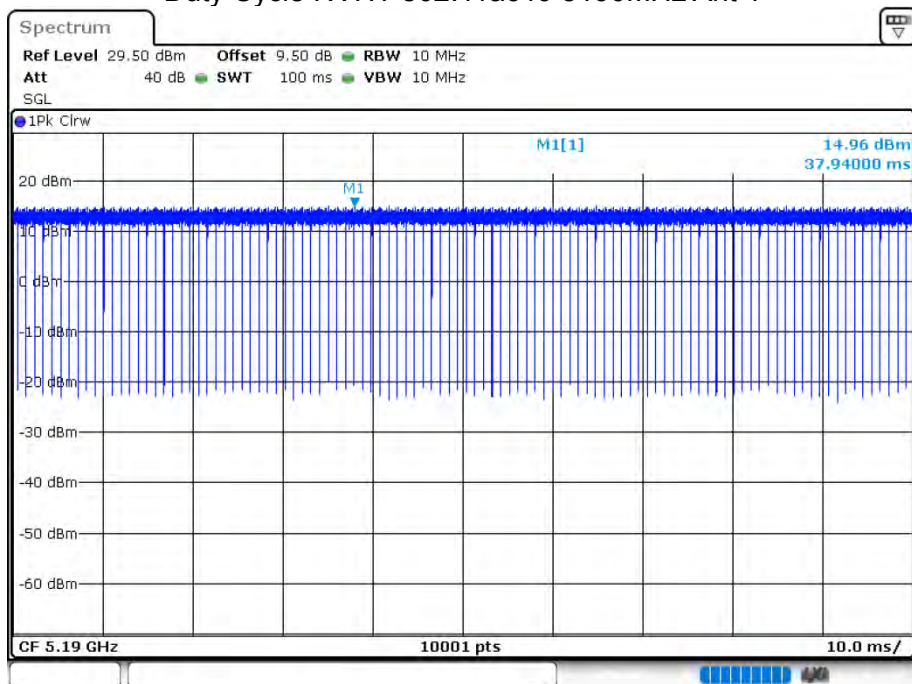


Date: 2.SEP.2020 14:15:07

Duty Cycle NVHT 802.11ac40 5230MHz Ant 1

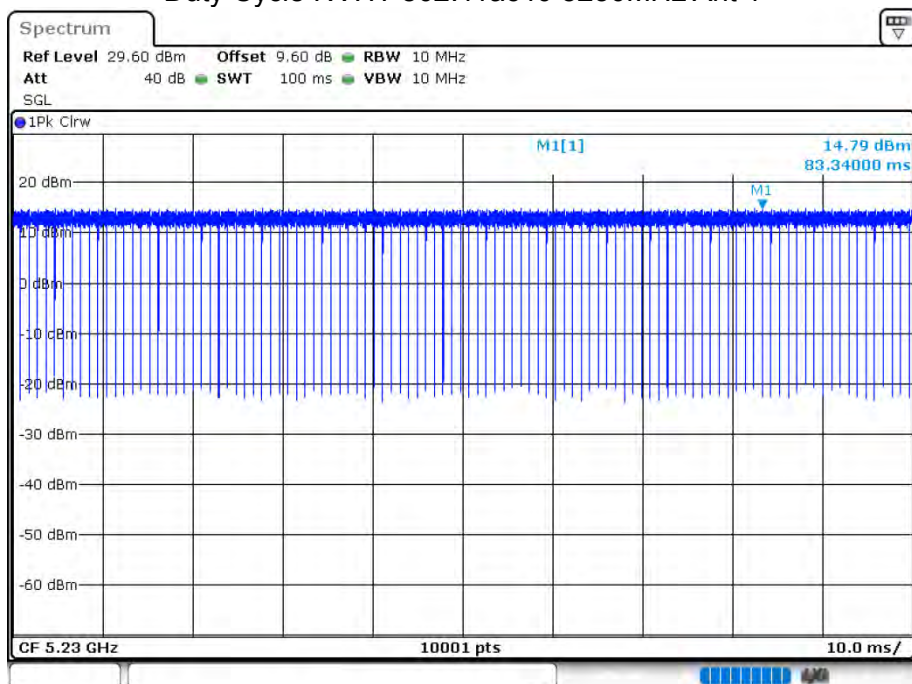


Date: 2.SEP.2020 14:12:03

Duty Cycle NVNT 802.11ac40 5190MHz Ant 2

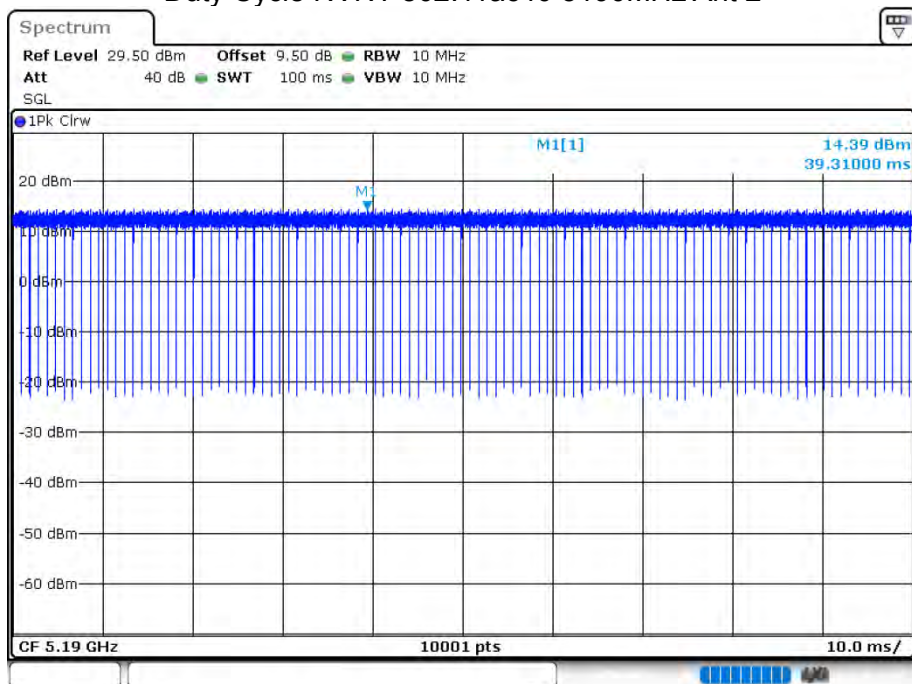


Date: 2.SEP.2020 19:43:35

Duty Cycle NVNT 802.11ac40 5230MHz Ant 2

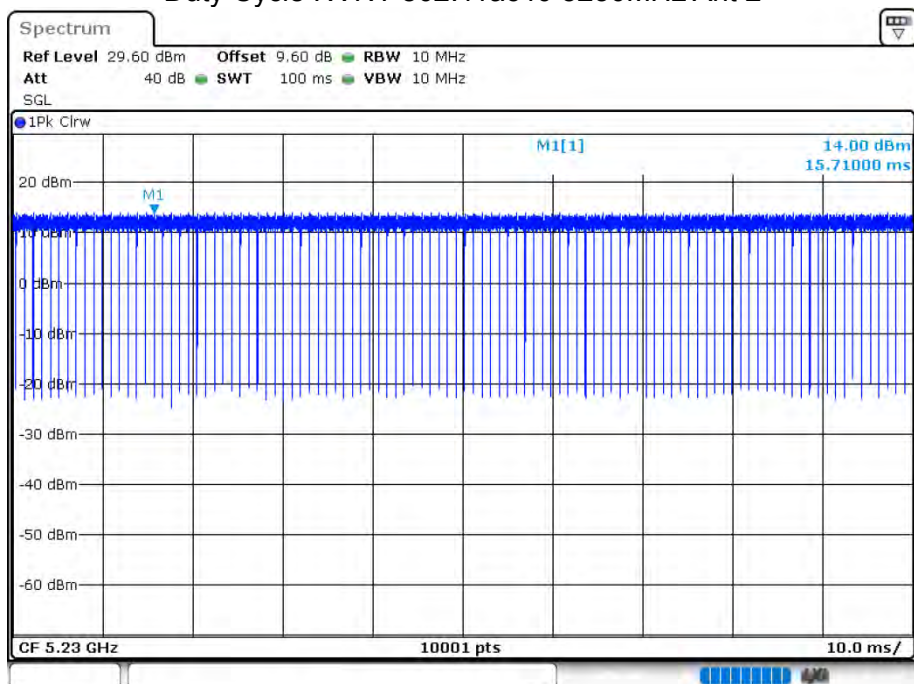


Date: 2.SEP.2020 19:45:22

Duty Cycle NVHT 802.11ac80 5210MHz Ant 1

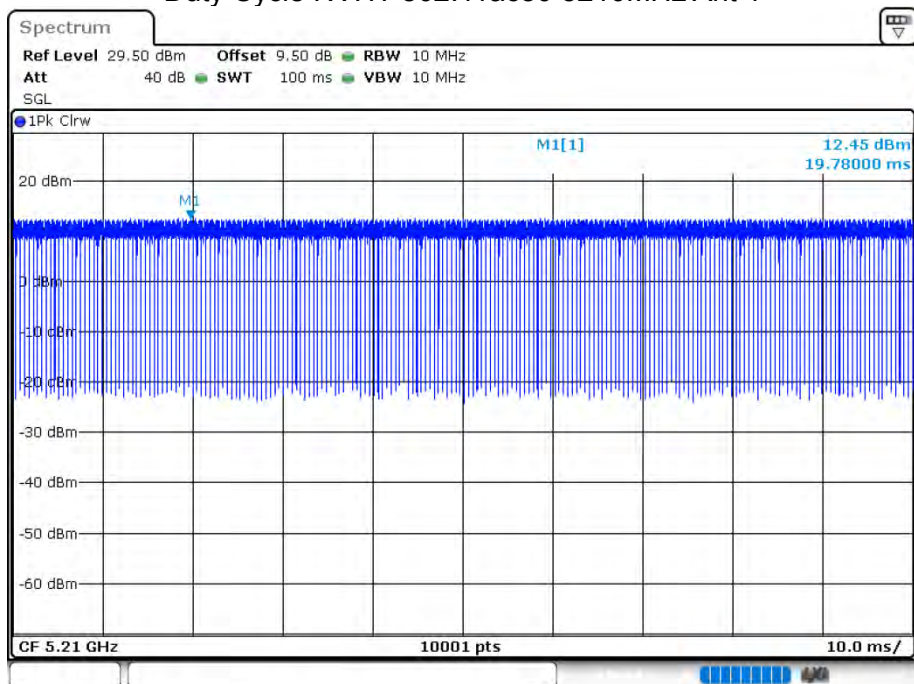


Date: 2.SEP.2020 14:17:51

Duty Cycle NVNT 802.11ac80 5210MHz Ant 2

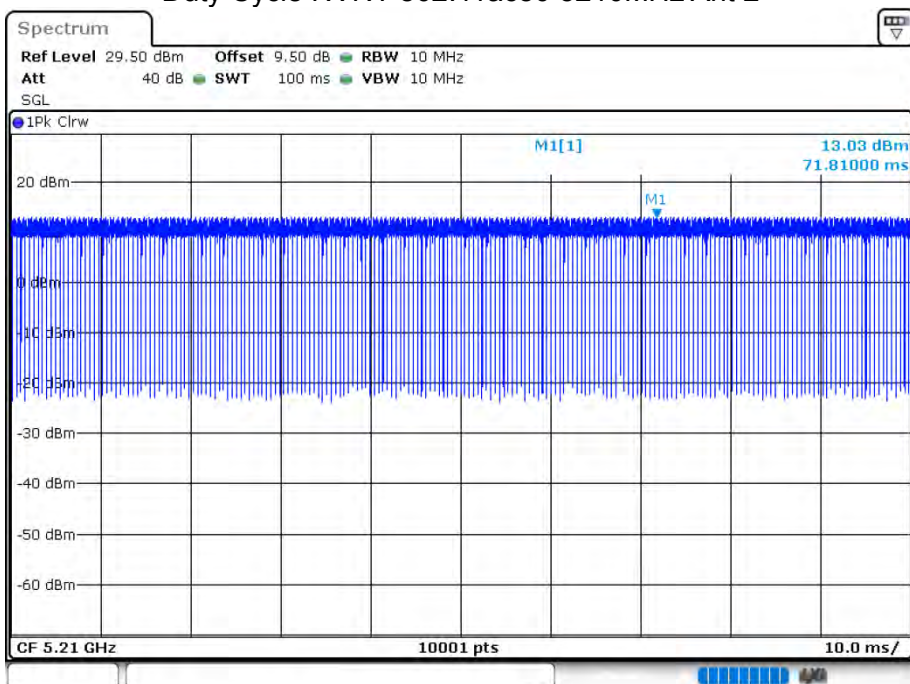


Date: 2.SEP.2020 19:48:18

Duty Cycle NVHT 802.11n(HT20) 5180MHz Ant 1

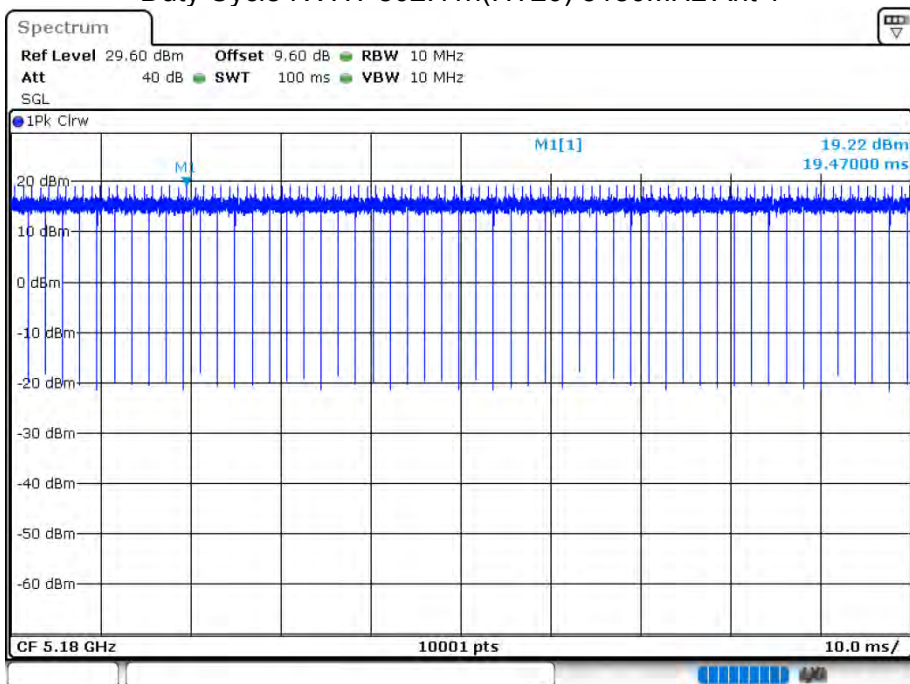


Date: 2.SEP.2020 11:01:38

Duty Cycle NVHT 802.11n(HT20) 5200MHz Ant 1

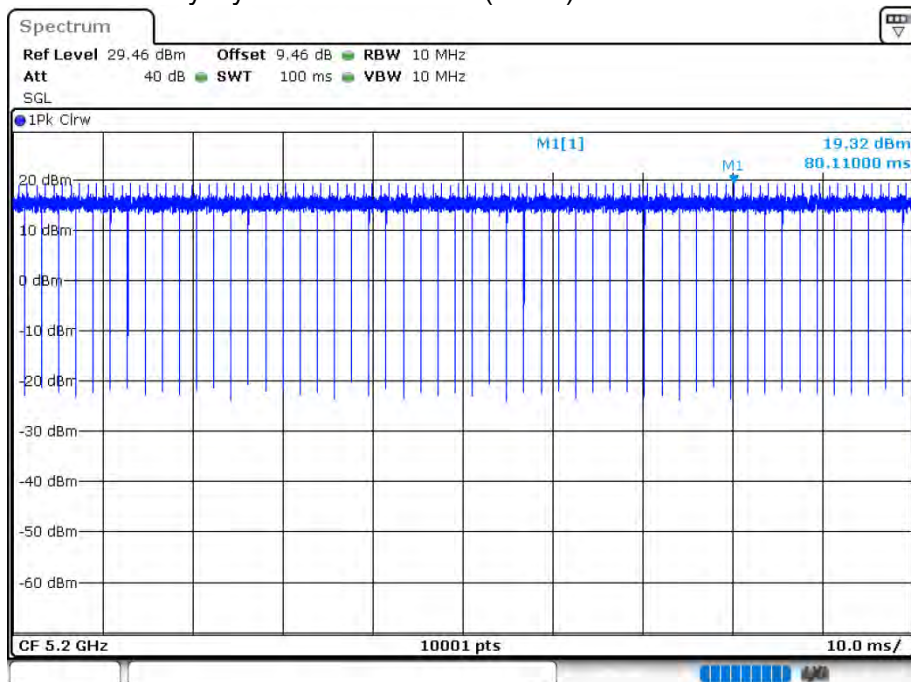


Date: 2.SEP.2020 11:02:57

Duty Cycle NVHT 802.11n(HT20) 5240MHz Ant 1

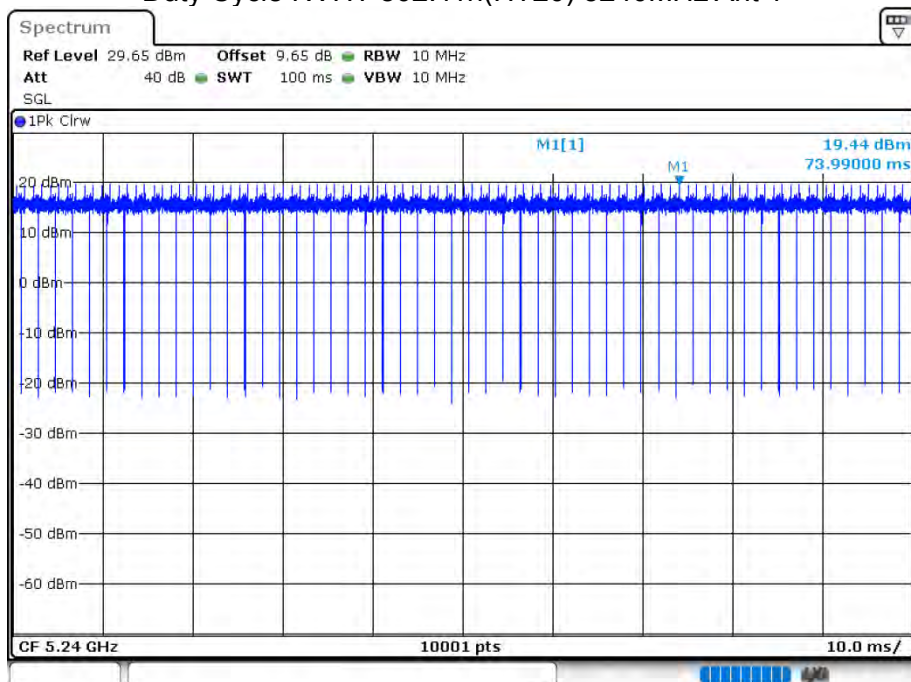


Date: 2.SEP.2020 11:03:54

Duty Cycle NVNT 802.11n(HT20) 5180MHz Ant 2

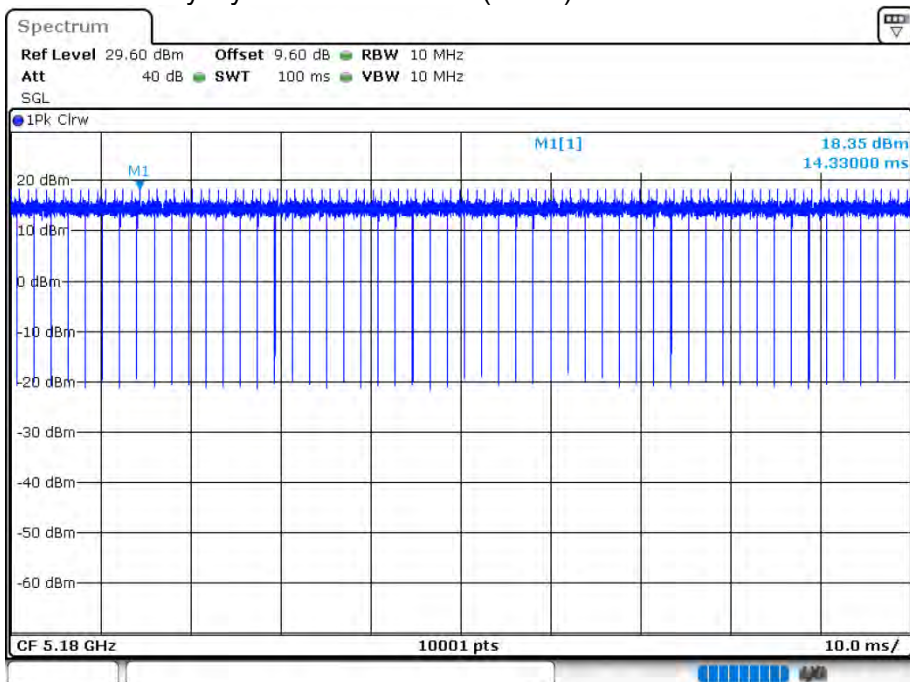


Date: 2.SEP.2020 18:25:42

Duty Cycle NVNT 802.11n(HT20) 5200MHz Ant 2

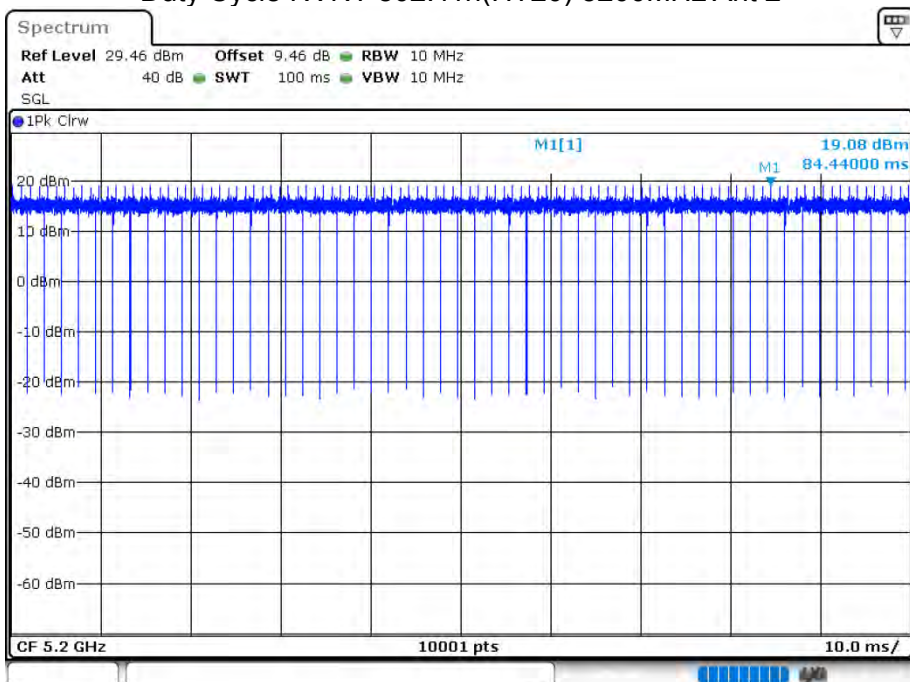


Date: 2.SEP.2020 18:27:06

Duty Cycle NVNT 802.11n(HT20) 5240MHz Ant 2

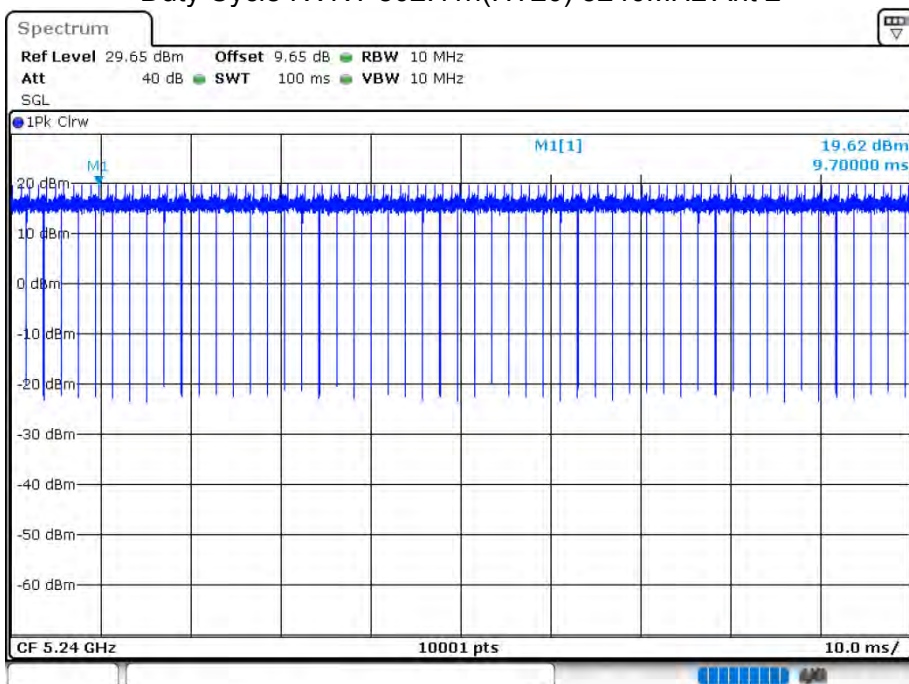


Date: 2.SEP.2020 18:28:15

Duty Cycle NVHT 802.11n(HT40) 5190MHz Ant 1

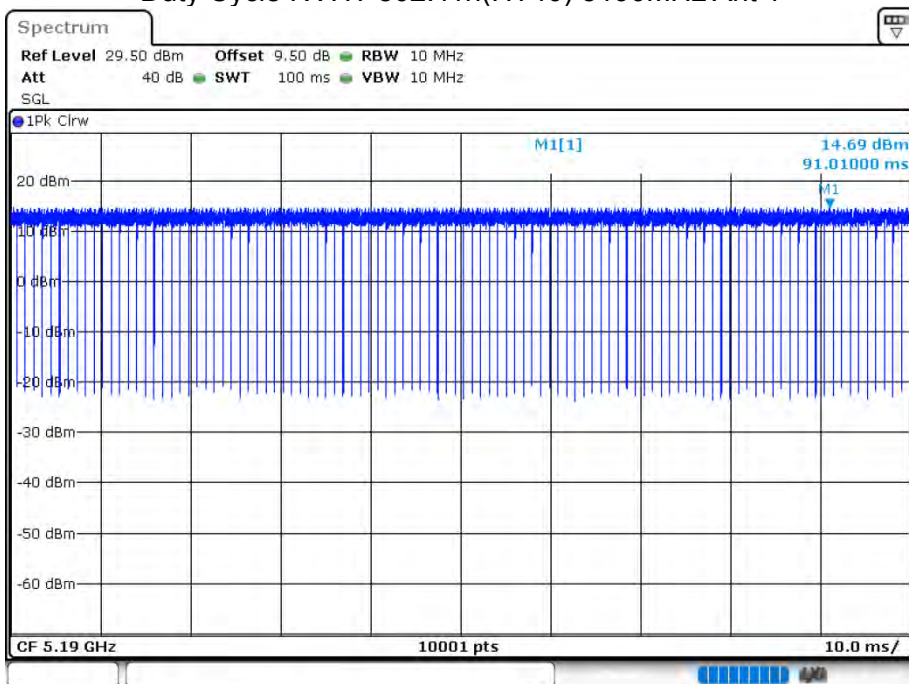


Date: 2.SEP.2020 11:38:13

Duty Cycle NVHT 802.11n(HT40) 5230MHz Ant 1

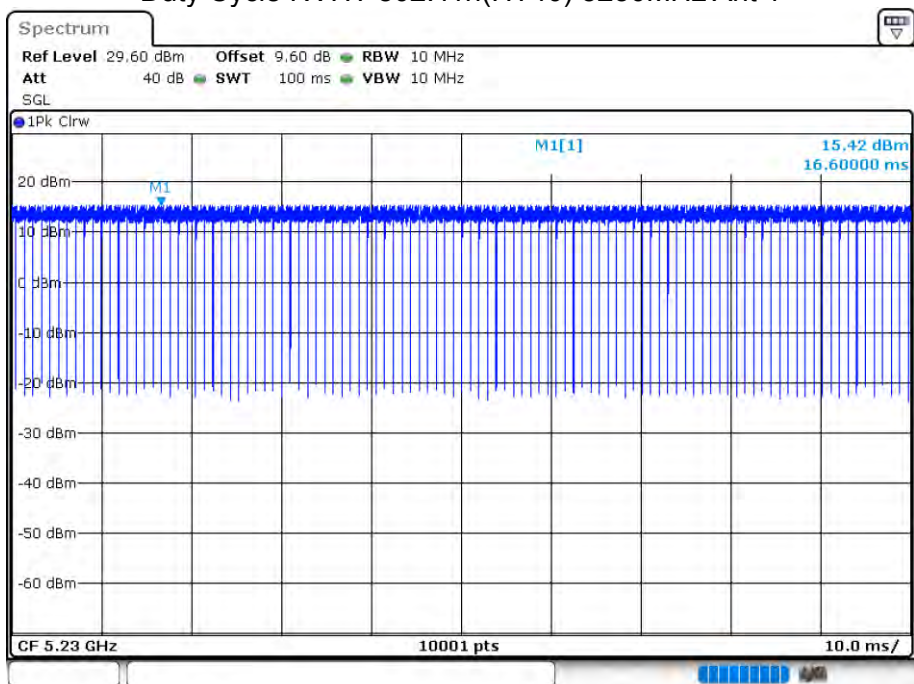


Date: 2.SEP.2020 14:09:40

Duty Cycle NVNT 802.11n(HT40) 5190MHz Ant 2

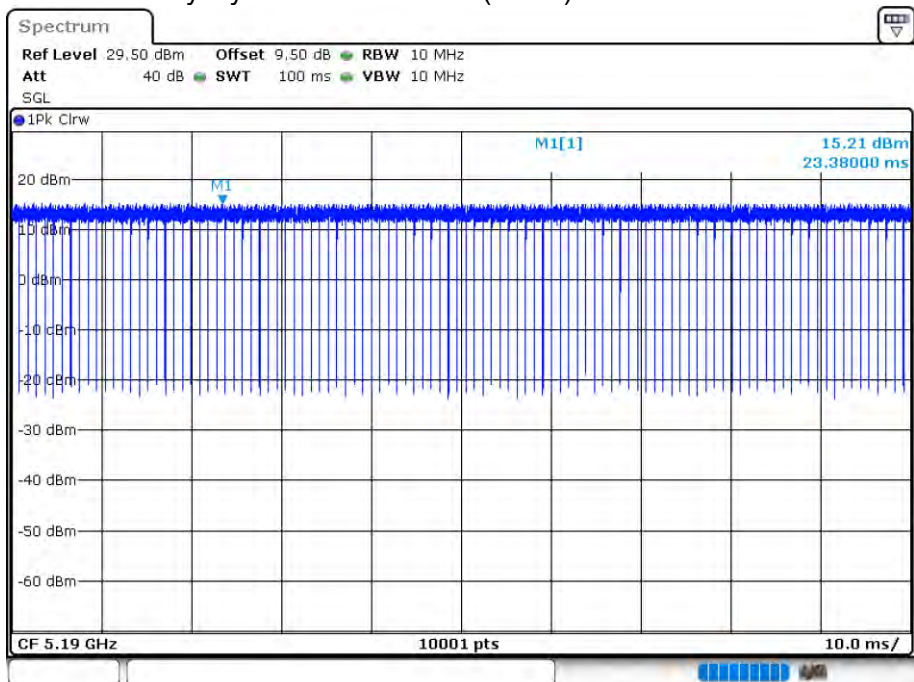

Date: 2.SEP.2020 19:35:55

Duty Cycle NVNT 802.11n(HT40) 5230MHz Ant 2

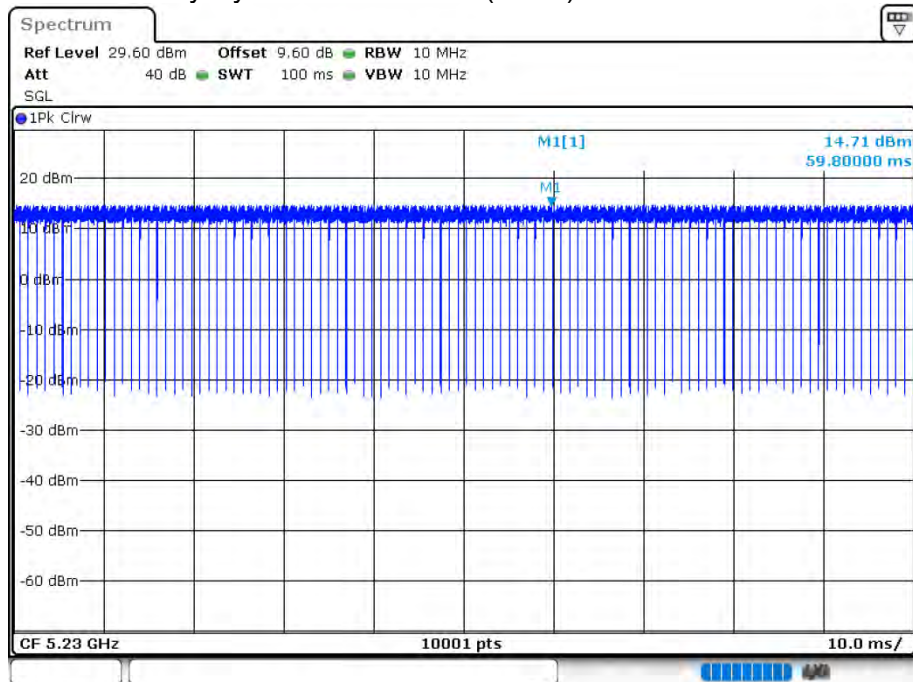

Date: 2.SEP.2020 19:41:54


11.1.2 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Total Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5180	Ant 1	9.73	0	9.73		24	Pass
NVNT	802.11a	5200	Ant 1	9.68	0	9.68		24	Pass
NVNT	802.11a	5240	Ant 1	9.7	0	9.7		24	Pass
NVNT	802.11a	5180	Ant 2	9.72	0	9.72		24	Pass
NVNT	802.11a	5200	Ant 2	9.7	0	9.7		24	Pass
NVNT	802.11a	5240	Ant 2	9.81	0	9.81		24	Pass
NVNT	802.11ac20	5180	Ant 1	9.72	0	9.72	12.59	23.23	Pass
NVNT	802.11ac20	5200	Ant 2	9.43	0	9.43			
NVNT	802.11ac20	5240	Ant 1	9.67	0	9.67	12.56	23.23	Pass
NVNT	802.11ac20	5180	Ant 2	9.42	0	9.42			
NVNT	802.11ac20	5200	Ant 1	9.63	0	9.63	12.77	23.23	Pass
NVNT	802.11ac20	5240	Ant 2	9.89	0	9.89			
NVNT	802.11ac40	5190	Ant 1	9.52	0	9.52	12.50	23.23	Pass
NVNT	802.11ac40	5230	Ant 2	9.46	0	9.46			
NVNT	802.11ac40	5190	Ant 1	9.45	0	9.45	12.38	23.23	Pass
NVNT	802.11ac40	5230	Ant 2	9.29	0	9.29			
NVNT	802.11ac80	5210	Ant 1	9.02	0	9.02	12.02	23.23	Pass
NVNT	802.11ac80	5210	Ant 2	8.99	0	8.99			
NVNT	802.11n(HT20)	5180	Ant 1	9.72	0	9.72	12.75	23.23	Pass
NVNT	802.11n(HT20)	5200	Ant 2	9.75	0	9.75			
NVNT	802.11n(HT20)	5240	Ant 1	9.72	0	9.72	12.44	23.23	Pass
NVNT	802.11n(HT20)	5180	Ant 2	9.11	0	9.11			
NVNT	802.11n(HT20)	5200	Ant 1	9.59	0	9.59	12.66	23.23	Pass
NVNT	802.11n(HT20)	5240	Ant 2	9.7	0	9.7			
NVNT	802.11n(HT40)	5190	Ant 1	9.21	0	9.21	12.24	23.23	Pass
NVNT	802.11n(HT40)	5230	Ant 2	9.25	0	9.25			
NVNT	802.11n(HT40)	5190	Ant 1	9.25	0	9.25	12.10	23.23	Pass
NVNT	802.11n(HT40)	5230	Ant 2	8.92	0	8.92			


11.1.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	802.11a	5180	Ant 1	16.4424	18.328	Pass
NVNT	802.11a	5200	Ant 1	16.4864	18.452	Pass
NVNT	802.11a	5240	Ant 1	16.3424	18.876	Pass
NVNT	802.11a	5180	Ant 2	16.4064	18.624	Pass
NVNT	802.11a	5200	Ant 2	16.3584	18.444	Pass
NVNT	802.11a	5240	Ant 2	16.4344	18.568	Pass
NVNT	802.11ac20	5180	Ant 1	17.5942	19.476	Pass
NVNT	802.11ac20	5200	Ant 1	17.5742	19.808	Pass
NVNT	802.11ac20	5240	Ant 1	17.5662	19.492	Pass
NVNT	802.11ac20	5180	Ant 2	17.5622	19.46	Pass
NVNT	802.11ac20	5200	Ant 2	17.5542	19.504	Pass
NVNT	802.11ac20	5240	Ant 2	17.5742	19.62	Pass
NVNT	802.11ac40	5190	Ant 1	36.0764	41.496	Pass
NVNT	802.11ac40	5230	Ant 1	36.0844	41.52	Pass
NVNT	802.11ac40	5190	Ant 2	36.0204	41.664	Pass
NVNT	802.11ac40	5230	Ant 2	36.1404	42.448	Pass
NVNT	802.11ac80	5210	Ant 1	73.4967	80.496	Pass
NVNT	802.11ac80	5210	Ant 2	73.4487	80.64	Pass
NVNT	802.11n(HT20)	5180	Ant 1	17.5782	19.372	Pass
NVNT	802.11n(HT20)	5200	Ant 1	17.5622	19.464	Pass
NVNT	802.11n(HT20)	5240	Ant 1	17.5582	19.476	Pass
NVNT	802.11n(HT20)	5180	Ant 2	17.5582	19.672	Pass
NVNT	802.11n(HT20)	5200	Ant 2	17.5302	19.728	Pass
NVNT	802.11n(HT20)	5240	Ant 2	17.5382	19.376	Pass
NVNT	802.11n(HT40)	5190	Ant 1	36.1564	41.576	Pass
NVNT	802.11n(HT40)	5230	Ant 1	36.1324	41.792	Pass
NVNT	802.11n(HT40)	5190	Ant 2	36.0764	41.912	Pass
NVNT	802.11n(HT40)	5230	Ant 2	36.2044	42.032	Pass

OBW NVNT 802.11a 5180MHz Ant 1

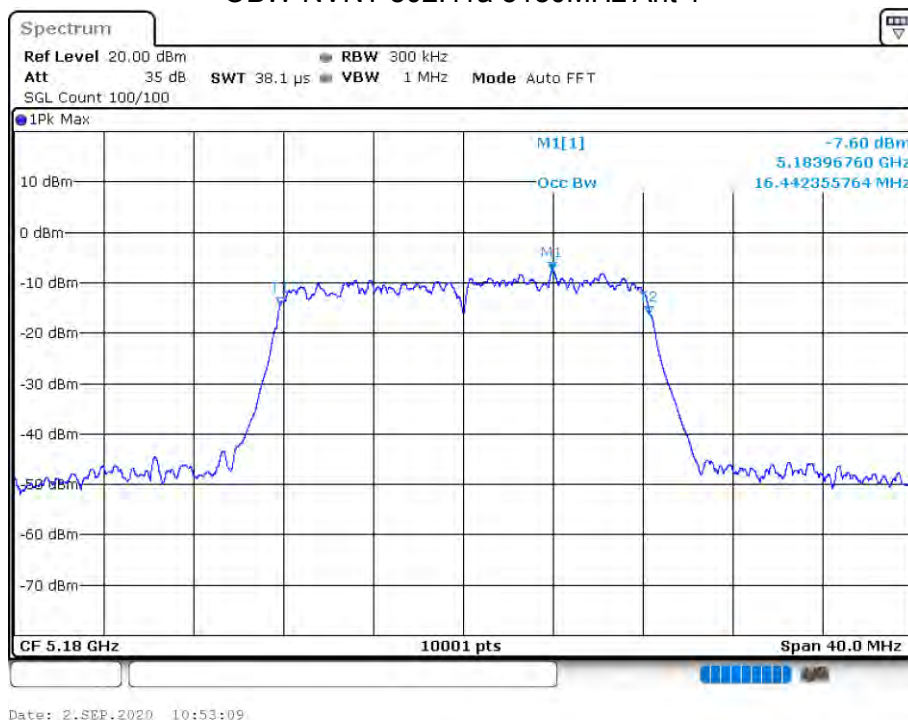

-26 dB BW NVNT 802.11a 5180MHz Ant 1

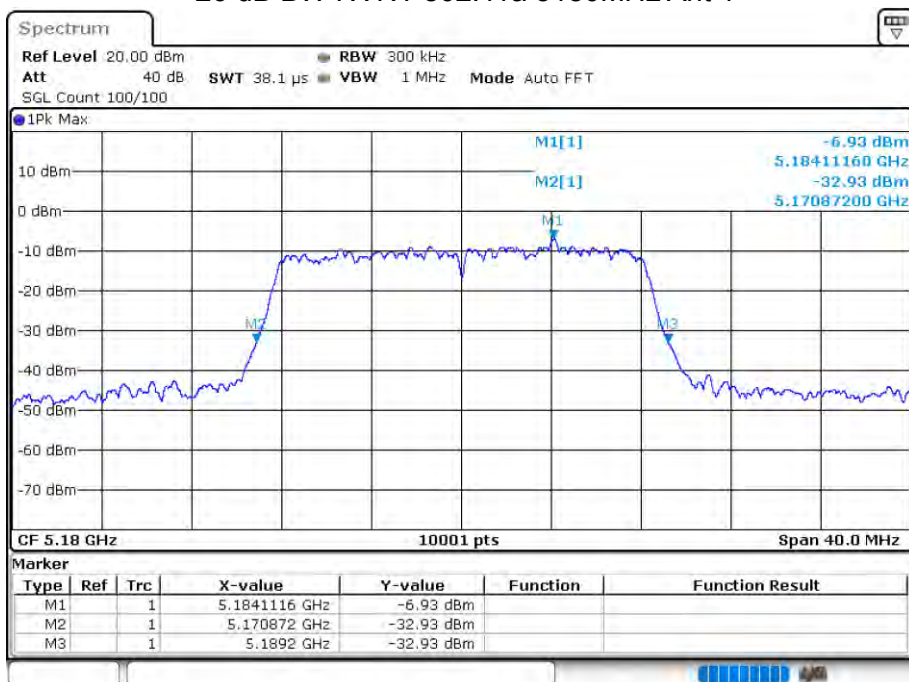


Date: 2.SEP.2020 10:53:11

OBW NVNT 802.11a 5200MHz Ant 1



Date: 2.SEP.2020 10:58:13

-26 dB BW NVNT 802.11a 5200MHz Ant 1

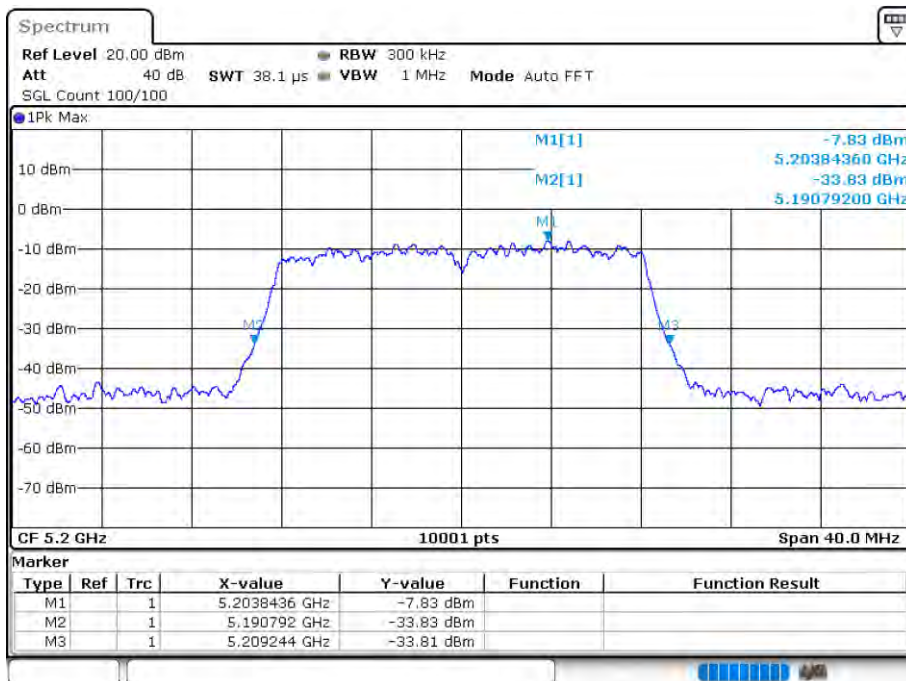


Date: 2-SEP-2020 10:58:15

OBW NVNT 802.11a 5240MHz Ant 1



Date: 2-SEP-2020 11:00:06

-26 dB BW NVNT 802.11a 5240MHz Ant 1

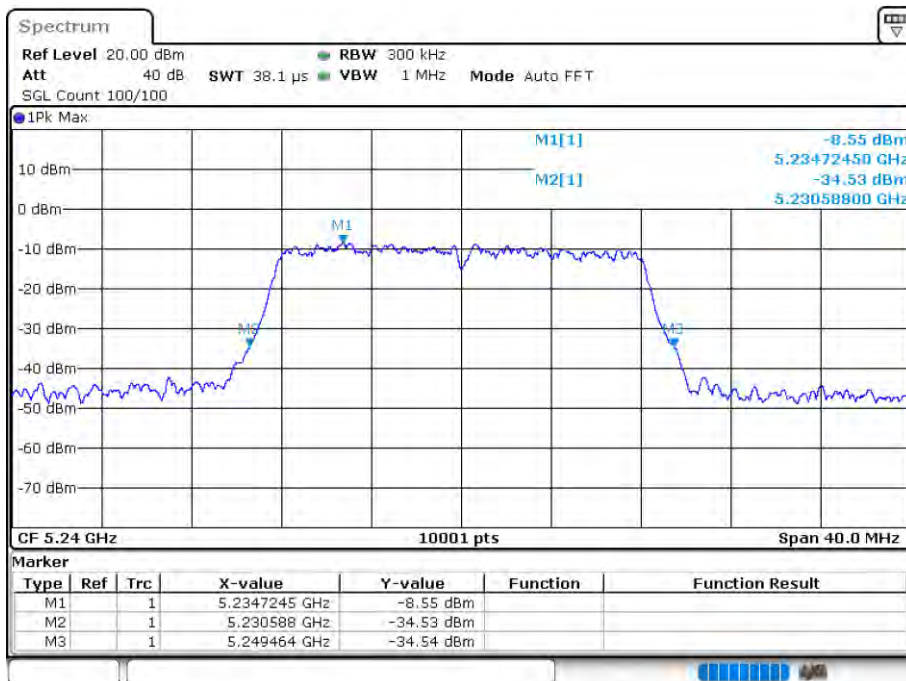


Date: 2.SEP.2020 11:00:09

OBW NVNT 802.11a 5180MHz Ant 2



Date: 2.SEP.2020 18:20:46

-26 dB BW NVNT 802.11a 5180MHz Ant 2

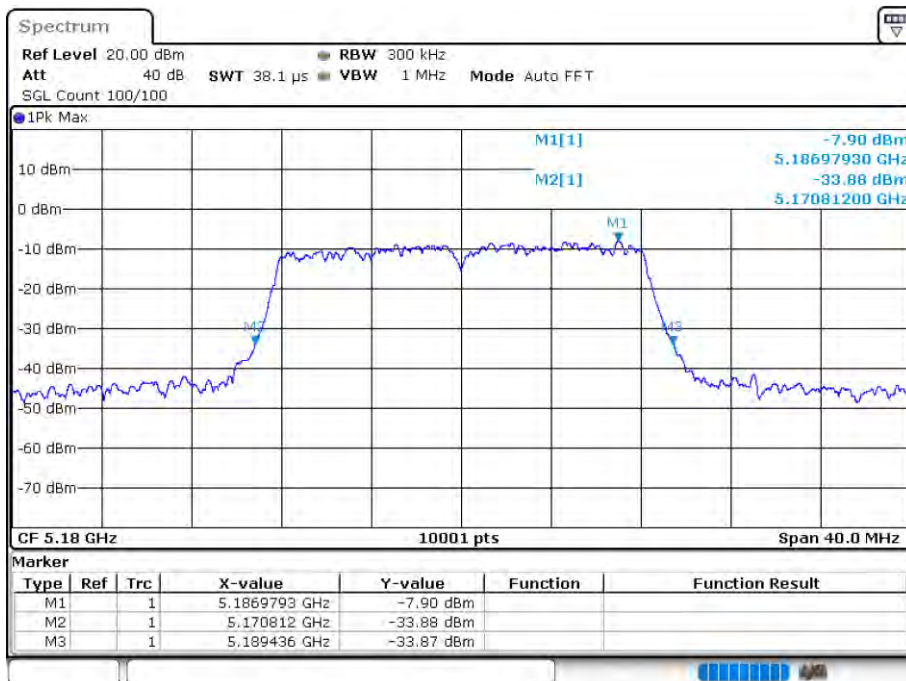


Date: 2.SEP.2020 18:20:48

OBW NVNT 802.11a 5200MHz Ant 2



Date: 2.SEP.2020 18:23:09

-26 dB BW NVNT 802.11a 5200MHz Ant 2

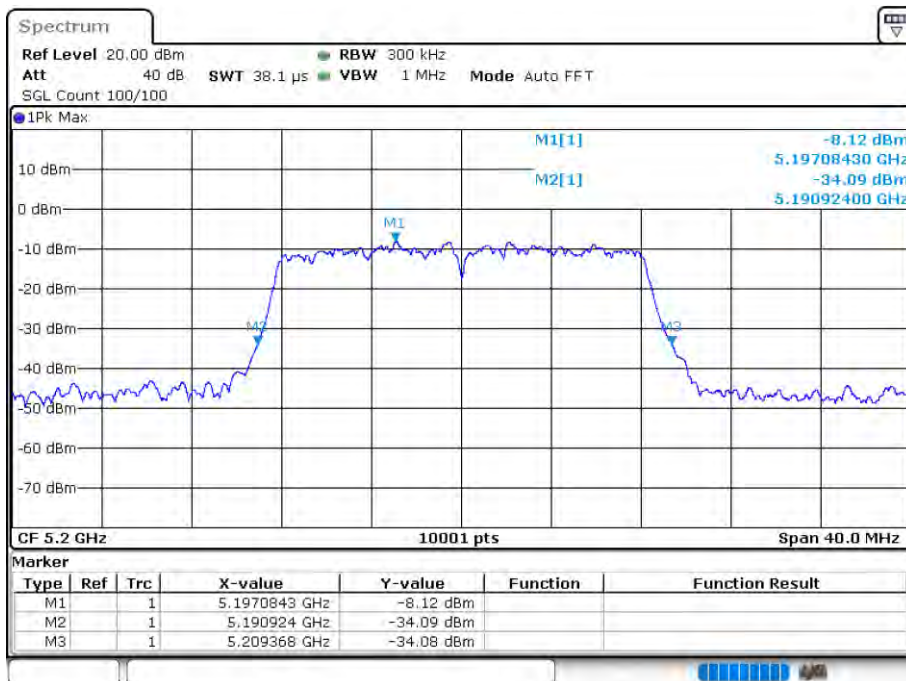


Date: 2-SEP-2020 18:23:11

OBW NVNT 802.11a 5240MHz Ant 2



Date: 2-SEP-2020 18:24:23

-26 dB BW NVNT 802.11a 5240MHz Ant 2

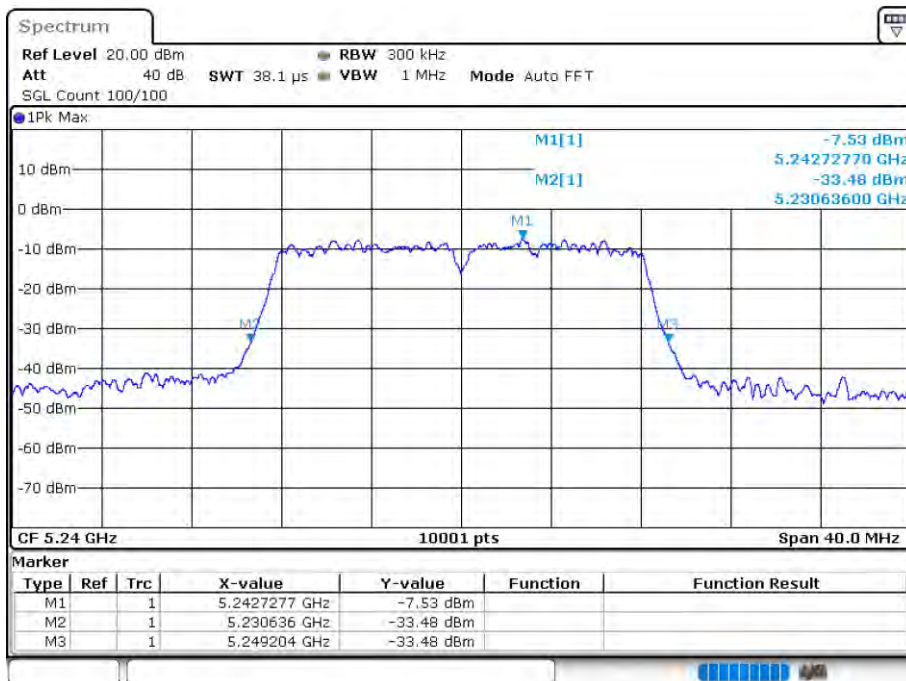


Date: 21-SEP-2020 18:24:25

OBW NVNT 802.11ac20 5180MHz Ant 1




Date: 21-SEP-2020 11:32:05

-26 dB BW NVNT 802.11ac20 5180MHz Ant 1

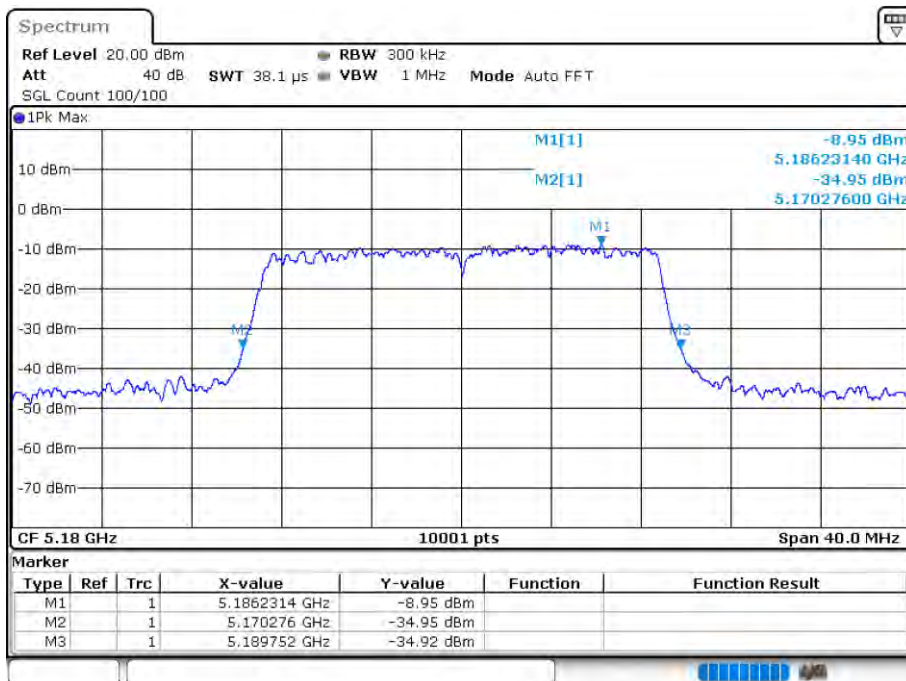

Date: 2-SEP-2020 11:32:07

OBW NVNT 802.11ac20 5200MHz Ant 1

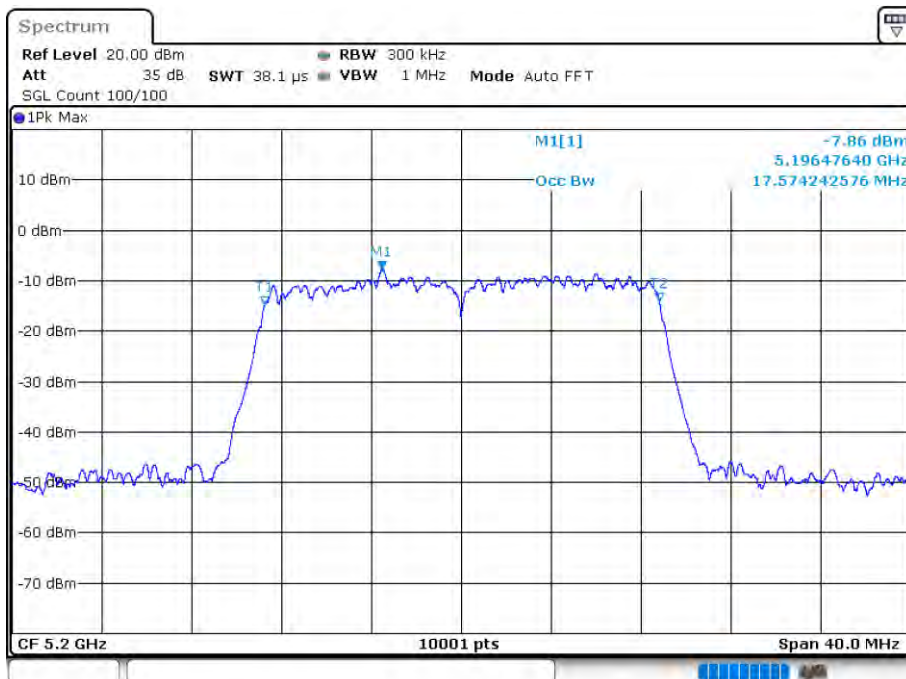

Date: 2-SEP-2020 11:33:32

-26 dB BW NVNT 802.11ac20 5200MHz Ant 1




Date: 2-SEP-2020 11:33:35

OBW NVNT 802.11ac20 5240MHz Ant 1




Date: 2-SEP-2020 11:35:00

-26 dB BW NVNT 802.11ac20 5240MHz Ant 1

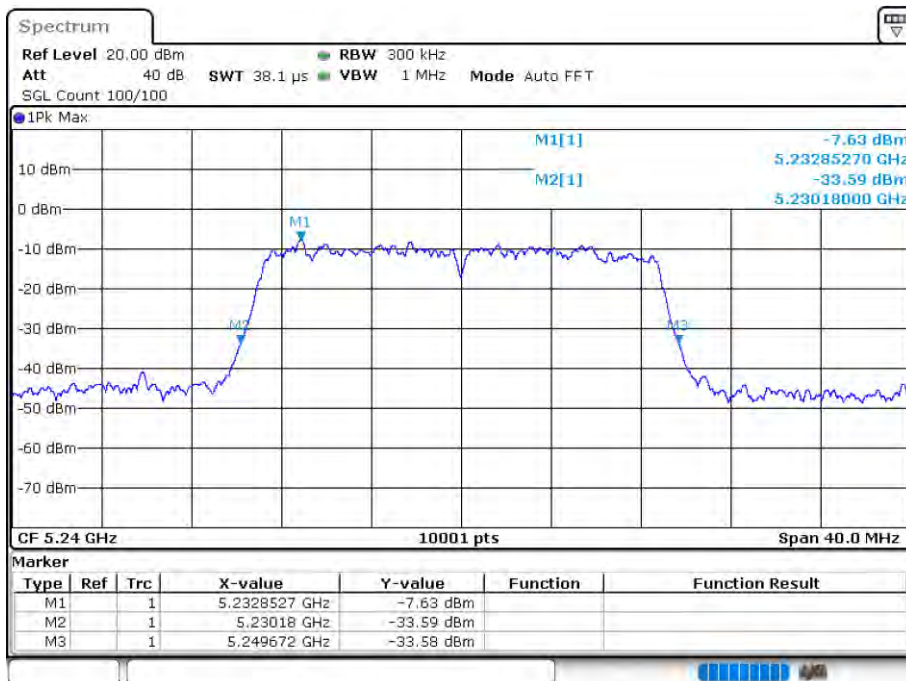

Date: 21-SEP-2020 11:35:03

OBW NVNT 802.11ac20 5180MHz Ant 2

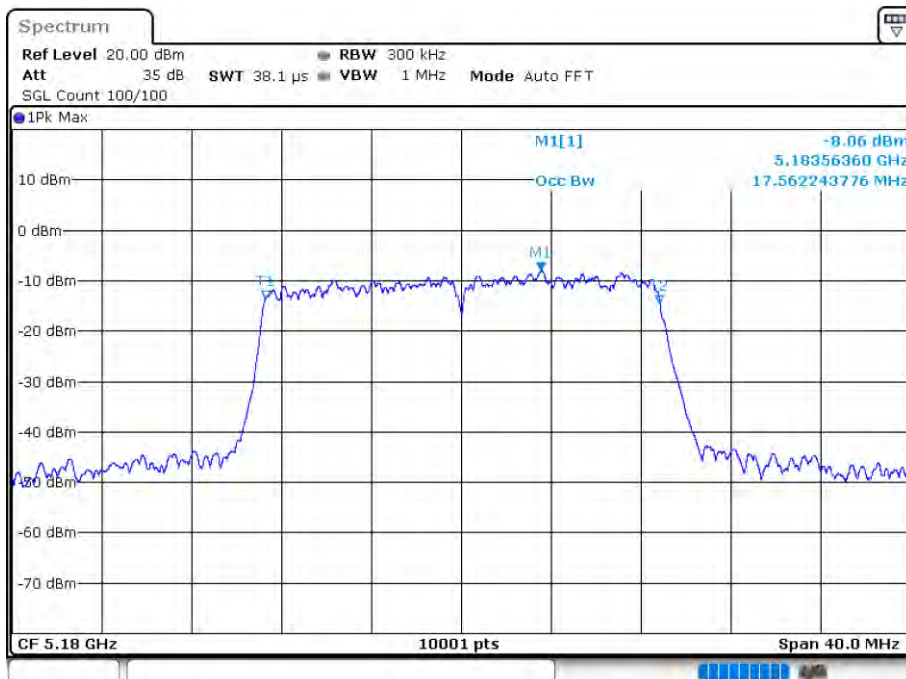

Date: 21-SEP-2020 19:26:38

-26 dB BW NVNT 802.11ac20 5180MHz Ant 2



Date: 2-SEP-2020 19:26:41

OBW NVNT 802.11ac20 5200MHz Ant 2



Date: 2-SEP-2020 19:28:17

-26 dB BW NVNT 802.11ac20 5200MHz Ant 2




Date: 21-SEP-2020 19:28:19

OBW NVNT 802.11ac20 5240MHz Ant 2



Date: 21-SEP-2020 19:29:55

-26 dB BW NVNT 802.11ac20 5240MHz Ant 2

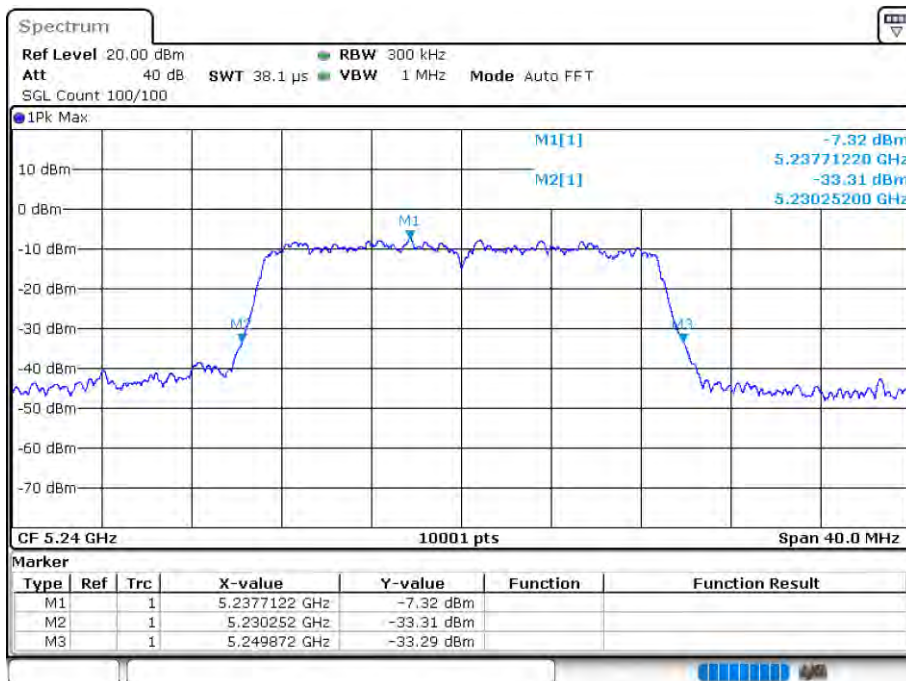


Date: 2-SEP-2020 19:29:57

OBW NVNT 802.11ac40 5190MHz Ant 1



Date: 2-SEP-2020 14:15:15

-26 dB BW NVNT 802.11ac40 5190MHz Ant 1

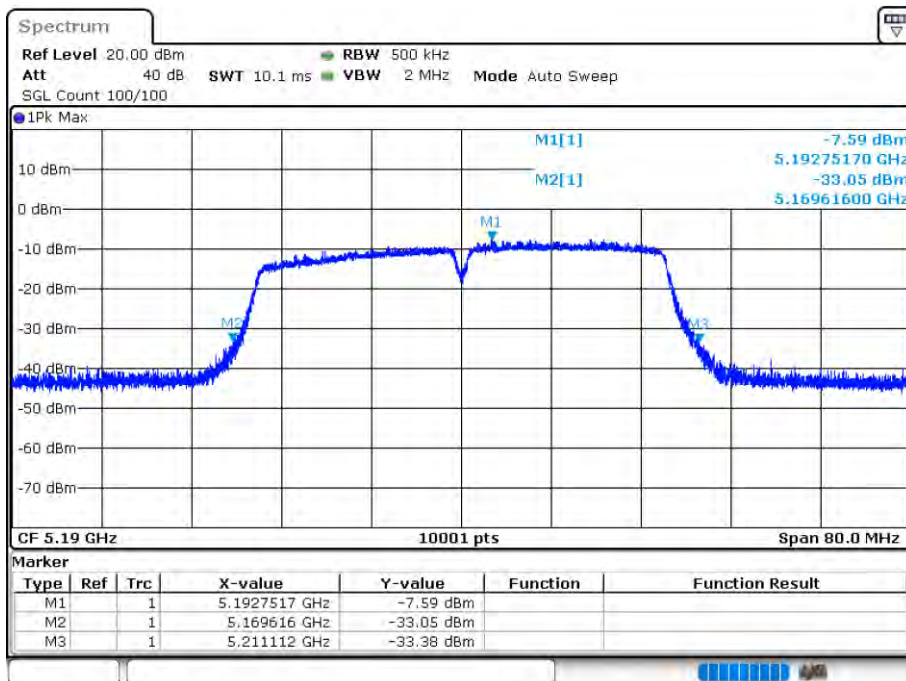


Date: 2-SEP-2020 14:15:19

OBW NVNT 802.11ac40 5230MHz Ant 1



Date: 2-SEP-2020 14:12:18

-26 dB BW NVNT 802.11ac40 5230MHz Ant 1

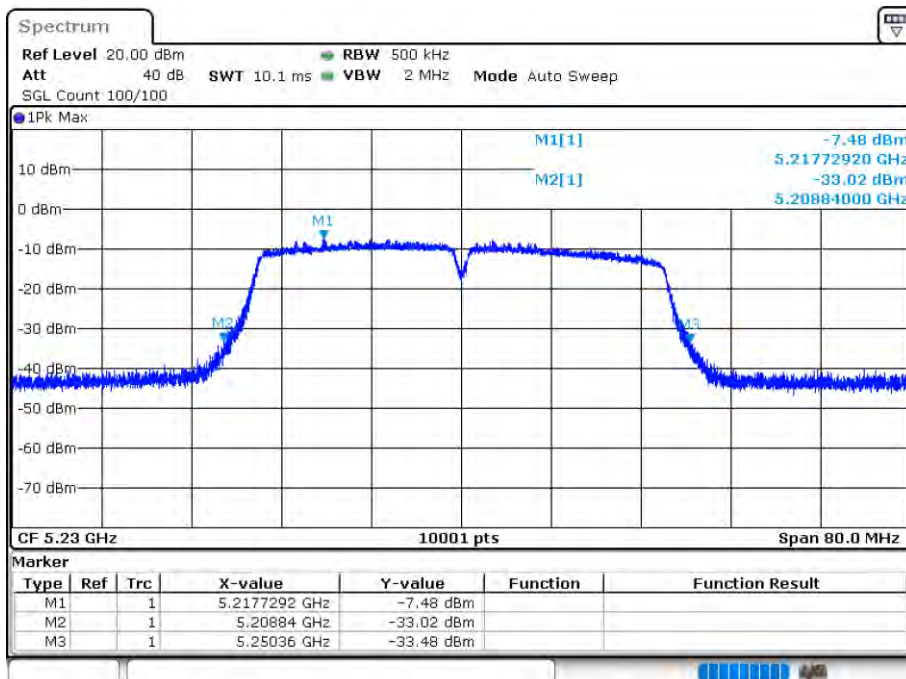


Date: 2.SEP.2020 14:12:22

OBW NVNT 802.11ac40 5190MHz Ant 2



Date: 2.SEP.2020 19:43:57

-26 dB BW NVNT 802.11ac40 5190MHz Ant 2

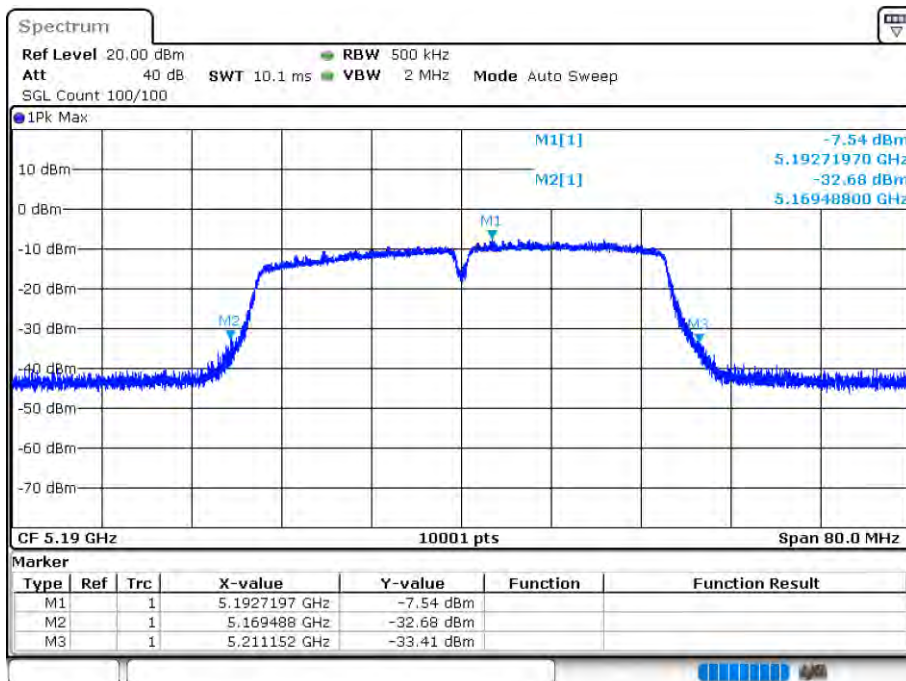


Date: 2.SEP.2020 19:43:59

OBW NVNT 802.11ac40 5230MHz Ant 2



Date: 2.SEP.2020 19:45:44

-26 dB BW NVNT 802.11ac40 5230MHz Ant 2

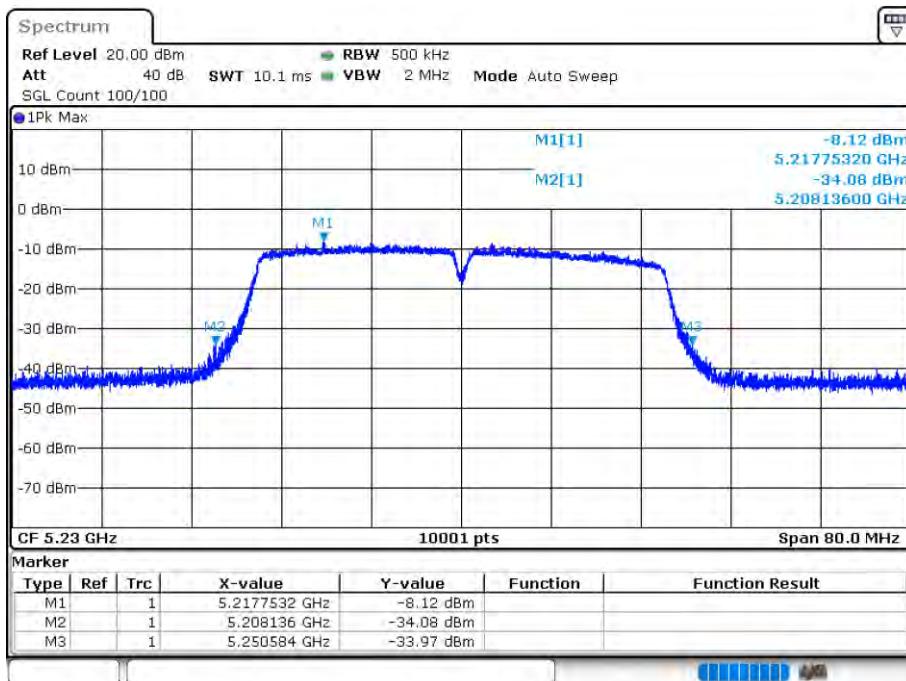


Date: 2-SEP-2020 19:45:47

OBW NVNT 802.11ac80 5210MHz Ant 1



Date: 2-SEP-2020 14:17:59

-26 dB BW NVNT 802.11ac80 5210MHz Ant 1

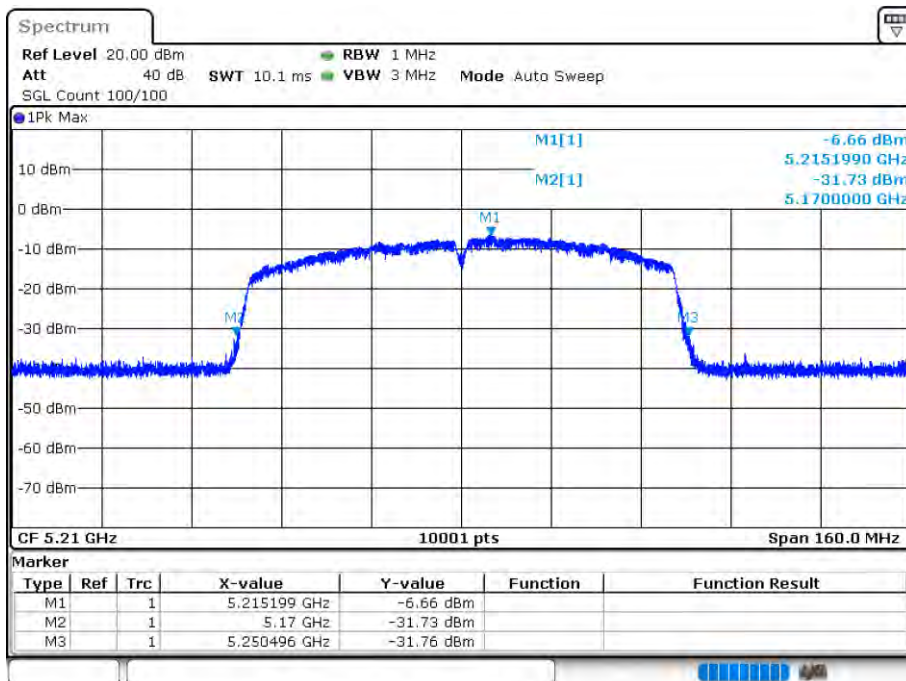


Date: 2.SEP.2020 14:18:02

OBW NVNT 802.11ac80 5210MHz Ant 2



Date: 2.SEP.2020 19:48:29

-26 dB BW NVNT 802.11ac80 5210MHz Ant 2

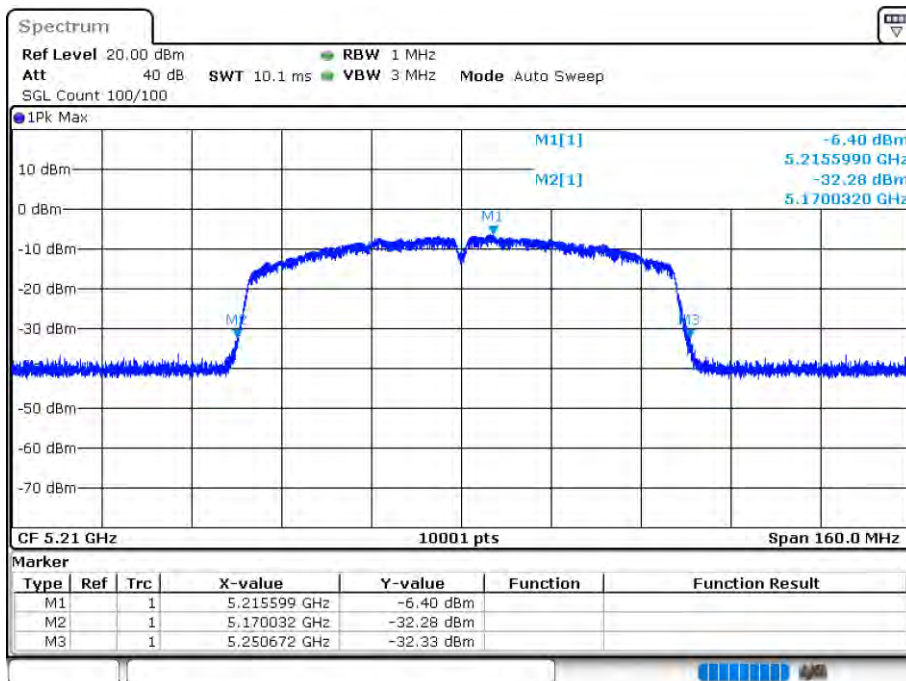


Date: 2.SEP.2020 19:48:32

OBW NVNT 802.11n(HT20) 5180MHz Ant 1




Date: 2.SEP.2020 11:01:45

-26 dB BW NVNT 802.11n(HT20) 5180MHz Ant 1

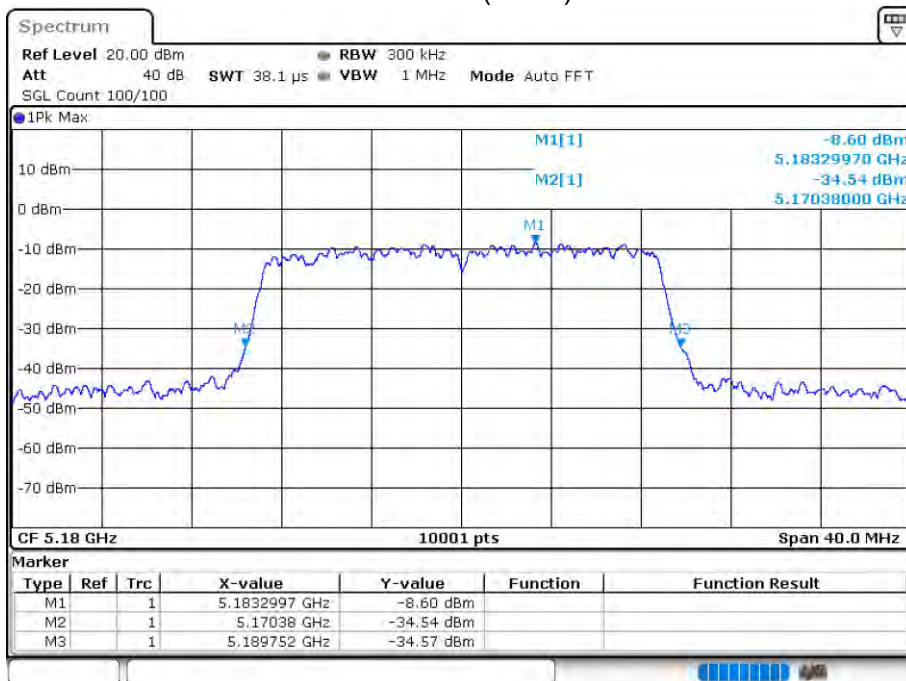


Date: 2-SEP-2020 11:01:47

OBW NVNT 802.11n(HT20) 5200MHz Ant 1

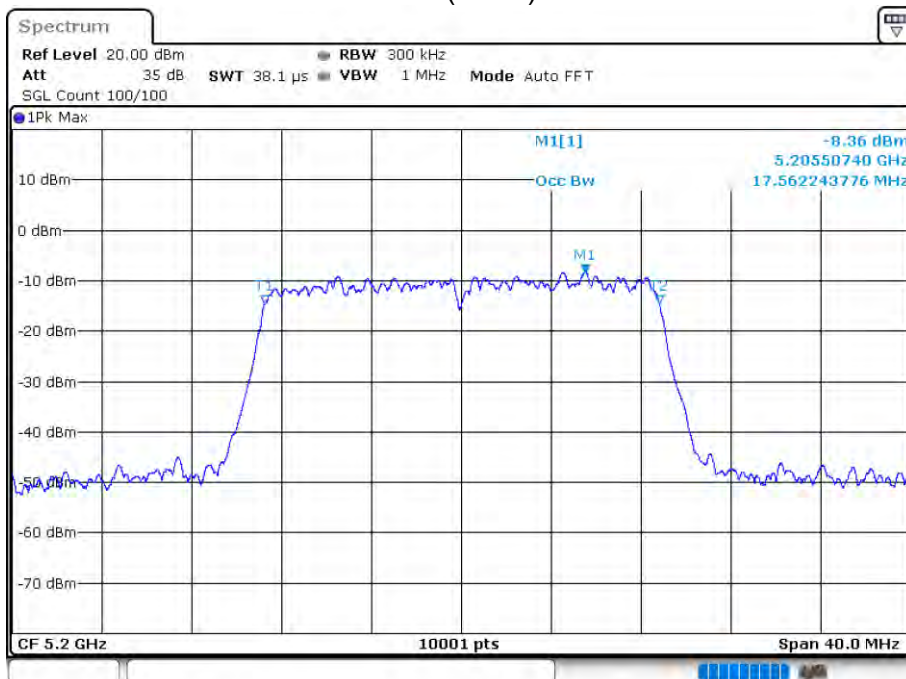

Date: 2-SEP-2020 11:03:04

-26 dB BW NVNT 802.11n(HT20) 5200MHz Ant 1

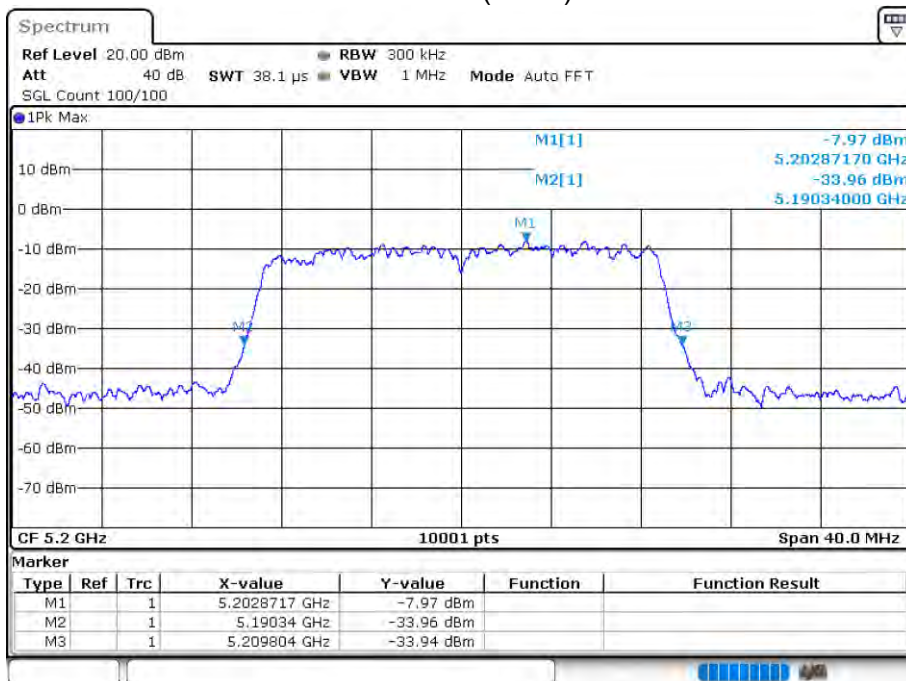


Date: 2-SEP-2020 11:03:07

OBW NVNT 802.11n(HT20) 5240MHz Ant 1



Date: 2-SEP-2020 11:04:10

-26 dB BW NVNT 802.11n(HT20) 5240MHz Ant 1

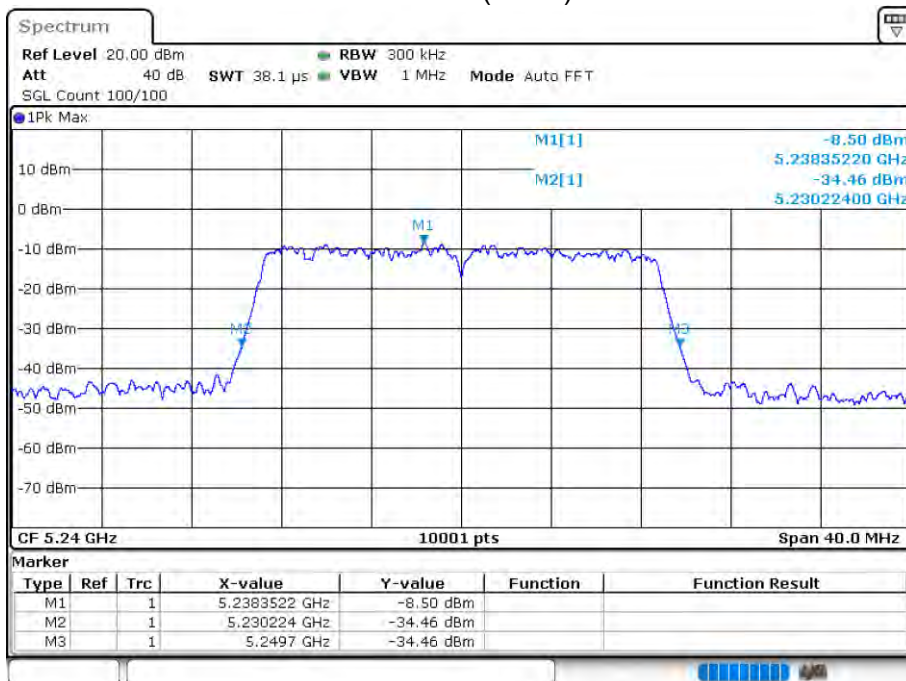

Date: 2-SEP-2020 11:04:13

OBW NVNT 802.11n(HT20) 5180MHz Ant 2



Date: 2-SEP-2020 18:25:55

-26 dB BW NVNT 802.11n(HT20) 5180MHz Ant 2




Date: 2.SEP.2020 18:25:58

OBW NVNT 802.11n(HT20) 5200MHz Ant 2



Date: 2.SEP.2020 18:27:20

-26 dB BW NVNT 802.11n(HT20) 5200MHz Ant 2

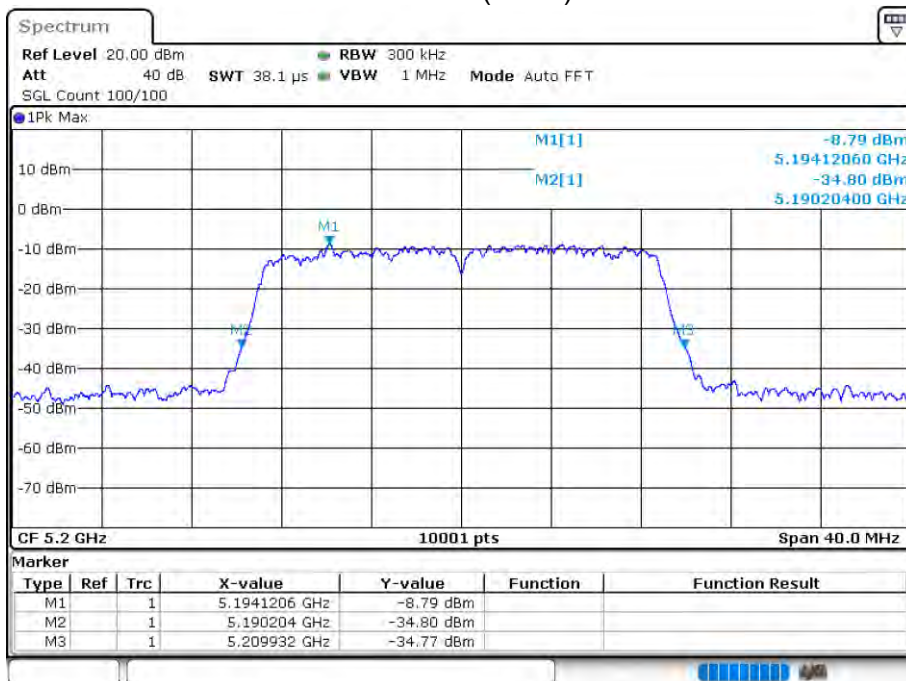


Date: 2-SEP-2020 18:27:23

OBW NVNT 802.11n(HT20) 5240MHz Ant 2




Date: 2-SEP-2020 18:28:31

-26 dB BW NVNT 802.11n(HT20) 5240MHz Ant 2

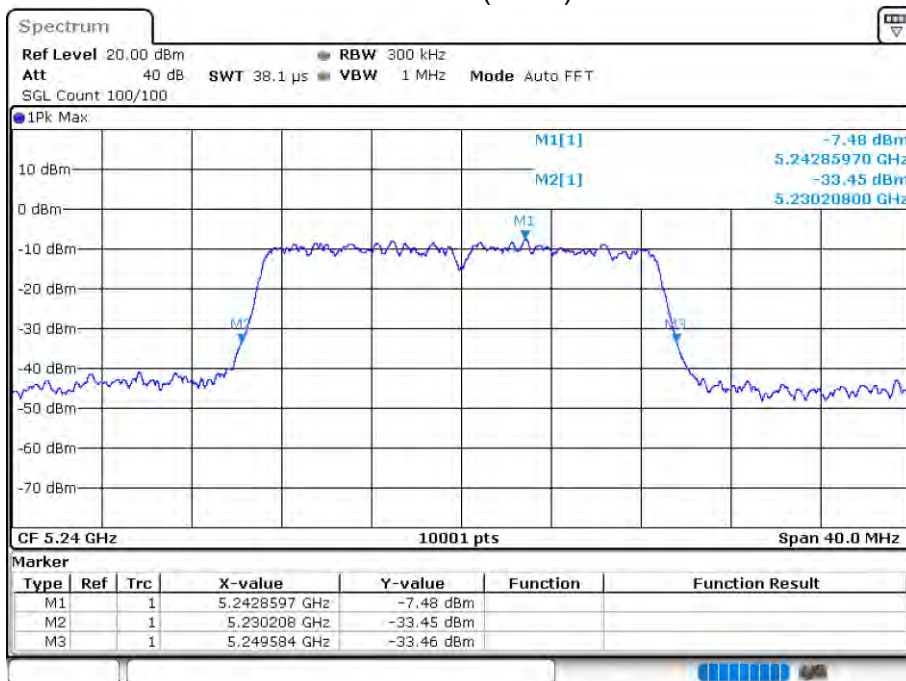


Date: 2-SEP-2020 18:28:33

OBW NVNT 802.11n(HT40) 5190MHz Ant 1

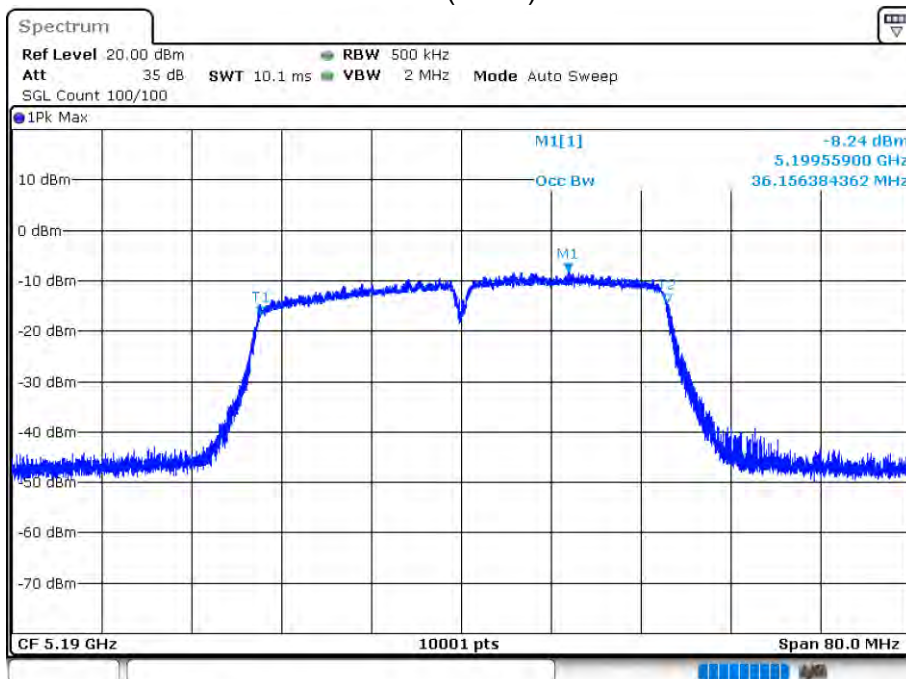


Date: 2-SEP-2020 11:38:22

-26 dB BW NVNT 802.11n(HT40) 5190MHz Ant 1

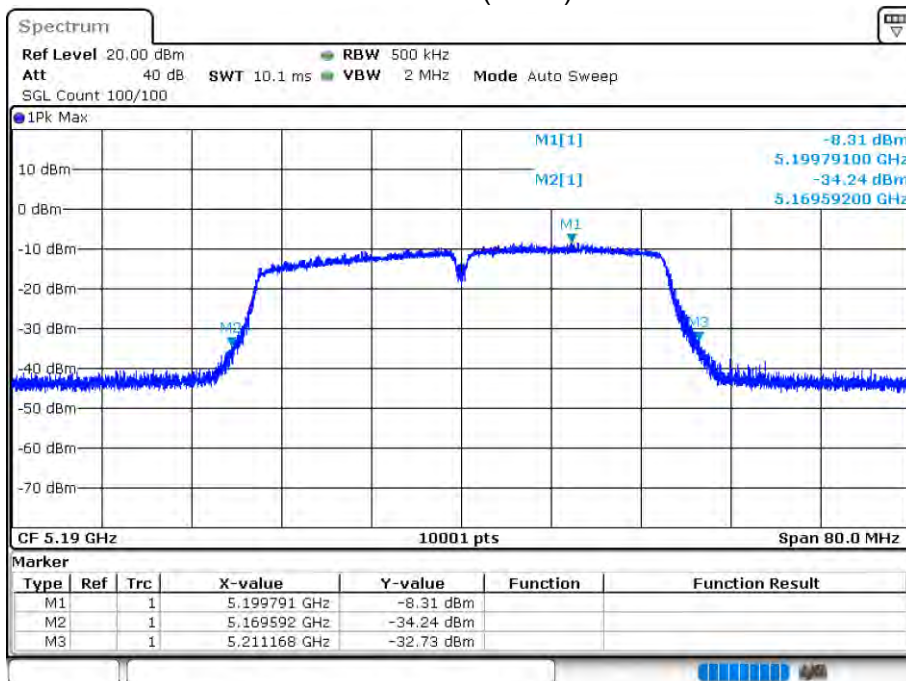


Date: 2-SEP-2020 11:38:25

OBW NVNT 802.11n(HT40) 5230MHz Ant 1

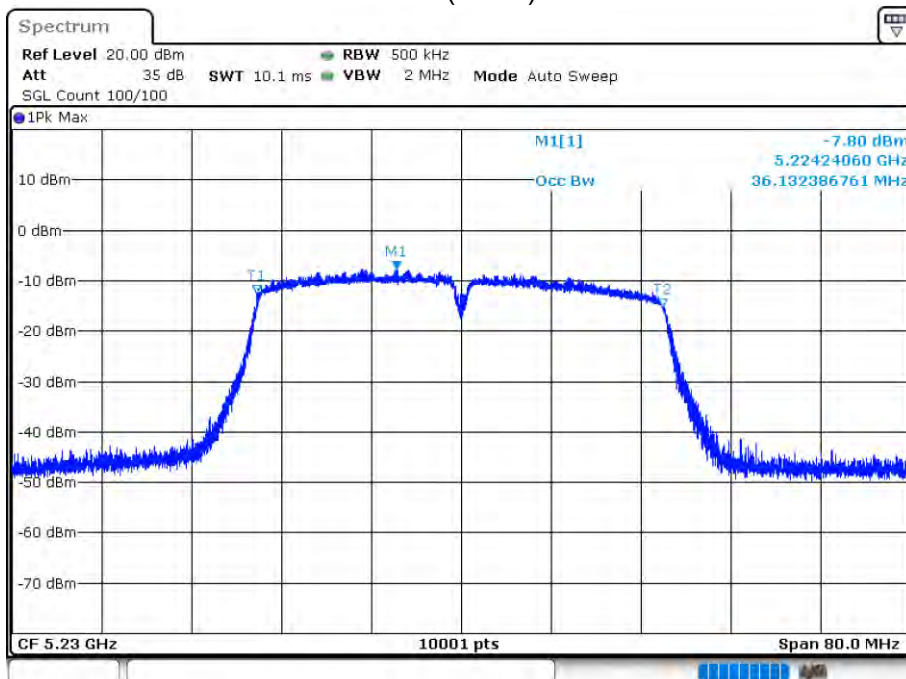


Date: 2-SEP-2020 14:09:47

-26 dB BW NVNT 802.11n(HT40) 5230MHz Ant 1

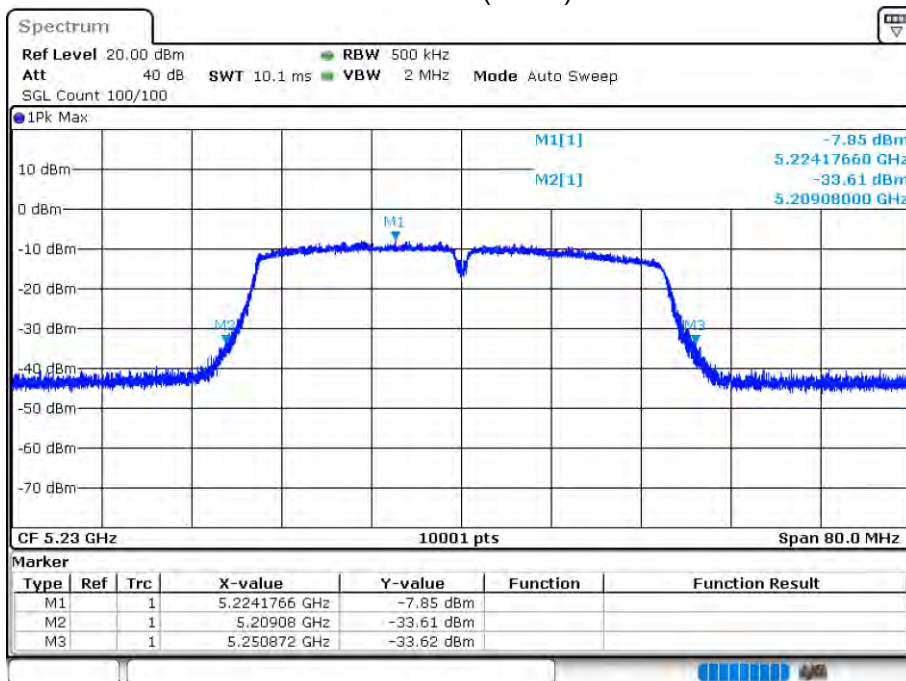


Date: 2-SEP-2020 14:09:51

OBW NVNT 802.11n(HT40) 5190MHz Ant 2

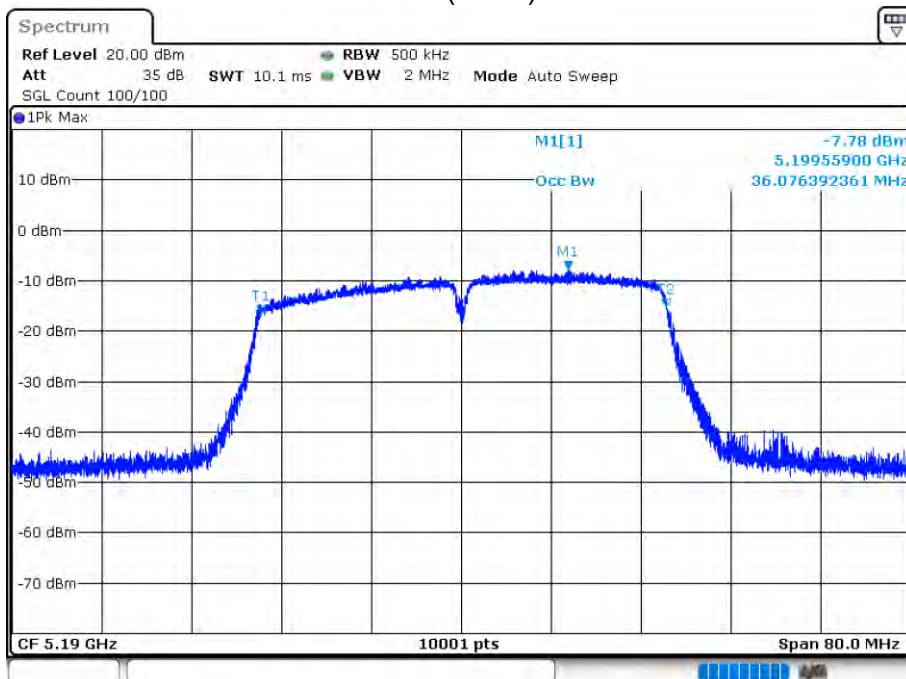


Date: 2-SEP-2020 19:36:05

-26 dB BW NVNT 802.11n(HT40) 5190MHz Ant 2

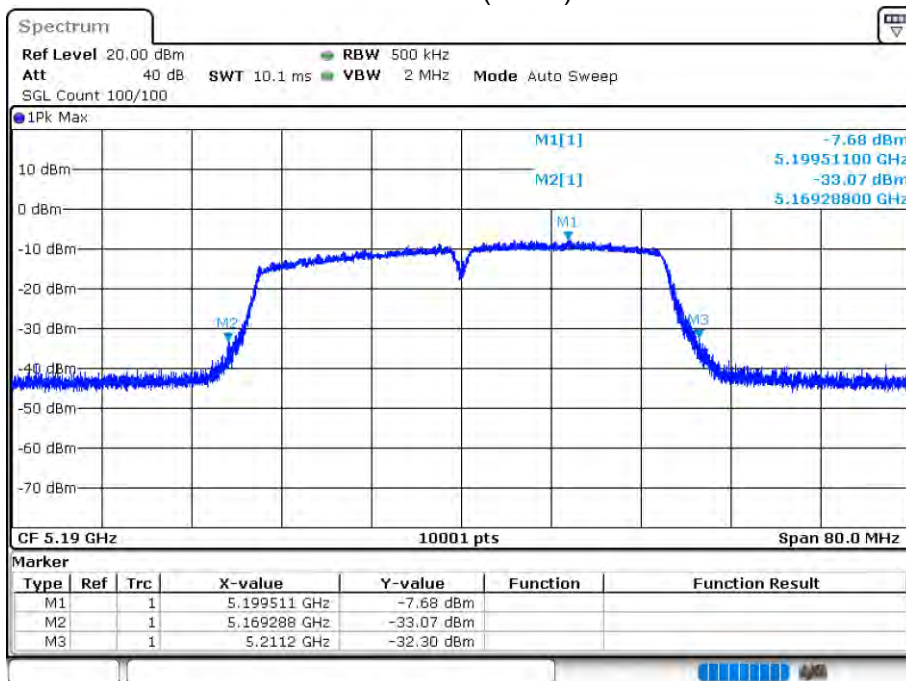


Date: 2.SEP.2020 19:36:08

OBW NVNT 802.11n(HT40) 5230MHz Ant 2

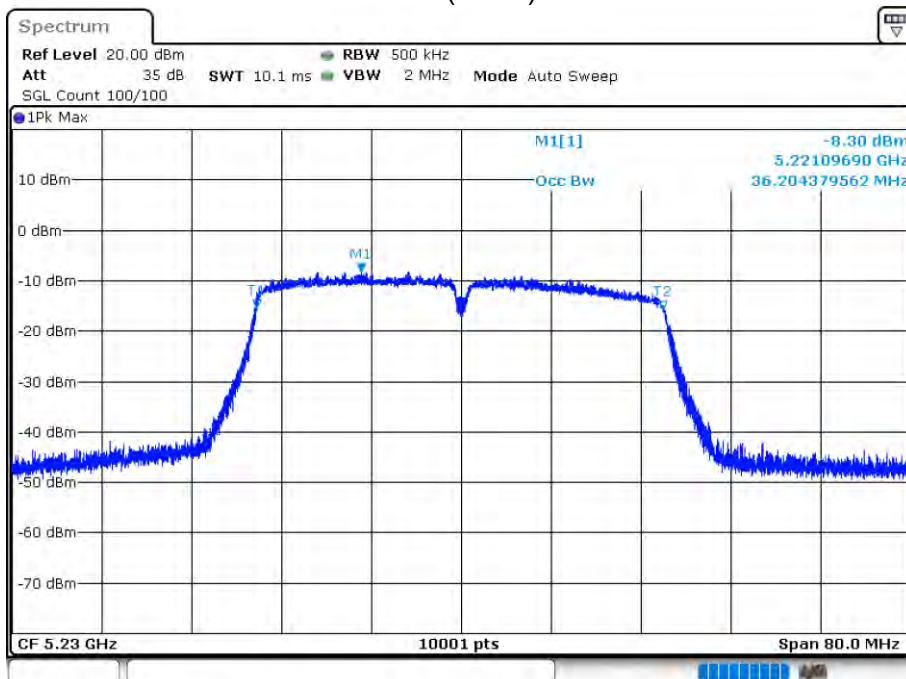

Date: 2.SEP.2020 19:42:05

-26 dB BW NVNT 802.11n(HT40) 5230MHz Ant 2

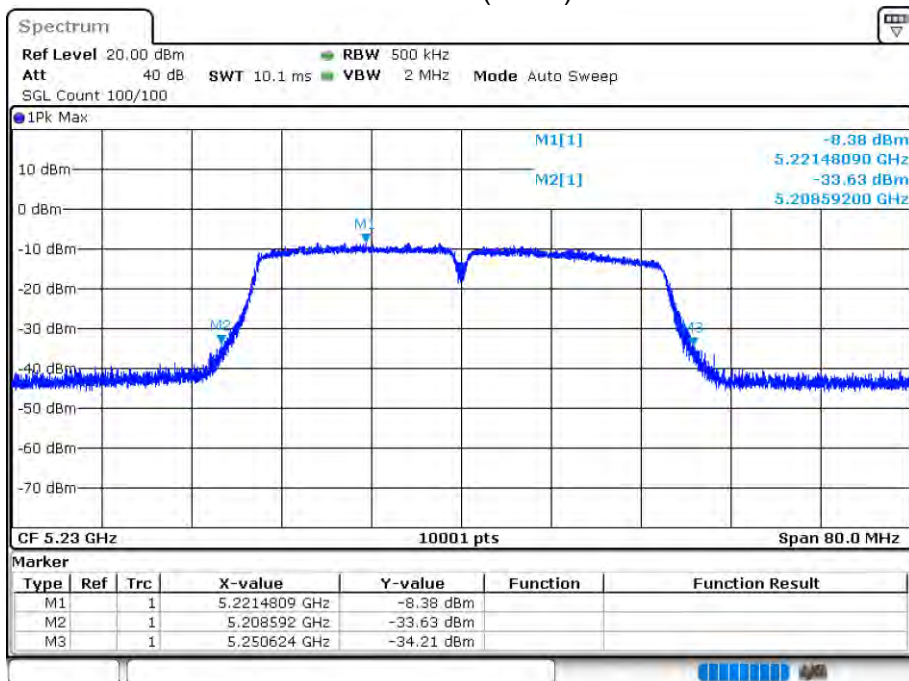

Date: 21-SEP-2020 19:42:07