




10.5. Test graphs

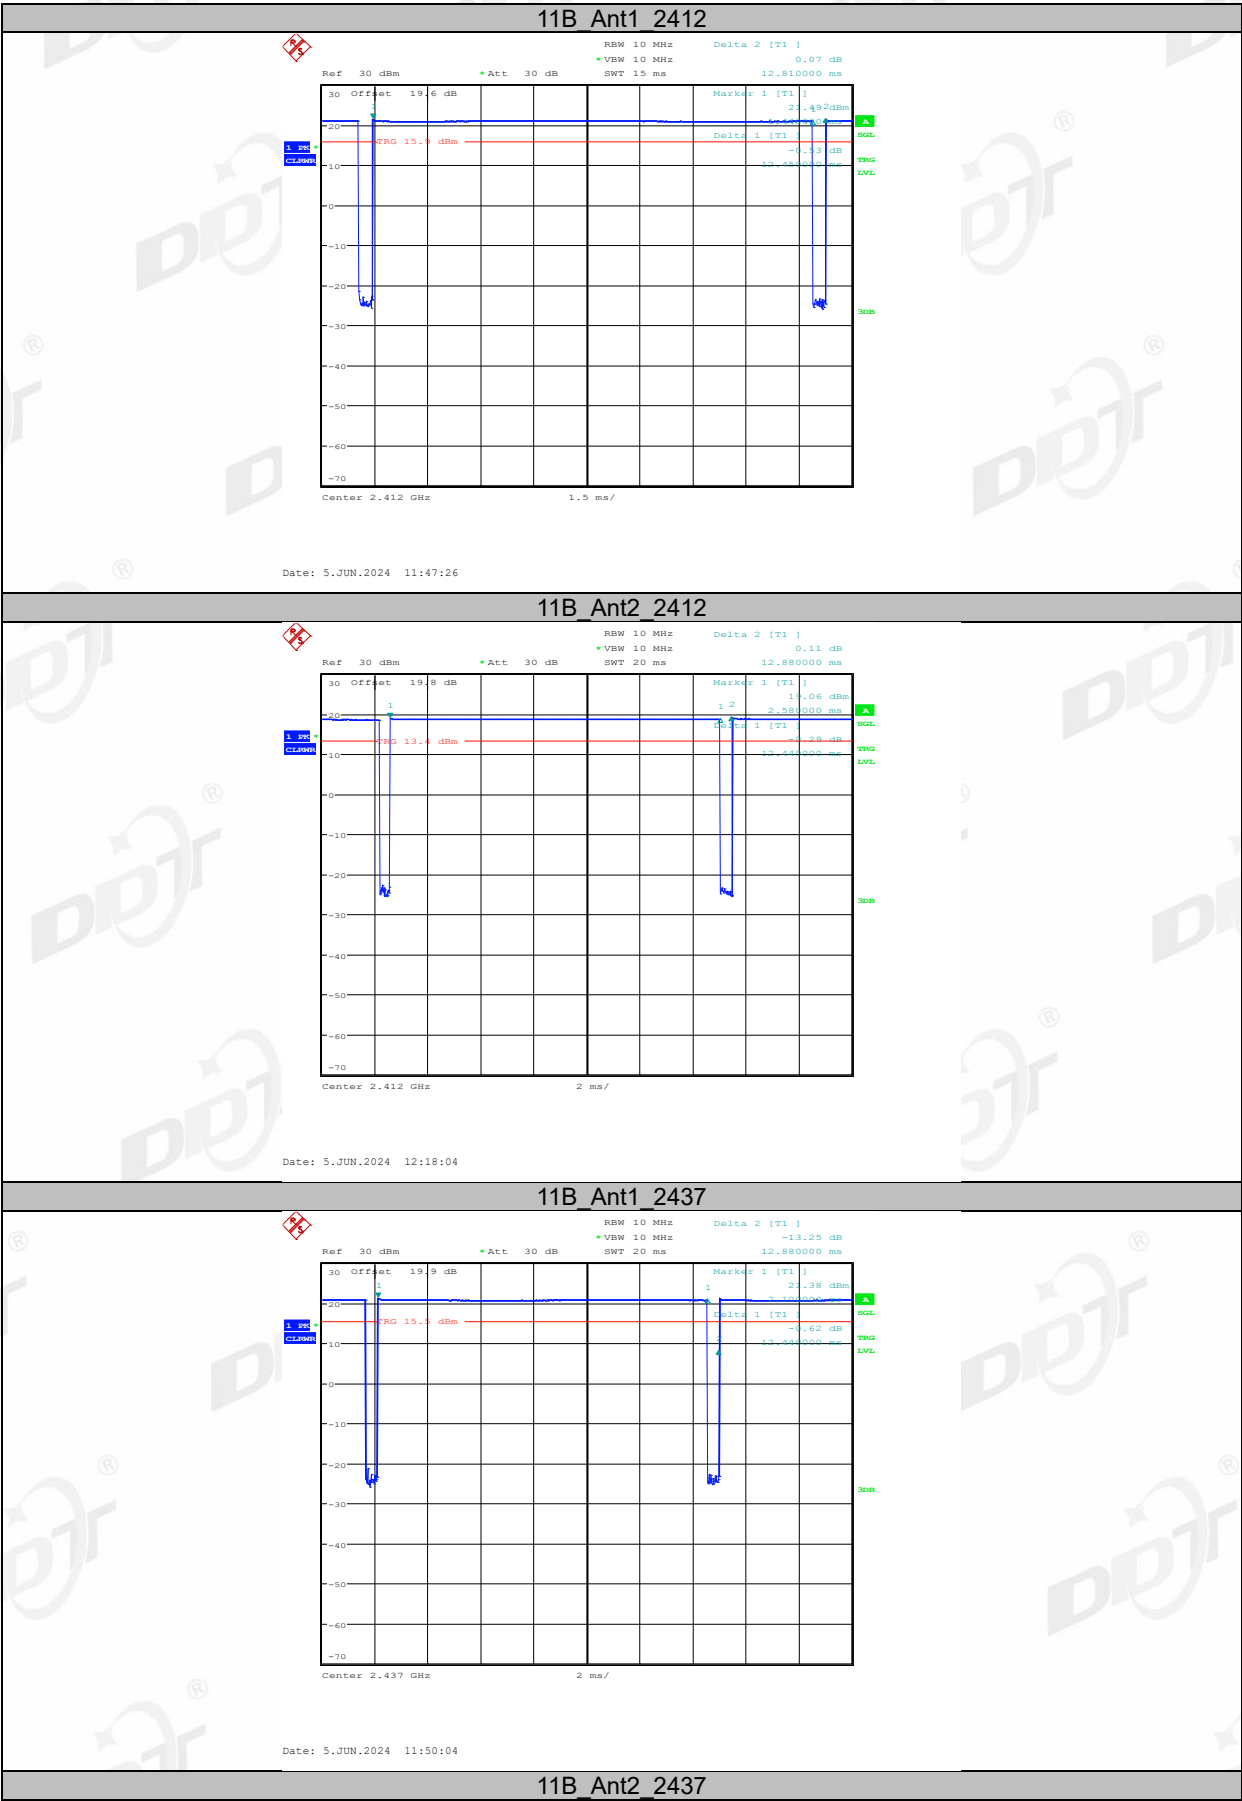


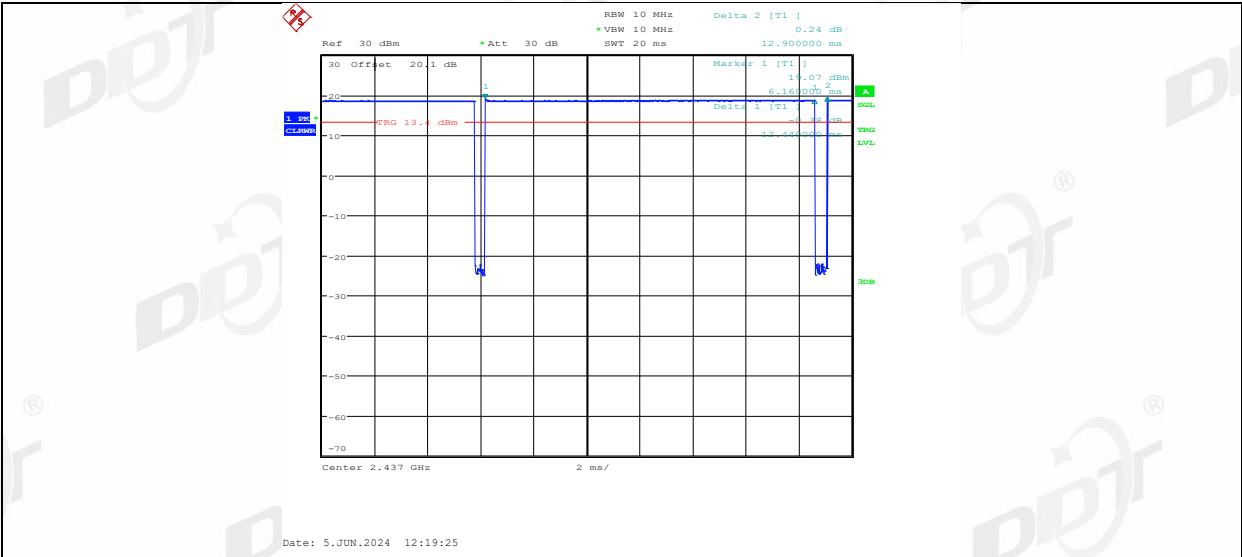


11B_Ant1_2462

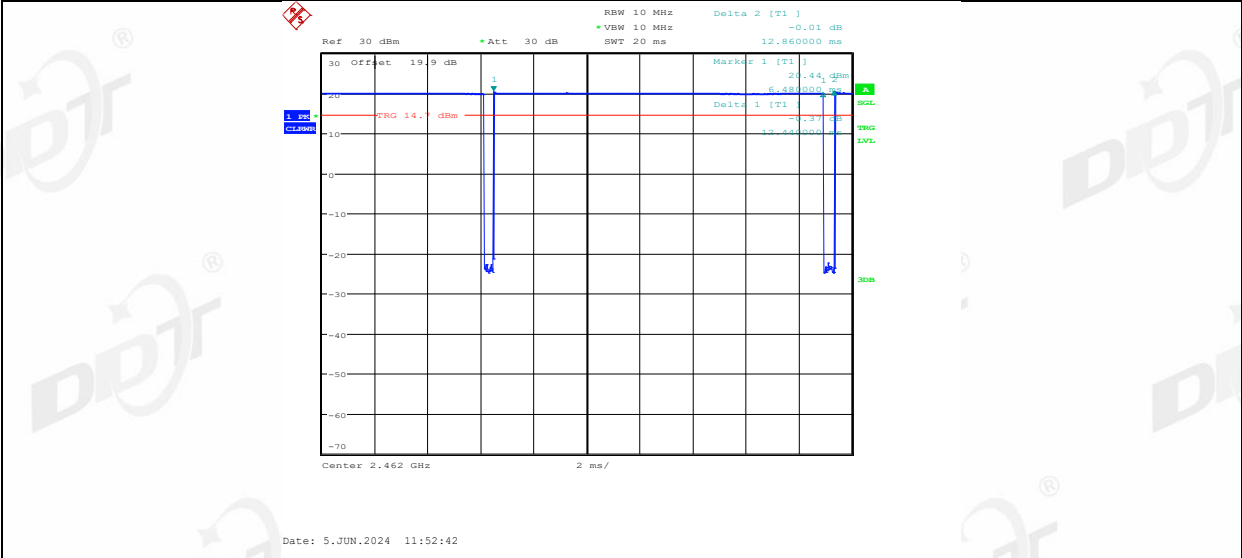


11B_Ant2_2462

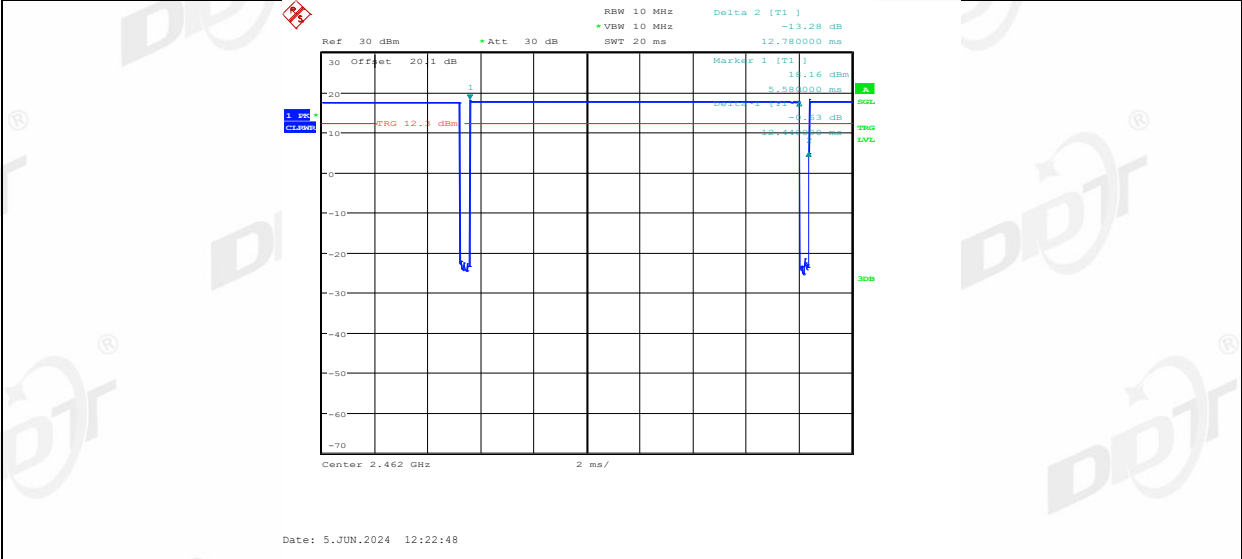


11G_Ant1_2412

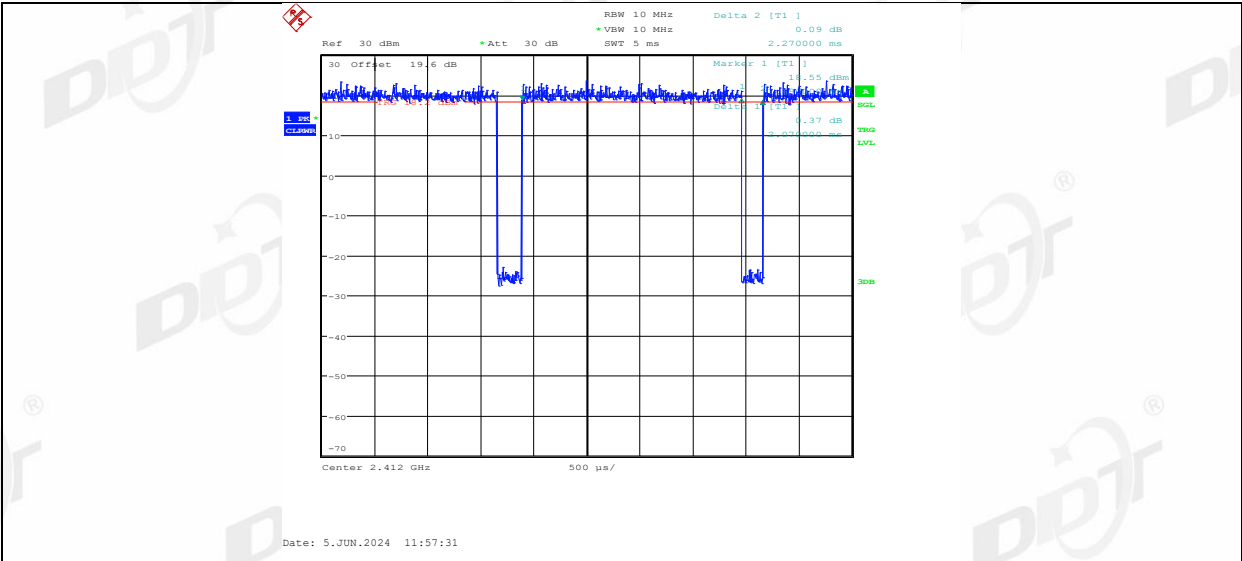


11G Ant2 2412

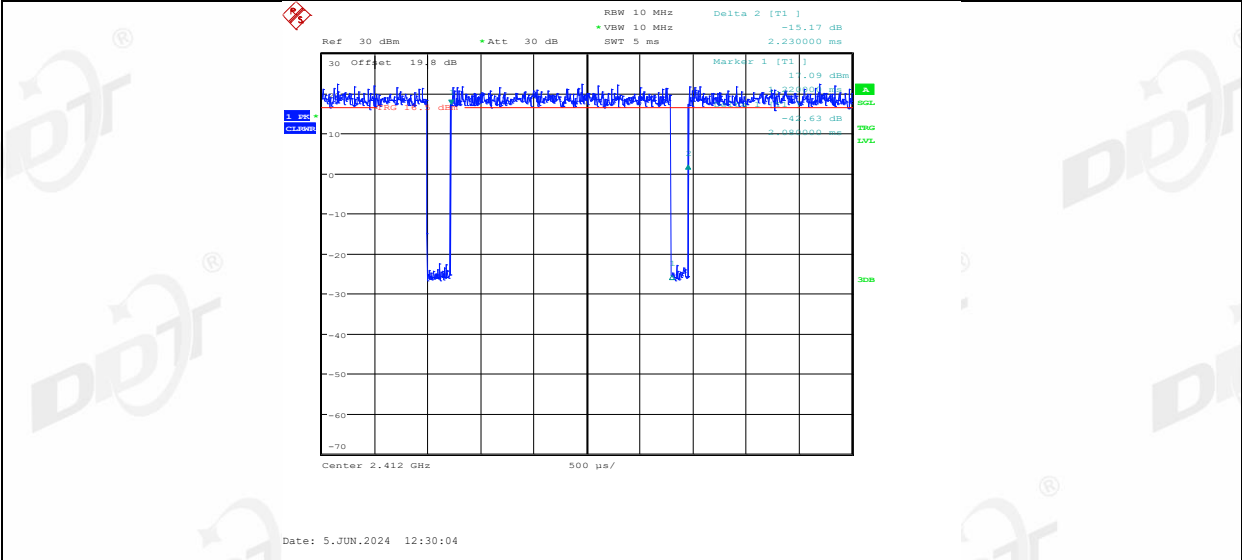


11G Ant1 2437

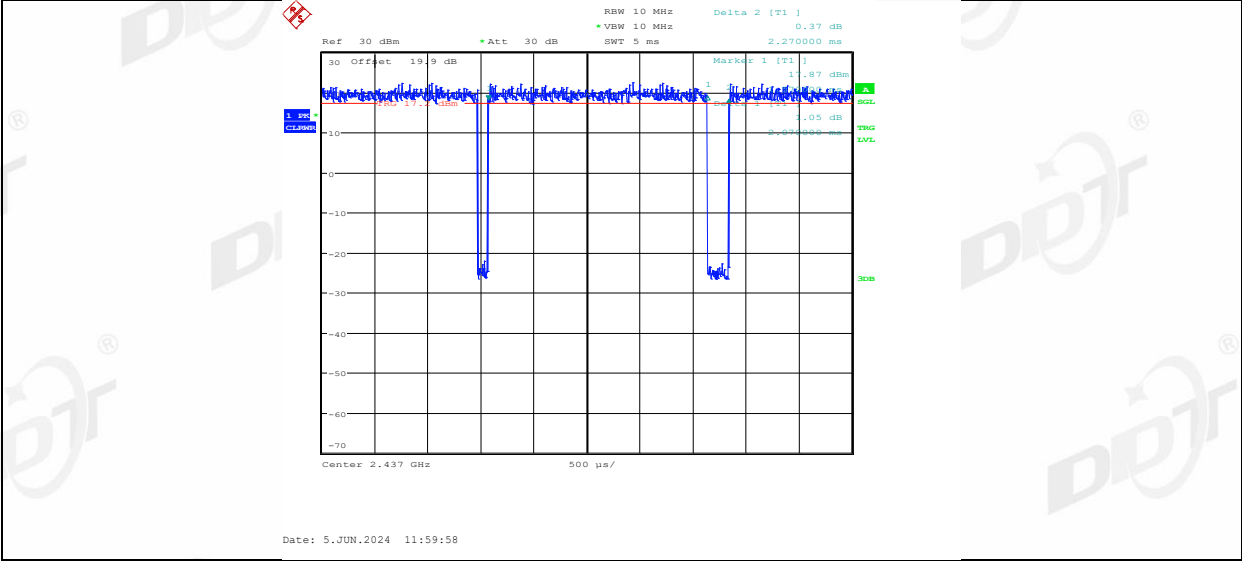


11G Ant2 2437

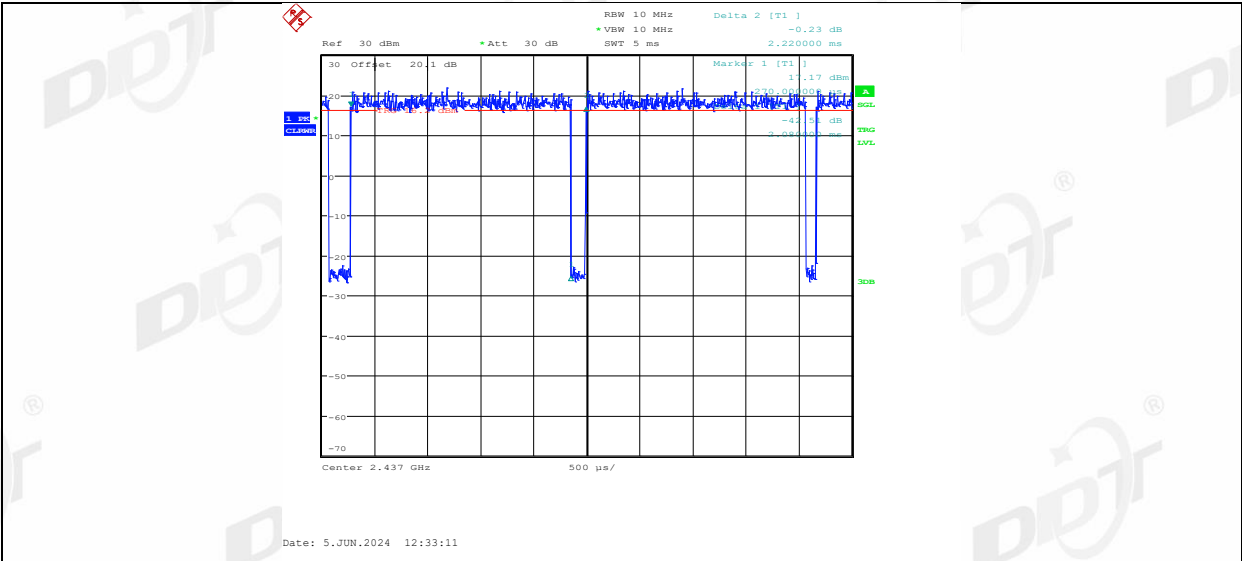


11G_Ant1_2462

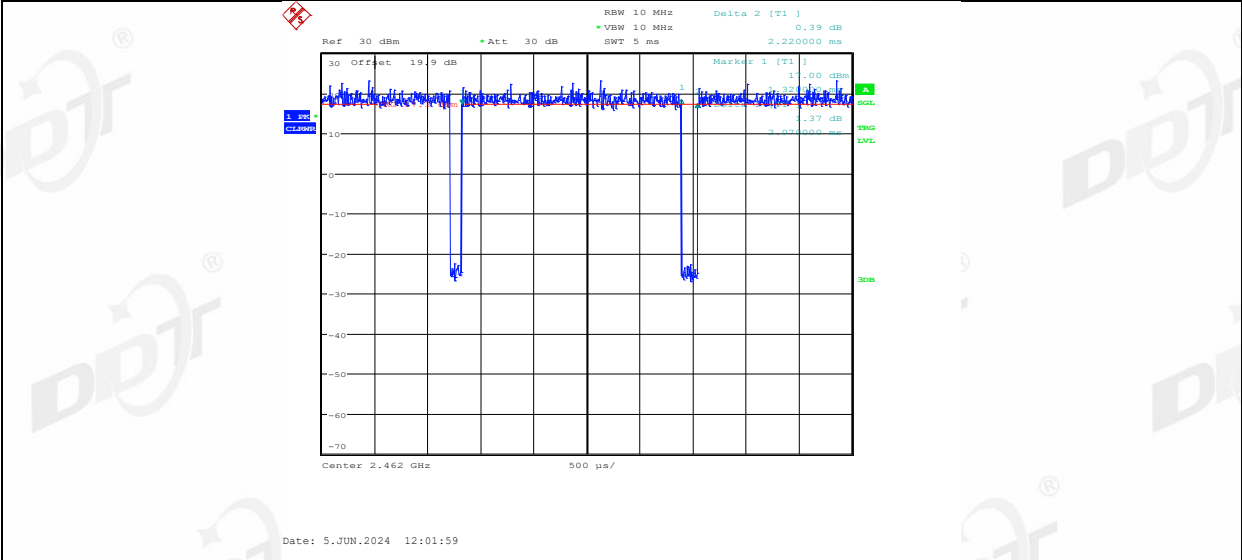


11G_Ant2_2462

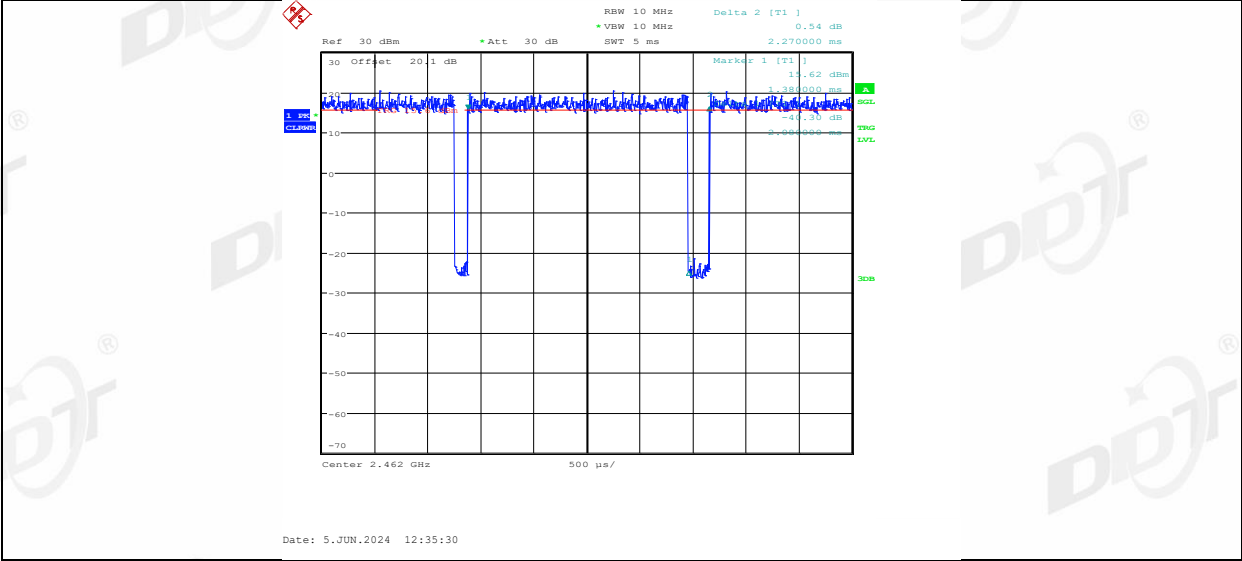


11N20MIMO_Ant1_2412

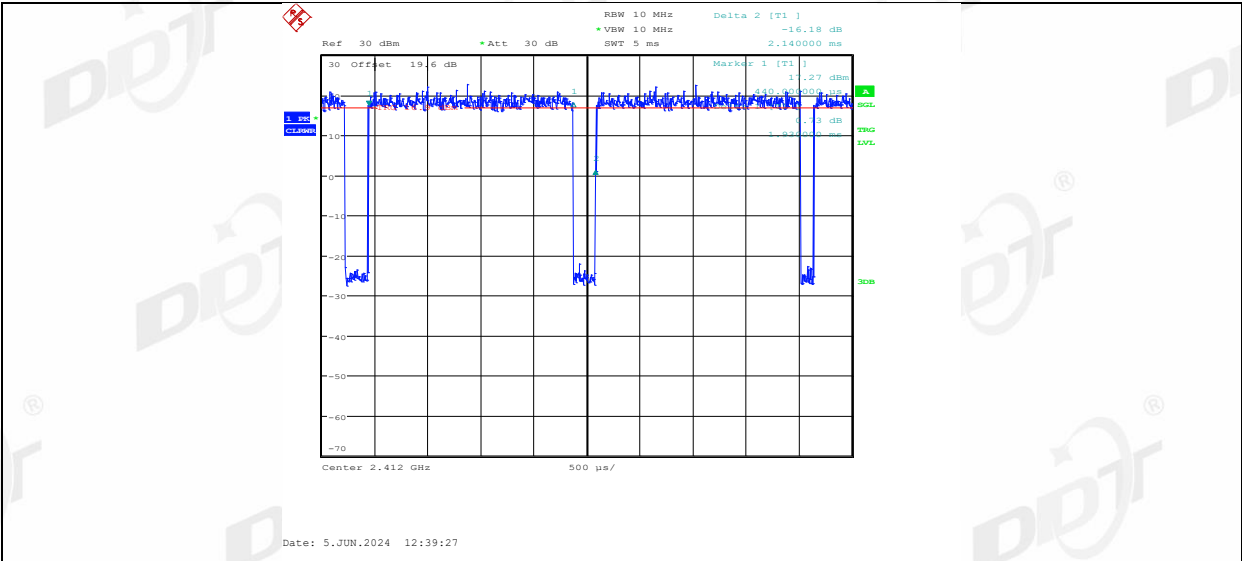


11N20MIMO_Ant2_2412

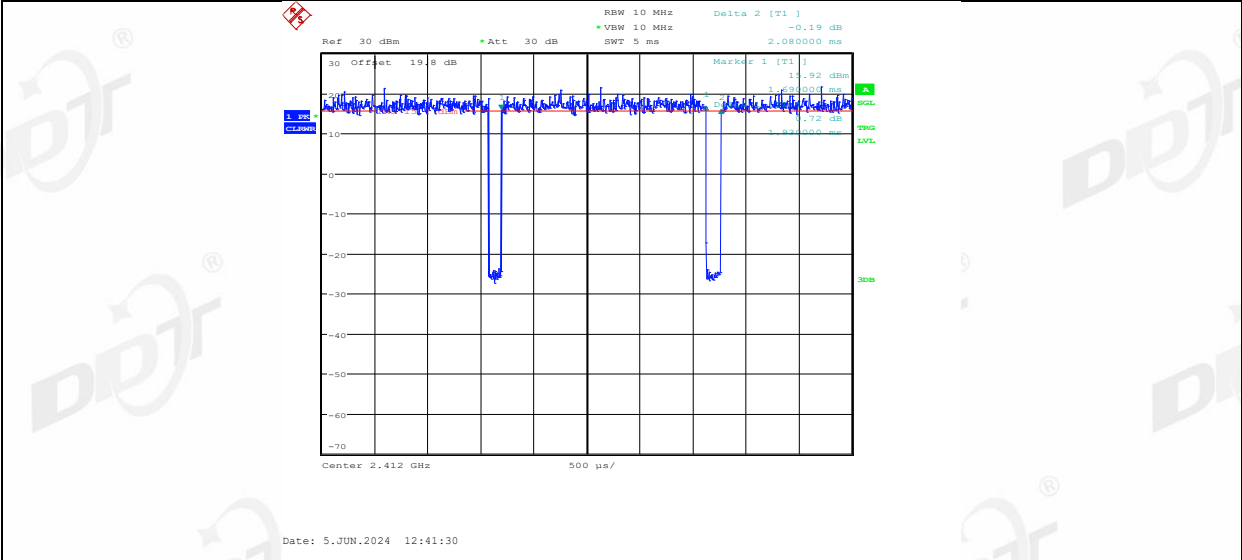


11N20MIMO_Ant1_2437

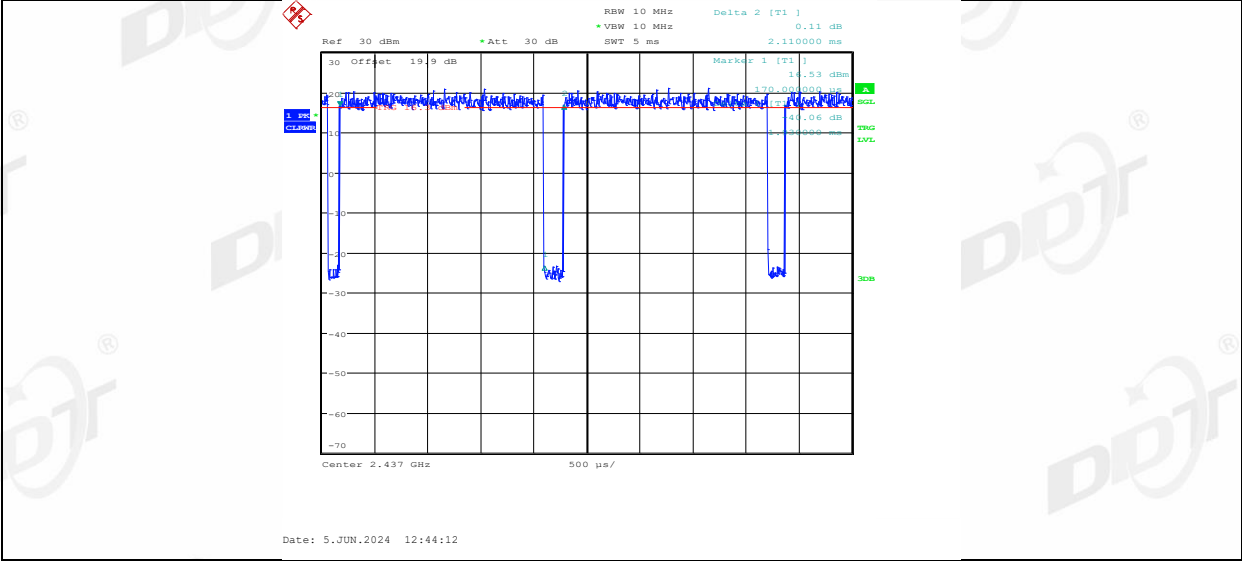


11N20MIMO_Ant2_2437

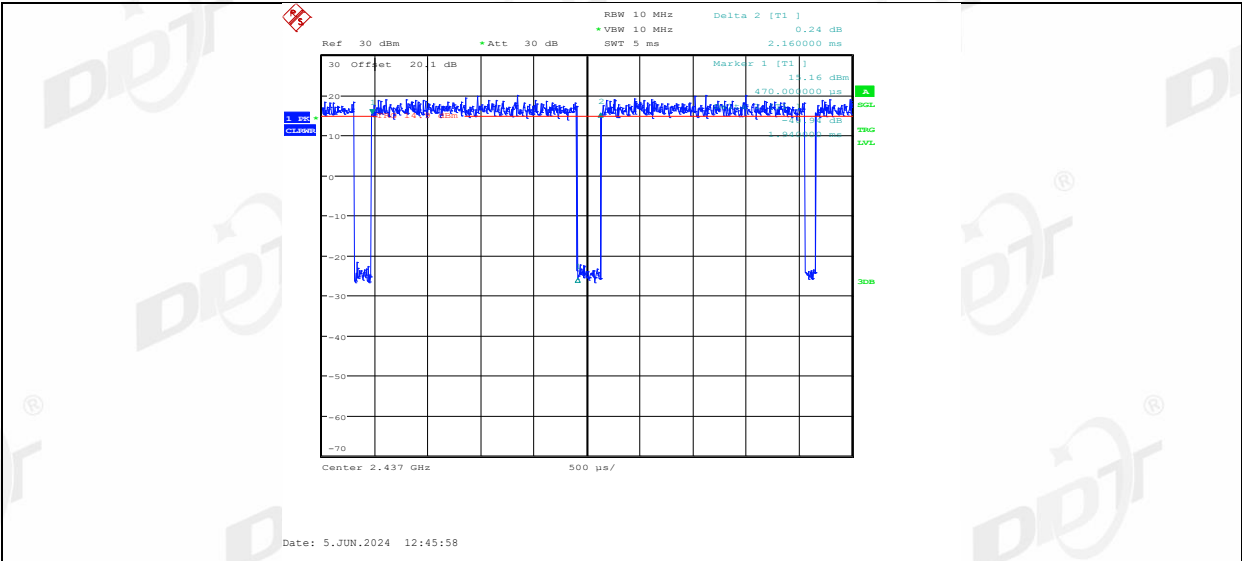


11N20MIMO_Ant1_2462

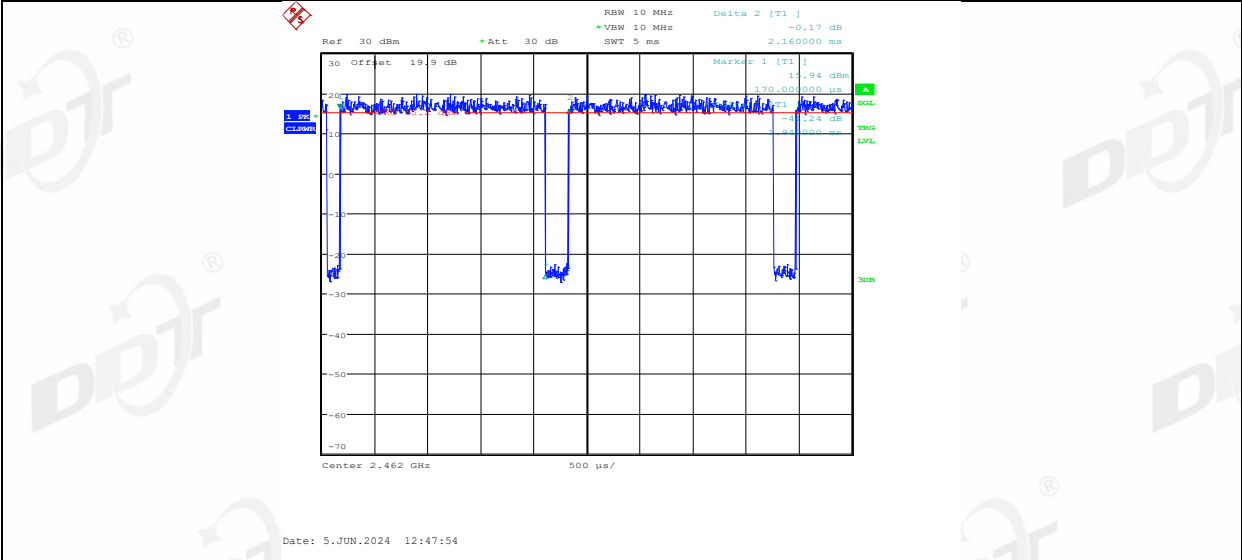


11N20MIMO_Ant2_2462

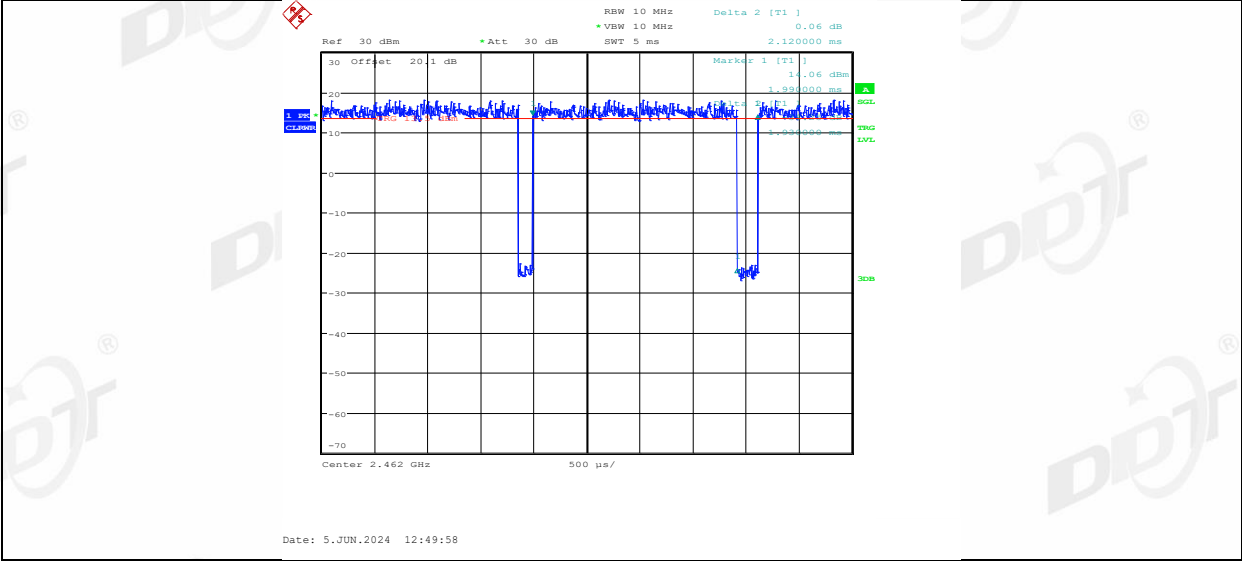


11N40MIMO_Ant1_2422

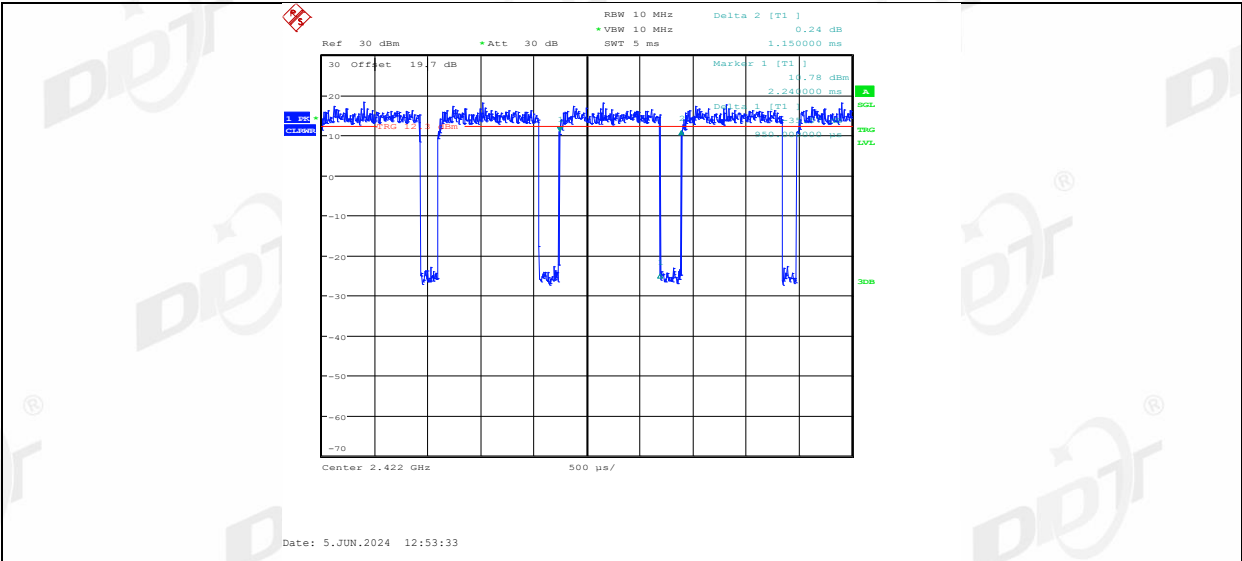


11N40MIMO_Ant2_2422

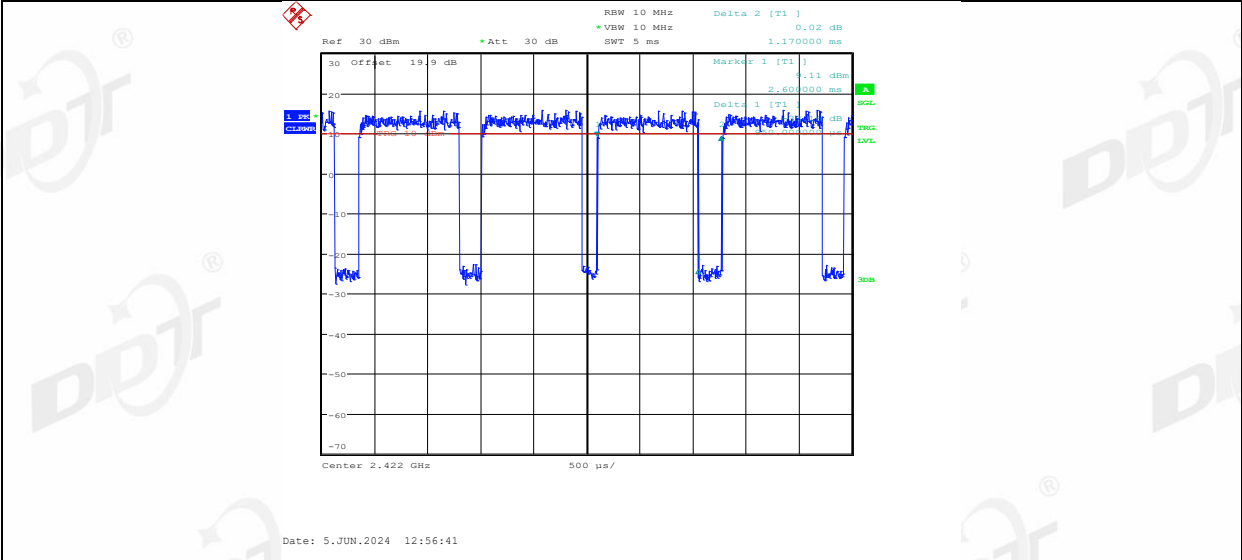


11N40MIMO_Ant1_2437

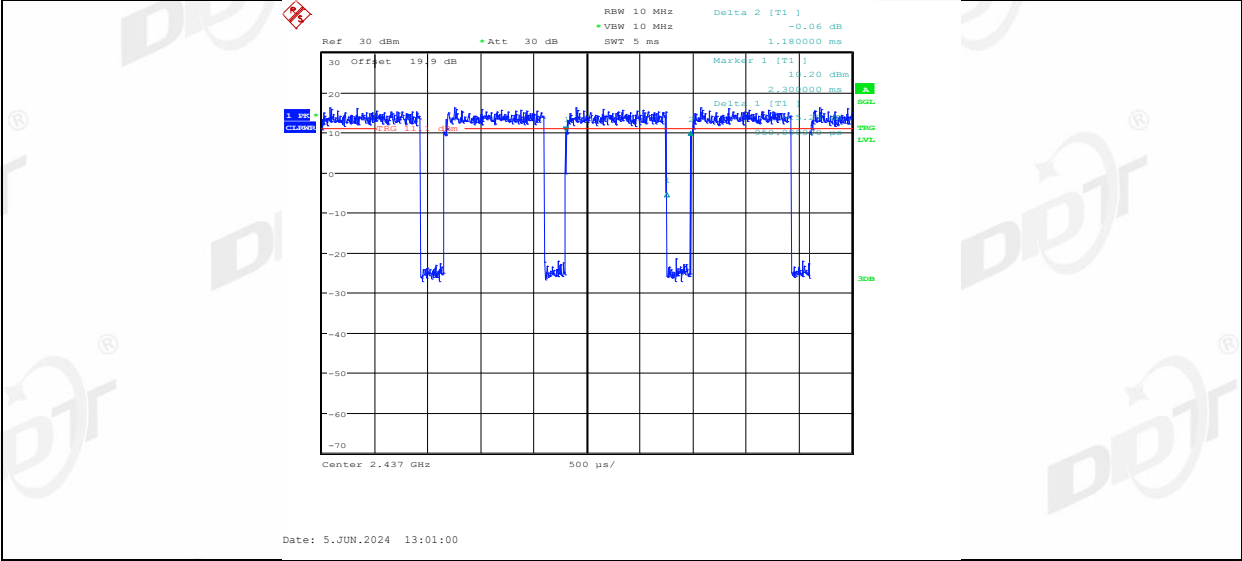


11N40MIMO_Ant2_2437

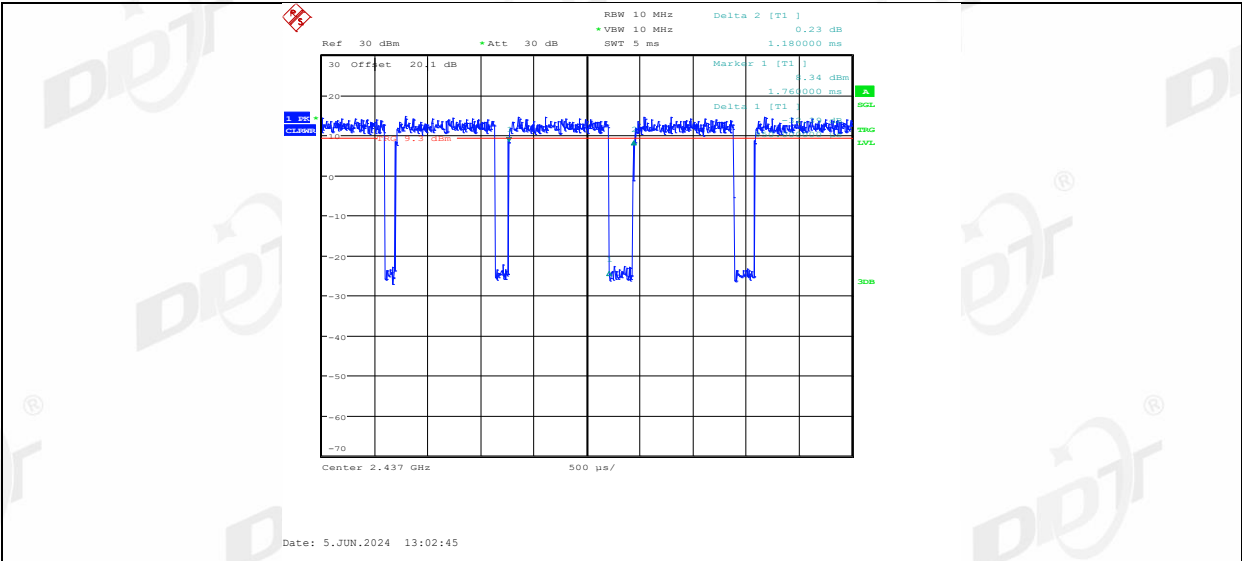

11N40MIMO_Ant1_2452

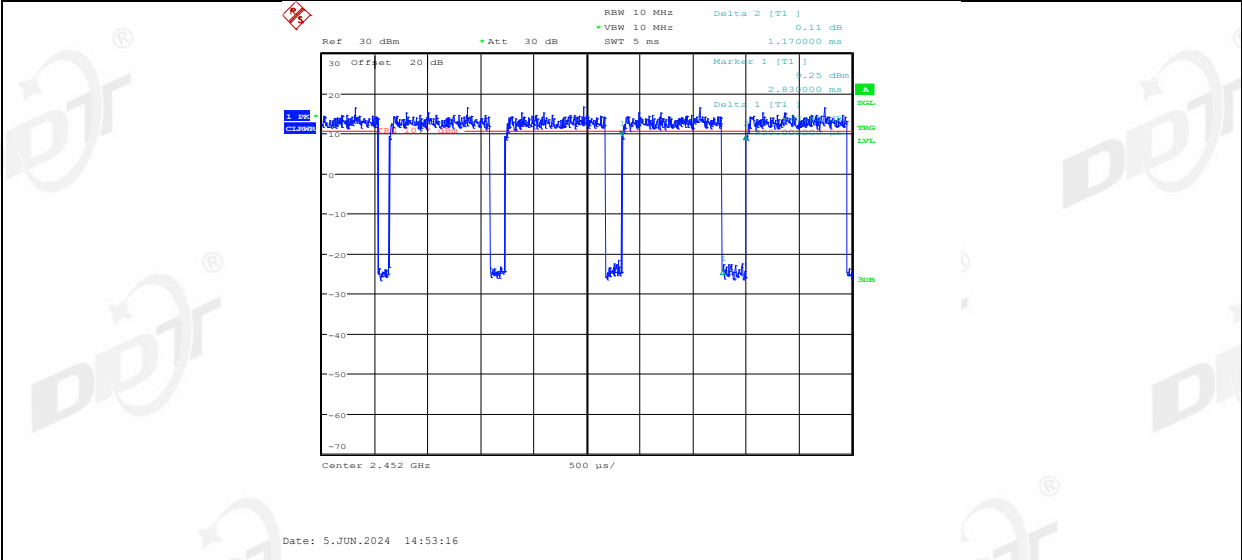

11N40MIMO_Ant2_2452

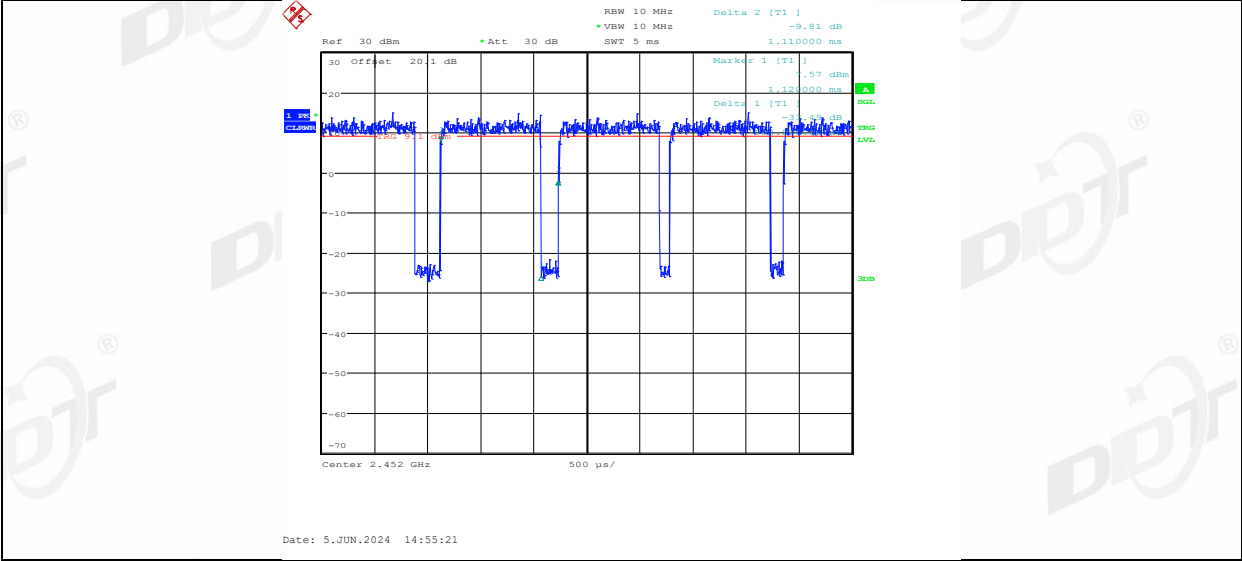

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12.Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2024/07/14
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2024/07/11
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/20
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31

12.2. Block diagram of test setup

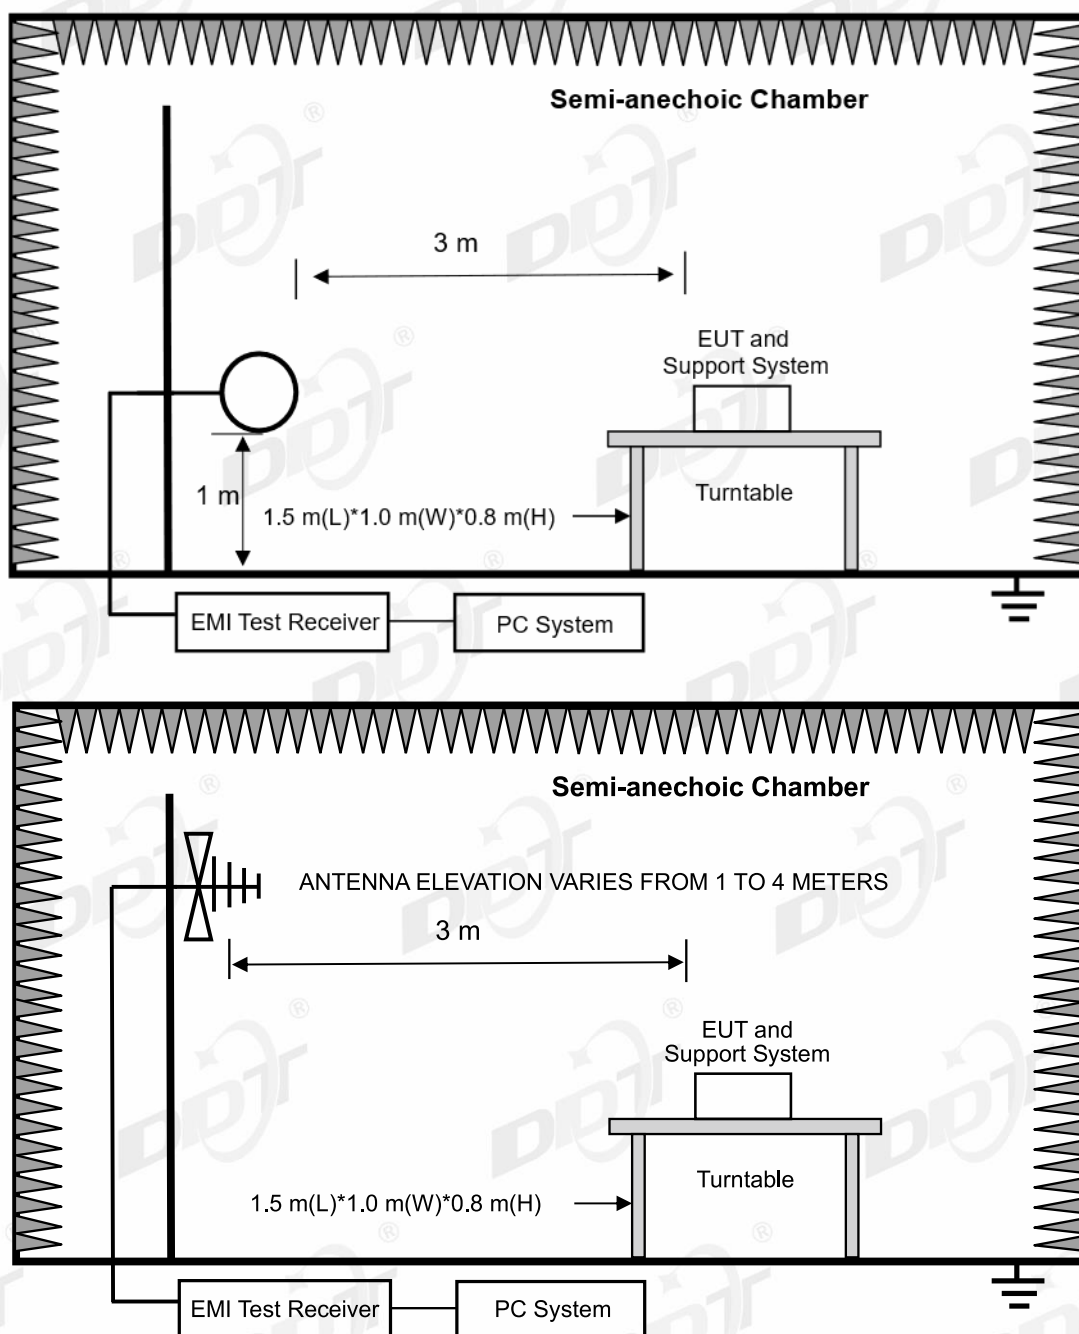

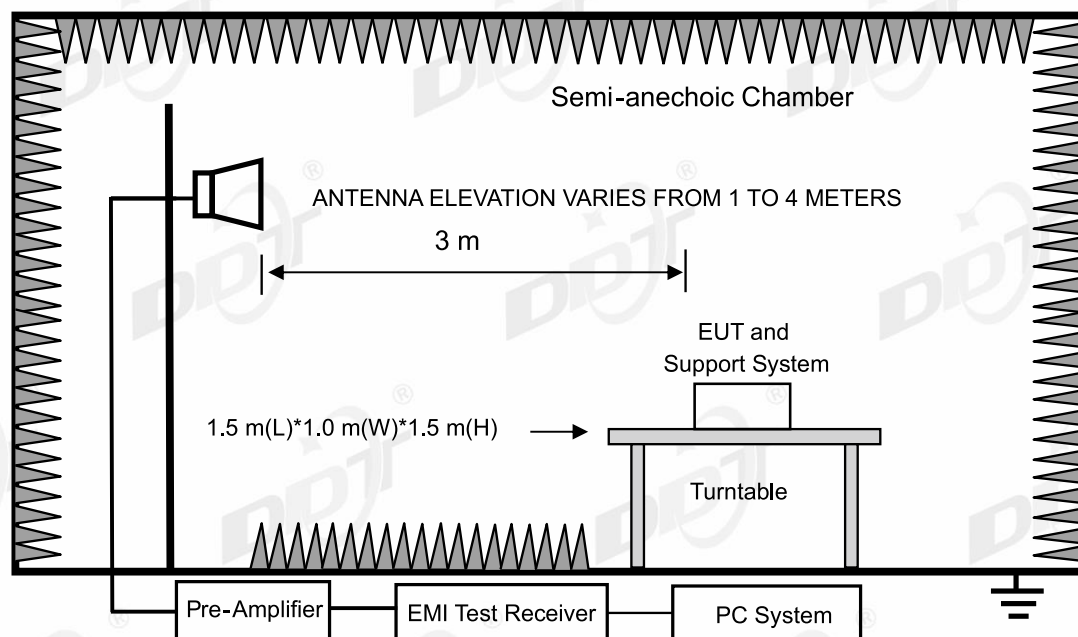

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	²
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		mV/m	dB(mV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(mV)/m (Peak) 54.0 dB(mV)/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is record and report)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with the worst mode.

(12) The worst simultaneous case and was recorded.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-04

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

2.4G WIFI TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24042530-2E\FCC BELOW 1G\20240604-001520_H

Memo:

Sample Number:S24042530-002 Power Setting:NA

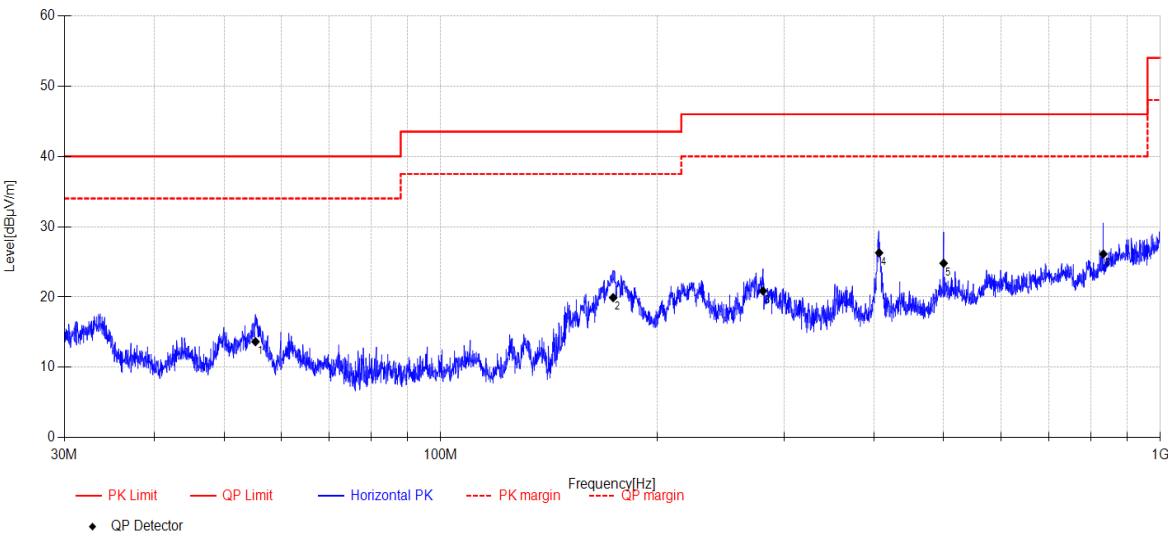

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	55.291	27.82	12.58	3.92	-30.66	13.66	40.00	26.34	QP	Horizontal
2	173.631	36.63	9.35	4.62	-30.68	19.92	43.50	23.58	QP	Horizontal
3	280.488	33.72	12.38	5.13	-30.36	20.87	46.00	25.13	QP	Horizontal
4	406.731	35.76	14.97	5.65	-30.09	26.29	46.00	19.71	QP	Horizontal
5	499.844	31.62	17.08	6.00	-29.90	24.80	46.00	21.20	QP	Horizontal
6	833.348	28.52	20.17	7.03	-29.60	26.12	46.00	19.88	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-04

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

2.4G WIFI TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24042530-2E\FCC BELOW 1G\20240604-001603_V

Memo:

Sample Number:S24042530-002 Power Setting:NA

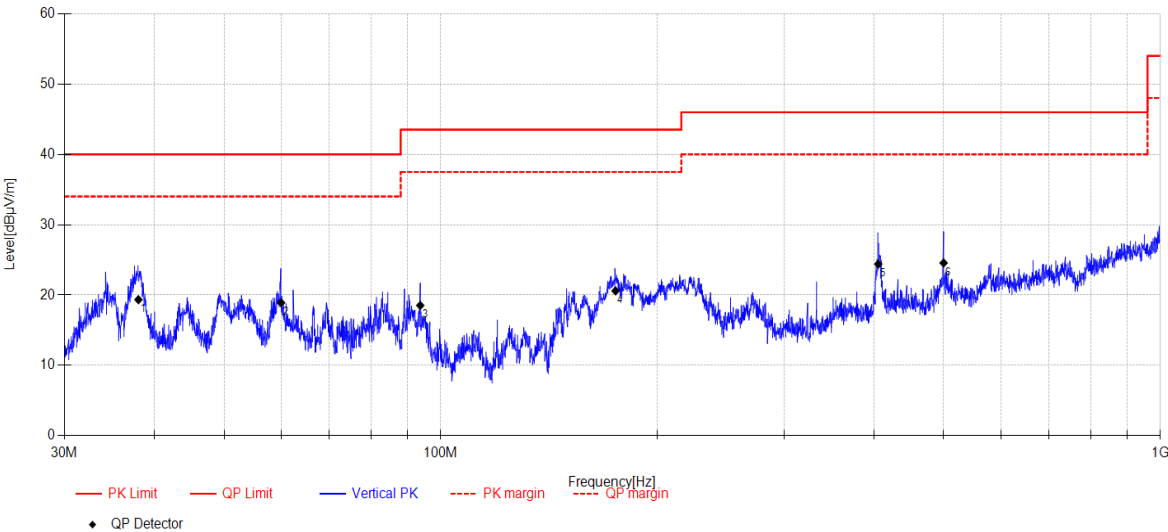

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	38.023	35.02	11.40	3.81	-30.88	19.35	40.00	20.65	QP	Vertical
2	60.019	32.8	12.79	3.96	-30.63	18.92	40.00	21.08	QP	Vertical
3	93.681	35.27	9.85	4.18	-30.77	18.53	43.50	24.97	QP	Vertical
4	174.975	37.45	9.20	4.62	-30.68	20.59	43.50	22.91	QP	Vertical
5	405.592	33.87	14.99	5.64	-30.09	24.41	46.00	21.59	QP	Vertical
6	499.844	31.39	17.08	6.00	-29.90	24.57	46.00	21.43	QP	Vertical

Note:

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-01

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2412MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\1

Memo:

Sample Number:S24042530-002 Power Setting:NA

Test Graph

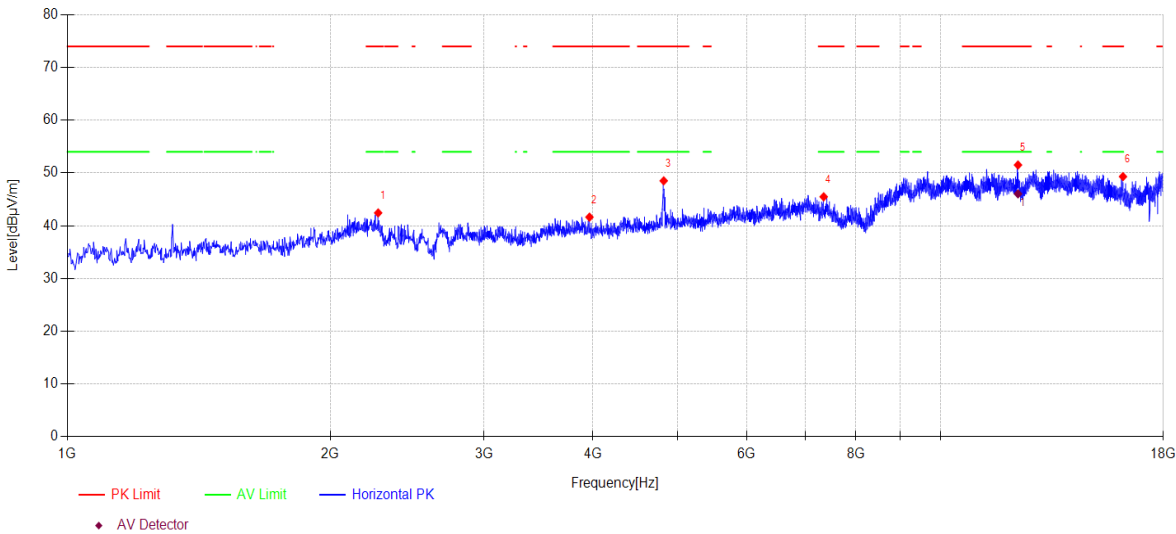

Data List										
NO .	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2269.900	48.34	27.10	4.76	-37.77	42.43	74.00	31.57	PK	Horizontal
2	3963.100	45.95	31.05	5.06	-40.43	41.63	74.00	32.37	PK	Horizontal
3	4819.900	50.10	33.02	5.54	-40.15	48.51	74.00	25.49	PK	Horizontal
4	7349.500	43.62	36.80	6.63	-41.57	45.48	74.00	28.52	PK	Horizontal
5	12269.300	42.98	39.30	8.90	-39.67	51.51	74.00	22.49	PK	Horizontal
6	16182.700	40.81	37.82	10.19	-39.51	49.31	74.00	24.69	PK	Horizontal

Data List										
NO .	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	12269.300	37.51	39.30	8.90	-39.67	46.04	54.0	7.96	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-01

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2412MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\2

Memo:

Sample Number:S24042530-002 Power Setting:NA

Test Graph

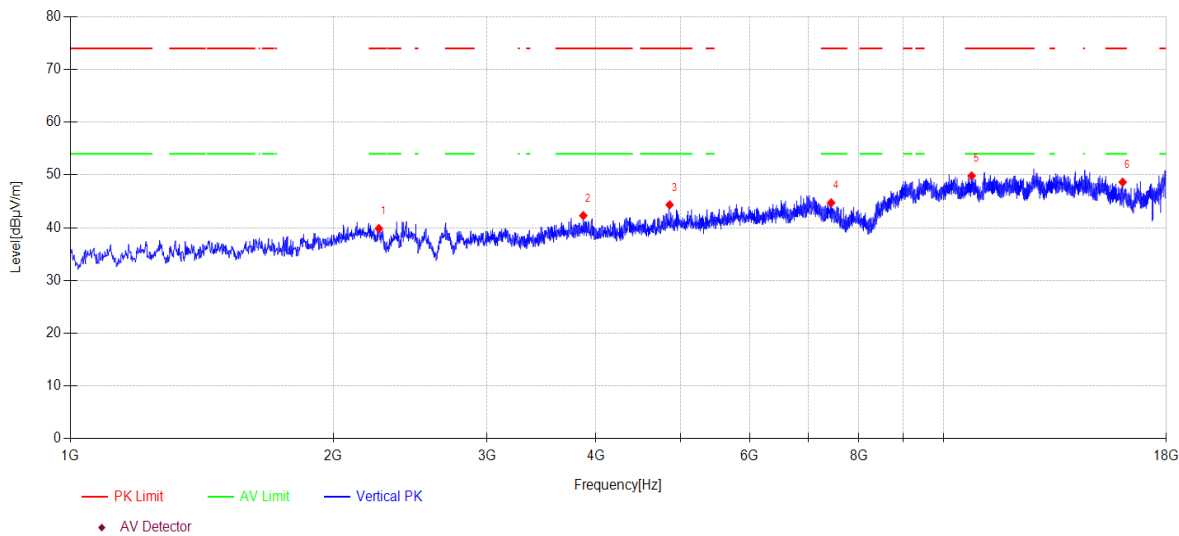

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2256.300	45.60	27.24	4.75	-37.74	39.85	74.00	34.15	PK	Vertical
2	3867.900	46.58	31.01	5.07	-40.37	42.29	74.00	31.71	PK	Vertical
3	4857.300	45.23	33.68	5.56	-40.13	44.34	74.00	29.66	PK	Vertical
4	7436.200	43.22	36.63	6.67	-41.79	44.73	74.00	29.27	PK	Vertical
5	10771.600	41.42	39.40	8.02	-39.01	49.83	74.00	24.17	PK	Vertical
6	16043.300	39.91	37.96	10.16	-39.40	48.63	74.00	25.37	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-01

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2437MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\3

Memo:

Sample Number:S24042530-002 Power Setting:NA

Test Graph

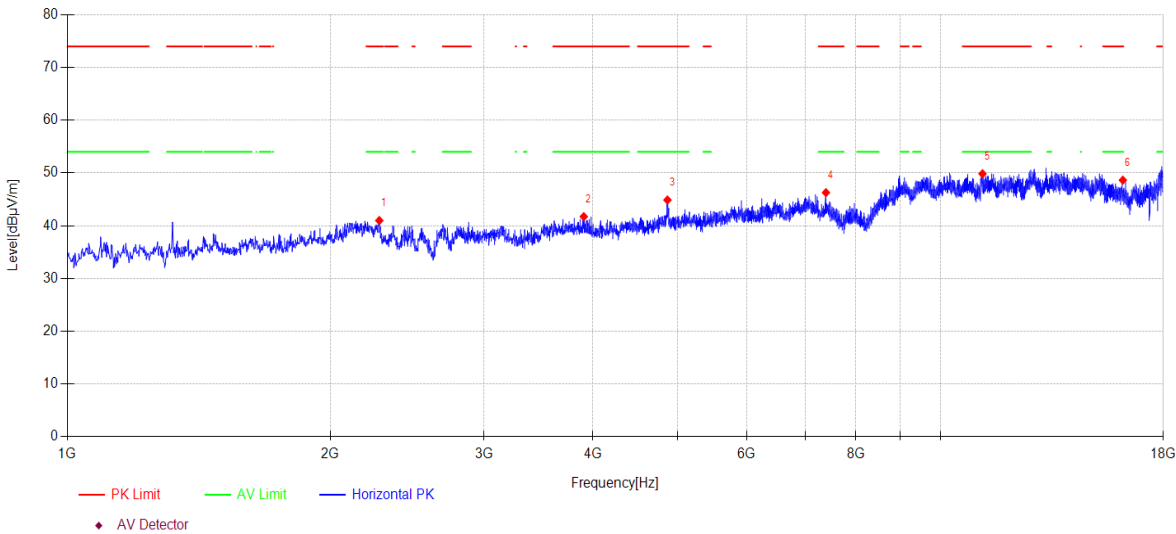

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2276.700	46.99	27.03	4.76	-37.79	40.99	74.00	33.01	PK	Horizontal
2	3903.600	45.85	31.19	5.07	-40.39	41.72	74.00	32.28	PK	Horizontal
3	4867.500	45.91	33.52	5.57	-40.13	44.87	74.00	29.13	PK	Horizontal
4	7393.700	44.60	36.71	6.65	-41.68	46.28	74.00	27.72	PK	Horizontal
5	11172.800	41.55	39.23	8.24	-39.17	49.85	74.00	24.15	PK	Horizontal
6	16177.600	40.13	37.82	10.19	-39.50	48.64	74.00	25.36	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-01

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2437MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\4

Memo:

Sample Number:S24042530-002 Power Setting:NA

Test Graph

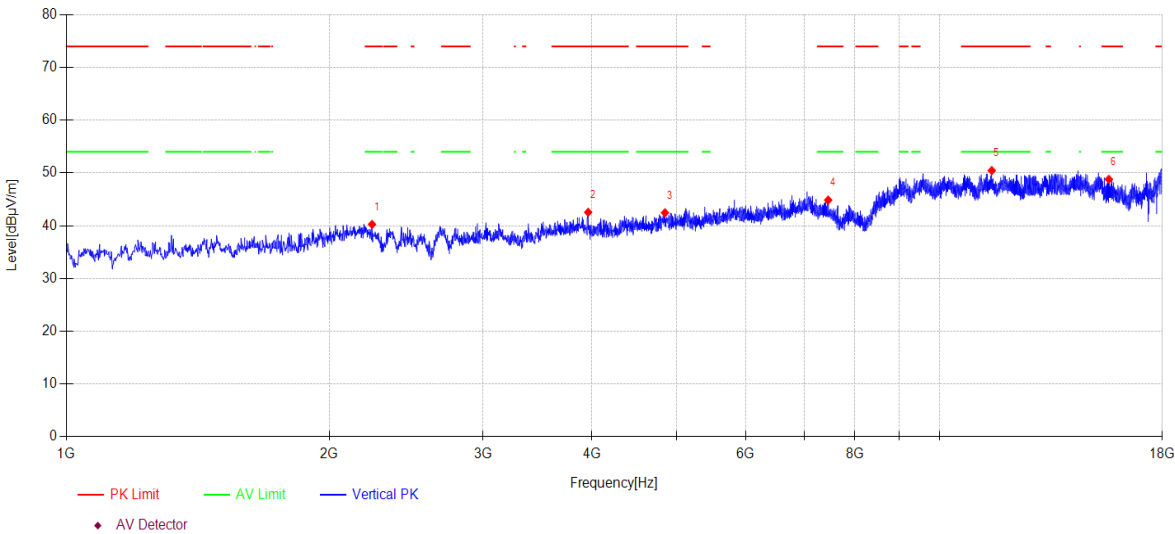

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2239.300	45.79	27.41	4.74	-37.69	40.25	74.00	33.75	PK	Vertical
2	3959.700	46.86	31.06	5.06	-40.43	42.55	74.00	31.45	PK	Vertical
3	4848.800	43.27	33.77	5.56	-40.14	42.46	74.00	31.54	PK	Vertical
4	7456.600	43.43	36.59	6.68	-41.84	44.86	74.00	29.14	PK	Vertical
5	11478.800	42.13	39.22	8.43	-39.32	50.46	74.00	23.54	PK	Vertical
6	15631.900	39.46	38.57	9.90	-39.14	48.79	74.00	25.21	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-01

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2462MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\5

Memo:

Sample Number:S24042530-002 Power Setting:NA

Test Graph

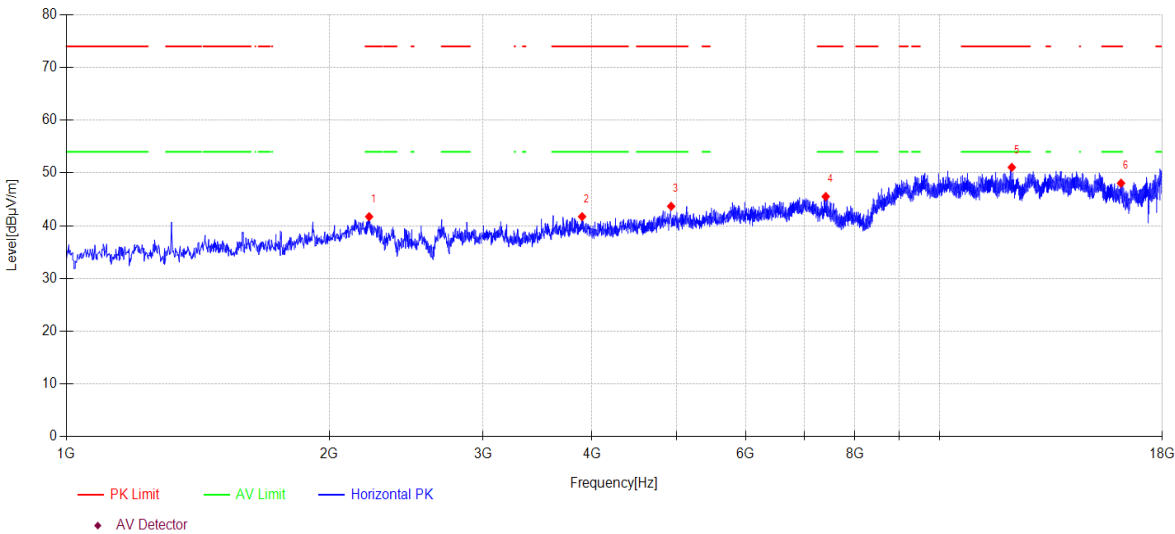

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2222.300	47.04	27.58	4.73	-37.64	41.71	74.00	32.29	PK	Horizontal
2	3896.800	45.87	31.18	5.07	-40.39	41.73	74.00	32.27	PK	Horizontal
3	4928.700	45.12	33.06	5.61	-40.11	43.68	74.00	30.32	PK	Horizontal
4	7409.000	43.91	36.68	6.66	-41.72	45.53	74.00	28.47	PK	Horizontal
5	12102.700	42.55	39.30	8.81	-39.60	51.06	74.00	22.94	PK	Horizontal
6	16141.900	39.49	37.86	10.18	-39.47	48.06	74.00	25.94	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-01

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2462MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\6

Memo:

Sample Number:S24042530-002 Power Setting:NA

Test Graph

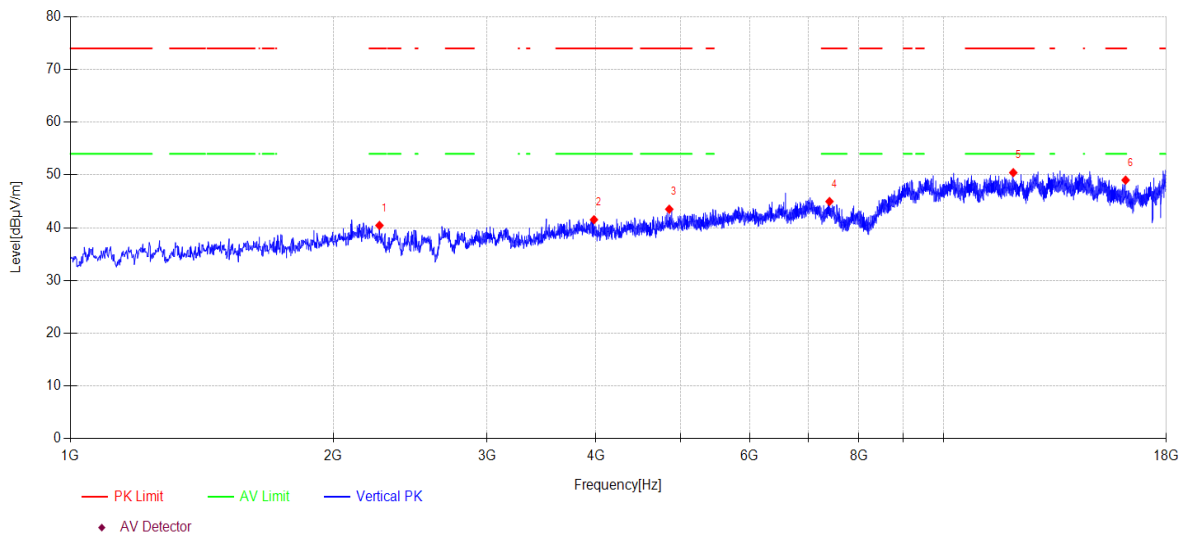

Data List										
NO .	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2259.700	46.22	27.20	4.75	-37.74	40.43	74.00	33.57	PK	Vertical
2	3978.400	45.92	30.99	5.05	-40.44	41.52	74.00	32.48	PK	Vertical
3	4852.200	44.32	33.76	5.56	-40.13	43.51	74.00	30.49	PK	Vertical
4	7403.900	43.34	36.69	6.65	-41.71	44.97	74.00	29.03	PK	Vertical
5	12021.100	42.01	39.22	8.77	-39.57	50.43	74.00	23.57	PK	Vertical
6	16165.700	40.50	37.83	10.18	-39.49	49.02	74.00	24.98	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13.Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2024/07/11
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2024/07/14
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/20
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31

13.2. Block diagram of test setup

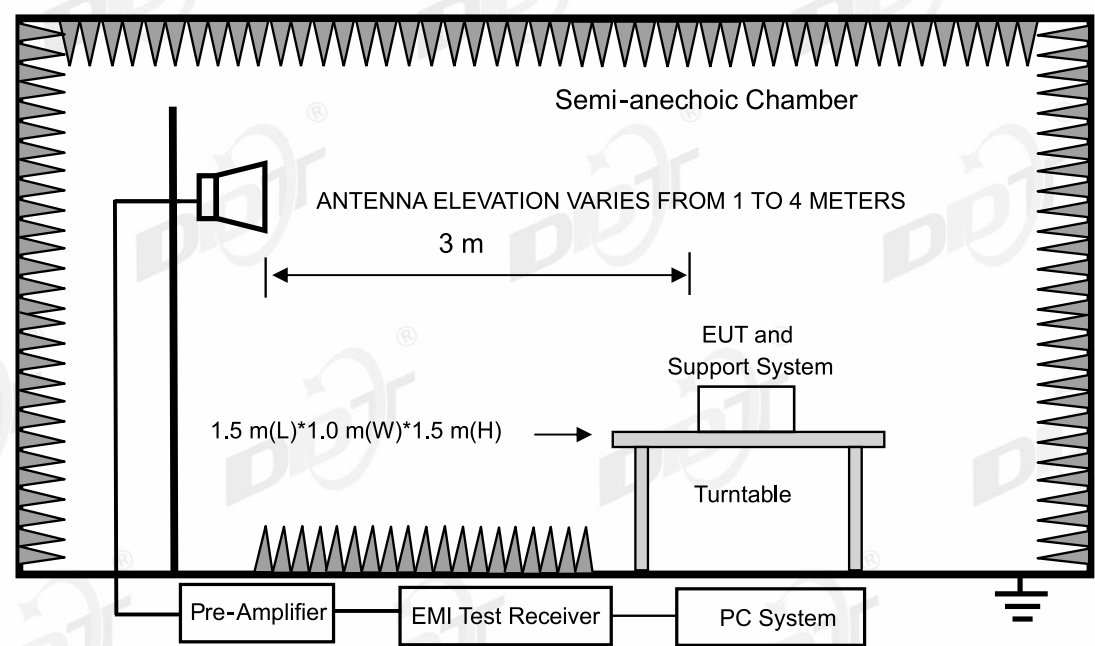

13.3. Limits

All restriction band should comply with 15.209 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\7

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

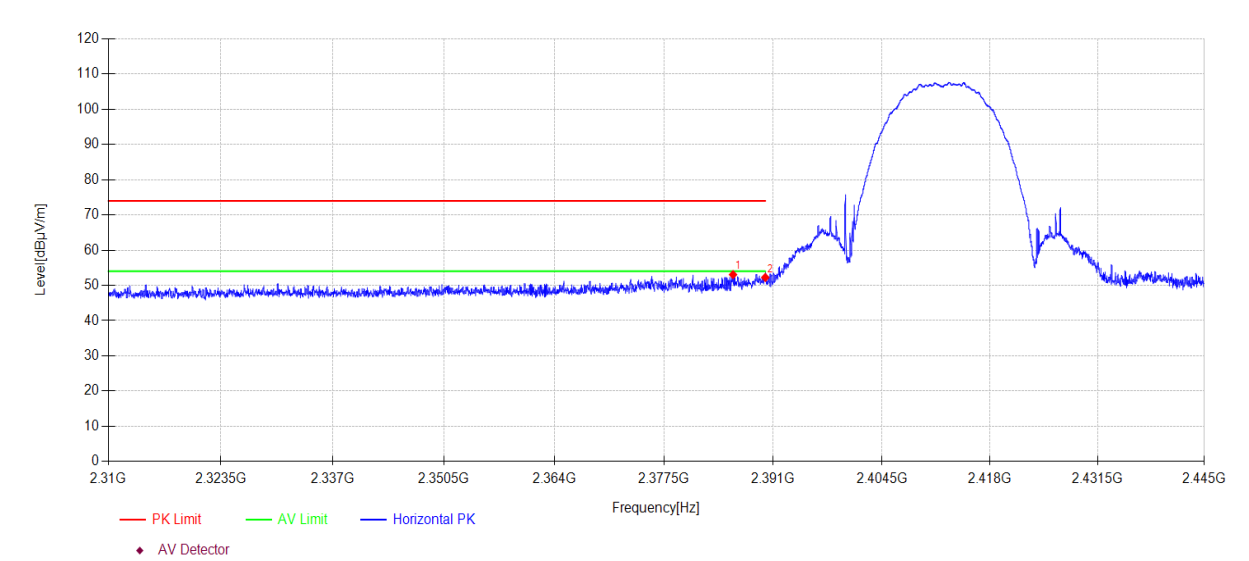

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.005	22.25	27.24	3.57	0.00	53.06	74.00	20.94	PK	Horizontal
2	2390.000	21.43	27.26	3.57	0.00	52.26	74.00	21.74	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\8

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

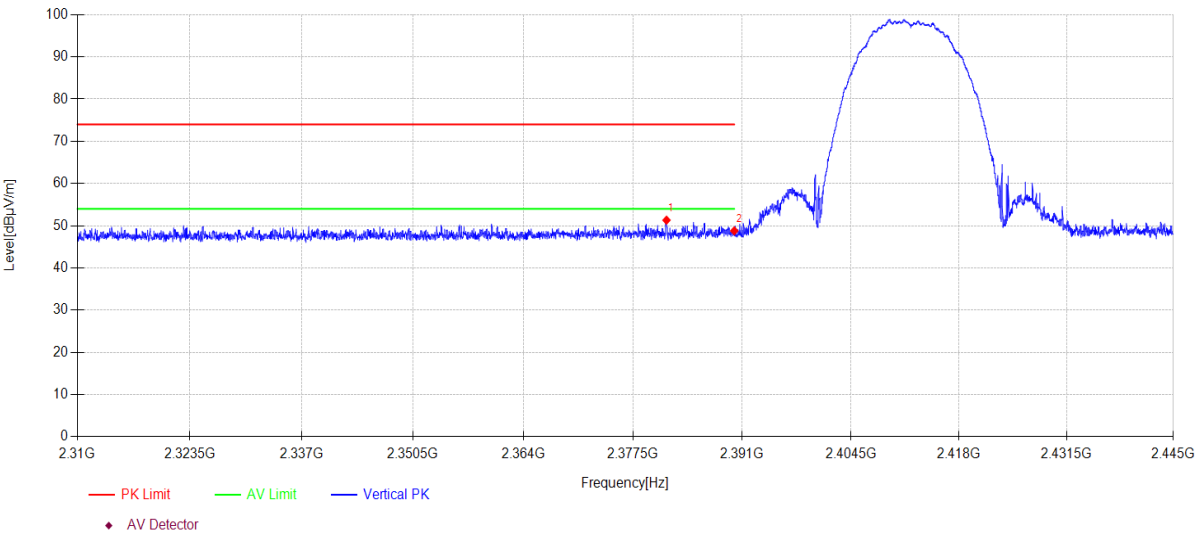

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.618	20.53	27.23	3.56	0.00	51.32	74.00	22.68	PK	Vertical
2	2390.000	17.96	27.26	3.57	0.00	48.79	74.00	25.21	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\13

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

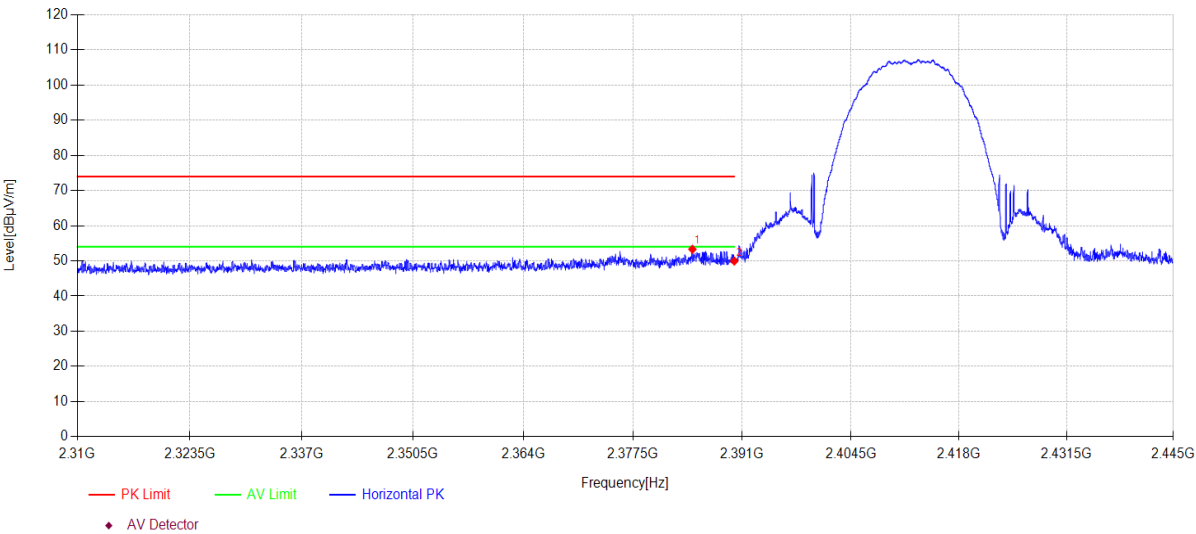

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.817	22.51	27.24	3.57	0.00	53.32	74.00	20.68	PK	Horizontal
2	2390.000	19.13	27.26	3.57	0.00	49.96	74.00	24.04	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\14

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

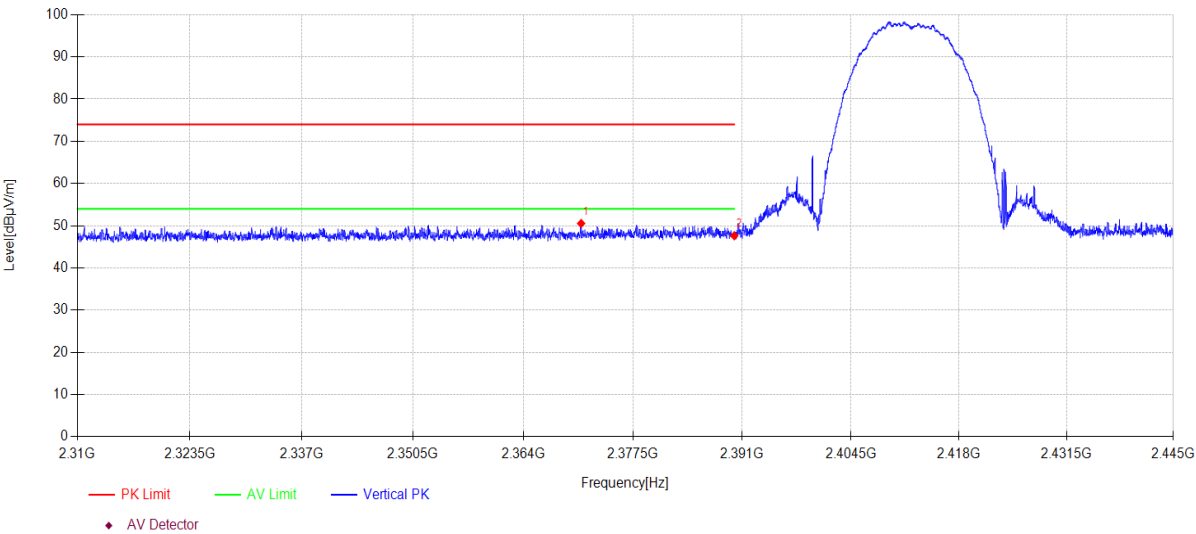

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2371.101	19.80	27.18	3.56	0.00	50.54	74.00	23.46	PK	Vertical
2	2390.000	16.80	27.26	3.57	0.00	47.63	74.00	26.37	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\9

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

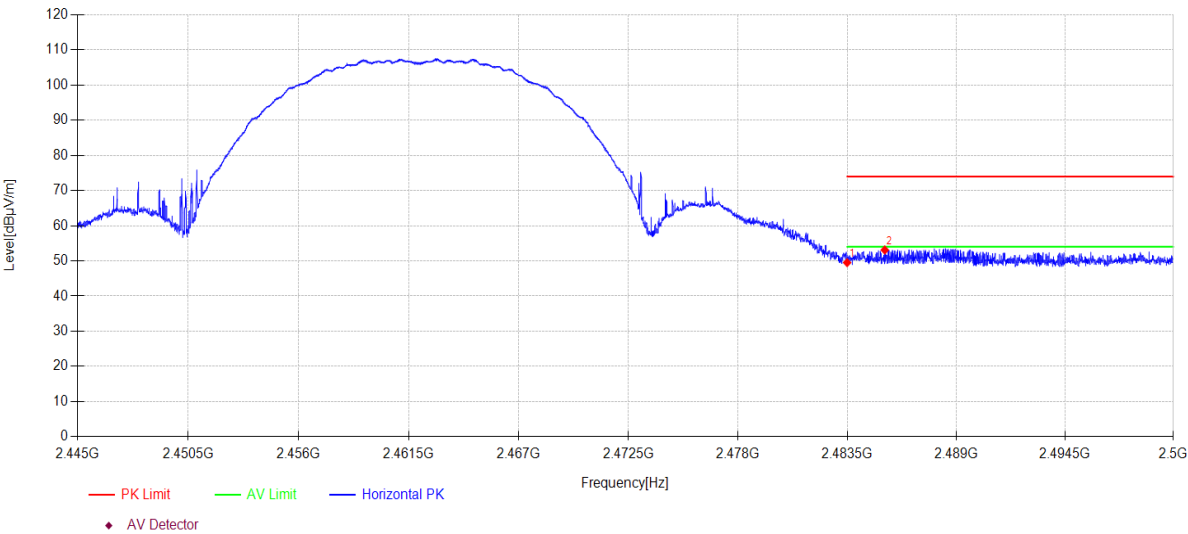

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.36	27.53	3.62	0.00	49.51	74.00	24.49	PK	Horizontal
2	2485.398	21.94	27.54	3.62	0.00	53.10	74.00	20.90	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\10

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

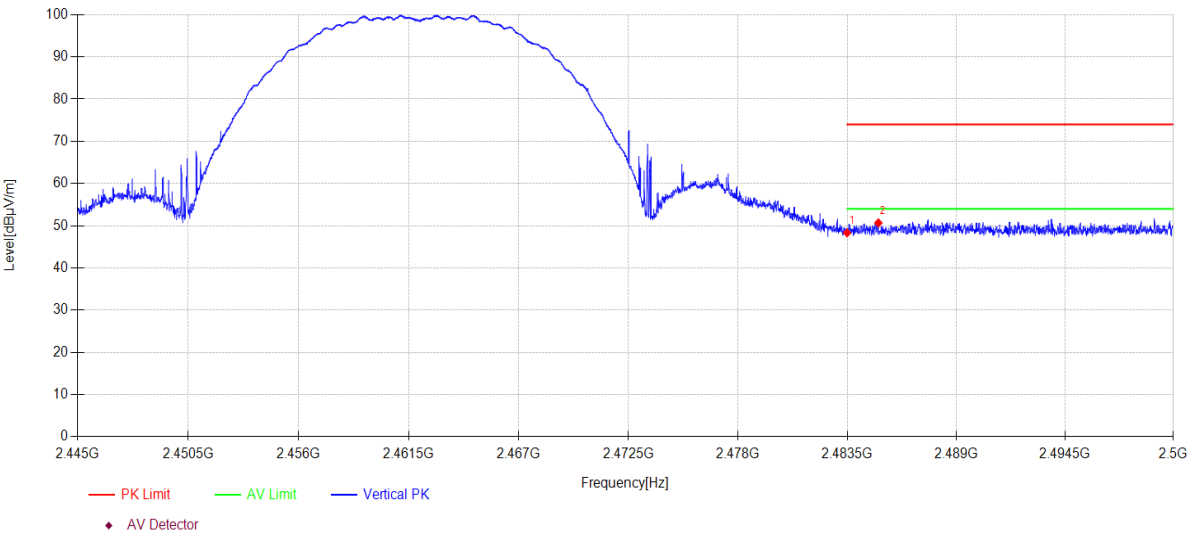

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.18	27.53	3.62	0.00	48.33	74.00	25.67	PK	Vertical
2	2485.079	19.51	27.54	3.62	0.00	50.67	74.00	23.33	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\11

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

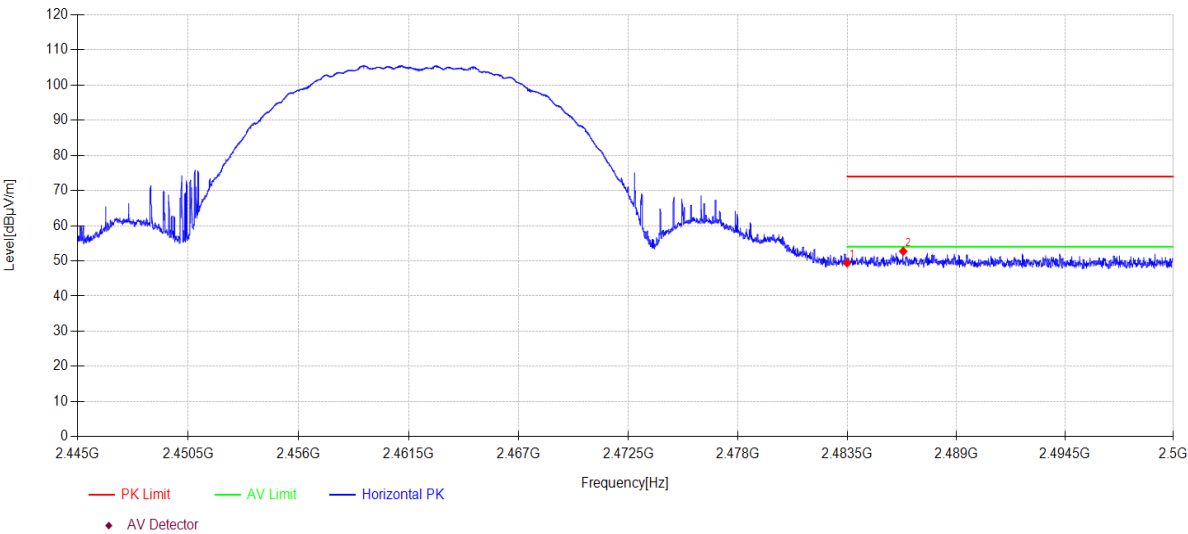

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.24	27.53	3.62	0.00	49.39	74.00	24.61	PK	Horizontal
2	2486.333	21.57	27.55	3.62	0.00	52.74	74.00	21.26	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11B TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\12

Memo:

Sample Number:S24042530-002 Power Setting:98

Test Graph

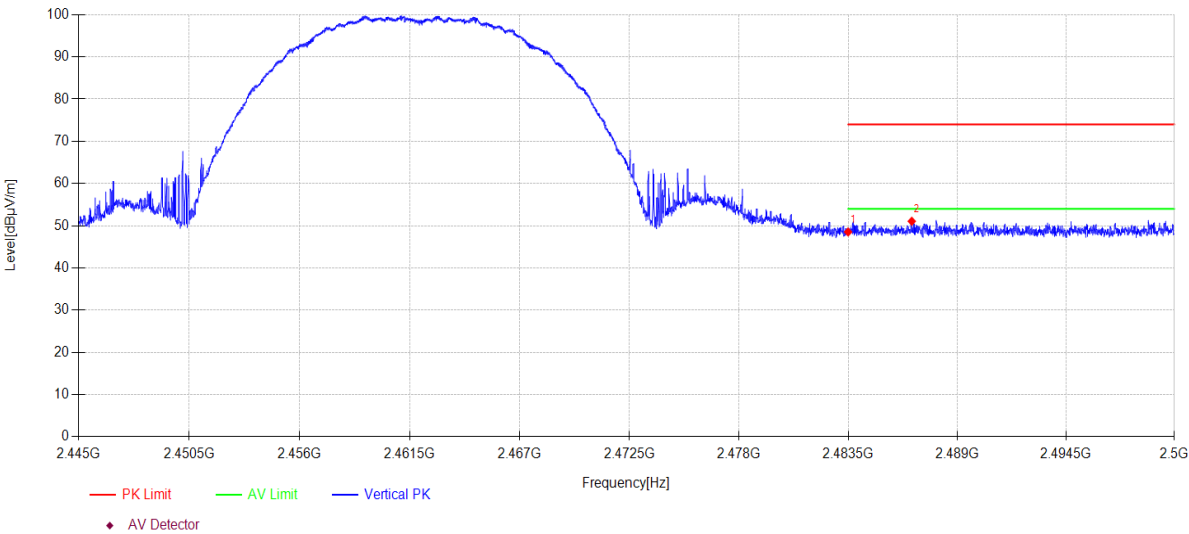

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.37	27.53	3.62	0.00	48.52	74.00	25.48	PK	Vertical
2	2486.712	19.89	27.55	3.62	0.00	51.06	74.00	22.94	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\17

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

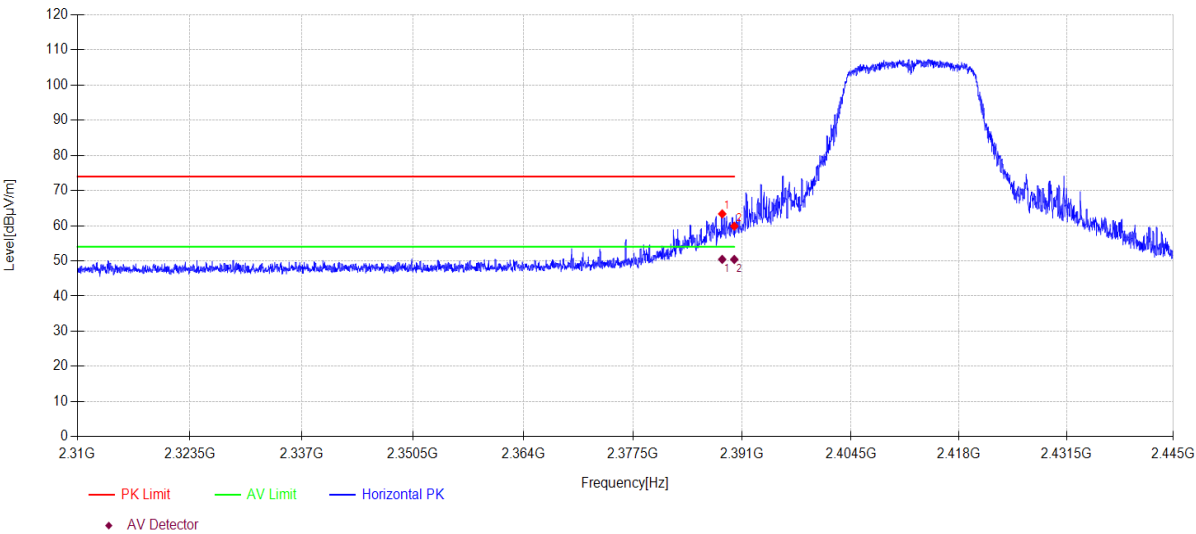

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.503	32.54	27.25	3.57	0.00	63.36	74.00	10.64	PK	Horizontal
2	2390.000	29.04	27.26	3.57	0.00	59.87	74.00	14.13	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.503	19.61	27.25	3.57	0.00	50.43	54.0	3.57	AV	Horizontal
2	2390.000	19.58	27.26	3.57	0.00	50.41	54.0	3.59	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\18

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

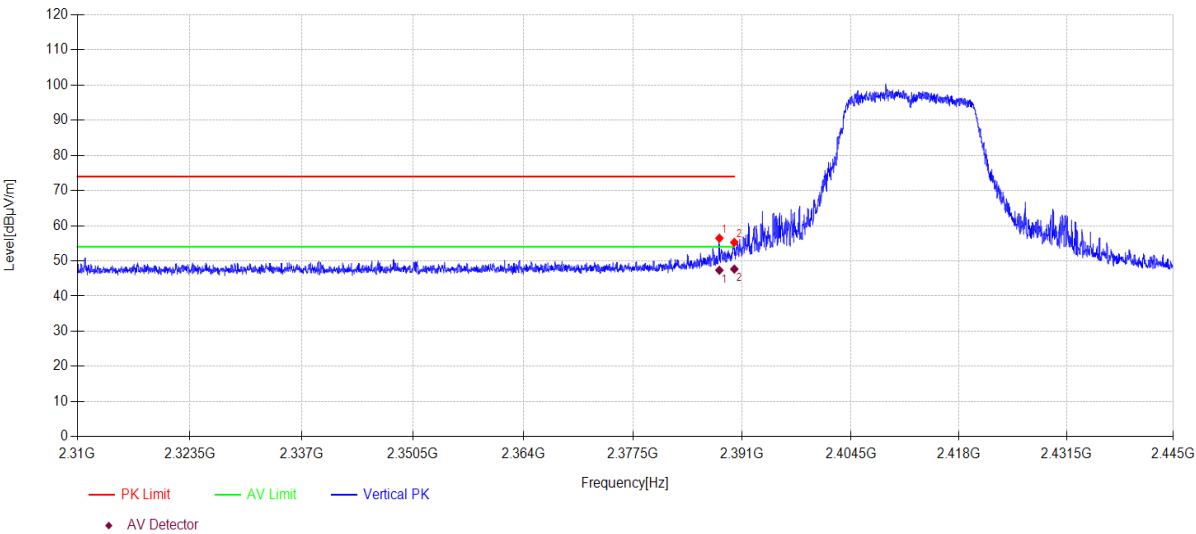

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.152	25.62	27.25	3.57	0.00	56.44	74.00	17.56	PK	Vertical
2	2390.000	24.45	27.26	3.57	0.00	55.28	74.00	18.72	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.152	16.52	27.25	3.57	0.00	47.34	54.0	6.66	AV	Vertical
2	2390.000	16.84	27.26	3.57	0.00	47.67	54.0	6.33	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\19

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

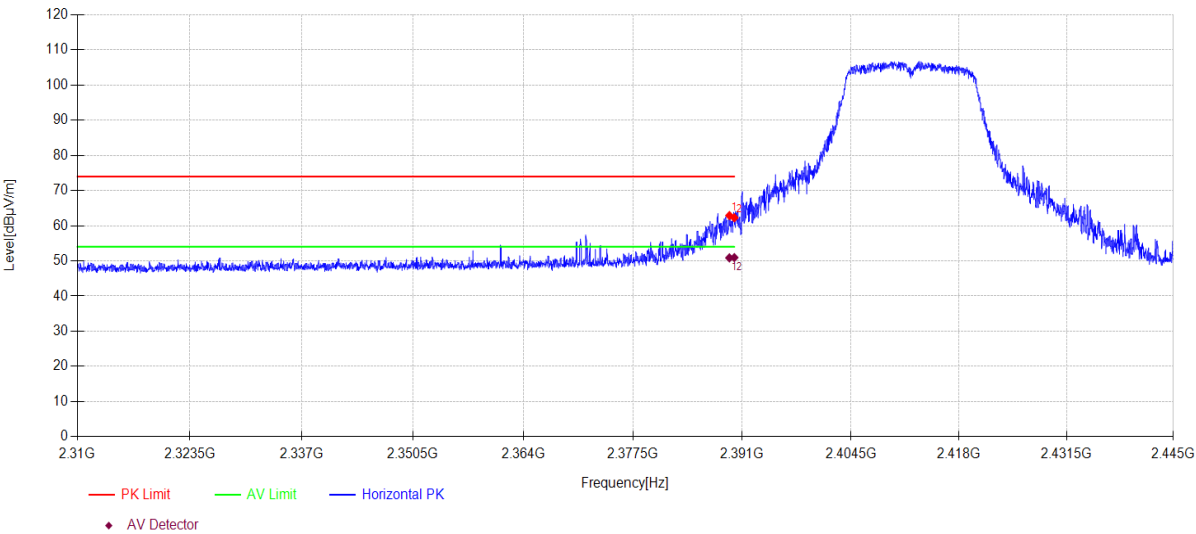

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.394	32.07	27.26	3.57	0.00	62.90	74.00	11.10	PK	Horizontal
2	2390.000	31.44	27.26	3.57	0.00	62.27	74.00	11.73	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.394	20.04	27.26	3.57	0.00	50.87	54.0	3.13	AV	Horizontal
2	2390.000	20.11	27.26	3.57	0.00	50.94	54.0	3.06	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\20

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

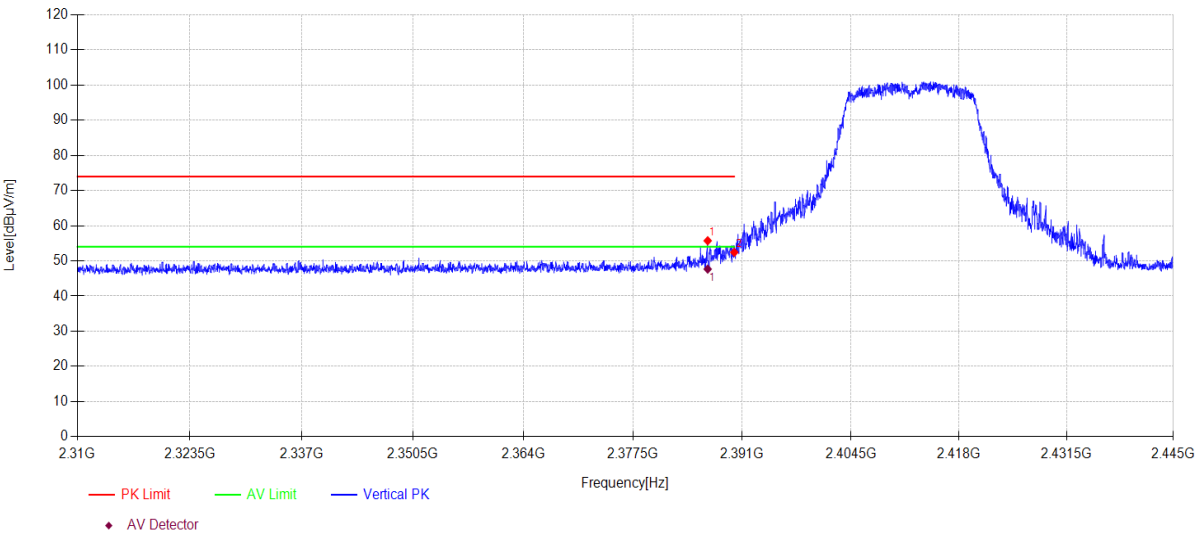

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.707	24.91	27.25	3.57	0.00	55.73	74.00	18.27	PK	Vertical
2	2390.000	21.61	27.26	3.57	0.00	52.44	74.00	21.56	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.707	16.85	27.25	3.57	0.00	47.67	54.0	6.33	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\23

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

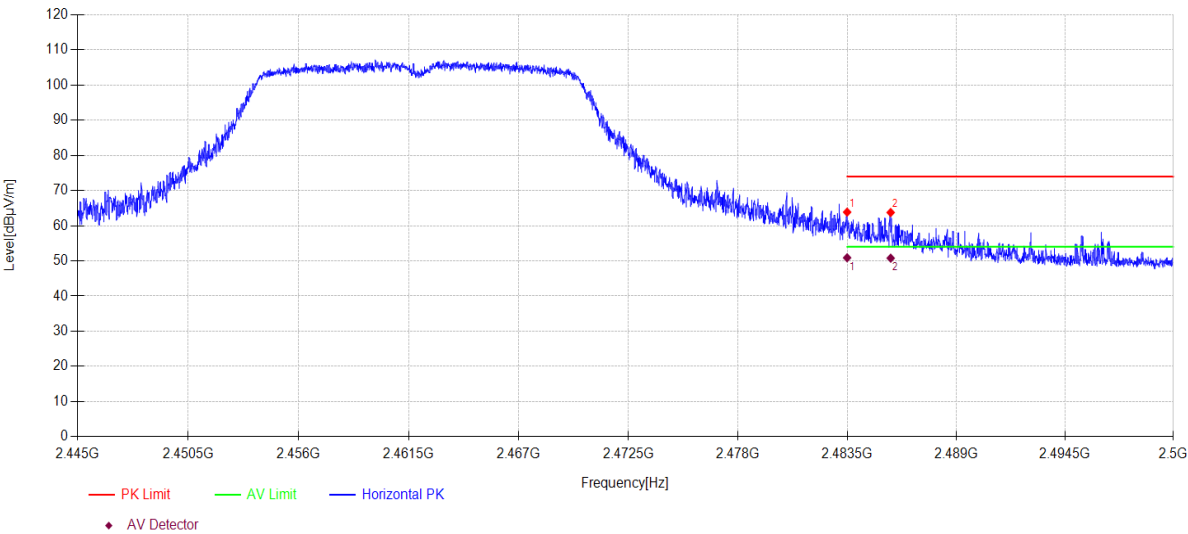

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	32.72	27.53	3.62	0.00	63.87	74.00	10.13	PK	Horizontal
2	2485.700	32.60	27.54	3.62	0.00	63.76	74.00	10.24	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.74	27.53	3.62	0.00	50.89	54.0	3.11	AV	Horizontal
2	2485.700	19.62	27.54	3.62	0.00	50.78	54.0	3.22	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\24

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

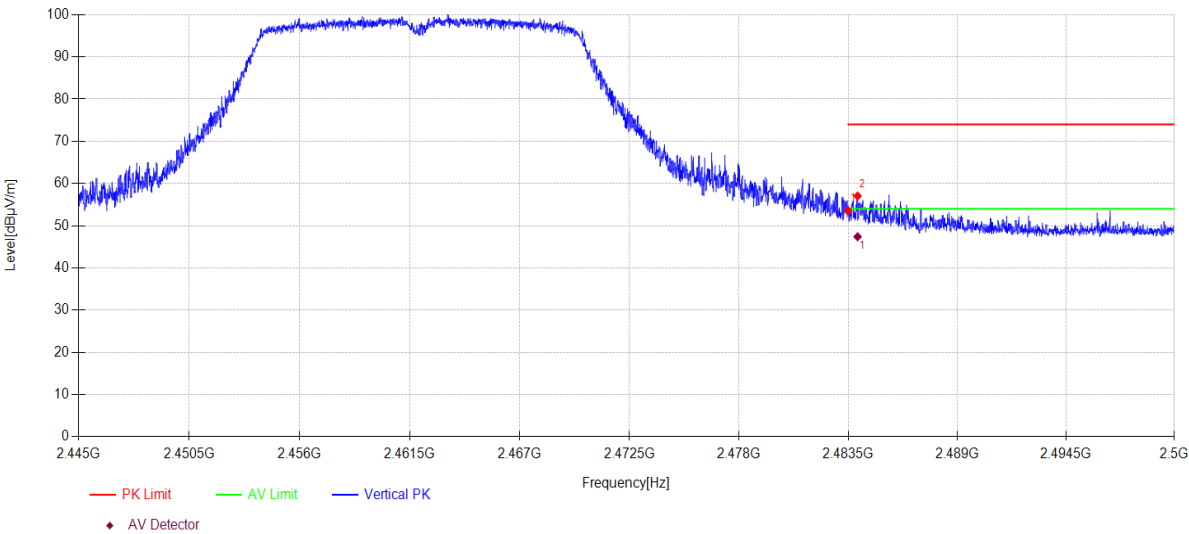

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	22.40	27.53	3.62	0.00	53.55	74.00	20.45	PK	Vertical
2	2483.979	25.89	27.54	3.62	0.00	57.05	74.00	16.95	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.979	16.24	27.54	3.62	0.00	47.40	54.0	6.60	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\21

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

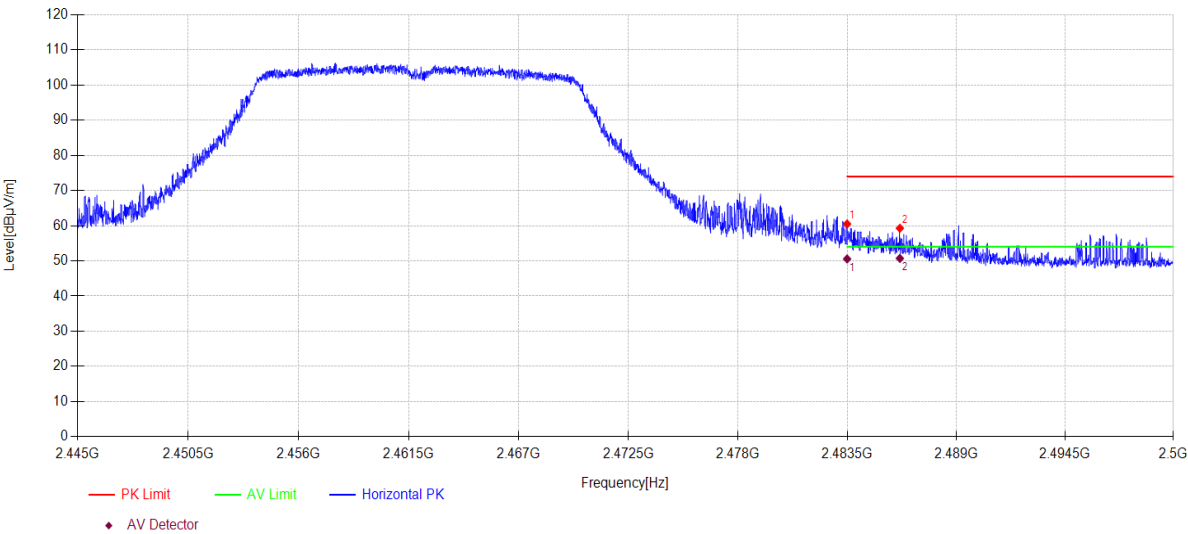

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	29.36	27.53	3.62	0.00	60.51	74.00	13.49	PK	Horizontal
2	2486.162	28.13	27.54	3.62	0.00	59.29	74.00	14.71	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.41	27.53	3.62	0.00	50.56	54.0	3.44	AV	Horizontal
2	2486.162	19.56	27.54	3.62	0.00	50.72	54.0	3.28	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11G TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\22

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

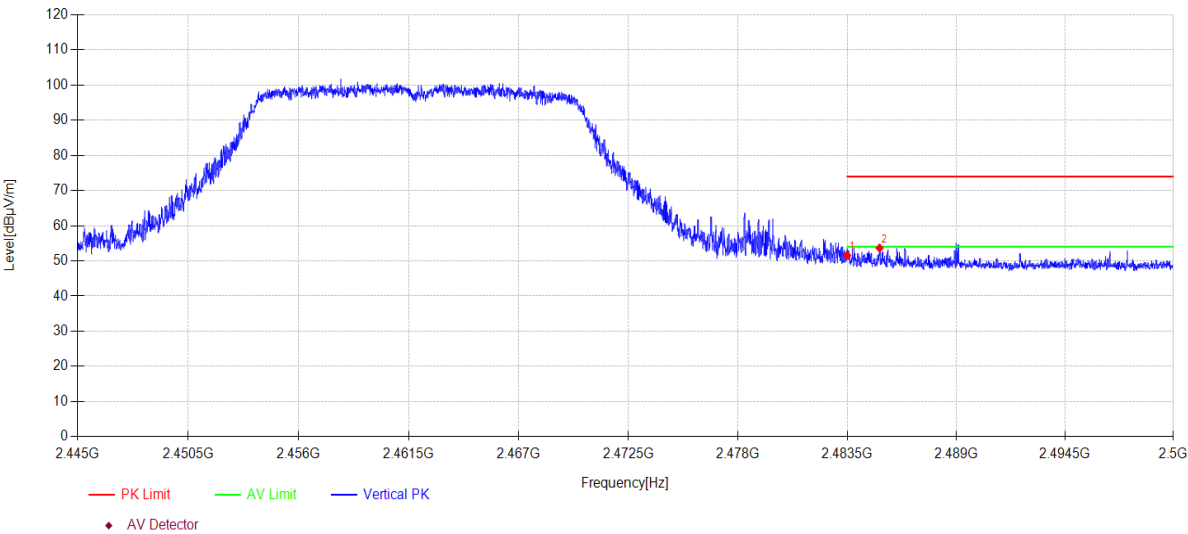

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.42	27.53	3.62	0.00	51.57	74.00	22.43	PK	Vertical
2	2485.139	22.50	27.54	3.62	0.00	53.66	74.00	20.34	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2412MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\25

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

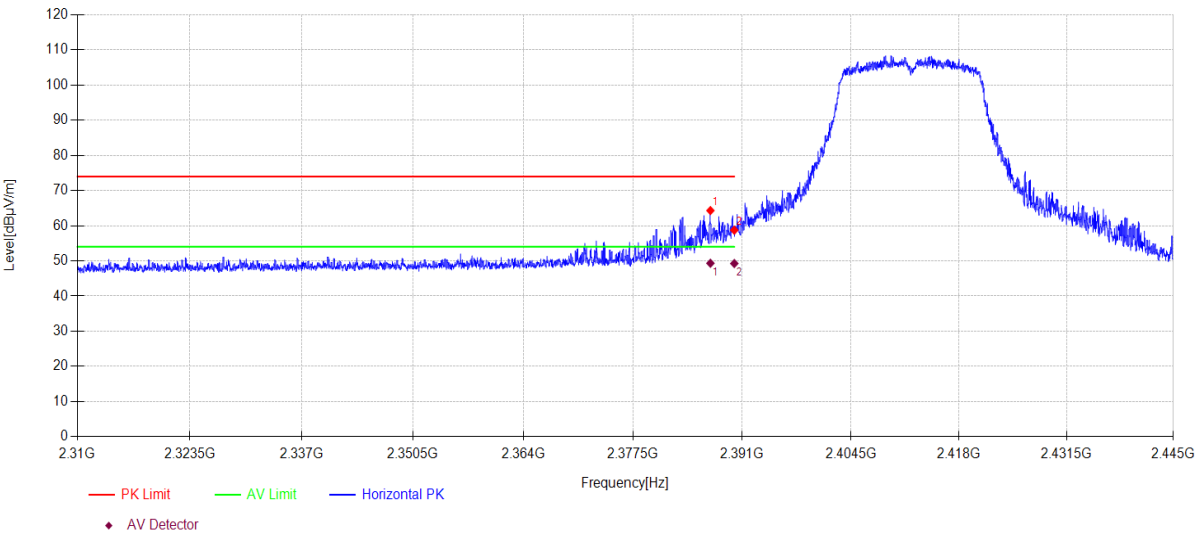

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.045	33.49	27.25	3.57	0.00	64.31	74.00	9.69	PK	Horizontal
2	2390.000	27.91	27.26	3.57	0.00	58.74	74.00	15.26	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.045	18.51	27.25	3.57	0.00	49.33	54.0	4.67	AV	Horizontal
2	2390.000	18.43	27.26	3.57	0.00	49.26	54.0	4.74	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2412MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\26

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

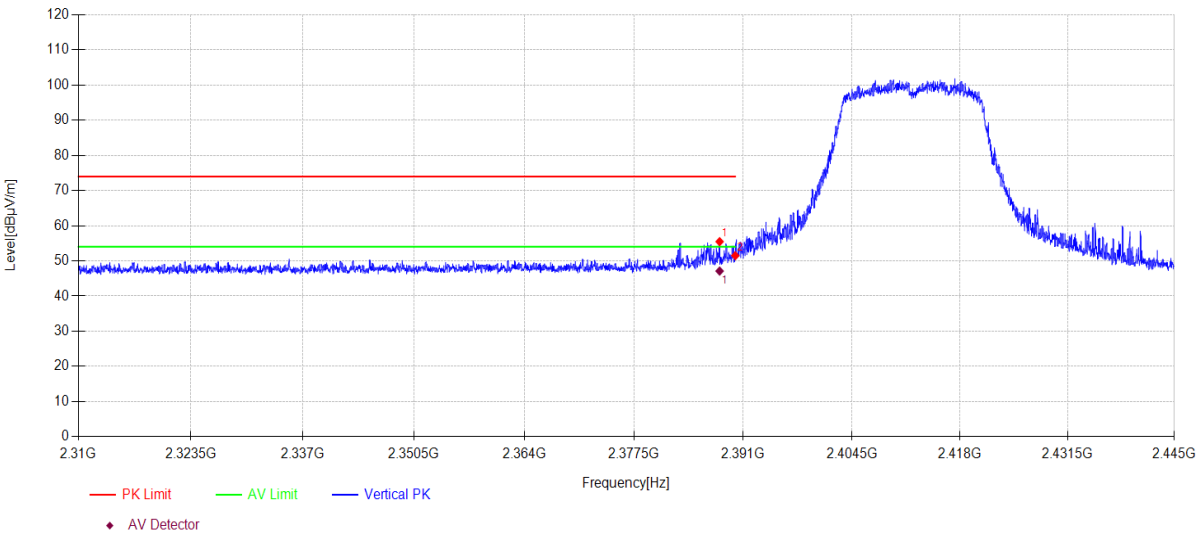

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.057	24.65	27.25	3.57	0.00	55.47	74.00	18.53	PK	Vertical
2	2390.000	20.66	27.26	3.57	0.00	51.49	74.00	22.51	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.057	16.29	27.25	3.57	0.00	47.11	54.0	6.89	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2462MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\27

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

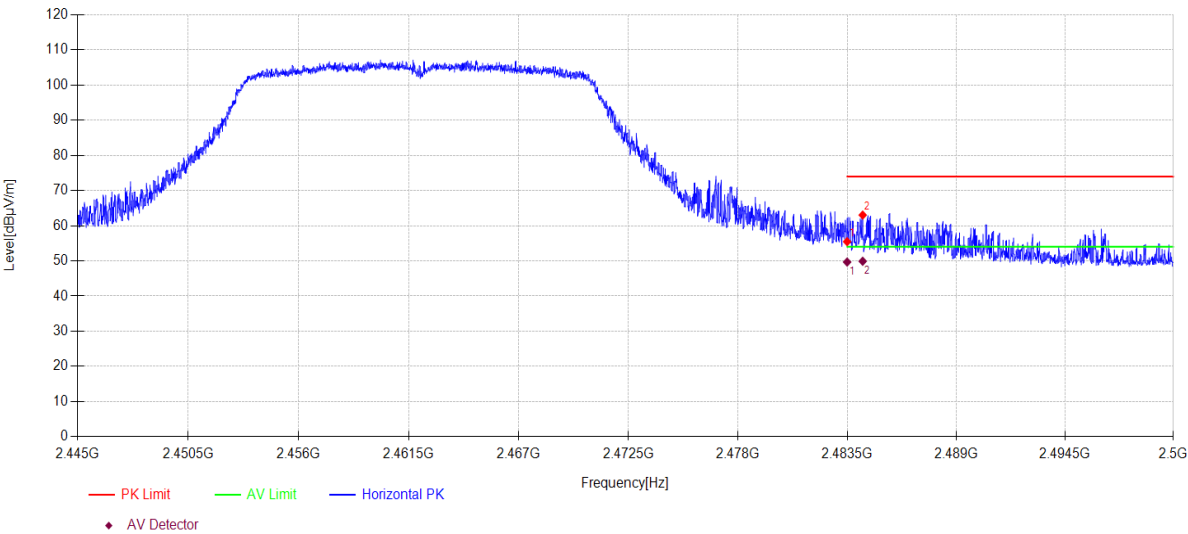

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	24.32	27.53	3.62	0.00	55.47	74.00	18.53	PK	Horizontal
2	2484.287	31.87	27.54	3.62	0.00	63.03	74.00	10.97	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.53	27.53	3.62	0.00	49.68	54.0	4.32	AV	Horizontal
2	2484.287	18.75	27.54	3.62	0.00	49.91	54.0	4.09	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N20 TX 2462MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\28

Memo:

Sample Number:S24042530-002 Power Setting:76

Test Graph

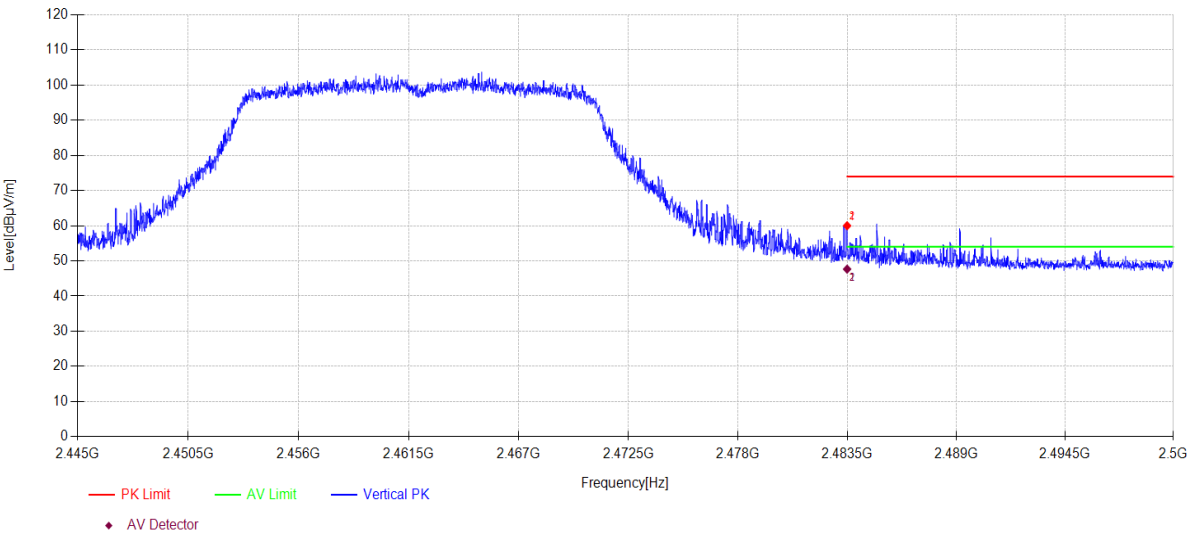

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	28.85	27.53	3.62	0.00	60.00	74.00	14.00	PK	Vertical
2	2483.511	29.19	27.53	3.62	0.00	60.34	74.00	13.66	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.51	27.53	3.62	0.00	47.66	54.0	6.34	AV	Vertical
2	2483.511	16.71	27.53	3.62	0.00	47.86	54.0	6.14	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N40 TX 2422MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\31

Memo:

Sample Number:S24042530-002 Power Setting:72

Test Graph

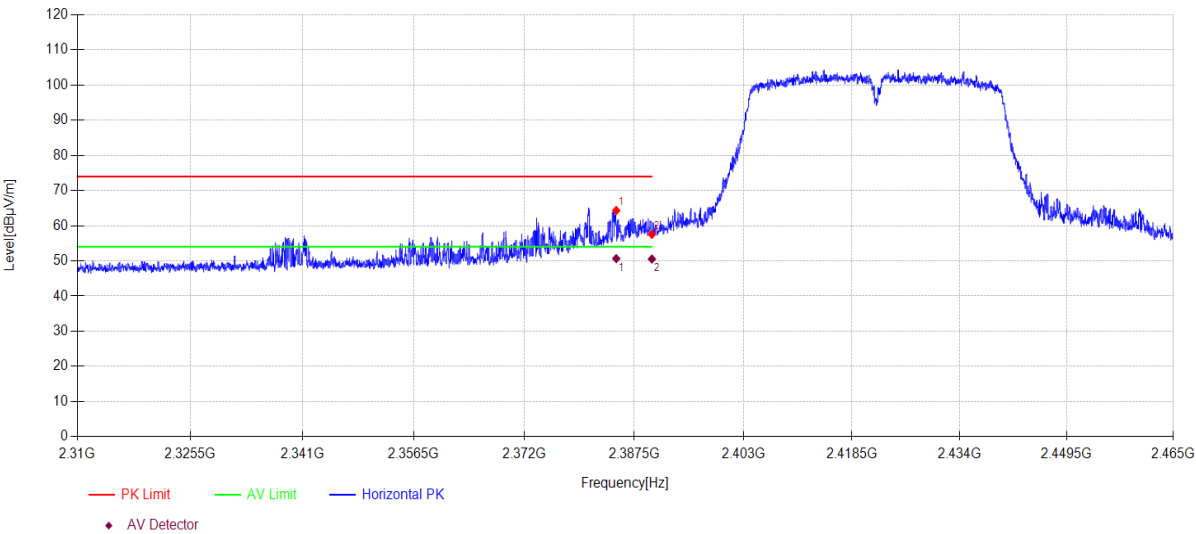

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.958	33.53	27.24	3.57	0.00	64.34	74.00	9.66	PK	Horizontal
2	2390.000	26.70	27.26	3.57	0.00	57.53	74.00	16.47	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.958	19.85	27.24	3.57	0.00	50.66	54.0	3.34	AV	Horizontal
2	2390.000	19.71	27.26	3.57	0.00	50.54	54.0	3.46	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N40 TX 2422MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\32

Memo:

Sample Number:S24042530-002 Power Setting:72

Test Graph

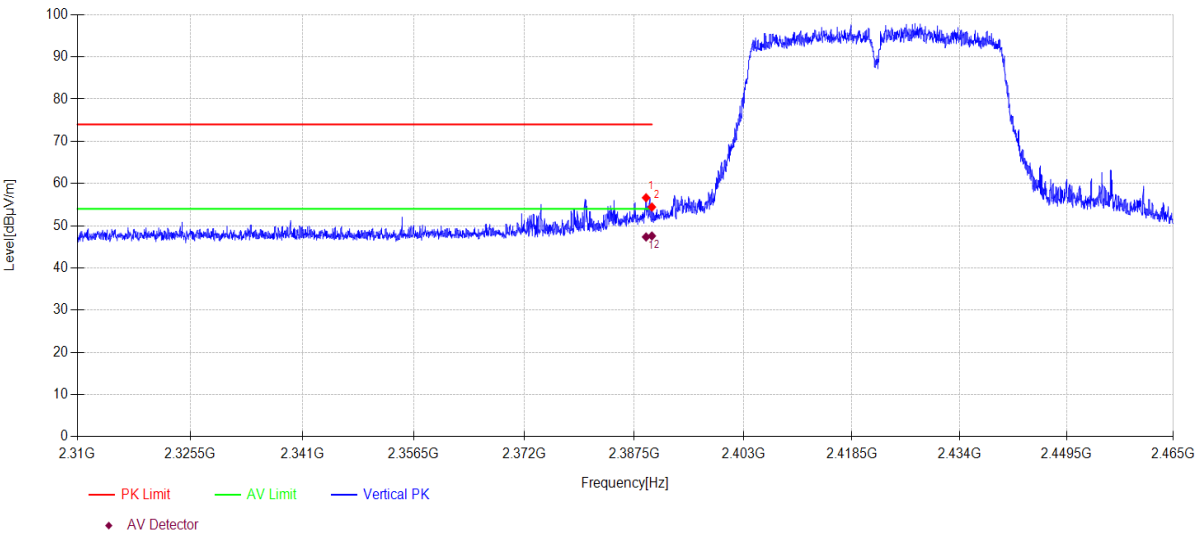

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.174	25.80	27.26	3.57	0.00	56.63	74.00	17.37	PK	Vertical
2	2390.000	23.60	27.26	3.57	0.00	54.43	74.00	19.57	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.174	16.51	27.26	3.57	0.00	47.34	54.0	6.66	AV	Vertical
2	2390.000	16.75	27.26	3.57	0.00	47.58	54.0	6.42	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N40 TX 2452MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\29

Memo:

Sample Number:S24042530-002 Power Setting:72

Test Graph

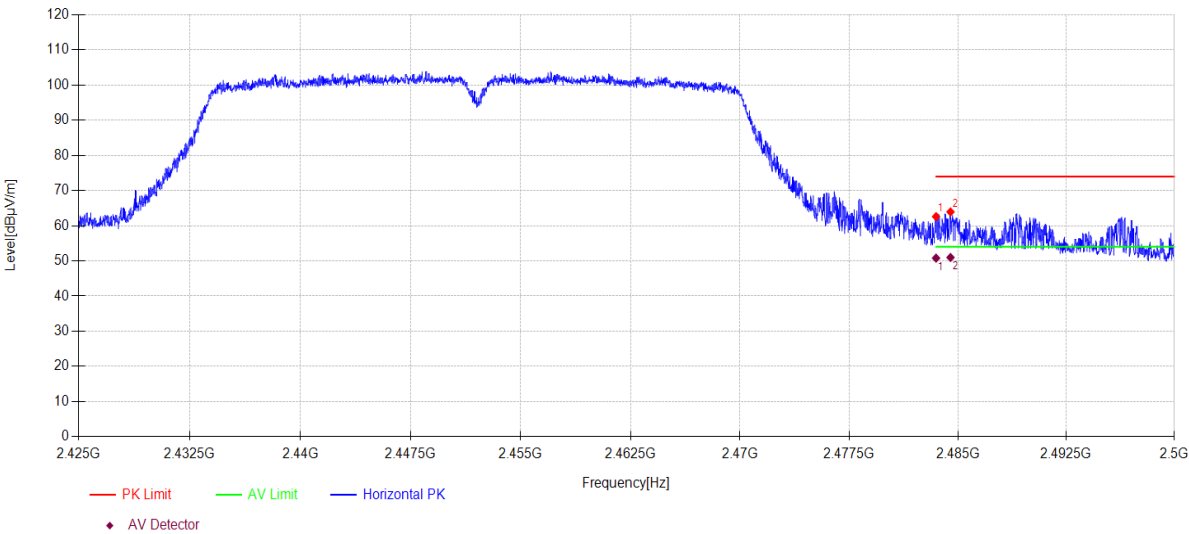

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	31.44	27.53	3.62	0.00	62.59	74.00	11.41	PK	Horizontal
2	2484.498	32.77	27.54	3.62	0.00	63.93	74.00	10.07	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.65	27.53	3.62	0.00	50.80	54.0	3.20	AV	Horizontal
2	2484.498	19.82	27.54	3.62	0.00	50.98	54.0	3.02	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-03

Tested By:

Junchang Du

EUT:

WINBOX

Model Number:

WINBOX DV8947

Test Mode:

11N40 TX 2452MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.9°C;Humi:66.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24042530-2E\FCC ABOVE 1G 2.4G\30

Memo:

Sample Number:S24042530-002 Power Setting:72

Test Graph

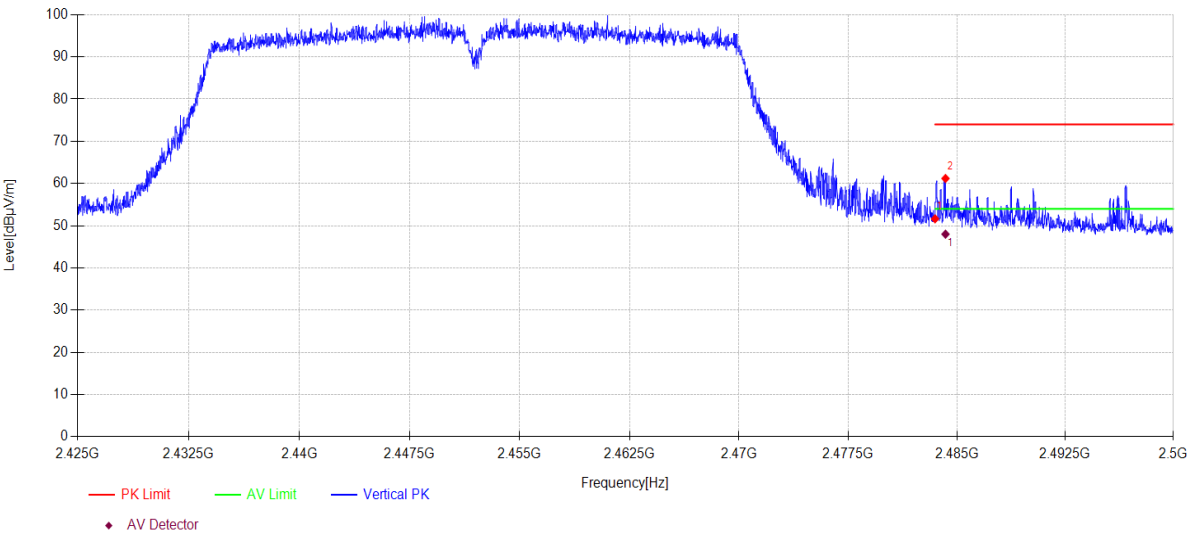

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.48	27.53	3.62	0.00	51.63	74.00	22.37	PK	Vertical
2	2484.220	30.03	27.54	3.62	0.00	61.19	74.00	12.81	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2484.220	16.84	27.54	3.62	0.00	48.00	54.0	6.00	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14.Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Three-phase artificial power network	SCHWARZBEC K	NSLK 8163	DDT-ZC01572	2024/07/11
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/
Two Line V-Network	R&S	ENV216	DDT-ZC02059	2024/07/11
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2024/07/11
Two Line V-Network	R&S	ENV216	DDT-ZC02056	2024/07/11
Pulse Limiter	SCHWARZBEC K	VTSD 9561	DDT-ZC02128	2024/07/14
Δ-shaped artificial power network	SCHWARZBEC K	PVDC 8301	DDT-ZC03939	2025/03/31
RF Cable	Yuhu Technology	Z806-NJ-NJ-6M	DDT-ZC02004	2024/07/14

14.2. Block diagram of test setup

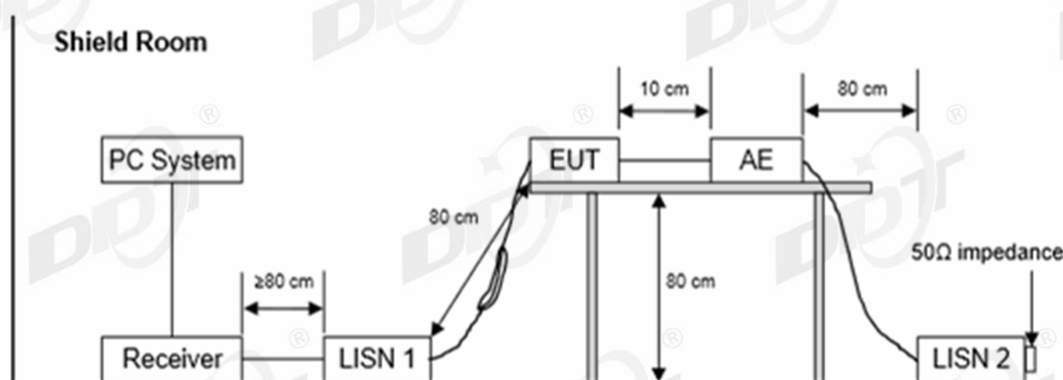

14.3. Limits

Frequency	Quasi-Peak Level dB(mV)	Average Level dB(mV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 6# Shield Room

Test Date : 2024-05-23

EUT : WINBOX

Power Supply : AC 120V/60Hz

Condition : Temp:21.5°C,Humi:51.8%

D:\2024 Report Date\Q24042530-2E\CE-FCC.EM6


Tested By : Genliu

Model Number : WINBOX DV8947

Test Mode : 2.4GWIFI mode

LISN : 2023 ENV 216 3#/LINE

Memo :

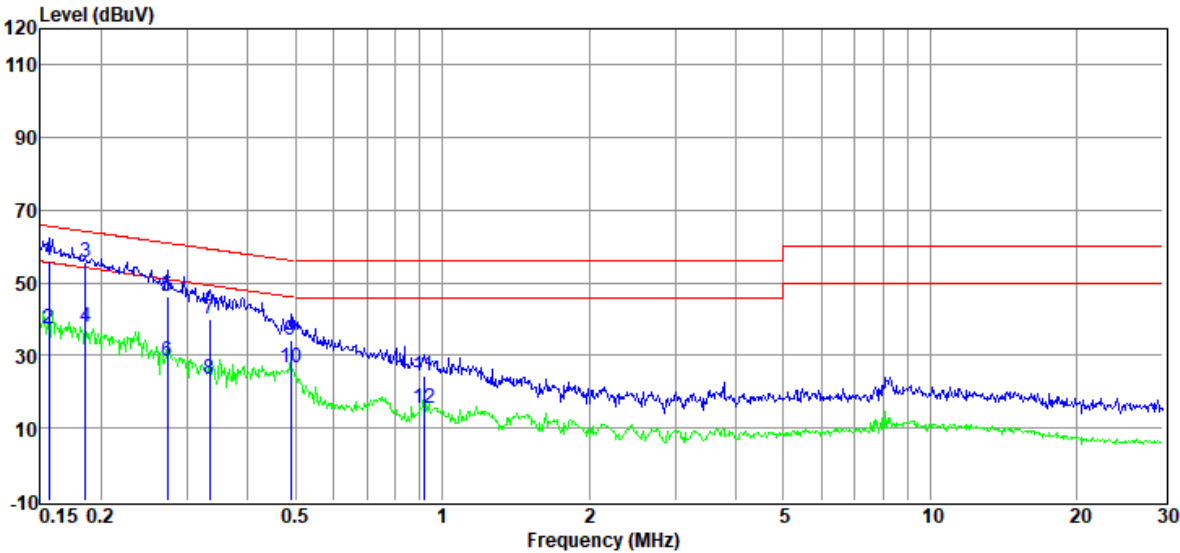

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	36.51	9.77	0.10	9.94	56.32	65.65	-9.33	QP	LINE
2	0.16	17.37	9.77	0.10	9.94	37.18	55.65	-18.47	Average	LINE
3	0.19	36.13	9.70	0.11	9.94	55.88	64.24	-8.36	QP	LINE
4	0.19	17.95	9.70	0.11	9.94	37.70	54.24	-16.54	Average	LINE
5	0.27	26.74	9.70	0.12	9.95	46.51	61.03	-14.52	QP	LINE
6	0.27	8.52	9.70	0.12	9.95	28.29	51.03	-22.74	Average	LINE
7	0.33	20.33	9.75	0.12	9.95	40.15	59.35	-19.20	QP	LINE
8	0.33	3.46	9.75	0.12	9.95	23.28	49.35	-26.07	Average	LINE
9	0.49	14.70	9.65	0.13	9.96	34.44	56.19	-21.75	QP	LINE
10	0.49	6.67	9.65	0.13	9.96	26.41	46.19	-19.78	Average	LINE
11	0.92	4.47	9.68	0.22	9.97	24.34	56.00	-31.66	QP	LINE
12	0.92	-4.37	9.68	0.22	9.97	15.50	46.00	-30.50	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-05-23

EUT

: WINBOX

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.5°C,Humi:51.8%

D:\2024 Report Date\Q24042530-2E\CE-FCC.EM6

Tested By

: Genliu

Model Number

: WINBOX DV8947


Test Mode

: 2.4GWIFI mode

LISN

: 2023 ENV 216 3#/NEUTRAL

Memo :

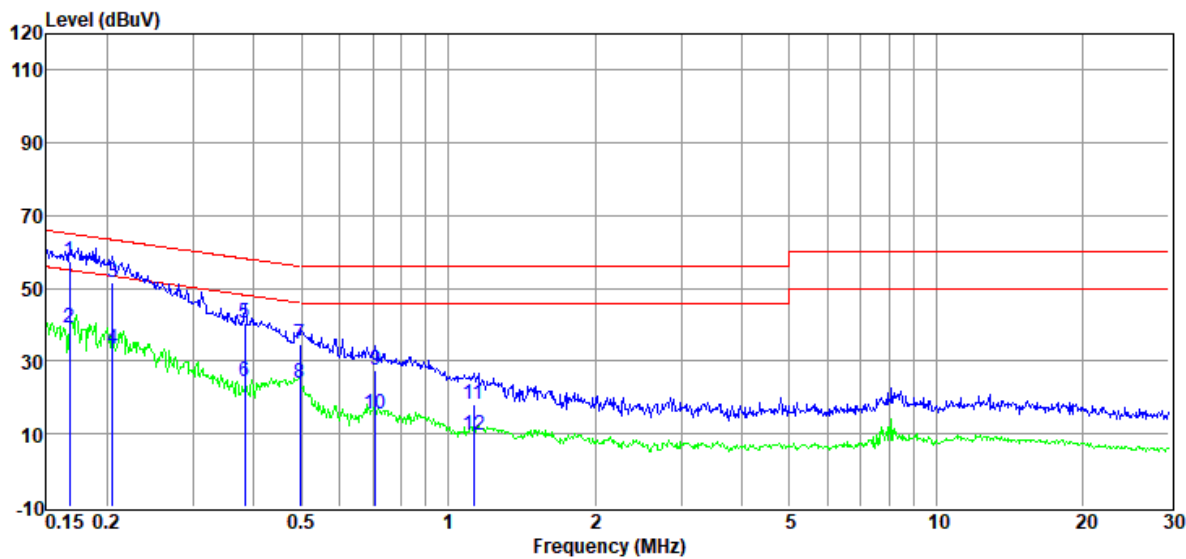

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	37.78	9.77	0.11	9.94	57.60	65.08	-7.48	QP	NEUTRAL
2	0.17	19.42	9.77	0.11	9.94	39.24	55.08	-15.84	Average	NEUTRAL
3	0.21	31.71	9.94	0.11	9.94	51.70	63.40	-11.70	QP	NEUTRAL
4	0.21	13.42	9.94	0.11	9.94	33.41	53.40	-19.99	Average	NEUTRAL
5	0.38	20.32	9.98	0.13	9.95	40.38	58.21	-17.83	QP	NEUTRAL
6	0.38	4.54	9.98	0.13	9.95	24.60	48.21	-23.61	Average	NEUTRAL
7	0.50	14.82	9.81	0.13	9.96	34.72	56.05	-21.33	QP	NEUTRAL
8	0.50	4.22	9.81	0.13	9.96	24.12	46.05	-21.93	Average	NEUTRAL
9	0.71	7.62	9.79	0.14	9.96	27.51	56.00	-28.49	QP	NEUTRAL
10	0.71	-4.28	9.79	0.14	9.96	15.61	46.00	-30.39	Average	NEUTRAL
11	1.13	-1.50	9.56	0.25	9.97	18.28	56.00	-37.72	QP	NEUTRAL
12	1.13	-10.11	9.56	0.25	9.97	9.67	46.00	-36.33	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q24042530-1E appendix I

-----End Report-----