



FCC CERTIFICATION TEST REPORT

Applicant	:	Shenzhen SDMC Technology Co., Ltd.
Address of Applicant	:	Floor 1, Building 5, Hengtongfa Industrial Zone, Tangtou Industrial Park, Tangtou Community, Shiyan Street, Baoan District, Shenzhen
Manufacturer	:	Shenzhen SDMC Technology Co., Ltd.
Address of Manufacturer	:	Floor 1, Building 5, Hengtongfa Industrial Zone, Tangtou Industrial Park, Tangtou Community, Shiyan Street, Baoan District, Shenzhen
Equipment under Test	:	AC1200 Dual Band Wi-Fi Router
Model No.	:	NM1274CB
FCC ID	:	2AW68-NM1274CB
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10:2013
Report No.	:	DDT-RE24091913-1E01
Issue Date	:	2025/01/16
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	9
2.6.	Test environment conditions.....	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	6dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits.....	13
4.3.	Test procedure.....	13
4.4.	Test result	14
4.5.	Test graphs	15
5.	99% Bandwidth	23
5.1.	Block diagram of test setup	23
5.2.	Limits.....	23
5.3.	Test procedure.....	23
5.4.	Test result	24
5.5.	Test graphs	25
6.	Conducted Output Power	33
6.1.	Block diagram of test setup	33
6.2.	Limits.....	33
6.3.	Test procedure.....	33
6.4.	Test result average	34
7.	Power Spectral Density	35
7.1.	Block diagram of test setup	35
7.2.	Limits.....	35
7.3.	Test procedure.....	35
7.4.	Test result	36
7.5.	Test graphs	37
8.	Band Edge Compliance (Conducted Method).....	45
8.1.	Block diagram of test setup	45

8.2.	Limits.....	45
8.3.	Test procedure.....	45
8.4.	Test result	46
8.5.	Test graphs.....	47
9.	RF Conducted Spurious Emissions.....	53
9.1.	Block diagram of test setup	53
9.2.	Limits.....	53
9.3.	Test procedure.....	53
9.4.	Test result	54
9.5.	Test graphs.....	55
10.	Duty Cycle.....	79
10.1.	Block diagram of test setup	79
10.2.	Limit.....	79
10.3.	Test procedure.....	79
10.4.	Test result	80
10.5.	Test graphs.....	81
11.	Antenna Requirements	89
11.1.	Limit.....	89
11.2.	Result.....	89
12.	Radiated Emission.....	90
12.1.	Test equipment	90
12.2.	Block diagram of test setup	91
12.3.	Limits.....	92
12.4.	Assistant equipment used for test	93
12.5.	Test procedure.....	93
12.6.	Test result	95
12.7.	Test data	96
13.	Band Edge Compliance	104
13.1.	Test equipment	104
13.2.	Block diagram of test setup	105
13.3.	Limits.....	105
13.4.	Assistant equipment used for test	105
13.5.	Test procedure.....	105
13.6.	Test result	105
13.7.	Test data	106
14.	Power Line Conducted Emissions.....	118
14.1.	Test equipment	118
14.2.	Block diagram of test setup	118

14.3. Limits..... 118

14.4. Assistant equipment used for test 118

14.5. Test procedure..... 119

14.6. Test result 119

14.7. Test data 120

15. Test Setup Photograph..... 122

16. Photos of the EUT 124

Test Report Declare

Applicant	:	Shenzhen SDMC Technology Co., Ltd.
Address of Applicant	:	Floor 1, Building 5, Hengtongfa Industrial Zone, Tangtou Industrial Park, Tangtou Community, Shiyan Street, Baoan District, Shenzhen
Equipment under Test	:	AC1200 Dual Band Wi-Fi Router
Model No.	:	NM1274CB
Manufacturer	:	Shenzhen SDMC Technology Co., Ltd.
Address of Manufacturer	:	Floor 1, Building 5, Hengtongfa Industrial Zone, Tangtou Industrial Park, Tangtou Community, Shiyan Street, Baoan District, Shenzhen

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10:2013,

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24091913-1E01		
Date of Receipt:	2024/10/10	Date of Test:	2024/10/10 – 2025/01/16

Prepared By:**Tiger Mo/Engineer****Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2025/01/16	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2)	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3)	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e)	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d)	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d)	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d)	/	Pass
7	Antenna Requirement	FCC Part 15: 15.203	/	Pass
8	Power Line Conducted Emissions	FCC Part 15: 15.207(a)	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: AC1200 Dual Band Wi-Fi Router
Model Number	: NM1274CB
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC 120V/60Hz

Note: This EUT support 2.4 GHz WLAN, 5 GHz WLAN, this report only for 2.4 GHz WLAN.

Radio Technology	: IEEE 802.11b/g/n
Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Antenna information				
Antenna Type	External antenna			
Max Antenna Gain(dBi)		Ant1 gain	Ant2 gain	Directional gain
	IEEE 802.11b	4.50	4.48	/
	IEEE 802.11g	4.50	4.48	/
	IEEE 802.11n HT20	4.50	4.48	7.5
	IEEE 802.11n HT40	4.50	4.48	7.5
Note: This EUT MIMO 2X2, any transmit signals are correlated with each other. So the Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2/2] = 7.5\text{dBi}$				

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Internet cable	/	/	Length: 1.50m, Unshielded
Adapter	Gansu Pingling Comkey Technology Co., Ltd.	KKD-004	Input: 100-240Vac 50/60Hz Output: 12V =1.0A 12.0W

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QATool_Dbg.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information					
Mode	Setting Tx Power		Data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	14	14	1	LCH: CH1	2412
	14	14	1	MCH: CH6	2437
	14	14	1	HCH: CH11	2462
IEEE 802.11g	12	13	6	LCH: CH1	2412
	14	14	6	MCH: CH6	2437
	14	14	6	HCH: CH11	2462
IEEE 802.11n HT20	0E	0E	MCS 8	LCH: CH1	2412
	0E	0E	MCS 8	MCH: CH6	2437
	0E	0E	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	0A	0A	MCS 8	LCH: CH3	2422
	0E	0E	MCS 8	MCH: CH6	2437
	0E	0E	MCS 8	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2025/03/31
Wideband Radio Communication Tester	R&S	CMW500	120259	2025/07/08
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2025/03/31
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2025/03/31
RF Control Unit	Tonsend	JS0806-2	158060010	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

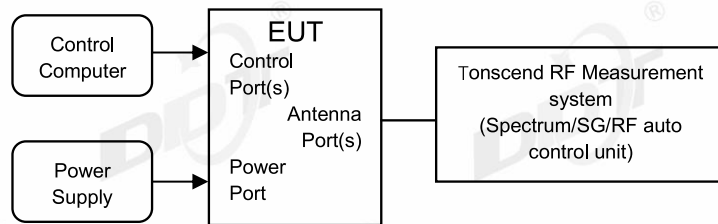

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,46.8%RH	Test Date:	2024.10.22/2024.12.11~2024.12.12
Test Power Supply:	AC120V/60Hz	Sample Number:	S24091913-002


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	10.00	2406.96	2416.96	0.5	PASS
	Ant2	2412	9.56	2406.96	2416.52	0.5	PASS
	Ant1	2437	9.56	2431.96	2441.52	0.5	PASS
	Ant2	2437	9.32	2432.20	2441.52	0.5	PASS
	Ant1	2462	10.00	2456.96	2466.96	0.5	PASS
	Ant2	2462	9.52	2457.00	2466.52	0.5	PASS
11G	Ant1	2412	15.08	2404.44	2419.52	0.5	PASS
	Ant2	2412	15.04	2404.44	2419.48	0.5	PASS
	Ant1	2437	15.08	2429.44	2444.52	0.5	PASS
	Ant2	2437	15.08	2429.44	2444.52	0.5	PASS
	Ant1	2462	15.08	2454.44	2469.52	0.5	PASS
	Ant2	2462	15.04	2454.48	2469.52	0.5	PASS
11N20MI MO	Ant1	2412	15.08	2404.44	2419.52	0.5	PASS
	Ant2	2412	15.08	2404.44	2419.52	0.5	PASS
	Ant1	2437	15.08	2429.44	2444.52	0.5	PASS
	Ant2	2437	15.72	2429.40	2445.12	0.5	PASS
	Ant1	2462	15.08	2454.44	2469.52	0.5	PASS
	Ant2	2462	15.12	2454.40	2469.52	0.5	PASS
11N40MI MO	Ant1	2422	35.04	2404.48	2439.52	0.5	PASS
	Ant2	2422	35.12	2404.40	2439.52	0.5	PASS
	Ant1	2437	35.04	2419.48	2454.52	0.5	PASS
	Ant2	2437	35.04	2419.48	2454.52	0.5	PASS
	Ant1	2452	35.04	2434.48	2469.52	0.5	PASS
	Ant2	2452	35.04	2434.48	2469.52	0.5	PASS

4.5. Test graphs

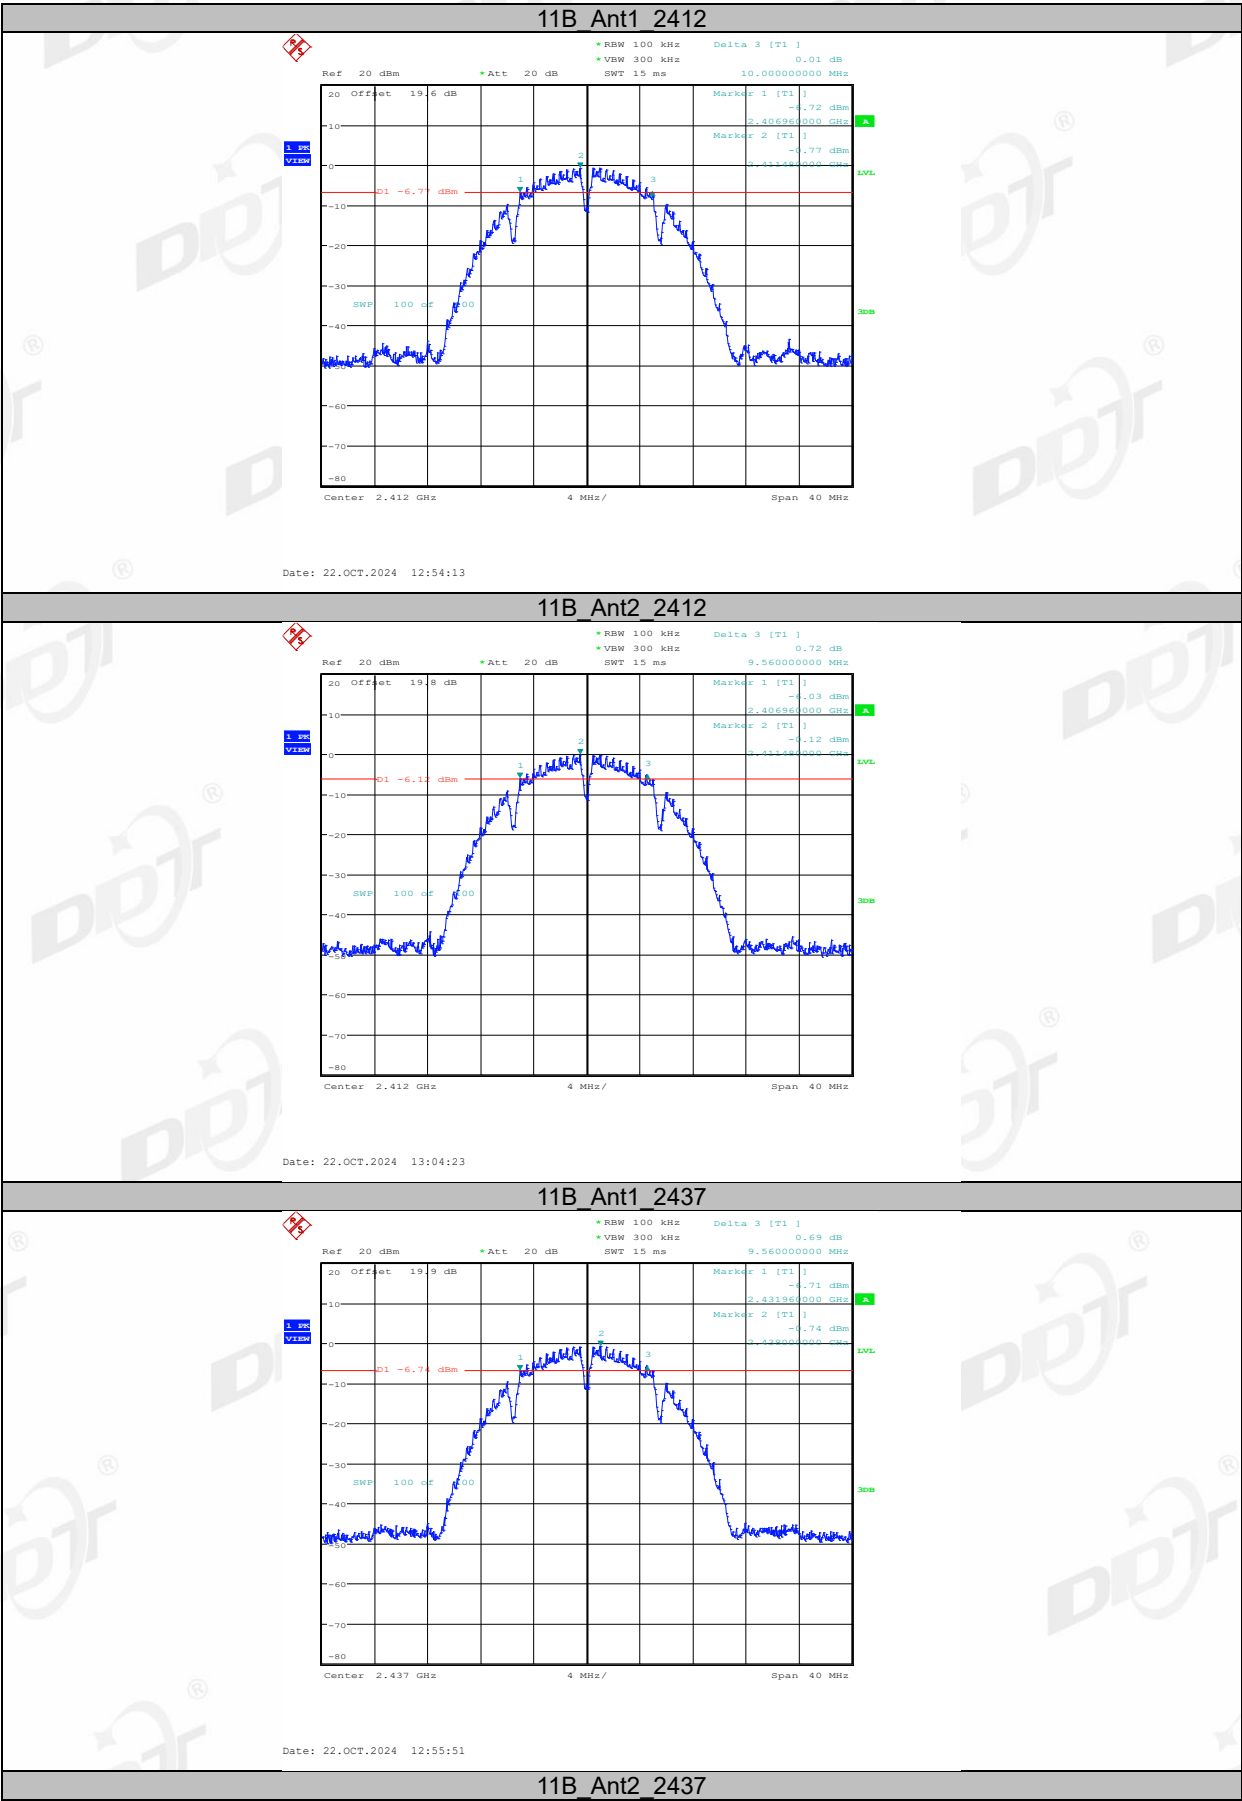


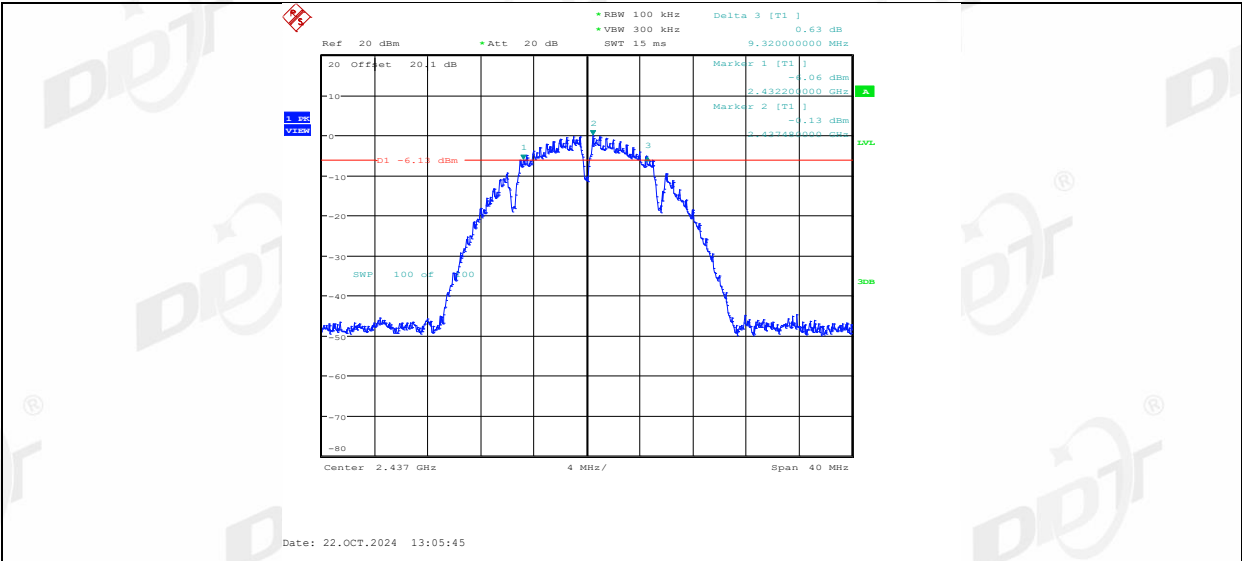


11B_Ant1_2462

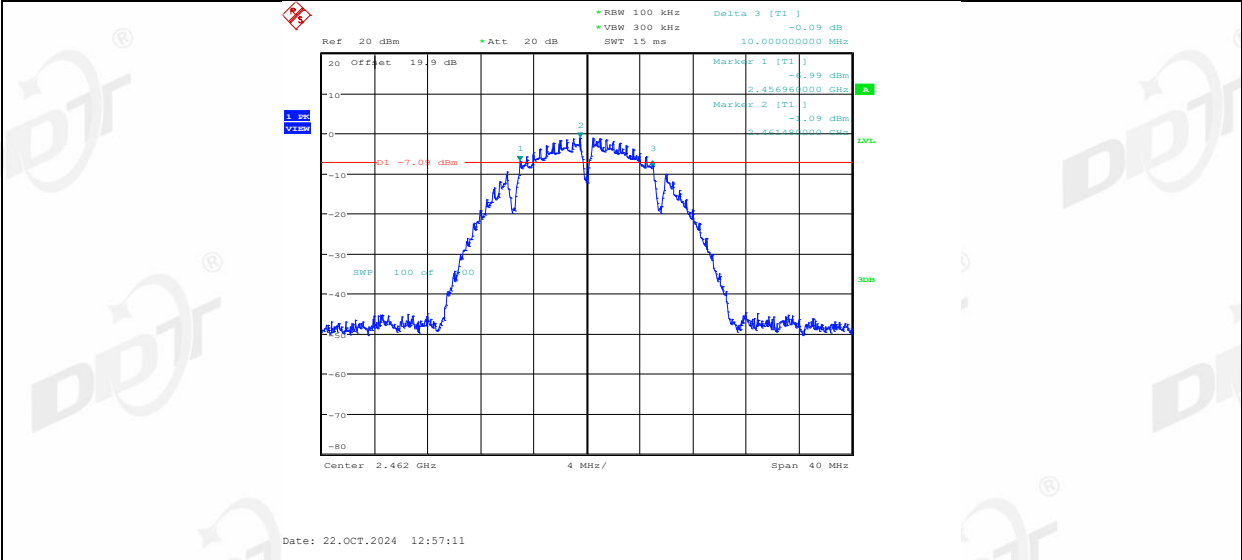


11B_Ant2_2462

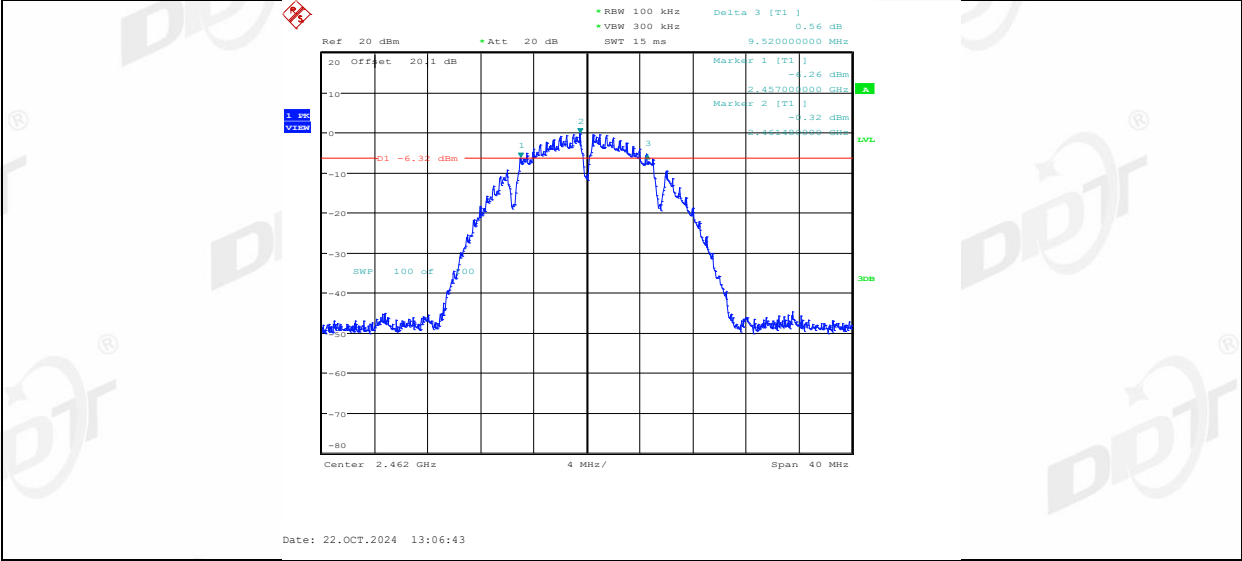


11G_Ant1_2412

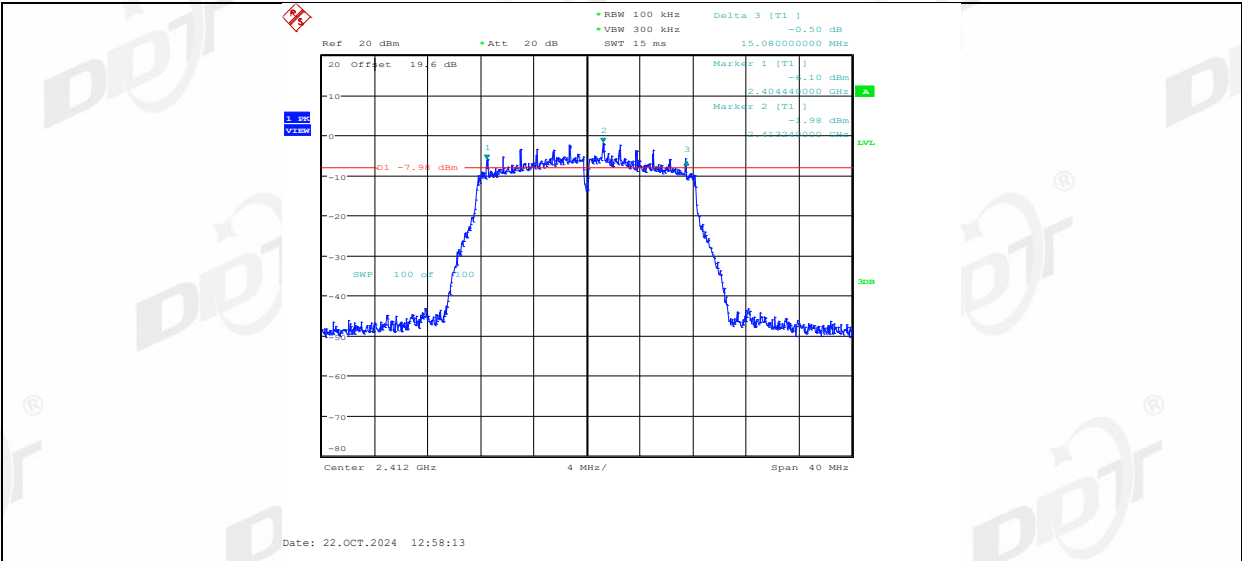


11G_Ant2_2412

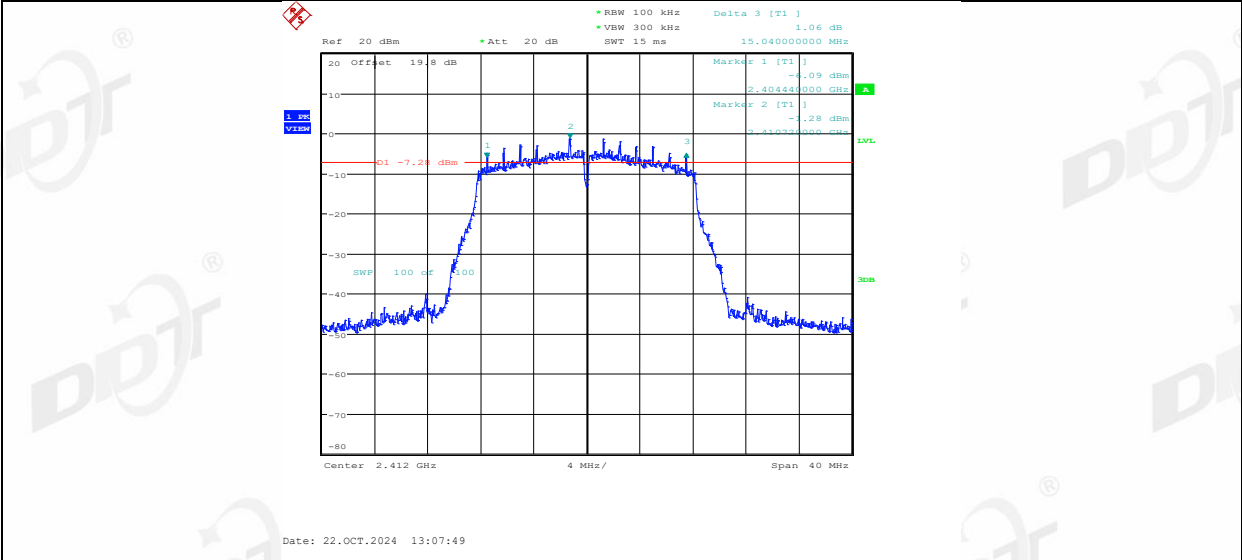


11G_Ant1_2437

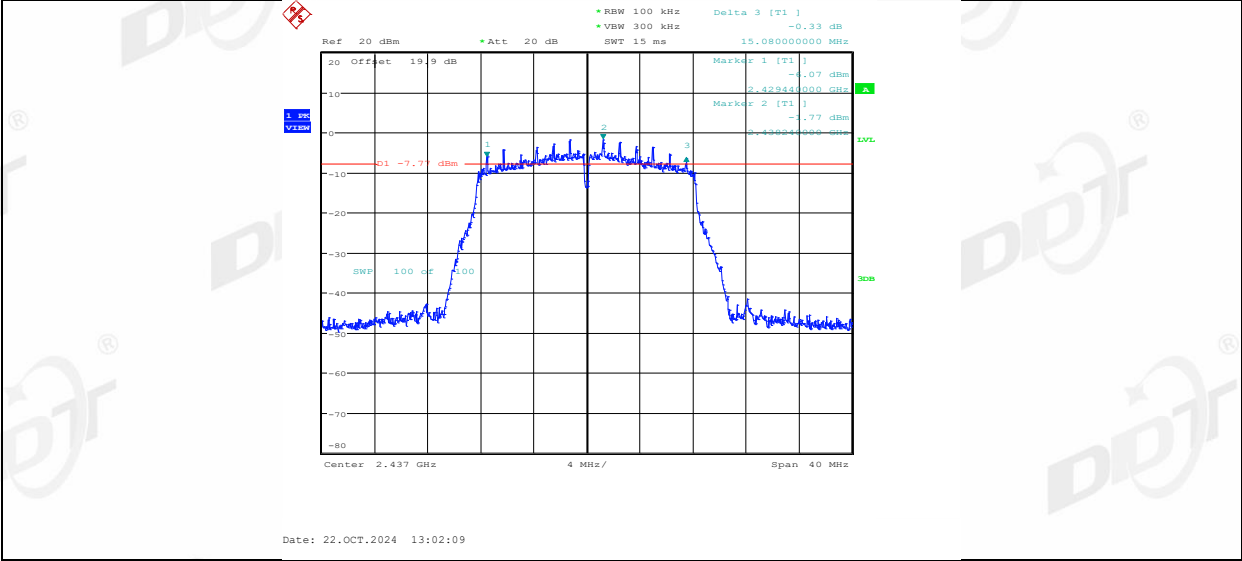


11G_Ant2_2437

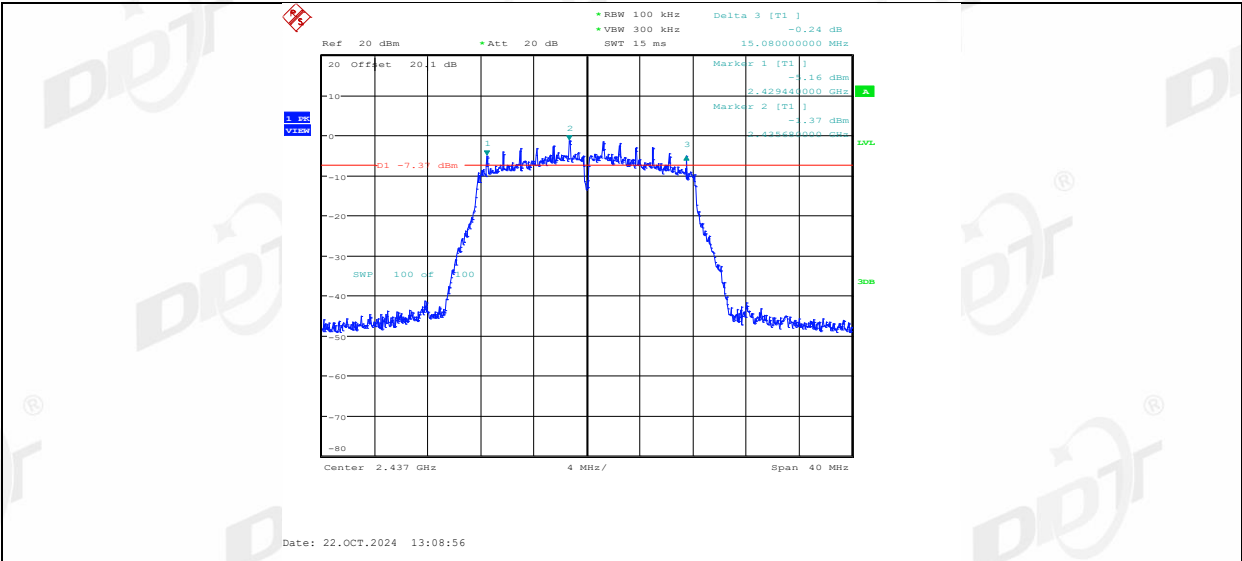




11G_Ant1_2462



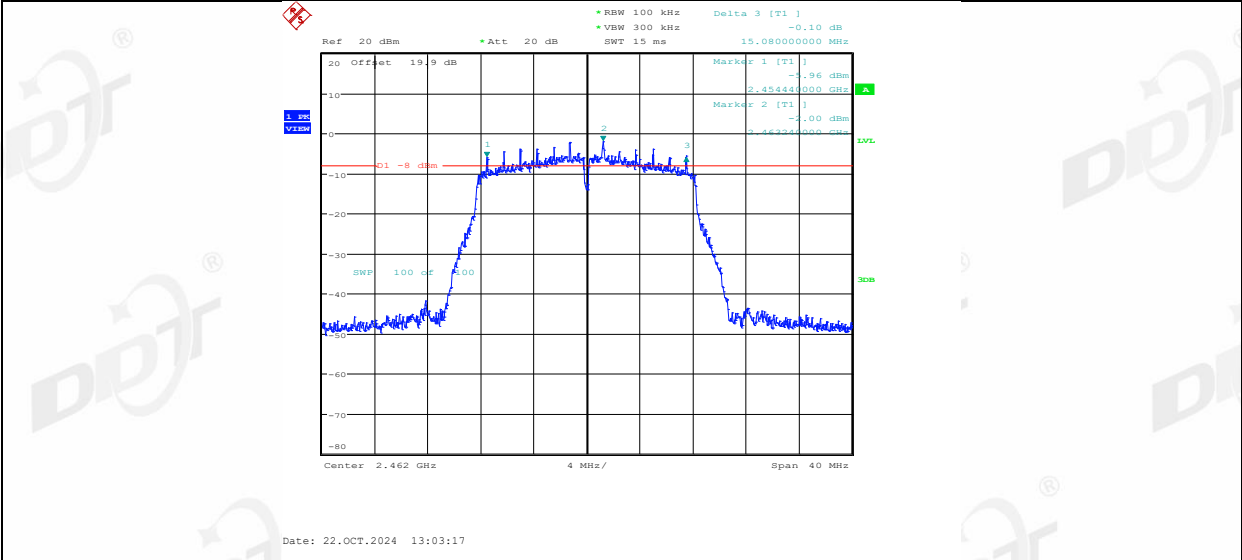



11G_Ant2_2462

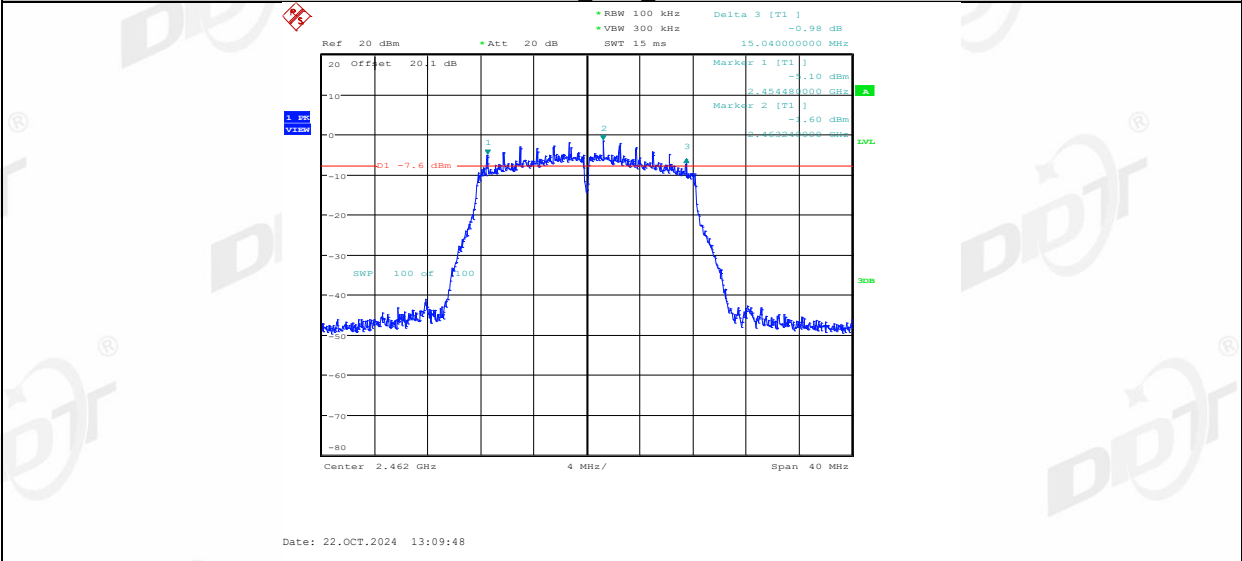


11N20MIMO_Ant1_2412






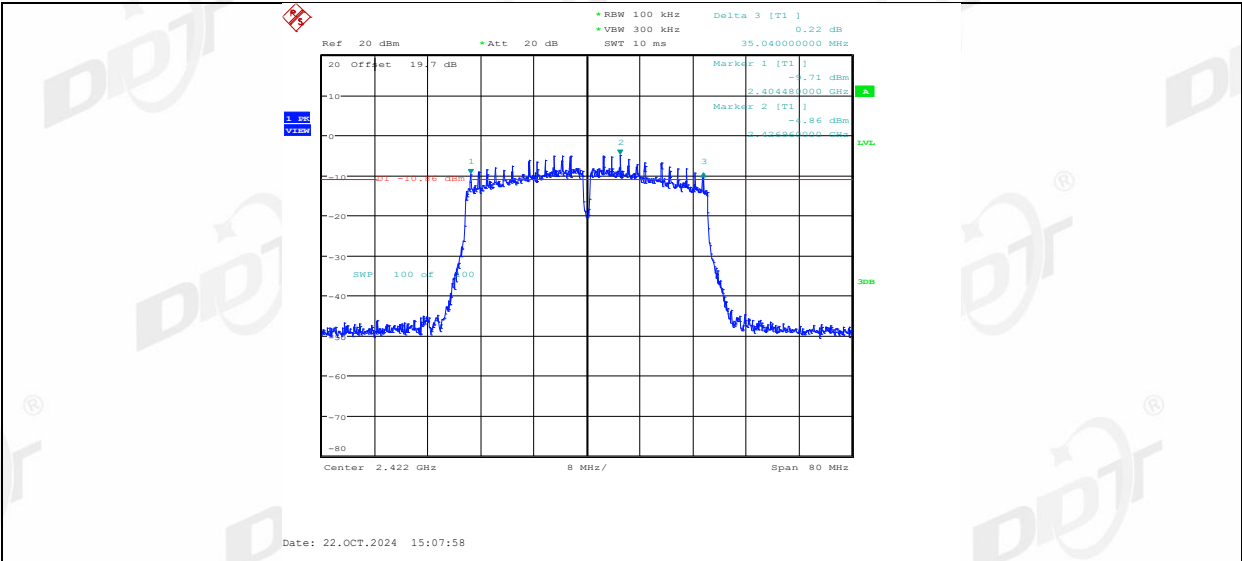


11N40MIMO_Ant2_2422

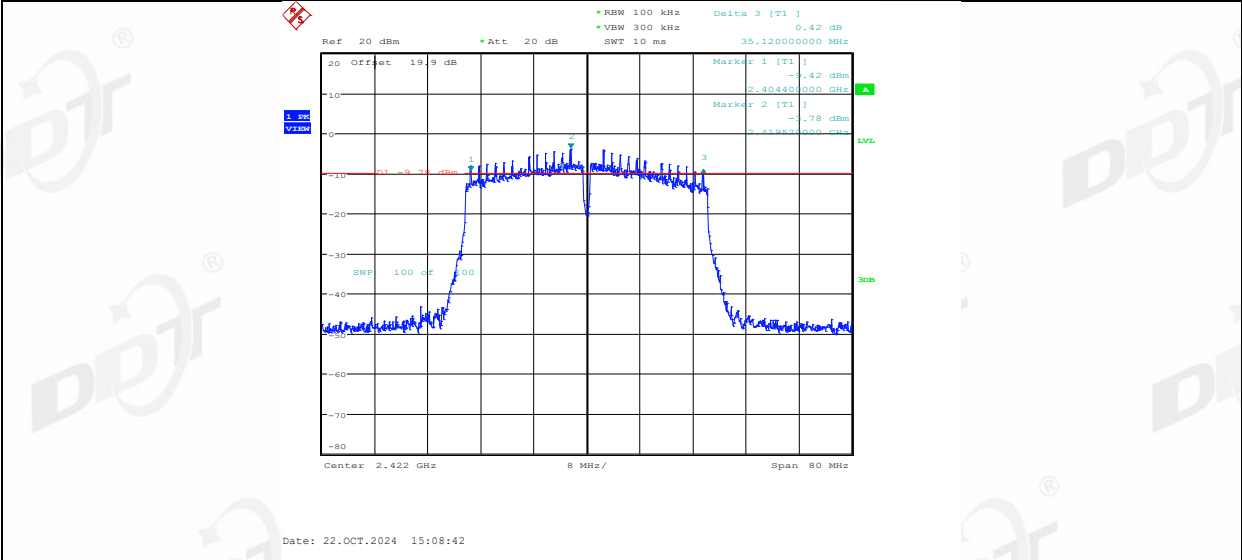


11N40MIMO_Ant1_2437

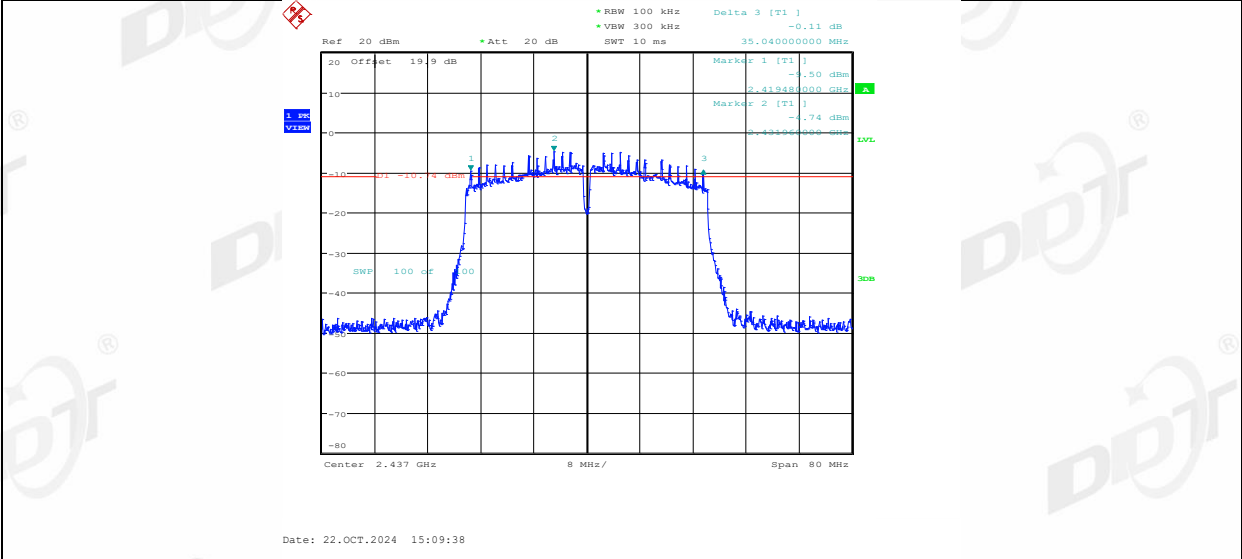


11N40MIMO_Ant2_2437

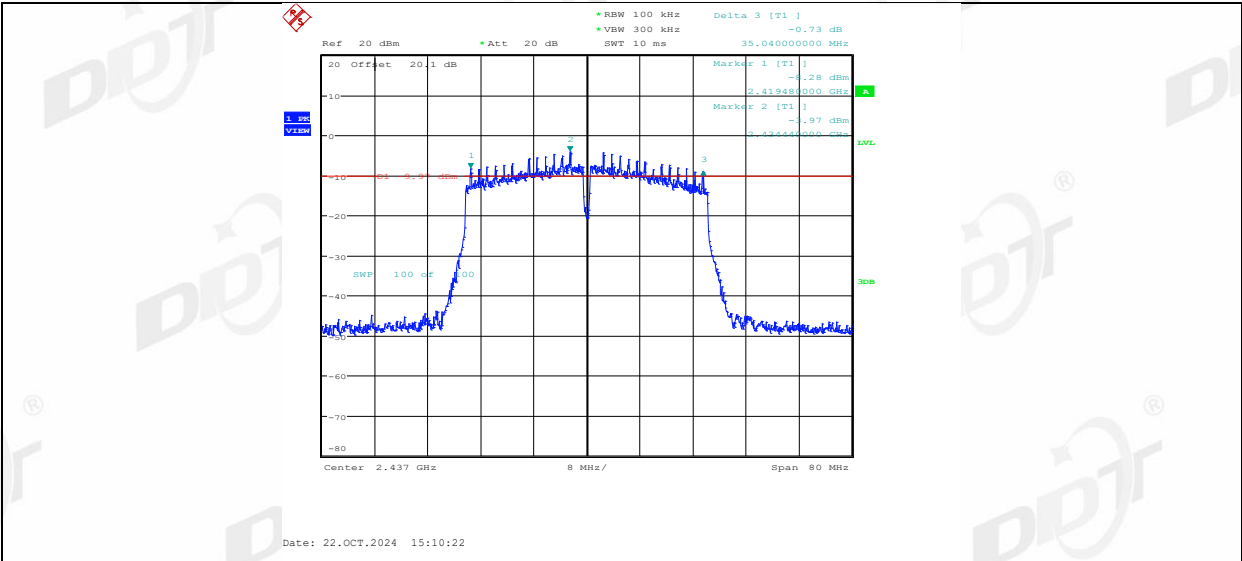

11N40MIMO_Ant1_2452

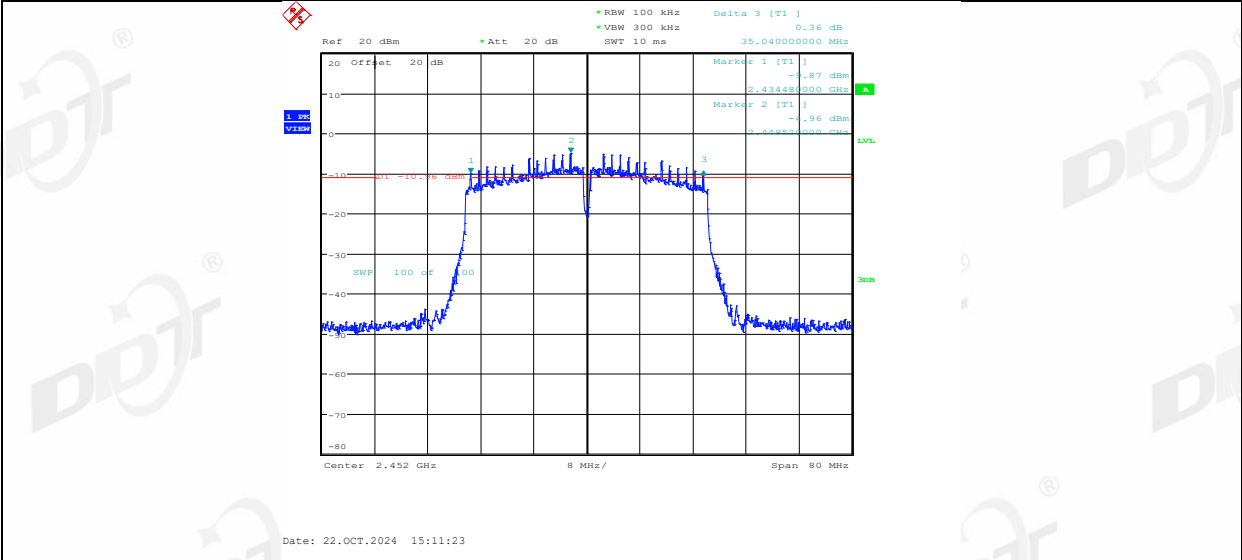


11N40MIMO_Ant2_2452

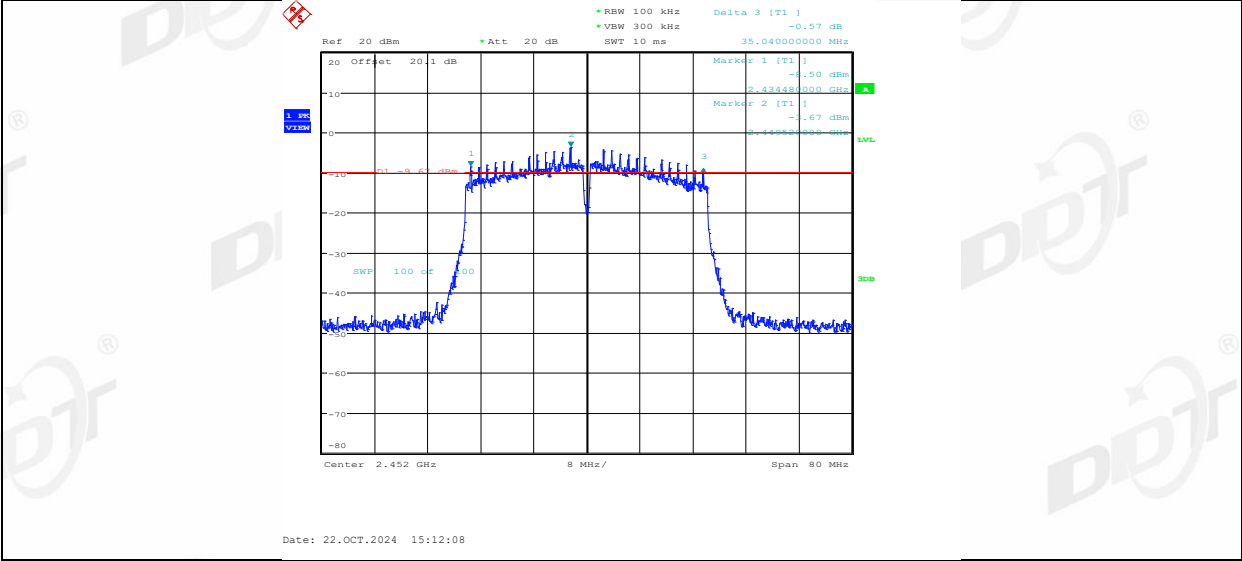

5. 99% Bandwidth

5.1. Block diagram of test setup

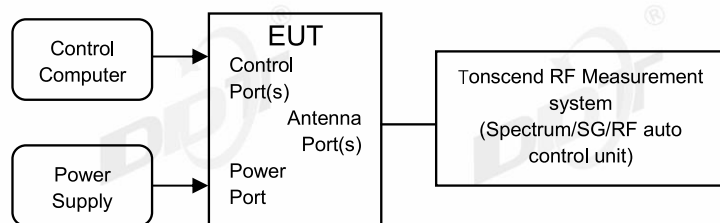

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,46.8%RH	Test Date:	2024.10.22/2024.12.11~2024.12.12
Test Power Supply:	AC120V/60Hz	Sample Number:	S24091913-002


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.24	2404.8400	2419.0800	---	---
	Ant2	2412	14.2	2404.8400	2419.0400	---	---
	Ant1	2437	14.24	2429.8400	2444.0800	---	---
	Ant2	2437	14.2	2429.8400	2444.0400	---	---
	Ant1	2462	14.24	2454.8400	2469.0800	---	---
	Ant2	2462	14.2	2454.8400	2469.0400	---	---
11G	Ant1	2412	16.88	2403.4800	2420.3600	---	---
	Ant2	2412	16.92	2403.4400	2420.3600	---	---
	Ant1	2437	16.96	2428.4400	2445.4000	---	---
	Ant2	2437	17	2428.4000	2445.4000	---	---
	Ant1	2462	16.92	2453.4800	2470.4000	---	---
	Ant2	2462	17	2453.4000	2470.4000	---	---
11N20MI MO	Ant1	2412	17.8	2403.0800	2420.8800	---	---
	Ant2	2412	17.72	2403.0800	2420.8000	---	---
	Ant1	2437	17.8	2428.0400	2445.8400	---	---
	Ant2	2437	17.72	2428.0800	2445.8000	---	---
	Ant1	2462	17.8	2453.0800	2470.8800	---	---
	Ant2	2462	17.72	2453.0800	2470.8000	---	---
11N40MI MO	Ant1	2422	36.08	2403.9200	2440.0000	---	---
	Ant2	2422	36.16	2403.8400	2440.0000	---	---
	Ant1	2437	36.08	2418.9200	2455.0000	---	---
	Ant2	2437	36.08	2418.8400	2454.9200	---	---
	Ant1	2452	36.08	2433.9200	2470.0000	---	---
	Ant2	2452	36.08	2433.8400	2469.9200	---	---

5.5. Test graphs

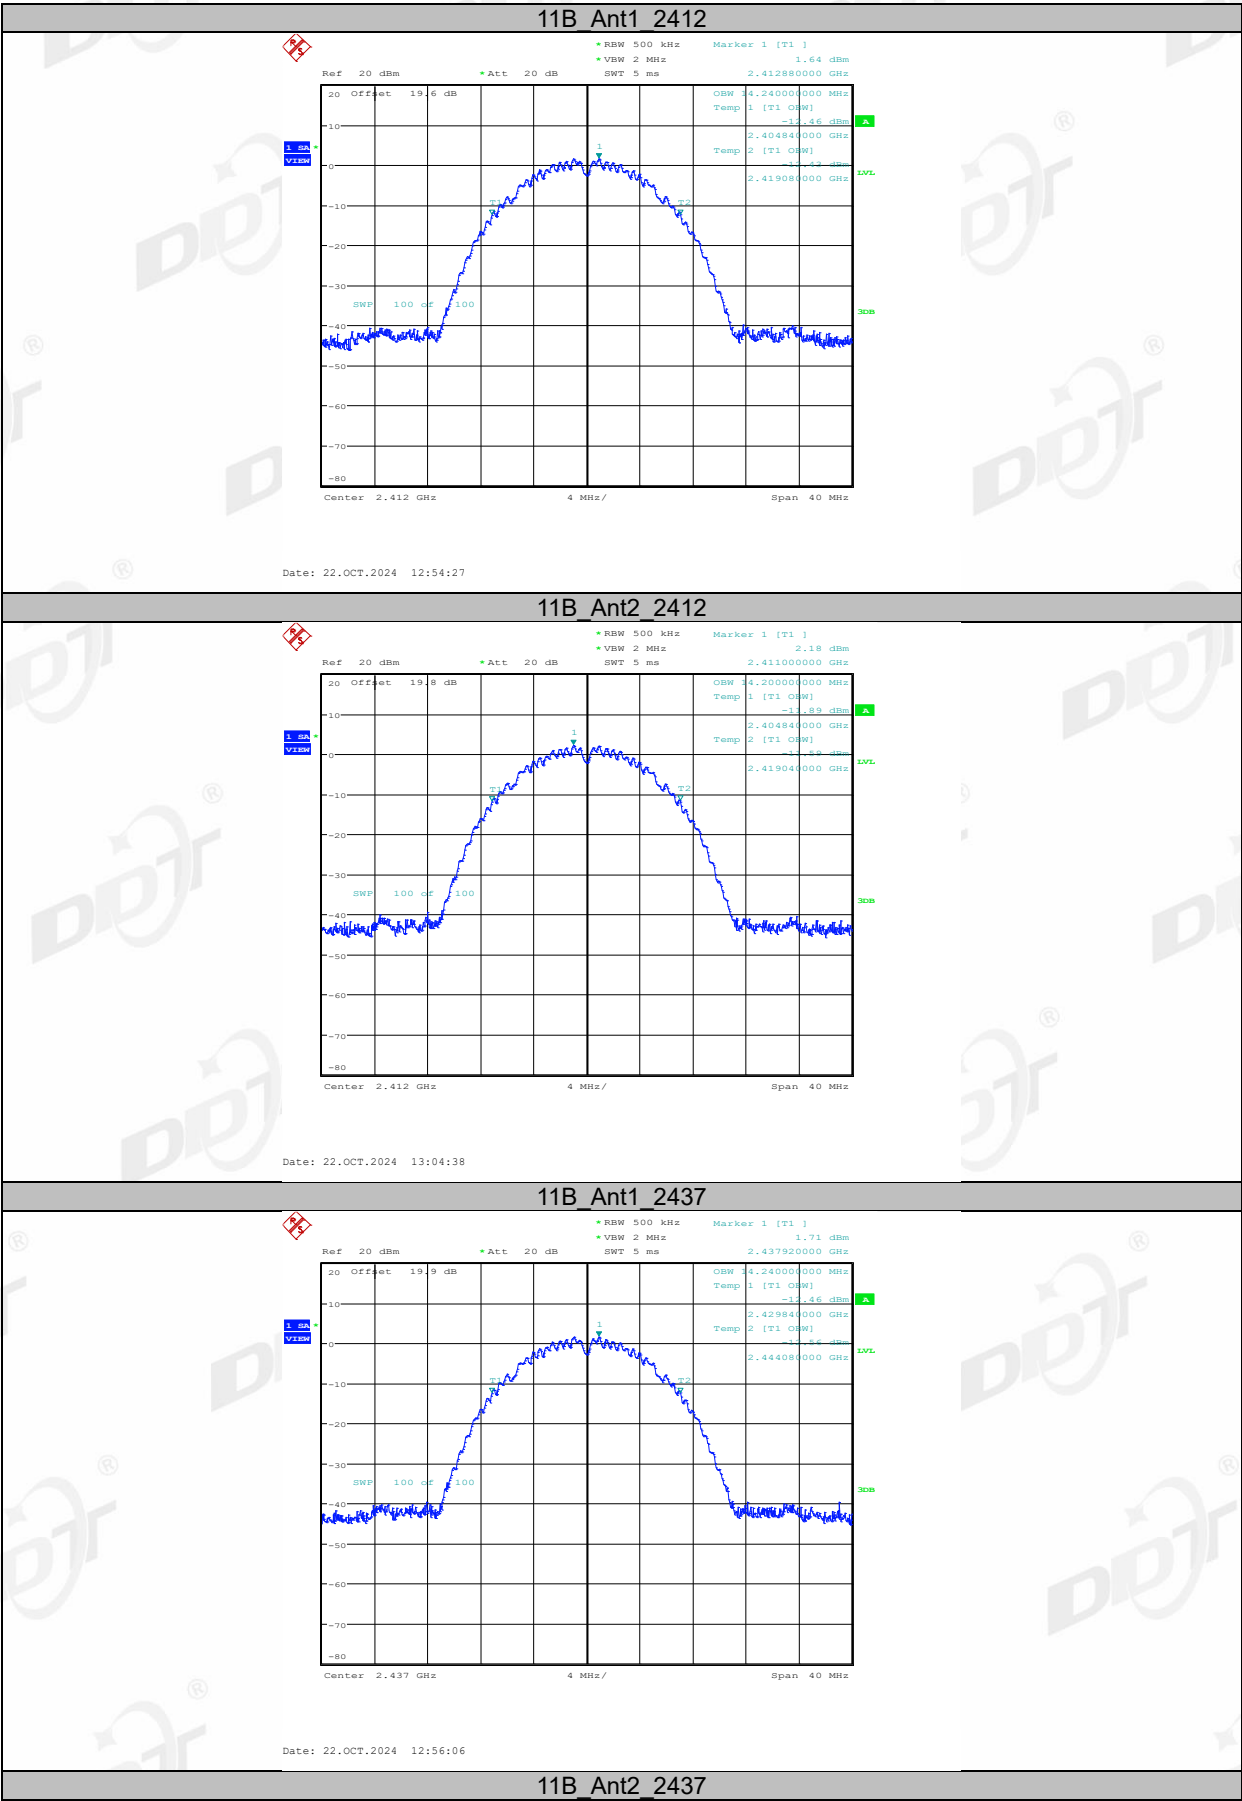


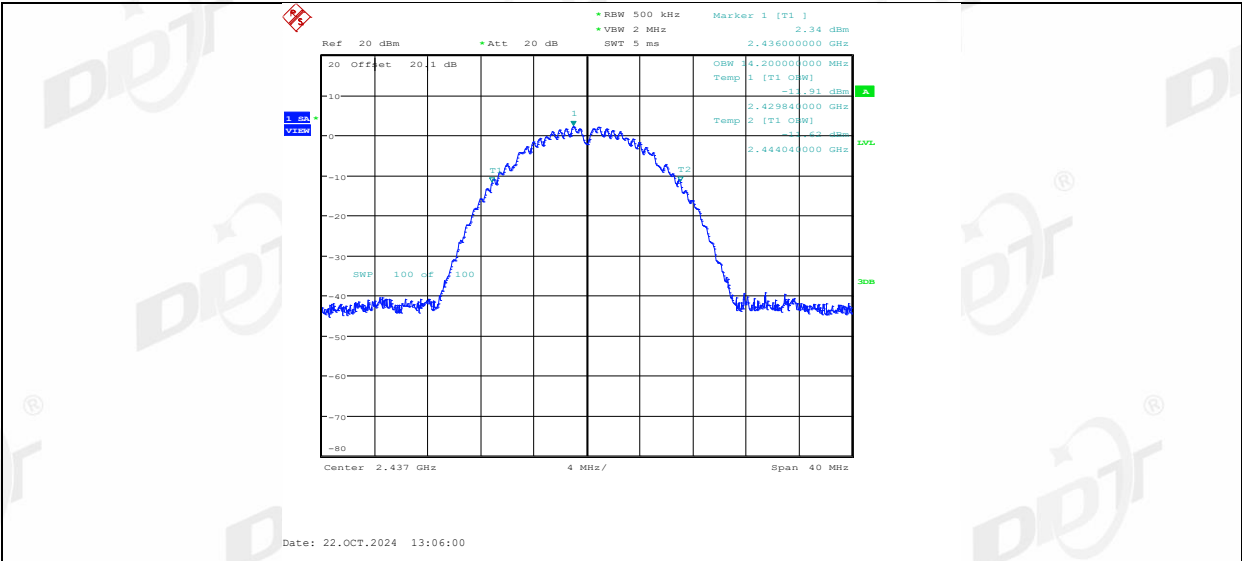




11B_Ant1_2462

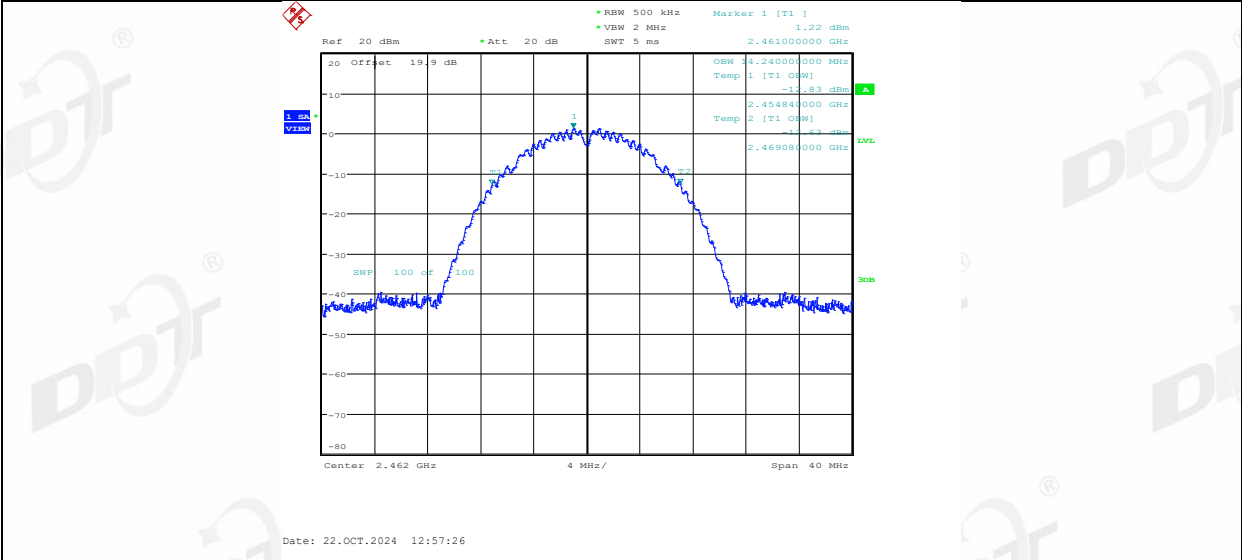


11B_Ant2_2462

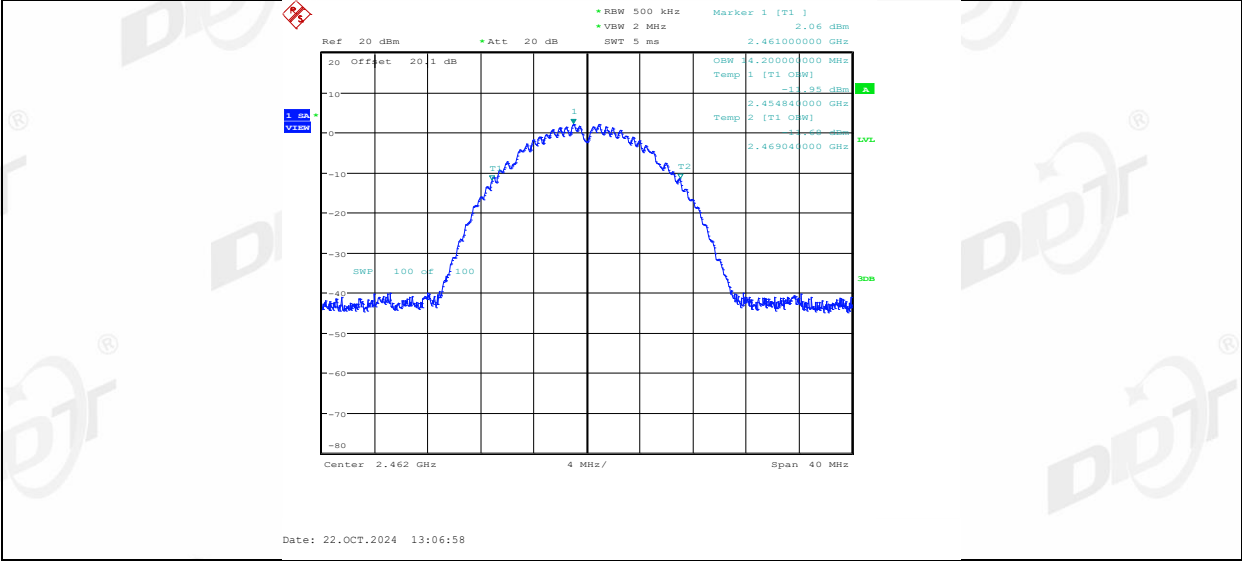


11G_Ant1_2412




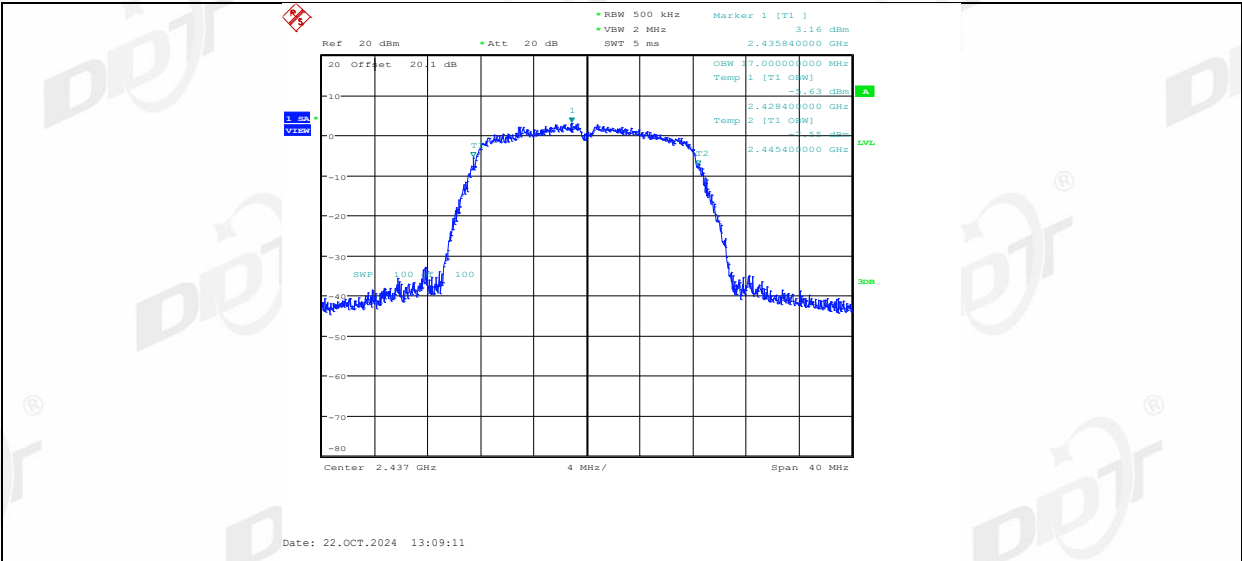


11G_Ant1_2462

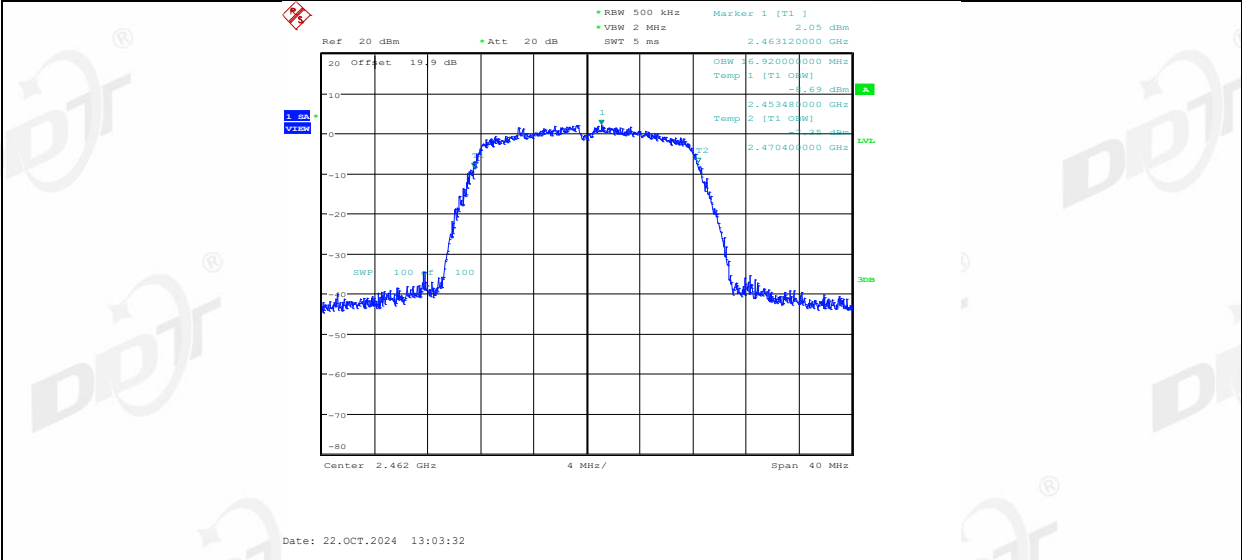


11G_Ant2_2462

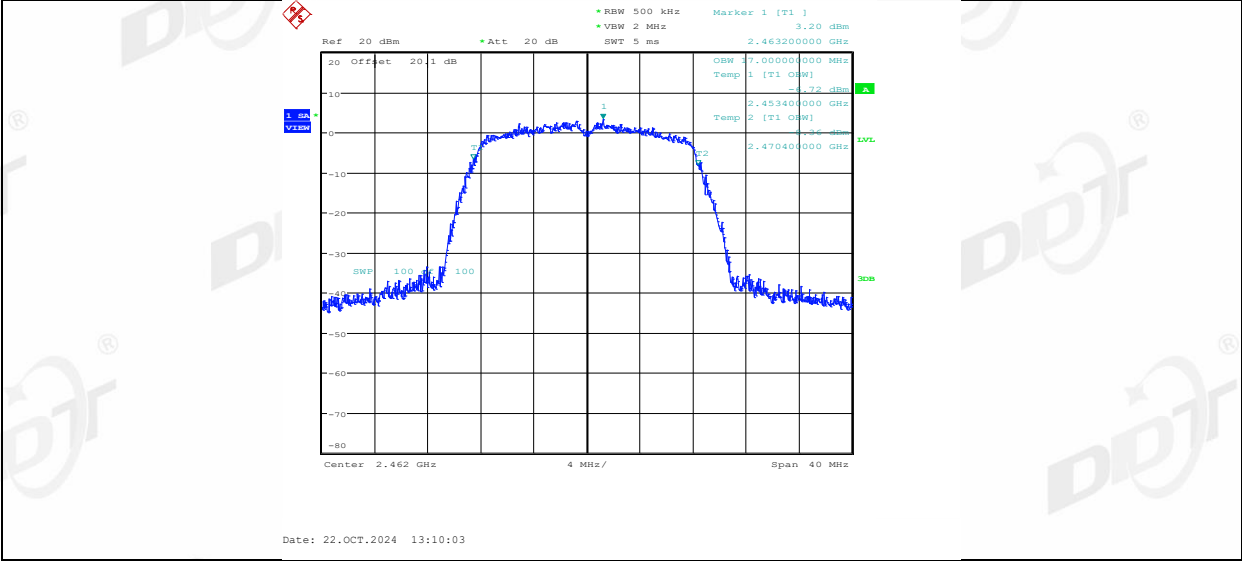


11N20MIMO_Ant1_2412

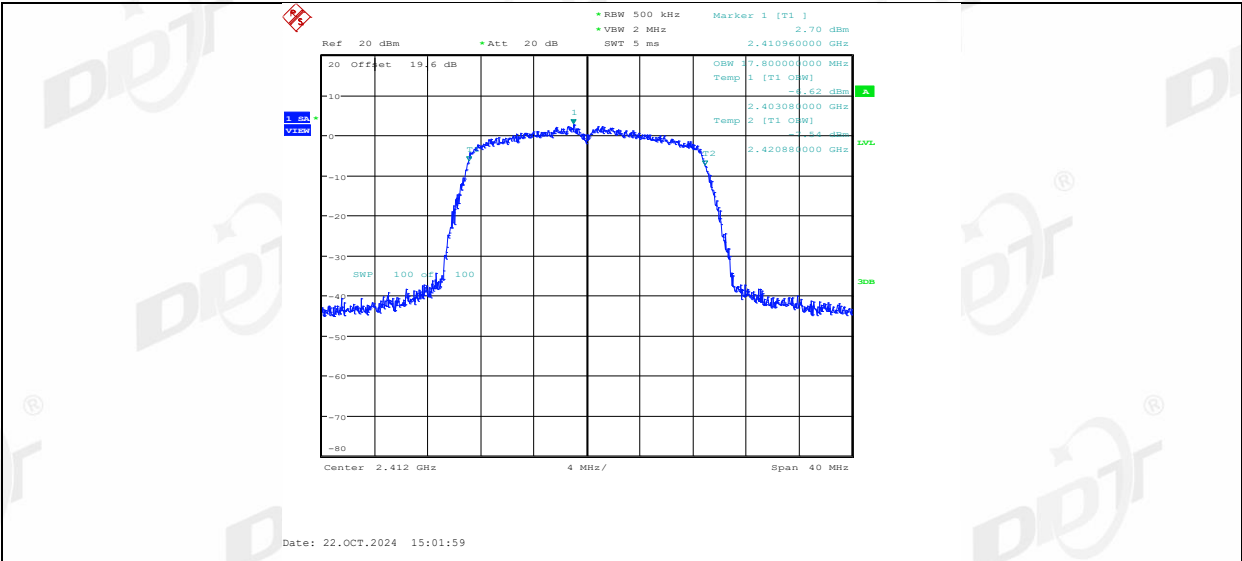


11N20MIMO_Ant2_2412

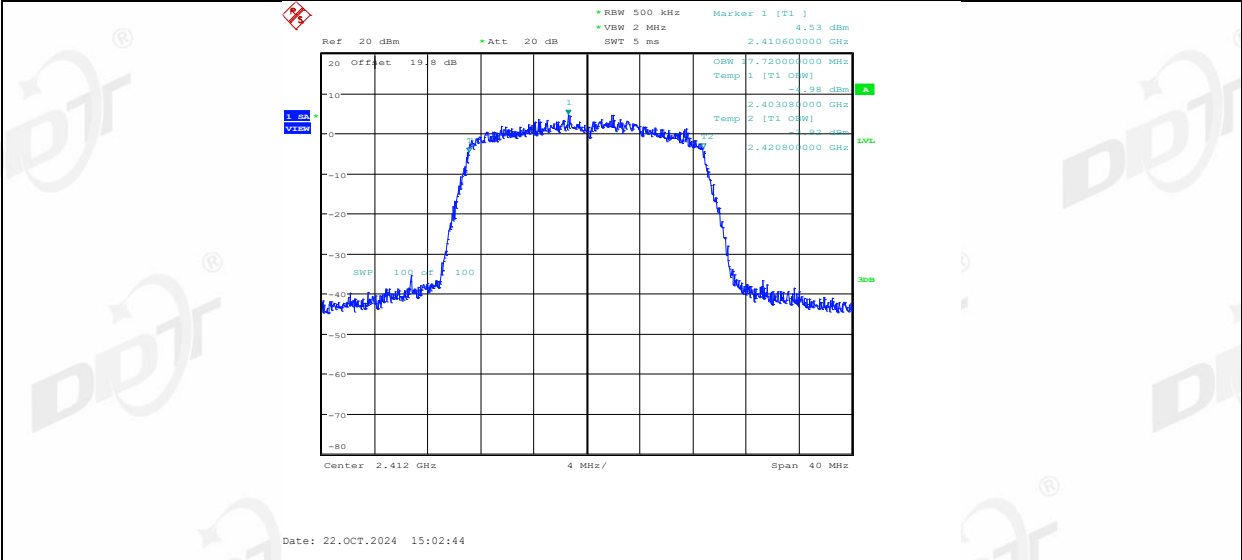


11N20MIMO_Ant1_2437

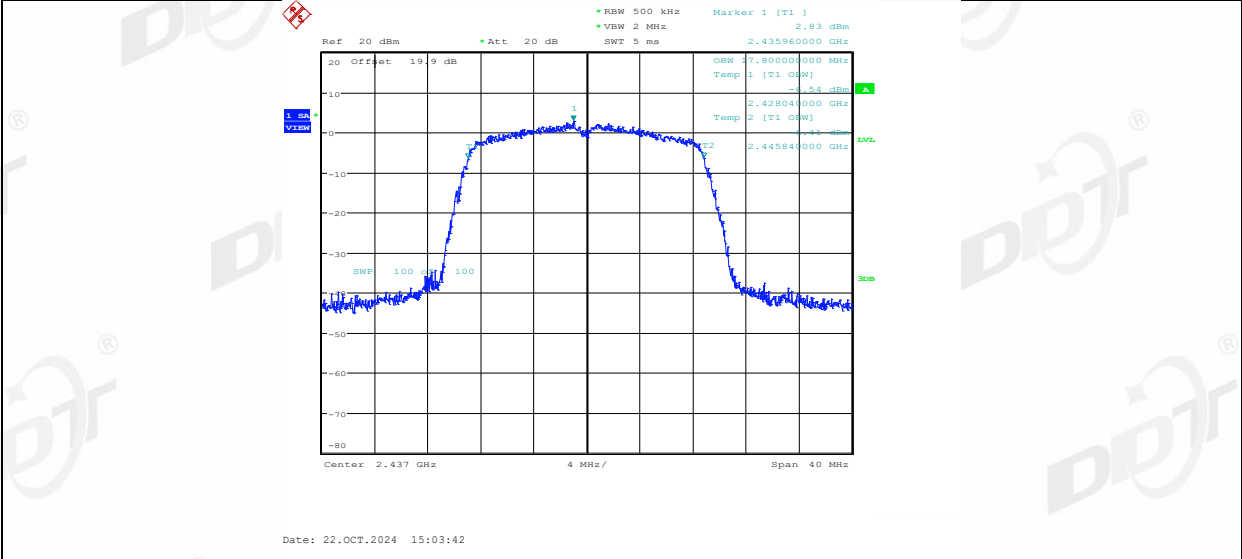


11N20MIMO_Ant2_2437

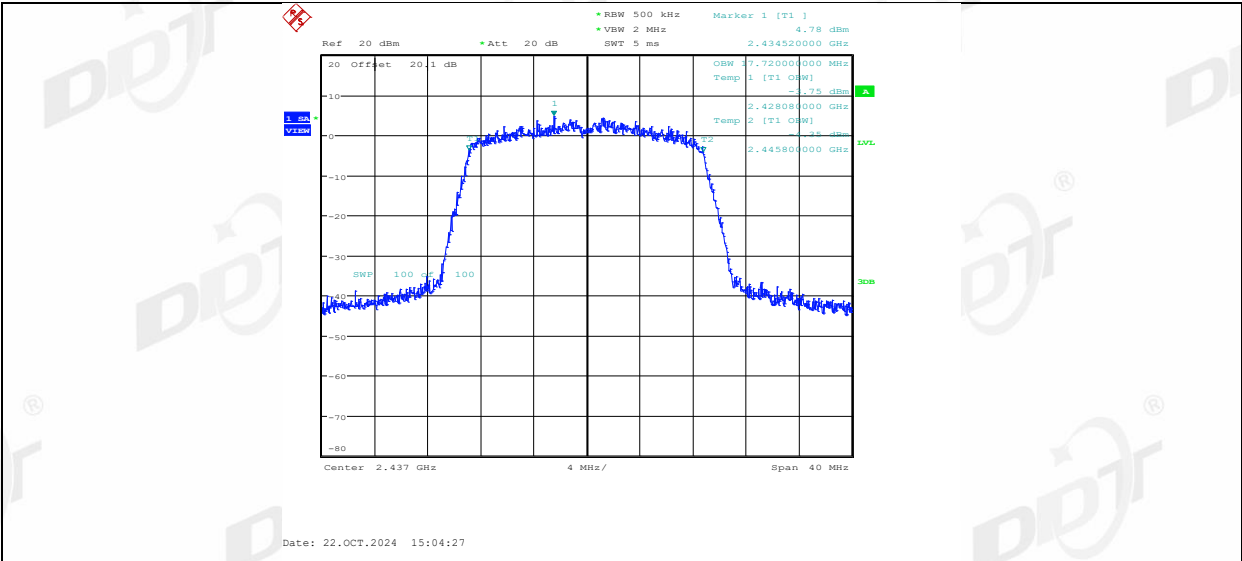


11N20MIMO_Ant1_2462

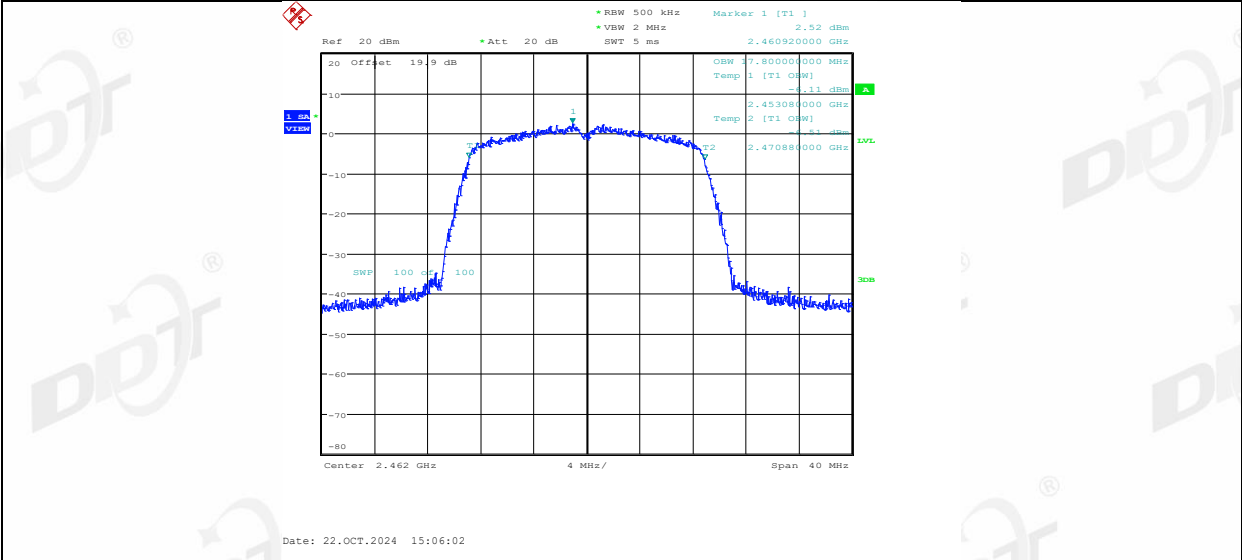


11N20MIMO_Ant2_2462

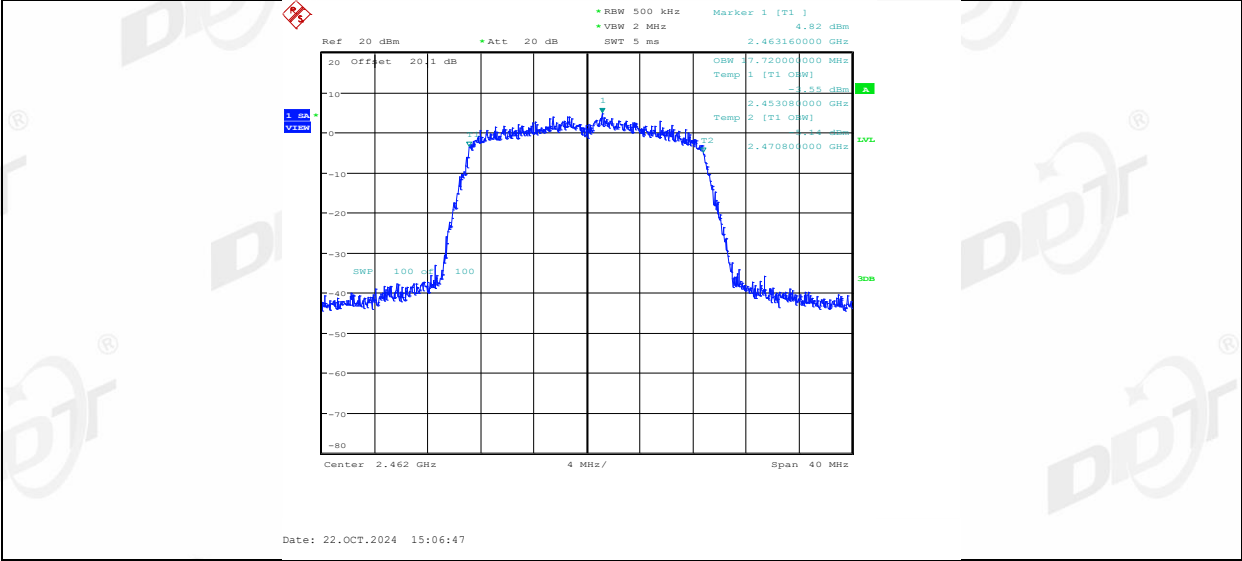


11N40MIMO_Ant1_2422

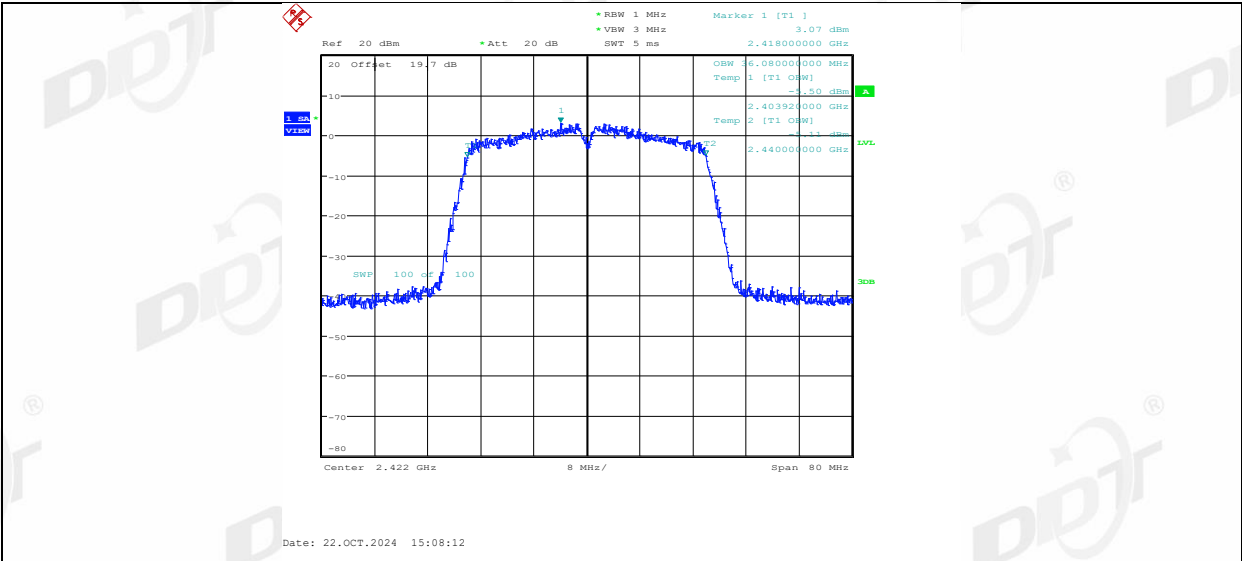


11N40MIMO_Ant2_2422

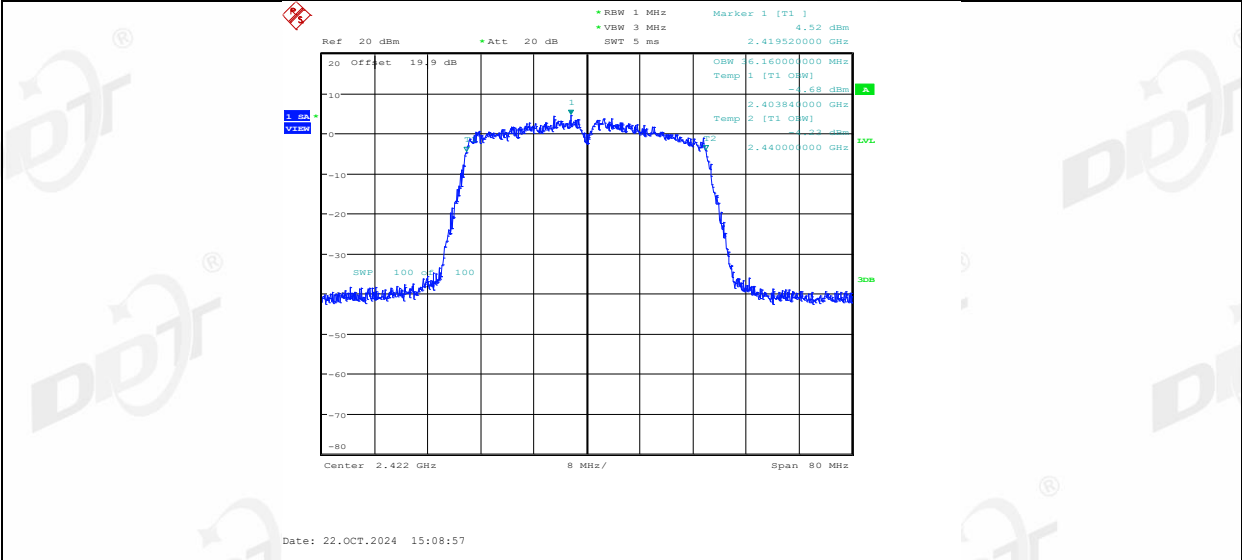


11N40MIMO_Ant1_2437

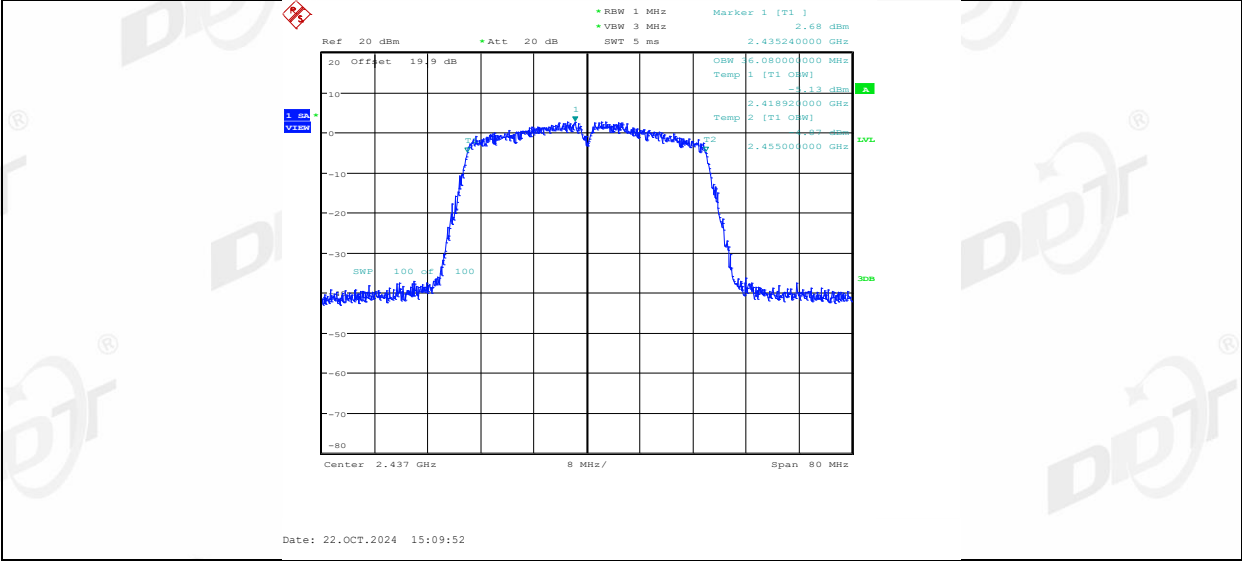


11N40MIMO_Ant2_2437

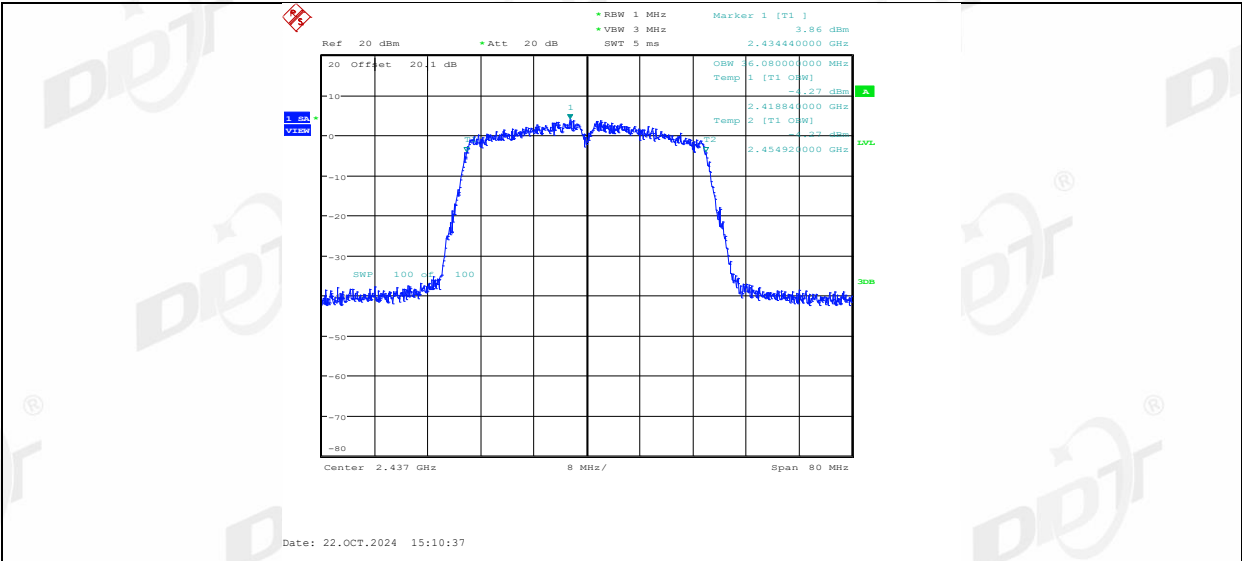

11N40MIMO_Ant1_2452

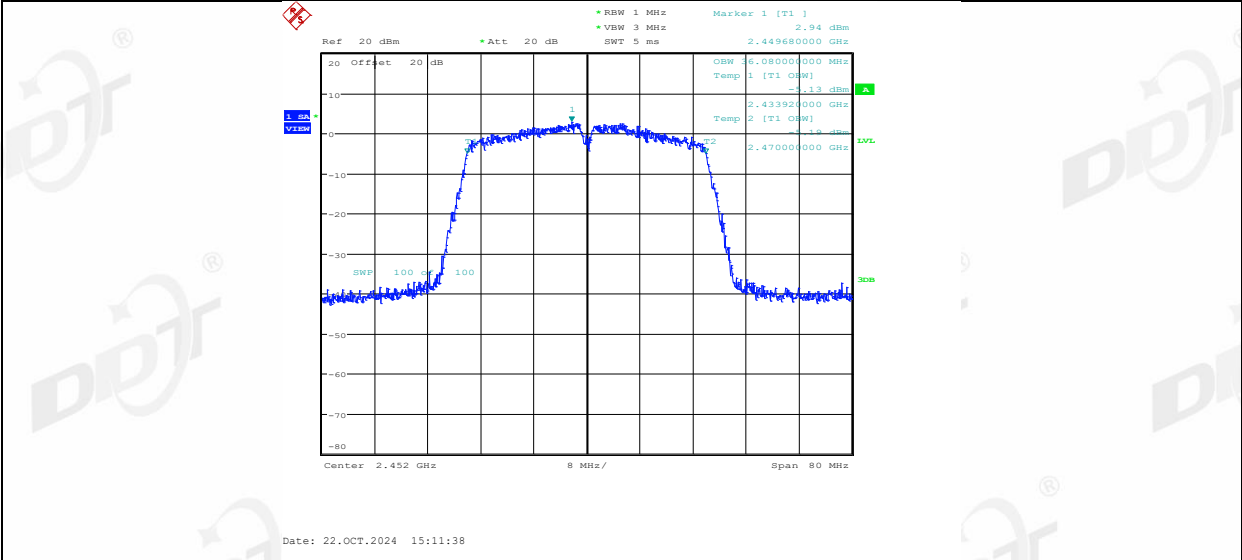


11N40MIMO_Ant2_2452

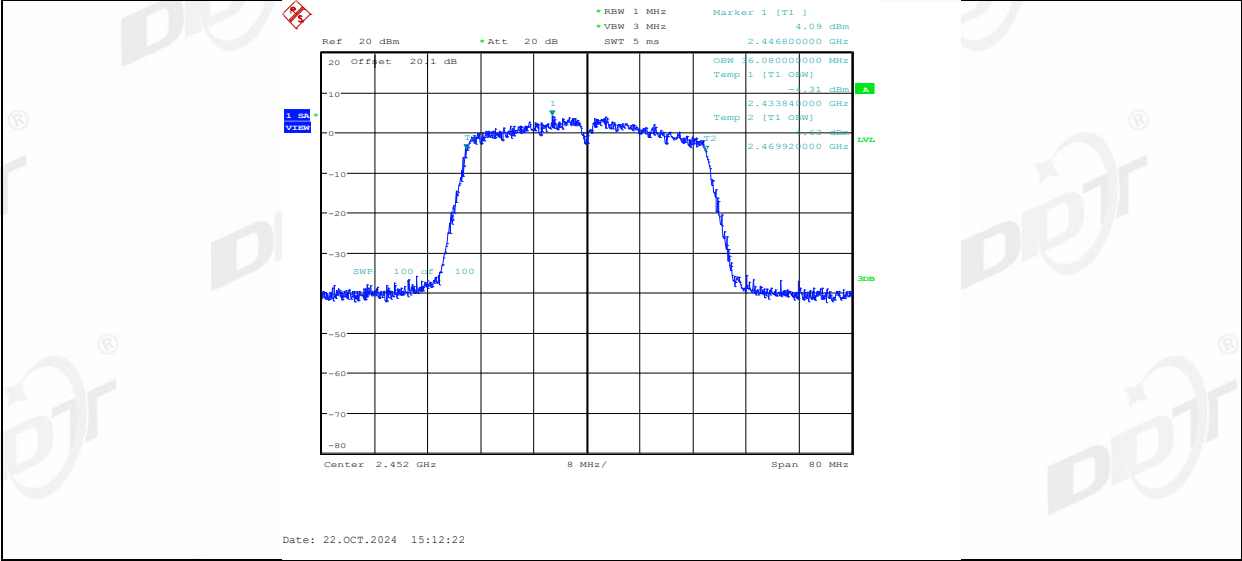

6. Conducted Output Power

6.1. Block diagram of test setup

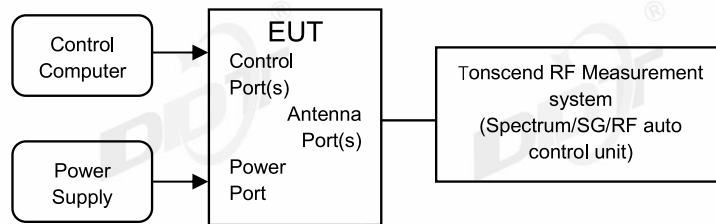

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average


Test Engineer:	Haofeng	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,46.8%RH	Test Date:	2025.01.15~2025.01.16
Test Power Supply:	AC120V/60Hz	Sample Number:	S24091913-002

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	12.94	98.59	0.06	13.00	≤30.00	PASS
	Ant2	2412	12.76	98.14	0.08	12.84	≤30.00	PASS
	Ant1	2437	12.89	98.25	0.08	12.97	≤30.00	PASS
	Ant2	2437	12.63	97.91	0.09	12.72	≤30.00	PASS
	Ant1	2462	13.67	98.36	0.07	13.74	≤30.00	PASS
	Ant2	2462	12.60	98.25	0.08	12.68	≤30.00	PASS
11G	Ant1	2412	10.78	89.81	0.47	11.25	≤30.00	PASS
	Ant2	2412	11.19	89.17	0.50	11.69	≤30.00	PASS
	Ant1	2437	11.71	89.74	0.47	12.18	≤30.00	PASS
	Ant2	2437	11.57	90.32	0.44	12.01	≤30.00	PASS
	Ant1	2462	11.68	90.38	0.44	12.12	≤30.00	PASS
	Ant2	2462	11.61	89.74	0.47	12.08	≤30.00	PASS
11N20MIMO	Ant1	2412	8.65	80.00	0.97	9.62	≤29.50	PASS
	Ant2	2412	8.10	80.00	0.97	9.07	≤29.50	PASS
	total	2412	---	---	---	12.36	≤29.50	PASS
	Ant1	2437	8.61	80.00	0.97	9.58	≤29.50	PASS
	Ant2	2437	8.09	80.00	0.97	9.06	≤29.50	PASS
	total	2437	---	---	---	12.34	≤29.50	PASS
	Ant1	2462	8.51	80.95	0.92	9.43	≤29.50	PASS
	Ant2	2462	8.06	80.95	0.92	8.98	≤29.50	PASS
11N40MIMO	total	2462	---	---	---	12.22	≤29.50	PASS
	Ant1	2422	5.43	68.63	1.63	7.06	≤29.50	PASS
	Ant2	2422	4.87	67.31	1.72	6.59	≤29.50	PASS
	total	2422	---	---	---	9.84	≤29.50	PASS
	Ant1	2437	7.67	67.31	1.72	9.39	≤29.50	PASS
	Ant2	2437	7.23	67.31	1.72	8.95	≤29.50	PASS
	total	2437	---	---	---	12.19	≤29.50	PASS
	Ant1	2452	7.68	67.31	1.72	9.40	≤29.50	PASS
	Ant2	2452	7.17	67.31	1.72	8.89	≤29.50	PASS
	total	2452	---	---	---	12.16	≤29.50	PASS

Note: The Antenna directional gain is 7.5dBi. Conducted Output Power limit is the above limits-(7.5-6)/3 dB

7. Power Spectral Density

7.1. Block diagram of test setup

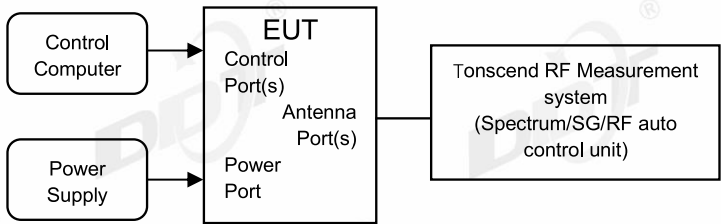

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.

- (5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.4. Test result


Test Engineer:	Haofeng	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,46.8%RH	Test Date:	2025.01.15~2025.01.16
Test Power Supply:	AC120V/60Hz	Sample Number:	S24091913-002


Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.97	≤8.00	PASS
	Ant2	2412	-14.74	≤8.00	PASS
	Ant1	2437	-15.30	≤8.00	PASS
	Ant2	2437	-14.98	≤8.00	PASS
	Ant1	2462	-13.64	≤8.00	PASS
	Ant2	2462	-15.93	≤8.00	PASS
11G	Ant1	2412	-16.03	≤8.00	PASS
	Ant2	2412	-16.18	≤8.00	PASS
	Ant1	2437	-14.78	≤8.00	PASS
	Ant2	2437	-15.59	≤8.00	PASS
	Ant1	2462	-16.20	≤8.00	PASS
	Ant2	2462	-15.94	≤8.00	PASS
11N20MIMO	Ant1	2412	-17.43	≤7.50	PASS
	Ant2	2412	-18.24	≤7.50	PASS
	total	2412	-14.81	≤7.50	PASS
	Ant1	2437	-16.64	≤7.50	PASS
	Ant2	2437	-18.84	≤7.50	PASS
	total	2437	-14.59	≤7.50	PASS
	Ant1	2462	-17.92	≤7.50	PASS
	Ant2	2462	-18.30	≤7.50	PASS
11N40MIMO	total	2462	-15.10	≤7.50	PASS
	Ant1	2422	-29.17	≤7.50	PASS
	Ant2	2422	-28.76	≤7.50	PASS
	total	2422	-25.95	≤7.50	PASS
	Ant1	2437	-26.62	≤7.50	PASS
	Ant2	2437	-26.97	≤7.50	PASS
	total	2437	-23.78	≤7.50	PASS
	Ant1	2452	-27.25	≤7.50	PASS
	Ant2	2452	-27.26	≤7.50	PASS
	total	2452	-24.24	≤7.50	PASS

Note: The Duty Cycle Factor is compensated in the graph.


The Antenna directional gain is 7.5dBi. Power Spectral Density limit is the above limits-(7.5-6)/3 dB

7.5. Test graphs

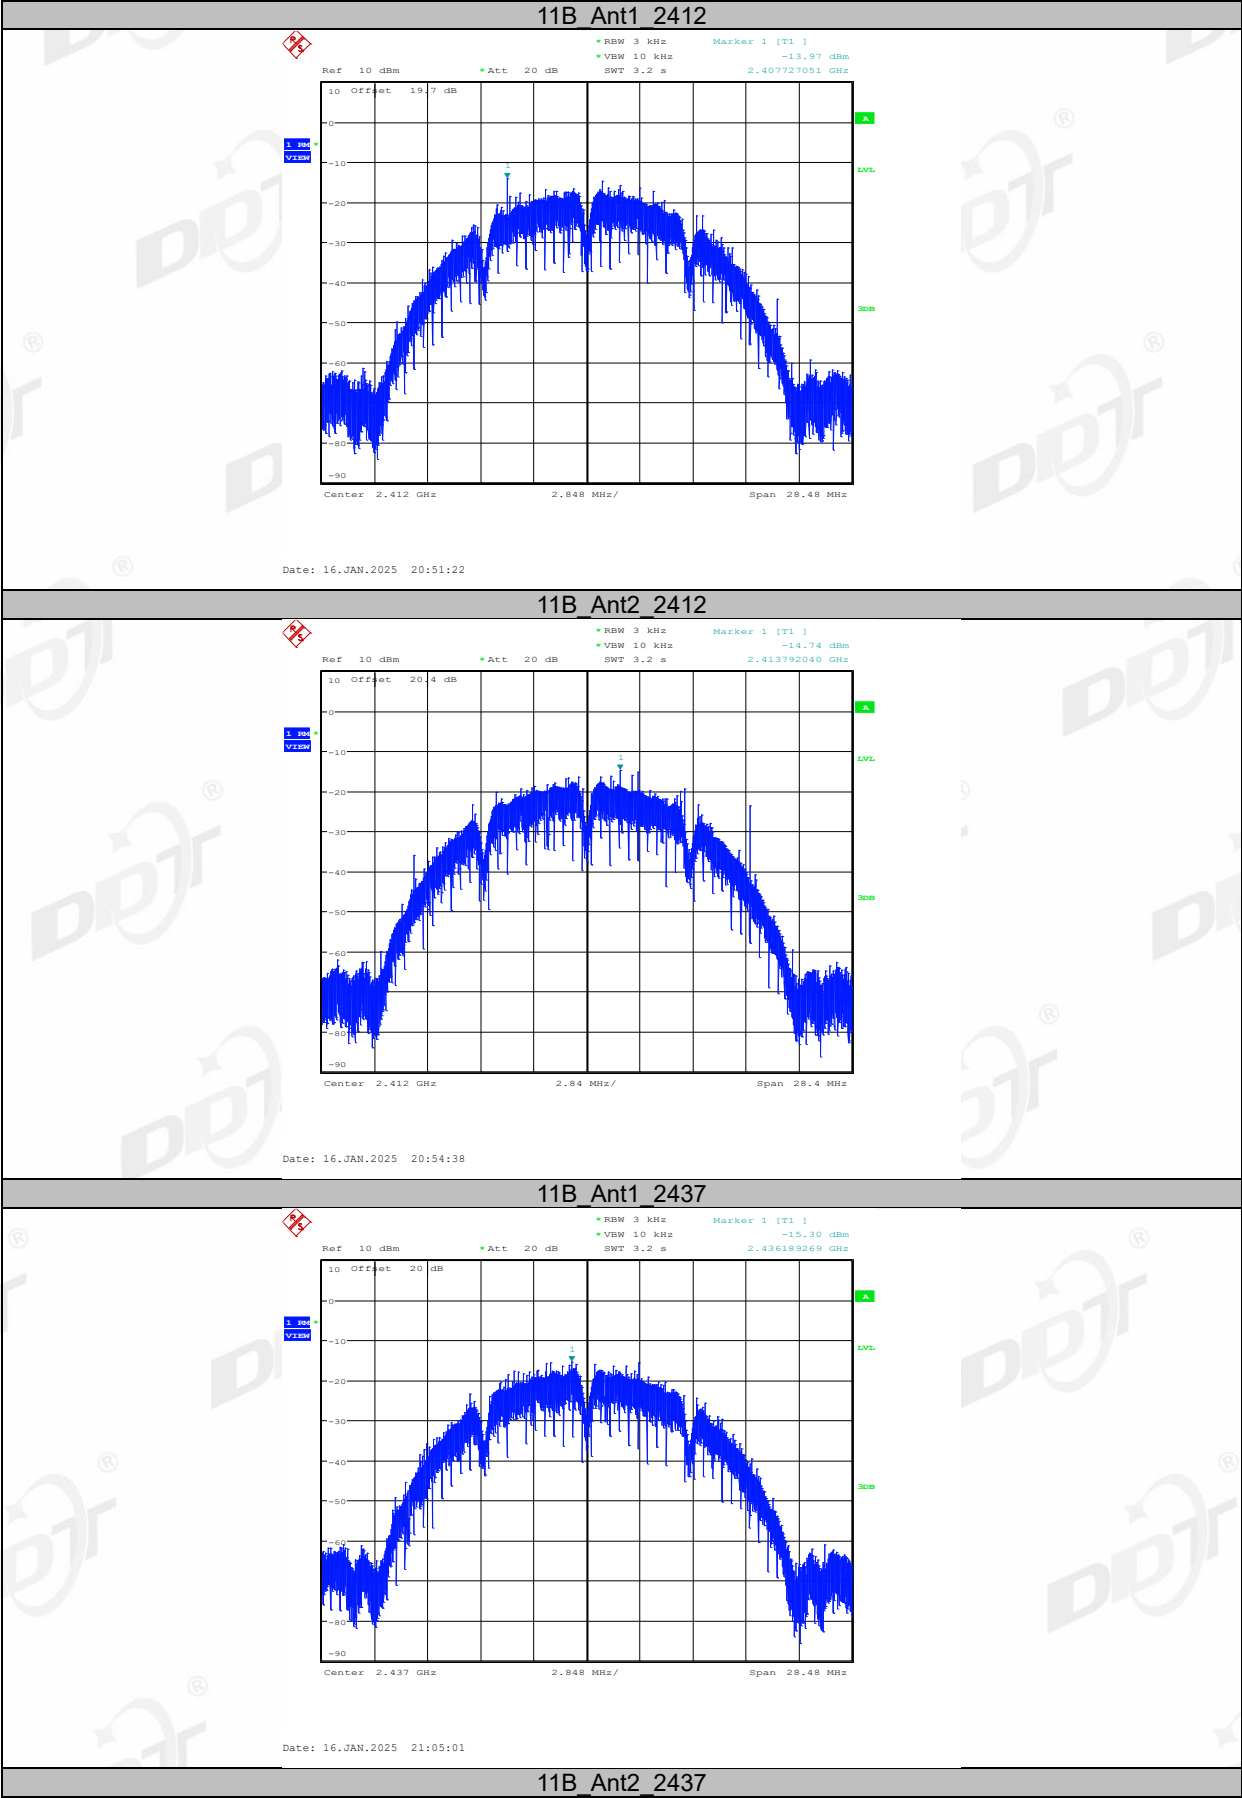


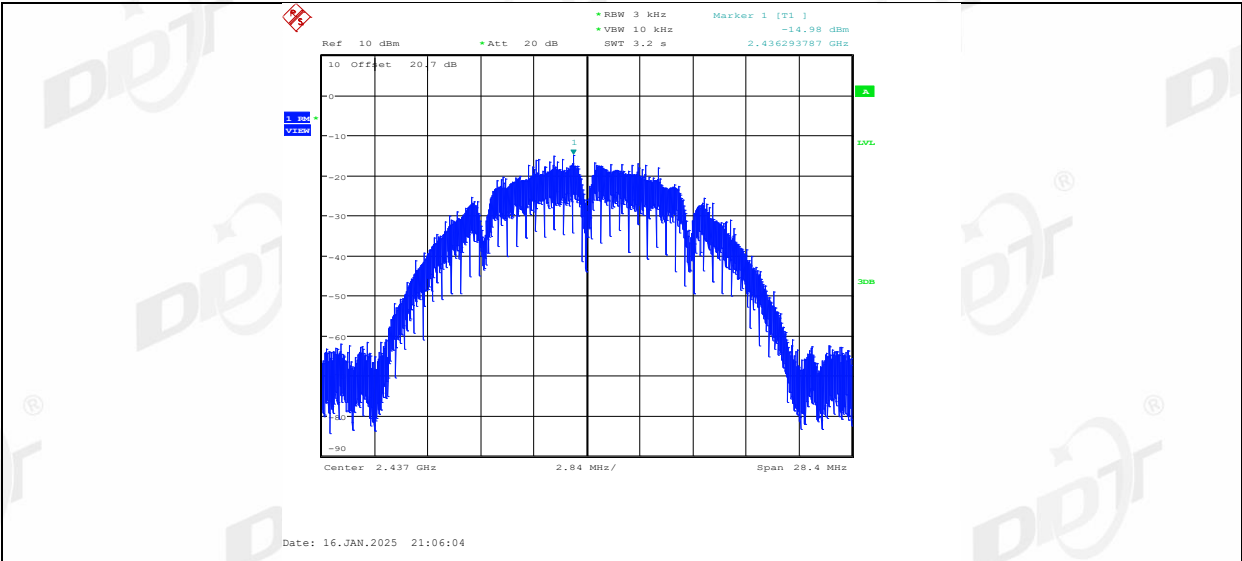


11B_Ant1_2462

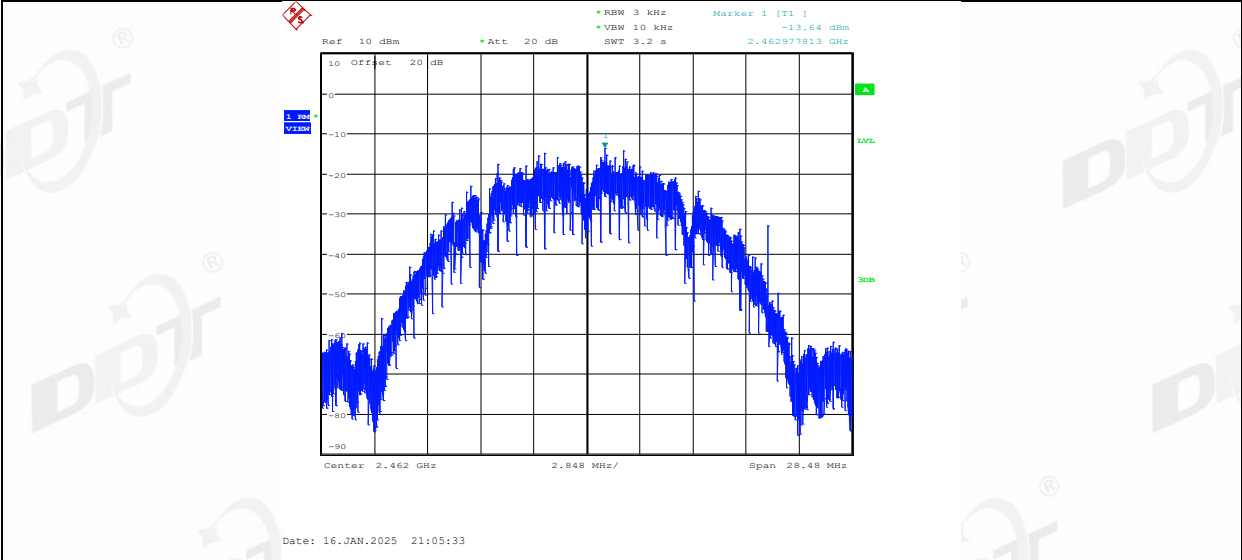


11B_Ant2_2462

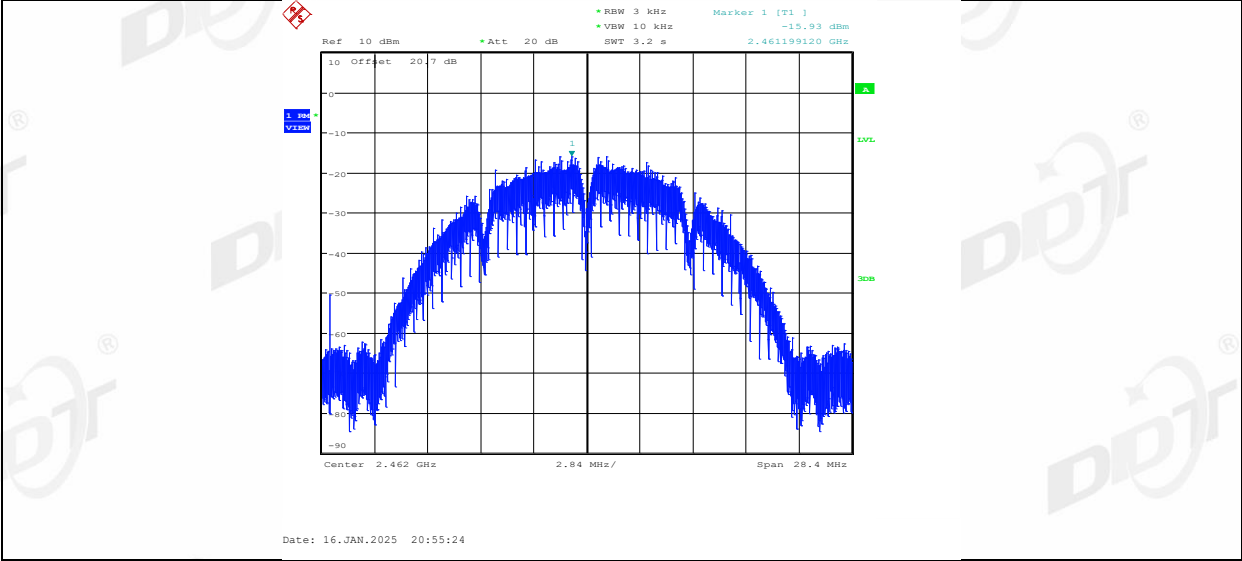


11G_Ant1_2412

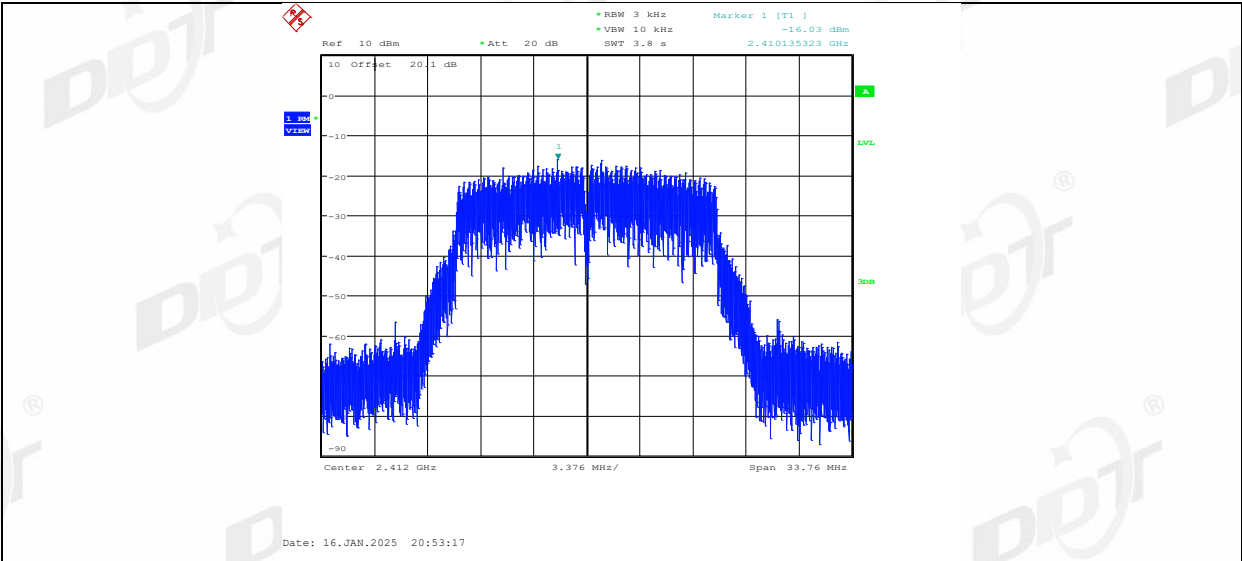


11G_Ant2_2412

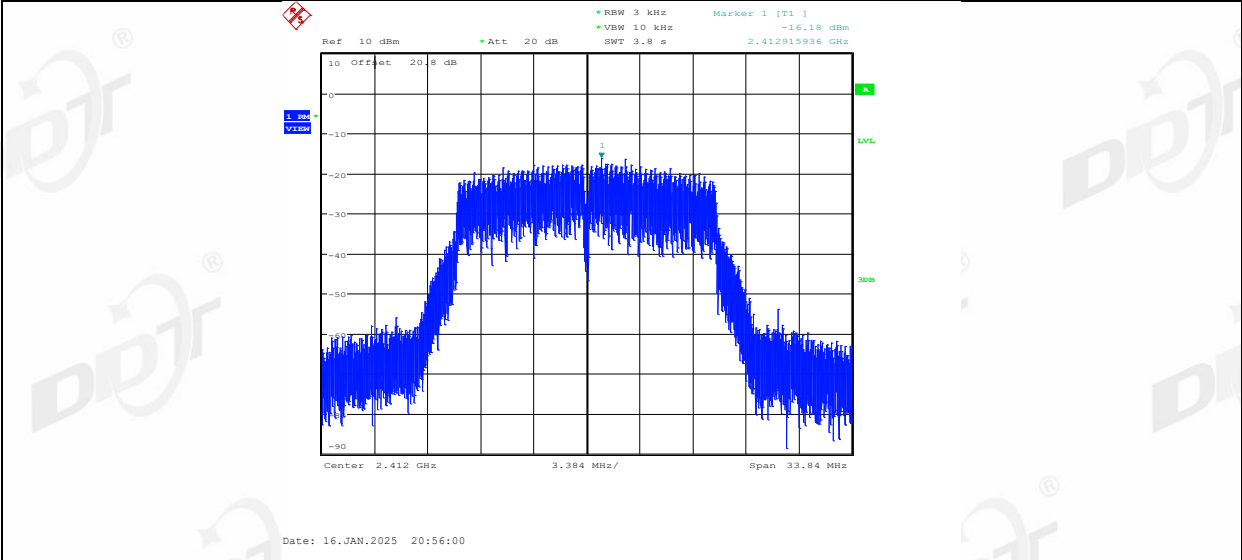


11G_Ant1_2437

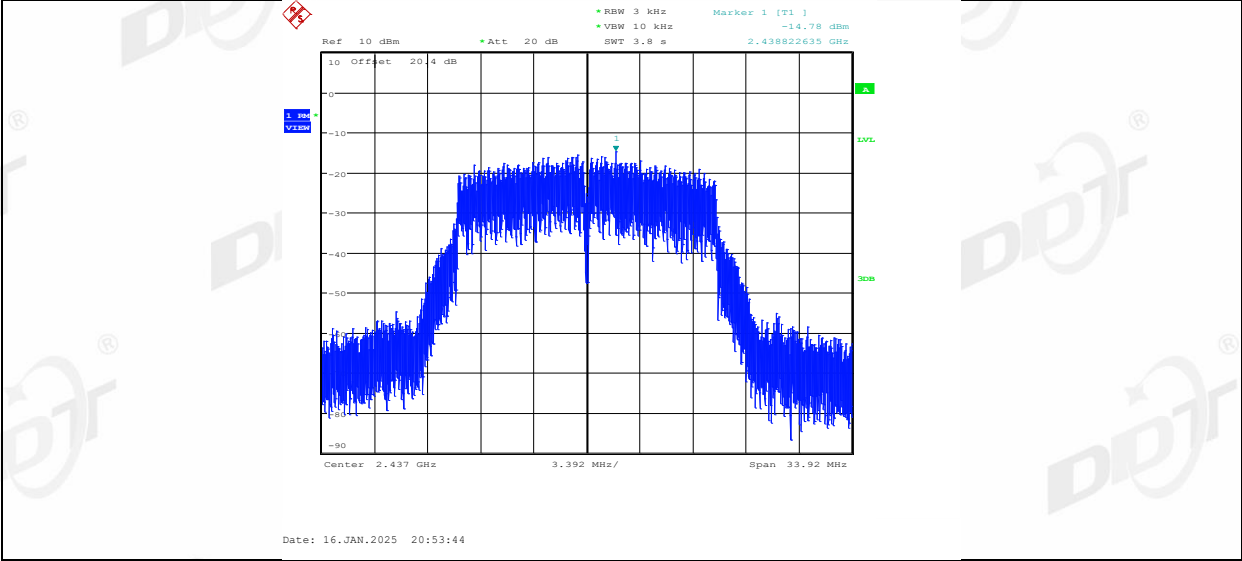


11G_Ant2_2437

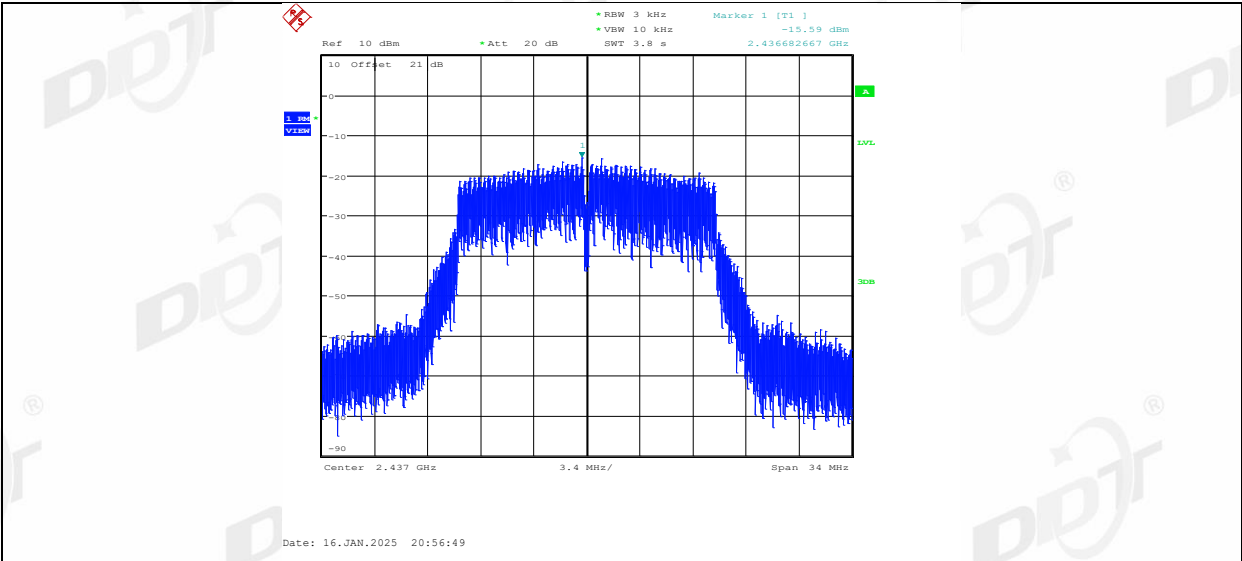


11G_Ant1_2462

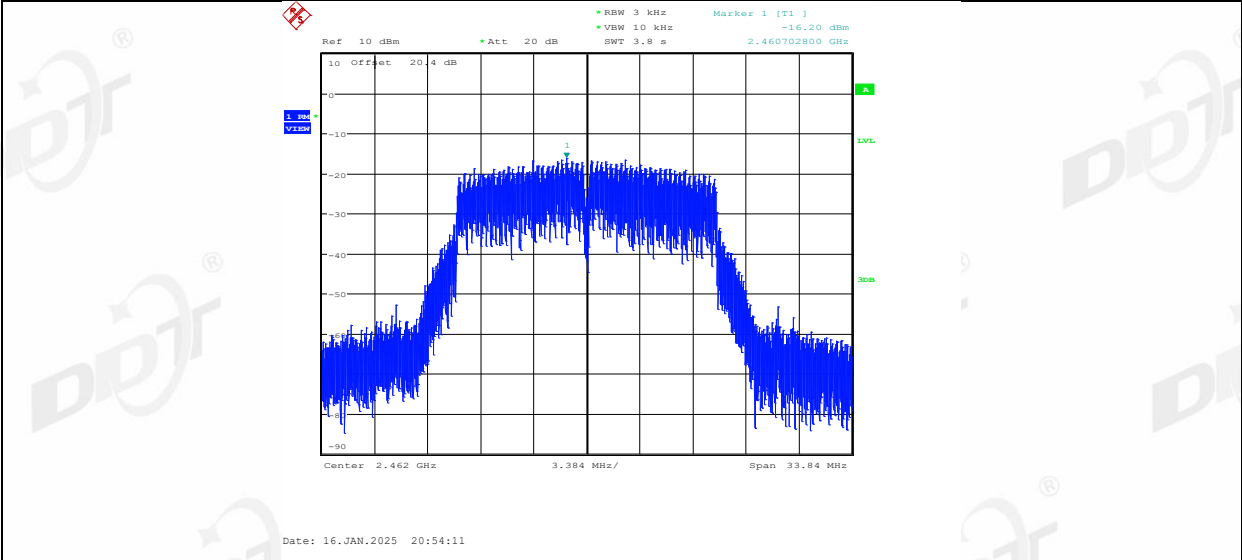


11G_Ant2_2462

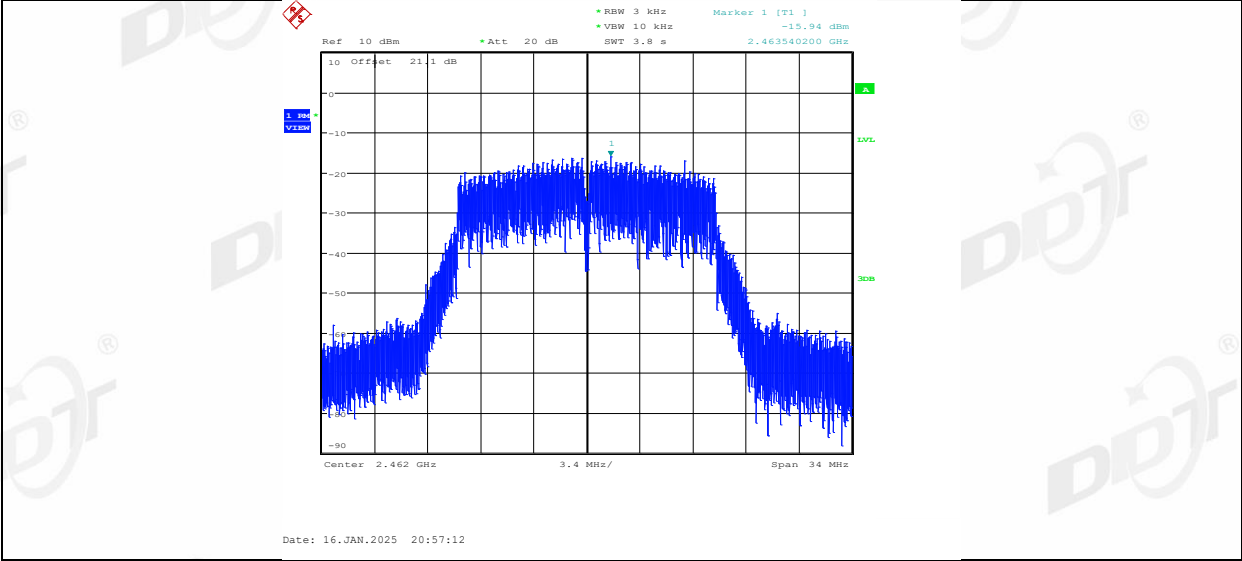


11N20MIMO_Ant1_2412

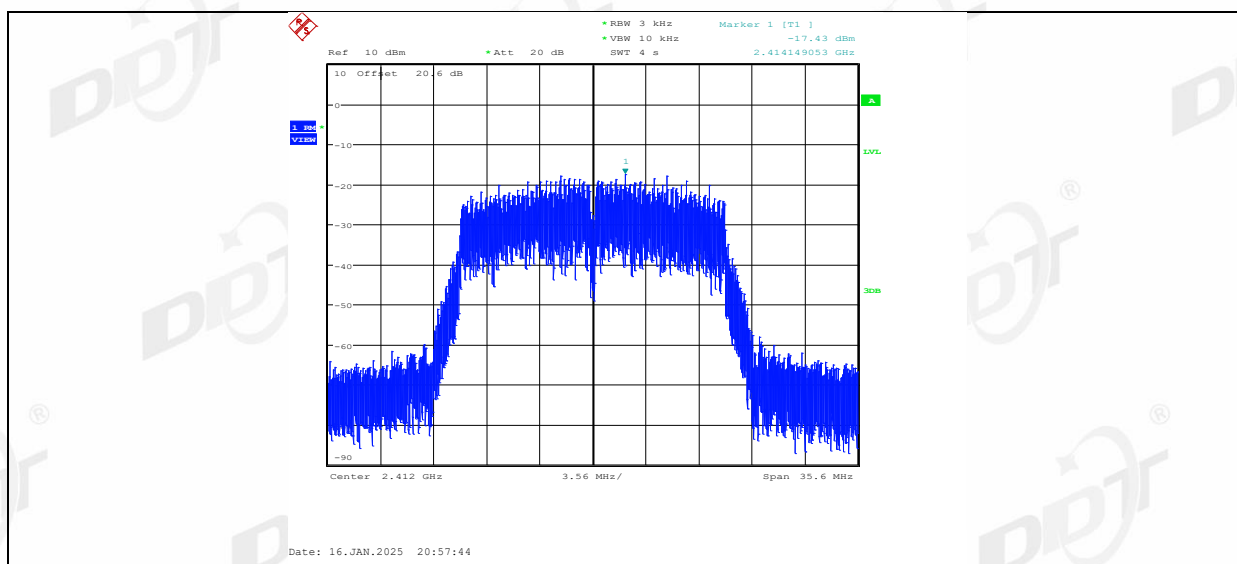


11N20MIMO_Ant2_2412

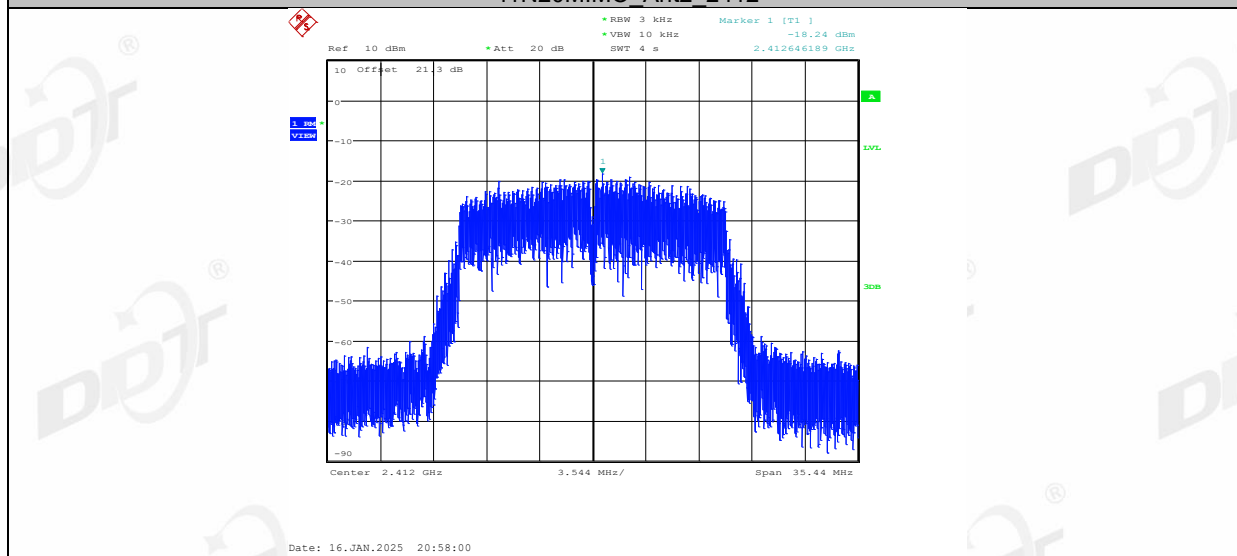


11N20MIMO_Ant1_2437

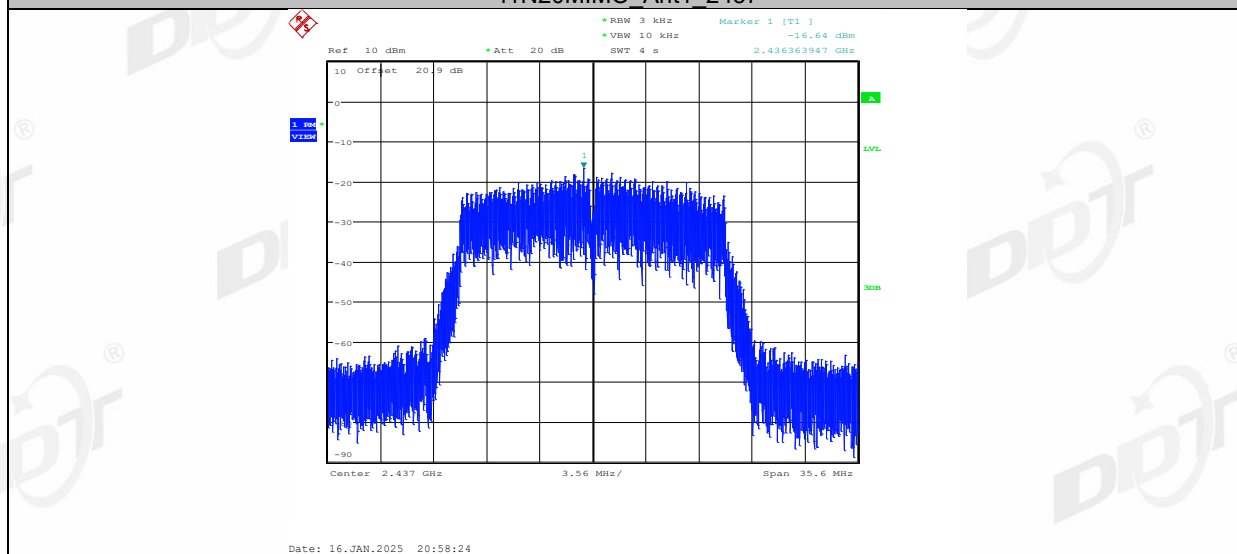


11N20MIMO_Ant2_2437

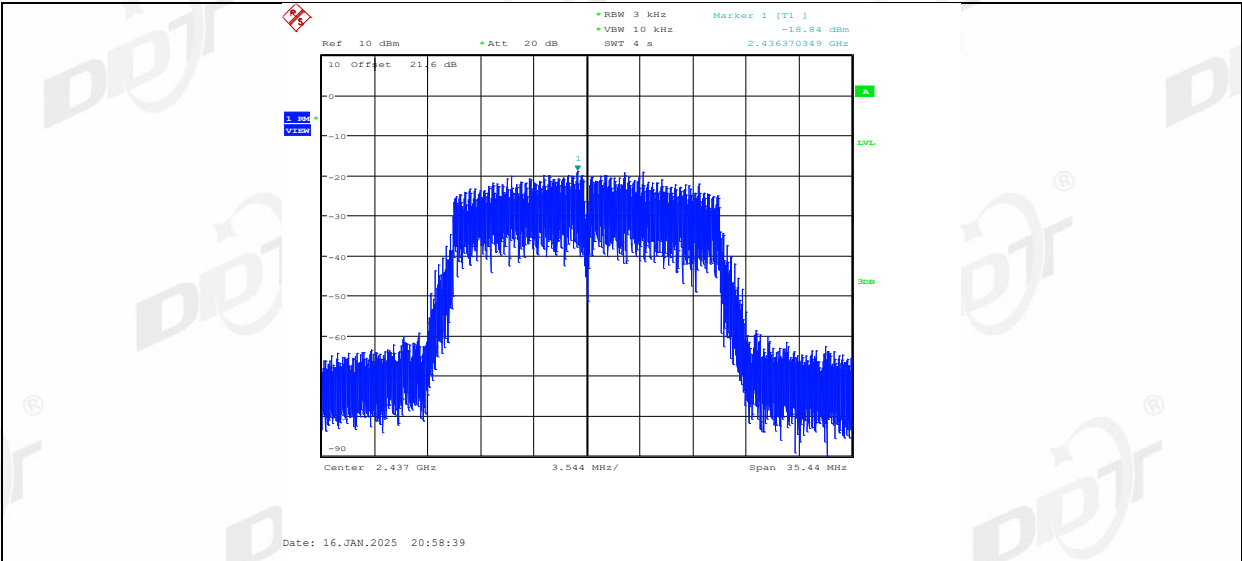


11N20MIMO_Ant1_2462

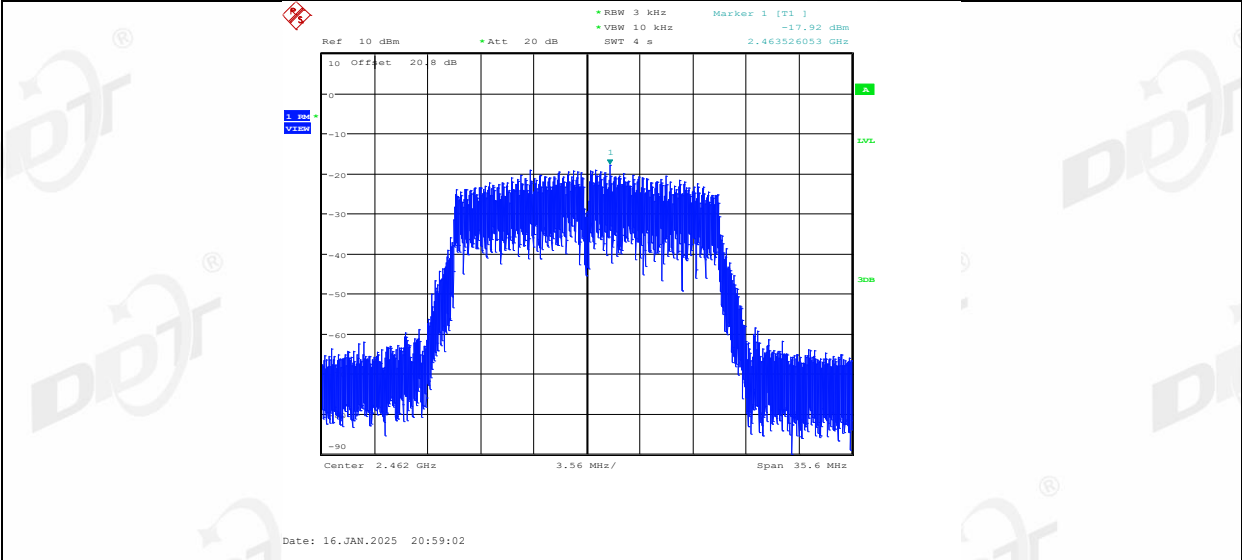


11N20MIMO_Ant2_2462

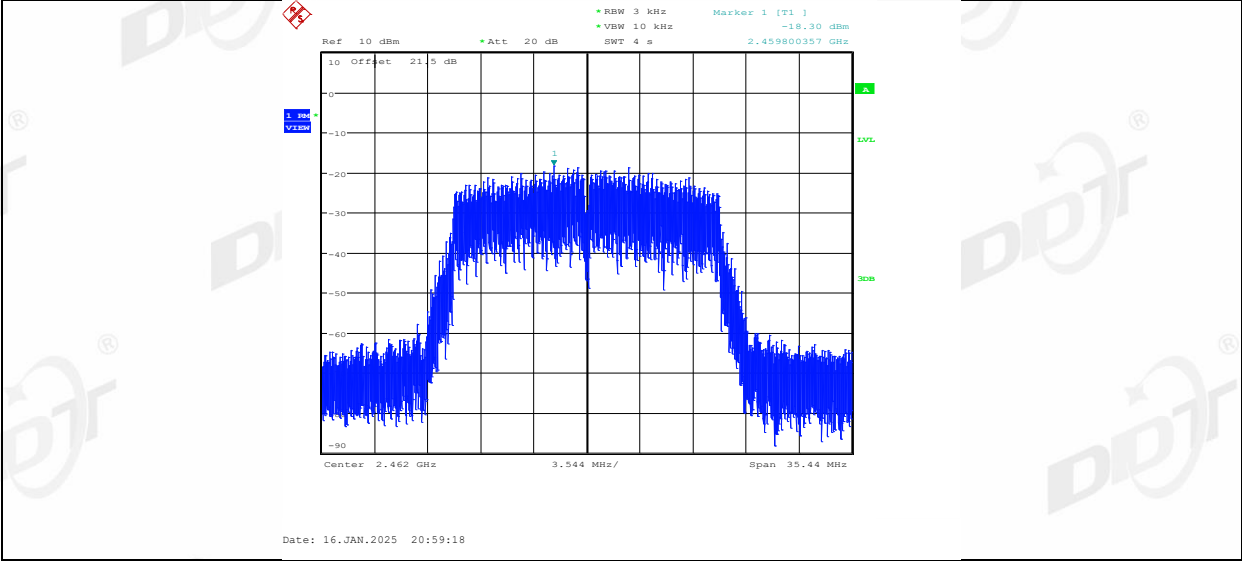


11N40MIMO_Ant1_2422

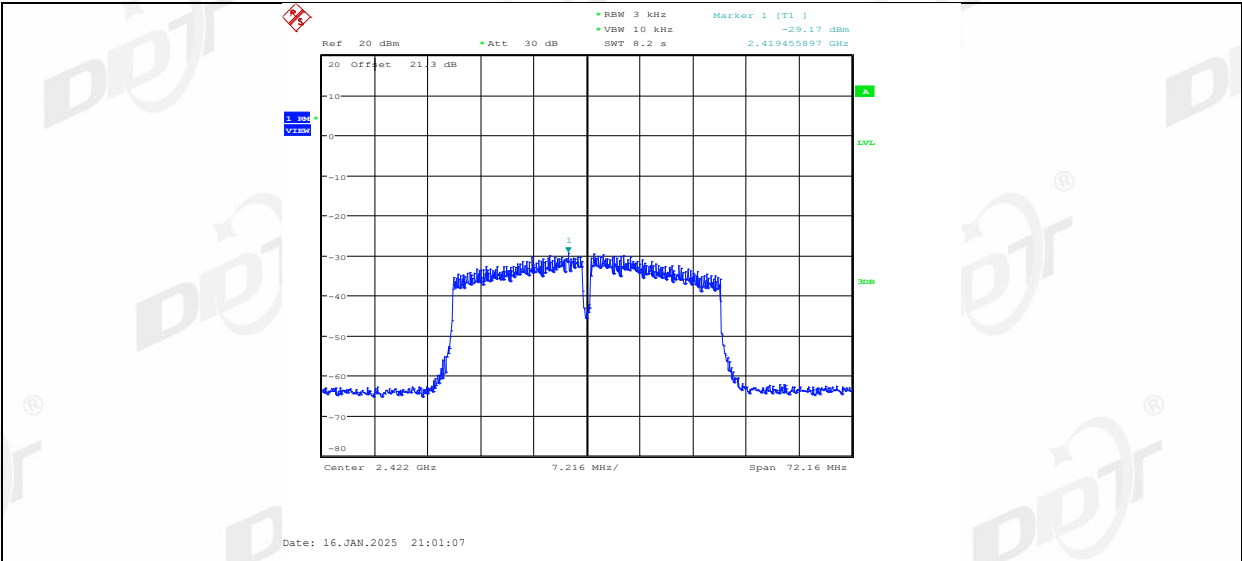


11N40MIMO_Ant2_2422

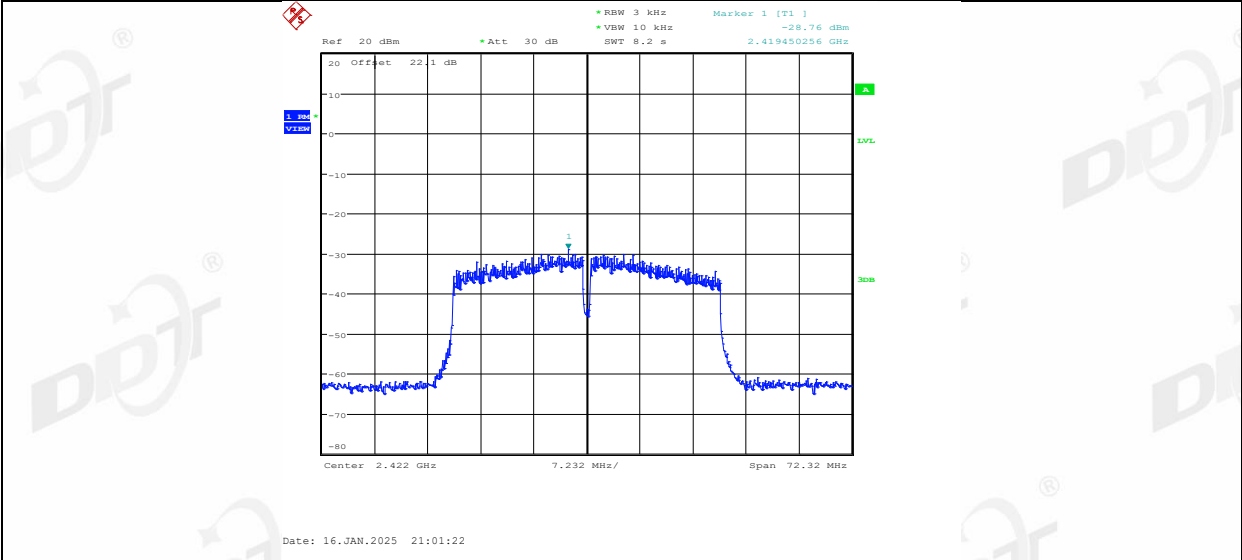


11N40MIMO_Ant1_2437

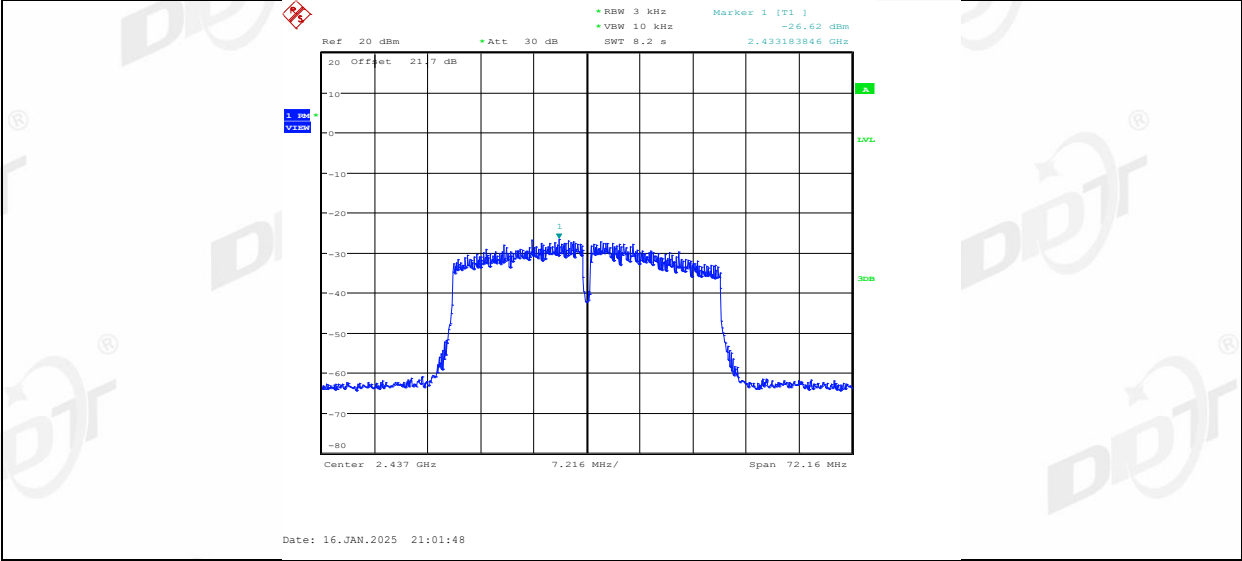

11N40MIMO_Ant2_2437

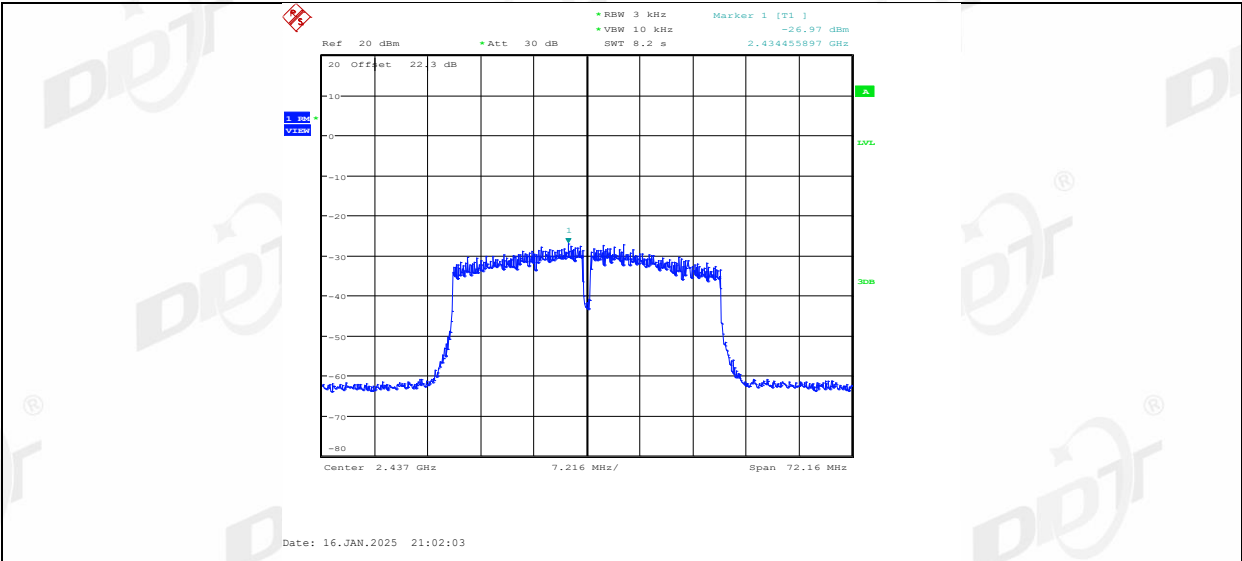

11N40MIMO_Ant1_2452

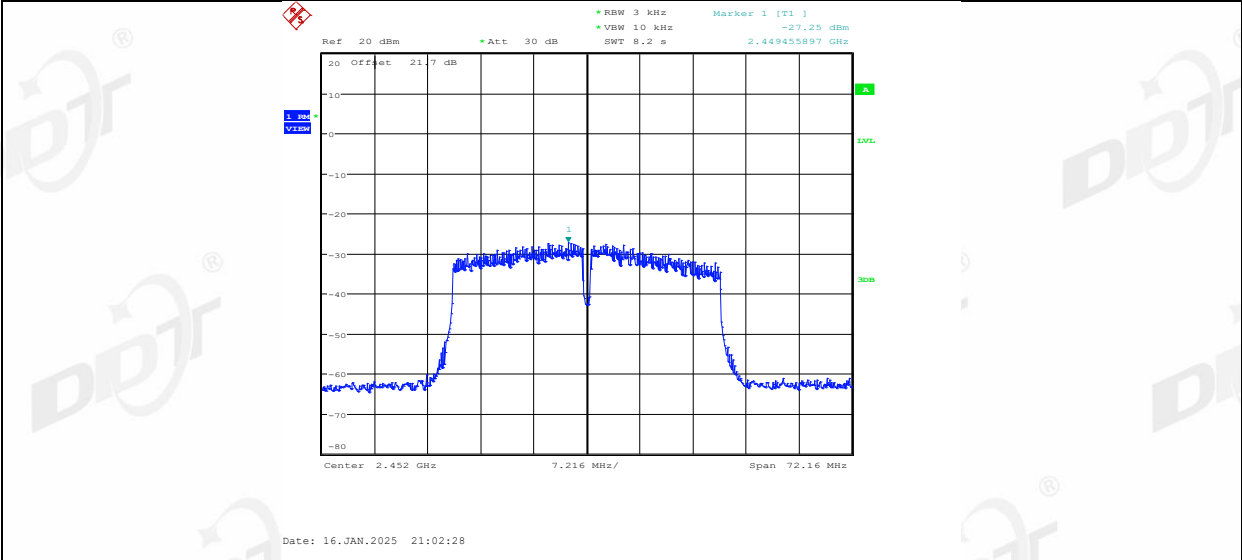

11N40MIMO_Ant2_2452

