

RADIO TEST REPORT

FCC ID: 2AW69-CWYSTR5G

Product: Celerway Stratus 5GR16

Trade Mark: Celerway Stratus 5GR16

Model No.: CWY-M5.3-E5C2W2R16

Family Model: CWY-M5.3-E5C1W2R16

Report No.: S24070504205001

Issue Date: Dec.23, 2024

Prepared for

Celerway Communication AS

Lilleakerveien 2B, 0283 Oslo, Norway

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	SUMMARY OF TEST RESULTS.....	4
2	FACILITIES AND ACCREDITATIONS	5
2.1	FACILITIES.....	5
2.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
2.3	MEASUREMENT UNCERTAINTY	5
3	GENERAL DESCRIPTION OF EUT	6
4	DESCRIPTION OF TEST MODES	8
5	SETUP OF EQUIPMENT UNDER TEST	9
5.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	9
5.2	SUPPORT EQUIPMENT.....	10
5.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
6	TEST REQUIREMENTS.....	13
6.1	CONDUCTED EMISSIONS TEST	13
6.2	RADIATED SPURIOUS EMISSION	20
6.3	6DB BANDWIDTH.....	46
6.4	DUTY CYCLE.....	47
6.5	PEAK OUTPUT POWER.....	49
6.6	POWER SPECTRAL DENSITY	50
6.7	CONDUCTED BAND EDGE MEASUREMENT.....	52
6.8	SPURIOUS RF CONDUCTED EMISSIONS.....	53
6.9	ANTENNA APPLICATION	54
7	TEST RESULTS	55

TEST RESULT CERTIFICATION

Applicant's name	Celerway Communication AS
Address	Lilleakerveien 2B, 0283 Oslo, Norway
Manufacturer's Name	Celerway Communication AS
Address	Lilleakerveien 2B, 0283 Oslo, Norway
Product description	
Product name	Celerway Stratus 5GR16
Model and/or type reference	CWY-M5.3-E5C2W2R16
Family Model	CWY-M5.3-E5C1W2R16
Test Sample Number.....	S220324019002 S240705042005
Date of Test.....	Apr. 20, 2022 ~ Jul.08, 2022 Oct. 01, 2024 ~ Dec.20, 2024

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Note: A Part of test data of this report are based on the original test report

S22032401905001, dated by Jul.08, 2022

Re

Prepared By: Mary Hu
Mary Hu
(Project Engineer)

Reviewed By: Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By: Alex Li
Alex Li
(Manager)

1 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

2 FACILITIES AND ACCREDITATIONS

2.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.10 and CISPR Publication 22.

2.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier: CN0074

FCC- Accredited : Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.
No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

2.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	3.6dB
2	RF power, conducted	0.16dB
3	Spurious emissions, conducted	0.21dB
4	All emissions, radiated(30MHz~1GHz)	5.2dB
5	All emissions, radiated(1GHz~6GHz)	5.1dB
6	All emissions, radiated(>6GHz)	5.1dB
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$
9	All emissions, radiated(9KHz~30MHz)	5.2dB

3 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Celerway Stratus 5GR16
Trade Mark	Celerway Stratus 5GR16
FCC ID	2AW69-CWYSTR5G
Model No.	CWY-M5.3-E5C2W2R16
Family Model	CWY-M5.3-E5C1W2R16
Model Difference	All models have the same circuitry, where the CWY-M5.3-E5C2W2R16 having two NR/LTE/WCDMA modules installed and the CWY-M5.3-E5C1W2R16 having only one.
Operating Frequency	2402MHz~2480MHz
Modulation	GFSK
Number of Channels	40 Channels
Antenna Type	External Antenna
Antenna Gain	5dBi
Adapter	Model: XDJ961D-240400 Input: 100-240V~50/60Hz 2.0A Output: 24V---4.0A 96.0W
Battery	N/A
Power supply	DC 56V from POE port or DC 24V from Adapter.
HW Version	V1.3
SW Version	V1.7.0-8

Note 1: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Note 2: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

[illegible]

4 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps/2Mbps for GFSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2404
...	...
19	2440
20	2442
...	...
38	2478
39	2480

Note: $f_c = 2402\text{MHz} + k \times 2\text{MHz}$ $k=0$ to 39

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Test Cases	
Test Item	Data Rate/ Modulation
AC Conducted Emission	Mode 1: normal link mode
Radiated Test Cases	Mode 1: normal link mode
	Mode 2: GFSK Tx Ch00_2402MHz
	Mode 3: GFSK Tx Ch19_2440MHz
	Mode 4: GFSK Tx Ch39_2480MHz
Conducted Test Cases	Mode 2: GFSK Tx Ch00_2402MHz
	Mode 3: GFSK Tx Ch19_2440MHz
	Mode 4: GFSK Tx Ch39_2480MHz


Note:

- The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode(duty cycle =100% during the test)
- AC power line Conducted Emission was tested under maximum output power.
- For radiated test cases, the worst mode data rate 2Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.


5 SETUP OF EQUIPMENT UNDER TEST

5.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

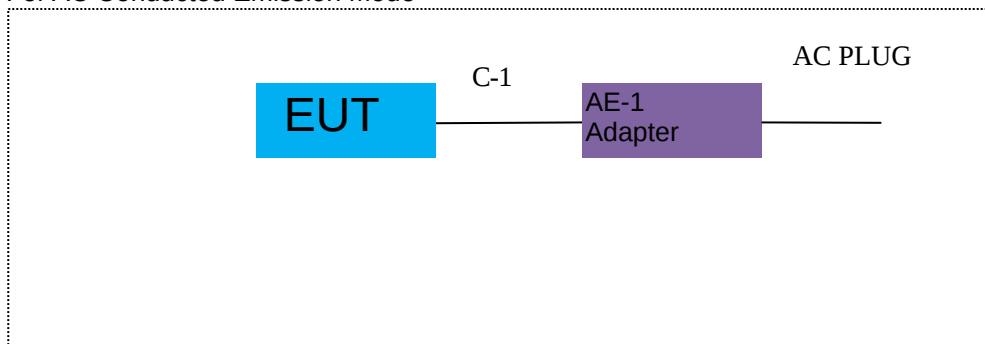

For Radiated Test Cases

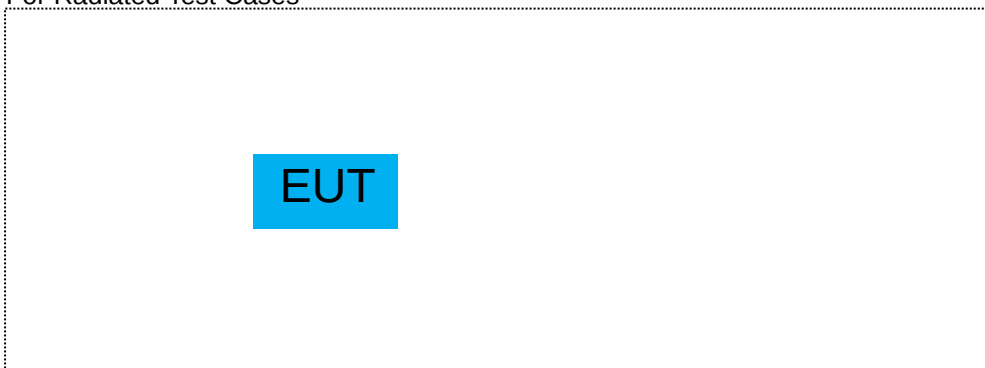

For Conducted Test Cases

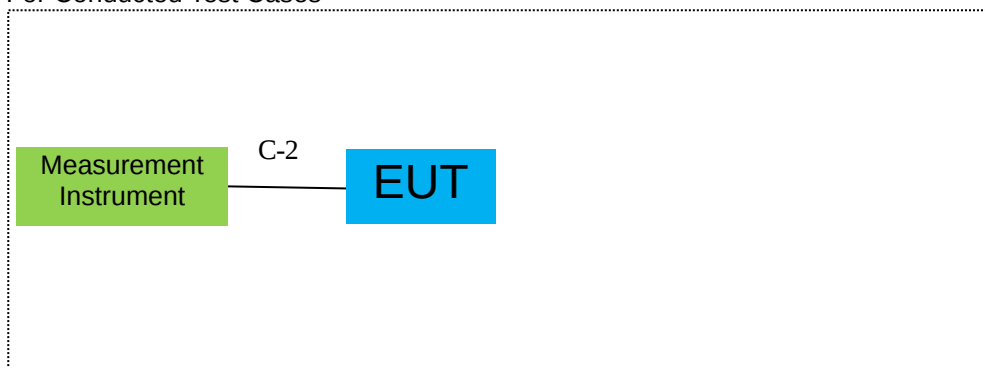

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	XDJ961D-240400	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	DC Cable	YES	NO	1.2m
C-3	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

5.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.03.30 2022.03.30 2024.04.26	2022.03.29 2023.03.29 2025.04.25	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2021.07.01 2022.06.16 2024.04.25	2022.06.30 2023.06.15 2025.04.24	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2021.07.01 2022.06.16 2024.04.25	2022.06.30 2023.06.15 2025.04.24	1 year
4	Test Receiver	R&S	ESPI7	101318	2022.04.06 2024.04.26	2023.04.05 2025.04.25	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.30 2022.03.30 2024.05.12	2022.03.29 2023.03.29 2025.05.11	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11 2024.04.26	2023.05.10 2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.30 2022.03.31	2022.03.29 2023.03.30	1 year
					2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2021.11.07 2024.05.12	2022.11.06 2027.05.11	1 year 3 year
9	Amplifier	EMC	EMC051835SE	980246	2021.07.01 2022.06.17 2024.04.25	2022.06.30 2023.06.16 2025.04.24	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2021.11.07 2024.05.17	2022.11.06 2027.05.16	1 year 3 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2021.07.01 2022.06.17 2024.04.25	2022.06.30 2023.06.16 2025.04.24	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06 2023.05.06	2022.08.05 2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06 2023.05.06	2022.08.05 2026.05.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28 2022.06.17	2022.06.27 2025.06.16	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2019.08.06 2023.05.06	2022.08.05 2026.05.05	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.04.07 2024.04.26	2023.04.06 2027.04.25	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2022.04.06 2024.04.26	2023.04.05 2025.04.25	1 year
2	LISN	R&S	ENV216	101313	2022.04.06 2024.04.25	2023.04.05 2025.04.24	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2022.04.06 2024.04.25	2023.04.05 2025.04.24	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11 2024.04.26	2023.05.10 2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

6 TEST REQUIREMENTS

6.1 CONDUCTED EMISSIONS TEST

6.1.1 Applicable Standard

According to FCC Part 15.207(a)

6.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

6.1.4 Test Configuration

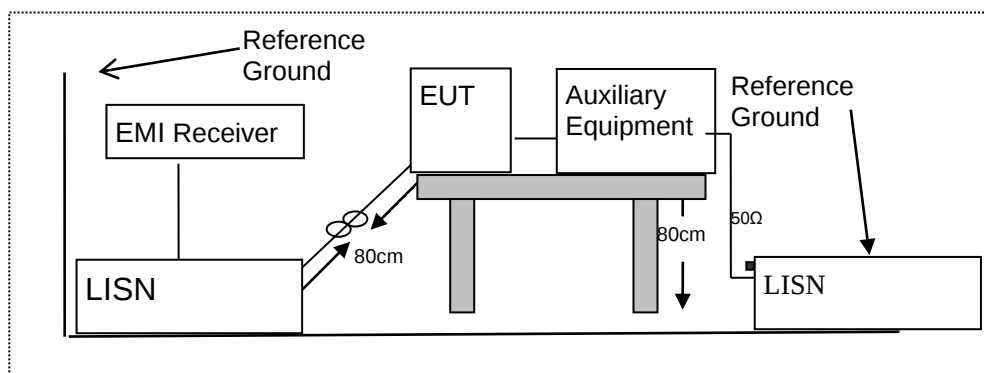

6.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


6.1.6 Test Results

EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	22 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 56V from POE AC 120V/60Hz	Tested By:	Liumei Huang
Test Mode:	Mode 1		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1632	46.79	10.77	57.56	65.30	-7.74	QP
0.1632	33.95	10.77	44.72	55.30	-10.58	AVG
0.2094	41.94	10.87	52.81	63.23	-10.42	QP
0.2140	36.71	10.84	47.55	53.05	-5.50	AVG
0.4328	34.30	11.29	45.59	47.20	-1.61	AVG
0.4374	43.32	11.31	54.63	57.11	-2.48	QP
4.9782	35.53	10.24	45.77	56.00	-10.23	QP
4.9782	24.86	10.24	35.10	46.00	-10.90	AVG
7.5258	36.39	10.21	46.60	60.00	-13.40	QP
7.5656	25.89	10.21	36.10	50.00	-13.90	AVG
15.8853	29.50	10.61	40.11	50.00	-9.89	AVG
16.0546	37.70	10.61	48.31	60.00	-11.69	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

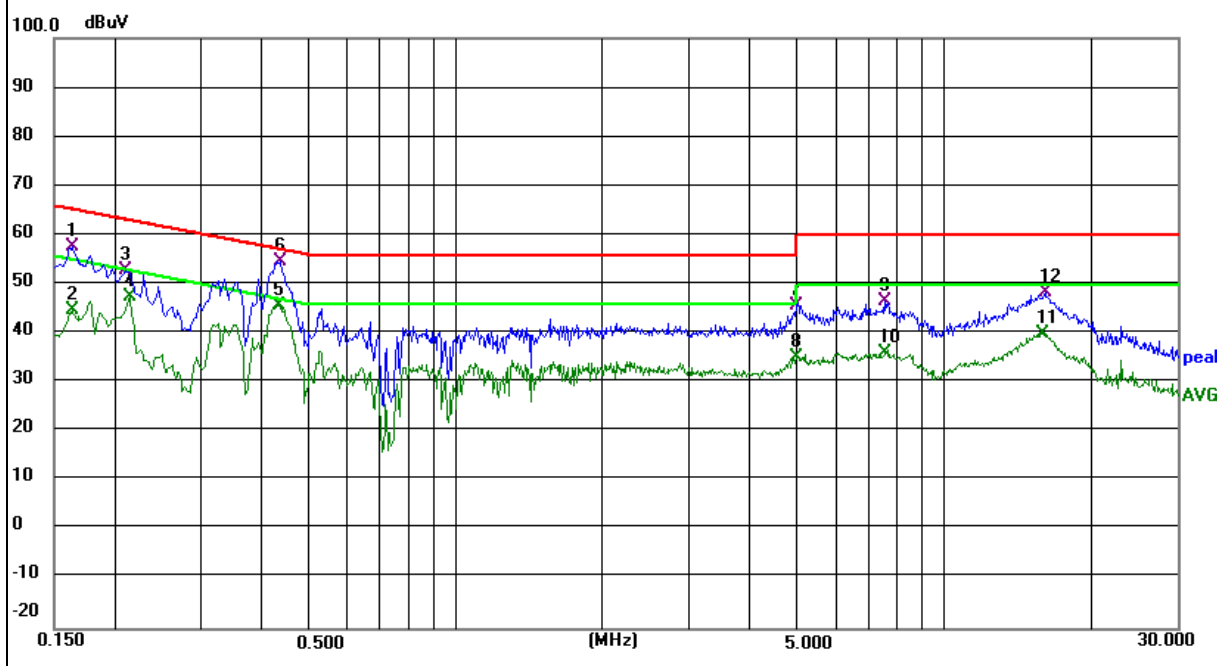


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	22°C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 56V from POE AC 120V/60Hz	Tested By:	Liumei Huang
Test Mode:	Mode 1		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1620	46.22	10.47	56.69	65.36	-8.67	QP
0.1620	33.05	10.47	43.52	55.36	-11.84	AVG
0.4340	34.80	11.21	46.01	47.18	-1.17	AVG
0.4380	43.82	11.22	55.04	57.10	-2.06	QP
0.5260	26.47	11.36	37.83	46.00	-8.17	AVG
0.5299	35.10	11.37	46.47	56.00	-9.53	QP
4.9940	36.53	10.18	46.71	56.00	-9.29	QP
4.9940	25.86	10.18	36.04	46.00	-9.96	AVG
7.5580	37.39	10.43	47.82	60.00	-12.18	QP
7.6540	27.40	10.44	37.84	50.00	-12.16	AVG
15.9420	30.50	10.40	40.90	50.00	-9.10	AVG
16.0900	38.71	10.41	49.12	60.00	-10.88	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

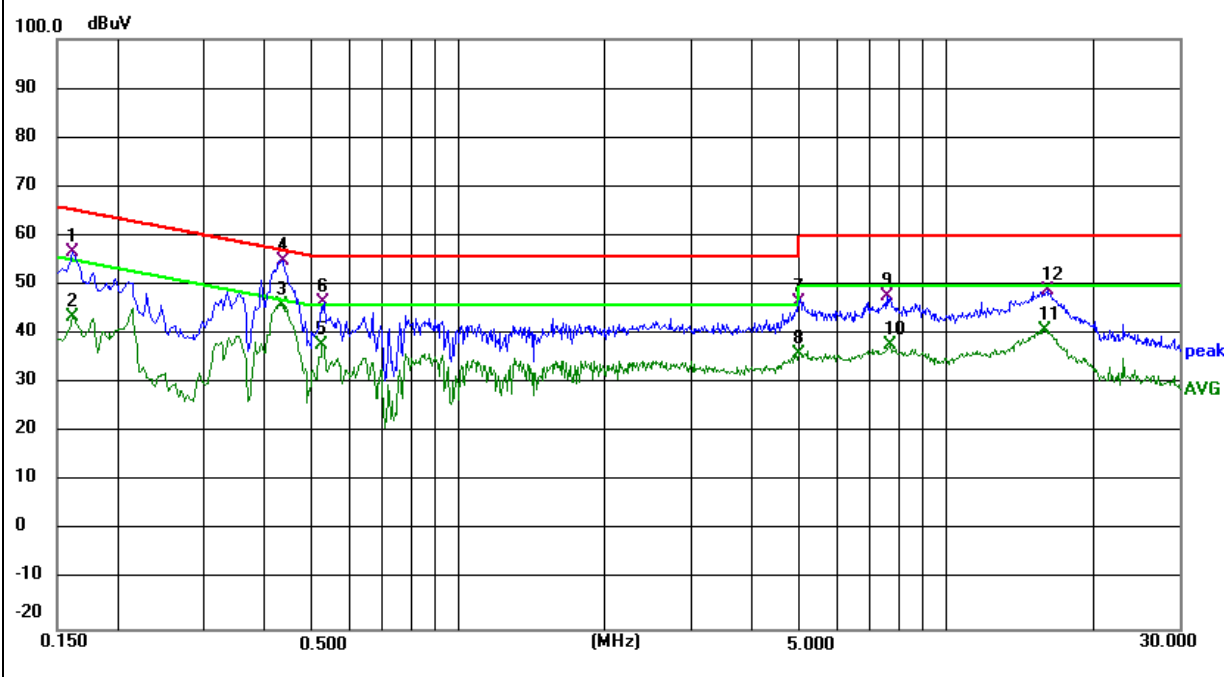


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	22 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 24V from Adapter AC120V/60HZ	Tested By:	Liumei Huang
Test Mode:	Mode 1		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1750	44.24	10.87	55.11	64.72	-9.61	QP
0.1780	32.25	10.88	43.13	54.58	-11.45	AVG
0.5780	26.78	11.39	38.17	56.00	-17.83	QP
0.5780	20.91	11.39	32.30	46.00	-13.70	AVG
1.5500	0.23	13.59	13.82	46.00	-32.18	AVG
1.5540	17.73	13.59	31.32	56.00	-24.68	QP
2.6420	21.44	10.39	31.83	56.00	-24.17	QP
2.7700	4.85	10.41	15.26	46.00	-30.74	AVG
4.2700	25.30	10.30	35.60	56.00	-20.40	QP
4.3260	14.66	10.29	24.95	46.00	-21.05	AVG
14.0300	27.86	10.53	38.39	60.00	-21.61	QP
14.2140	19.39	10.54	29.93	50.00	-20.07	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

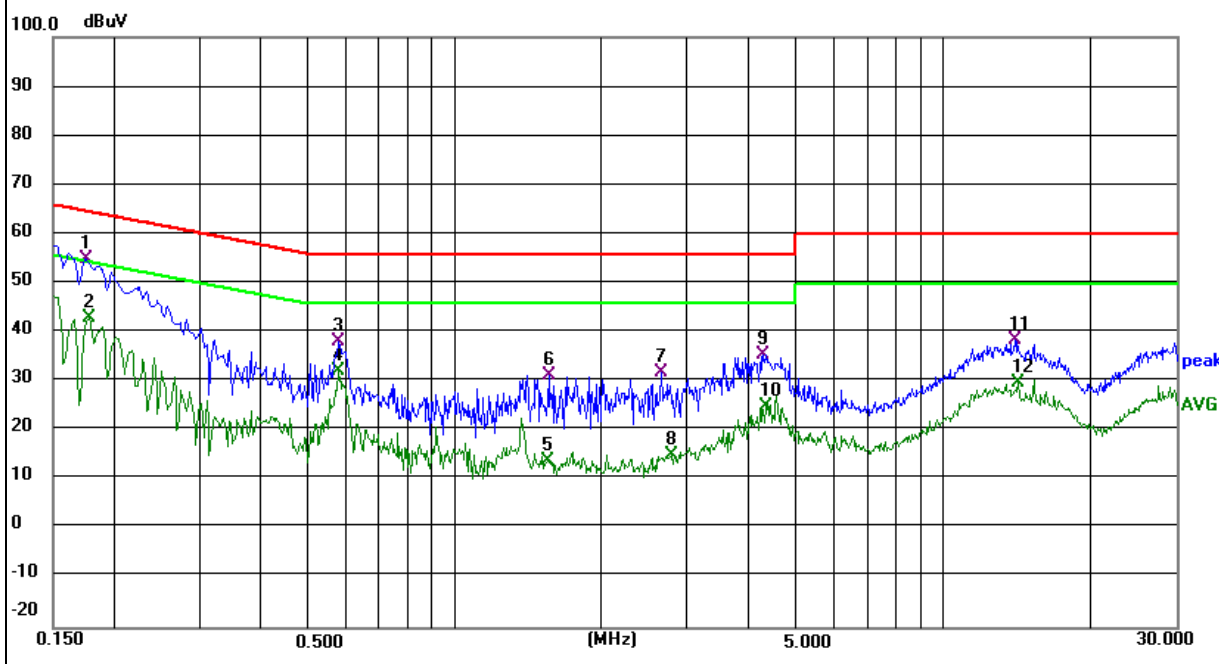


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	22°C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 24V from Adapter AC120V/60HZ	Tested By:	Liumei Huang
Test Mode:	Mode 1		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	45.69	10.40	56.09	65.79	-9.70	QP
0.1539	30.12	10.40	40.52	55.79	-15.27	AVG
0.2020	26.94	10.84	37.78	53.53	-15.75	AVG
0.2060	40.46	10.85	51.31	63.37	-12.06	QP
0.5780	19.71	11.61	31.32	46.00	-14.68	AVG
0.5820	27.04	11.62	38.66	56.00	-17.34	QP
1.7300	17.46	13.89	31.35	56.00	-24.65	QP
1.7900	0.47	14.05	14.52	46.00	-31.48	AVG
4.5020	29.14	10.34	39.48	56.00	-16.52	QP
4.6060	19.84	10.31	30.15	46.00	-15.85	AVG
15.3740	25.66	10.39	36.05	60.00	-23.95	QP
15.3740	17.47	10.39	27.86	50.00	-22.14	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

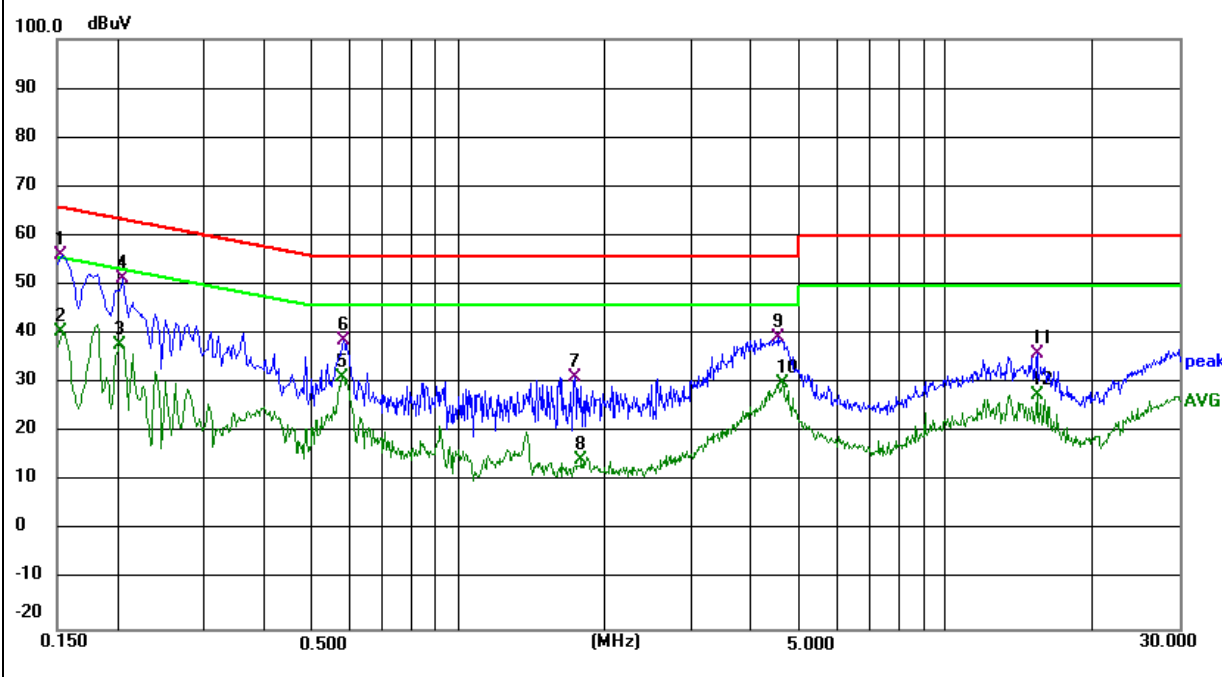


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1W2R16
Temperature:	22 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 56V from POE AC 120V/60Hz	Tested By:	Liumei Huang
Test Mode:	Mode 1		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1824	46.77	10.88	57.65	64.38	-6.73	QP
0.1824	34.71	10.88	45.59	54.38	-8.79	AVG
0.2454	42.77	10.72	53.49	61.91	-8.42	QP
0.2467	28.62	10.71	39.33	51.87	-12.54	AVG
0.3501	27.70	11.18	38.88	48.96	-10.08	AVG
0.3537	36.25	11.17	47.42	58.88	-11.46	QP
0.4260	43.29	11.29	54.58	57.33	-2.75	QP
0.4260	34.12	11.29	45.41	47.33	-1.92	AVG
2.7942	29.41	10.41	39.82	46.00	-6.18	AVG
2.8090	36.94	10.41	47.35	56.00	-8.65	QP
15.8853	30.50	10.61	41.11	50.00	-8.89	AVG
16.0545	38.70	10.61	49.31	60.00	-10.69	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.3-E5C2W2R16

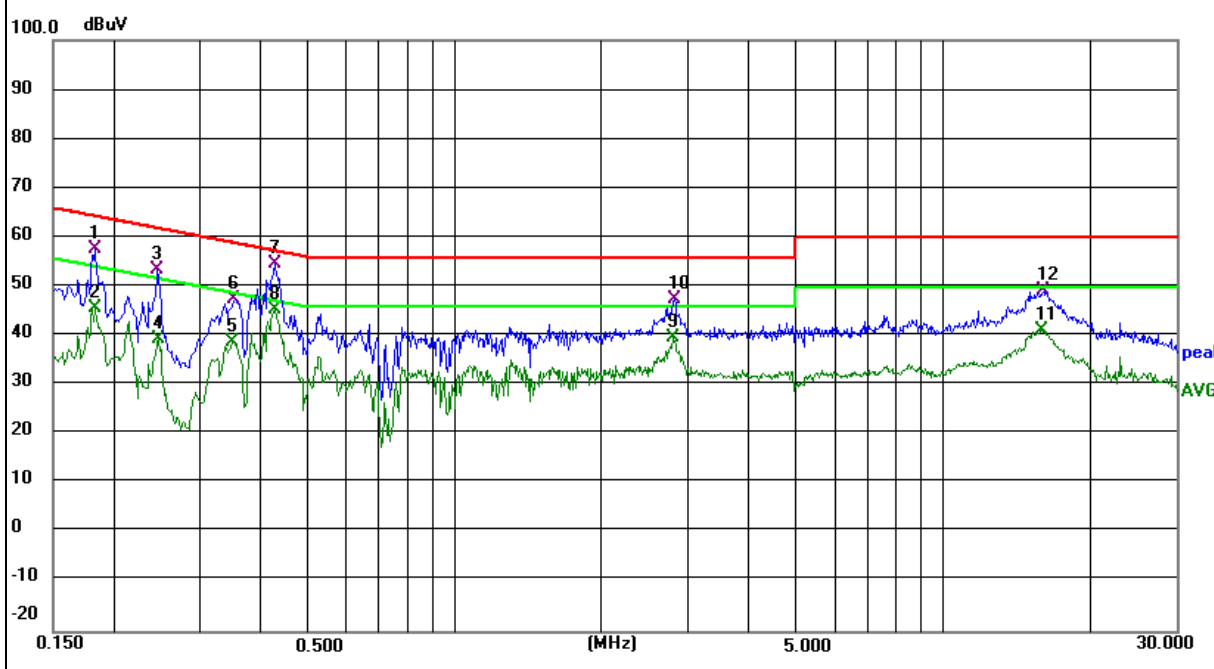


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1W2R16
Temperature:	22°C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 56V from POE AC 120V/60Hz	Tested By:	Liumei Huang
Test Mode:	Mode 1		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1650	49.82	10.51	60.33	65.21	-4.88	QP
0.1650	37.11	10.51	47.62	55.21	-7.59	AVG
0.2127	46.66	10.83	57.49	63.10	-5.61	QP
0.2140	41.71	10.82	52.53	53.05	-0.52	AVG
0.4220	35.74	11.21	46.95	47.41	-0.46	AVG
0.4237	43.69	11.20	54.89	57.38	-2.49	QP
0.8500	40.02	12.07	52.09	56.00	-3.91	QP
0.8500	33.51	12.07	45.58	46.00	-0.42	AVG
5.4620	40.12	10.23	50.35	60.00	-9.65	QP
5.4620	31.06	10.23	41.29	50.00	-8.71	AVG
15.1660	41.93	10.39	52.32	60.00	-7.68	QP
15.2340	34.70	10.39	45.09	50.00	-4.91	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.3-E5C2W2R16

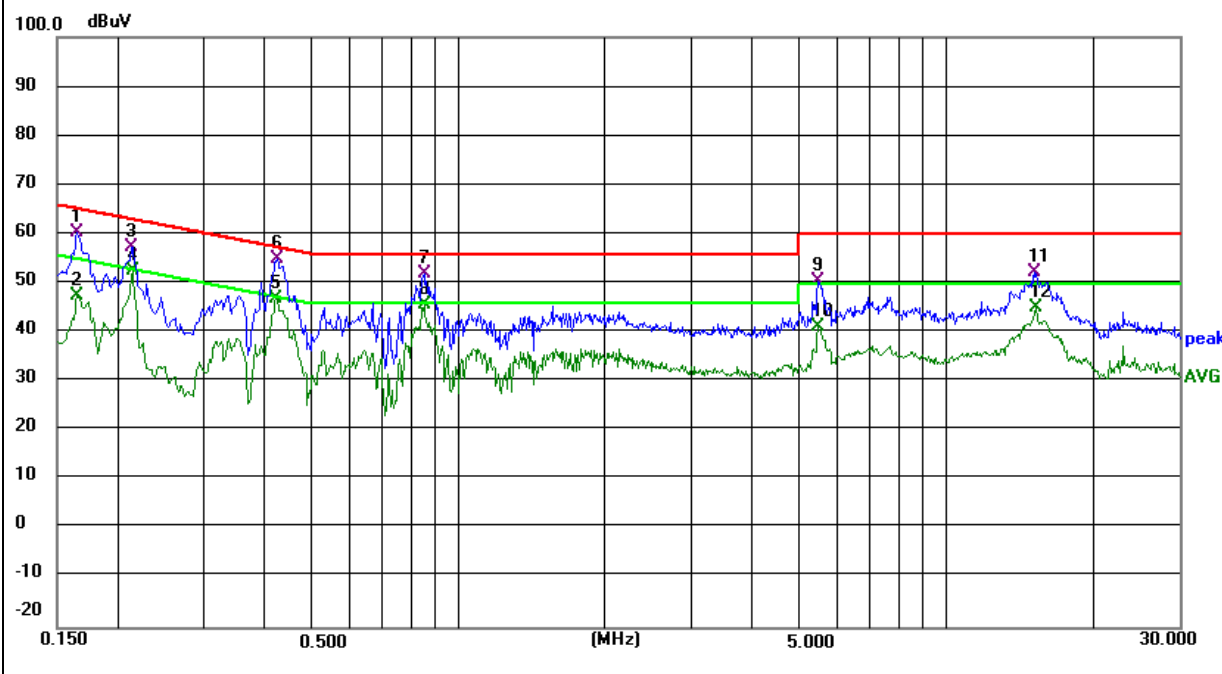

6.2 RADIATED SPURIOUS EMISSION

6.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

6.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (μV/m)	300
0.490~1.705	24000/F(KHz)	20 log (μV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (μV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz: Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz: Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

6.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

6.2.4 Test Configuration


(a) For radiated emissions below 30MHz

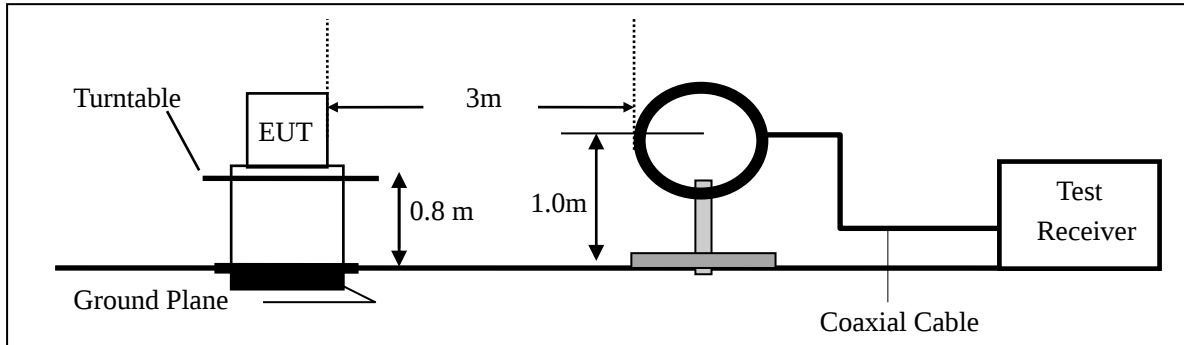

(b) For radiated emissions from 30MHz to 1000MHz

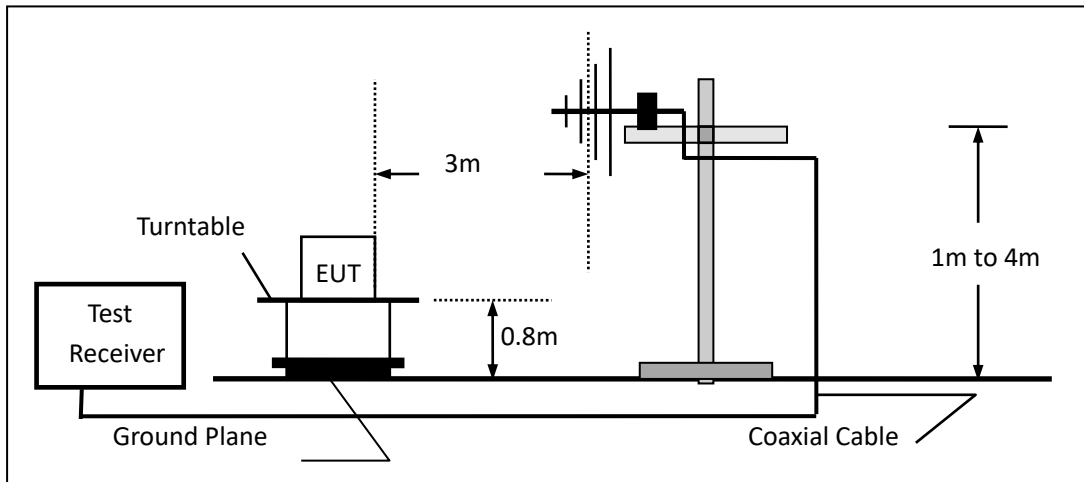

(c) For radiated emissions above 1000MHz

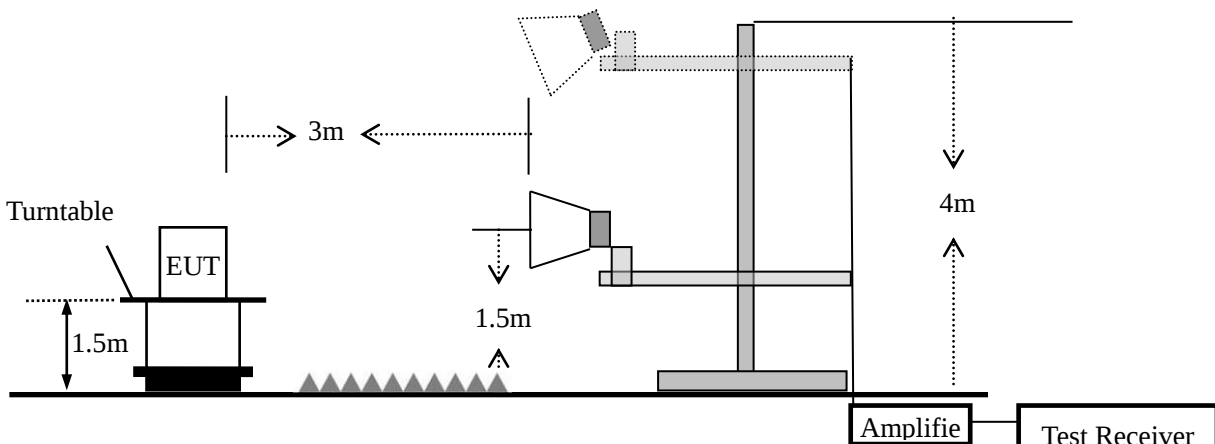

6.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

6.2.6 Test Results

6.2.6.1 Test Results of Radiated Spurious Emissions (9kHz to 30MHz)

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3/ Mode4	Tested By:	Re Zeng

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


6.2.6.2 Test Results of Radiated Spurious Emissions (30MHz to 1GHz)

EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 56V from POE AC 120V/60Hz	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.5304	24.74	10.72	35.46	40.00	-4.54	QP
V	48.1625	21.15	13.68	34.83	40.00	-5.17	QP
V	116.5400	27.11	10.58	37.69	43.50	-5.81	QP
V	147.9214	29.15	8.34	37.49	43.50	-6.01	QP
V	250.3010	28.53	12.68	41.21	46.00	-4.79	QP
V	649.6594	17.72	20.72	38.44	46.00	-7.56	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

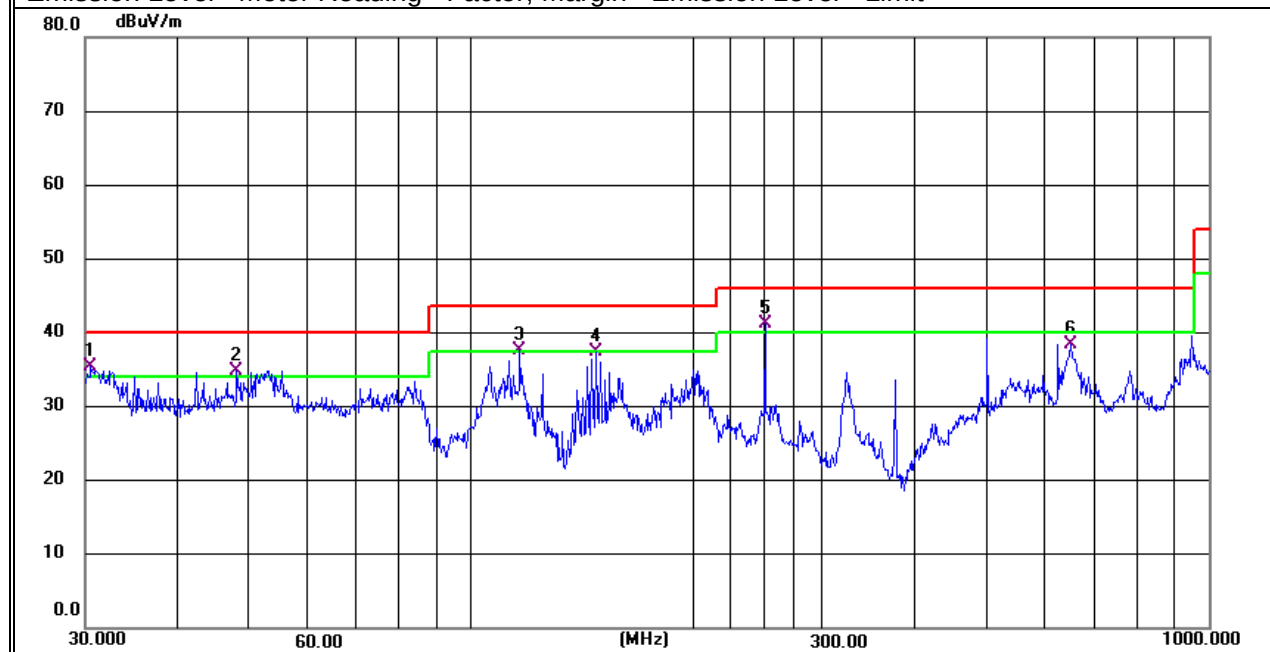


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 56V from POE AC 120V/60Hz	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	52.9453	16.00	13.50	29.50	40.00	-10.50	QP
H	112.5241	25.58	11.30	36.88	43.50	-6.62	QP
H	189.0740	26.53	11.10	37.63	43.50	-5.87	QP
H	250.3010	27.82	12.68	40.50	46.00	-5.50	QP
H	625.0780	18.58	20.21	38.79	46.00	-7.21	QP
H	948.7610	16.54	24.72	41.26	46.00	-4.74	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

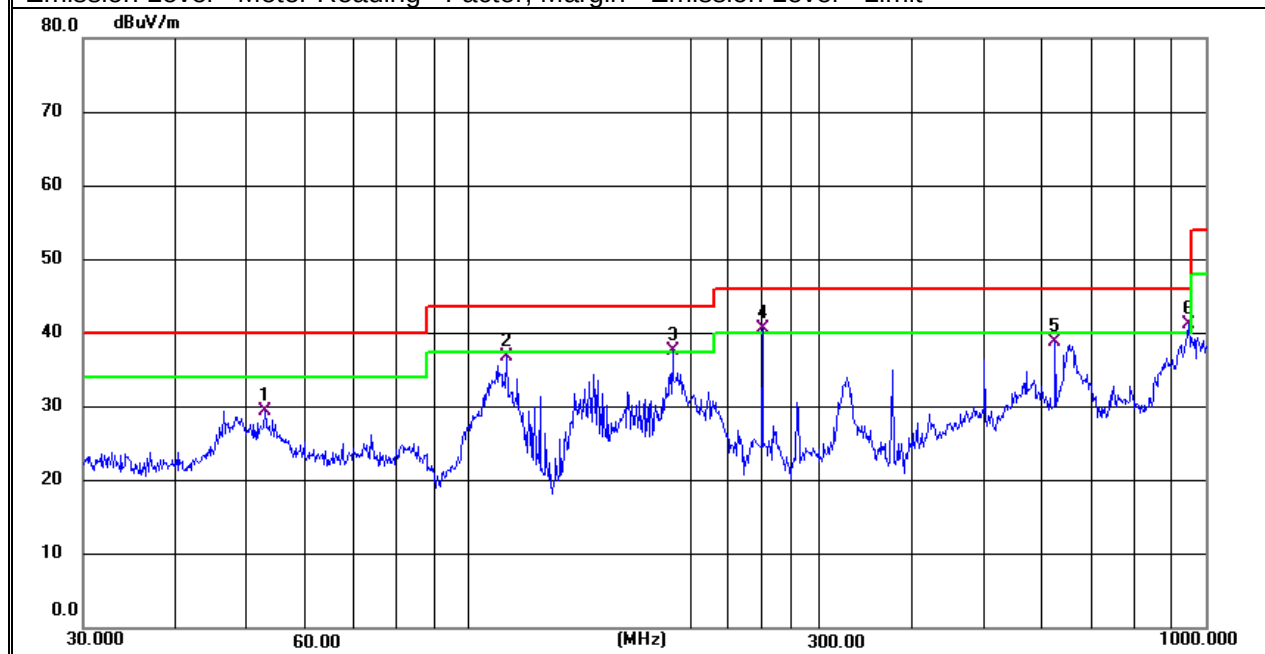


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.2764	65.21	-28.53	36.68	40.00	-3.32	QP
V	46.8301	21.55	13.58	35.13	40.00	-4.87	QP
V	118.6012	27.68	8.88	36.56	43.50	-6.94	QP
V	150.0107	30.05	8.44	38.49	43.50	-5.01	QP
V	250.3010	23.72	12.68	36.40	46.00	-9.60	QP
V	750.1082	19.65	22.47	42.12	46.00	-3.88	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

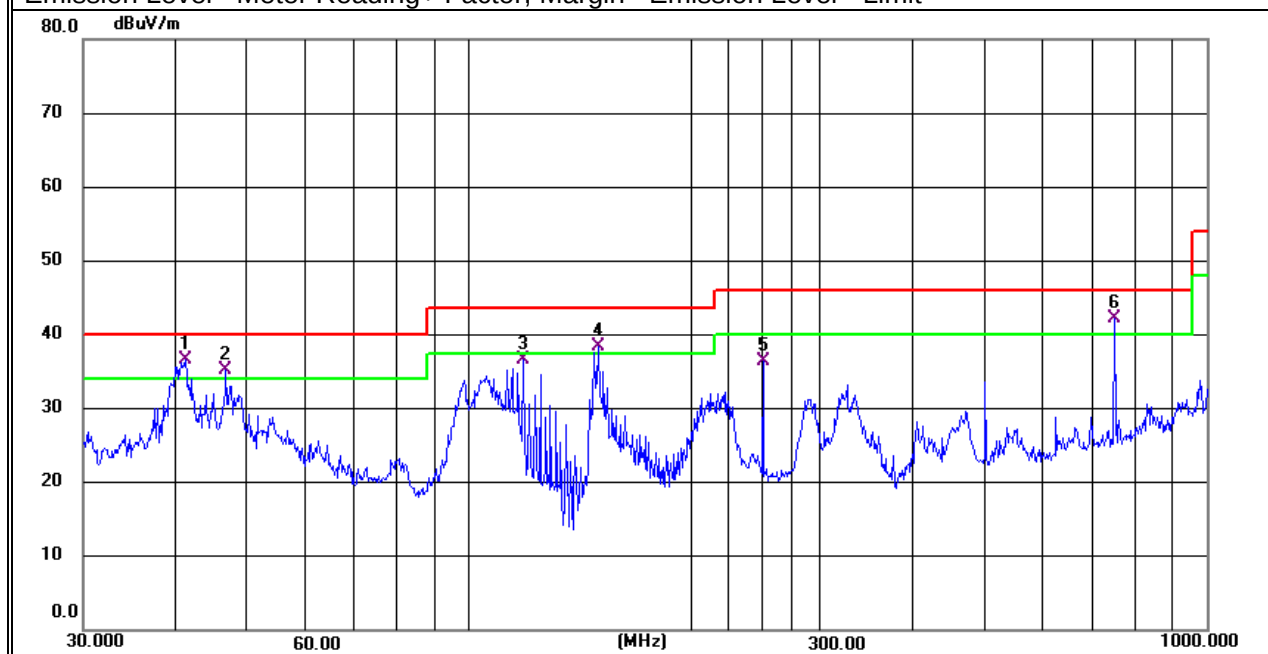


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	47.9940	14.02	13.68	27.70	40.00	-12.30	QP
H	125.0065	26.59	9.21	35.80	43.50	-7.70	QP
H	147.9214	27.79	8.34	36.13	43.50	-7.37	QP
H	250.3010	30.56	12.68	43.24	46.00	-2.76	QP
H	300.3672	29.28	14.34	43.62	46.00	-2.38	QP
H	734.4913	13.18	22.24	35.42	46.00	-10.58	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

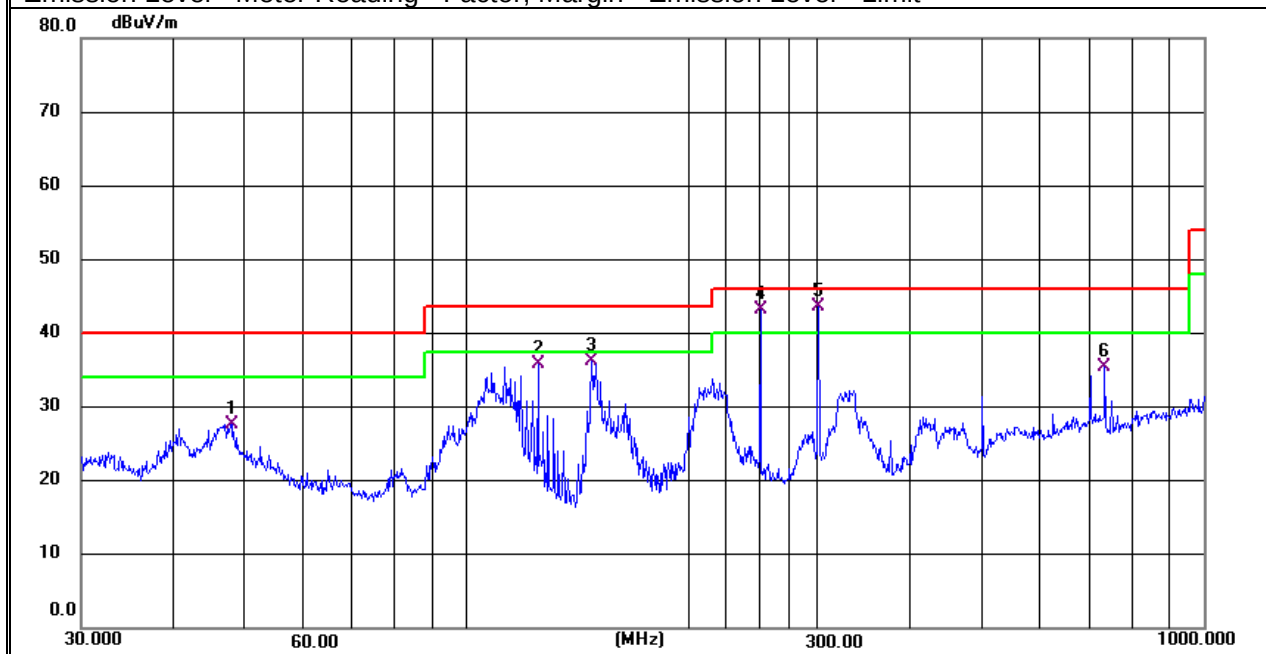


EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1W2R16
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	39.4371	25.40	12.42	37.82	40.00	-2.18	QP
V	98.4865	24.15	11.63	35.78	43.50	-7.72	QP
V	156.4576	29.11	8.75	37.86	43.50	-5.64	QP
V	212.2692	23.57	11.97	35.54	43.50	-7.96	QP
V	333.6865	22.67	15.22	37.89	46.00	-8.11	QP
V	750.1082	16.15	22.47	38.62	46.00	-7.38	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level – Limit

Verified the worst-case of CWY-M5.3-E5C2W2R16

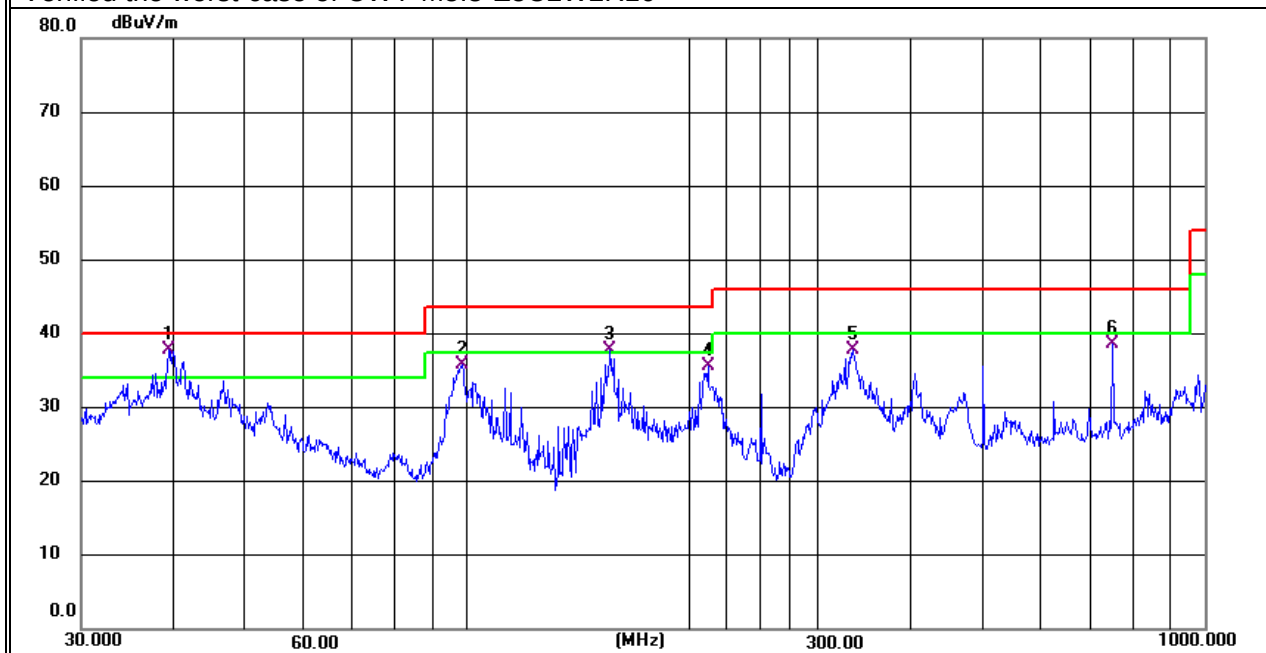

EUT:	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1W2R16
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	46.3402	15.17	13.58	28.75	40.00	-11.25	QP
H	101.2883	18.93	11.81	30.74	43.50	-12.76	QP
H	166.6511	25.08	9.26	34.34	43.50	-9.16	QP
H	207.1225	21.20	11.85	33.05	43.50	-10.45	QP
H	334.8586	20.91	15.26	36.17	46.00	-9.83	QP
H	734.4913	11.68	22.24	33.92	46.00	-12.08	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level – Limit

Verified the worst-case of CWY-M5.3-E5C2W2R16




6.2.6.3 Test Results of Radiated Spurious Emissions (1GHz to 18GHz)

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1500.650	65.73	-23.05	42.68	74.00	-31.32	peak
V	2134.750	62.64	-18.67	43.97	74.00	-30.03	peak
V	3005.575	59.13	-15.49	43.64	74.00	-30.36	peak
V	5000.525	56.65	-12.40	44.25	74.00	-29.75	peak
V	10969.225	46.68	-2.32	44.36	74.00	-29.64	peak
V	14288.050	46.86	-0.21	46.65	74.00	-27.35	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

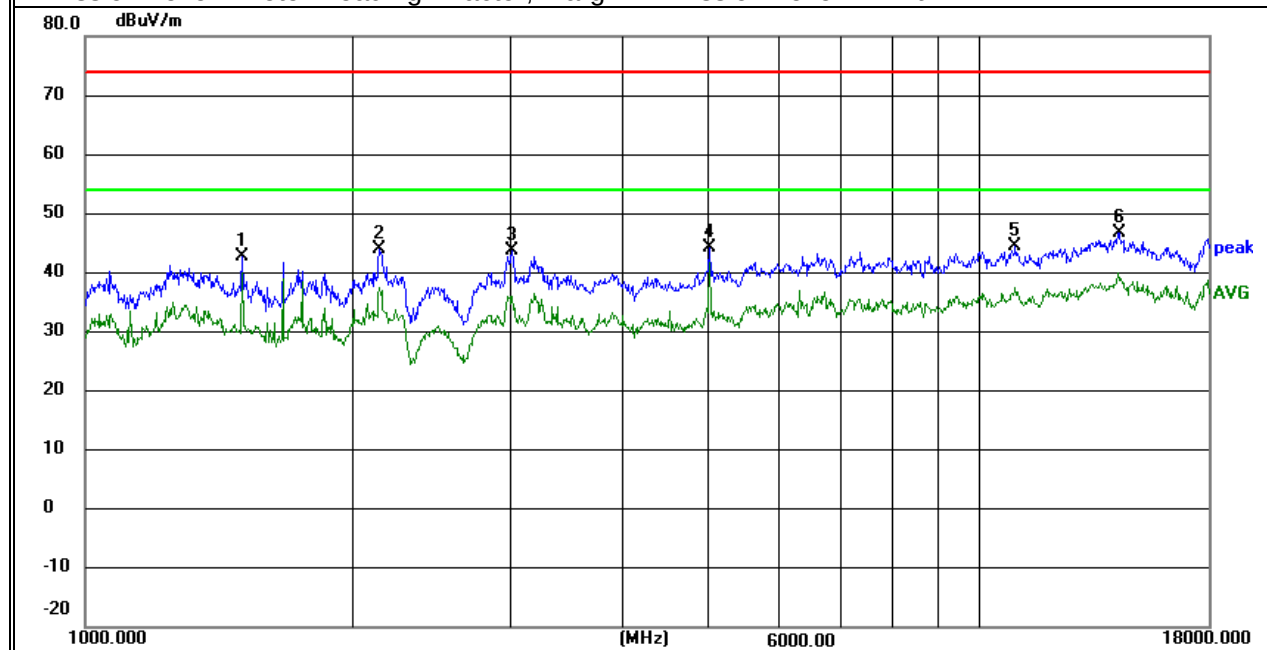


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1260.100	65.20	-23.87	41.33	74.00	-32.67	peak
H	1500.225	66.22	-23.05	43.17	74.00	-30.83	peak
H	2133.475	60.66	-18.68	41.98	74.00	-32.02	peak
H	5000.100	55.05	-12.41	42.64	74.00	-31.36	peak
H	6000.125	55.47	-11.37	44.10	74.00	-29.90	peak
H	13656.500	46.54	-0.91	45.63	74.00	-28.37	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

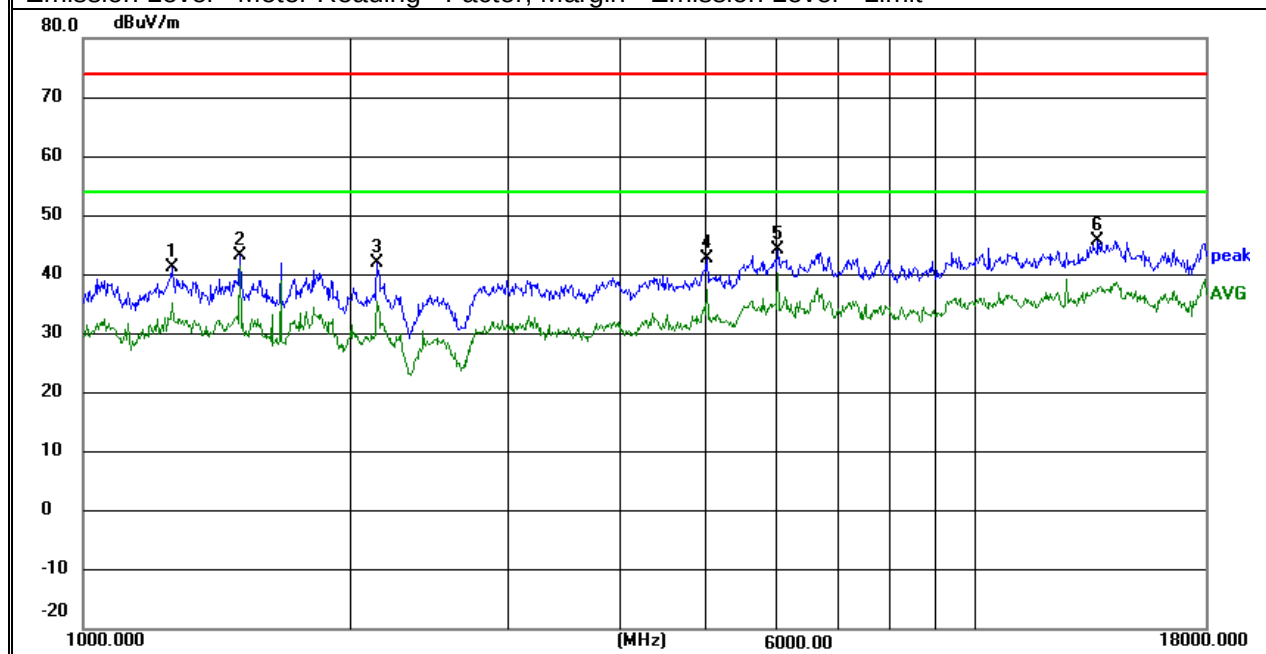


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode3	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1287.725	66.07	-23.87	42.20	74.00	-31.80	peak
V	1500.225	65.57	-23.05	42.52	74.00	-31.48	peak
V	2133.900	61.33	-18.68	42.65	74.00	-31.35	peak
V	3208.300	58.40	-15.19	43.21	74.00	-30.79	peak
V	5000.100	56.39	-12.41	43.98	74.00	-30.02	peak
V	14258.300	44.84	-0.24	44.60	74.00	-29.40	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

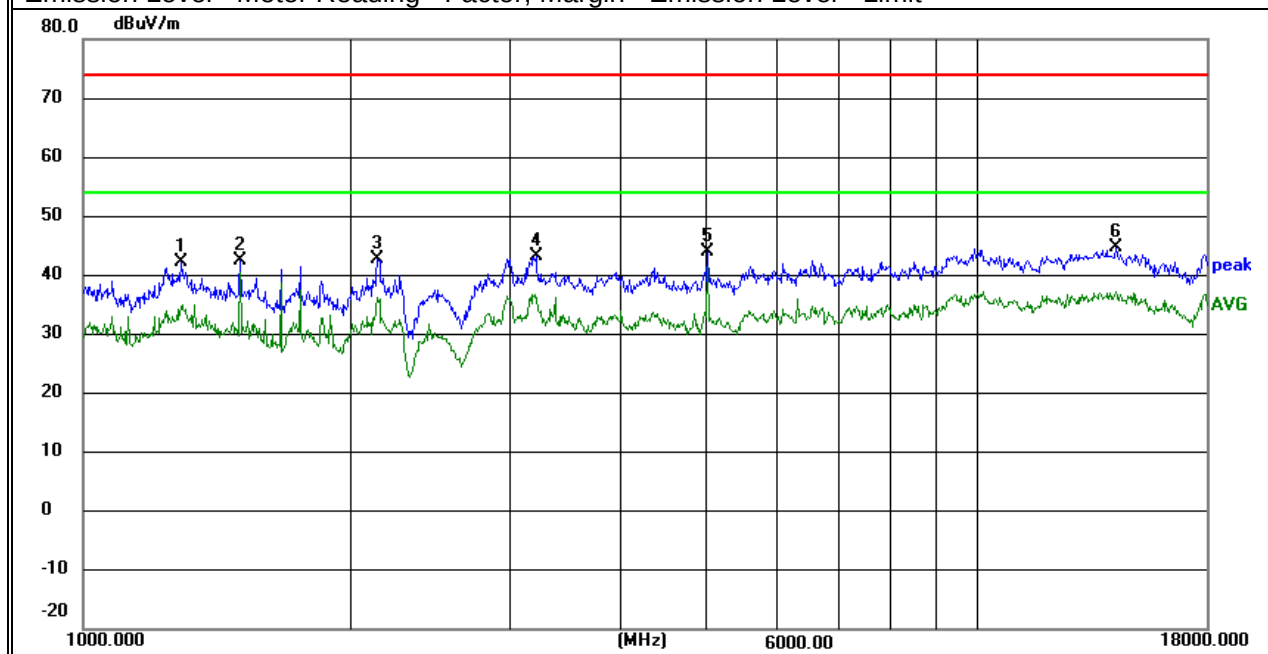


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode3	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1261.375	65.81	-23.87	41.94	74.00	-32.06	peak
H	1500.225	65.60	-23.05	42.55	74.00	-31.45	peak
H	1665.125	64.88	-22.67	42.21	74.00	-31.79	peak
H	2140.700	60.68	-18.72	41.96	74.00	-32.04	peak
H	10921.625	47.11	-2.23	44.88	74.00	-29.12	peak
H	14249.800	45.67	-0.25	45.42	74.00	-28.58	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

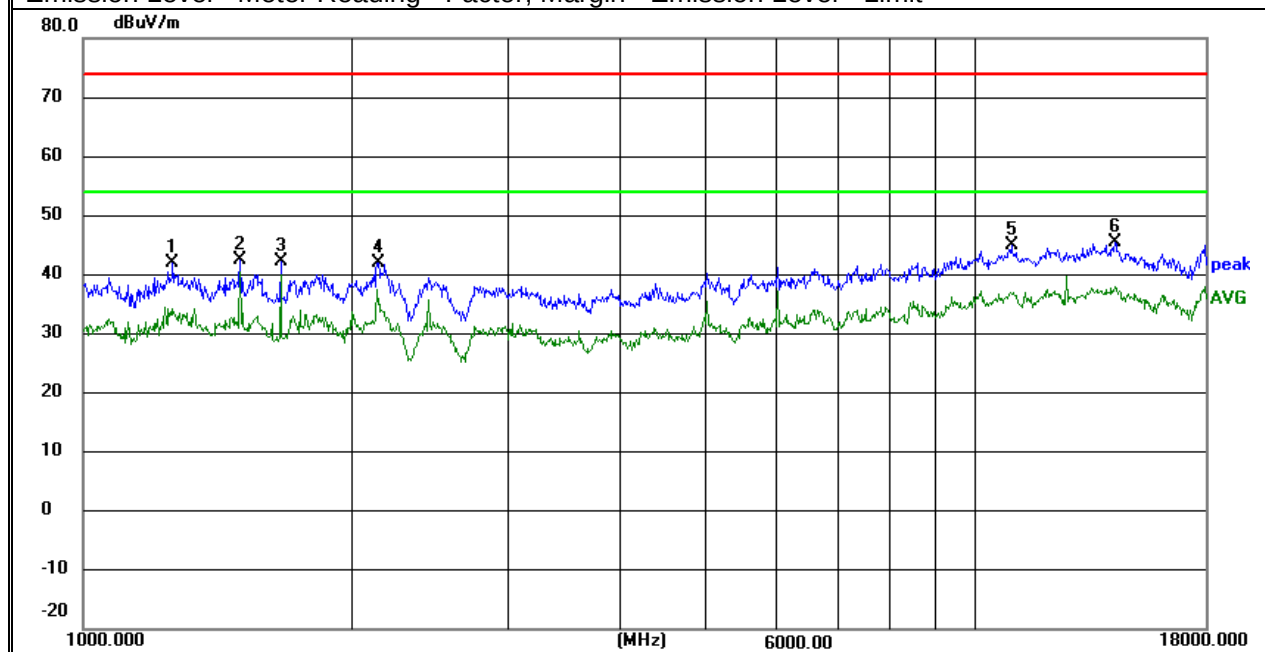


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode4	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1294.950	66.01	-23.85	42.16	74.00	-31.84	peak
V	1500.225	68.15	-23.05	45.10	74.00	-28.90	peak
V	2144.100	60.95	-18.73	42.22	74.00	-31.78	peak
V	2992.825	56.12	-15.56	40.56	74.00	-33.44	peak
V	5000.100	55.79	-12.41	43.38	74.00	-30.62	peak
V	14289.750	45.27	-0.21	45.06	74.00	-28.94	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

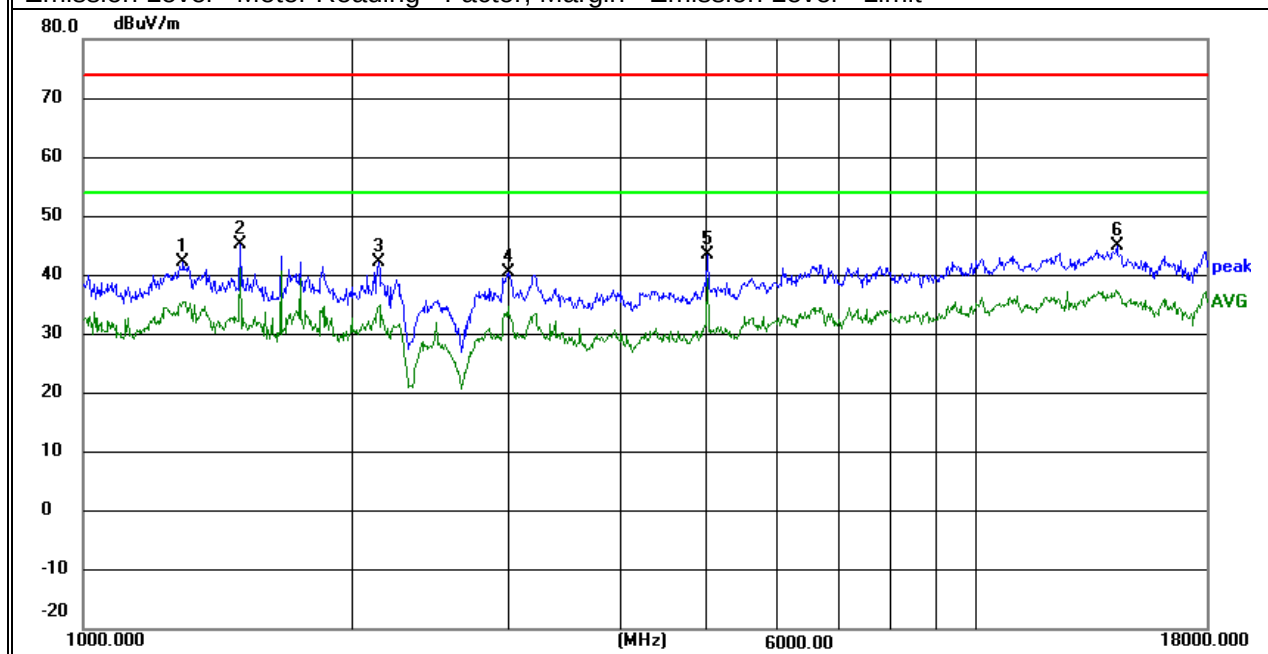


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode4	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1300.475	64.99	-23.85	41.14	74.00	-32.86	peak
H	1500.225	66.03	-23.05	42.98	74.00	-31.02	peak
H	1665.125	65.54	-22.67	42.87	74.00	-31.13	peak
H	2144.525	61.07	-18.74	42.33	74.00	-31.67	peak
H	5000.100	55.06	-12.41	42.65	74.00	-31.35	peak
H	11990.075	45.98	-0.74	45.24	74.00	-28.76	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

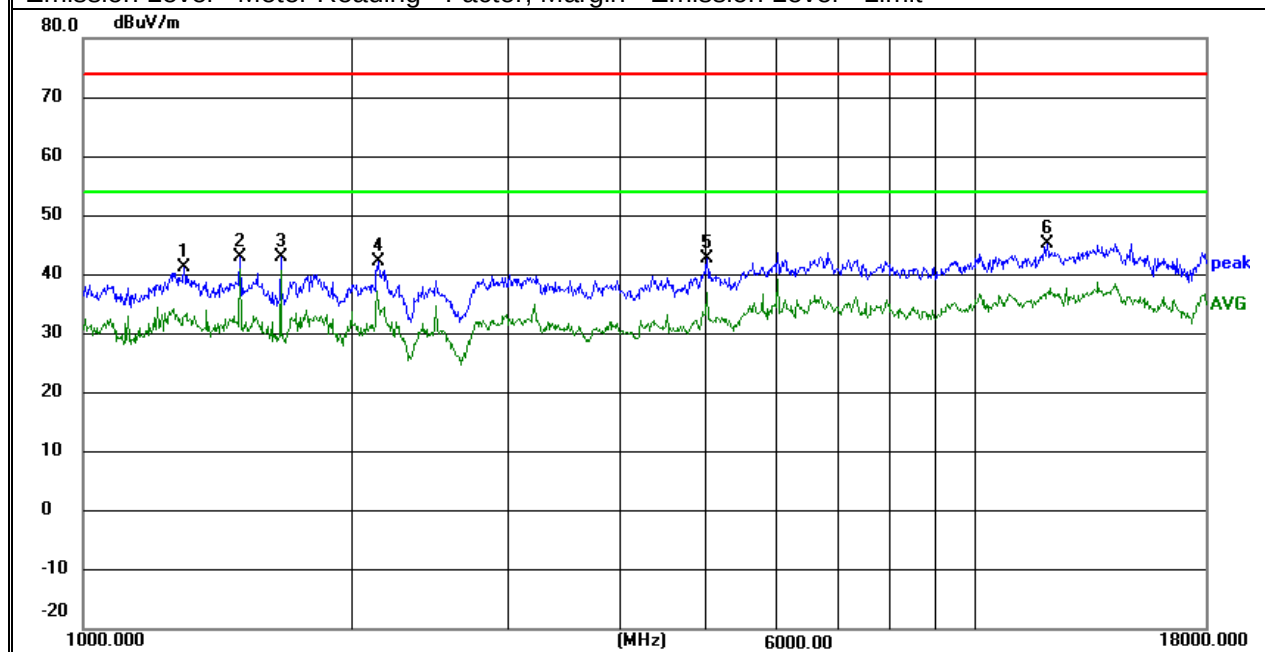


6.2.6.4 Test Results of Radiated Spurious Emissions (18GHz to 25GHz)

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	18007.875	83.14	-32.99	50.15	54.00	-3.85	AVG
V	18018.550	91.08	-32.98	58.10	74.00	-15.90	peak
V	19043.175	87.69	-32.87	54.82	74.00	-19.18	peak
V	19052.100	80.21	-32.87	47.34	54.00	-6.66	AVG
V	20469.075	80.85	-32.07	48.78	54.00	-5.22	AVG
V	20554.825	87.97	-31.96	56.01	74.00	-17.99	peak
V	21584.875	88.71	-30.46	58.25	74.00	-15.75	peak
V	21584.875	80.01	-30.46	49.55	54.00	-4.45	AVG
V	22842.600	75.14	-28.67	46.47	54.00	-7.53	AVG
V	22887.925	84.14	-28.60	55.54	74.00	-18.46	peak
V	23921.650	80.09	-27.14	52.95	74.00	-21.05	peak
V	24043.625	71.70	-27.00	44.70	54.00	-9.30	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

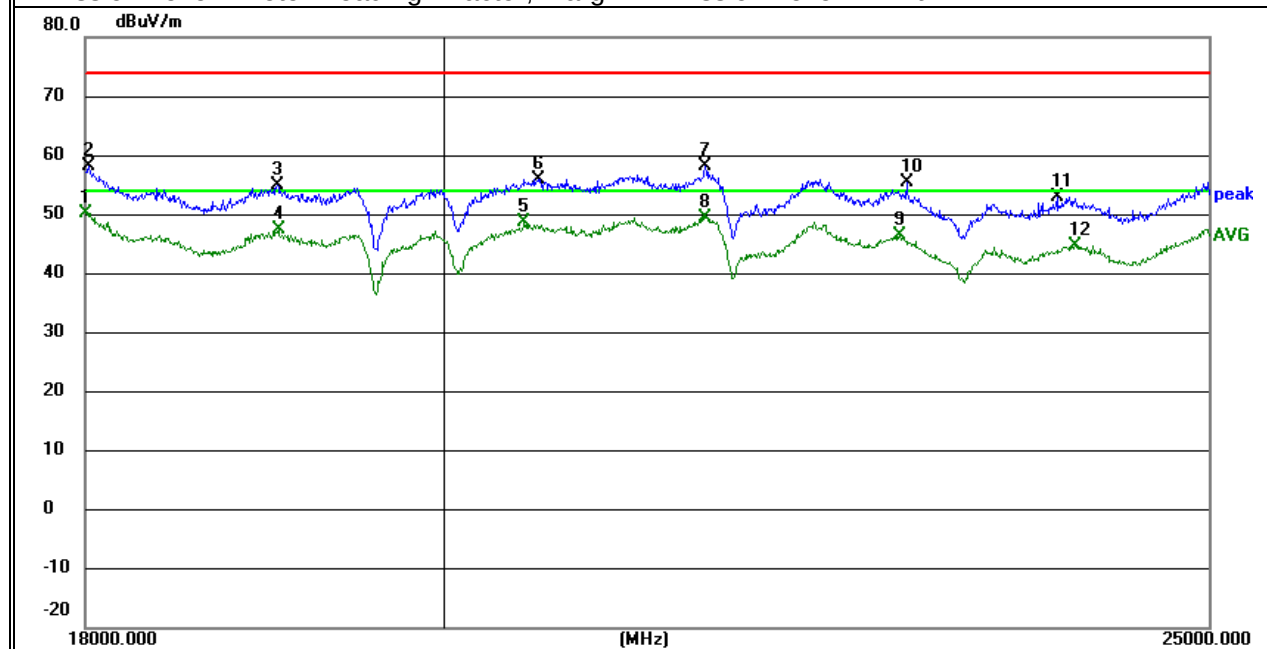


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	18000.000	39.72	10.41	50.13	54.00	-3.87	AVG
H	18009.275	53.07	4.41	57.48	74.00	-16.52	peak
H	18962.675	42.06	4.86	46.92	54.00	-7.08	AVG
H	18983.850	49.60	4.89	54.49	74.00	-19.51	peak
H	20457.875	49.59	7.10	56.69	74.00	-17.31	peak
H	20506.175	41.19	7.27	48.46	54.00	-5.54	AVG
H	21492.650	48.84	8.23	57.07	74.00	-16.93	peak
H	21552.500	41.22	8.26	49.48	54.00	-4.52	AVG
H	22242.875	46.93	9.38	56.31	74.00	-17.69	peak
H	22279.975	38.78	9.49	48.27	54.00	-5.73	AVG
H	24016.675	41.38	12.03	53.41	74.00	-20.59	peak
H	24104.000	33.10	11.82	44.92	54.00	-9.08	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

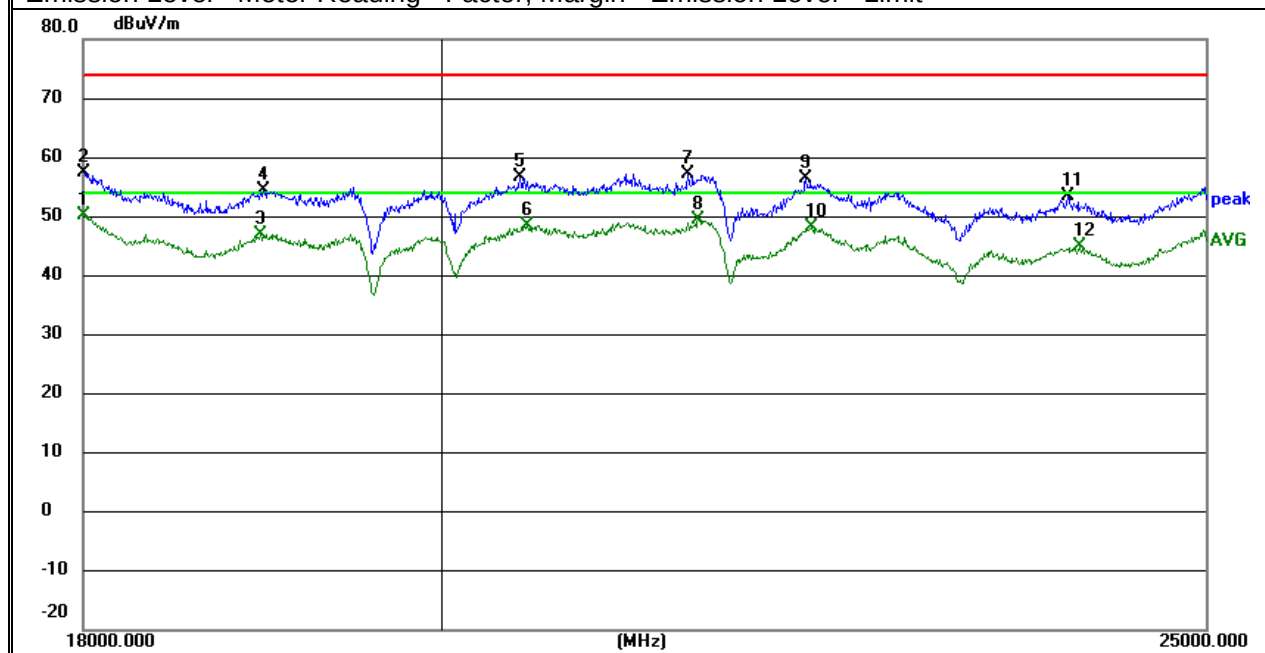


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode3	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	18000.000	66.73	-9.19	57.54	74.00	-16.46	peak
V	18000.000	59.56	-9.19	50.37	54.00	-3.63	AVG
V	18982.975	87.90	-32.88	55.02	74.00	-18.98	peak
V	19033.200	79.93	-32.87	47.06	54.00	-6.94	AVG
V	20406.075	87.98	-32.17	55.81	74.00	-18.19	peak
V	20545.375	80.46	-31.97	48.49	54.00	-5.51	AVG
V	21594.150	80.05	-30.44	49.61	54.00	-4.39	AVG
V	21621.100	87.71	-30.40	57.31	74.00	-16.69	peak
V	22283.475	85.22	-29.45	55.77	74.00	-18.23	peak
V	22283.475	78.01	-29.45	48.56	54.00	-5.44	AVG
V	24019.475	79.48	-27.02	52.46	74.00	-21.54	peak
V	24063.400	71.88	-26.98	44.90	54.00	-9.10	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

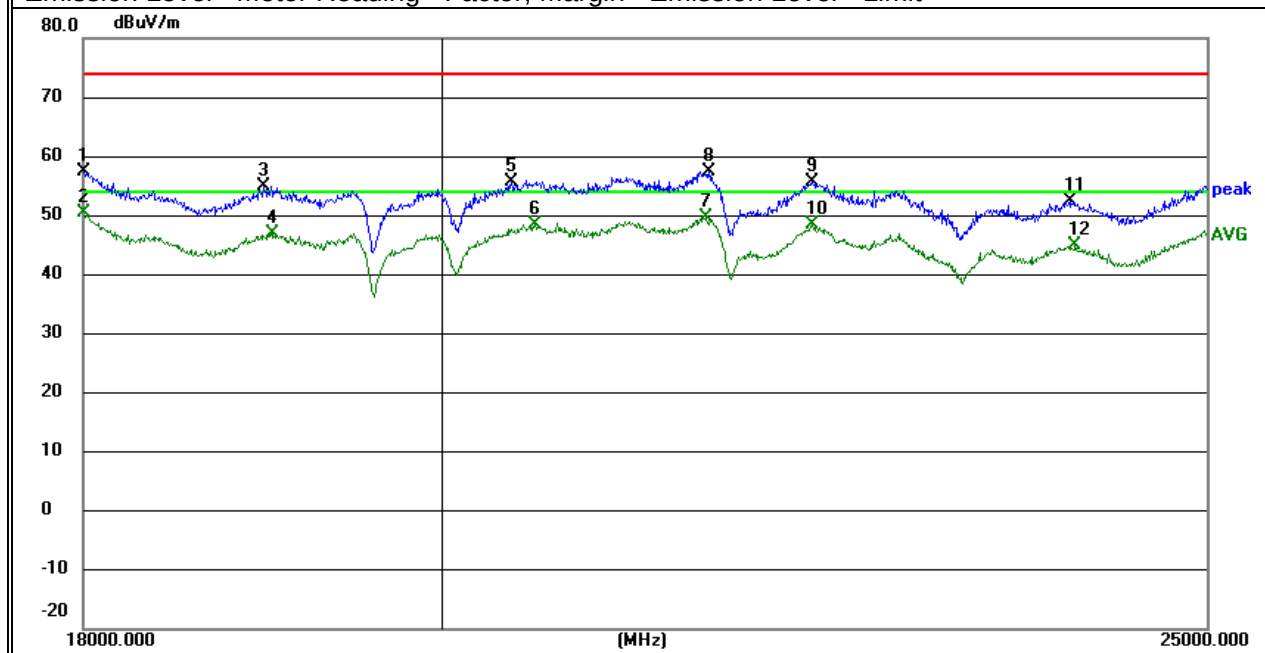


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode3	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	18006.300	53.37	4.41	57.78	74.00	-16.22	peak
H	18006.300	46.24	4.41	50.65	54.00	-3.35	AVG
H	19004.325	50.47	4.93	55.40	74.00	-18.60	peak
H	19037.400	42.36	4.96	47.32	54.00	-6.68	AVG
H	20430.225	41.01	7.00	48.01	54.00	-5.99	AVG
H	20491.475	48.95	7.23	56.18	74.00	-17.82	peak
H	21565.800	48.84	8.27	57.11	74.00	-16.89	peak
H	21619.175	42.02	8.29	50.31	54.00	-3.69	AVG
H	22255.650	38.86	9.42	48.28	54.00	-5.72	AVG
H	22287.150	46.42	9.49	55.91	74.00	-18.09	peak
H	24012.650	40.21	12.03	52.24	74.00	-21.76	peak
H	24019.825	33.06	12.02	45.08	54.00	-8.92	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

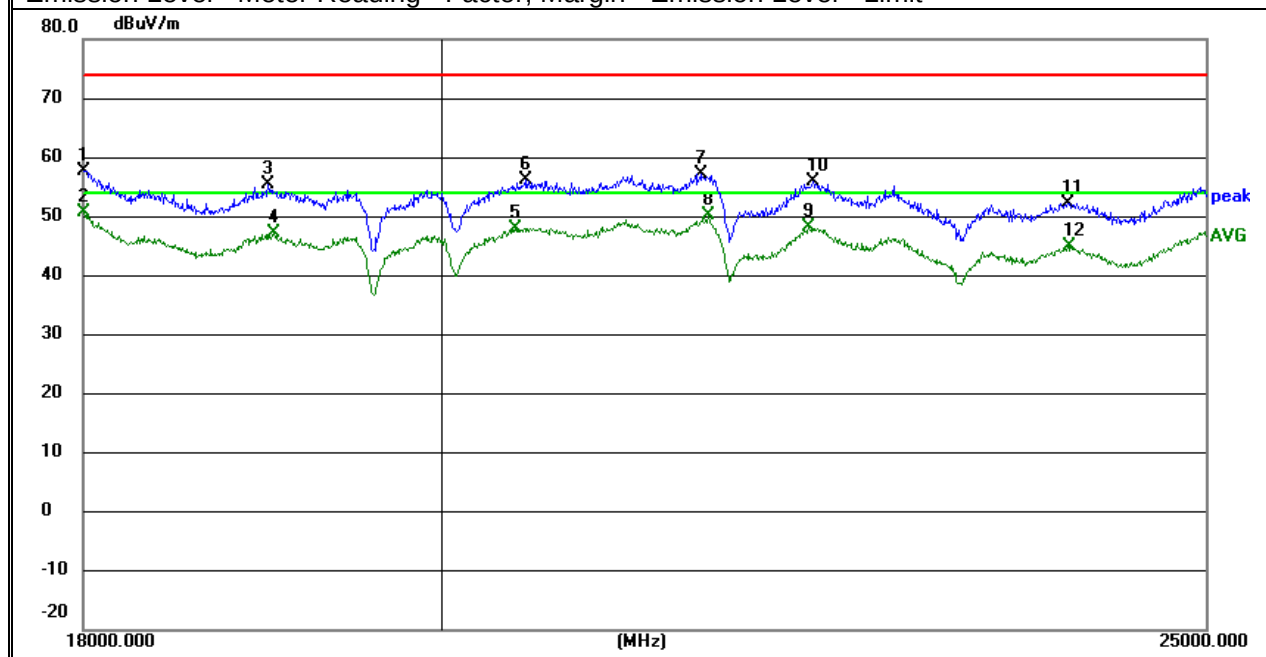


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode4	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	18021.175	90.37	-32.98	57.39	74.00	-16.61	peak
V	18021.175	83.16	-32.98	50.18	54.00	-3.82	AVG
V	18953.400	79.85	-32.88	46.97	54.00	-7.03	AVG
V	19019.725	87.16	-32.87	54.29	74.00	-19.71	peak
V	20440.025	80.28	-32.12	48.16	54.00	-5.84	AVG
V	20454.725	88.08	-32.10	55.98	74.00	-18.02	peak
V	21587.675	79.99	-30.45	49.54	54.00	-4.46	AVG
V	21614.100	88.27	-30.41	57.86	74.00	-16.14	peak
V	22217.325	85.44	-29.54	55.90	74.00	-18.10	peak
V	22252.850	78.01	-29.49	48.52	54.00	-5.48	AVG
V	23994.625	80.78	-27.04	53.74	74.00	-20.26	peak
V	24020.875	71.74	-27.02	44.72	54.00	-9.28	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

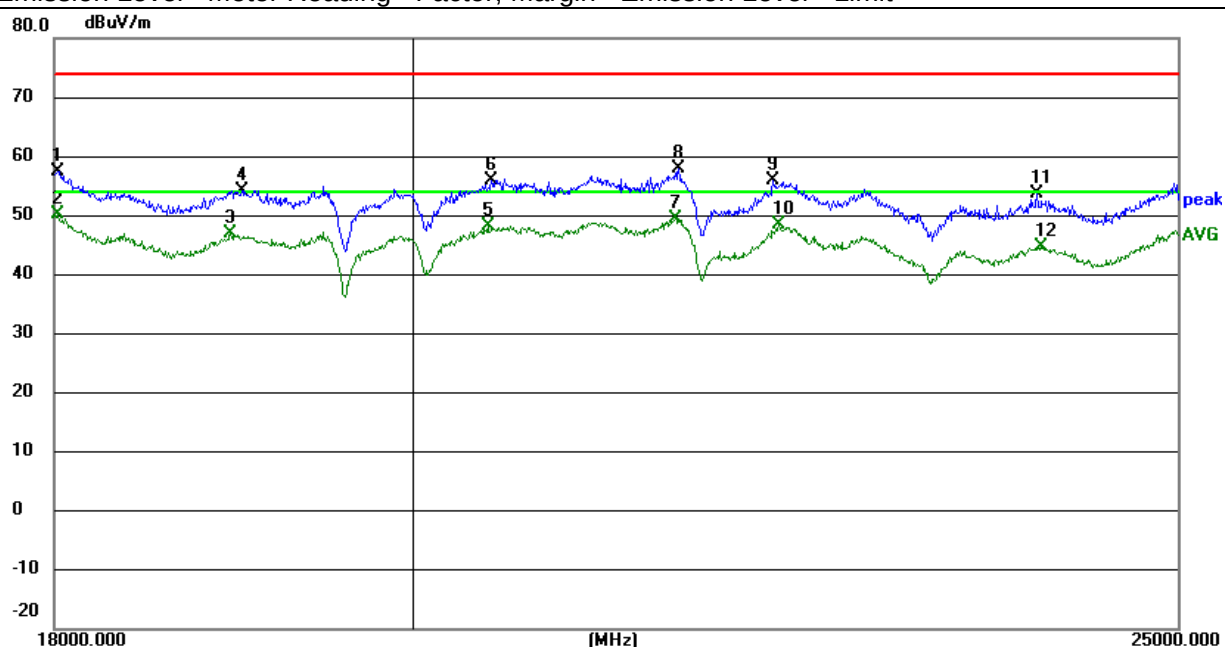


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode4	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	18000.000	47.29	10.41	57.70	74.00	-16.30	peak
H	18033.950	45.42	4.42	49.84	54.00	-4.16	AVG
H	19012.725	49.80	4.94	54.74	74.00	-19.26	peak
H	19060.675	42.17	4.98	47.15	54.00	-6.85	AVG
H	20562.000	48.96	7.36	56.32	74.00	-17.68	peak
H	20580.375	41.15	7.39	48.54	54.00	-5.46	AVG
H	21590.475	41.22	8.29	49.51	54.00	-4.49	AVG
H	21615.150	49.05	8.30	57.35	74.00	-16.65	peak
H	22725.700	36.30	10.10	46.40	54.00	-7.60	AVG
H	22833.150	44.75	10.23	54.98	74.00	-19.02	peak
H	24022.100	41.53	12.01	53.54	74.00	-20.46	peak
H	24039.425	33.41	11.97	45.38	54.00	-8.62	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

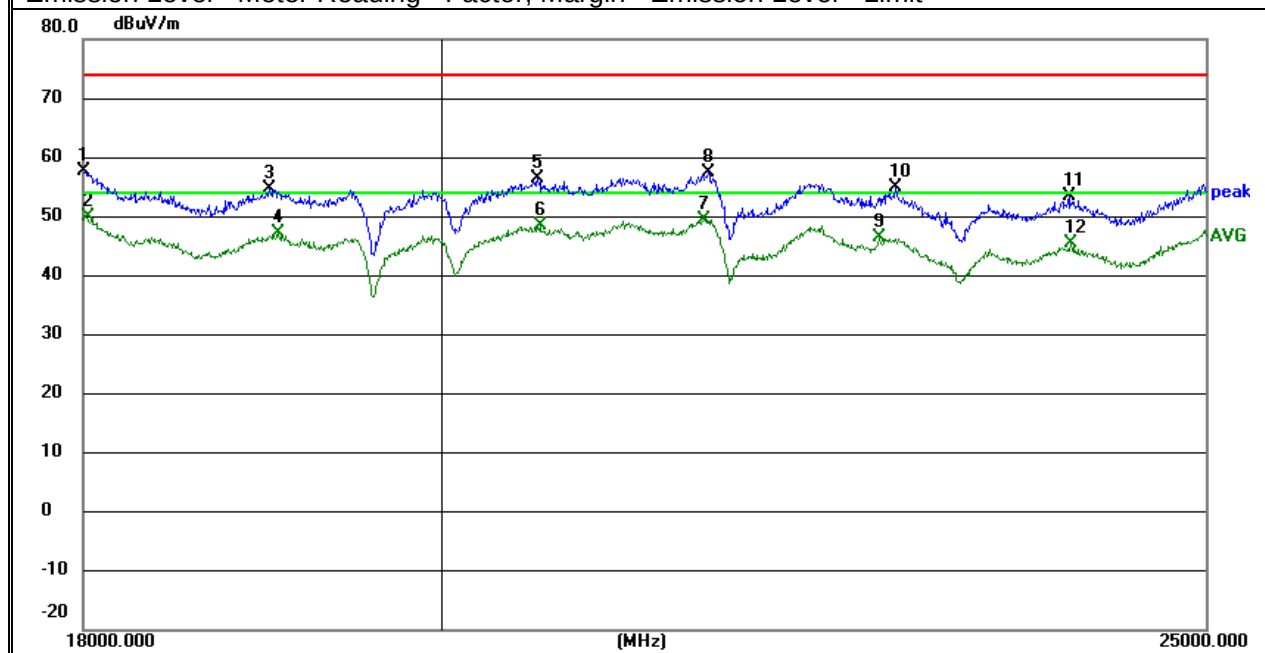


6.2.6.5 Test Result of Radiated Spurious at Band Edges

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2390.000	59.70	-12.17	47.53	74.00	-26.47	peak
V	2390.000	49.63	-12.17	37.46	54.00	-16.54	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

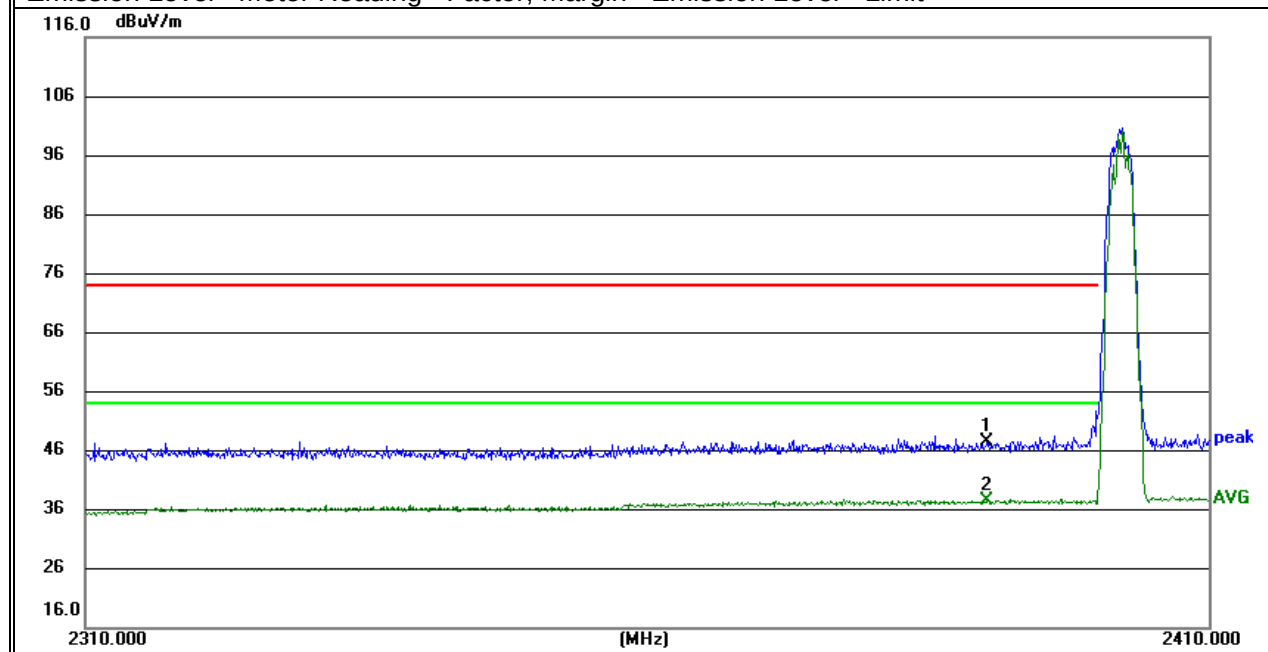


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	2390.000	56.79	-12.17	44.62	74.00	-29.38	peak
H	2390.000	47.31	-12.17	35.14	54.00	-18.86	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

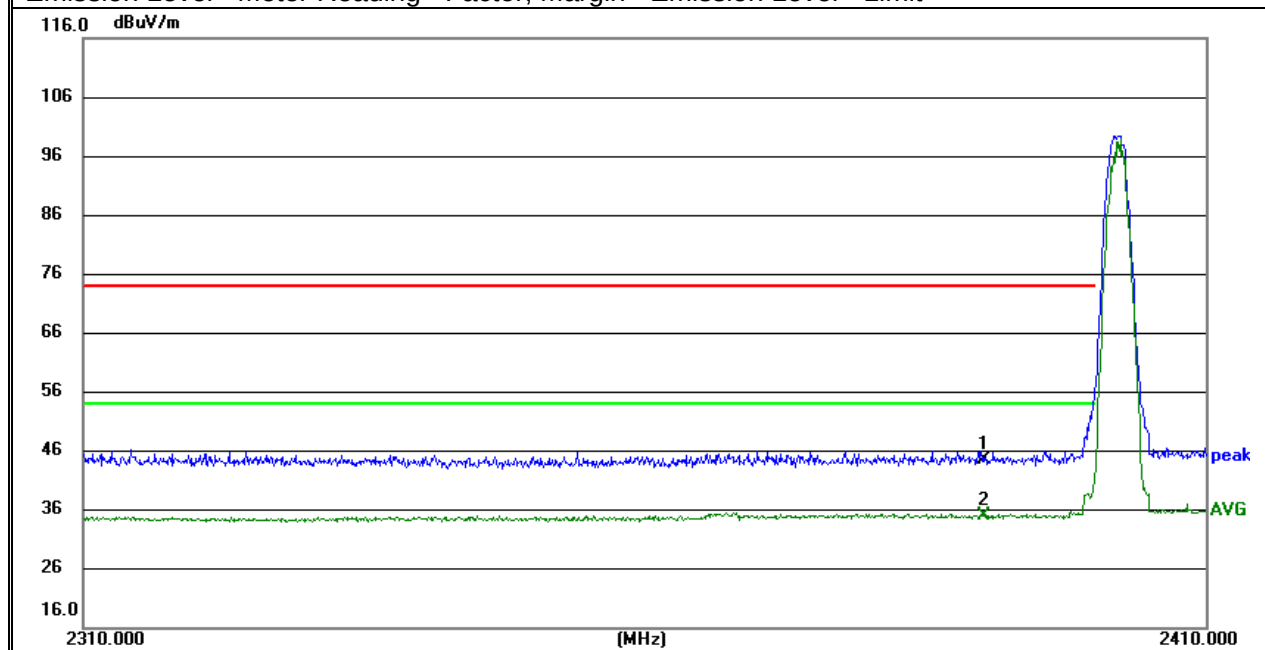


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode4	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2483.500	58.21	-11.33	46.88	74.00	-27.12	peak
V	2483.500	49.03	-11.33	37.70	54.00	-16.30	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

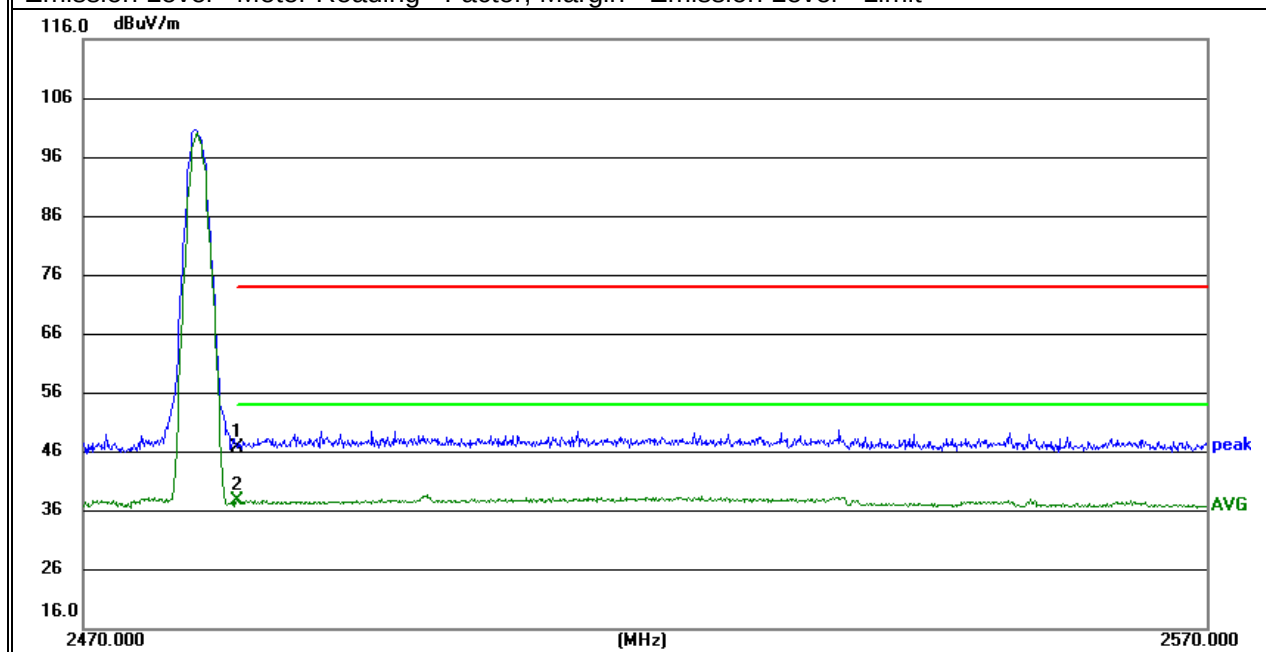


EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode4	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	2483.500	57.99	-11.33	46.66	74.00	-27.34	peak
H	2483.500	49.01	-11.33	37.68	54.00	-16.32	AVG

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

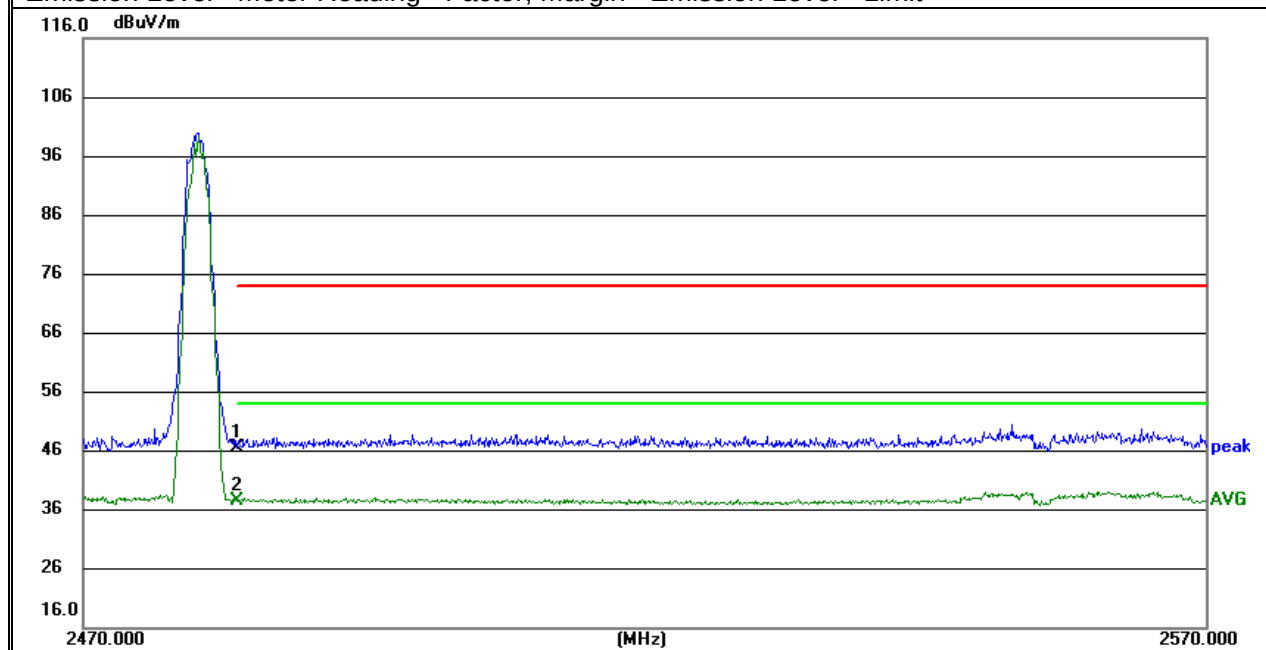

6.3 6DB BANDWIDTH

6.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

6.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

6.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

6.3.4 Test Setup

Please refer to Section 6.1 of this test report.

6.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with

the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.6 Test Results

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Tested By:	Leo Wang

Test data reference attachment.

6.4 DUTY CYCLE

6.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance v05r02s Section 6.

6.4.2 Conformance Limit

No limit requirement.

6.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

6.4.4 Test Setup

Please refer to Section 6.1 of this test report.

6.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz(the largest available value)

VBW = 8MHz ($\geq$ RBW)

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total}

6.4.6 Test Results

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	N/A	Test By:	N/A

Note: Not Applicable

6.5 PEAK OUTPUT POWER

6.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.1.

6.5.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

6.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

6.5.4 Test Setup

Please refer to Section 6.1 of this test report.

6.5.5 Test Procedure

The testing follows Subclause 11.9.1.1 of ANSI C63.10

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set the RBW $\geq$ DTS bandwidth.

Set VBW $= 3 \times$ RBW.

Set the span $\geq 3 \times$ RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

6.5.6 Test Results

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Tested By:	Leo Wang

Test data reference attachment.

6.6 POWER SPECTRAL DENSITY

6.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

6.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

6.6.4 Test Setup

Please refer to Section 6.1 of this test report.

6.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

a) Set analyzer center frequency to DTS channel center frequency.

b) Set the span to 1.5*DTS bandwidth.

c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

d) Set the VBW $\geq 3 \text{ RBW}$.

e) Detector = peak.

f) Sweep time = auto couple.

g) Trace mode = max hold.

h) Allow trace to fully stabilize.

i) Use the peak marker function to determine the maximum amplitude level within the RBW.

j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.6.6 Test Results

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Tested By:	Leo Wang

Test data reference attachment.

6.7 CONDUCTED BAND EDGE MEASUREMENT

6.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

6.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

6.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

6.7.4 Test Setup

Please refer to Section 6.1 of this test report.

6.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

6.7.6 Test Results

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode4	Tested By:	Leo Wang

Test data reference attachment.

6.8 SPURIOUS RF CONDUCTED EMISSIONS

6.8.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

6.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

6.8.3 Test Setup

Please refer to Section 6.1 of this test report.

6.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 26.5GHz.

6.8.5 Test Results

EUT:	Celerway Stratus 5GR16	Model No.:	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode4	Tested By:	Leo Wang

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

6.9 ANTENNA APPLICATION

6.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.9.2 Result


The EUT antenna is permanent attached External antenna (Gain:5dBi). It comply with the standard requirement.

7 TEST RESULTS


7.1.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	5.33	30	Pass
NVNT	BLE	2440	Ant 1	4.95	30	Pass
NVNT	BLE	2480	Ant 1	4.57	30	Pass


Power NVNT BLE 2402MHz Ant1

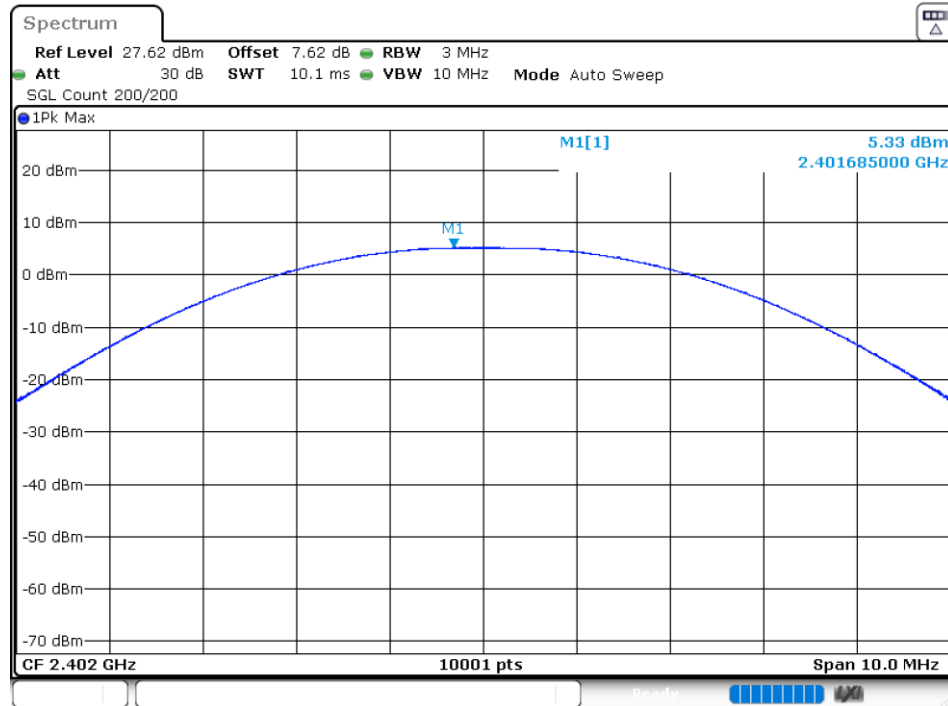

Power NVNT BLE 2440MHz Ant1

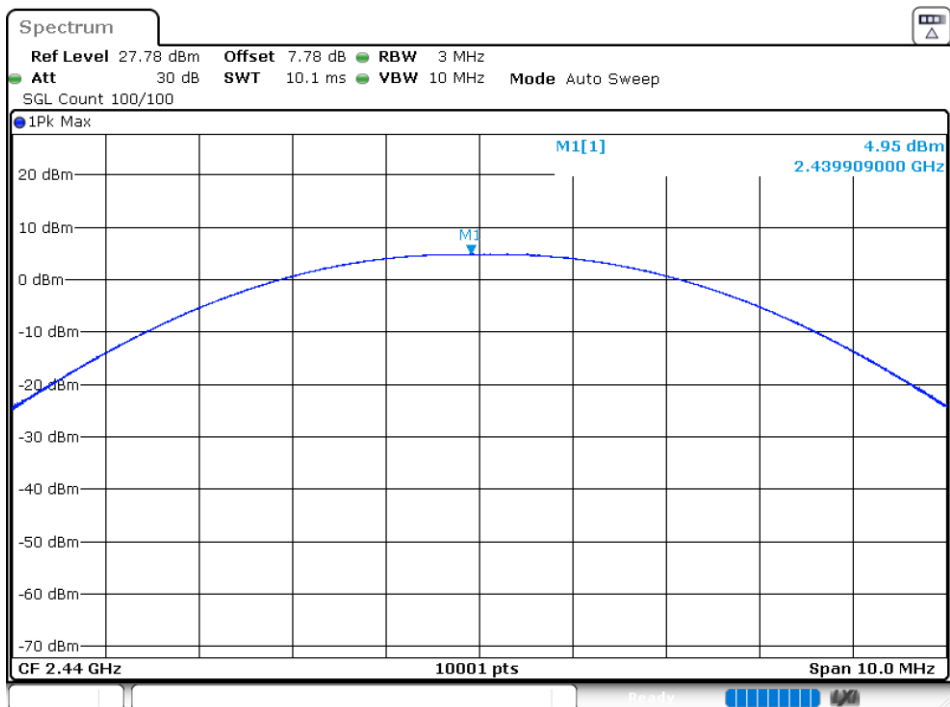


Power NVNT BLE 2480MHz Ant1

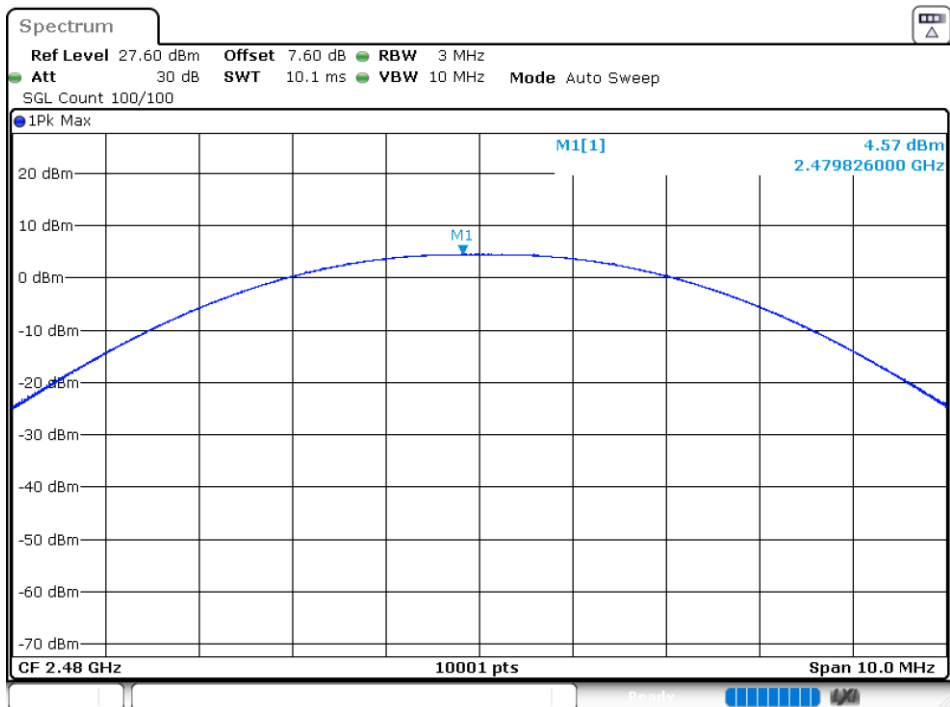


7.1.2 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	0.6638	0.5	Pass
NVNT	BLE	2440	Ant 1	0.667	0.5	Pass
NVNT	BLE	2480	Ant 1	0.6794	0.5	Pass


-6 dB BW NVNT BLE 2402MHz Ant1

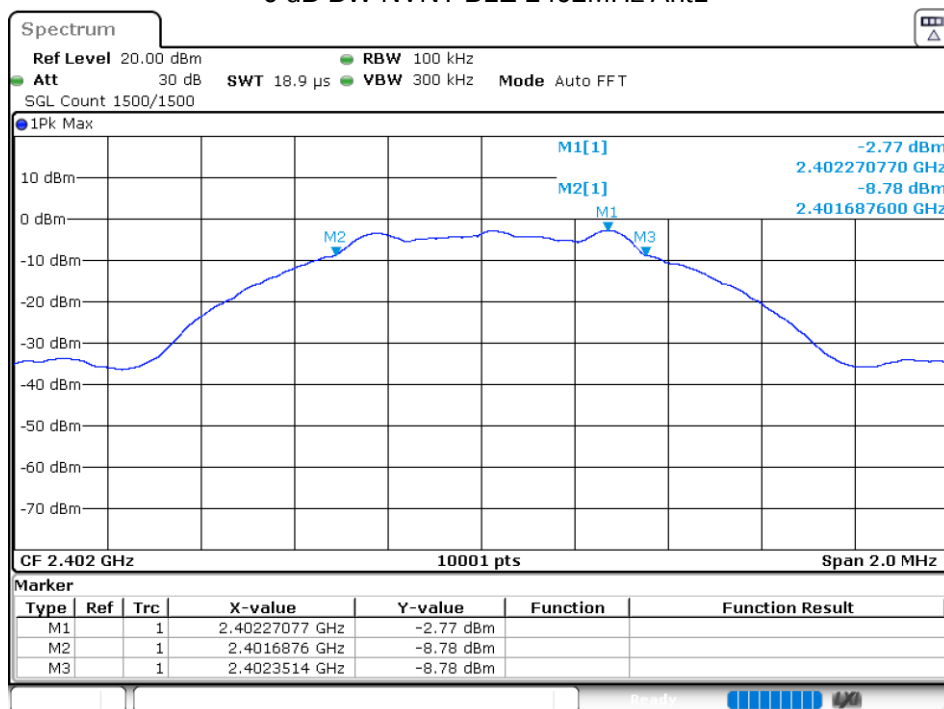

-6 dB BW NVNT BLE 2440MHz Ant1

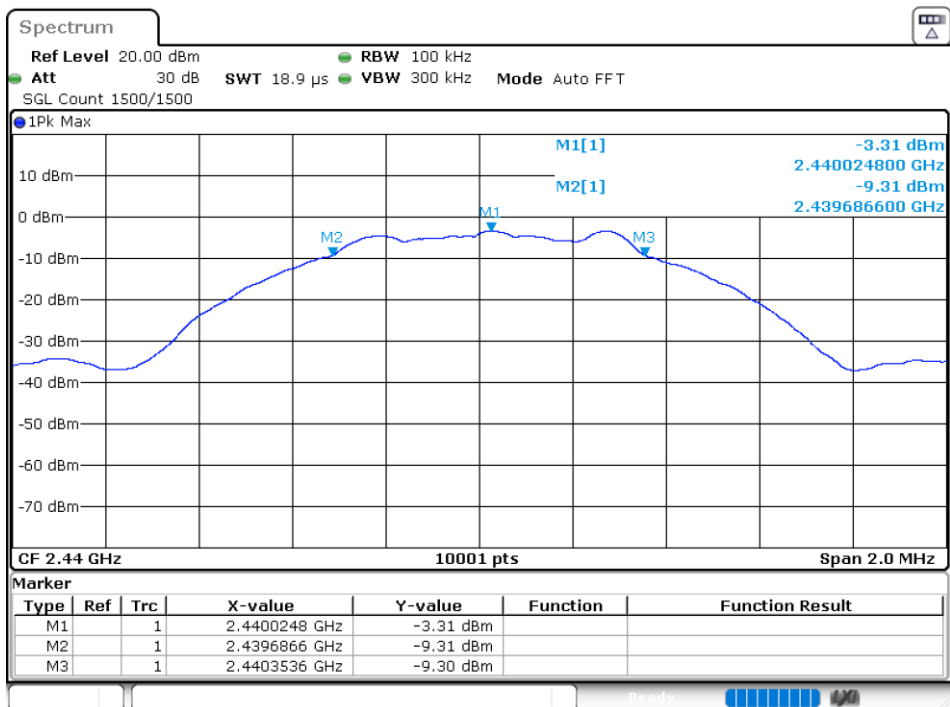


-6 dB BW NVNT BLE 2480MHz Ant1

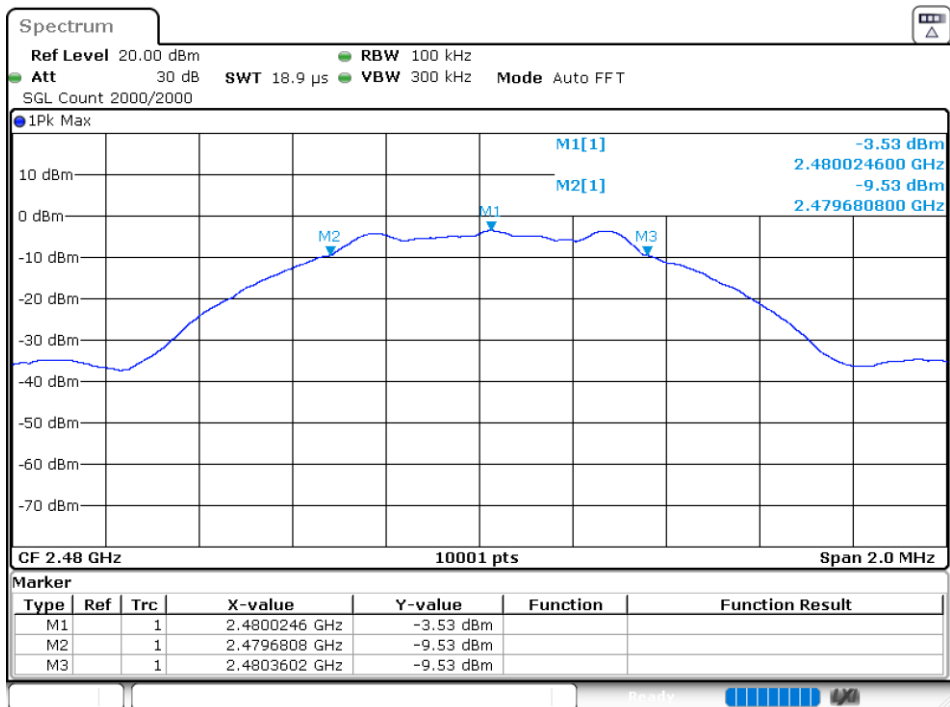


7.1.3 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-10.75	8	Pass
NVNT	BLE	2440	Ant 1	-11.08	8	Pass
NVNT	BLE	2480	Ant 1	-11.52	8	Pass


PSD NVNT BLE 2402MHz Ant1

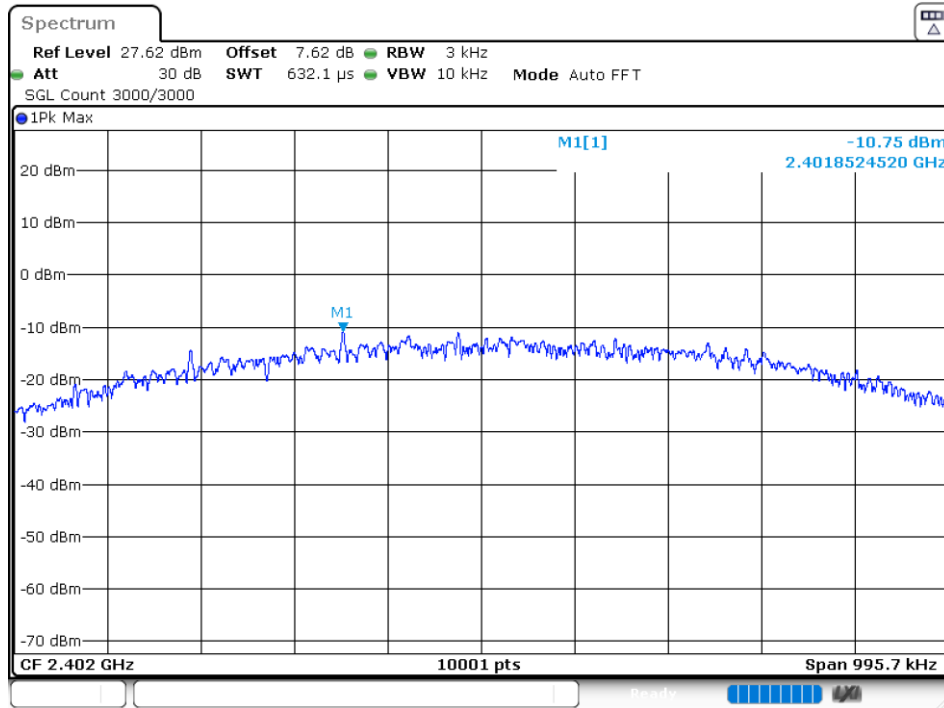

PSD NVNT BLE 2440MHz Ant1

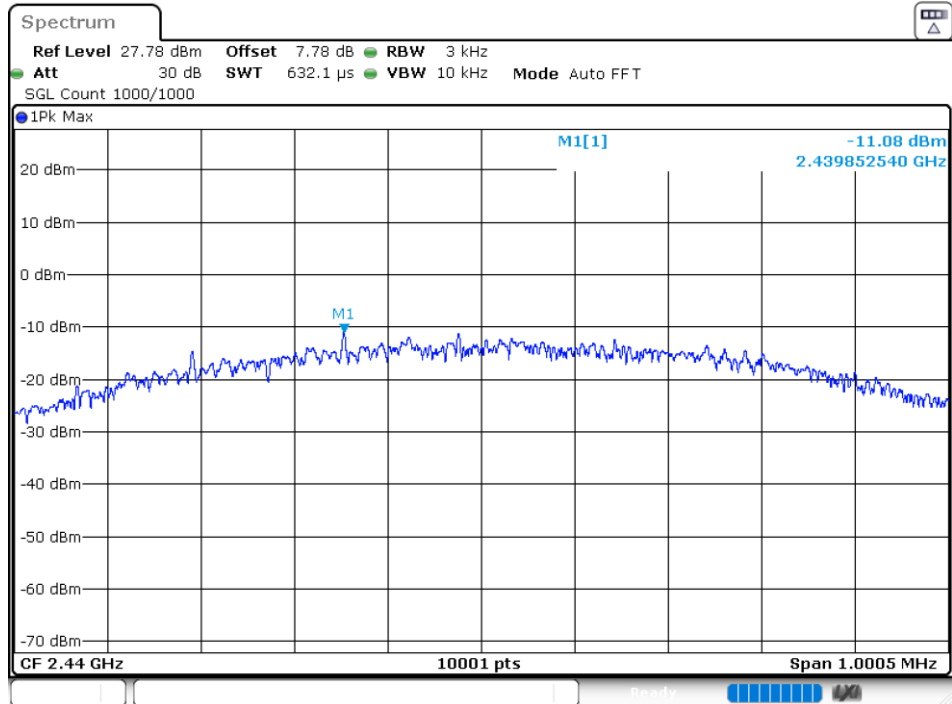


PSD NVNT BLE 2480MHz Ant1

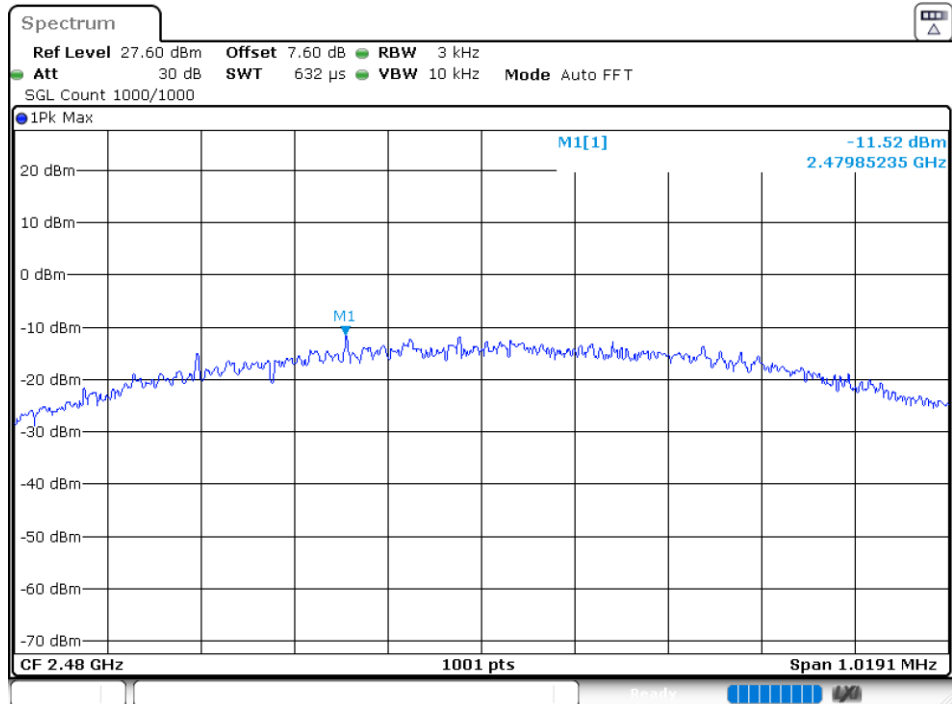


7.1.4 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-54.81	-20	Pass
NVNT	BLE	2480	Ant 1	-55.78	-20	Pass


Band Edge NVNT BLE 2402MHz Ant1 Ref

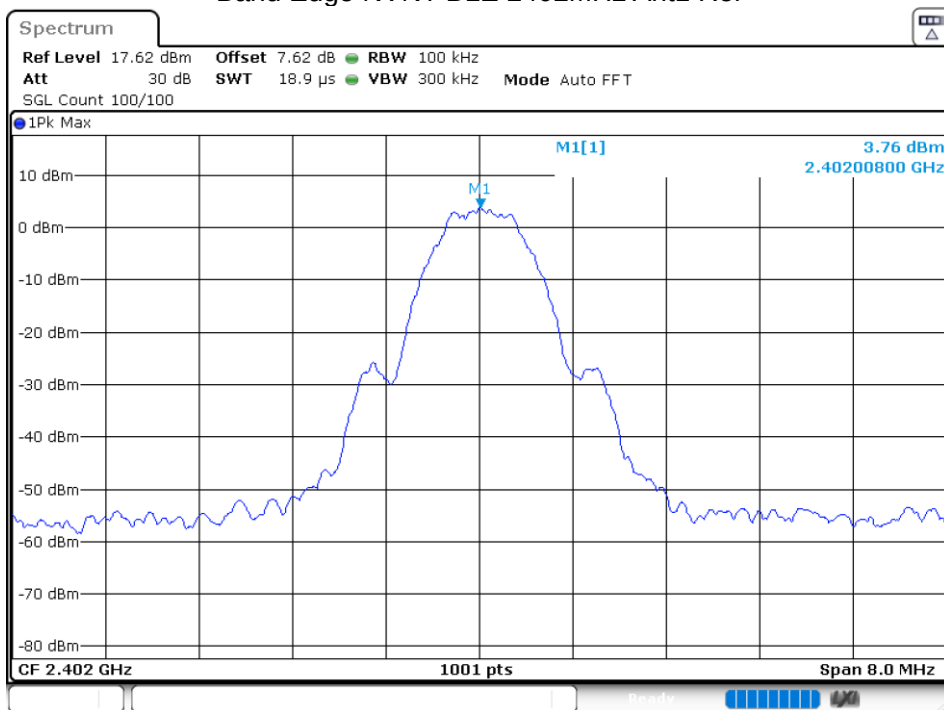


Band Edge NVNT BLE 2402MHz Ant1 Emission

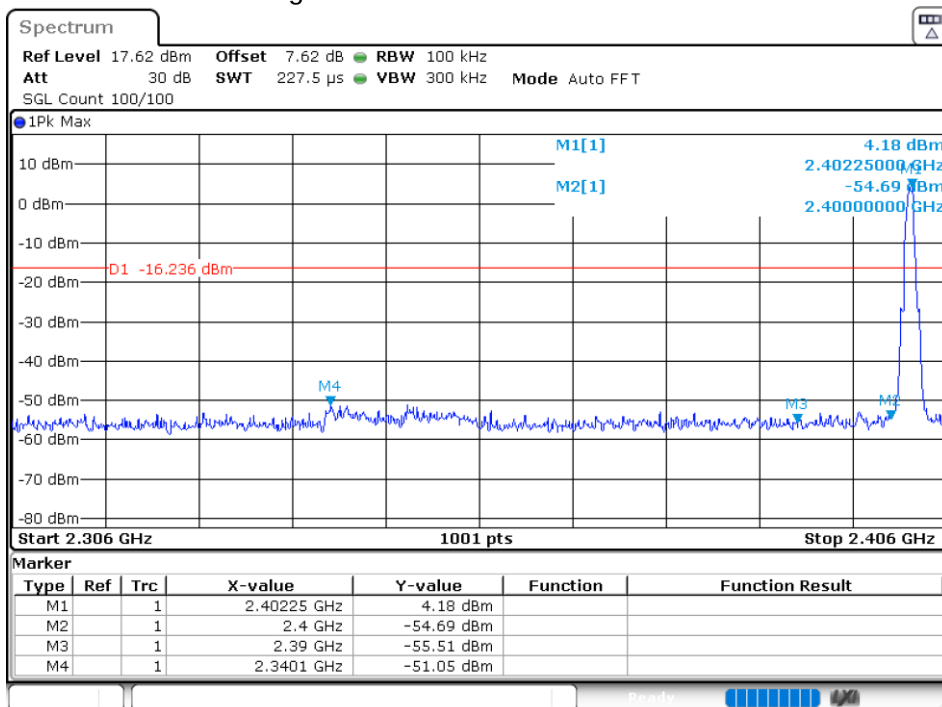

Band Edge NVNT BLE 2480MHz Ant1 Ref

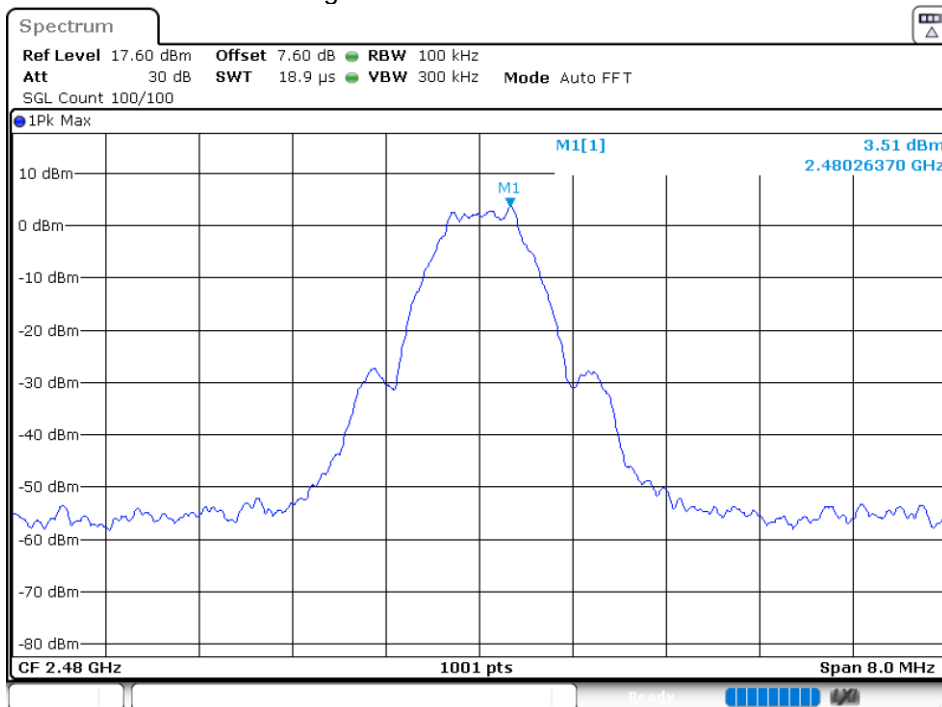


Band Edge NVNT BLE 2480MHz Ant1 Emission

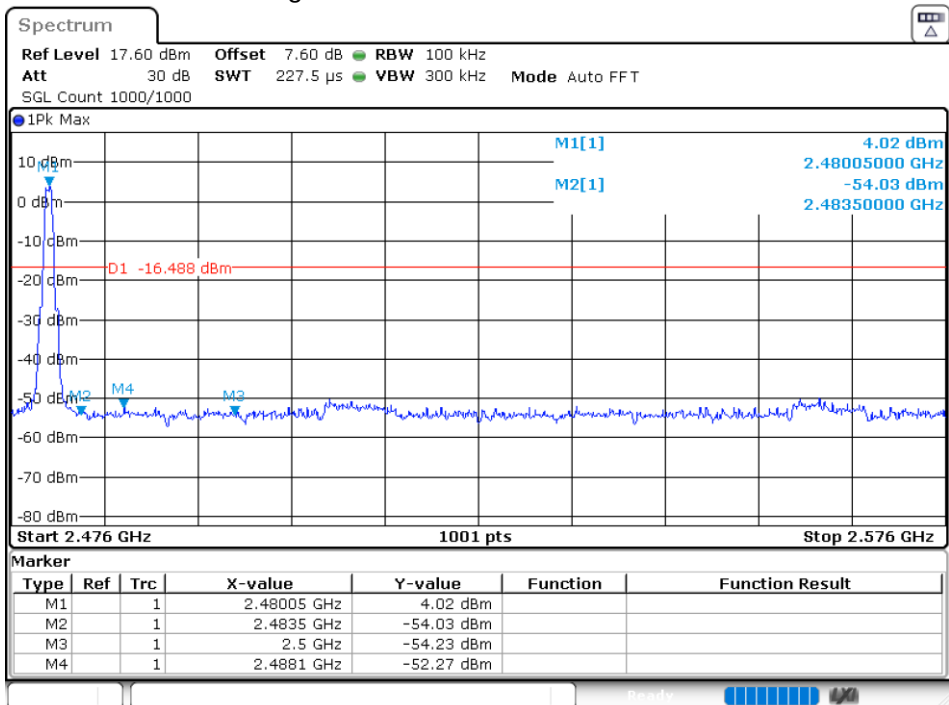


7.1.5 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-48.62	-20	Pass
NVNT	BLE	2440	Ant 1	-48.75	-20	Pass
NVNT	BLE	2480	Ant 1	-48.68	-20	Pass


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

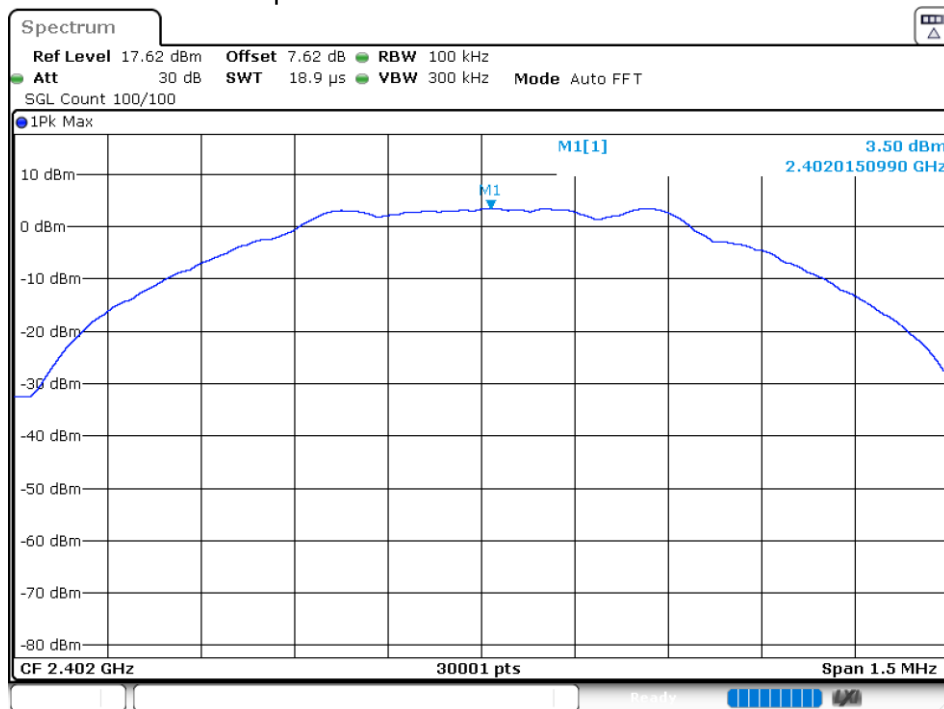


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

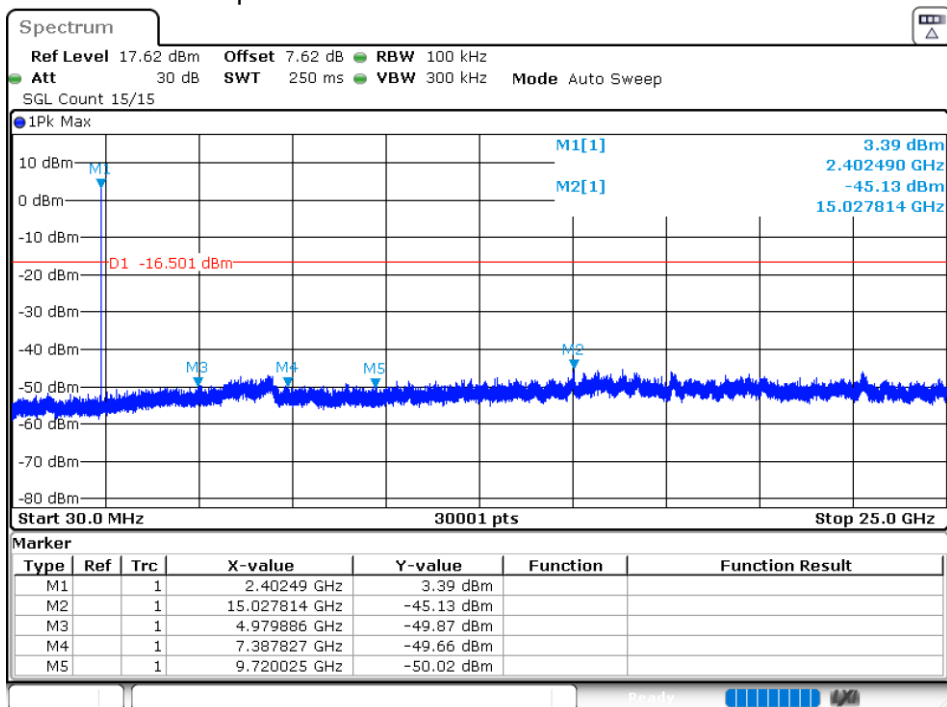


Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

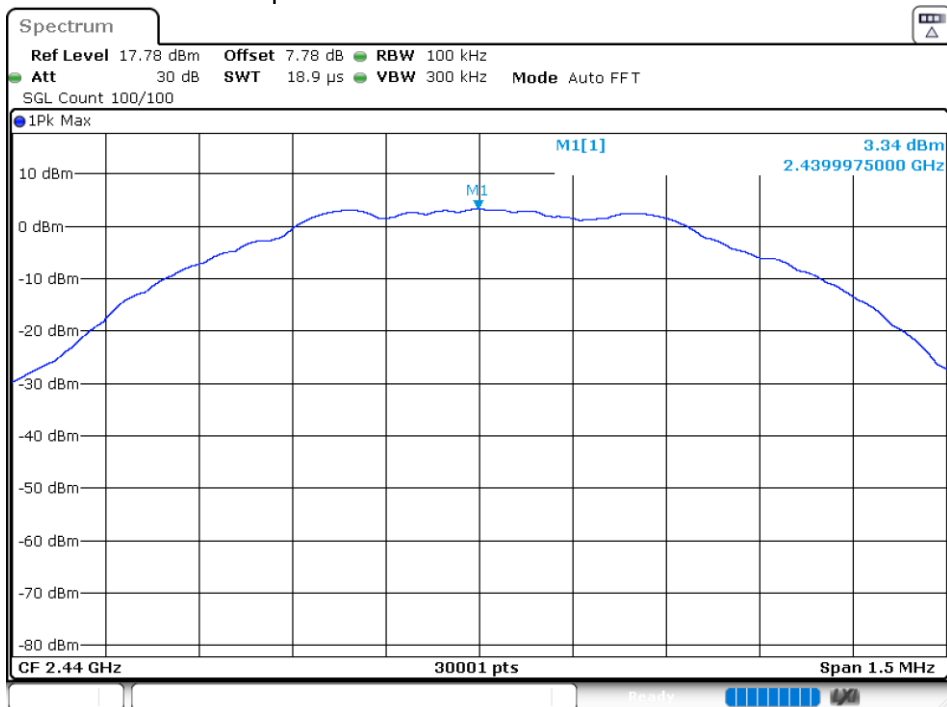


Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

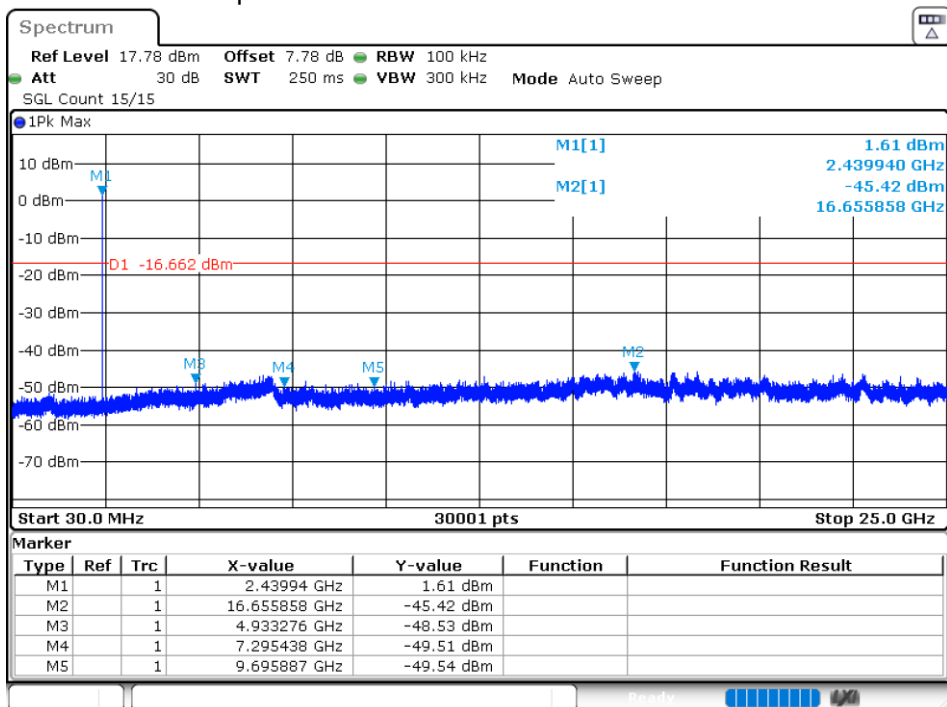

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

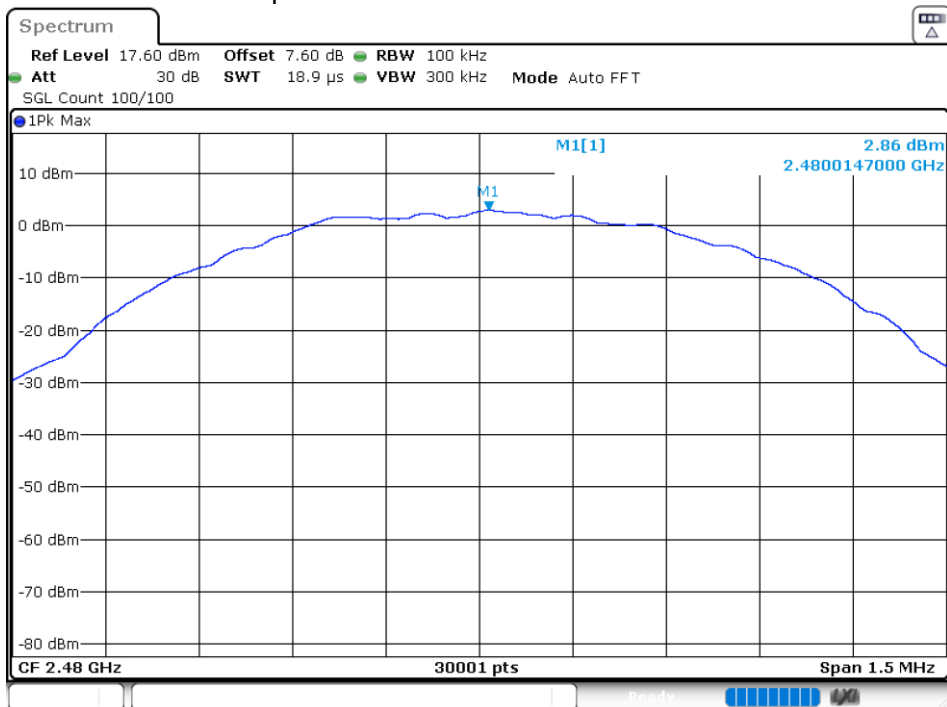

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

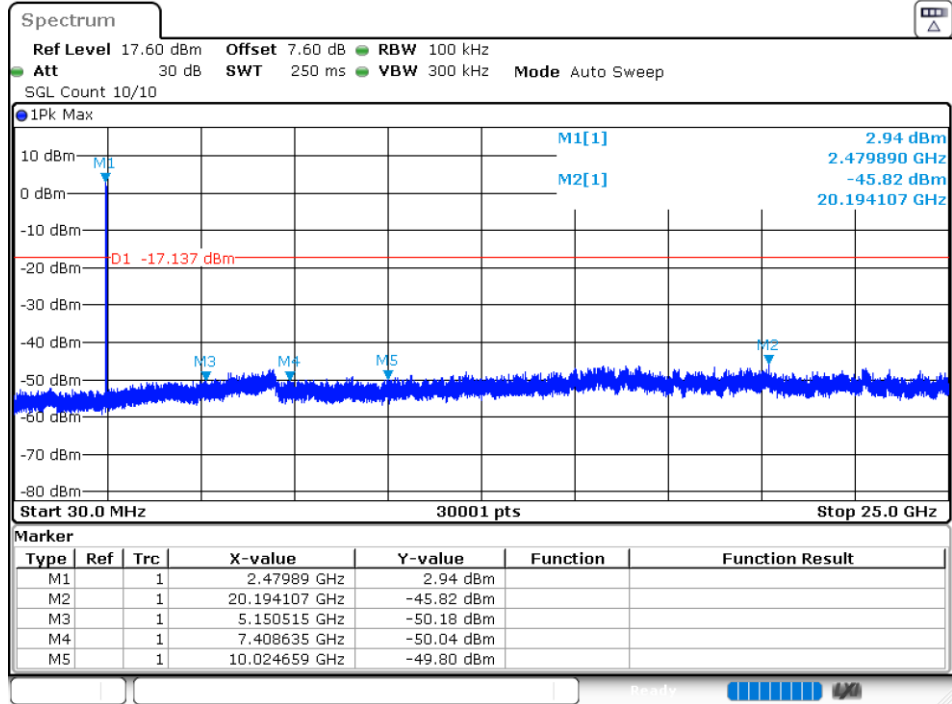

END OF REPORT