

FCC RADIO TEST REPORT

FCC ID: 2AW69-CWYSTR5G

Product : Celerway Stratus 5GR16

Trade Mark : Celerway Stratus 5GR16

Model Name : CWY-M5.3-E5C2W2R16

Family Model : CWY-M5.3-E5C1W2R16

Report No. : S24070504205003

Prepared for

Celerway Communication AS

Lilleakerveien 2B, 0283 Oslo, Norway

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name: Celerway Communication AS

Address: Lilleakerveien 2B, 0283 Oslo, Norway

Manufacturer's Name.....: Celerway Communication AS

Address: Lilleakerveien 2B, 0283 Oslo, Norway

Product description

Product name.....: Celerway Stratus 5GR16

Model and/or type reference : CWY-M5.3-E5C2W2R16

Family Model.....: CWY-M5.3-E5C1W2R16

Standards: FCC Part15.407

Test procedure ANSI C63.10-2013

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number.....: S220324019002
S240705042005

Date of Test


Date (s) of performance of tests Apr. 20, 2022 ~ Jul.08, 2022

Oct. 01, 2024 ~ Dec.20, 2024

Date of Issue..... Dec.23, 2024

Test Result..... **Pass**

*Note: A Part of test data of this report are based on the original test report
S22032401905003, dated by Jul.08, 2022*

Prepared By : 
Mary Hu
(Project Engineer)

Reviewed By : 
Aaron Cheng
(Supervisor)

Approved By : 
Alex Li
(Manager)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 FACILITIES AND ACCREDITATIONS	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . TEST REQUIREMENTS	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	27
3.3 POWER SPECTRAL DENSITY TEST	65
3.4 26DB & 99% EMISSION BANDWIDTH	68
3.5 MINIMUM 6 DB BANDWIDTH	70
3.6 MAXIMUM CONDUCTED OUTPUT POWER	72
3.7 OUT OF BAND EMISSIONS	76
3.8 SPURIOUS RF CONDUCTED EMISSIONS	78
3.9 FREQUENCY STABILITY MEASUREMENT	79
4. ANTENNA REQUIREMENT	86
4.1 STANDARD REQUIREMENT	86
4.2 EUT ANTENNA	86

[illegible]

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.
No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	3.6dB
2	RF power, conducted	0.16dB
3	Spurious emissions, conducted	0.21dB
4	All emissions, radiated(30MHz~1GHz)	5.2dB
5	All emissions, radiated(1GHz~6GHz)	5.1dB
6	All emissions, radiated(> 6GHz)	5.1dB
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$
9	All emissions, radiated(9KHz~30MHz)	5.2dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Celerway Stratus 5GR16	
Trade Mark	Celerway Stratus 5GR16	
Model Name	CWY-M5.3-E5C2W2R16	
Family Model	CWY-M5.3-E5C1W2R16	
Model Difference	All models have the same circuitry, where the CWY-M5.3-E5C2W2R16 having two NR/LTE/WCDMA modules installed and the CWY-M5.3-E5C1W2R16 having only one.	
FCC ID	2AW69-CWYSTR5G	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11n/ac (40MHz channel bandwidth) ☒ 802.11ac (80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20):MCS0-MCS8; 802.11ac(VHT40/VHT80):MCS0-MCS9;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac(VHT20); 5190-5230MHz for 802.11n(HT40)/ac(VHT40); 5210MHz for 802.11ac(VHT80) ☒ 5745-5825 MHz for 802.11a/n(HT20)/ac(VHT20); 5755-5795 MHz for 802.11n(HT40)/ac(VHT40); 5775MHz for 802.11ac(VHT80)
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Function:	☐ Outdoor AP ☒ Indoor AP ☐ Fixed P2P ☐ Client
	Support TPC	☐ YES ☒ NO
	Smart system	☒ SISO for 802.11a/n/ac ☐ MIMO for 802.11n/ac
	Antenna Type	External Antenna
	Antenna Gain	5dBi
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		
Adapter	Model: XDJ961D-240400 Input: 100-240V~50/60Hz 2.0A Output: 24V $\overline{\text{---}}$ 4.0A 96.0W	
Battery	N/A	
Power supply	DC 56V from POE port or DC 24V from Adapter.	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	V1.3	
SW Version	V1.7.0-8	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n/ac(20MHz) band I (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band I (5190-5230MHz):

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11ac(80MHz) band I (5210MHz):

802.11ac(80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band IV (5755-5795MHz):

802.11n/ac(40MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Frequency and Channel list for 802.11ac(80MHz) band IV (5775MHz):

802.11ac(80MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	-	-	-	-

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 / ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155


For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 / ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode



For Radiated Test Cases



For Conducted Test Cases



Note:1.The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	XDJ961D-240400	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	DC Cable	YES	NO	1.2m
C-3	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.03.30 2022.03.30 2024.04.26	2022.03.29 2023.03.29 2025.04.25	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2021.07.01 2022.06.16 2024.04.25	2022.06.30 2023.06.15 2025.04.24	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2021.07.01 2022.06.16 2024.04.25	2022.06.30 2023.06.15 2025.04.24	1 year
4	Test Receiver	R&S	ESPI7	101318	2022.04.06 2024.04.26	2023.04.05 2025.04.25	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.30 2022.03.30 2024.05.12	2022.03.29 2023.03.29 2025.05.11	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11 2024.04.26	2023.05.10 2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-1018 0	2011071402	2021.03.30 2022.03.31 2024.05.12	2022.03.29 2023.03.30 2027.05.11	1 year 3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2021.11.07 2024.05.12	2022.11.06 2027.05.11	1 year 3 year
9	Amplifier	EMC	EMC051835 SE	980246	2021.07.01 2022.06.17 2024.04.25	2022.06.30 2023.06.16 2025.04.24	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519 B	055	2021.11.07 2024.05.17	2022.11.06 2027.05.16	1 year 3 year
11	Power Meter	DARE	RPR3006W	15I00041SN O84	2021.07.01 2022.06.17 2024.04.25	2022.06.30 2023.06.16 2025.04.24	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06 2023.05.06	2022.08.05 2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06 2023.05.06	2022.08.05 2026.05.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28 2022.06.17	2022.06.27 2025.06.16	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2019.08.06 2023.05.06	2022.08.05 2026.05.05	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.04.07 2024.04.26	2023.04.06 2027.04.25	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2022.04.06 2024.04.26	2023.04.05 2025.04.25	1 year
2	LISN	R&S	ENV216	101313	2022.04.06 2024.04.25	2023.04.05 2025.04.24	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2022.04.06 2024.04.25	2023.04.05 2025.04.24	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11 2024.04.26	2023.05.10 2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

3. TEST REQUIREMENTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

3.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.3 TEST CONFIGURATION

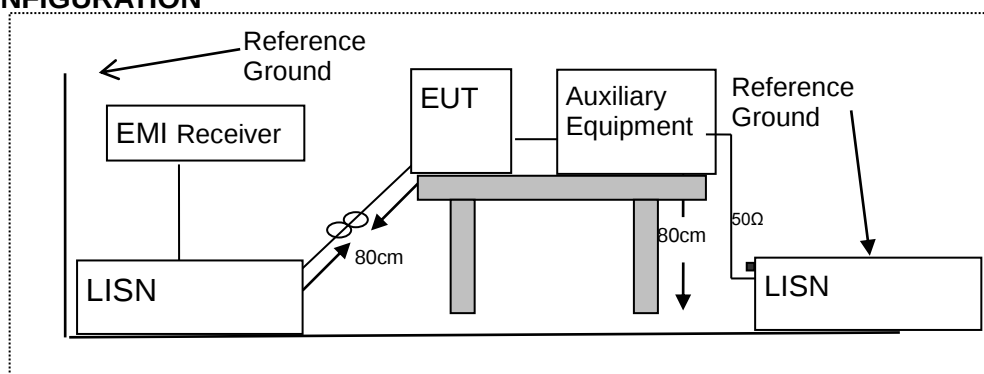

3.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


3.1.5 TEST RESULTS

EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature :	22℃	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.2G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	45.22	10.47	55.69	65.36	-9.67	QP
0.1620	32.05	10.47	42.52	55.36	-12.84	AVG
0.3339	37.03	11.02	48.05	59.35	-11.30	QP
0.3379	27.76	11.05	38.81	49.25	-10.44	AVG
0.4260	43.29	11.22	54.51	57.33	-2.82	QP
0.4300	34.34	11.21	45.55	47.25	-1.70	AVG
0.7820	32.09	11.89	43.98	56.00	-12.02	QP
0.7820	24.15	11.89	36.04	46.00	-9.96	AVG
4.9940	35.03	10.18	45.21	56.00	-10.79	QP
4.9940	24.36	10.18	34.54	46.00	-11.46	AVG
15.9420	29.50	10.40	39.90	50.00	-10.10	AVG
16.0900	37.72	10.40	48.12	60.00	-11.88	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

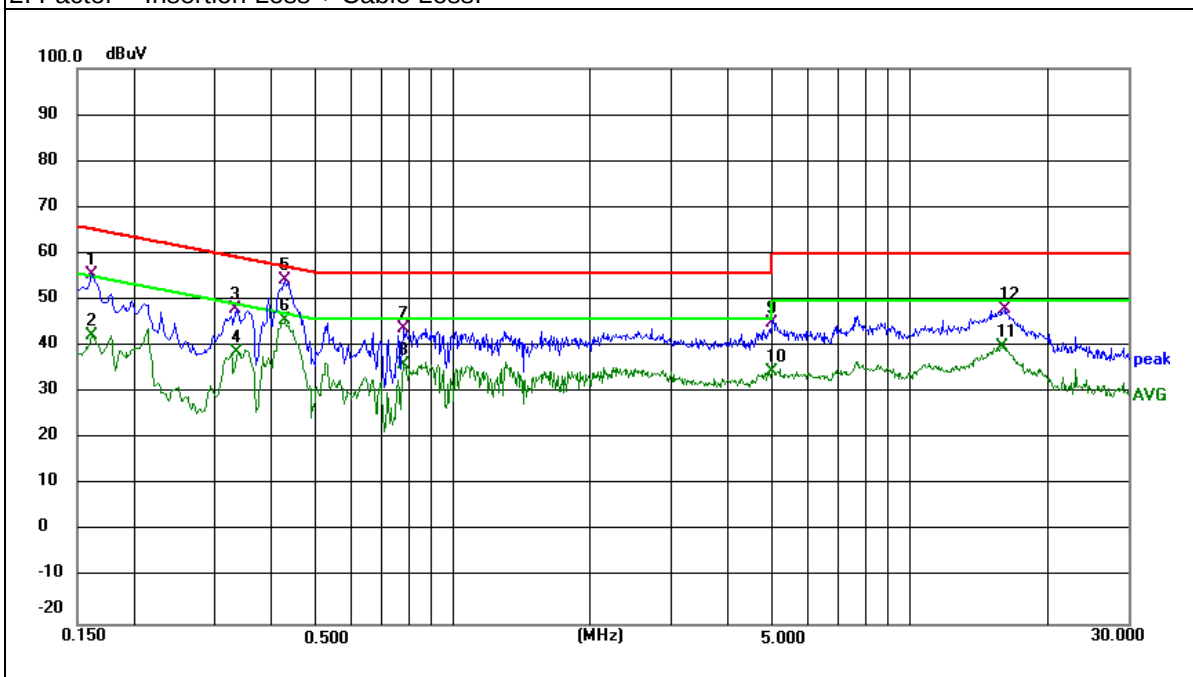


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2R16
Temperature :	22℃	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.2G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1632	46.79	10.77	57.56	65.30	-7.74	QP
0.1632	33.95	10.77	44.72	55.30	-10.58	AVG
0.3336	39.02	11.08	50.10	59.36	-9.26	QP
0.3356	29.34	11.10	40.44	49.31	-8.87	AVG
0.4213	32.24	11.27	43.51	47.42	-3.91	AVG
0.4237	40.19	11.27	51.46	57.38	-5.92	QP
0.5237	23.99	11.43	35.42	46.00	-10.58	AVG
0.5292	32.60	11.43	44.03	56.00	-11.97	QP
0.6935	33.18	11.72	44.90	56.00	-11.10	QP
0.6935	25.58	11.72	37.30	46.00	-8.70	AVG
4.9782	34.53	10.24	44.77	56.00	-11.23	QP
4.9782	23.86	10.24	34.10	46.00	-11.90	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

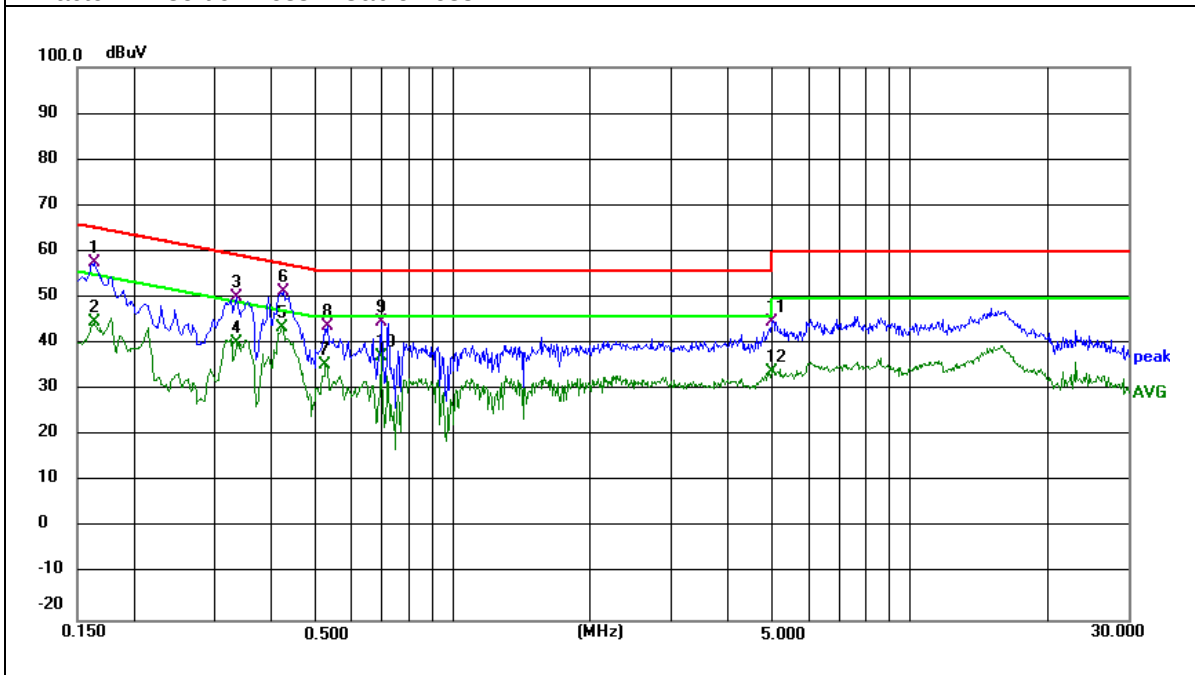


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2 R16
Temperature :	22℃	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)
Tested By:	Liumei Huang		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1539	44.19	10.40	54.59	65.79	-11.20	QP
0.1539	28.62	10.40	39.02	55.79	-16.77	AVG
0.2006	27.84	10.85	38.69	53.59	-14.90	AVG
0.2060	41.96	10.85	52.81	63.37	-10.56	QP
0.5820	29.54	11.62	41.16	56.00	-14.84	QP
0.5899	21.99	11.66	33.65	46.00	-12.35	AVG
1.7300	18.96	13.89	32.85	56.00	-23.15	QP
1.7300	1.07	13.89	14.96	46.00	-31.04	AVG
4.5820	29.37	10.31	39.68	56.00	-16.32	QP
4.6060	20.84	10.31	31.15	46.00	-14.85	AVG
13.3580	24.98	10.47	35.45	60.00	-24.55	QP
13.4820	17.32	10.46	27.78	50.00	-22.22	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

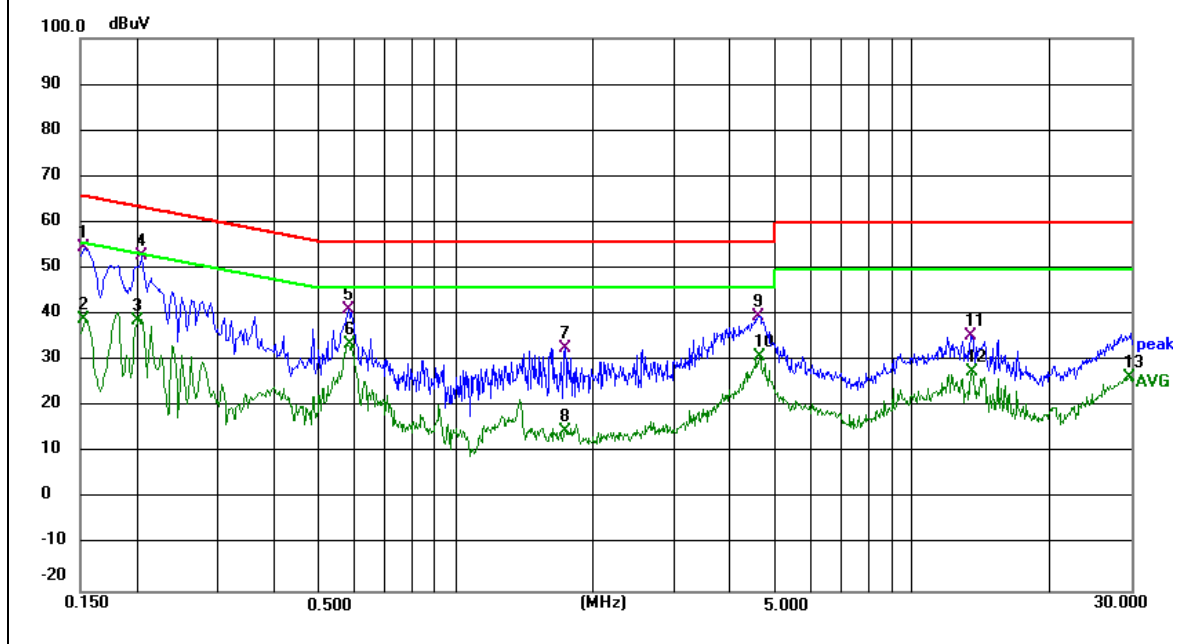


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C2W2 R16
Temperature :	22°C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2184	26.55	10.83	37.38	52.88	-15.50	AVG
0.2242	40.92	10.80	51.72	62.66	-10.94	QP
0.5700	28.40	11.40	39.80	56.00	-16.20	QP
0.5780	21.91	11.39	33.30	46.00	-12.70	AVG
0.7500	20.51	11.96	32.47	56.00	-23.53	QP
0.7660	10.48	12.05	22.53	46.00	-23.47	AVG
2.6420	30.44	10.39	40.83	56.00	-15.17	QP
2.6540	14.93	10.39	25.32	46.00	-20.68	AVG
3.8060	23.69	10.34	34.03	56.00	-21.97	QP
3.8060	11.02	10.34	21.36	46.00	-24.64	AVG
14.0300	26.36	10.53	36.89	60.00	-23.11	QP
14.2140	17.89	10.54	28.43	50.00	-21.57	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

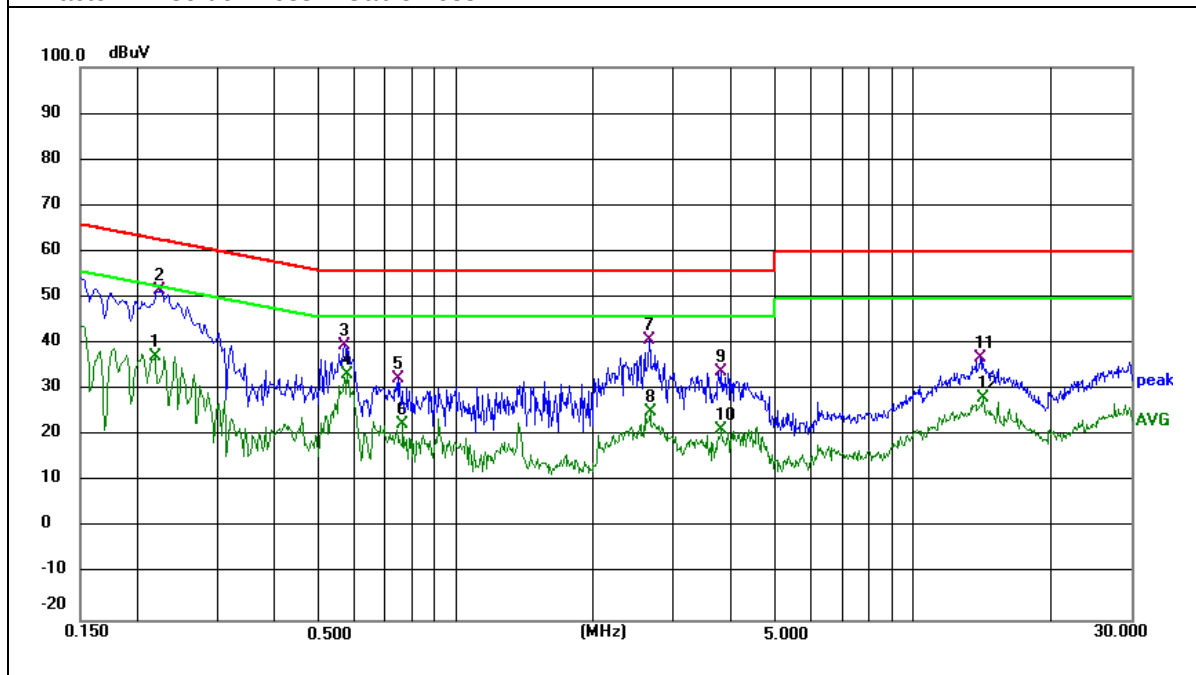


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1W2R16
Temperature :	22°C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.2G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1703	48.68	10.54	59.22	64.95	-5.73	QP
0.1740	37.85	10.57	48.42	54.77	-6.35	AVG
0.2260	33.03	10.81	43.84	52.60	-8.76	AVG
0.2300	45.62	10.79	56.41	62.45	-6.04	QP
0.3911	43.74	11.18	54.92	58.04	-3.12	QP
0.3911	32.58	11.18	43.76	48.04	-4.28	AVG
0.8500	39.02	12.07	51.09	56.00	-4.91	QP
0.8500	32.51	12.07	44.58	46.00	-1.42	AVG
5.4620	39.62	10.23	49.85	60.00	-10.15	QP
5.4620	30.56	10.23	40.79	50.00	-9.21	AVG
15.1660	40.93	10.39	51.32	60.00	-8.68	QP
15.2340	33.70	10.39	44.09	50.00	-5.91	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.3-E5C2W2R16

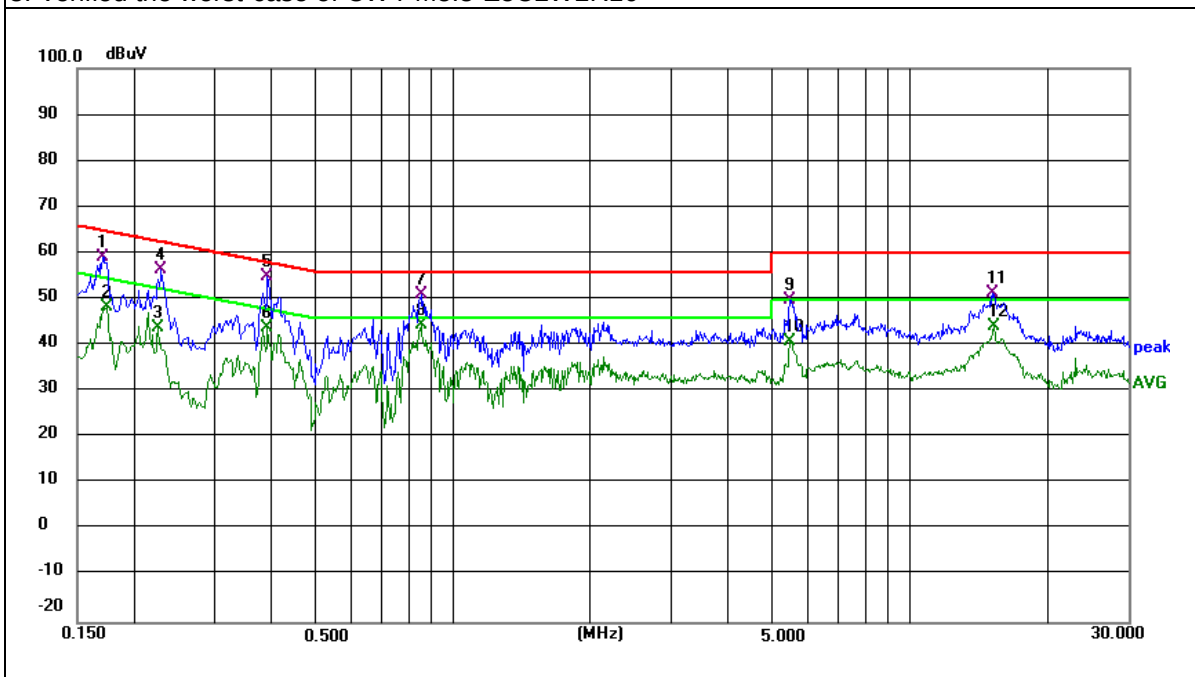


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1W2R16
Temperature :	22°C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.2G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1882	47.97	10.89	58.86	64.12	-5.26	QP
0.1882	37.81	10.89	48.70	54.12	-5.42	AVG
0.2255	30.03	10.81	40.84	52.61	-11.77	AVG
0.2290	43.62	10.78	54.40	62.49	-8.09	QP
0.3933	43.35	11.20	54.55	57.99	-3.44	QP
0.4061	31.42	11.24	42.66	47.73	-5.07	AVG
0.7160	27.85	11.83	39.68	46.00	-6.32	AVG
0.7197	39.23	11.83	51.06	56.00	-4.94	QP
1.5518	35.44	13.59	49.03	56.00	-6.97	QP
1.5518	26.08	13.59	39.67	46.00	-6.33	AVG
2.5535	36.40	10.38	46.78	56.00	-9.22	QP
2.5807	28.22	10.38	38.60	46.00	-7.40	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.3-E5C2W2R16

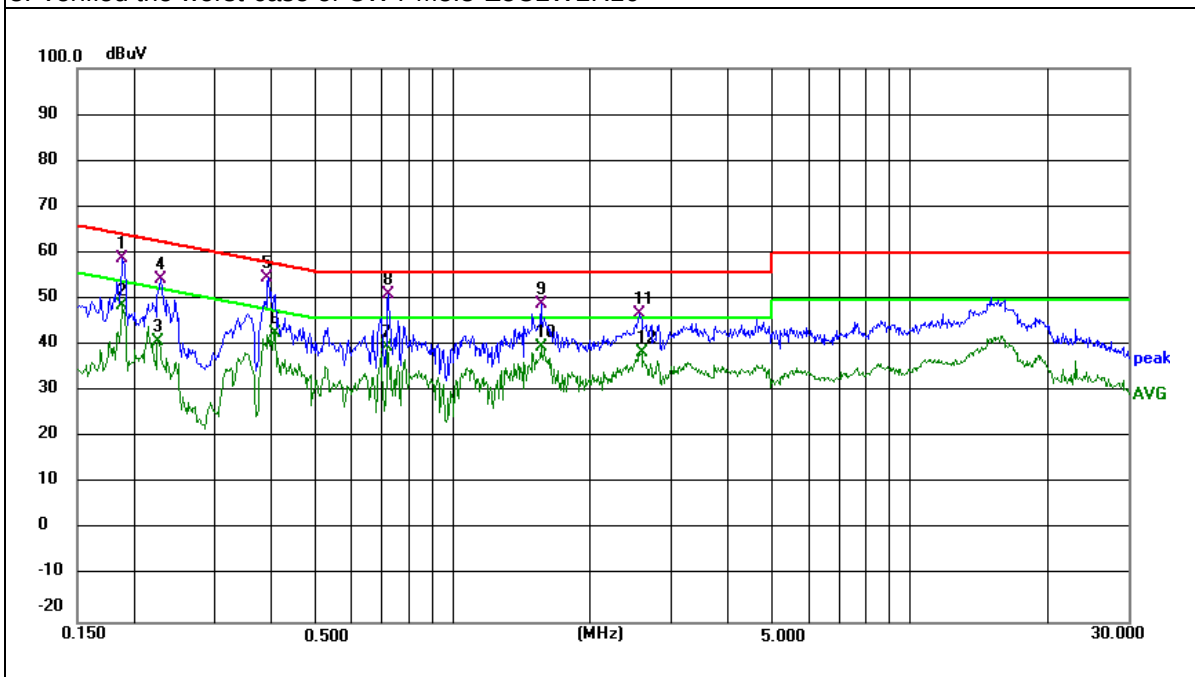


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C 2W2R16
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.8G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1597	46.22	10.72	56.94	65.48	-8.54	QP
0.1597	32.98	10.72	43.70	55.48	-11.78	AVG
0.2083	45.00	10.88	55.88	63.27	-7.39	QP
0.2140	38.71	10.84	49.55	53.05	-3.50	AVG
0.3251	40.08	11.04	51.12	59.58	-8.46	QP
0.3251	31.60	11.04	42.64	49.58	-6.94	AVG
0.4586	41.90	11.36	53.26	56.72	-3.46	QP
0.4586	34.87	11.36	46.23	46.72	-0.49	AVG
0.7160	28.35	11.83	40.18	46.00	-5.82	AVG
0.7197	39.73	11.83	51.56	56.00	-4.44	QP
6.7332	38.51	10.21	48.72	60.00	-11.28	QP
6.7332	29.39	10.21	39.60	50.00	-10.40	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

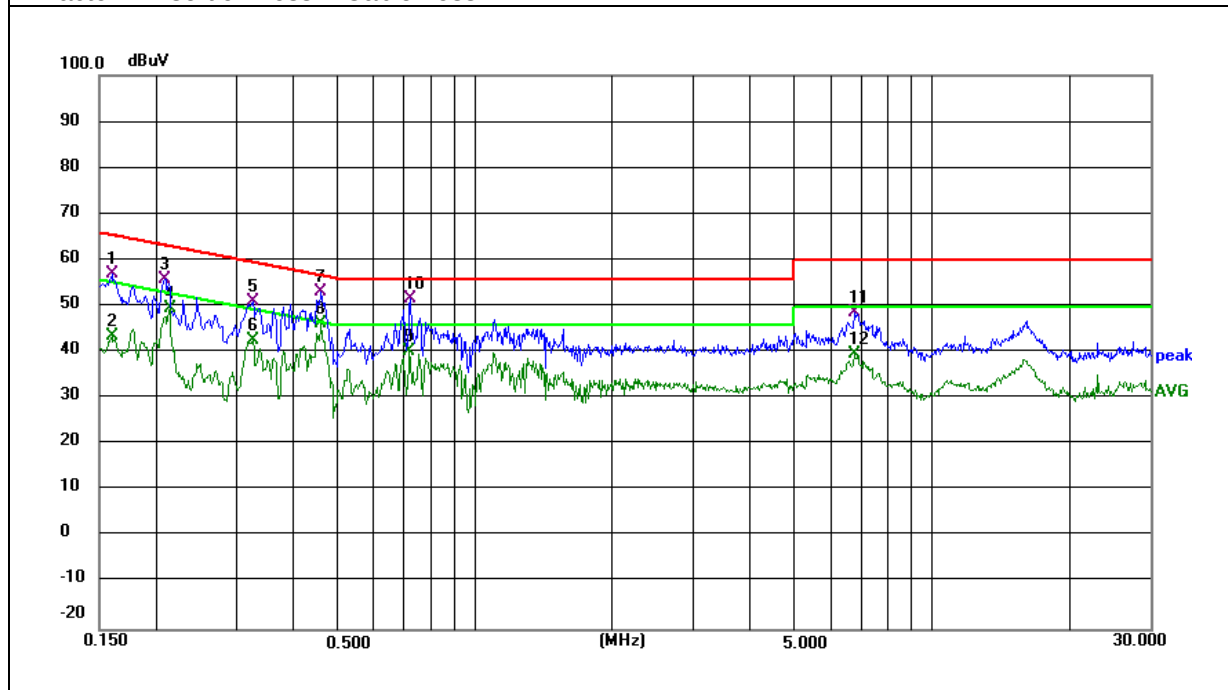


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C 2W2R16
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.8G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1780	47.39	10.63	58.02	64.58	-6.56	QP
0.1780	38.26	10.63	48.89	54.58	-5.69	AVG
0.2280	26.01	10.80	36.81	52.52	-15.71	AVG
0.2300	42.12	10.79	52.91	62.45	-9.54	QP
0.4180	42.43	11.22	53.65	57.49	-3.84	QP
0.4220	34.74	11.21	45.95	47.41	-1.46	AVG
0.7180	40.01	11.91	51.92	56.00	-4.08	QP
0.7180	30.35	11.91	42.26	46.00	-3.74	AVG
4.9940	37.53	10.18	47.71	56.00	-8.29	QP
4.9940	26.86	10.18	37.04	46.00	-8.96	AVG
23.1299	35.52	10.54	46.06	60.00	-13.94	QP
23.1299	28.68	10.54	39.22	50.00	-10.78	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

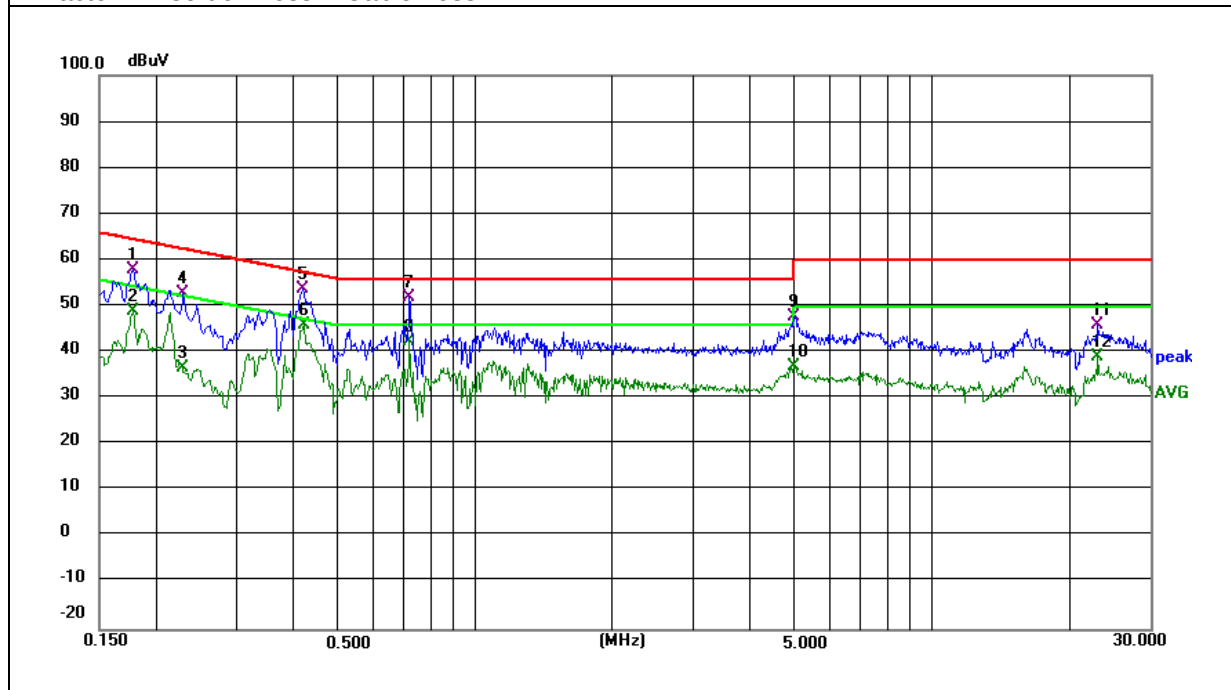


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C 2W2R16
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1980	43.83	10.90	54.73	63.69	-8.96	QP
0.2020	30.62	10.89	41.51	53.53	-12.02	AVG
0.3820	33.57	11.19	44.76	58.24	-13.48	QP
0.3820	21.42	11.19	32.61	48.24	-15.63	AVG
0.5780	24.91	11.39	36.30	46.00	-9.70	AVG
0.5820	30.89	11.38	42.27	56.00	-13.73	QP
1.8300	5.89	14.12	20.01	46.00	-25.99	AVG
1.8820	21.66	14.22	35.88	56.00	-20.12	QP
3.7500	33.02	10.35	43.37	56.00	-12.63	QP
3.8060	20.02	10.34	30.36	46.00	-15.64	AVG
12.1980	21.85	10.41	32.26	50.00	-17.74	AVG
12.3660	31.26	10.42	41.68	60.00	-18.32	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

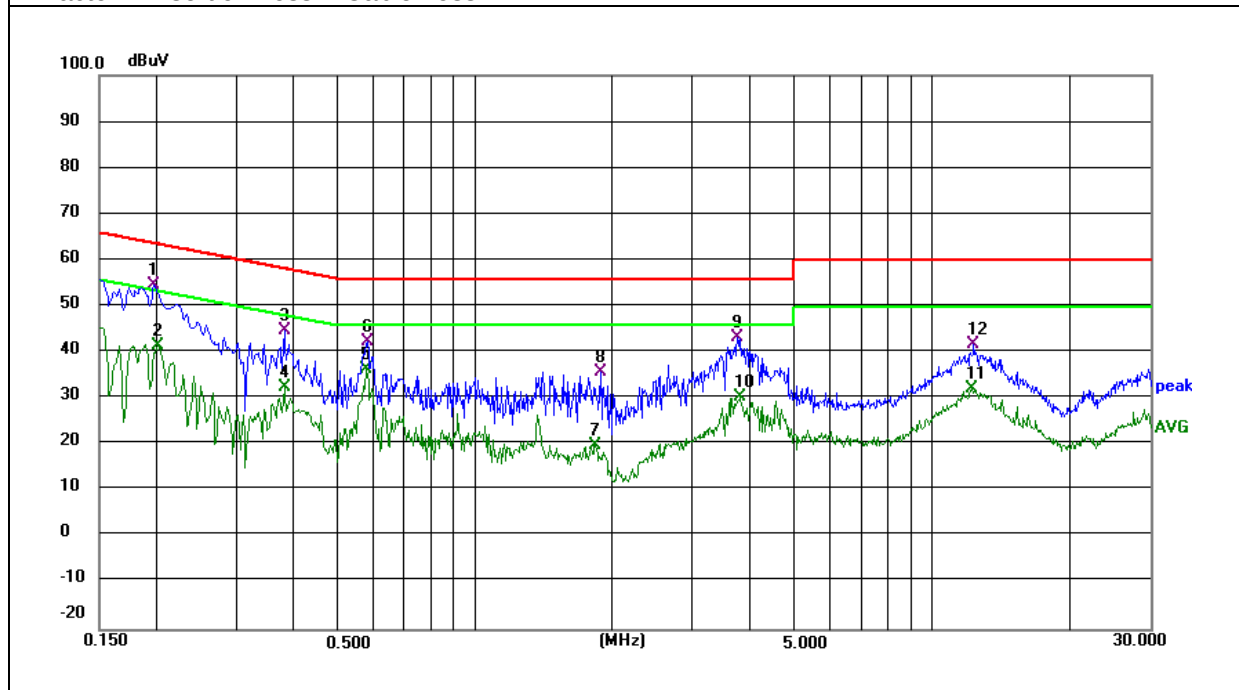


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C 2W2R16
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	42.69	10.40	53.09	65.79	-12.70	QP
0.1564	26.22	10.43	36.65	55.65	-19.00	AVG
0.3620	34.17	11.14	45.31	58.68	-13.37	QP
0.3660	17.02	11.15	28.17	48.59	-20.42	AVG
0.5980	31.18	11.71	42.89	56.00	-13.11	QP
0.5980	23.77	11.71	35.48	46.00	-10.52	AVG
0.6500	30.00	11.81	41.81	56.00	-14.19	QP
0.6540	18.94	11.81	30.75	46.00	-15.25	AVG
4.8380	32.31	10.23	42.54	56.00	-13.46	QP
4.8380	23.89	10.23	34.12	46.00	-11.88	AVG
6.0739	35.62	10.30	45.92	60.00	-14.08	QP
6.0739	28.23	10.30	38.53	50.00	-11.47	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

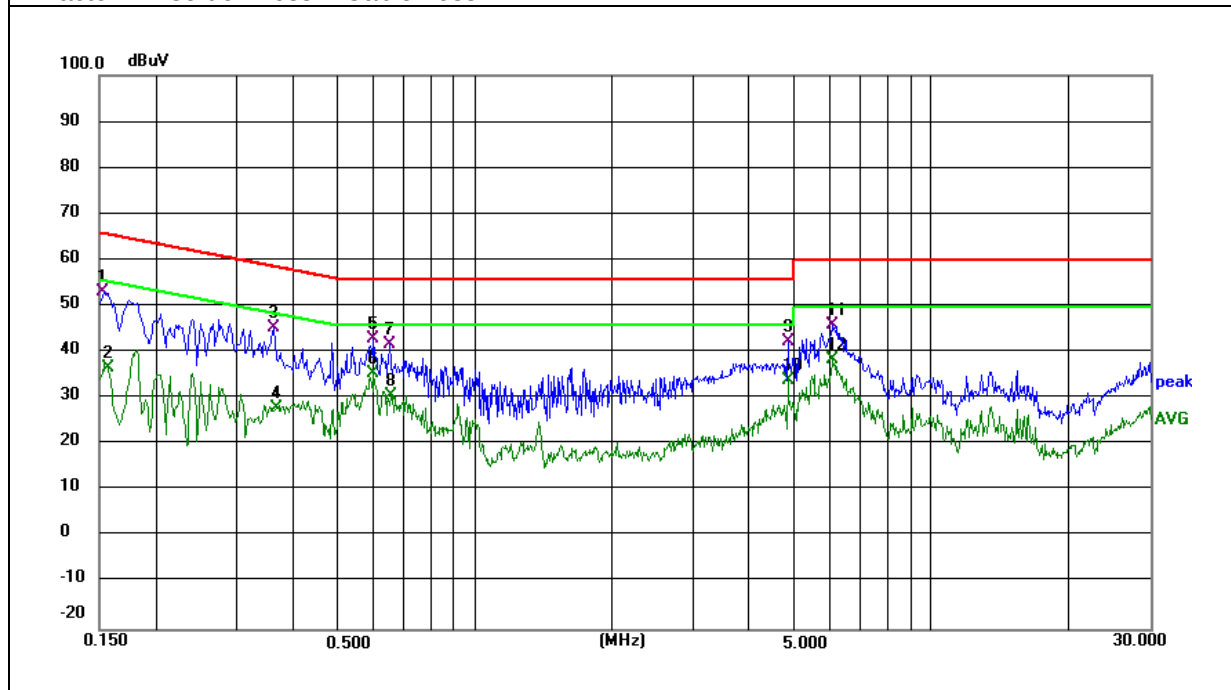


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1W2R16
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.8G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2280	32.01	10.79	42.80	52.52	-9.72	AVG
0.2290	48.12	10.78	58.90	62.49	-3.59	QP
0.3356	43.45	11.10	54.55	59.31	-4.76	QP
0.3392	30.37	11.12	41.49	49.22	-7.73	AVG
0.4350	41.77	11.29	53.06	57.16	-4.10	QP
0.4350	32.72	11.29	44.01	47.16	-3.15	AVG
0.7160	40.51	11.83	52.34	56.00	-3.66	QP
0.7160	30.85	11.83	42.68	46.00	-3.32	AVG
7.4070	44.27	10.21	54.48	60.00	-5.52	QP
7.4070	34.94	10.21	45.15	50.00	-4.85	AVG
14.6715	45.24	10.57	55.81	60.00	-4.19	QP
14.6715	37.52	10.57	48.09	50.00	-1.91	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.3-E5C2W2R16

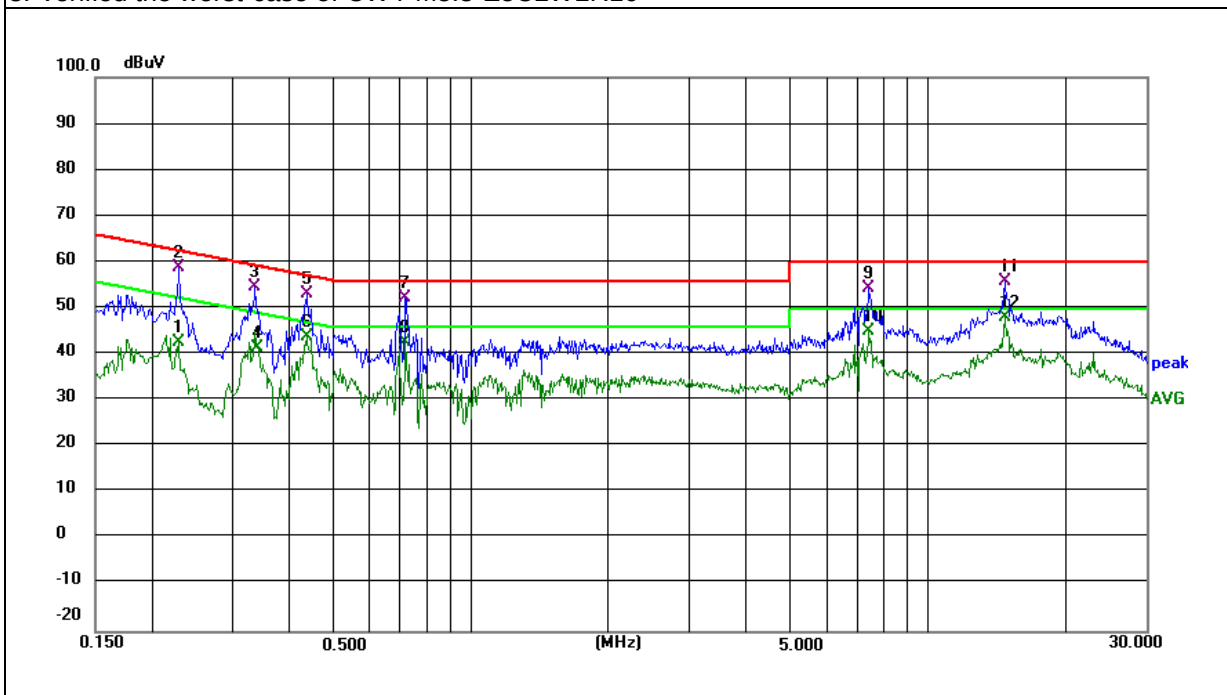


EUT :	Celerway Stratus 5GR16	Model Name :	CWY-M5.3-E5C1 W2R16
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 56V from POE AC 120V/60Hz	Test Mode :	Mode 1(5.8G)
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1660	46.85	10.51	57.36	65.16	-7.80	QP
0.1660	34.15	10.51	44.66	55.16	-10.50	AVG
0.3940	41.35	11.18	52.53	57.98	-5.45	QP
0.3940	28.51	11.18	39.69	47.98	-8.29	AVG
0.5260	28.47	11.36	39.83	46.00	-6.17	AVG
0.5299	37.10	11.37	48.47	56.00	-7.53	QP
0.7180	27.85	11.91	39.76	46.00	-6.24	AVG
0.7220	38.23	11.90	50.13	56.00	-5.87	QP
7.6180	40.99	10.44	51.43	60.00	-8.57	QP
7.6180	31.65	10.44	42.09	50.00	-7.91	AVG
15.7380	38.60	10.40	49.00	60.00	-11.00	QP
15.7380	31.42	10.40	41.82	50.00	-8.18	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.3-E5C2W2R16

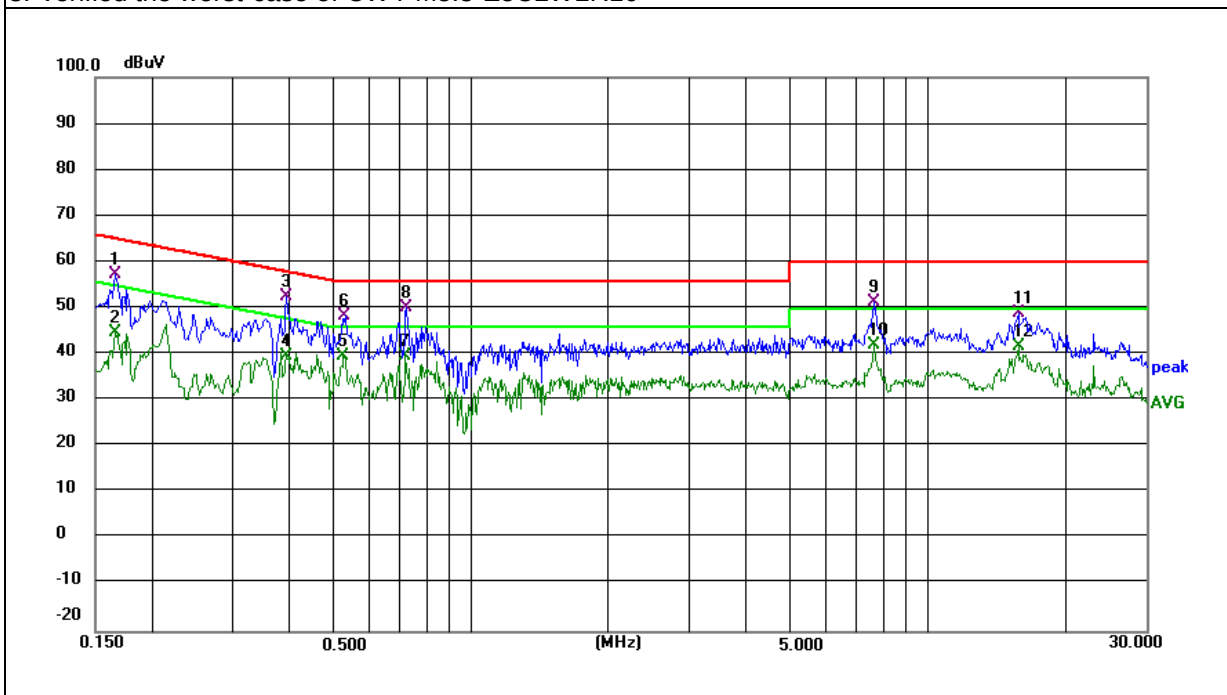

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(b) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

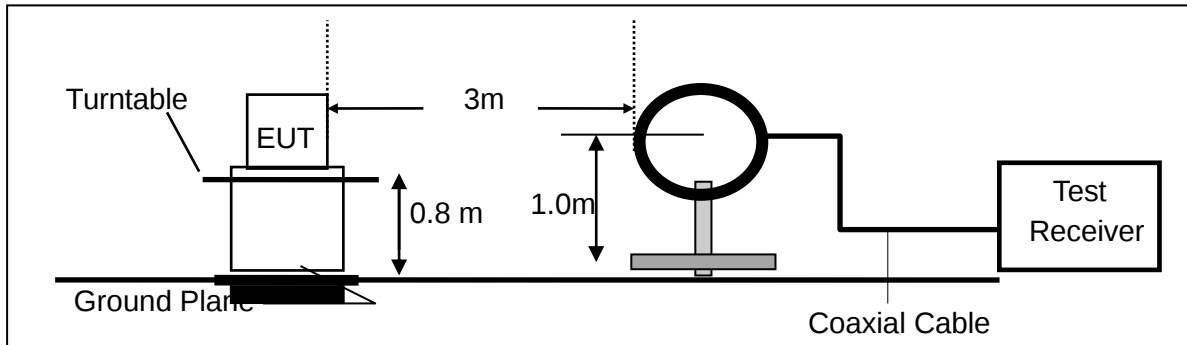

(b) For radiated emissions from 30MHz to 1000MHz

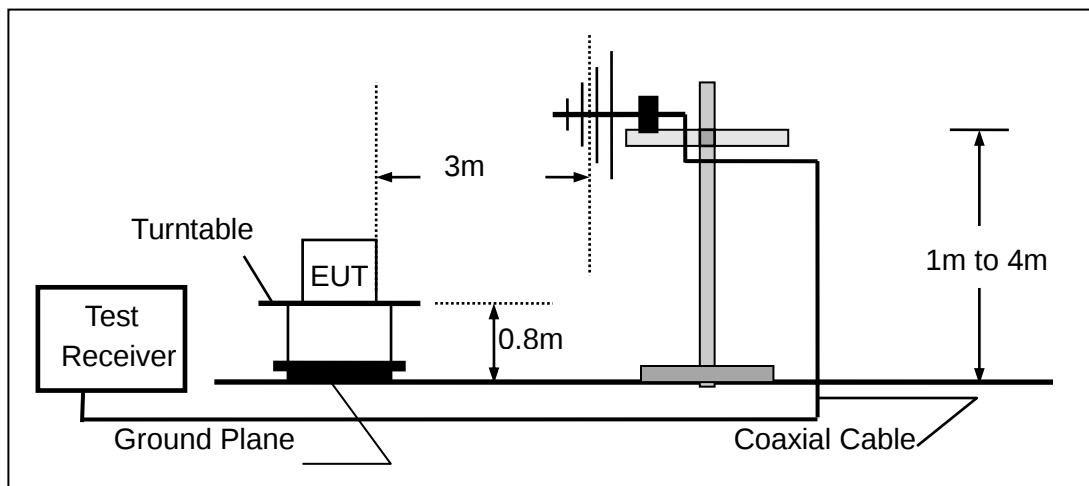

(c) For radiated emissions above 1000MHz

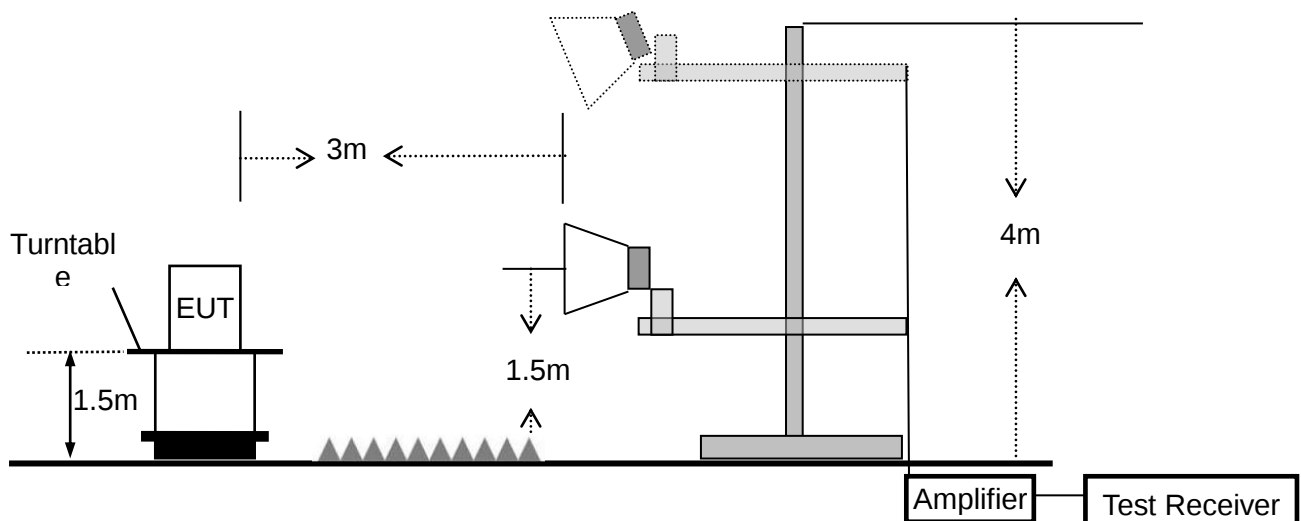

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHz – 30 MHz)

EUT:	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.2.7 TEST RESULTS (30MHz – 1GHz)

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 56V from POE AC 120V/60Hz
Test Mode :	TX(5.2G)- 802.11n(HT20) Ant1 (Mid CH)	Tested By:	Re Zeng

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	38.4810	21.15	12.18	33.33	40.00	-6.67	QP
V	46.8301	23.55	13.58	37.13	40.00	-2.87	QP
V	97.4560	25.74	11.36	37.10	43.50	-6.40	QP
V	103.8054	21.82	11.98	33.80	43.50	-9.70	QP
V	147.9214	28.84	8.34	37.18	43.50	-6.32	QP
V	750.1082	16.15	22.47	38.62	46.00	-7.38	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

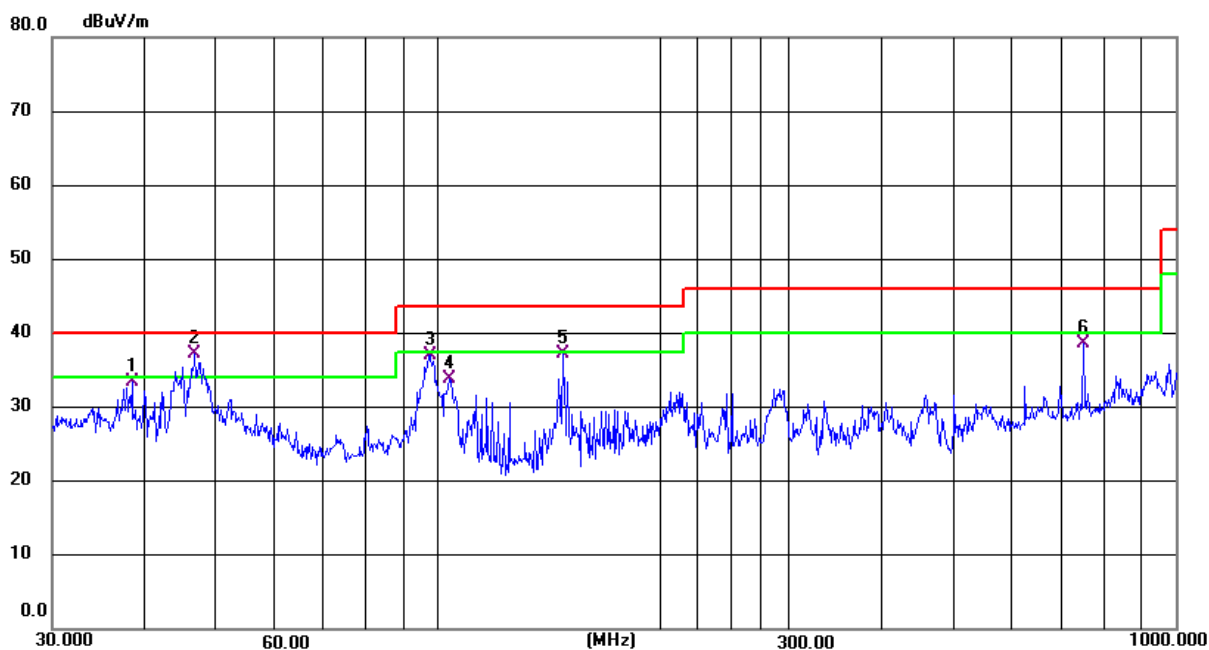

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	44.5867	62.45	-31.18	31.27	40.00	-8.73	QP
H	78.9651	21.69	7.71	29.40	40.00	-10.60	QP
H	106.3850	19.48	11.95	31.43	43.50	-12.07	QP
H	150.0107	22.78	8.44	31.22	43.50	-12.28	QP
H	204.2375	19.11	11.79	30.90	43.50	-12.60	QP
H	348.0274	19.43	15.65	35.08	46.00	-10.92	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

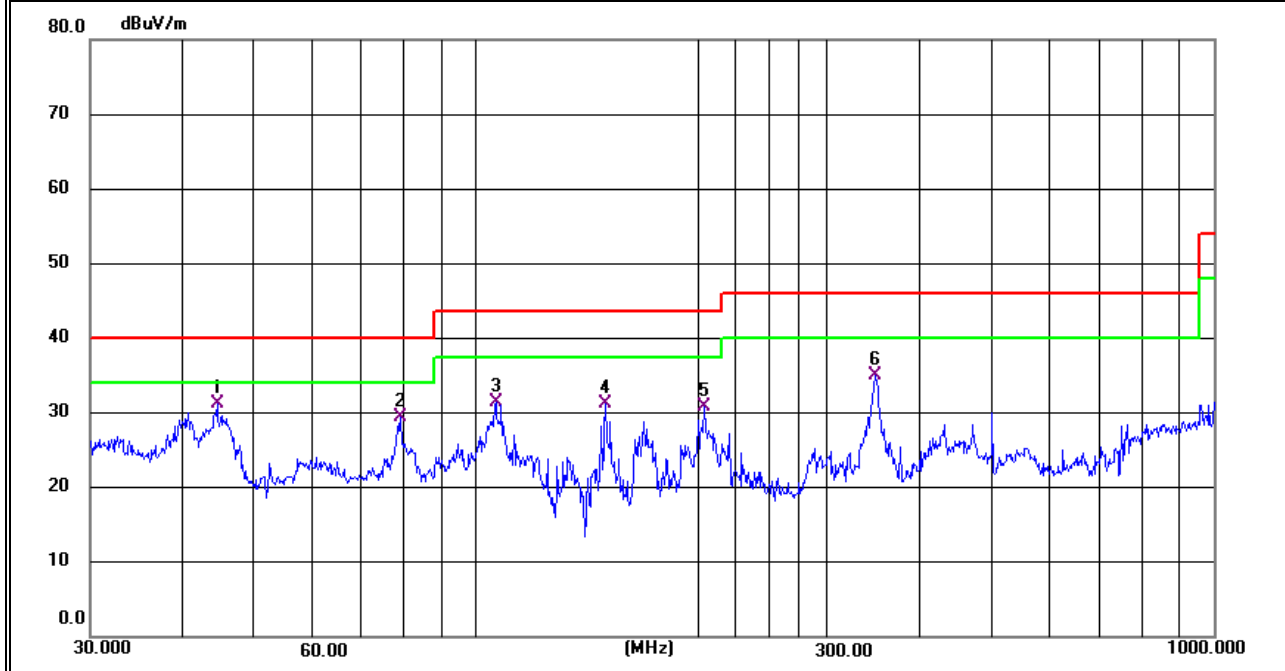


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 24V from Adapter
Test Mode :	TX(5.2G)- 802.11n(HT20) Ant1 (Mid CH)	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	50.2323	24.08	13.56	37.64	40.00	-2.36	QP
V	85.5973	28.29	8.51	36.80	40.00	-3.20	QP
V	114.1136	28.29	10.99	39.28	43.50	-4.22	QP
V	187.0954	26.62	10.90	37.52	43.50	-5.98	QP
V	250.3010	27.03	12.68	39.71	46.00	-6.29	QP
V	625.0780	20.20	20.21	40.41	46.00	-5.59	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

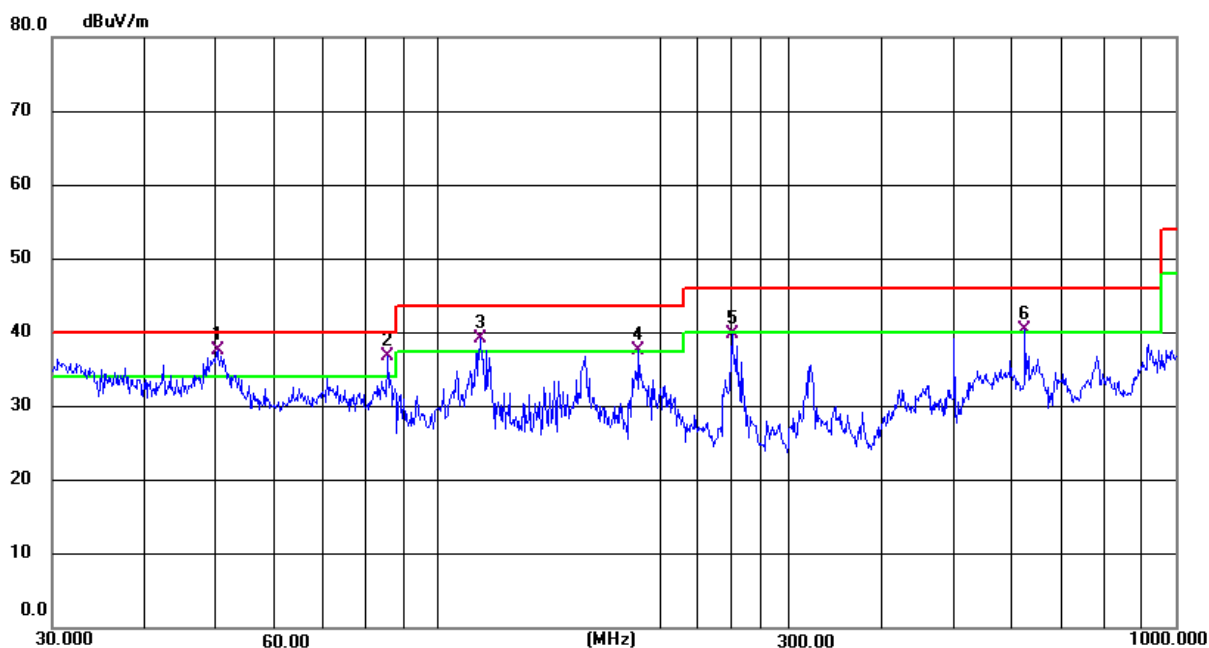

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	46.5030	15.27	13.58	28.85	40.00	-11.15	QP
H	109.4116	21.42	11.75	33.17	43.50	-10.33	QP
H	152.1297	27.86	8.54	36.40	43.50	-7.10	QP
H	193.7726	24.95	11.48	36.43	43.50	-7.07	QP
H	279.0436	24.39	13.82	38.21	46.00	-7.79	QP
H	948.7610	16.04	24.72	40.76	46.00	-5.24	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

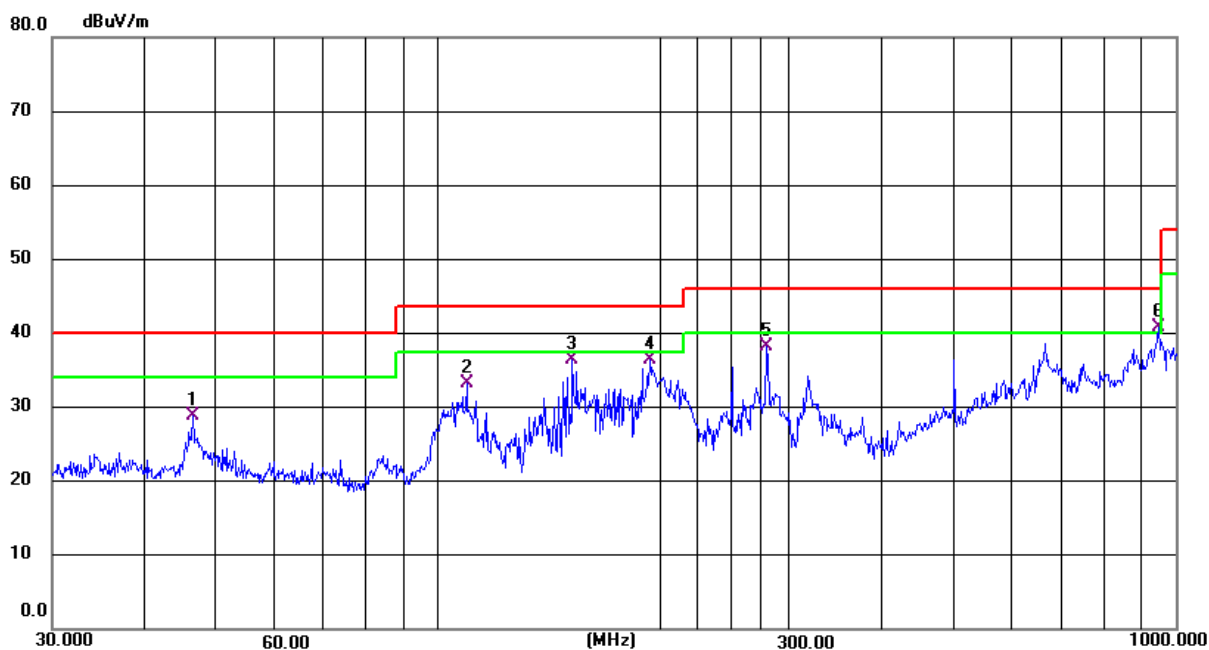

Note(1)“802.11n(HT20) Ant1” mode is the worst mode.


(2)Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 56V from POE
Test Mode :	TX(5.8G)- 802.11ac(VHT20) Ant1 (Mid CH)	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	48.8427	21.12	13.68	34.80	40.00	-5.20	QP
V	98.4865	21.15	11.63	32.78	43.50	-10.72	QP
V	125.0065	28.95	9.21	38.16	43.50	-5.34	QP
V	154.2785	26.14	8.65	34.79	43.50	-8.71	QP
V	336.0350	18.82	15.31	34.13	46.00	-11.87	QP
V	830.4000	10.54	23.60	34.14	46.00	-11.86	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

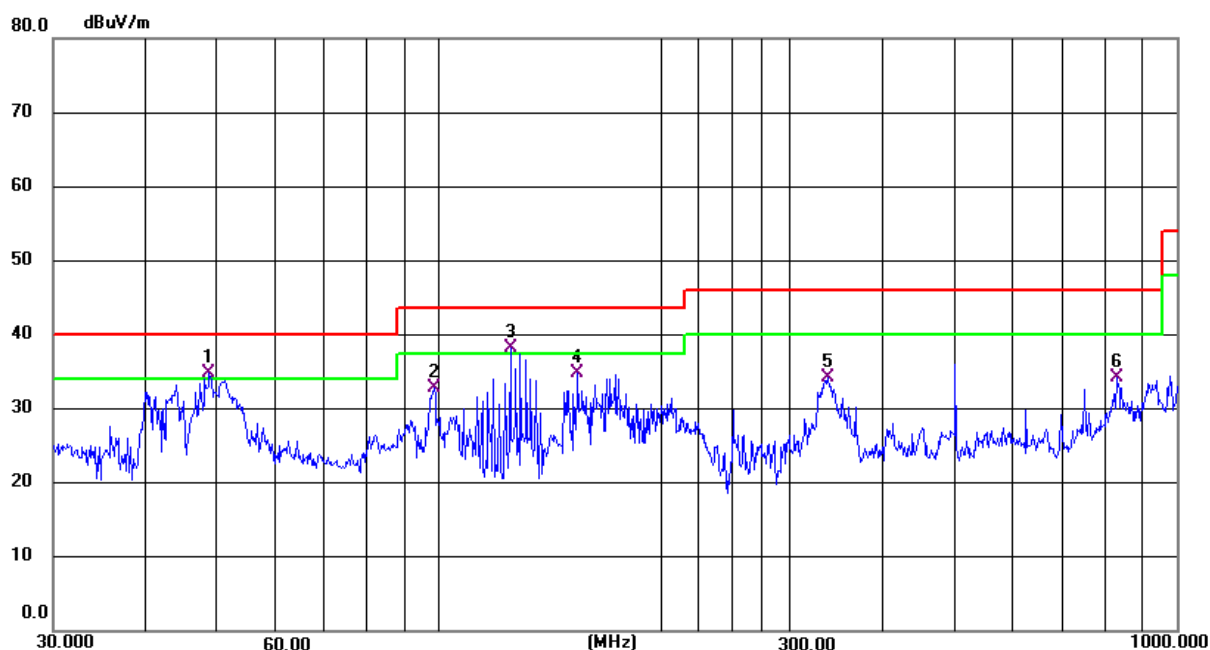

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	46.3402	16.17	13.58	29.75	40.00	-10.25	QP
H	81.4970	22.01	7.73	29.74	40.00	-10.26	QP
H	125.0065	26.09	9.21	35.30	43.50	-8.20	QP
H	206.3975	23.52	11.84	35.36	43.50	-8.14	QP
H	250.3010	22.56	12.68	35.24	46.00	-10.76	QP
H	300.3672	22.78	14.34	37.12	46.00	-8.88	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

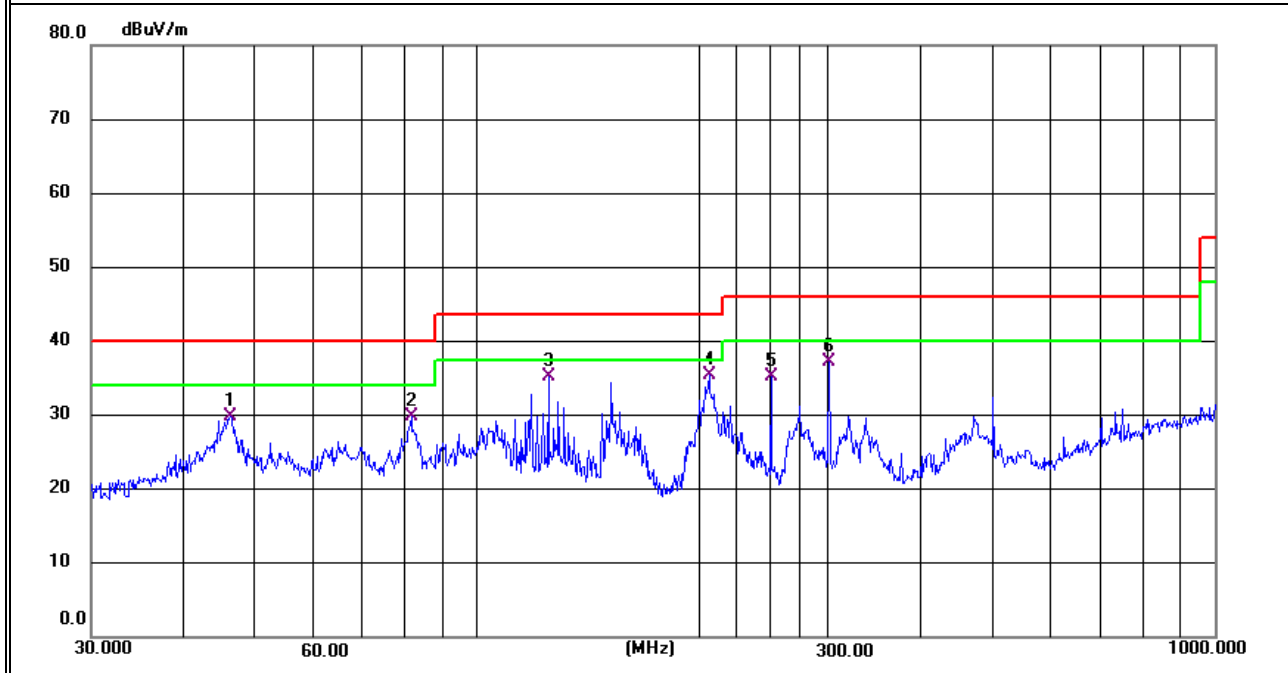


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 24V from Adapter
Test Mode :	TX(5.8G)- 802.11ac(VHT20) Ant1 (Mid CH)	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	58.2030	22.97	12.93	35.90	40.00	-4.10	QP
V	125.0065	29.62	9.21	38.83	43.50	-4.67	QP
V	143.8291	30.69	8.21	38.90	43.50	-4.60	QP
V	187.0954	27.12	10.90	38.02	43.50	-5.48	QP
V	501.1790	22.88	18.28	41.16	46.00	-4.84	QP
V	948.7610	14.81	24.72	39.53	46.00	-6.47	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

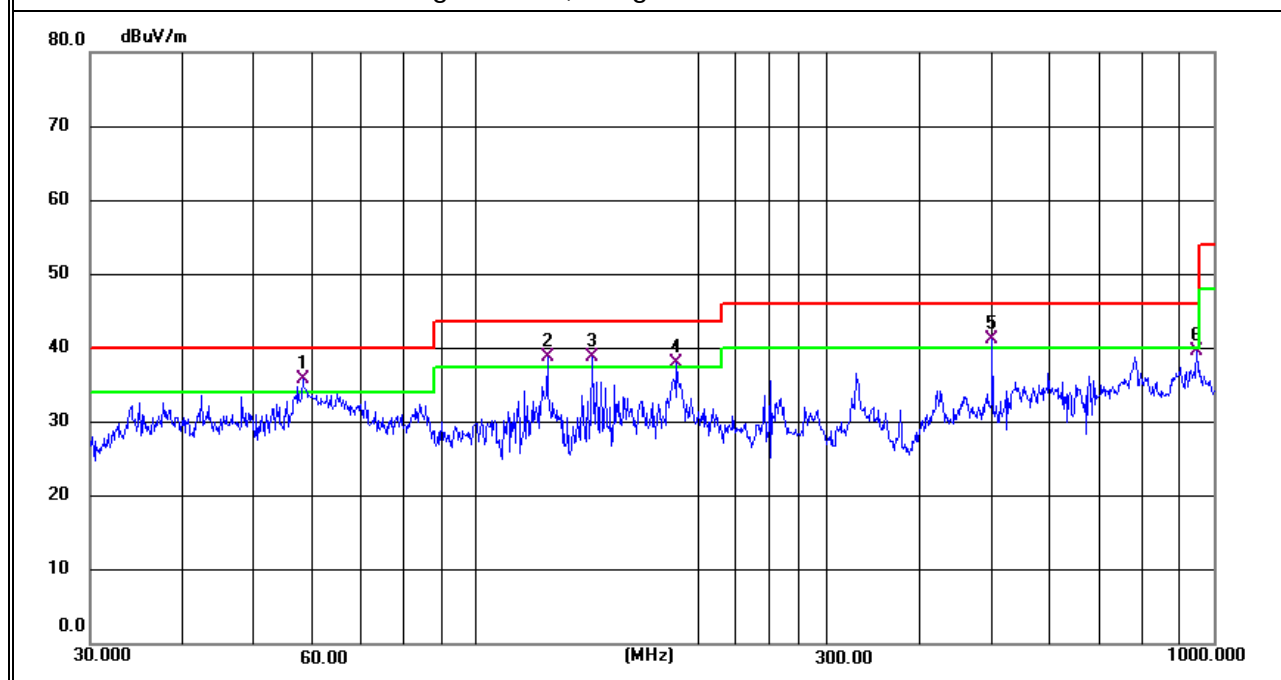

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	46.5030	17.27	13.58	30.85	40.00	-9.15	QP
H	106.0126	21.64	11.99	33.63	43.50	-9.87	QP
H	189.0740	24.53	11.10	35.63	43.50	-7.87	QP
H	250.3010	23.32	12.68	36.00	46.00	-10.00	QP
H	317.7010	23.43	14.70	38.13	46.00	-7.87	QP
H	948.7610	15.04	24.72	39.76	46.00	-6.24	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

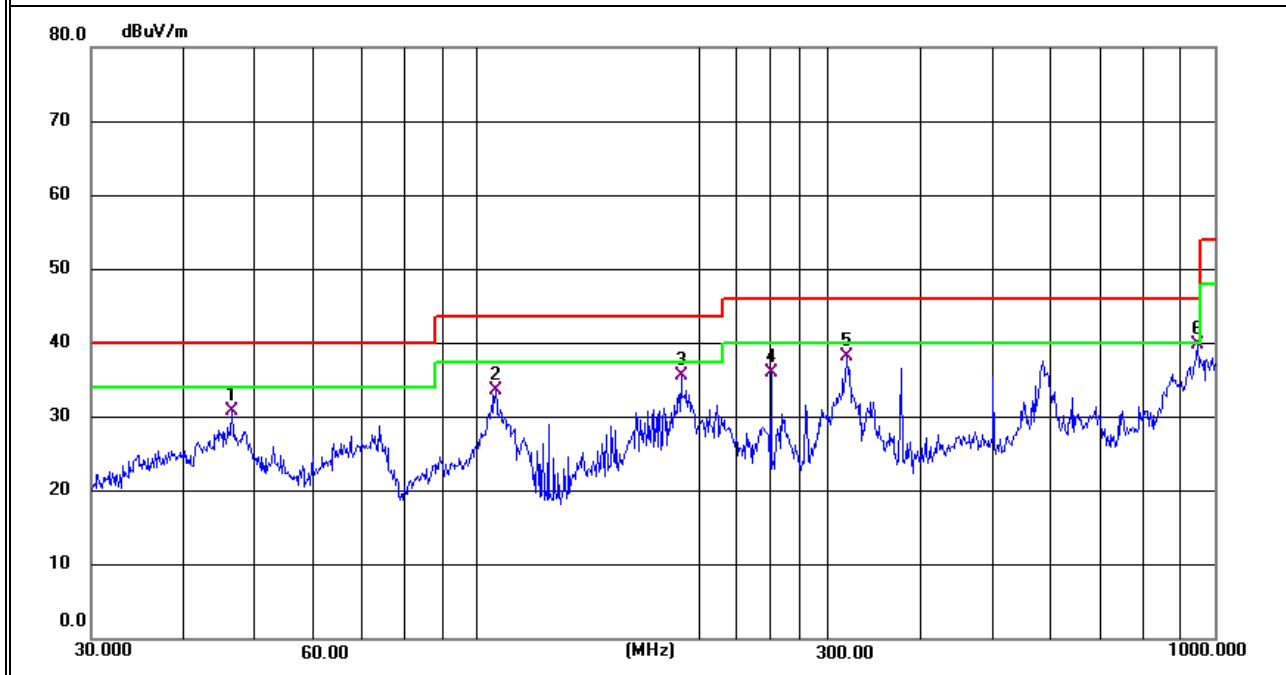

Note(1)“802.11ac(VHT20) Ant1” mode is the worst mode.


(2)Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C1W2R16
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 24V from Adapter
Test Mode :	TX(5.2G)- 802.11n(HT20) Ant1 (Mid CH)	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	46.8301	22.55	13.58	36.13	40.00	-3.87	QP
V	131.2965	28.08	8.62	36.70	43.50	-6.80	QP
V	150.0107	24.55	8.44	32.99	43.50	-10.51	QP
V	250.3010	24.72	12.68	37.40	46.00	-8.60	QP
V	404.6664	20.82	16.85	37.67	46.00	-8.33	QP
V	750.1082	17.65	22.47	40.12	46.00	-5.88	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

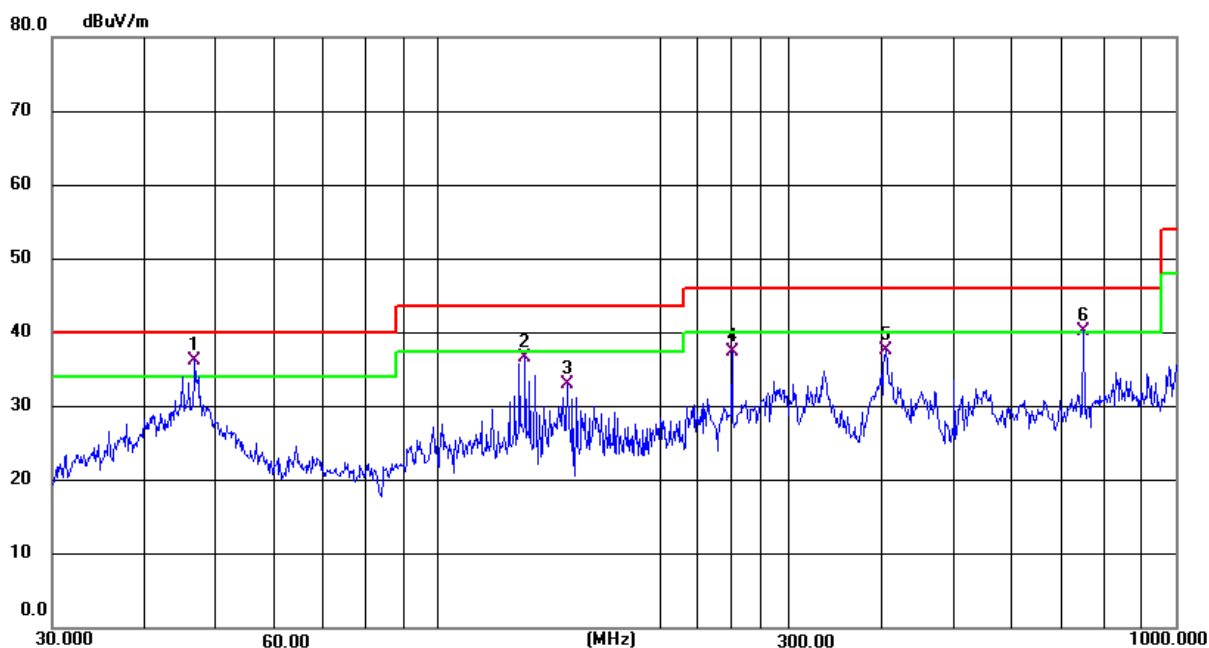

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	47.8260	20.88	13.66	34.54	40.00	-5.46	QP
H	109.7960	21.48	11.71	33.19	43.50	-10.31	QP
H	152.1297	23.79	8.54	32.33	43.50	-11.17	QP
H	225.3080	22.01	12.05	34.06	46.00	-11.94	QP
H	300.3672	19.28	14.34	33.62	46.00	-12.38	QP
H	734.4913	16.68	22.24	38.92	46.00	-7.08	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

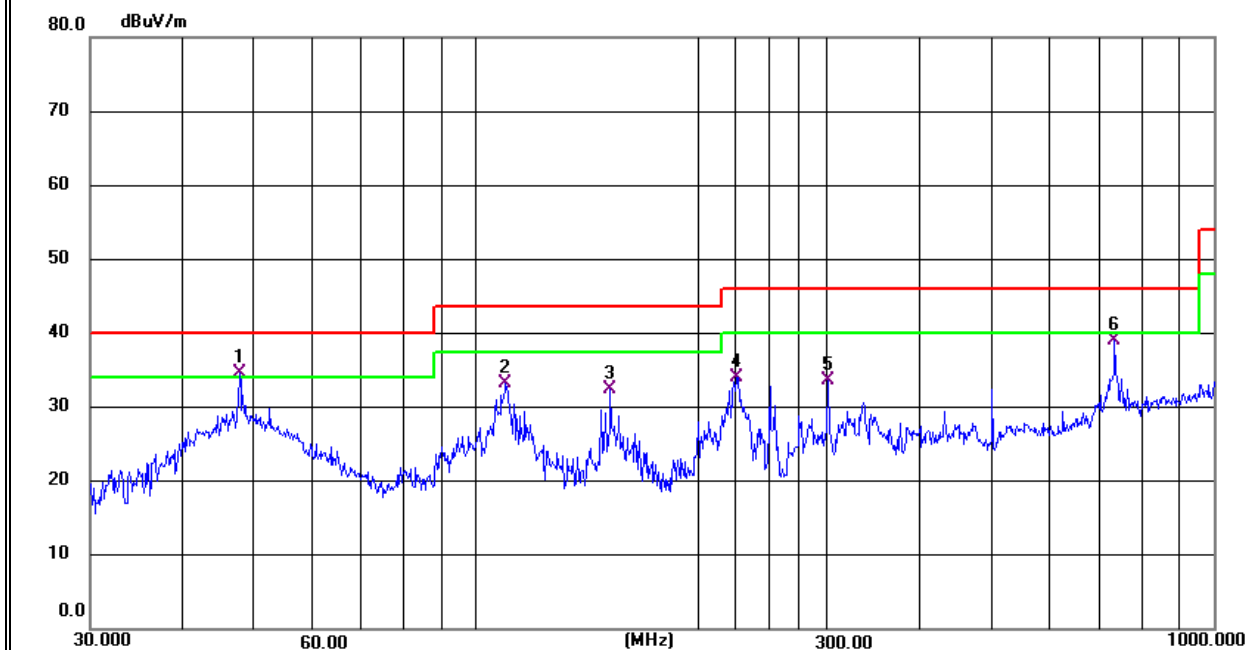

Note(1)“802.11n(HT20) Ant1” mode is the worst mode.

(2)Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.


(3)Verified the worst-case of CWY-M5.3-E5C2W2R16

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C1W2R16
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 24V from Adapter
Test Mode :	TX(5.8G)- 802.11ac(VHT20) Ant1 (Mid CH)	Tested By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	46.8301	23.05	13.58	36.63	40.00	-3.37	QP
V	137.4200	30.49	8.39	38.88	43.50	-4.62	QP
V	250.3010	19.72	12.68	32.40	46.00	-13.60	QP
V	315.4806	24.98	14.66	39.64	46.00	-6.36	QP
V	477.1693	13.88	17.89	31.77	46.00	-14.23	QP
V	501.1790	13.79	18.28	32.07	46.00	-13.93	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

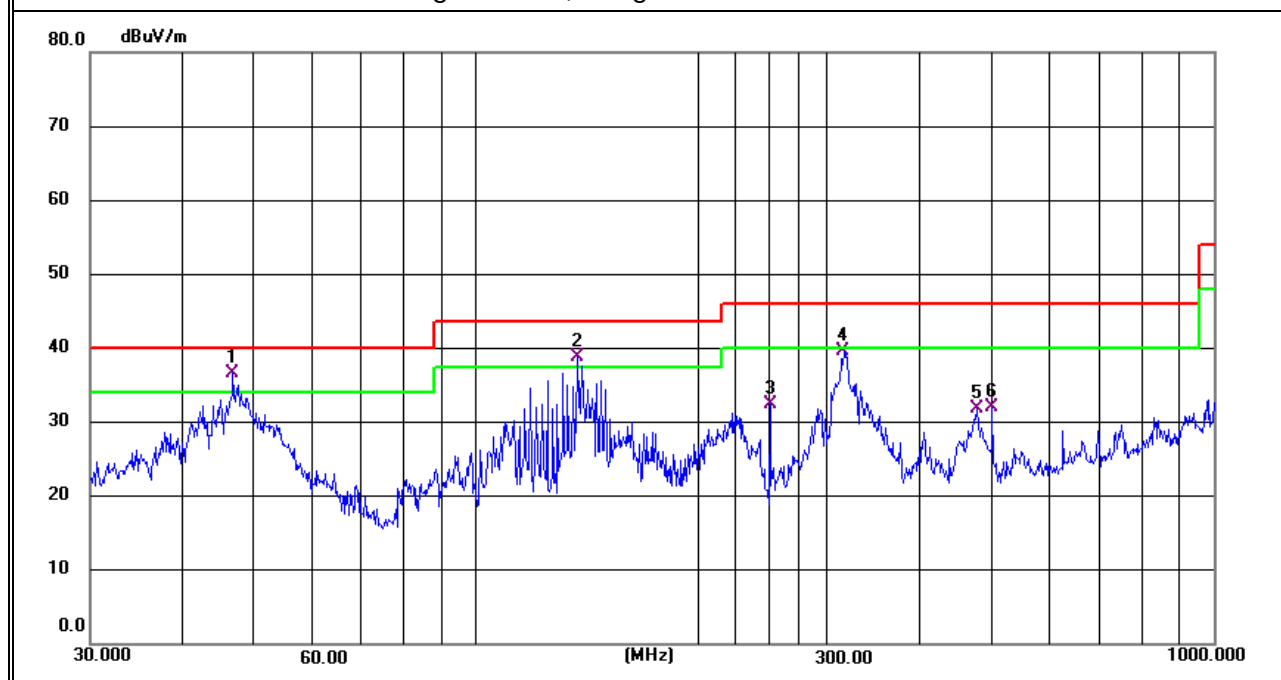

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	54.8348	22.04	13.44	35.48	40.00	-4.52	QP
H	131.2965	27.83	8.62	36.45	43.50	-7.05	QP
H	150.0107	26.78	8.44	35.22	43.50	-8.28	QP
H	215.2675	23.33	12.02	35.35	43.50	-8.15	QP
H	319.9370	21.97	14.75	36.72	46.00	-9.28	QP
H	411.8240	16.31	16.91	33.22	46.00	-12.78	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

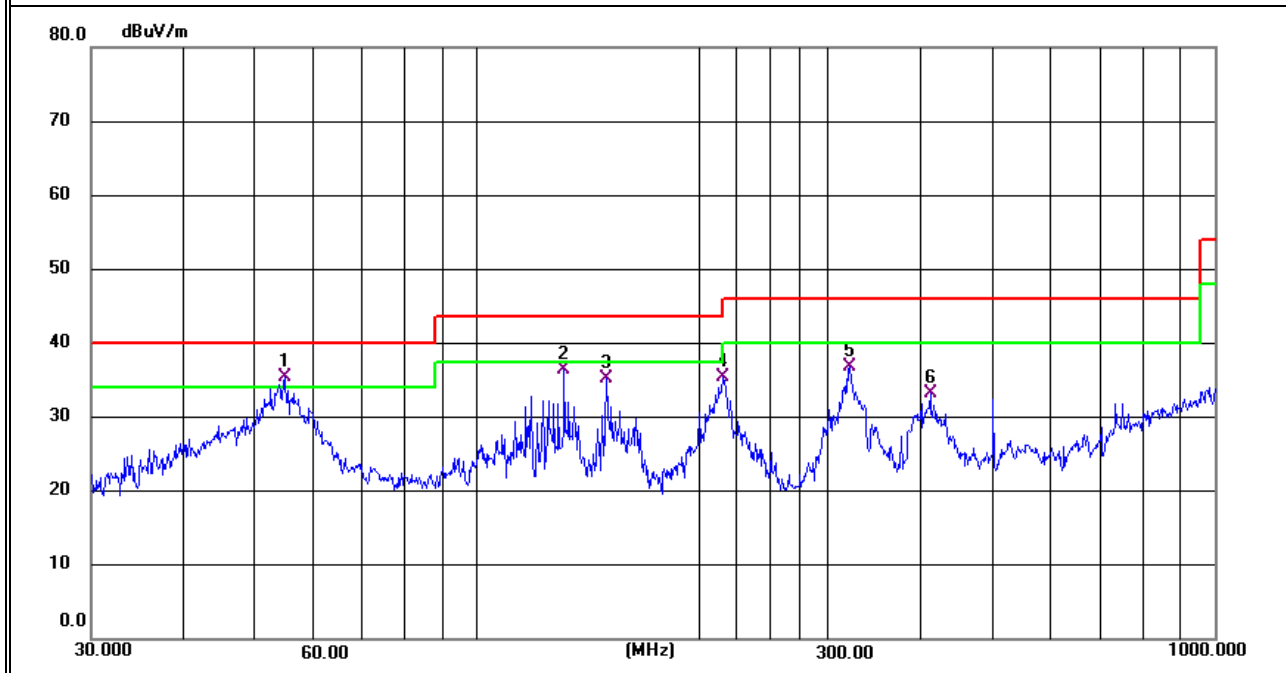

Note(1) "802.11ac(VHT20) Ant1" mode is the worst mode.

(2) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

(3) Verified the worst-case of CWY-M5.3-E5C2W2R16


3.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1173.400	71.49	-24.68	46.81	74.00	-27.19	peak
V	1178.925	64.95	-24.62	40.33	54.00	-13.67	AVG
V	1980.050	64.07	-20.05	44.02	68.20	-24.18	peak
V	3159.000	63.55	-15.44	48.11	68.20	-20.09	peak
V	4837.750	61.41	-12.90	48.51	74.00	-25.49	peak
V	4837.750	54.55	-12.90	41.65	54.00	-12.35	AVG
V	6601.925	53.80	-9.27	44.53	68.20	-23.67	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

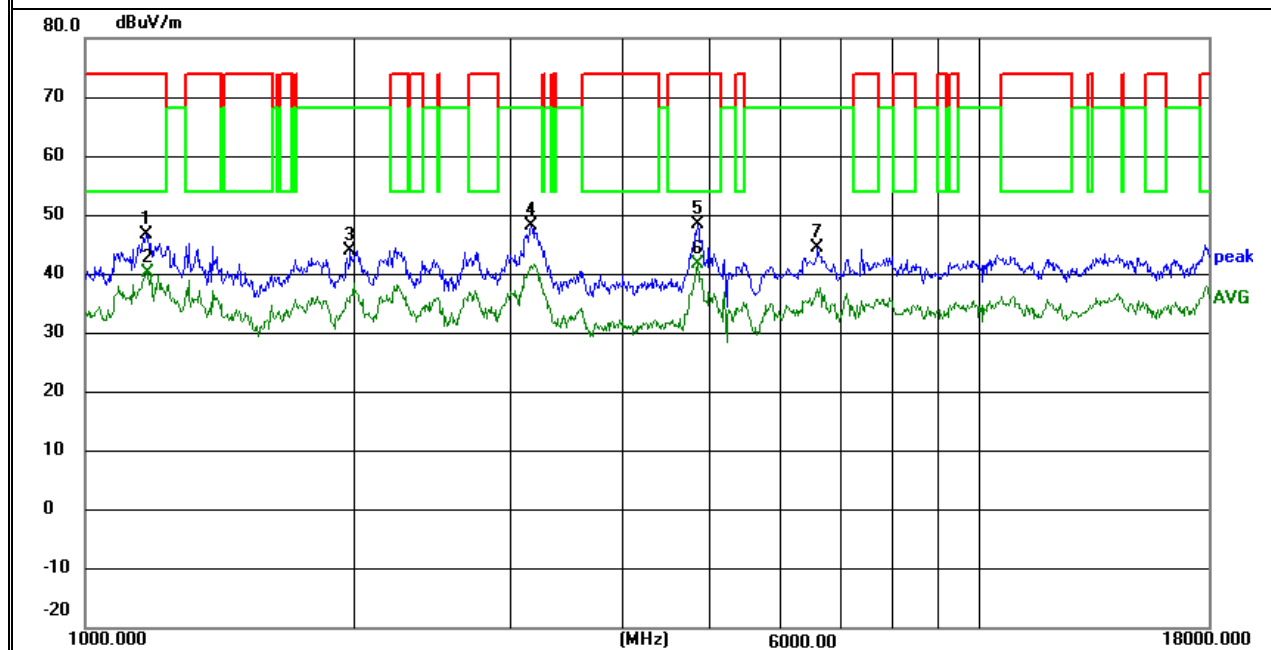


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1348.500	65.17	-23.92	41.25	54.00	-12.75	AVG
H	1357.000	72.20	-23.94	48.26	74.00	-25.74	peak
H	2645.600	65.96	-17.57	48.39	68.20	-19.81	peak
H	3001.750	63.44	-15.47	47.97	68.20	-20.23	peak
H	3603.125	61.45	-15.11	46.34	74.00	-27.66	peak
H	3612.050	52.10	-15.32	36.78	54.00	-17.22	AVG
H	4862.825	57.22	-13.02	44.20	74.00	-29.80	peak
H	4927.850	49.11	-12.64	36.47	54.00	-17.53	AVG
H	6604.475	58.45	-9.29	49.16	68.20	-19.04	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

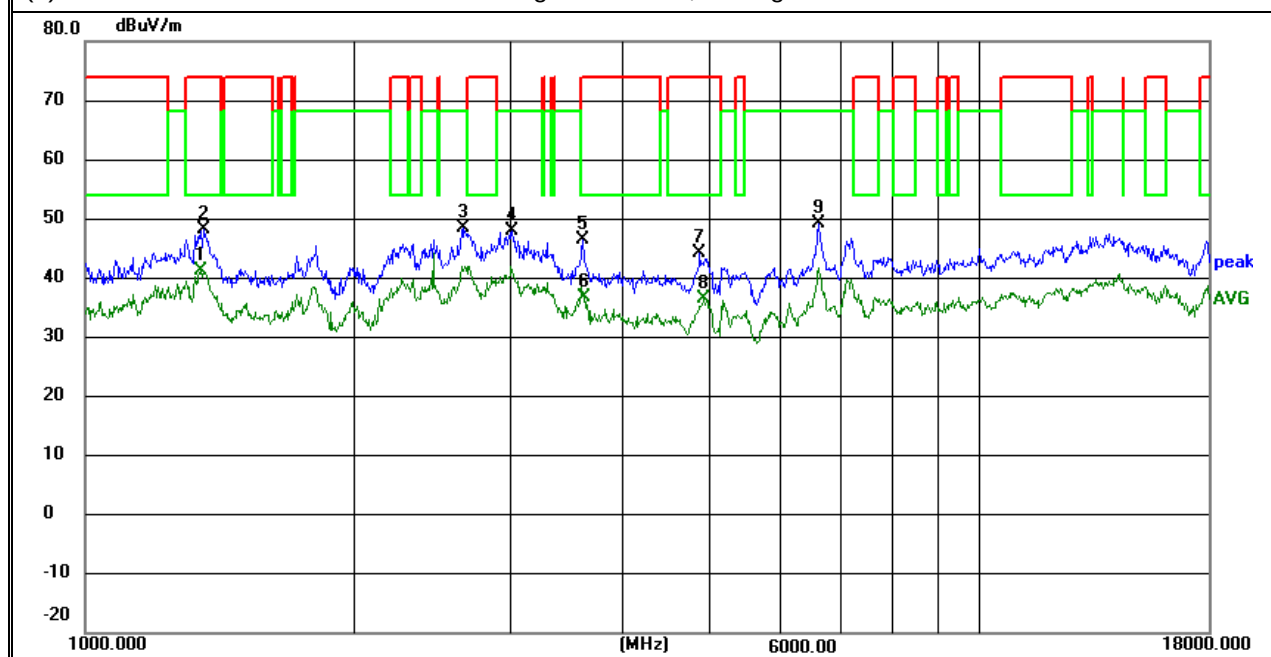


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) M CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1229.500	71.34	-24.09	47.25	74.00	-26.75	peak
V	1229.500	64.76	-24.09	40.67	54.00	-13.33	AVG
V	1344.250	64.41	-23.92	40.49	54.00	-13.51	AVG
V	1349.775	70.79	-23.93	46.86	74.00	-27.14	peak
V	2663.875	66.08	-17.46	48.62	68.20	-19.58	peak
V	2666.850	58.65	-17.44	41.21	68.20	-26.99	AVG
V	5201.550	56.65	-12.38	44.27	68.20	-23.93	peak
V	6120.825	55.06	-10.58	44.48	68.20	-23.72	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

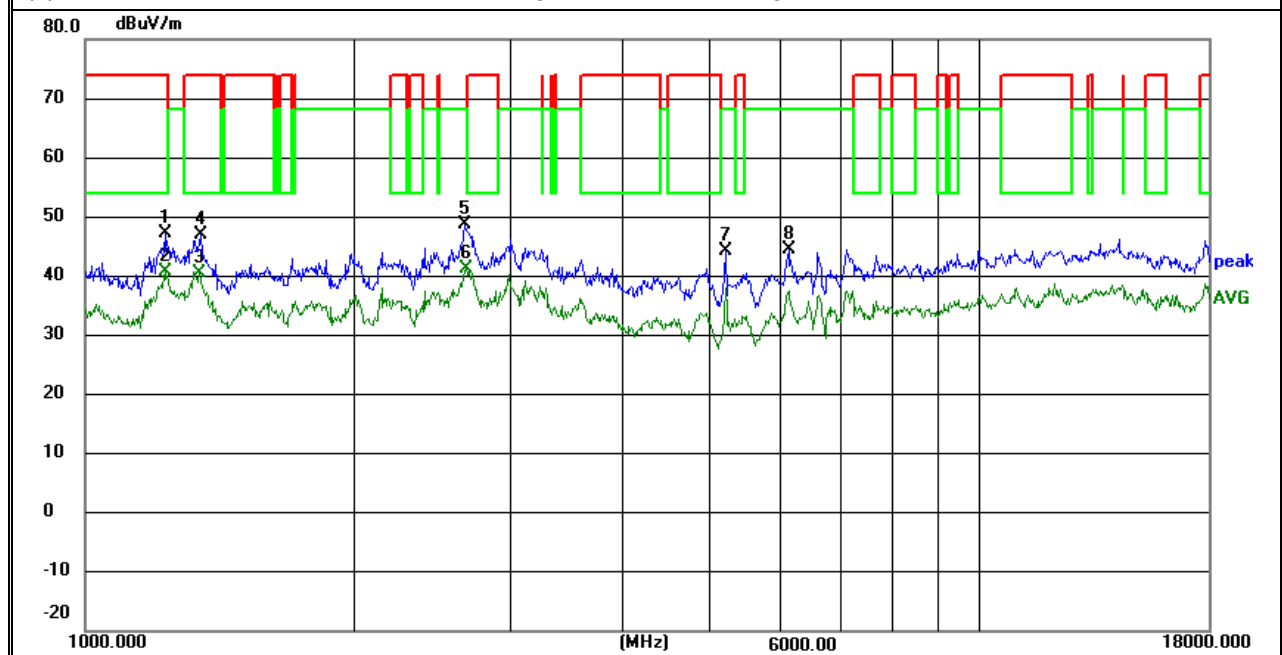


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) M CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1354.875	66.20	-23.93	42.27	54.00	-11.73	AVG
H	1365.500	73.63	-23.94	49.69	74.00	-24.31	peak
H	2000.025	67.69	-19.60	48.09	68.20	-20.11	peak
H	2972.000	69.57	-15.82	53.75	68.20	-14.45	peak
H	6674.600	55.75	-9.25	46.50	68.20	-21.70	peak
H	14393.875	47.23	-0.46	46.77	68.20	-21.43	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

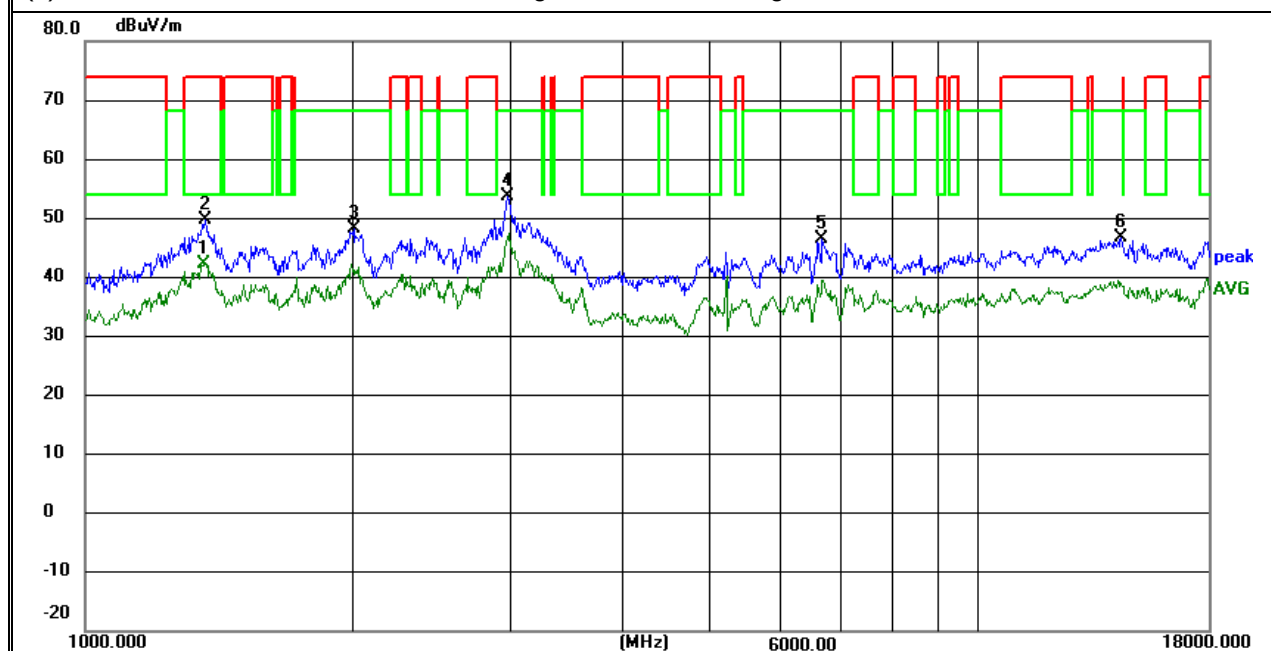


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) H CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1221.850	69.27	-24.17	45.10	74.00	-28.90	peak
V	1221.850	63.02	-24.17	38.85	54.00	-15.15	AVG
V	1322.575	69.66	-23.88	45.78	74.00	-28.22	peak
V	1329.800	63.03	-23.90	39.13	54.00	-14.87	AVG
V	1797.300	67.06	-22.42	44.64	68.20	-23.56	peak
V	2680.450	64.85	-17.37	47.48	68.20	-20.72	peak
V	6586.625	58.16	-9.28	48.88	68.20	-19.32	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

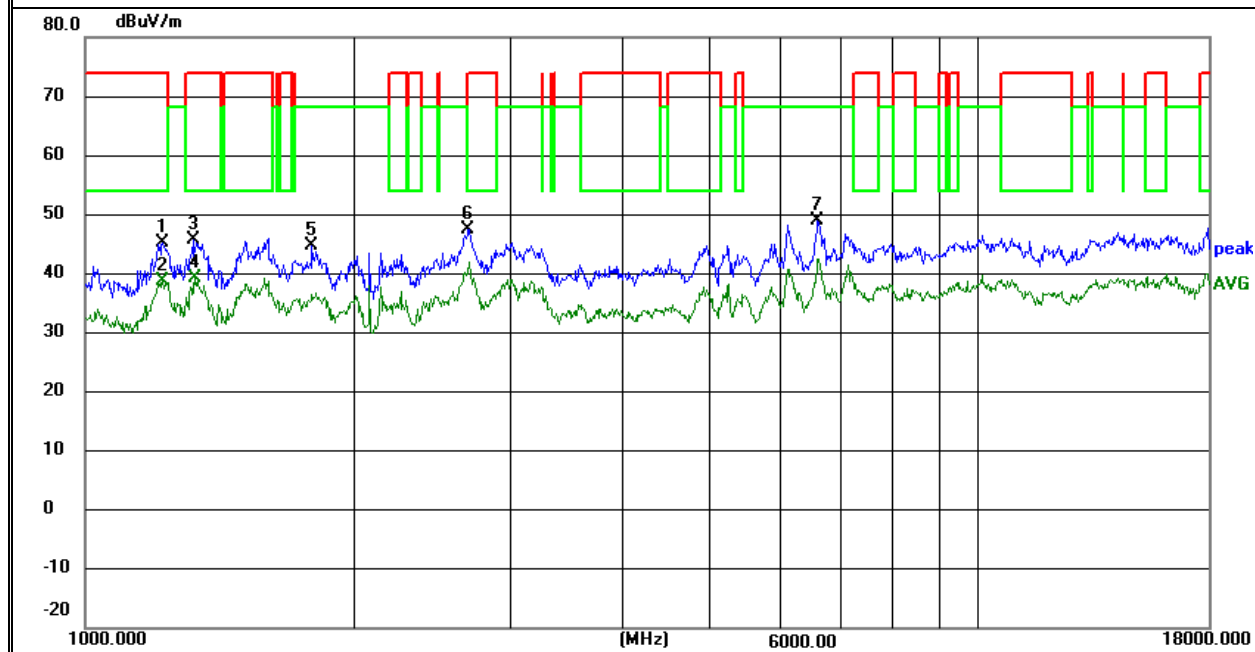


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) H CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1220.150	70.29	-24.19	46.10	74.00	-27.90	peak
H	1220.150	64.21	-24.19	40.02	54.00	-13.98	AVG
H	2448.400	65.84	-19.00	46.84	68.20	-21.36	peak
H	3135.625	61.90	-15.51	46.39	68.20	-21.81	peak
H	6582.375	54.36	-9.30	45.06	68.20	-23.14	peak
H	13508.600	45.90	-0.50	45.40	68.20	-22.80	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

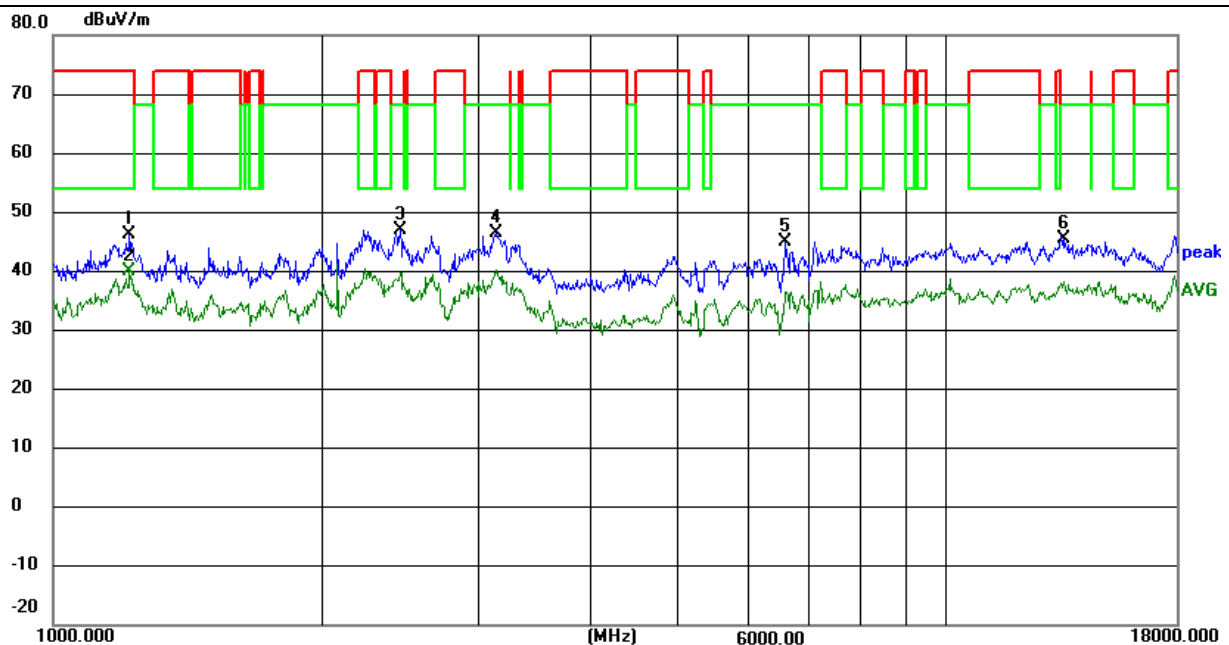


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1231.200	61.52	-24.07	37.45	54.00	-16.55	AVG
V	1238.425	67.56	-24.00	43.56	74.00	-30.44	peak
V	1356.150	69.60	-23.93	45.67	74.00	-28.33	peak
V	1372.300	62.71	-23.96	38.75	54.00	-15.25	AVG
V	3293.725	65.44	-15.35	50.09	68.20	-18.11	peak
V	6150.575	60.35	-10.65	49.70	68.20	-18.50	peak
V	13876.225	52.14	-0.78	51.36	68.20	-16.84	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

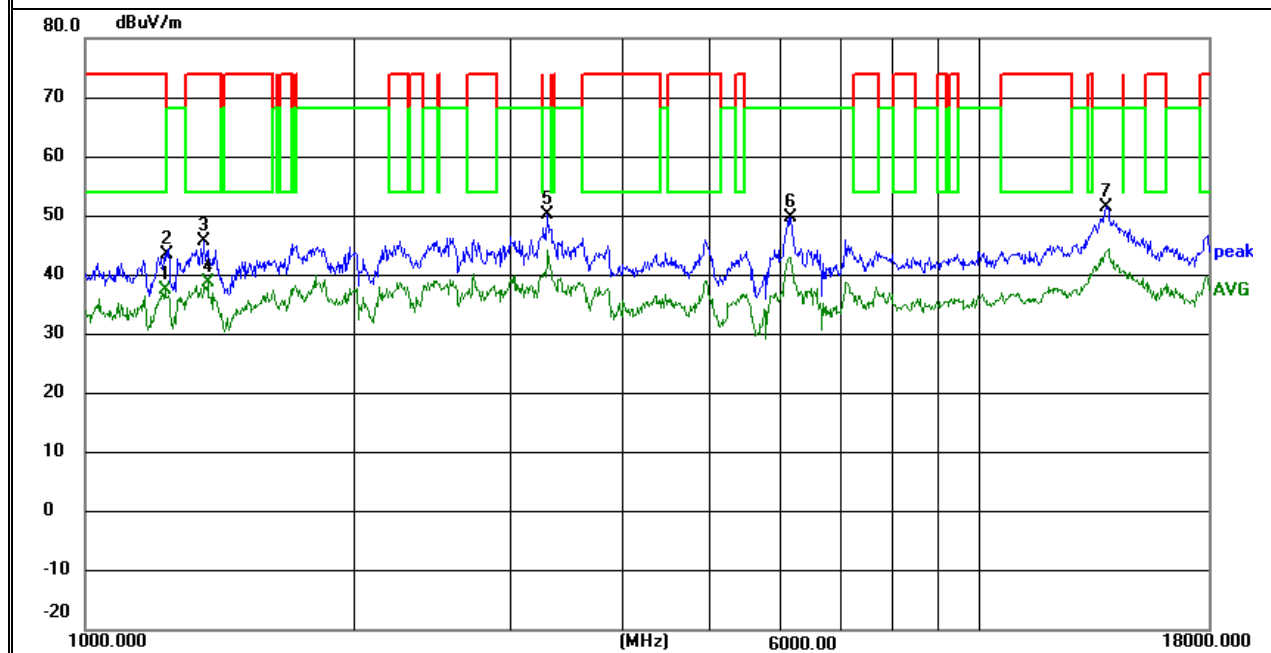


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1210.800	64.51	-24.29	40.22	54.00	-13.78	AVG
H	1222.275	71.80	-24.16	47.64	74.00	-26.36	peak
H	1812.175	65.17	-22.08	43.09	68.20	-25.11	peak
H	2991.550	66.13	-15.57	50.56	68.20	-17.64	peak
H	7065.600	61.08	-9.48	51.60	68.20	-16.60	peak
H	13800.575	47.30	-1.00	46.30	68.20	-21.90	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

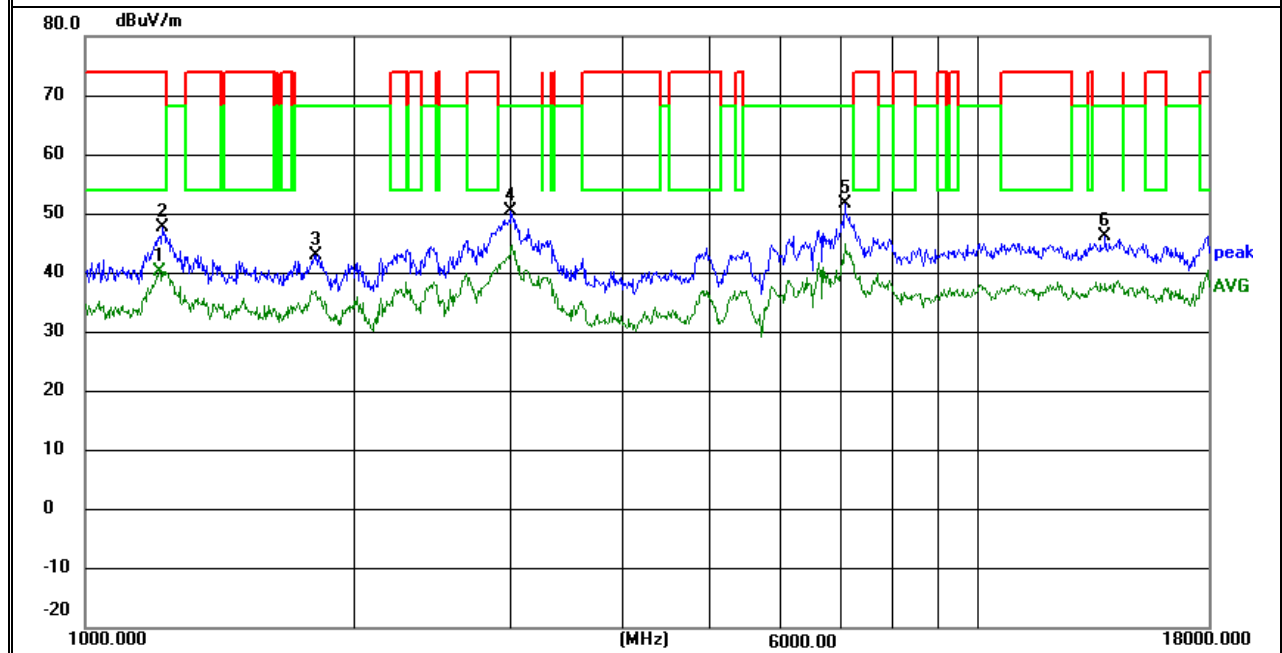


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) M CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1245.650	67.09	-23.91	43.18	68.20	-25.02	peak
V	1998.325	65.74	-19.63	46.11	68.20	-22.09	peak
V	3274.175	61.45	-15.18	46.27	68.20	-21.93	peak
V	5475.675	57.90	-11.68	46.22	68.20	-21.98	peak
V	12071.675	46.06	-1.08	44.98	74.00	-29.02	peak
V	12159.225	39.64	-1.40	38.24	54.00	-15.76	AVG

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

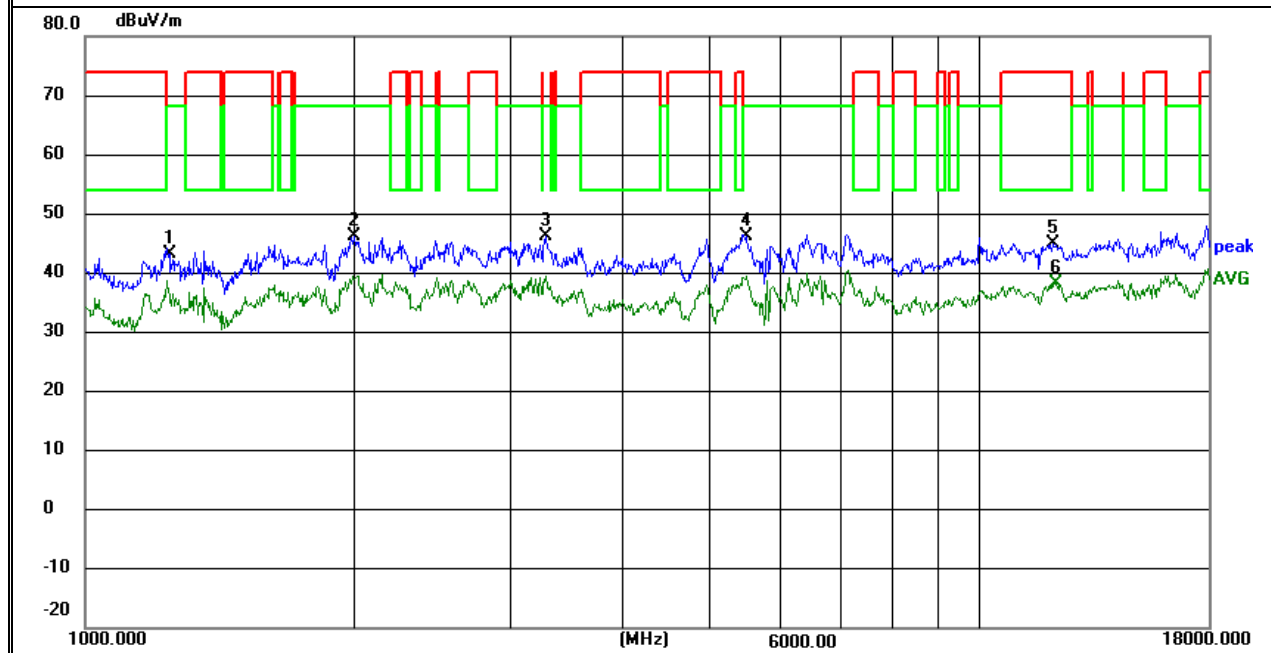


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) MCH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1340.425	71.50	-23.91	47.59	74.00	-26.41	peak
H	1343.825	64.89	-23.92	40.97	54.00	-13.03	AVG
H	1864.875	70.66	-21.00	49.66	68.20	-18.54	peak
H	3120.750	68.14	-15.52	52.62	68.20	-15.58	peak
H	5784.650	57.07	-11.28	45.79	68.20	-22.41	peak
H	10884.225	42.83	-2.28	40.55	54.00	-13.45	AVG
H	10890.600	49.29	-2.25	47.04	74.00	-26.96	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

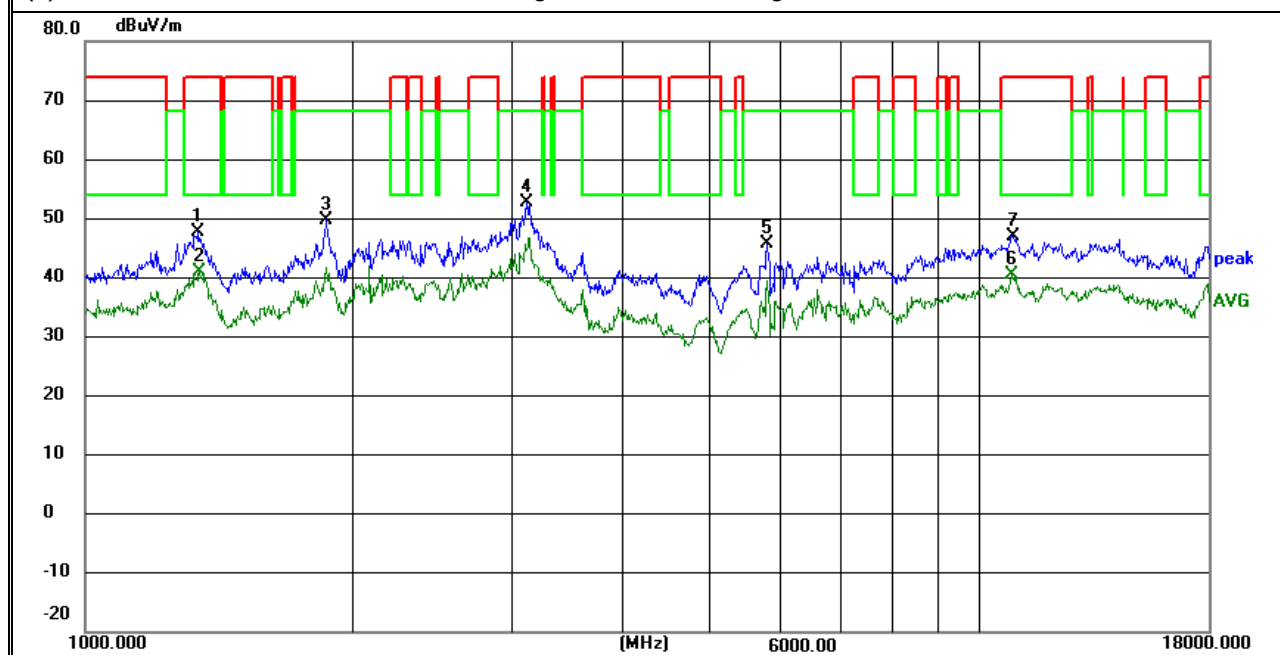


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) H CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1529.125	69.79	-22.98	46.81	74.00	-27.19	peak
V	1529.125	62.96	-22.98	39.98	54.00	-14.02	AVG
V	1705.500	63.22	-22.48	40.74	54.00	-13.26	AVG
V	1719.100	70.11	-22.55	47.56	74.00	-26.44	peak
V	2417.800	65.64	-19.13	46.51	68.20	-21.69	peak
V	3166.225	60.69	-15.40	45.29	68.20	-22.91	peak
V	5476.950	55.08	-11.66	43.42	68.20	-24.78	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

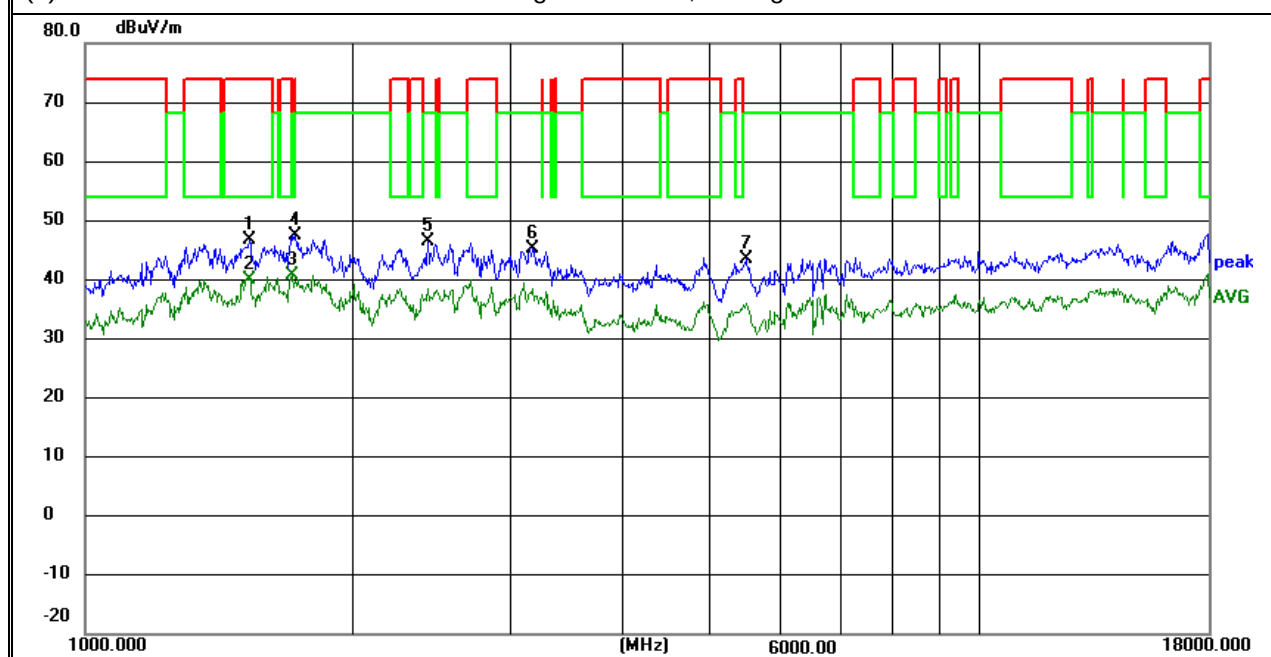


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) H CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1505.325	69.49	-23.04	46.45	74.00	-27.55	peak
H	1510.000	62.62	-23.03	39.59	54.00	-14.41	AVG
H	2468.800	65.55	-18.65	46.90	68.20	-21.30	peak
H	2489.625	56.81	-18.27	38.54	54.00	-15.46	AVG
H	2962.650	62.77	-15.92	46.85	68.20	-21.35	peak
H	10554.000	49.05	-3.66	45.39	68.20	-22.81	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

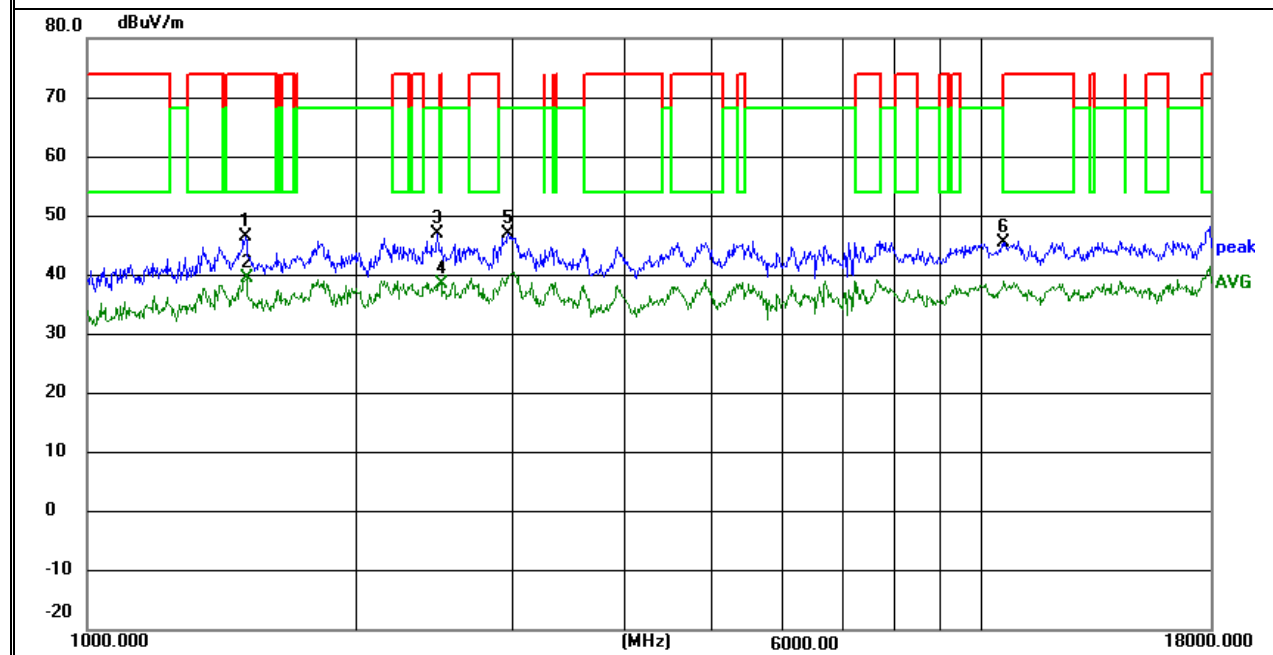


3.2.9 TEST RESULTS (18GHz-40GHz)

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.2G) - 802.11n(HT20) M CH	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	20877.600	58.42	-8.72	49.70	74.00	-24.30	peak
V	20877.600	47.75	-8.72	39.03	54.00	-14.97	AVG
V	25220.400	57.30	-4.16	53.14	68.20	-15.06	peak
V	31373.067	48.90	-5.74	43.16	54.00	-10.84	AVG
V	31393.600	61.28	-5.73	55.55	74.00	-18.45	peak
V	34880.600	58.32	3.43	61.75	68.20	-6.45	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) No emissions was found at 18G ~40GHz, so it was not recorded in the report.

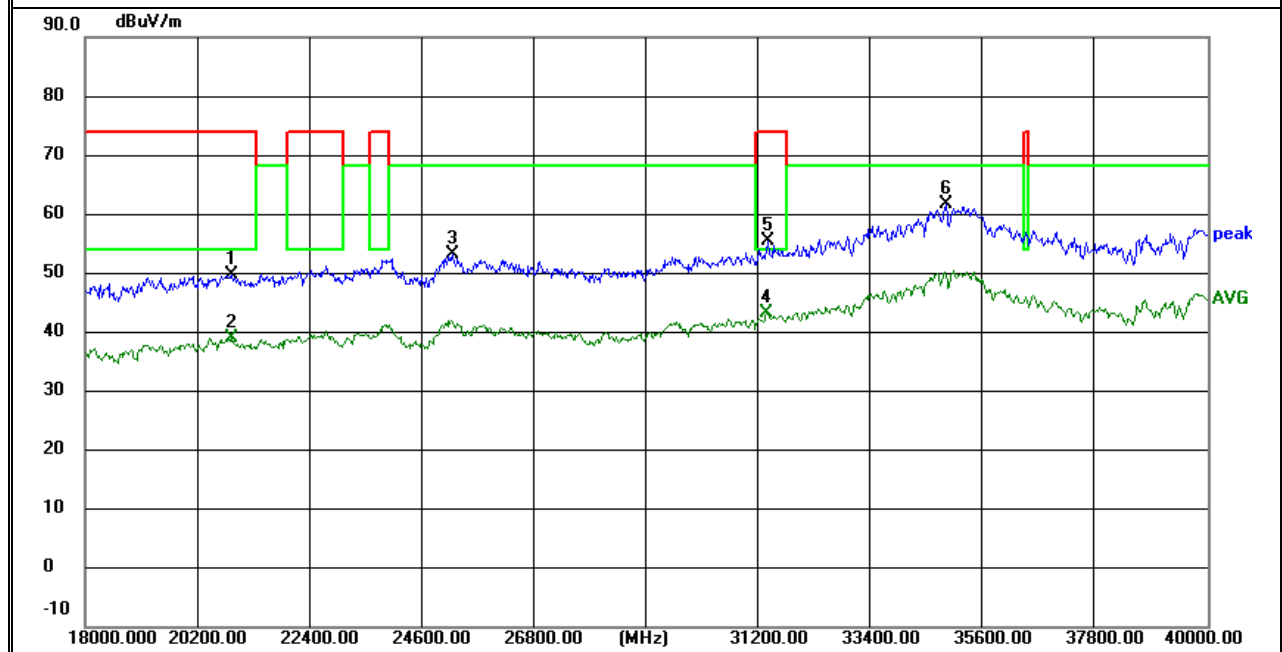


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.2G) - 802.11n(HT20) M CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	22743.200	59.94	-7.45	52.49	74.00	-21.51	peak
H	22743.200	49.01	-7.45	41.56	54.00	-12.44	AVG
H	25152.933	57.65	-4.02	53.63	68.20	-14.57	peak
H	33458.666	58.71	-0.86	57.85	68.20	-10.35	peak
H	34870.333	56.56	3.40	59.96	68.20	-8.24	peak
H	38803.200	56.60	1.84	58.44	68.20	-9.76	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) No emissions was found at 18G ~40GHz, so it was not recorded in the report.

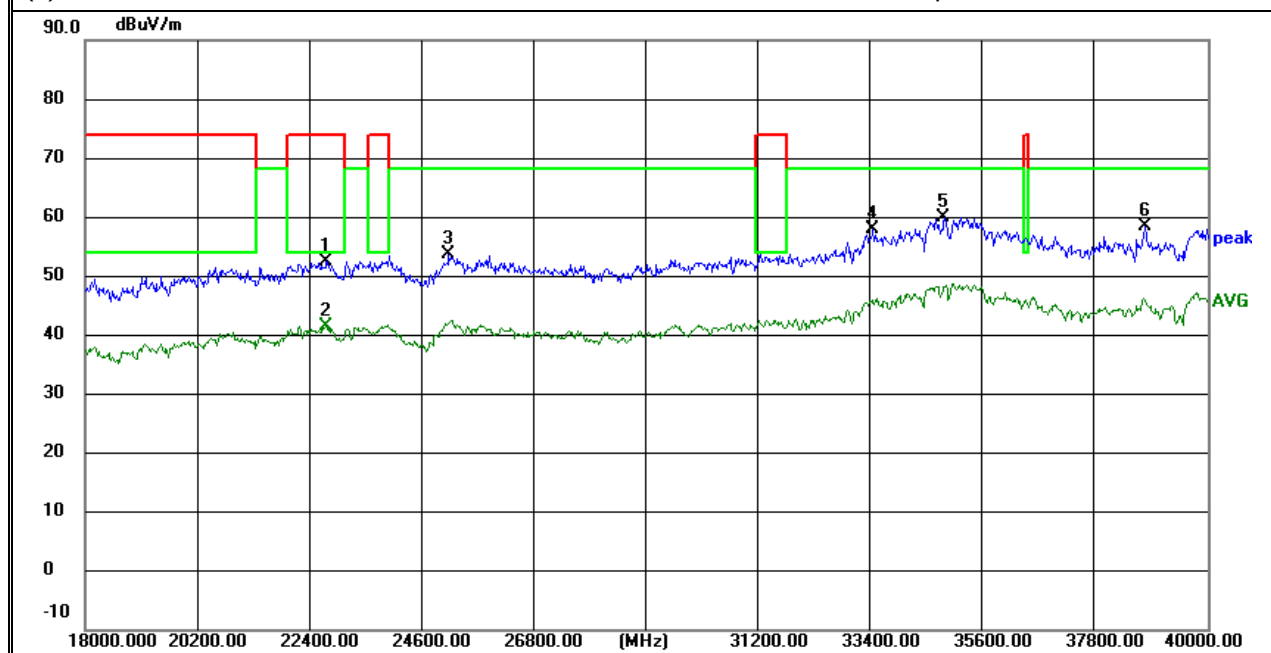


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) M CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	19486.466	48.10	-9.71	38.39	54.00	-15.61	AVG
V	19521.667	60.03	-9.68	50.35	74.00	-23.65	peak
V	29492.067	61.69	-7.82	53.87	68.20	-14.33	peak
V	35440.133	60.58	2.72	63.30	68.20	-4.90	peak
V	38801.733	57.17	1.84	59.01	68.20	-9.19	peak
V	39785.133	55.77	3.10	58.87	68.20	-9.33	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) No emissions was found at 18G ~40GHz, so it was not recorded in the report.

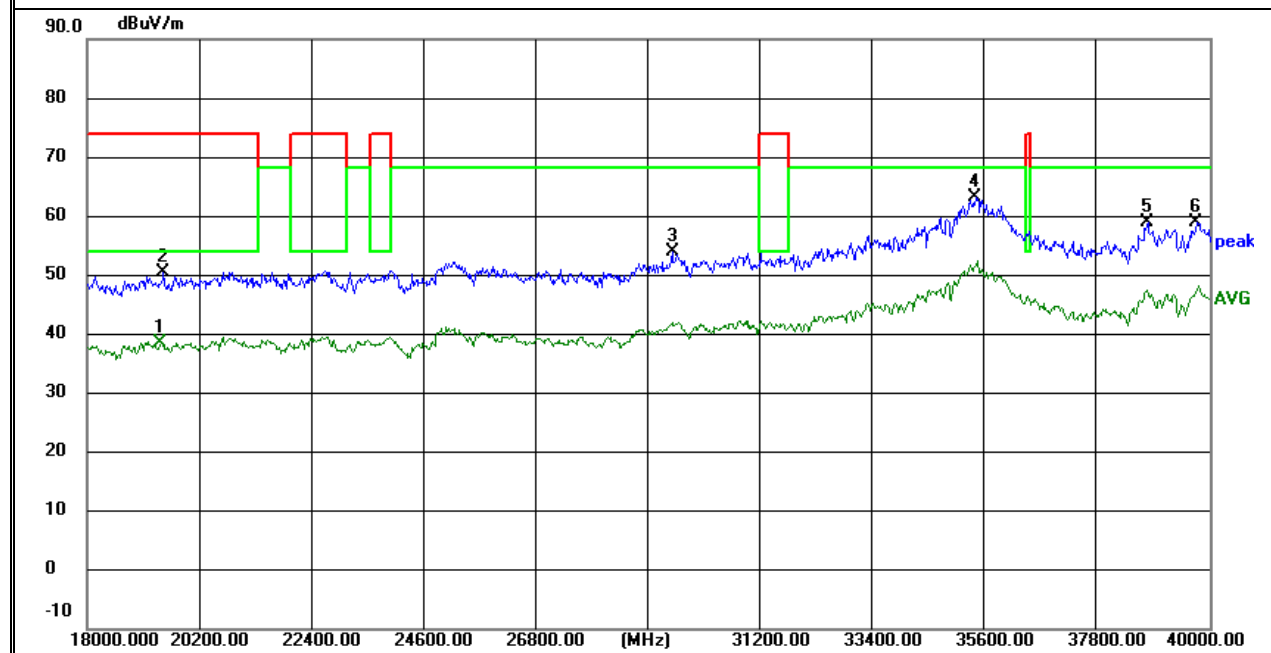


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) M CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20916.466	50.21	-8.73	41.48	54.00	-12.52	AVG
H	20927.466	61.83	-8.73	53.10	74.00	-20.90	peak
H	22632.466	48.74	-7.40	41.34	54.00	-12.66	AVG
H	22670.600	60.30	-7.42	52.88	74.00	-21.12	peak
H	25223.333	57.60	-4.17	53.43	68.20	-14.77	peak
H	35514.200	58.33	2.64	60.97	68.20	-7.23	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) No emissions was found at 18G ~40GHz, so it was not recorded in the report.

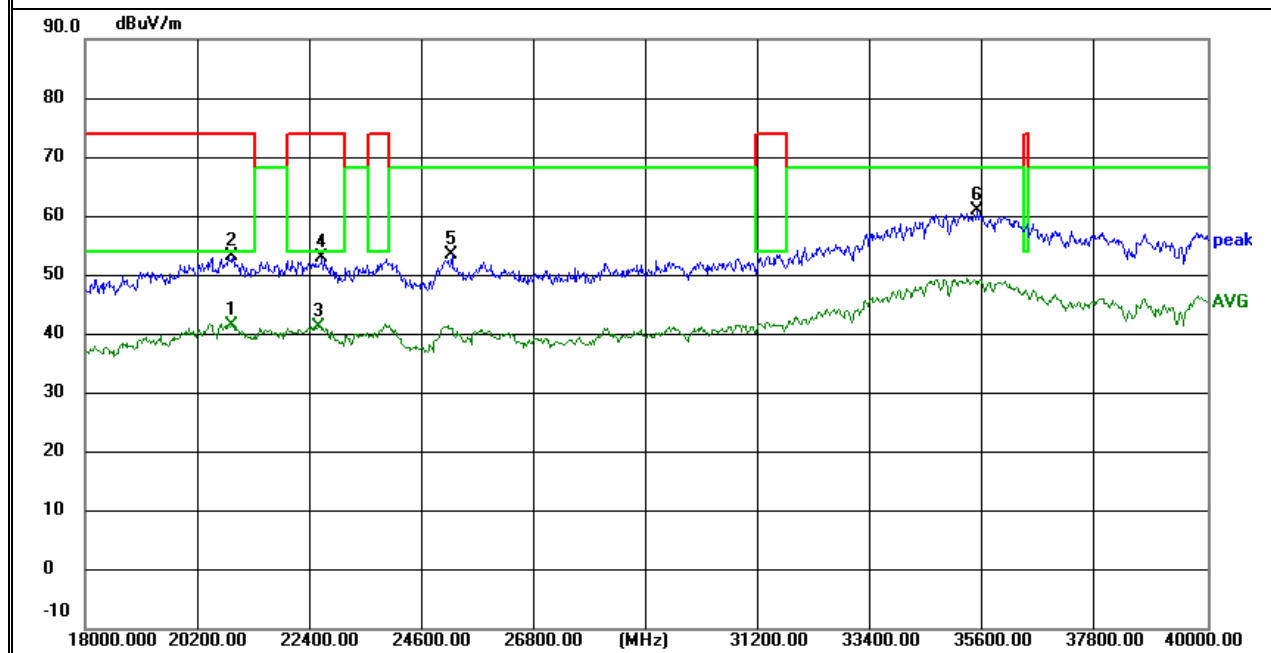


3.2.10 Spurious Emission in Restricted Band and Band Edge

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	62.03	-11.66	50.37	74.00	-23.63	peak
V	5150.000	46.47	-11.66	34.81	54.00	-19.19	AVG

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

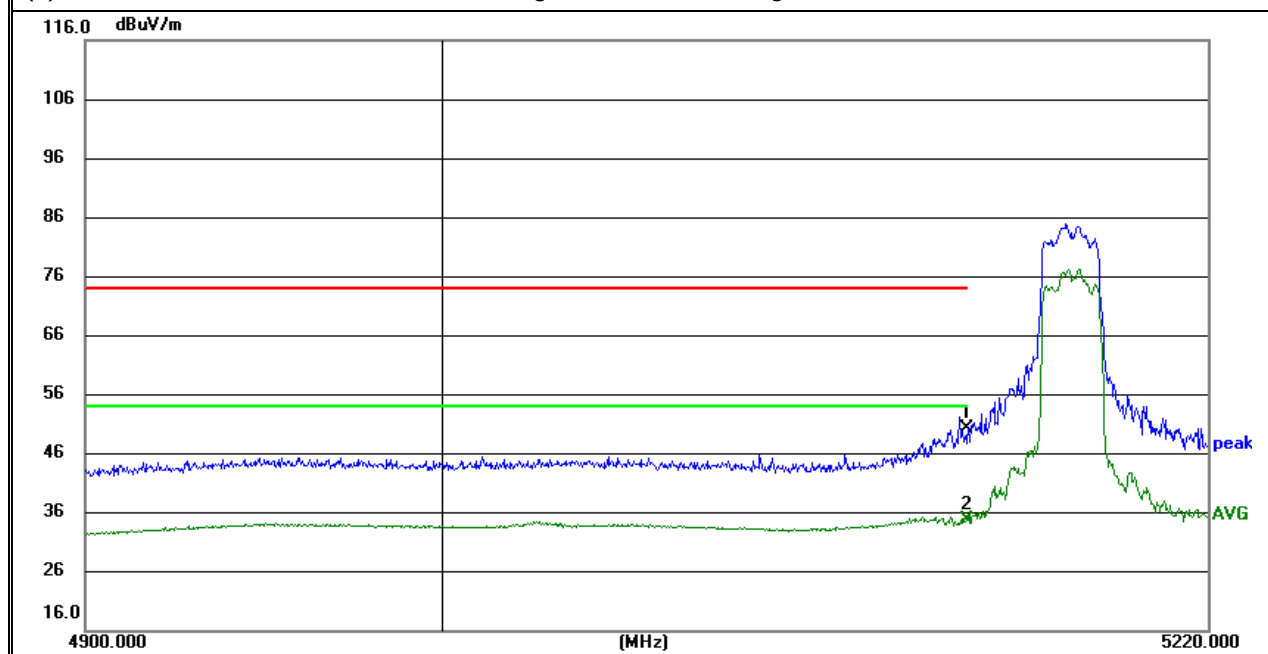


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX(5.2G) - 802.11n(HT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	66.98	-11.66	55.32	74.00	-18.68	peak
H	5150.000	50.04	-11.66	38.38	54.00	-15.62	AVG

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11n(HT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

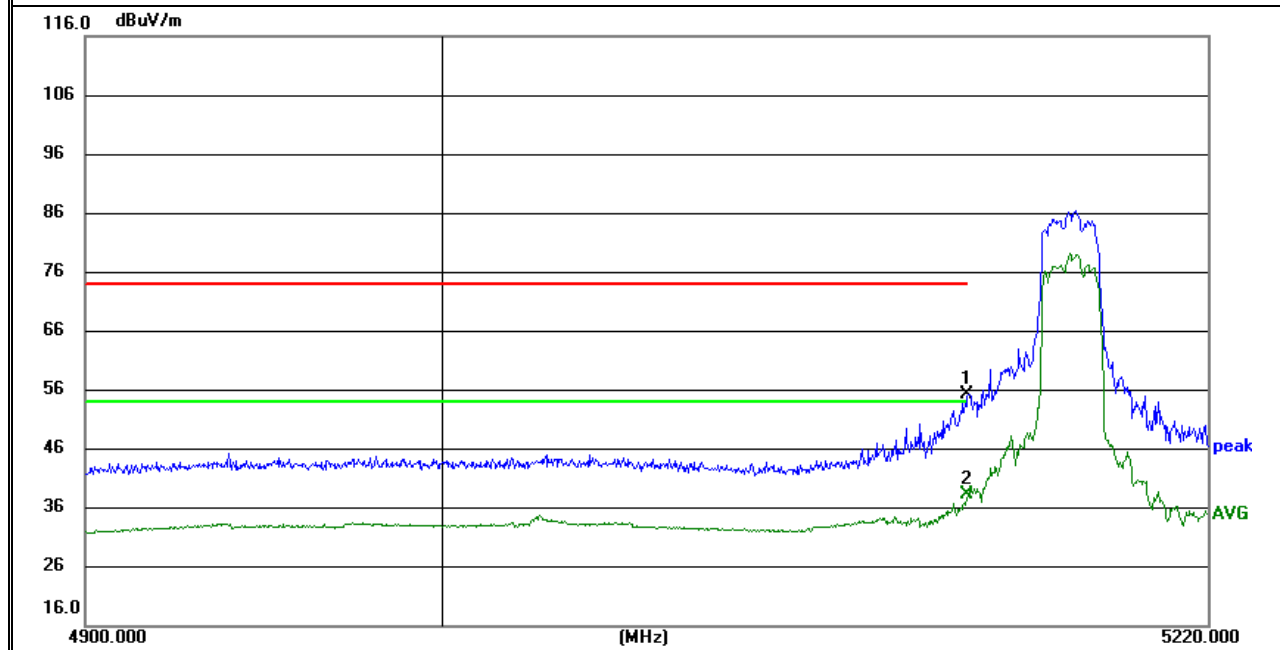


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5628.265	-38.11	0.15	-37.96	-27.00	-10.96	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

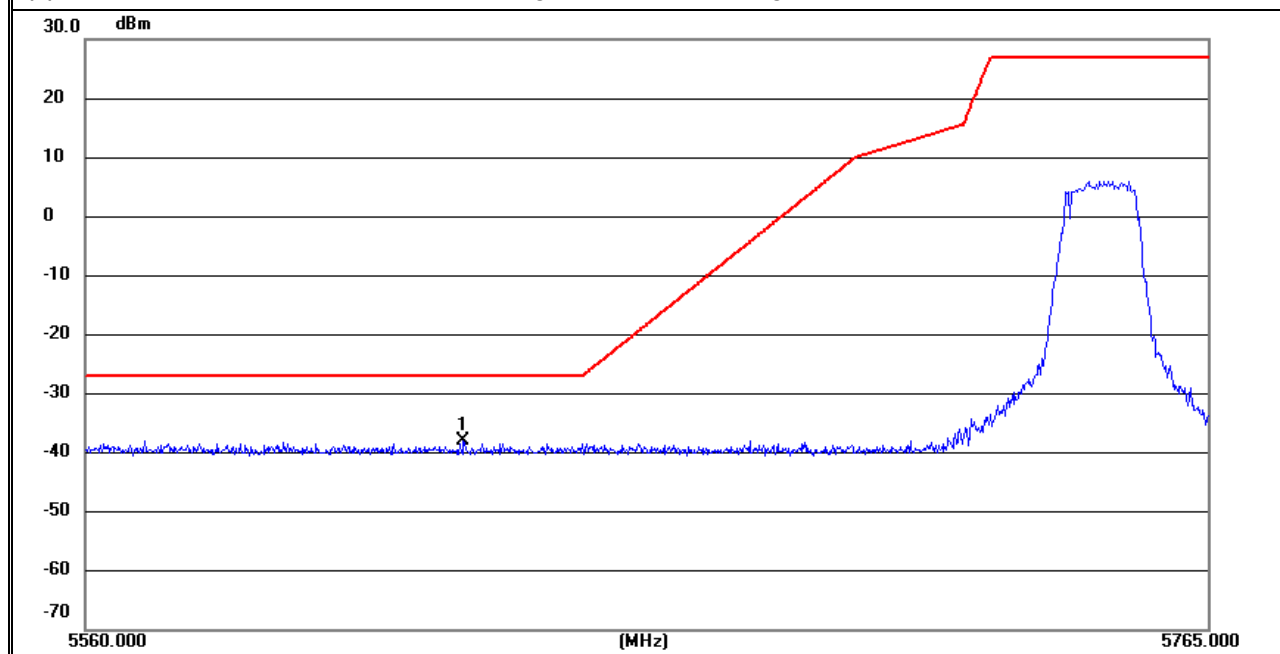


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) L CH	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	5592.185	-38.35	0.07	-38.28	-27.00	-11.28	peak

Remark:

- (5) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (6) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (7) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (8) When PK value is lower than the Average value limit, average don't record.

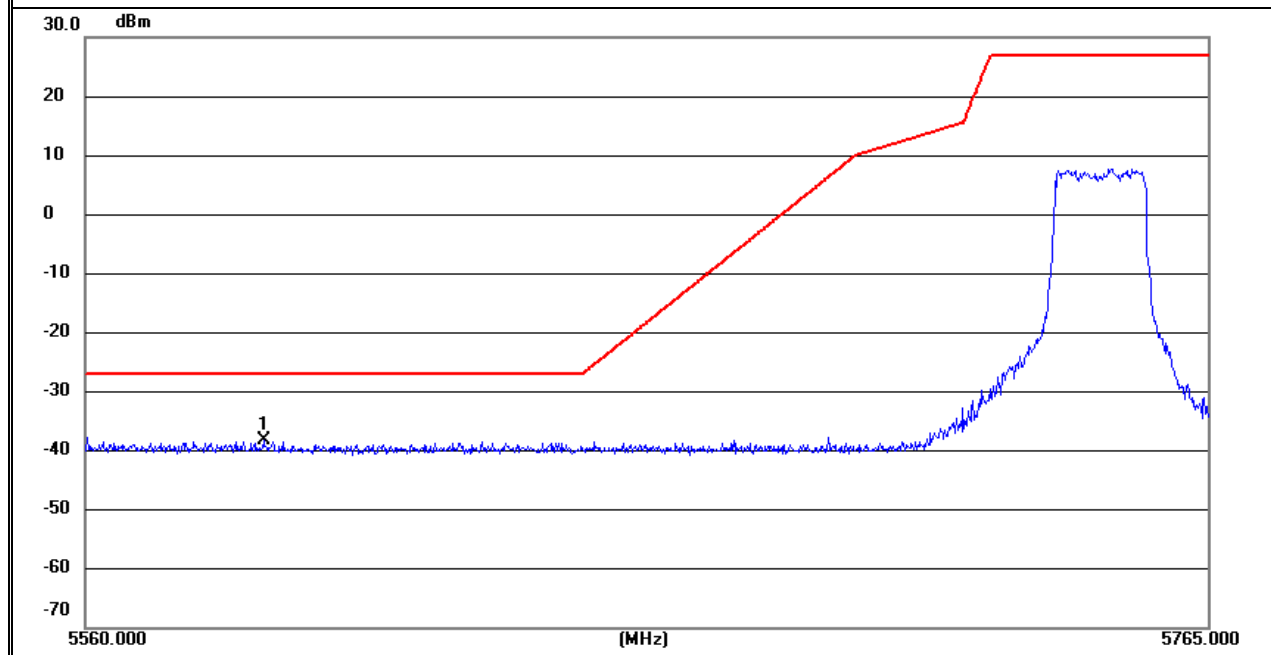


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) H CH	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5946.740	-37.24	1.45	-35.79	-27.00	-8.79	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

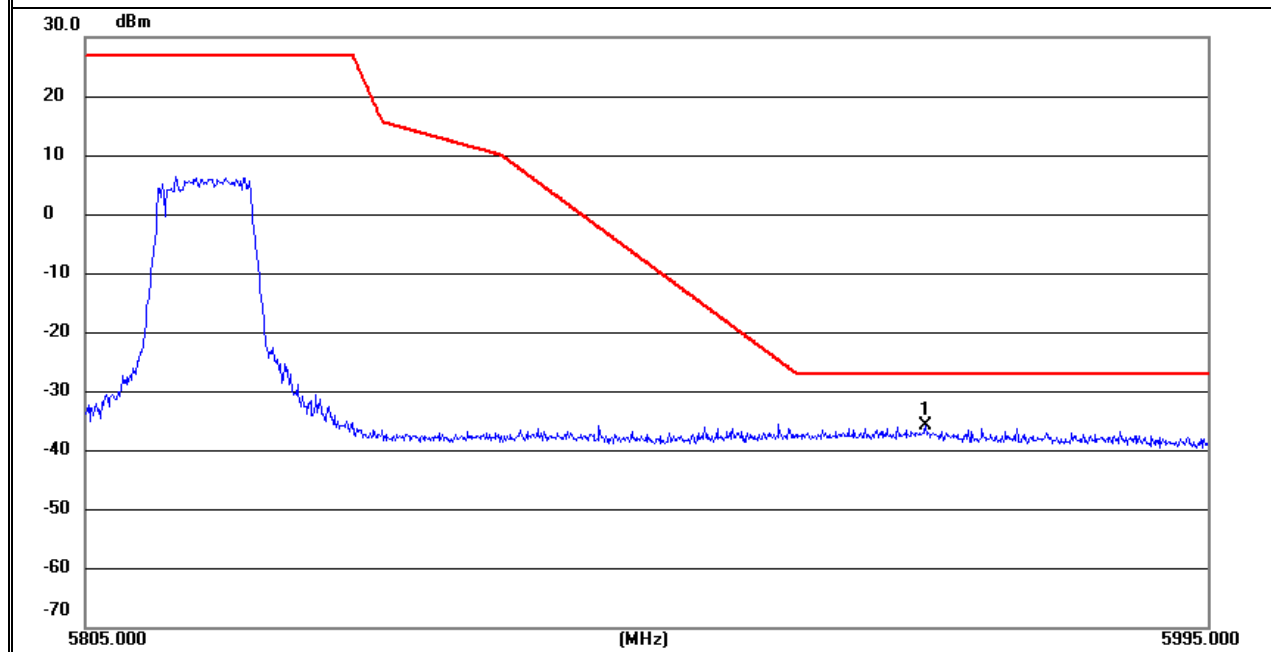


EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5.8G) - 802.11ac(VHT20) H CH	Tested By:	Harry Huang

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	5946.740	-37.56	1.45	-36.11	-27.00	-9.11	peak

Remark:

- (1) Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
- (2) All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ac(VHT20) antenna1. Only the worst-case mode and antenna are reported.
- (3) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
- (4) When PK value is lower than the Average value limit, average don't record.

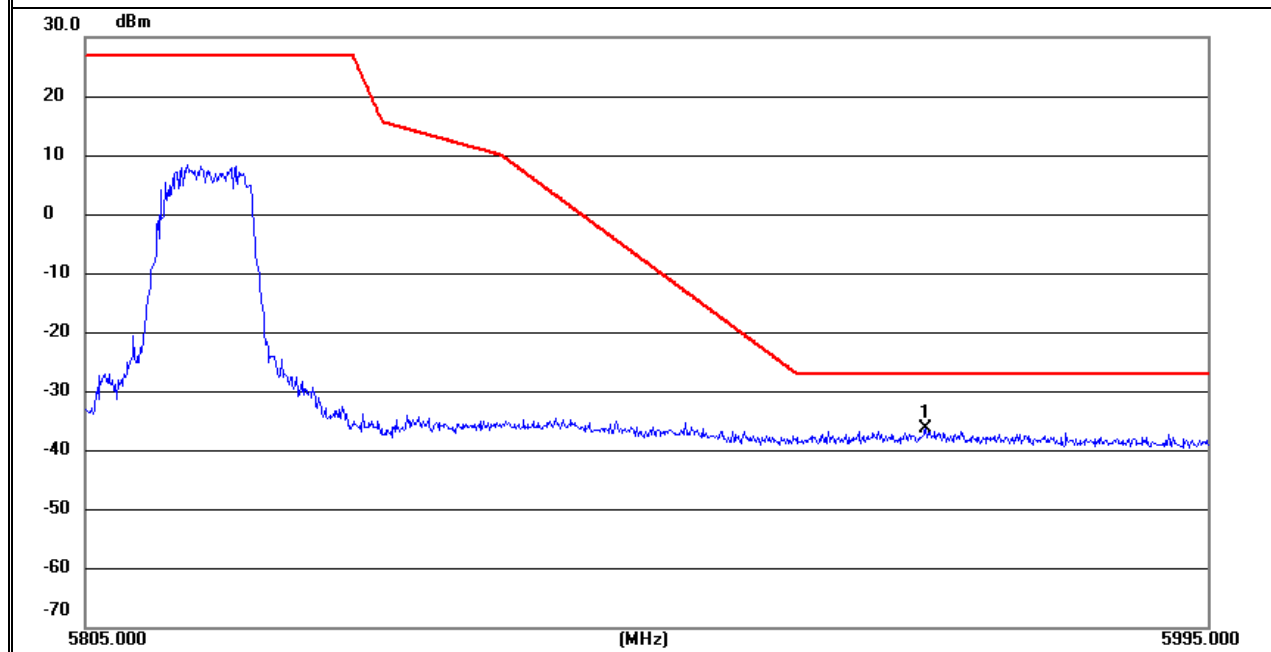

3.3 POWER SPECTRAL DENSITY TEST

3.3.1 Applied procedures / limit

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3.3 DEVIATION FROM STANDARD

No deviation.

3.3.4 TEST SETUP

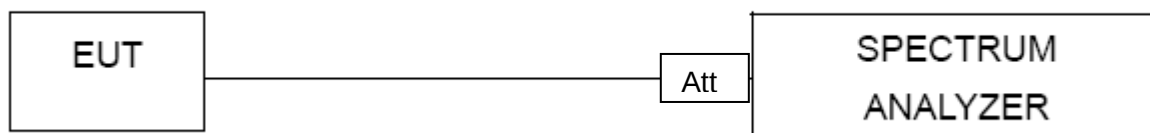

3.3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULTS

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 24V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)	Tested By:	Leo Wang

Test data reference attachment.

3.4 26DB & 99% EMISSION BANDWIDTH

3.4.1 Applied procedures / limit


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

3.4.2 TEST PROCEDURE

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set VBW $\geq 3 \cdot$ RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument (if available).
- If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

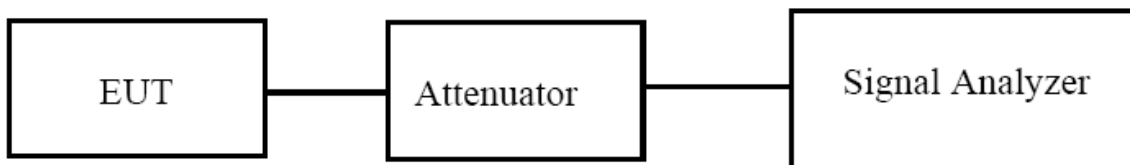

3.4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.4 TEST RESULTS

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)	Tested By:	Leo Wang

Test data reference attachment.

3.5 MINIMUM 6 DB BANDWIDTH

3.5.1 Applied procedures / limit

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.5.3 DEVIATION FROM STANDARD

No deviation.

3.5.4 TEST SETUP

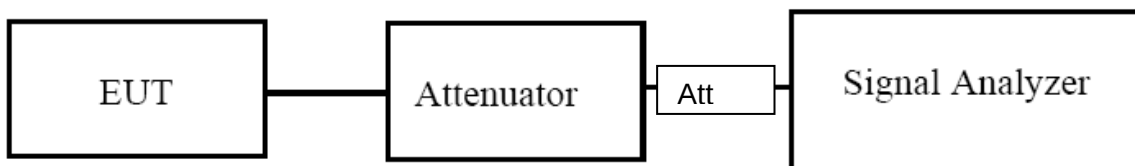

3.5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.5.6 TEST RESULTS

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5850MHz)	Tested By:	Leo Wang

Test data reference attachment.

3.6 MAXIMUM CONDUCTED OUTPUT POWER

3.6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

3.6.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

3.6.3 DEVIATION FROM STANDARD

No deviation.

3.6.4 TEST SETUP

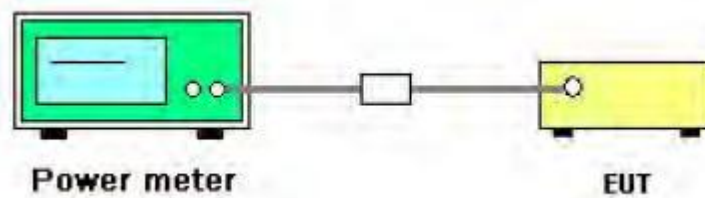

3.6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6.6 TEST RESULTS

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5G) Mode Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)	Tested By:	Leo Wang

Test data reference attachment.

3.7 OUT OF BAND EMISSIONS

3.7.1 Applicable Standard

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

3.7.3 DEVIATION FROM STANDARD

No deviation.

3.7.4 TEST SETUP

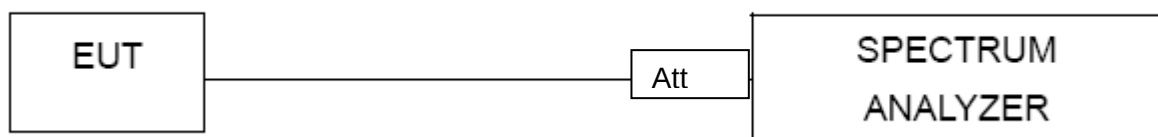

3.7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.7.6 TEST RESULTS

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	TX (5G) Mode Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)	Tested By:	Leo Wang

Test data reference attachment.

3.8 SPURIOUS RF CONDUCTED EMISSIONS

3.8.1 Conformance Limit

According to FCC §15.407(b)(1) (2) (3) (4)

3.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

3.8.3 Test Setup

Please refer to Section 6.1 of this test report.

3.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 40GHz.

3.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test data reference attachment.

3.9 FREQUENCY STABILITY MEASUREMENT


3.9.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6 \text{ ppm}$.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

3.9.3 TEST SETUP LAYOUT

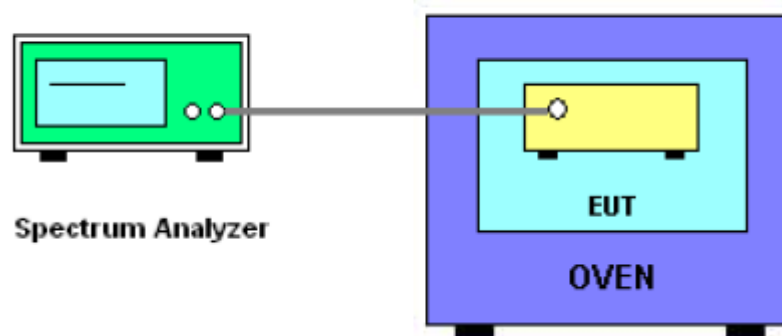

3.9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

3.9.5 TEST RESULTS

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	TX Frequency Band I (5150-5250MHz)	Tested By:	Leo Wang

Note: All modes have been tested, just the 802.11a mode is the worst mode has been recorded in the report.

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24	5180.0100	5180	0.0100	1.9222
		V max (V)	27.6	5180.0067	5180	0.0067	1.2934
		V min (V)	20.4	5180.0029	5180	0.0029	0.5598
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5180.0010	5180	0.0010	0.1931
		T (°C)	-10	5180.0011	5180	0.0011	0.2124
		T (°C)	0	5180.0076	5180	0.0076	1.4672
		T (°C)	10	5180.0010	5180	0.0010	0.1931
		T (°C)	20	5180.0095	5180	0.0095	1.8340
		T (°C)	30	5180.0001	5180	0.0001	0.0193
		T (°C)	40	5180.0042	5180	0.0042	0.8108
		T (°C)	50	5180.0087	5180	0.0087	1.6795
		T (°C)	60	5180.0002	5180	0.0002	0.0386
		T (°C)	70	5180.0079	5180	0.0079	1.5251
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24	5200.0070	5200	0.0070	1.3462
		V max (V)	27.6	5200.0099	5200	0.0099	1.9038
		V min (V)	20.4	5200.0083	5200	0.0083	1.5962
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5200.0010	5200	0.0010	0.1923
		T (°C)	-10	5200.0018	5200	0.0018	0.3462
		T (°C)	0	5200.0035	5200	0.0035	0.6731
		T (°C)	10	5200.0083	5200	0.0083	1.5962
		T (°C)	20	5200.0024	5200	0.0024	0.4615
		T (°C)	30	5200.0088	5200	0.0088	1.6923
		T (°C)	40	5200.0067	5200	0.0067	1.2885
		T (°C)	50	5200.0086	5200	0.0086	1.6538
		T (°C)	60	5200.0054	5200	0.0054	1.0385
		T (°C)	70	5200.0080	5200	0.0080	1.5385
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24	5240.0005	5240	0.0005	0.0954
		V max (V)	27.6	5240.0012	5240	0.0012	0.2290
		V min (V)	20.4	5240.0008	5240	0.0008	0.1527
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5240.0061	5240	0.0061	1.1641
		T (°C)	-10	5240.0044	5240	0.0044	0.8397
		T (°C)	0	5240.0007	5240	0.0007	0.1336
		T (°C)	10	5240.0090	5240	0.0090	1.7176
		T (°C)	20	5240.0027	5240	0.0027	0.5153
		T (°C)	30	5240.0079	5240	0.0079	1.5076
		T (°C)	40	5240.0067	5240	0.0067	1.2786
		T (°C)	50	5240.0046	5240	0.0046	0.8779
		T (°C)	60	5240.0025	5240	0.0025	0.4771
		T (°C)	70	5240.0060	5240	0.0060	1.1450
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Celerway Stratus 5GR16	Model Name. :	CWY-M5.3-E5C2W2R16
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	TX Frequency(5745-5825MHz)	Tested By:	Leo Wang

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24	5745.0045	5745	0.0045	0.7833
		V max (V)	27.6	5745.0064	5745	0.0064	1.1140
		V min (V)	20.4	5745.0033	5745	0.0033	0.5744
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5745.0079	5745	0.0079	1.3751
		T (°C)	-10	5745.0016	5745	0.0016	0.2785
		T (°C)	0	5745.0060	5745	0.0060	1.0444
		T (°C)	10	5745.0085	5745	0.0085	1.4795
		T (°C)	20	5745.0078	5745	0.0078	1.3577
		T (°C)	30	5745.0071	5745	0.0071	1.2359
		T (°C)	40	5745.0056	5745	0.0056	0.9748
		T (°C)	50	5745.0088	5745	0.0088	1.5318
		T (°C)	60	5745.0035	5745	0.0035	0.6092
		T (°C)	70	5745.0048	5745	0.0048	0.8355
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24	5785.0031	5785	0.00310	-0.5359
		V max (V)	27.6	5785.0044	5785	0.00440	-0.7606
		V min (V)	20.4	5785.0066	5785	0.00660	-1.1409
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5785.0021	5785	0.0021	0.3630
		T (°C)	-10	5785.0049	5785	0.0049	0.8470
		T (°C)	0	5785.0093	5785	0.0093	1.6076
		T (°C)	10	5785.0097	5785	0.0097	1.6768
		T (°C)	20	5785.0093	5785	0.0093	1.6076
		T (°C)	30	5785.0021	5785	0.0021	0.3630
		T (°C)	40	5785.0069	5785	0.0069	1.1927
		T (°C)	50	5785.0004	5785	0.0004	0.0691
		T (°C)	60	5785.0080	5785	0.0080	1.3829
		T (°C)	70	5785.0066	5785	0.0066	1.1409
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24	5825.0029	5825	0.0029	0.4979
		V max (V)	27.6	5825.0077	5825	0.0077	1.3219
		V min (V)	20.4	5825.0025	5825	0.0025	0.4292
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5825.0039	5825	0.0039	0.6695
		T (°C)	-10	5825.0095	5825	0.0095	1.6309
		T (°C)	0	5825.0082	5825	0.0082	1.4077
		T (°C)	10	5825.0091	5825	0.0091	1.5622
		T (°C)	20	5825.0025	5825	0.0025	0.4292
		T (°C)	30	5825.0069	5825	0.0069	1.1845
		T (°C)	40	5825.0059	5825	0.0059	1.0129
		T (°C)	50	5825.0030	5825	0.0030	0.5150
		T (°C)	60	5825.0050	5825	0.0050	0.8584
		T (°C)	70	5825.0003	5825	0.0003	0.0515
Limits				Within 5745-5850MHz			
Result				Complies			

4. ANTENNA REQUIREMENT

4.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.2 EUT ANTENNA

The EUT antenna is permanent attached External antenna (antenna gain: 5dBi). It comply with the standard requirement.

END OF REPORT