

TEST REPORT

Applicant: Trax Technology Solutions Pte Ltd

Address of Applicant: 65 Chulia Street, #19-01, OCBC Centre, Downtown Core 049513, Singapore

Manufacturer: Trax Technology Solutions Pte Ltd

Address of Manufacturer: 65 Chulia Street, #19-01, OCBC Centre, Downtown Core 049513, Singapore

Equipment Under Test (EUT)

Product Name: Trax Shelf Camera v1.1

Model No.: 2018-01

HVIN: 1.1

Trade Mark: N/A

FCC ID: 2AW6Y-CAM11

IC: 26479-CAM11

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-Gen Issue 5
RSS-247 Issue 2

Date of sample receipt: January 12, 2021

Date of Test: January 12, 2021-March 04, 2021

Date of report issued: March 05, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager


This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Version

Version No.	Date	Description
00	March 05, 2021	Original

Prepared By:




Date:

March 05, 2021

Project Engineer

Check By:



Date:

March 05, 2021

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
5.6 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED PEAK OUTPUT POWER	11
7.3 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH	12
7.4 POWER SPECTRAL DENSITY	17
7.5 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS	20
7.5.1 <i>Conducted Emission Method</i>	20
7.5.2 <i>Radiated Emission Method</i>	25
7.6 FREQUENCY STABILITY	40
8 TEST SETUP PHOTO	43
9 EUT CONSTRUCTIONAL DETAILS	43

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c) RSS-Gen Section 6.8	Pass
AC Power Line Conducted Emission	FCC part 15.207 RSS-Gen Section 8.8	N/A
Conducted Peak Output Power	FCC part 15.247 (b)(3) RSS-247 Section 5.4(d)	Pass
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2) RSS-247 Section 5.2(a) & RSS-Gen 6.7	Pass
Power Spectral Density	FCC part 15.247 (e) RSS-247 Section 5.2(b)	Pass
Band Edge	FCC part 15.247(d) RSS-Gen 8.10 & RSS-247 5.5	Pass
Spurious Emission	FCC part 15.205/15.209 RSS-Gen Section 8.9 & 8.10	Pass

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Trax Shelf Camera v1.1
Model No.:	2018-01
Test sample(s) ID:	GTS202101000062-1
Sample(s) Status	Engineer sample
Serial No.:	N/A
Hardware version:	v1.1
Software version:	v5.1.3
Operation Frequency:	2412MHz~2462MHz(802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz(802.11n(H40))
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(HT20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral Antenna
Antenna gain:	0dBi(declare by applicant)
Power supply:	DC 6V (4x1.5V AA batteries)

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	2457MHz	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Additional Instructions

Test Software	Test software provided by manufacturer.
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement:	
(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
Standard requirement:	RSS-Gen Section 6.8
A transmitter can only be sold or operated with antennas with which it was approved. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power	
EUT Antenna:	
<i>The antenna is Integral antenna, the best case gain of the ANT is 0dBi, reference to the appendix II for details</i>	

7.2 Conducted Peak Output Power

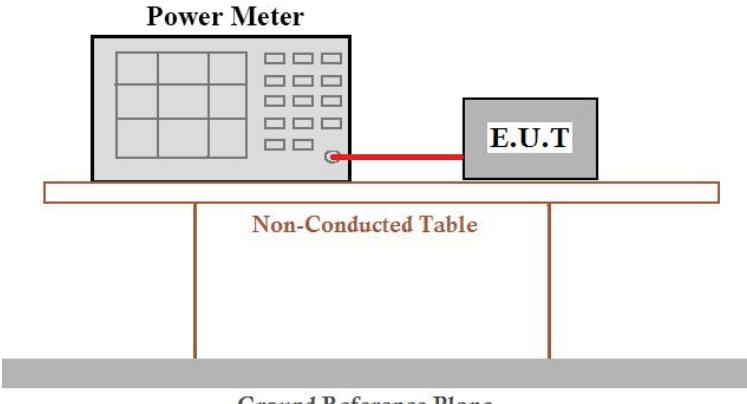
Test Requirement :	FCC Part15 C Section 15.247 (b)(3) RSS-247 Section 5.4(d)
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013 and RSS-Gen
Limit:	30dBm 36dBm(4W for e.i.r.p)
Test setup:	<p style="text-align: center;">Power Meter</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	14.84	14.16	13.93	14.49	30.00	Pass
Middle	14.86	14.04	13.96	14.18		
Highest	14.84	14.16	14.08	14.56		

Test CH	e.i.r.p (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	14.84	14.16	13.93	14.49	36	Pass
Middle	14.86	14.04	13.96	14.18		
Highest	14.84	14.16	14.08	14.56		

7.3 Channel Bandwidth & 99% Occupy Bandwidth

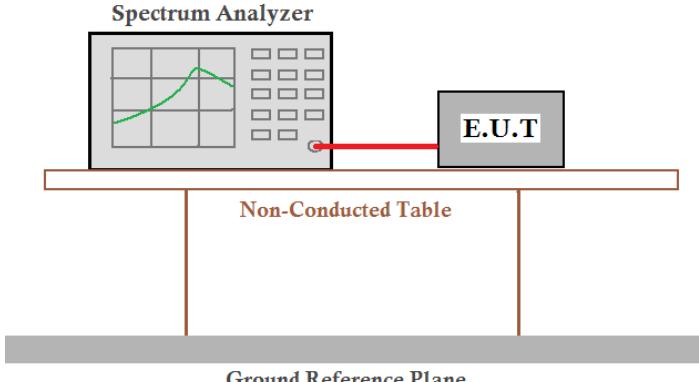
Test Requirement :	FCC Part15 C Section 15.247 (a)(2) RSS-Gen Section 6.7 & RSS-247 Section 5.2(a)
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013 and RSS-Gen
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.153	16.525	17.654	36.592	>500	Pass
Middle	10.092	16.521	17.653	36.529		
Highest	10.127	16.539	17.736	36.544		




Test CH	99% Occupy Bandwidth (MHz)				Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	
Lowest	13.3948	16.9416	17.7043	36.5704	Pass
Middle	13.4409	16.8771	17.7007	36.5880	
Highest	13.5019	17.0138	17.7002	36.6735	


Test plot as follows:

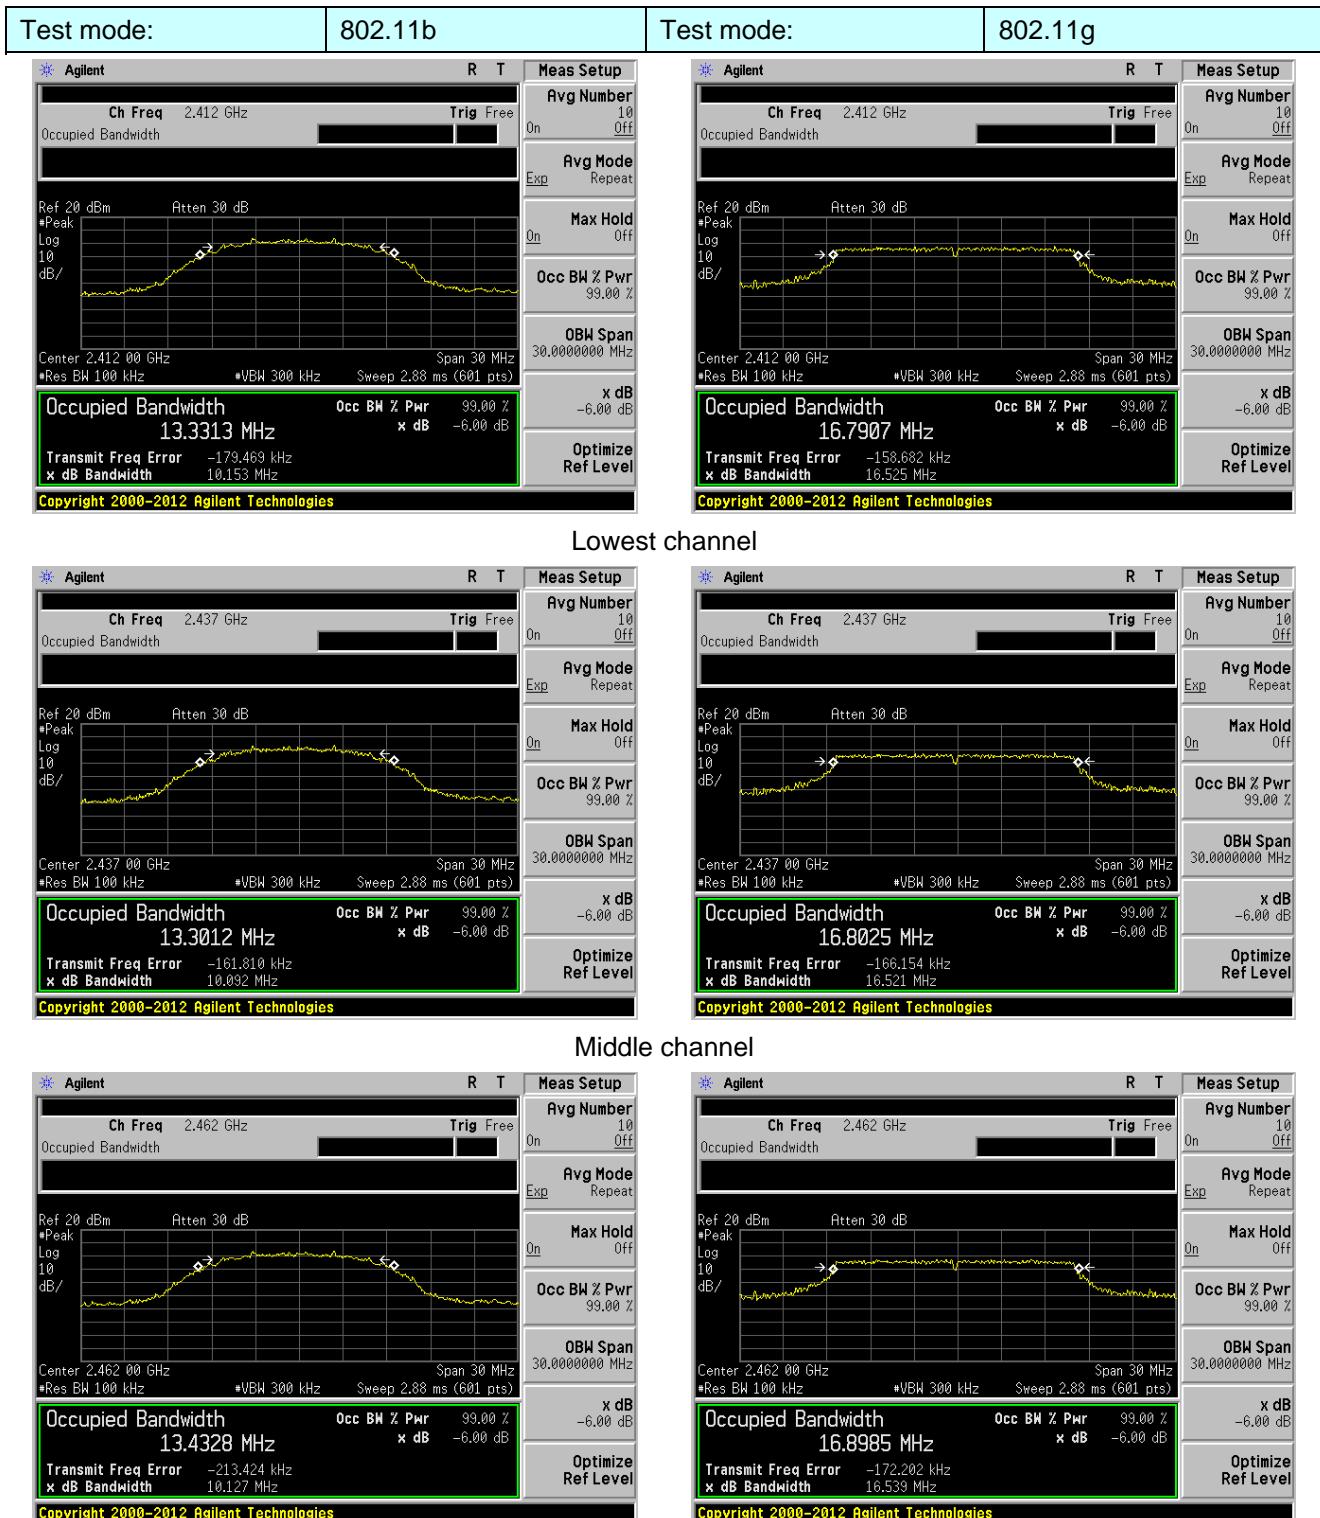-6dB BW:

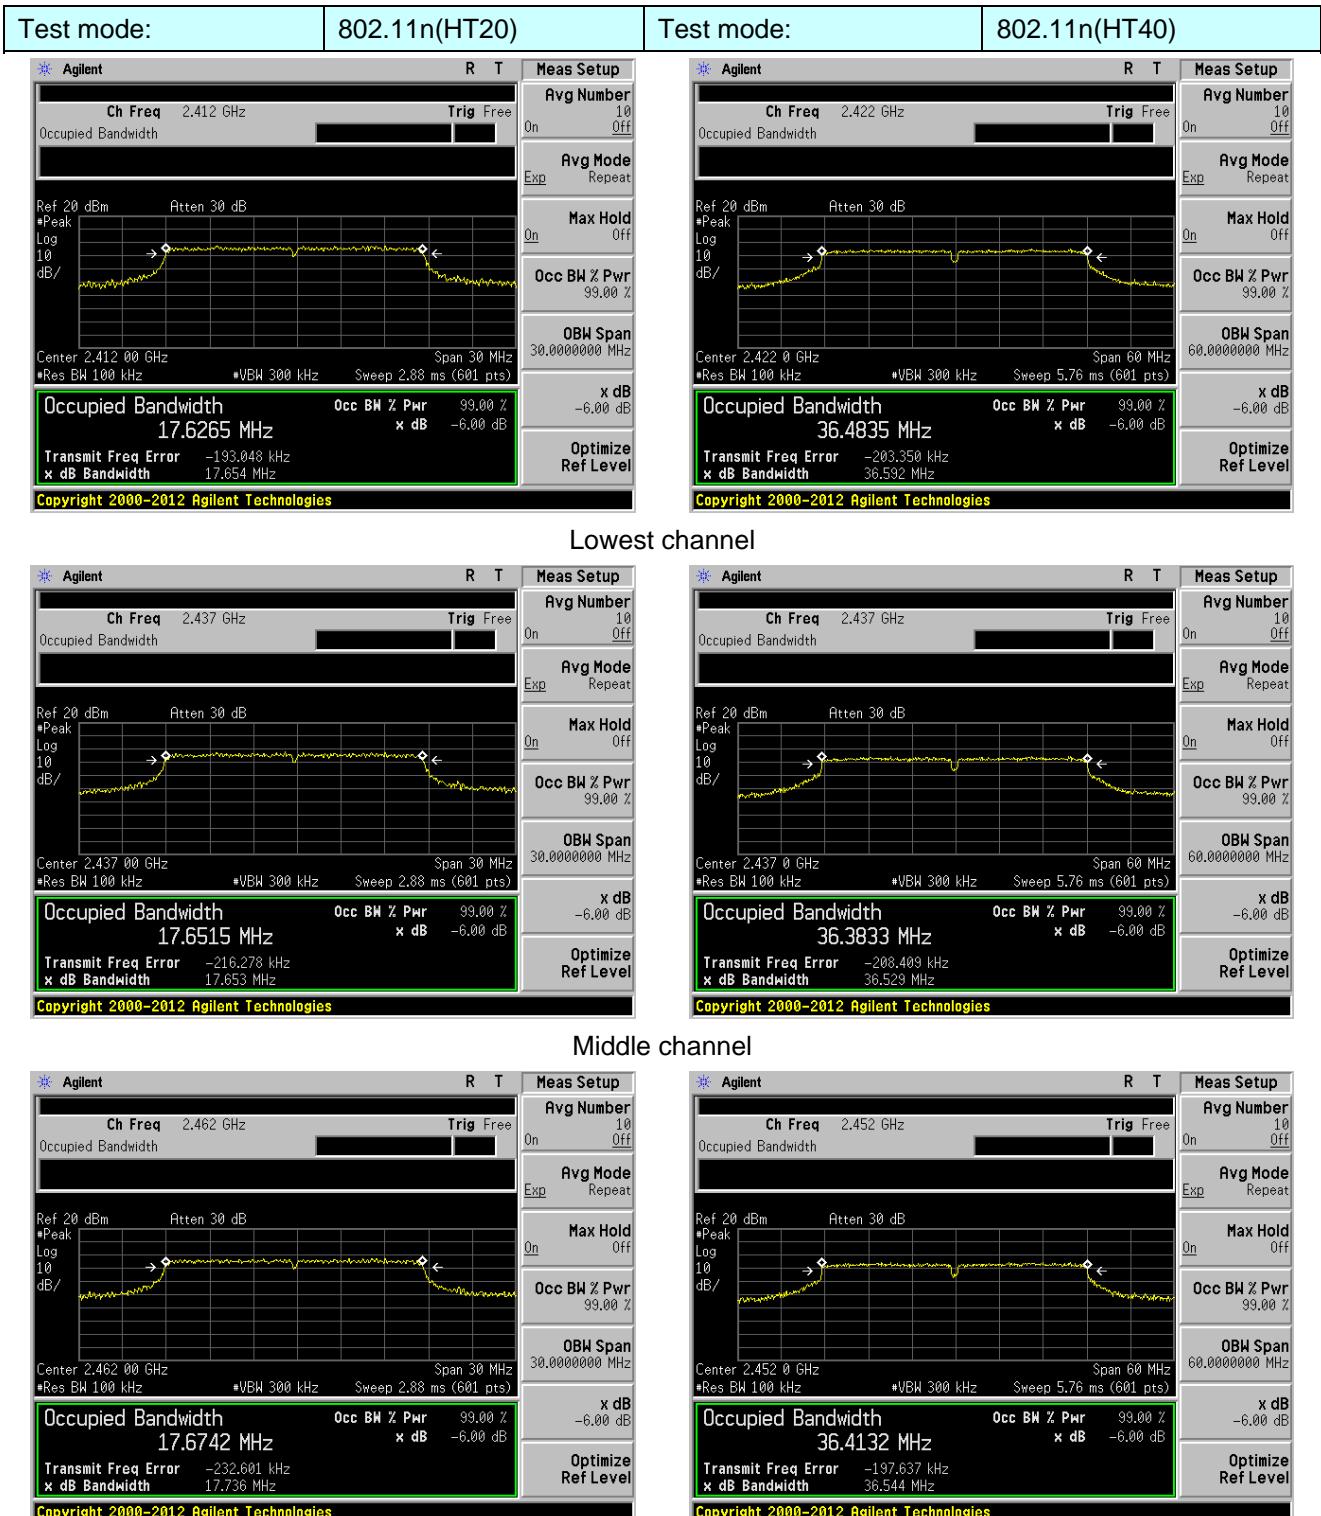
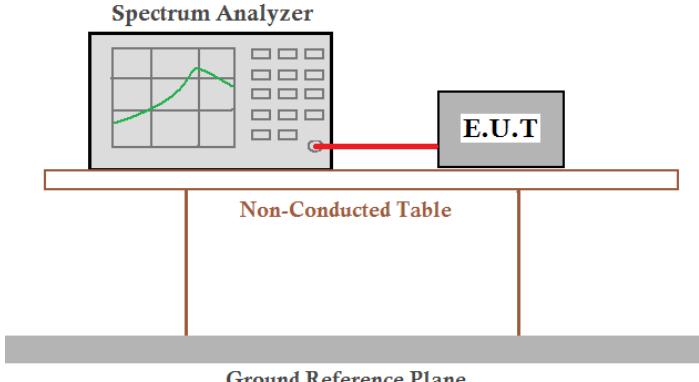


Highest channel

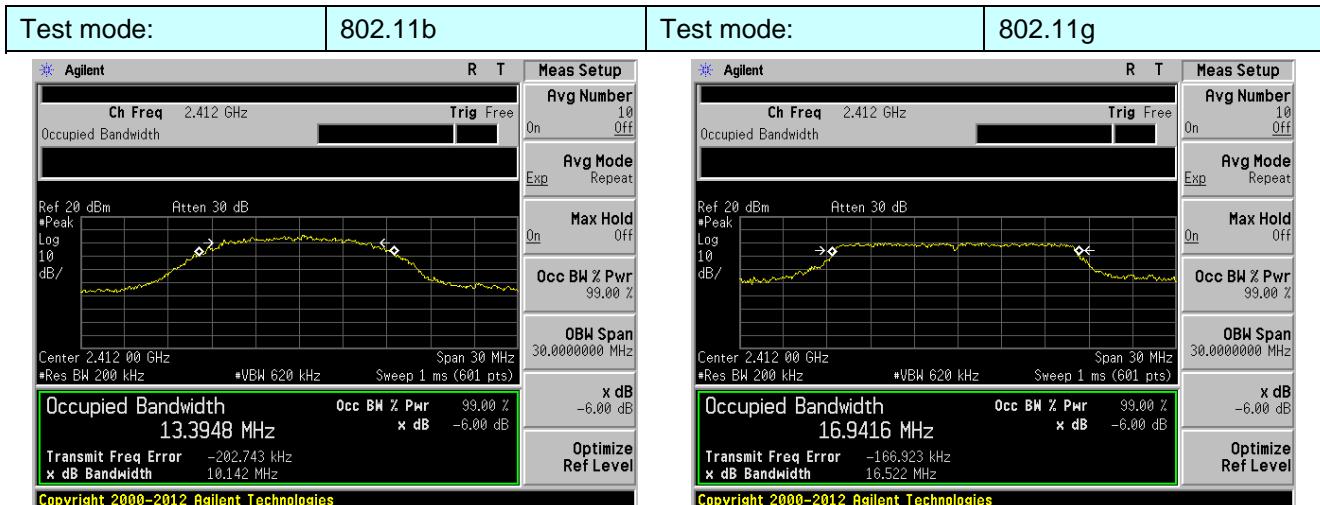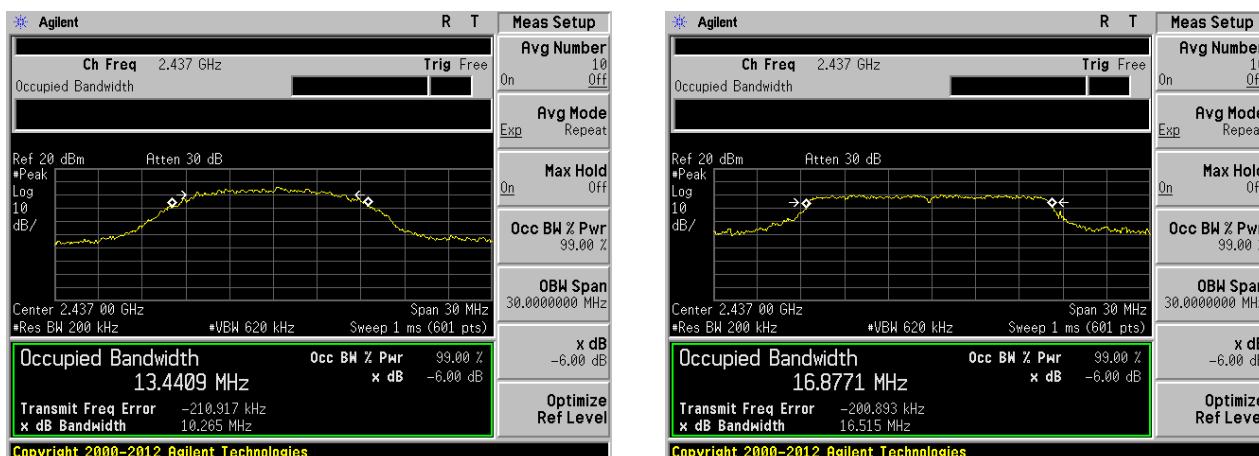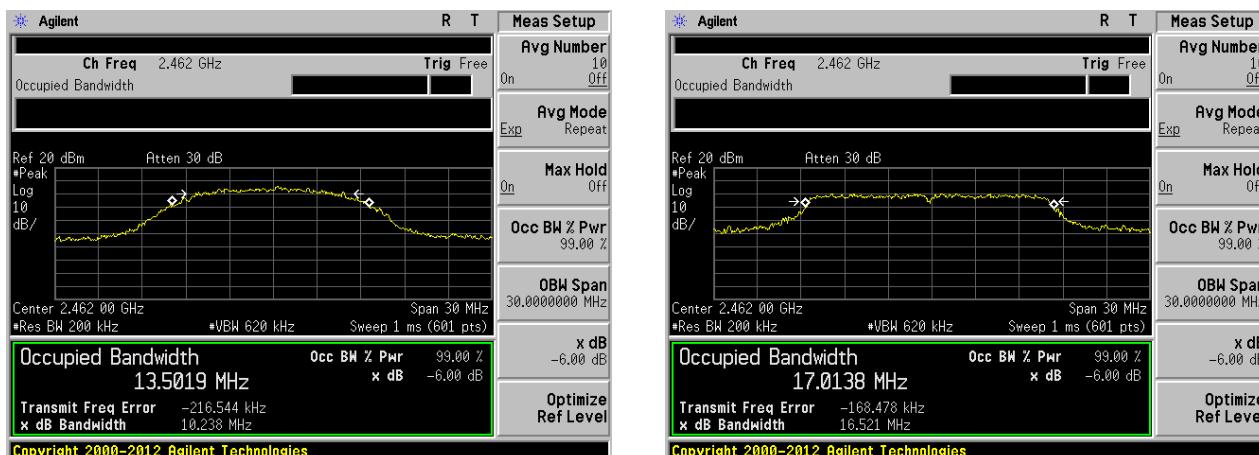99% BW:

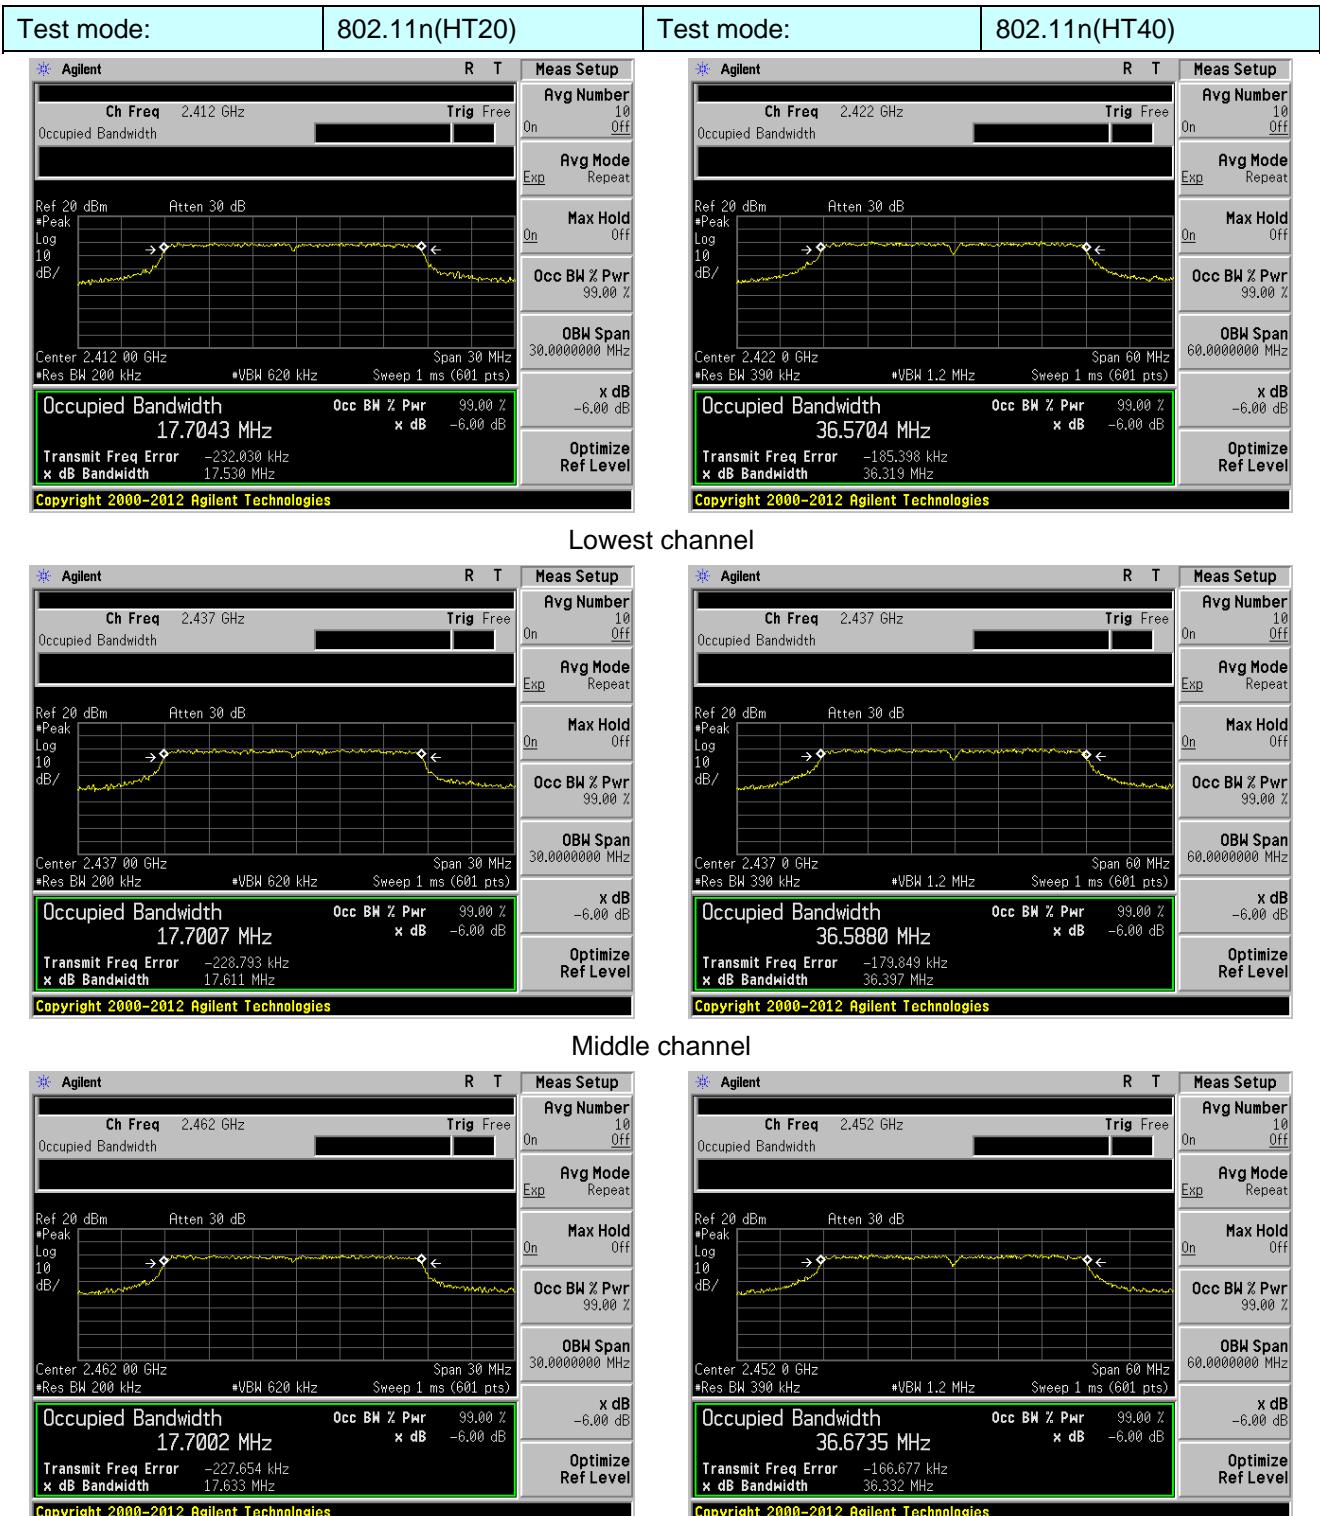Lowest channel

Middle channel

Highest channel



7.4 Power Spectral Density



Test Requirement:	FCC Part15 C Section 15.247 (e) RSS-247 Section 5.2(b)
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013 and RSS-Gen
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data



Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-12.05	-17.14	-17.20	-18.58	8.00	Pass
Middle	-12.84	-17.27	-16.95	-5.69		
Highest	-12.32	-17.62	-16.95	-17.87		

Test plot as follows:



Test mode:	802.11b	Test mode:	802.11g
------------	---------	------------	---------

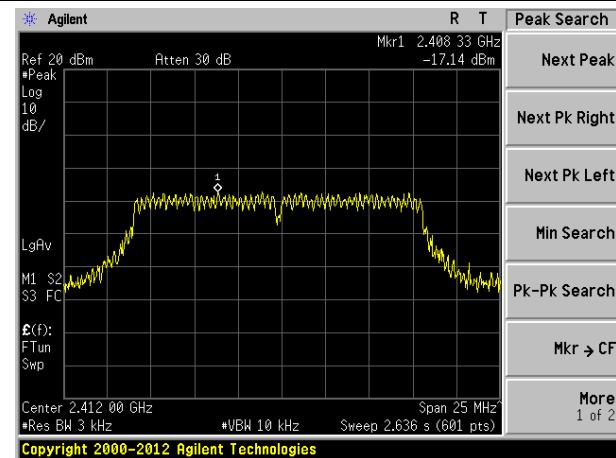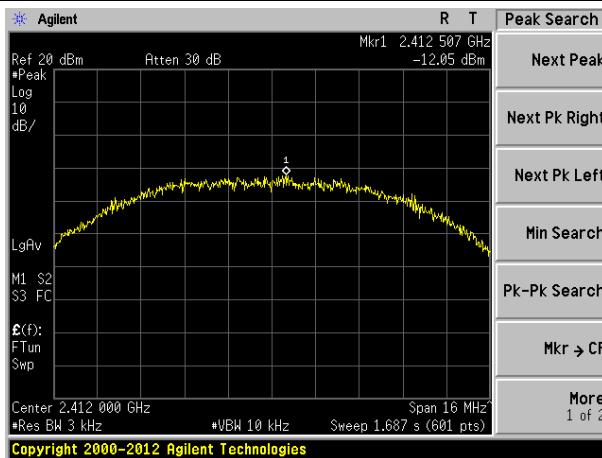

Copyright 2000-2012 Agilent Technologies

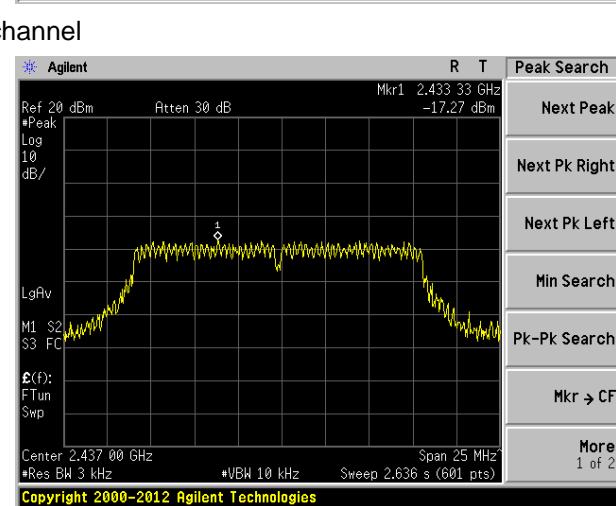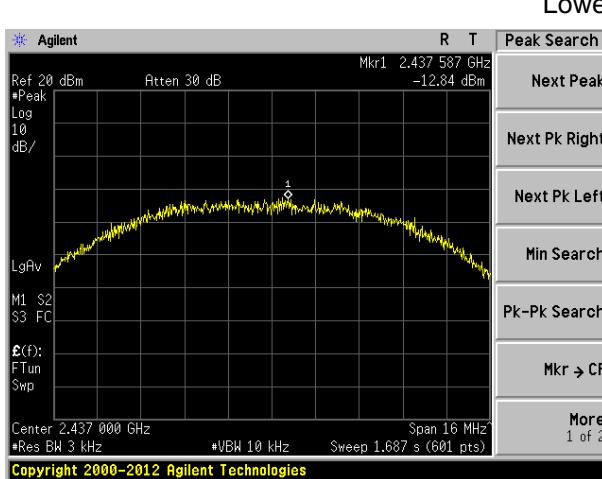


Copyright 2000-2012 Agilent Technologies

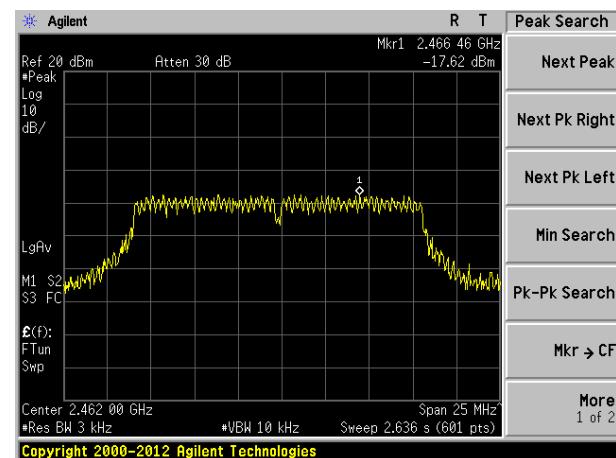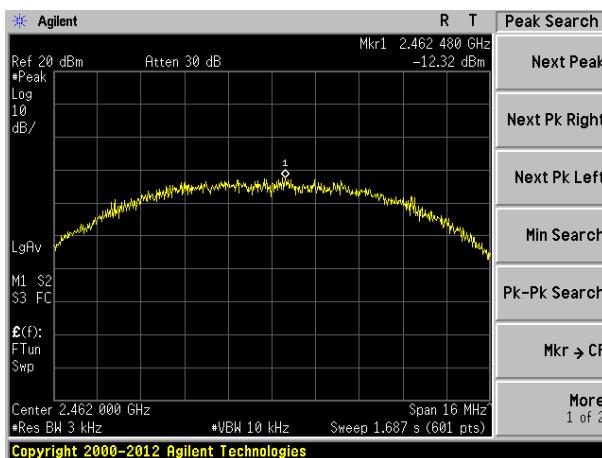Middle channel


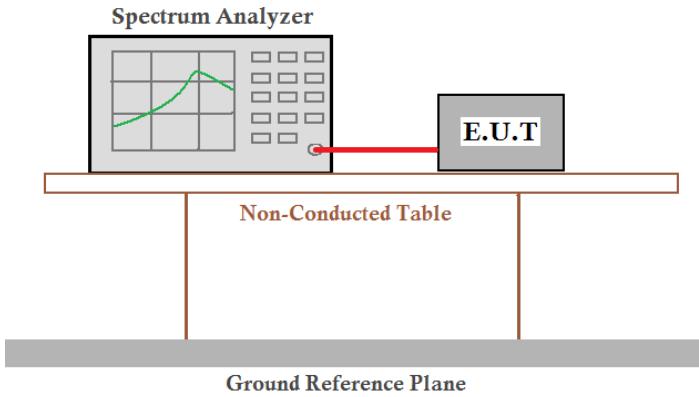
Copyright 2000-2012 Agilent Technologies

Highest channel

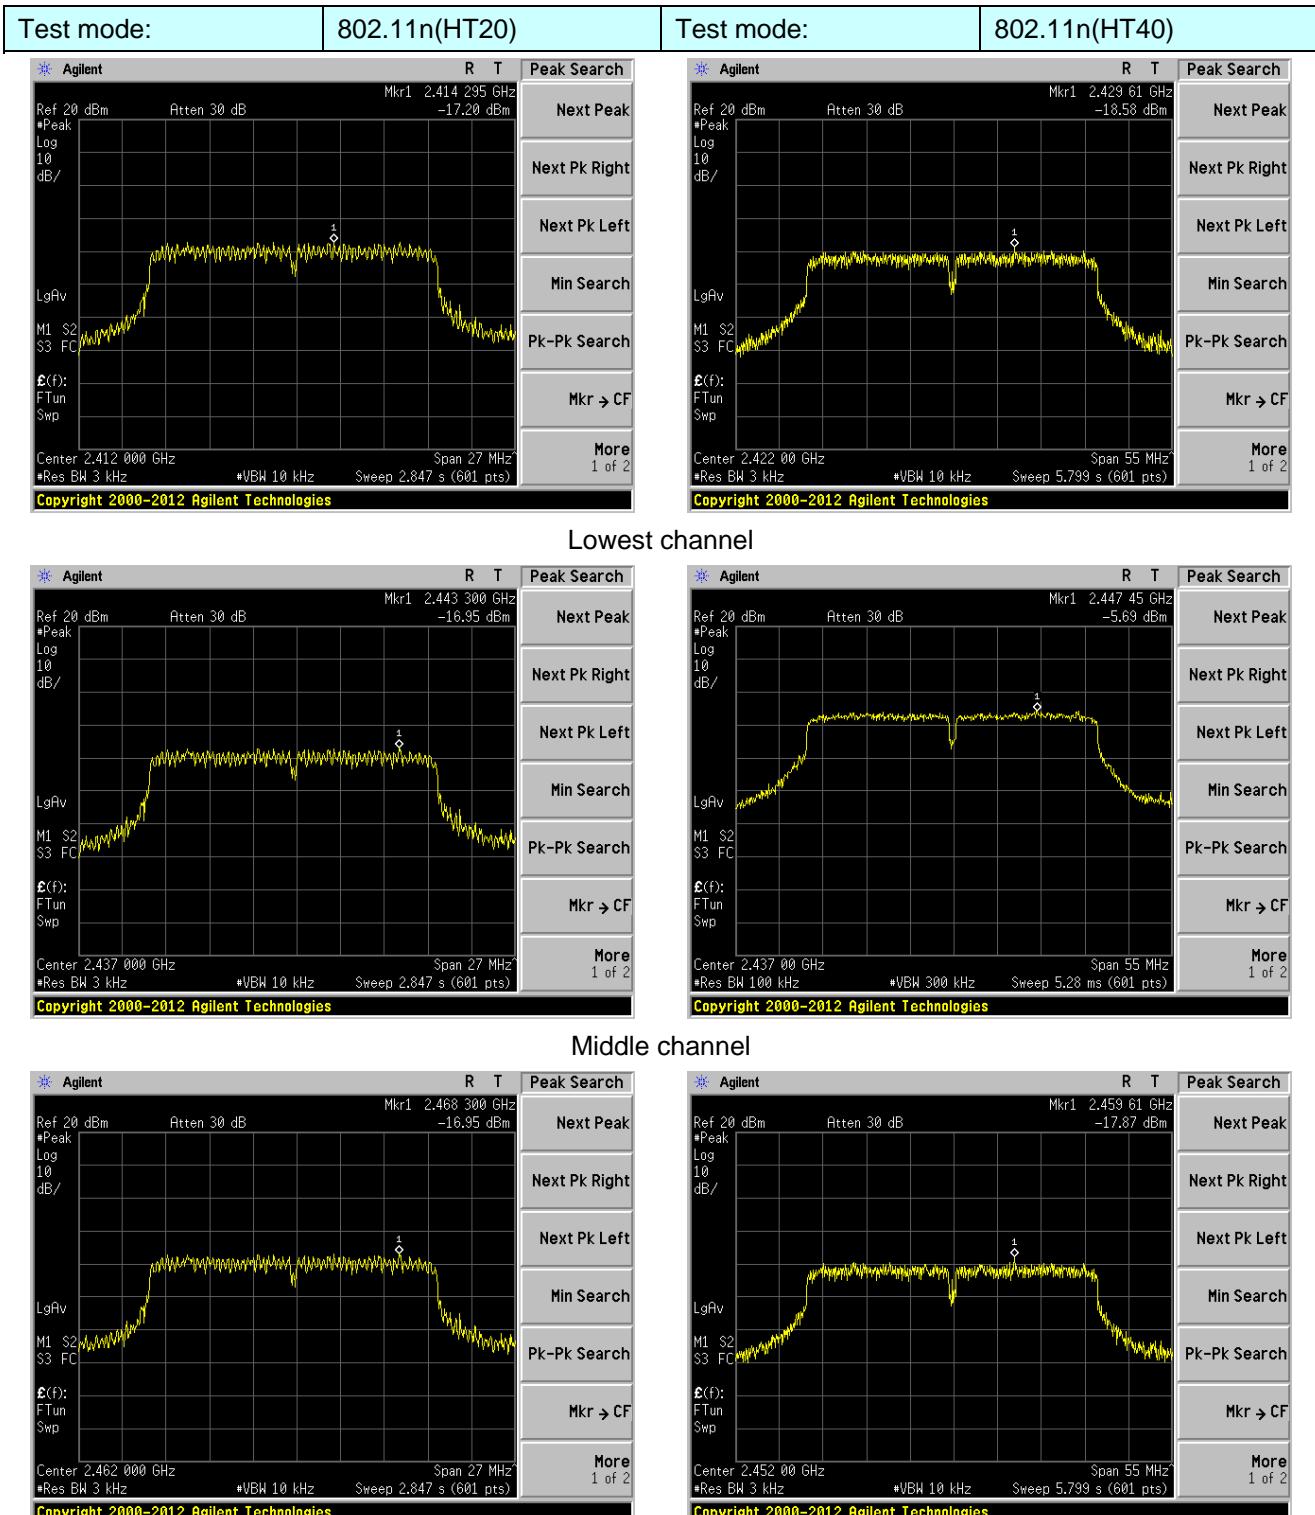

7.5 Spurious Emission in Non-restricted & restricted Bands

7.5.1 Conducted Emission Method



Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-247 Section 5.5
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02 & RSS-Gen
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test plot as follows:

Test mode:

802.11b

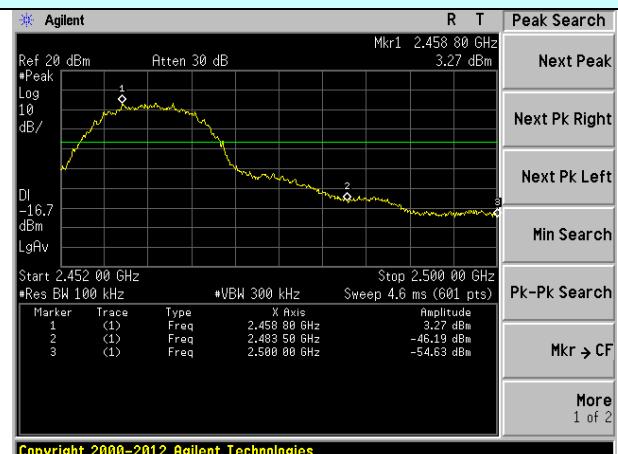
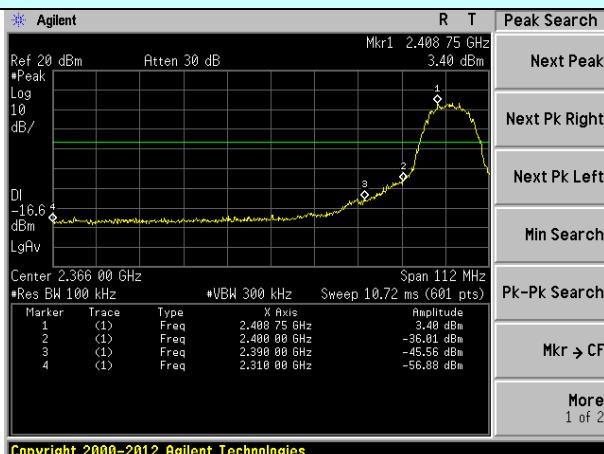


Lowest channel

Highest channel

Test mode:


802.11g

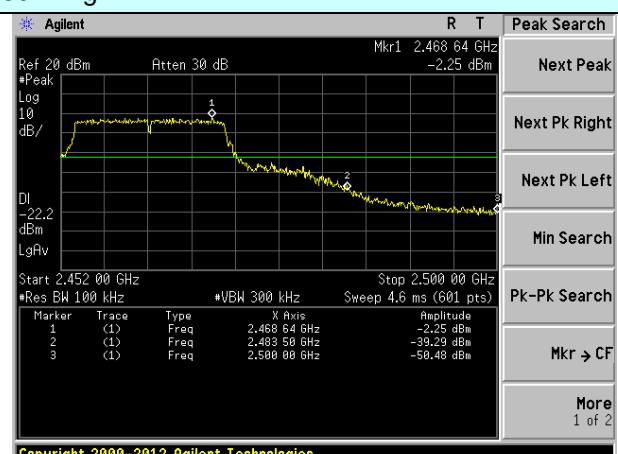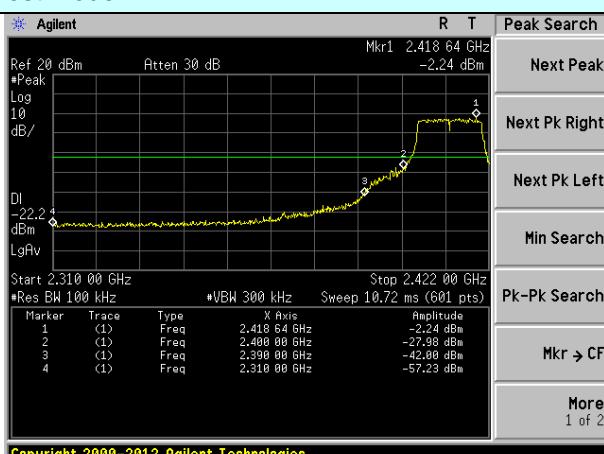

Lowest channel

Highest channel

Test mode:

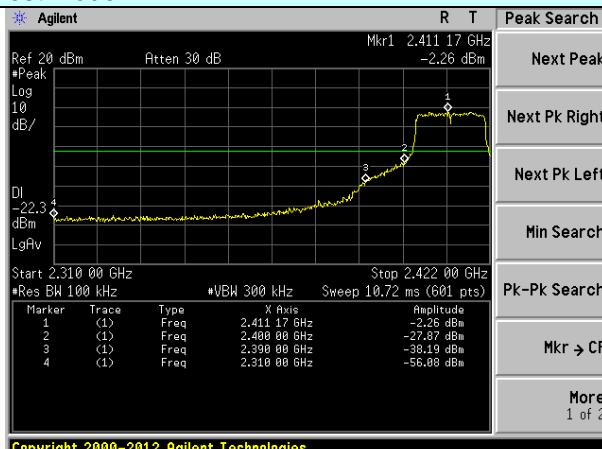


802.11n(HT20)



Lowest channel

Highest channel

Test mode:

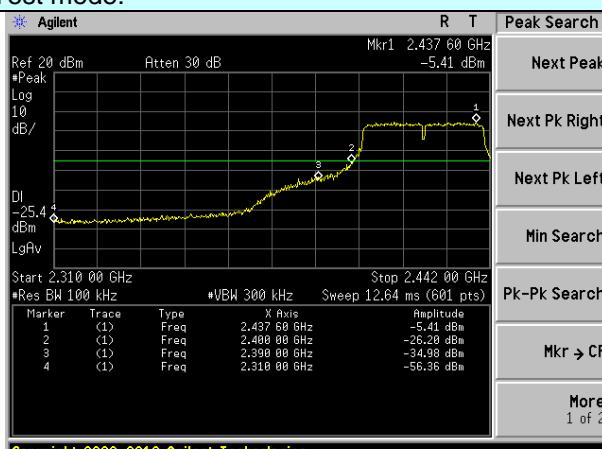

802.11n(HT40)





Lowest channel

Highest channel

Test mode: 802.11b

Test mode: 802.11g



Lowest channel

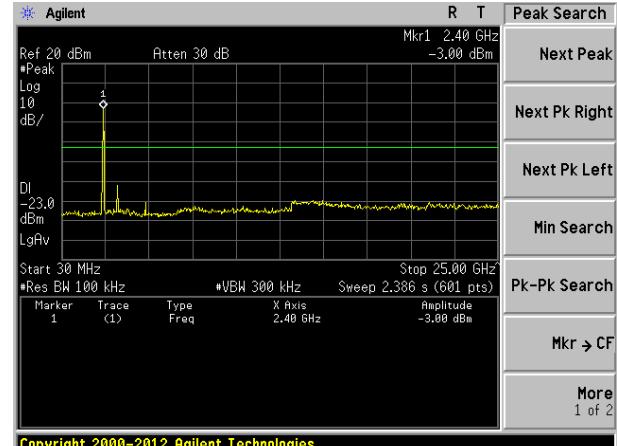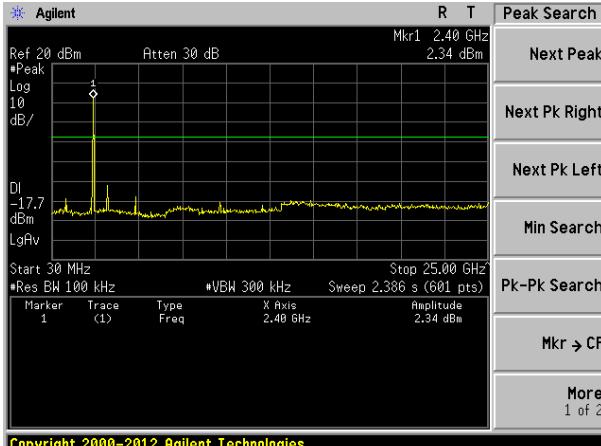

Copyright 2000-2012 Agilent Technologies

30MHz-25GHz



Middle channel

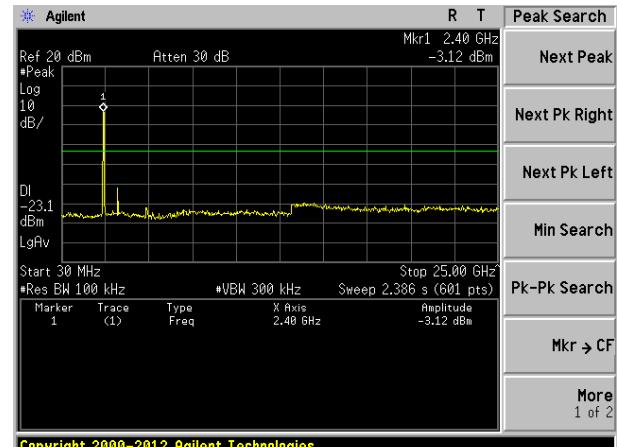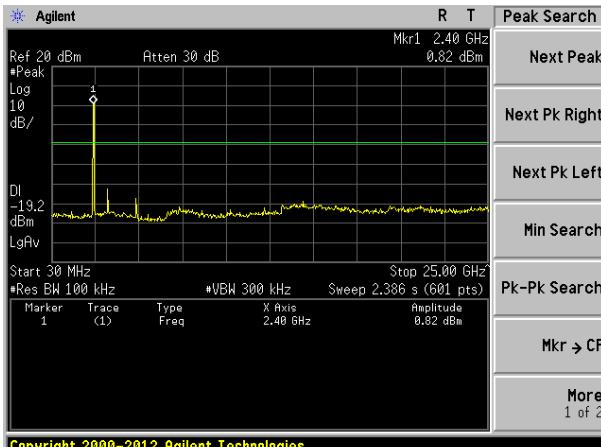

Copyright 2000-2012 Agilent Technologies

30MHz-25GHz

Highest channel

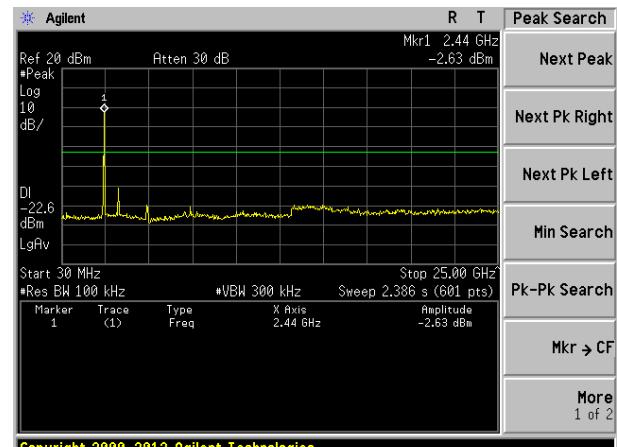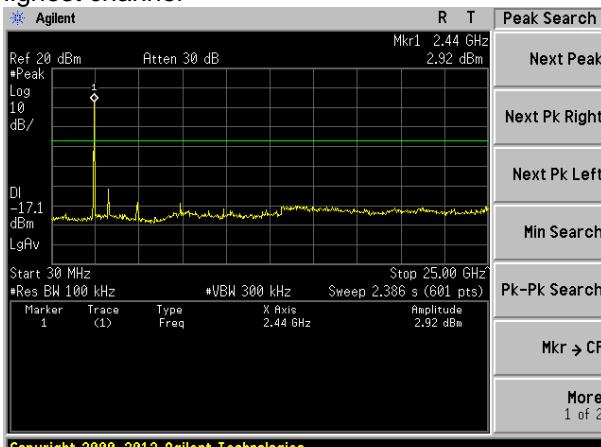


Copyright 2000-2012 Agilent Technologies


30MHz-25GHz

Test mode:	802.11n(HT20)	Test mode:	802.11n(HT40)
------------	---------------	------------	---------------

Lowest channel

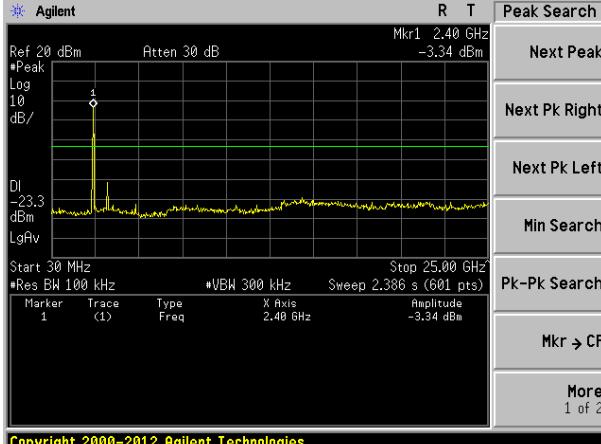


Copyright 2000-2012 Agilent Technologies

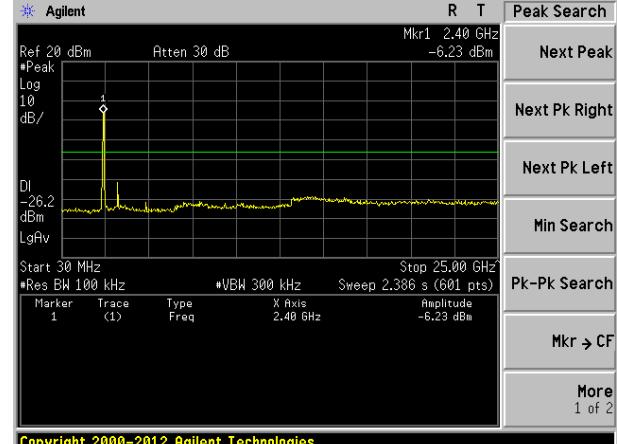


Copyright 2000-2012 Agilent Technologies

30MHz-25GHz

Middle channel

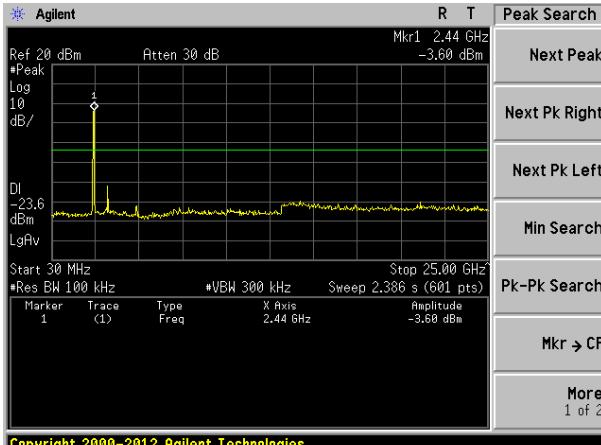


Copyright 2000-2012 Agilent Technologies

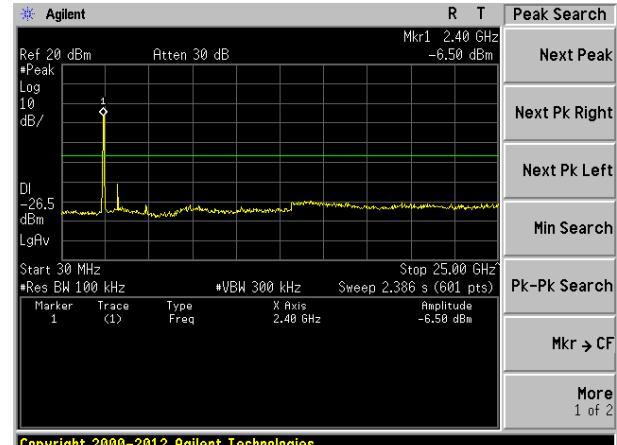


Copyright 2000-2012 Agilent Technologies

30MHz-25GHz

Highest channel

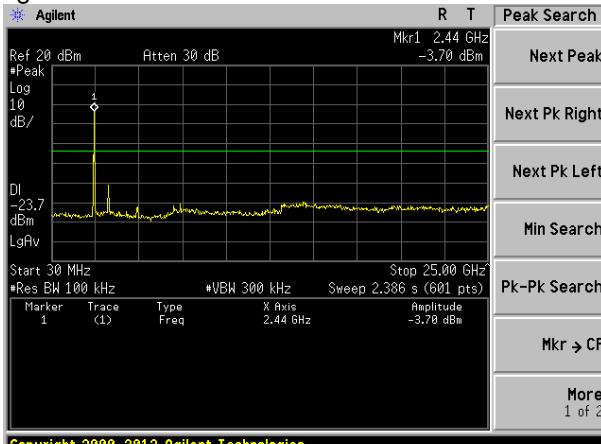

Copyright 2000-2012 Agilent Technologies

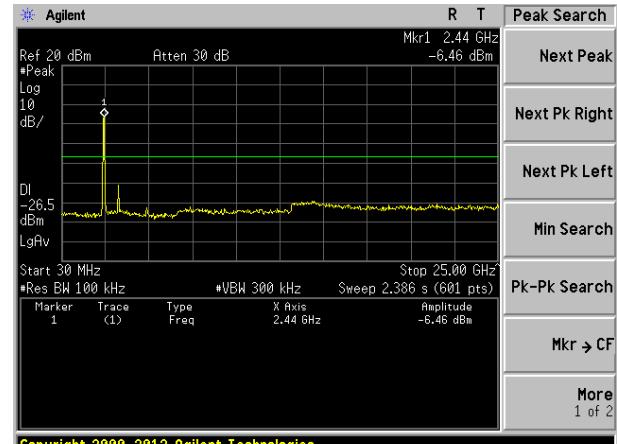

Copyright 2000-2012 Agilent Technologies


30MHz-25GHz

7.5.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209 and 15.205 RSS-247 Section 3.3 & RSS-Gen Section 8.9																											
Test Method:	ANSI C63.10:2013 & RSS-Gen																											
Test Frequency Range:	9kHz to 25GHz																											
Test site:	Measurement Distance: 3m																											
Receiver setup:	Frequency	Detector	RBW	VBW	Value																							
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak																							
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak																							
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																							
	Above 1GHz	Peak	1MHz	3MHz	Peak																							
		Peak	1MHz	10Hz	Average																							
FCC Limit:	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>				Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																										
0.490-1.705	24000/F(kHz)	30																										
1.705-30.0	30	30																										
30-88	100**	3																										
88-216	150**	3																										
216-960	200**	3																										
Above 960	500	3																										
	<p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>																											
IC Limit:	<p>Table 5 – General field strength limits at frequencies above 30 MHz</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (μV/m at 3 m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> <p>Table 6 – General field strength limits at frequencies below 30 MHz</p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Magnetic field strength (H-Field) (μA/m)</th> <th>Measurement distance (m)</th> </tr> </thead> <tbody> <tr> <td>9 - 490 kHz¹</td> <td>6.37/F (F in kHz)</td> <td>300</td> </tr> <tr> <td>490 - 1705 kHz</td> <td>63.7/F (F in kHz)</td> <td>30</td> </tr> <tr> <td>1.705 - 30 MHz</td> <td>0.08</td> <td>30</td> </tr> </tbody> </table> <p>Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.</p>					Frequency (MHz)	Field strength (μ V/m at 3 m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)	9 - 490 kHz ¹	6.37/F (F in kHz)	300	490 - 1705 kHz	63.7/F (F in kHz)	30	1.705 - 30 MHz	0.08	30	
Frequency (MHz)	Field strength (μ V/m at 3 m)																											
30 – 88	100																											
88 – 216	150																											
216 – 960	200																											
Above 960	500																											
Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)																										
9 - 490 kHz ¹	6.37/F (F in kHz)	300																										
490 - 1705 kHz	63.7/F (F in kHz)	30																										
1.705 - 30 MHz	0.08	30																										

Test setup:


For radiated emissions from 9kHz to 30MHz

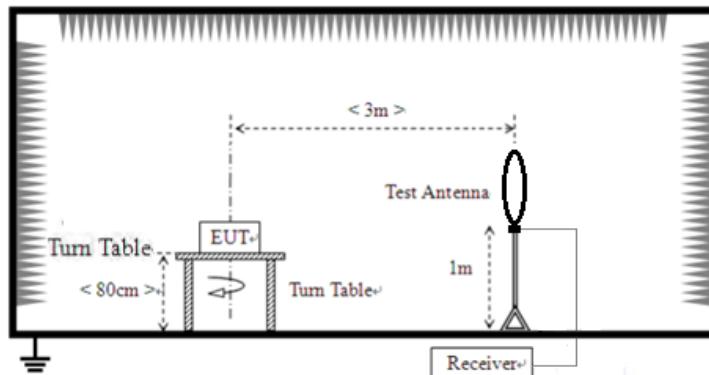

For radiated emissions from 30MHz to 1GHz

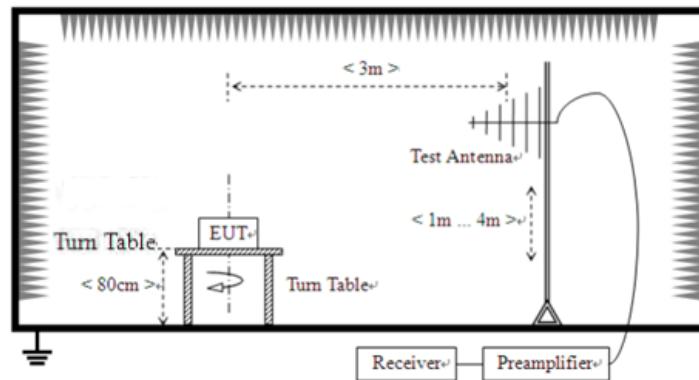

For radiated emissions above 1GHz

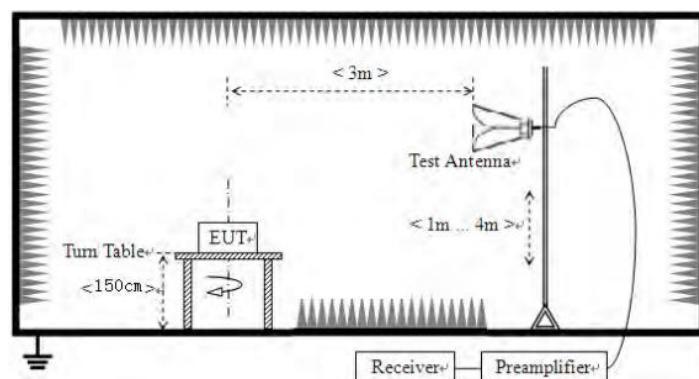

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1012mbar
Test results:	Pass

Measurement data:

Remark:


Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case. Only shown the worst case test data. All modulations have been tested, only worse case 802.11b is reported.

■ **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


■ Below 1GHz

Horizontal:

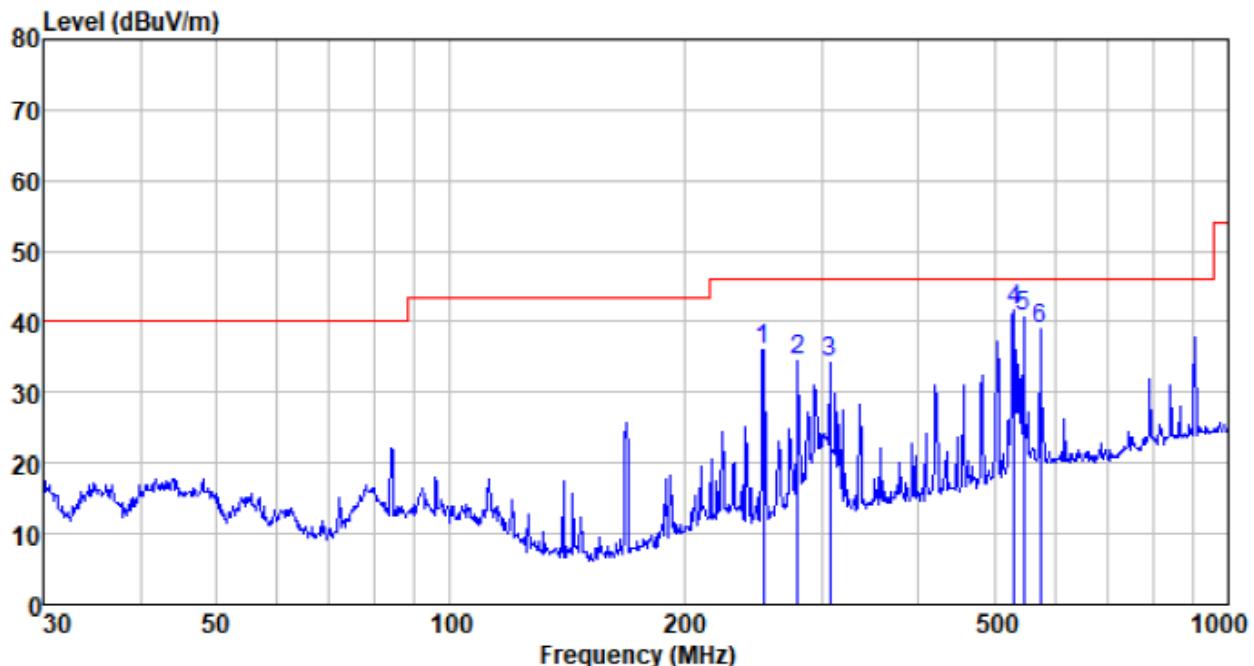

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
252.948	59.13	12.25	2.14	37.38	36.14	46.00	-9.86	QP
280.024	56.62	13.05	2.27	37.40	34.54	46.00	-11.46	QP
307.831	55.45	13.76	2.40	37.43	34.18	46.00	-11.82	QP
530.101	57.56	18.01	3.44	37.52	41.49	46.00	-4.51	QP
545.183	56.52	18.34	3.50	37.52	40.84	46.00	-5.16	QP
572.614	53.83	18.90	3.62	37.53	38.82	46.00	-7.18	QP

Vertical:

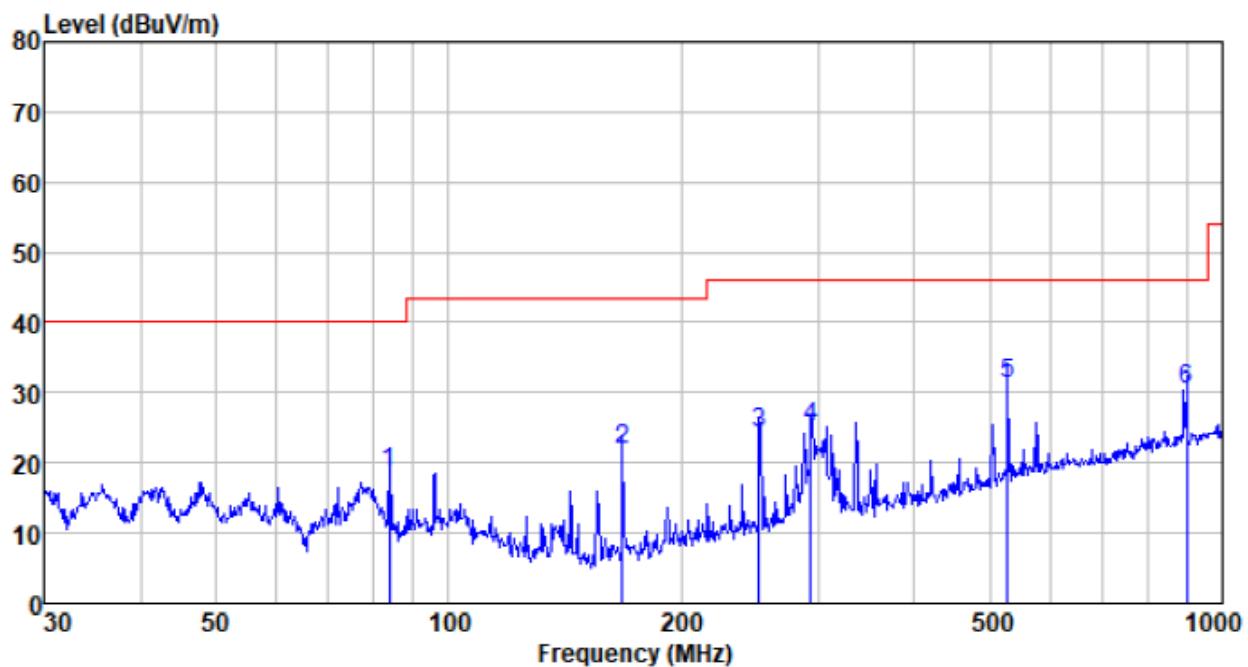


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
83.816	45.39	8.67	1.06	36.58	18.54	40.00	-21.46	QP
167.824	48.94	8.46	1.67	37.18	21.89	43.50	-21.61	QP
252.063	47.24	12.22	2.14	37.38	24.22	46.00	-21.78	QP
294.114	46.61	13.45	2.33	37.42	24.97	46.00	-21.03	QP
528.246	47.47	17.96	3.43	37.52	31.34	46.00	-14.66	QP
900.147	40.96	22.30	4.85	37.60	30.51	46.00	-15.49	QP


- Above 1GHz
- Unwanted Emissions in Restricted Frequency Bands

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Horizontal:

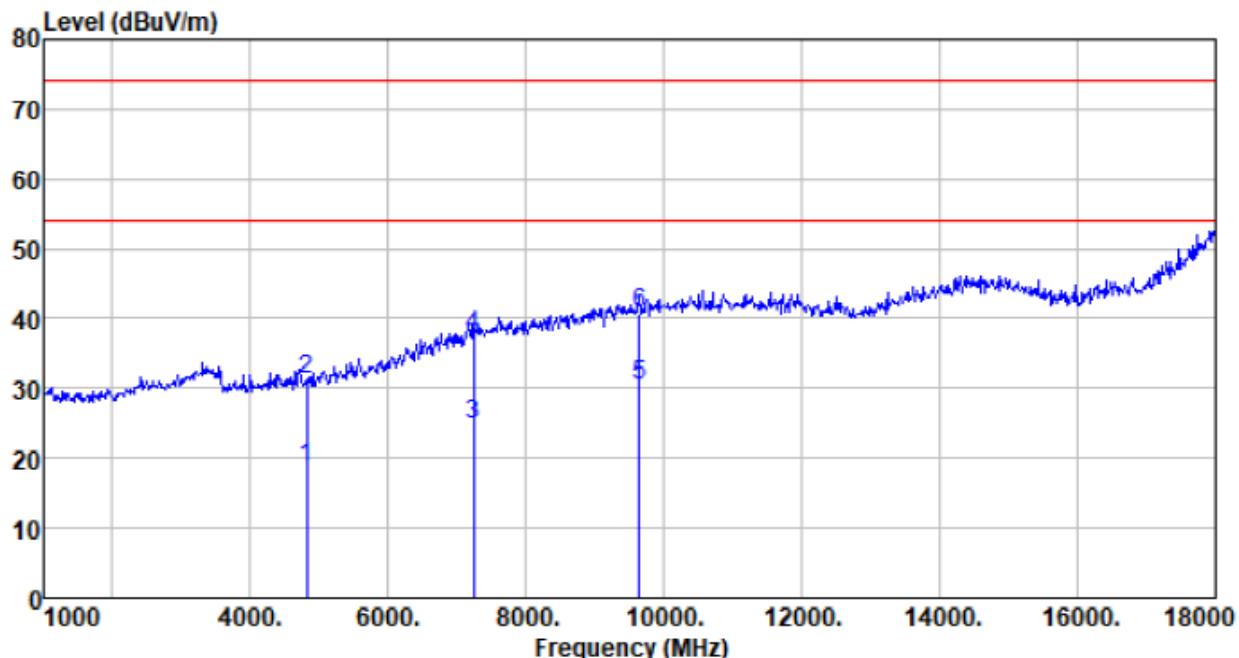

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	20.46	31.22	4.63	37.73	18.58	54.00	-35.42	Average
4824.000	33.14	31.22	4.63	37.73	31.26	74.00	-42.74	Peak
7236.000	17.60	36.25	6.52	35.62	24.75	54.00	-29.25	Average
7236.000	30.35	36.25	6.52	35.62	37.50	74.00	-36.50	Peak
9648.000	19.37	37.97	7.99	34.95	30.38	54.00	-23.62	Average
9648.000	29.71	37.97	7.99	34.95	40.72	74.00	-33.28	Peak

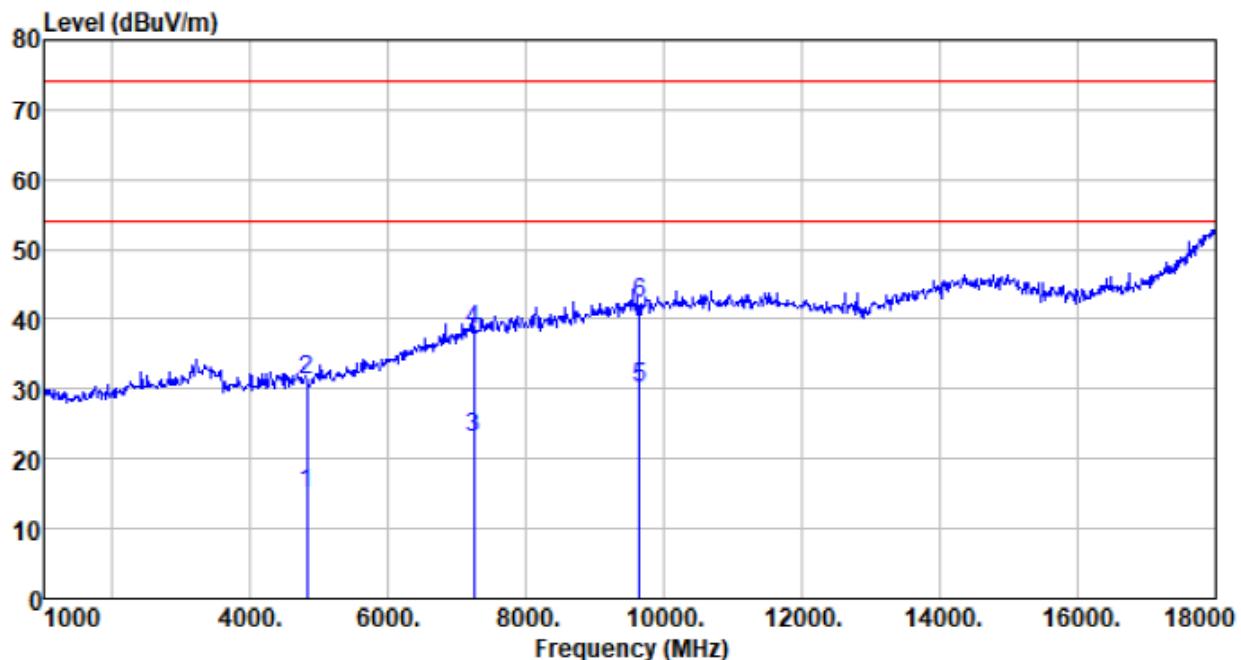
Vertical:


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	17.07	31.22	4.63	37.73	15.19	54.00	-38.81	Average
4824.000	33.22	31.22	4.63	37.73	31.34	74.00	-42.66	Peak
7236.000	15.77	36.25	6.52	35.62	22.92	54.00	-31.08	Average
7236.000	31.12	36.25	6.52	35.62	38.27	74.00	-35.73	Peak
9648.000	19.16	37.97	7.99	34.95	30.17	54.00	-23.83	Average
9648.000	31.21	37.97	7.99	34.95	42.22	74.00	-31.78	Peak


Remark: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Horizontal:

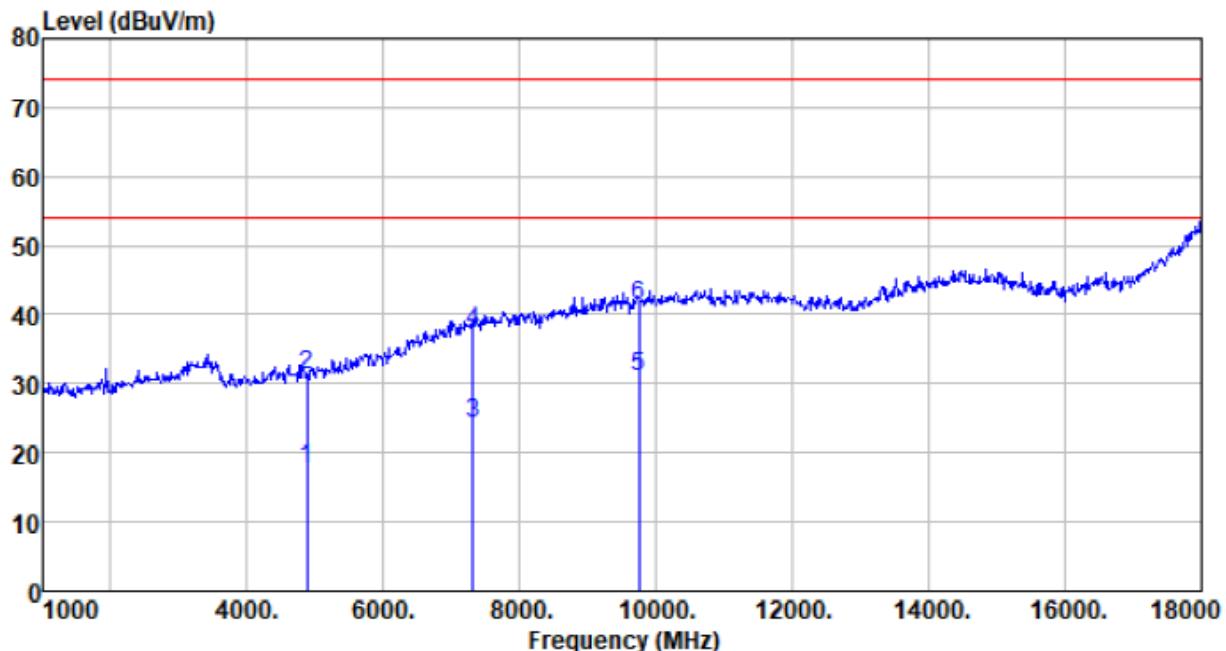

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	19.57	31.31	4.69	37.75	17.82	54.00	-36.18	Average
4874.000	33.15	31.31	4.69	37.75	31.40	74.00	-42.60	Peak
7311.000	16.73	36.39	6.61	35.60	24.13	54.00	-29.87	Average
7311.000	30.10	36.39	6.61	35.60	37.50	74.00	-36.50	Peak
9748.000	19.98	38.10	8.03	35.03	31.08	54.00	-22.92	Average
9748.000	30.29	38.10	8.03	35.03	41.39	74.00	-32.61	Peak

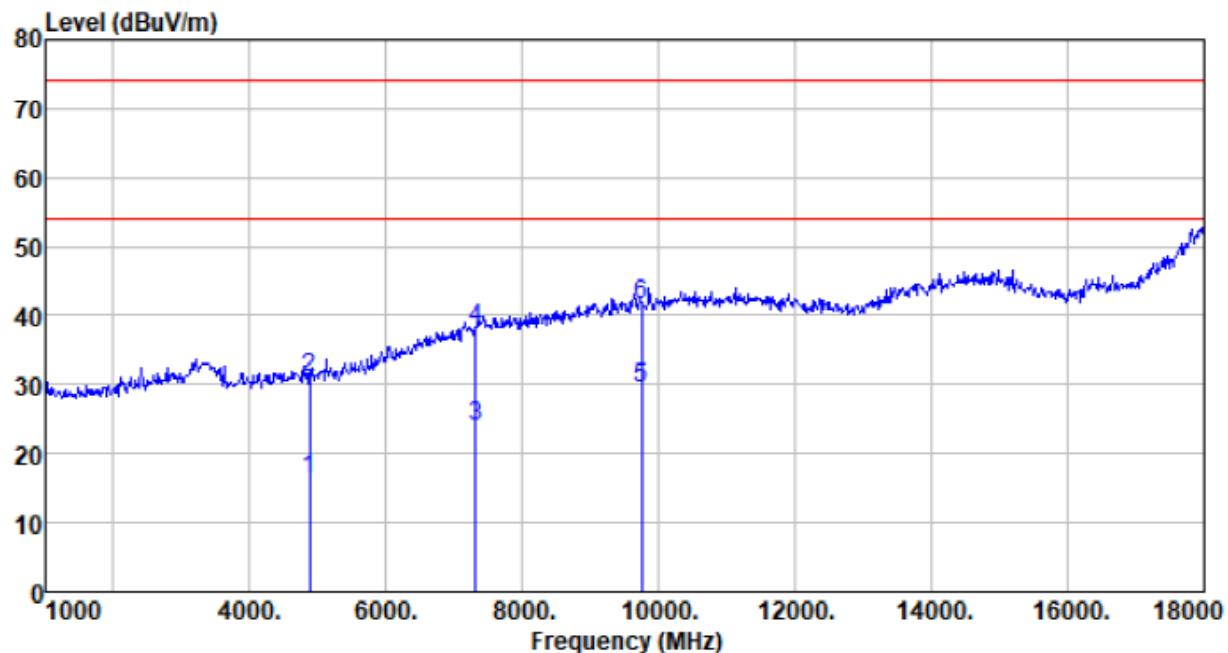
Vertical:


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	18.07	31.31	4.69	37.75	16.32	54.00	-37.68	Average
4874.000	32.67	31.31	4.69	37.75	30.92	74.00	-43.08	Peak
7311.000	16.64	36.39	6.61	35.60	24.04	54.00	-29.96	Average
7311.000	30.75	36.39	6.61	35.60	38.15	74.00	-35.85	Peak
9748.000	18.43	38.10	8.03	35.03	29.53	54.00	-24.47	Average
9748.000	30.65	38.10	8.03	35.03	41.75	74.00	-32.25	Peak


Remark: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Horizontal:

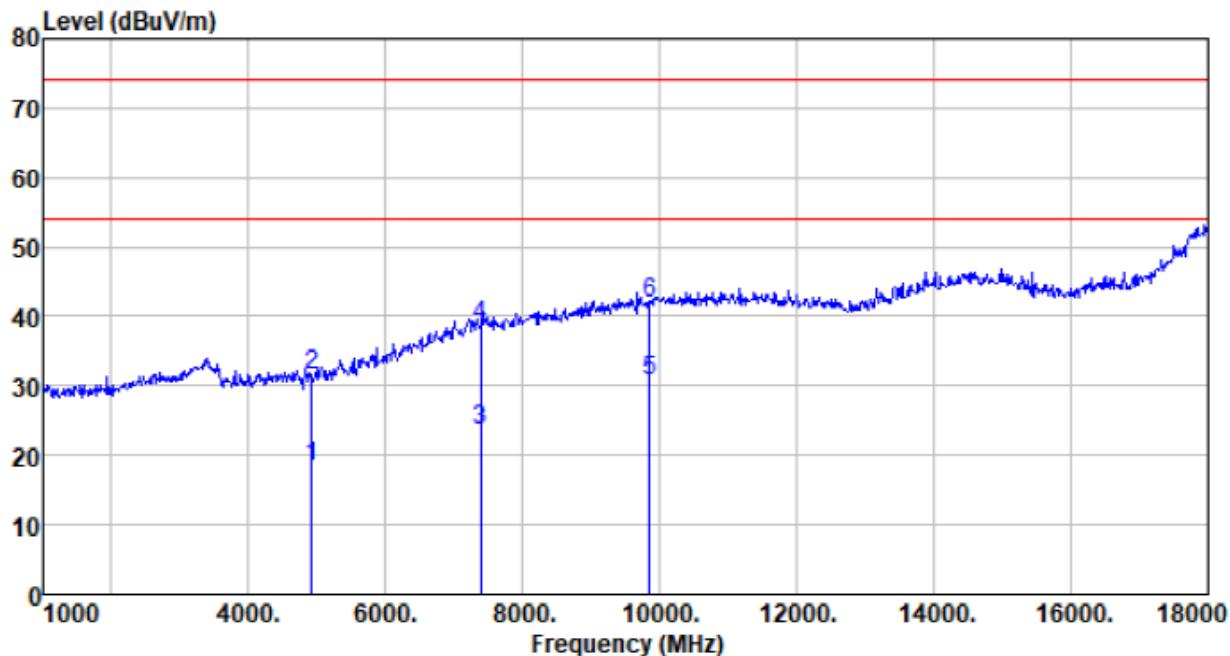

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	20.01	31.39	4.75	37.77	18.38	54.00	-35.62	Average
4924.000	33.36	31.39	4.75	37.77	31.73	74.00	-42.27	Peak
7386.000	16.01	36.57	6.71	35.58	23.71	54.00	-30.29	Average
7386.000	31.03	36.57	6.71	35.58	38.73	74.00	-35.27	Peak
9848.000	19.51	38.20	8.06	35.09	30.68	54.00	-23.32	Average
9848.000	30.67	38.20	8.06	35.09	41.84	74.00	-32.16	Peak

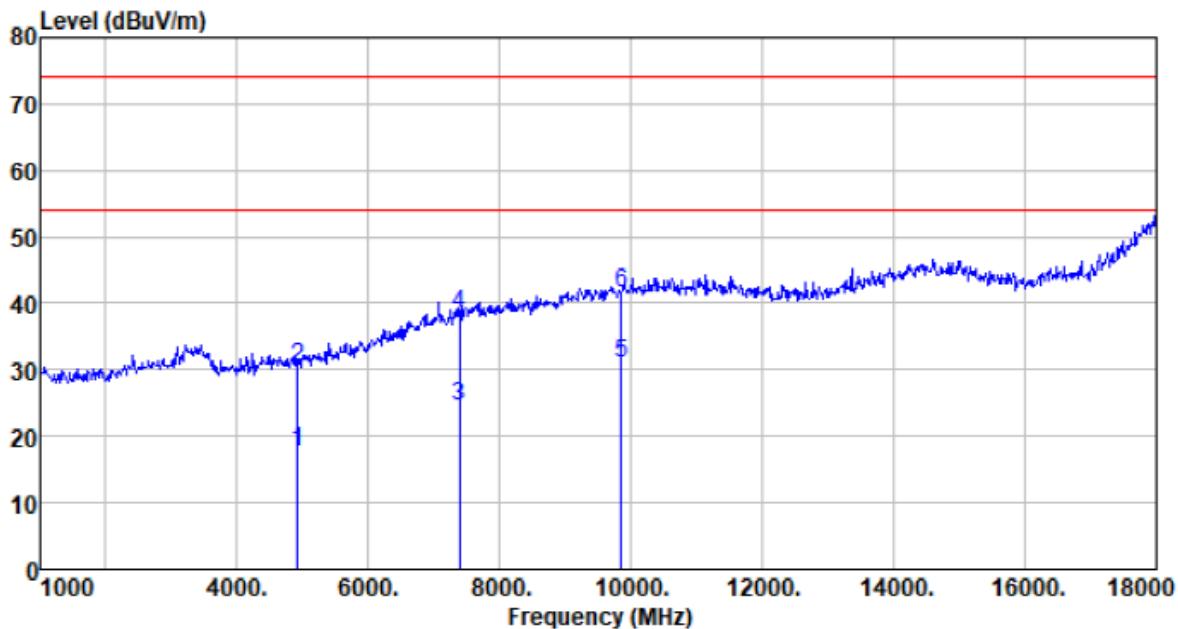Vertical:


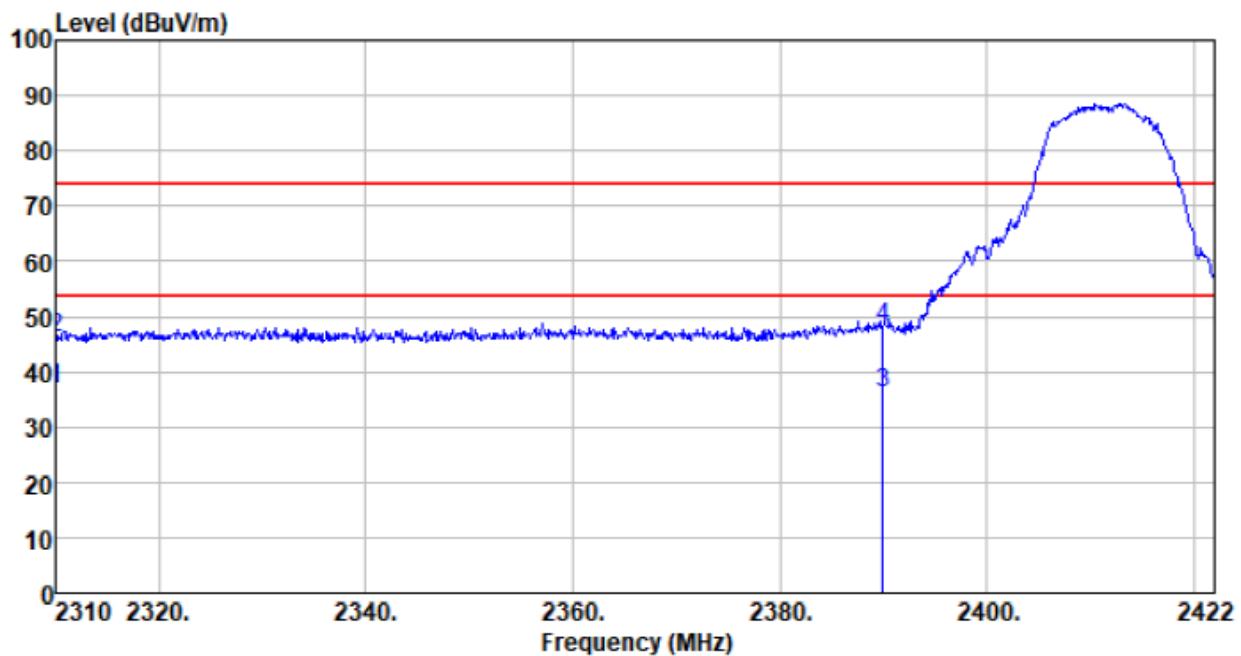
Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	19.22	31.39	4.75	37.77	17.59	54.00	-36.41	Average
4924.000	31.89	31.39	4.75	37.77	30.26	74.00	-43.74	Peak
7386.000	16.90	36.57	6.71	35.58	24.60	54.00	-29.40	Average
7386.000	30.72	36.57	6.71	35.58	38.42	74.00	-35.58	Peak
9848.000	19.73	38.20	8.06	35.09	30.90	54.00	-23.10	Average
9848.000	30.36	38.20	8.06	35.09	41.53	74.00	-32.47	Peak

Remark: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

■ Unwanted Emissions in Non-restricted Frequency Bands


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Horizontal:



Freq MHz	Reading level dB _{UV}	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dB _{UV} /m	Limit level dB _{UV} /m	Over limit dB	Remark
2310.000	35.05	27.14	5.30	30.43	37.06	54.00	-16.94	Average
2310.000	44.26	27.14	5.30	30.43	46.27	74.00	-27.73	Peak
2390.000	33.75	27.37	5.38	30.24	36.26	54.00	-17.74	Average
2390.000	45.64	27.37	5.38	30.24	48.15	74.00	-25.85	Peak


Vertical:

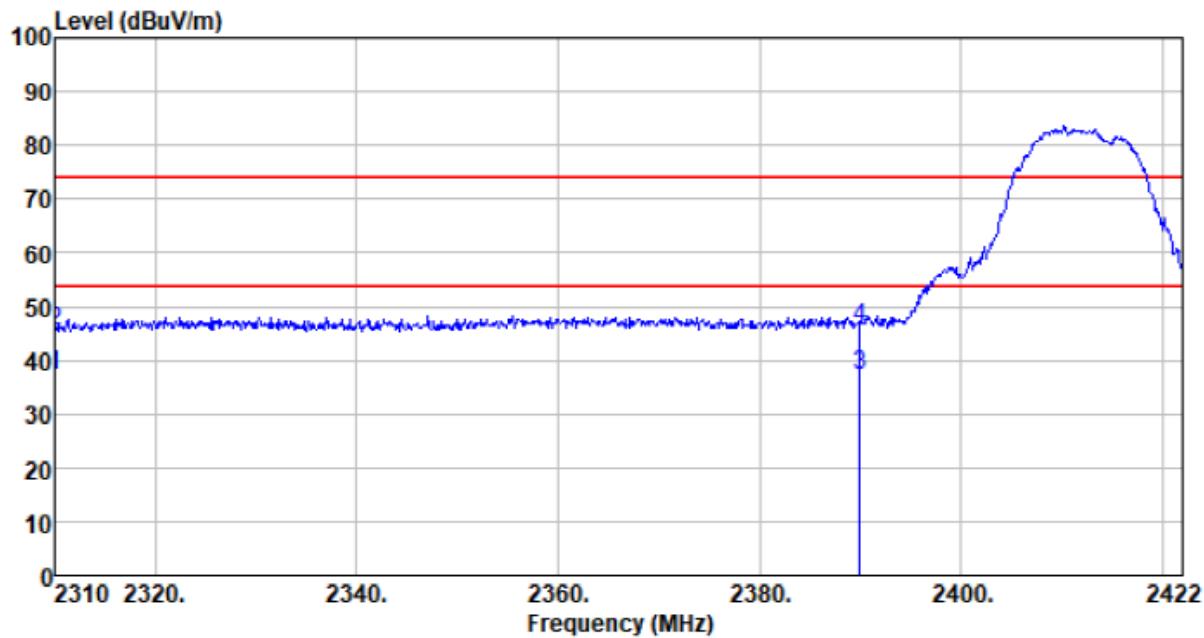

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	35.34	27.14	5.30	30.43	37.35	54.00	-16.65	Average
2310.000	43.44	27.14	5.30	30.43	45.45	74.00	-28.55	Peak
2390.000	34.71	27.37	5.38	30.24	37.22	54.00	-16.78	Average
2390.000	43.68	27.37	5.38	30.24	46.19	74.00	-27.81	Peak


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Horizontal:

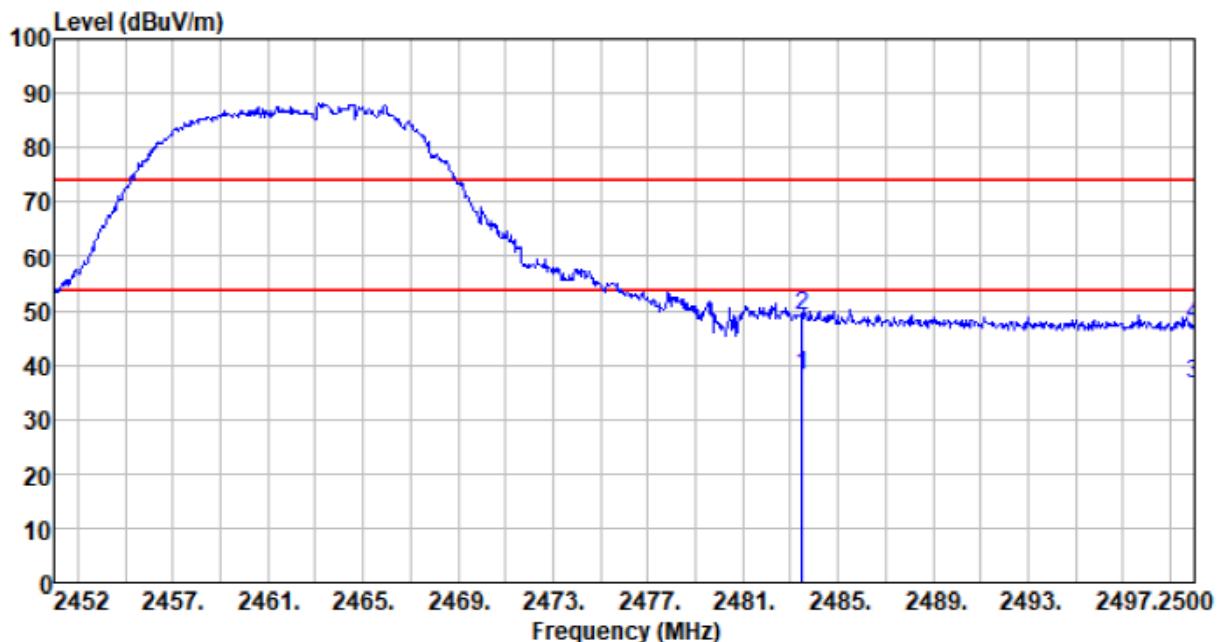

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	34.88	27.66	5.47	30.12	37.89	54.00	-16.11	Average
2483.500	46.04	27.66	5.47	30.12	49.05	74.00	-24.95	Peak
2500.000	33.51	27.70	5.49	30.13	36.57	54.00	-17.43	Average
2500.000	44.30	27.70	5.49	30.13	47.36	74.00	-26.64	Peak

Vertical:

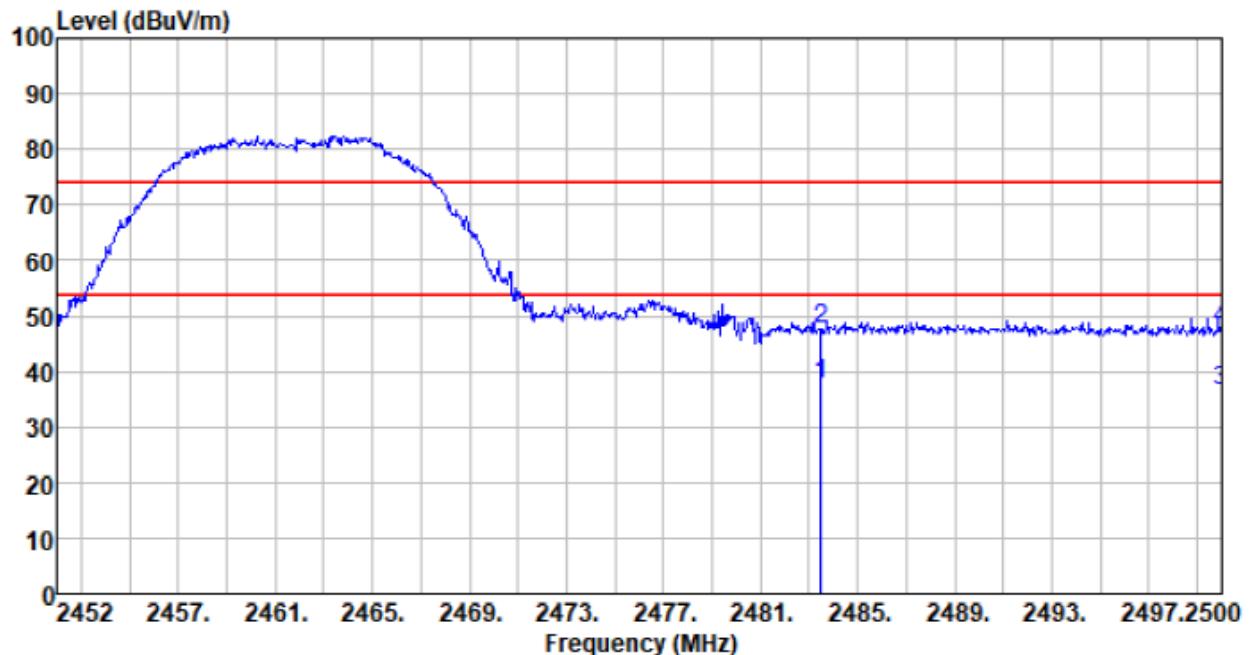


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	34.61	27.66	5.47	30.12	37.62	54.00	-16.38	Average
2483.500	44.77	27.66	5.47	30.12	47.78	74.00	-26.22	Peak
2500.000	33.43	27.70	5.49	30.13	36.49	54.00	-17.51	Average
2500.000	44.52	27.70	5.49	30.13	47.58	74.00	-26.42	Peak

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.6 Frequency stability

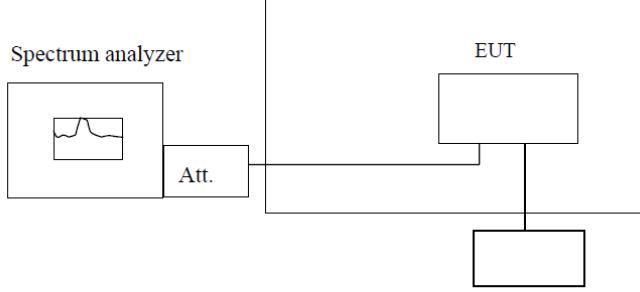Test Requirement:	RSS-Gen Section 6.11& Section 8.11
Test Method:	ANSI C63.10: 2013 & RSS-Gen
Limit:	Manufactures of devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.10, 2013; tested to 2.1055 for compliance to RSS-Gen requirements.
Test setup:	<p style="text-align: center;">Temperature Chamber</p>  <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:

Frequency stability versus Temp.						
Power Supply: DC 6V						
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute	Pass /Fail
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	
-30	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
-20	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
-10	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
0	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
10	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
20	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
30	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
40	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass
50	2412	2412.30	2412.30	2412.10	2412.05	Pass
	2437	2437.93	2437.68	2437.09	2437.89	Pass
	2452	2452.26	2452.42	2452.29	2452.17	Pass
	2462	2462.80	2462.07	2462.95	2462.48	Pass

Frequency stability versus Voltage						
Temperature: 25°C						
Power Supply (VDC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute	Pass /Fail
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	
5.4	2412	2412.97	2412.89	2412.10	2412.82	Pass
	2437	2437.64	2437.25	2437.97	2437.76	Pass
	2452	2452.15	2452.66	2452.63	2452.82	Pass
	2462	2462.51	2462.48	2462.72	2462.41	Pass
6.6	2412	2412.93	2412.48	2412.01	2412.53	Pass
	2437	2437.36	2437.89	2437.78	2437.60	Pass
	2452	2452.99	2452.22	2452.05	2452.88	Pass
	2462	2462.55	2462.45	2462.35	2462.46	Pass

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----