



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20250501165E-02

Applicant: SHENZHEN XINWU TECHNOLOGY LIMITED

Address of Applicant: Floor 6, Building 2, Chungu Science park, Meisheng Huigu Science Park, 83 Dabao Road, Baoan District, Shenzhen

Equipment Under Test (EUT):

Product: Battery IP Camera

Model No.: P1, P2, P3, P4, P5, P6, P7, P8, P9, P10, P11, P12, P13, P14, P15, P16, P17, P18, P19, P20, P11L

Test Model No.: P11

Brand Name: N/A

FCC ID: 2AW97-P11

Standards: 47 CFR Part 15, Subpart C

KDB558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10:2013

Date of Receipt: 2025-05-26

Date of Test: 2025-05-26 to 2025-07-21

Date of Issue: 2025-07-23

Test Result : **PASS***

***In the configuration tested, the EUT complied with the standards specified above**

Tested By:

lewis zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)





Shenzhen Huaxia Testing Technology Co., Ltd.

Report No.: CQASZ20250501165E-02

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250501165E-02	Rev.01	Initial report	2025-07-23

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
.....	5
4 GENERAL INFORMATION.....	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF EUT	6
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
4.4 TEST ENVIRONMENT AND MODE	9
4.5 DESCRIPTION OF SUPPORT UNITS.....	12
4.6 TEST LOCATION.....	12
4.7 TEST FACILITY	12
4.8 TEST CONFIGURATION	13
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY	14
4.10 DEVIATION FROM STANDARDS	14
4.11 ABNORMALITIES FROM STANDARD CONDITIONS	14
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	14
4.13 EQUIPMENT LIST	15
5 TEST RESULTS AND MEASUREMENT DATA.....	16
5.1 ANTENNA REQUIREMENT	16
5.2 CONDUCTED EMISSIONS	17
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER.....	21
<i>Test Result</i>	22
<i>Note: Duty cycle correction factor details please see section 4.4.</i>	22
<i>When Duty cycle >98%, D.C.F is not required.</i>	22
<i>Test Graphs</i>	23
5.4 99% OCCUPIED BANDWIDTH.....	27
<i>Test Result</i>	28
<i>Test Graphs</i>	29
5.5 6dB OCCUPIED BANDWIDTH.....	33
<i>Test Result</i>	34
<i>Test Graphs</i>	35
5.6 POWER SPECTRAL DENSITY.....	39
<i>Test Result</i>	40
<i>Test Graphs</i>	41
5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS	45
<i>Test Result</i>	46
5.7.1 <i>Test Graphs</i>	47
5.8 RF CONDUCTED SPURIOUS EMISSIONS	50
<i>Test Result</i>	51
<i>Test Graphs</i>	52
5.9 RADIATED SPURIOUS EMISSIONS	63
5.9.1 <i>Radiated emission below 1GHz</i>	66
5.9.2 <i>Transmitter emission above 1GHz</i>	68
5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	74
6 PHOTOGRAPHS - EUT TEST SETUP.....	79
6.1 RADIATED SPURIOUS EMISSION	79

6.2 CONDUCTED EMISSION	80
6.3 RF CONDUCTED MEASUREMENT	81
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	82

4 General Information

4.1 Client Information

Applicant:	SHENZHEN XINWU TECHNOLOGY LIMITED
Address of Applicant:	Floor 6, Building 2, Chungu Science park, Meisheng Huigu Science Park, 83 Dabao Road, Baoan District, Shenzhen
Manufacturer:	SHENZHEN XINWU TECHNOLOGY LIMITED
Address of Manufacturer:	Floor 6, Building 2, Chungu Science park, Meisheng Huigu Science Park, 83 Dabao Road, Baoan District, Shenzhen
Factory:	SHENZHEN XINWU TECHNOLOGY LIMITED
Address of Factory:	Floor 6, Building 2, Chungu Science park, Meisheng Huigu Science Park, 83 Dabao Road, Baoan District, Shenzhen

4.2 General Description of EUT

Product Name:	Battery IP Camera
Model No.:	P1, P2, P3, P4, P5, P6, P7, P8, P9, P10, P11, P12, P13, P14, P15, P16, P17, P18, P19, P20, P11L
Test Model No.:	P11
Trade Mark:	N/A
Software Version:	XW210-WIFI-P11-P0_V1.2
Hardware Version:	XW210-WIFI-P11-P0_V1.1/XW210-WIFI-P11-P1_V1.1
Power Supply:	Li-ion battery DC 3.7V 150mAh, Charge by DC 5V for adapter
EUT Supports Radios application:	BLE: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz;
Simultaneous Transmission	<input type="checkbox"/> Simultaneous TX is supported and evaluated in this report. <input checked="" type="checkbox"/> Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	Beken WI-FI Test Tool
Antenna Type:	PCB antenna



Shenzhen Huaxia Testing Technology Co., Ltd.

Report No.: CQASZ20250501165E-02

Antenna Gain:	1.93dBi
---------------	---------

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:


For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.


4.4 Test Environment and Mode

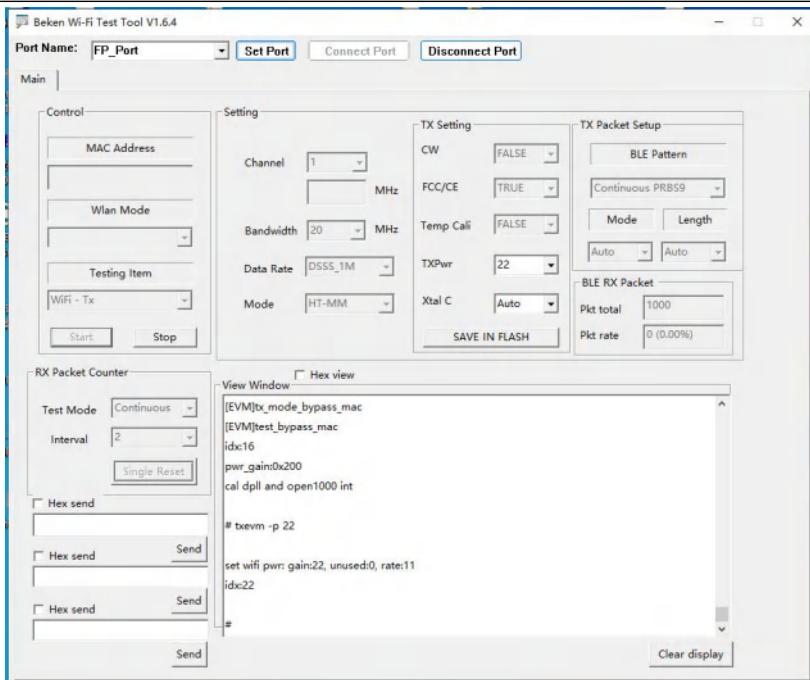Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class22
Run Software:	
	


Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	8.36	8.44	99.05	/
IEEE802.11g	5.45	5.51	98.91	/
IEEE802.11n (HT20)	5.05	5.11	98.83	/

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

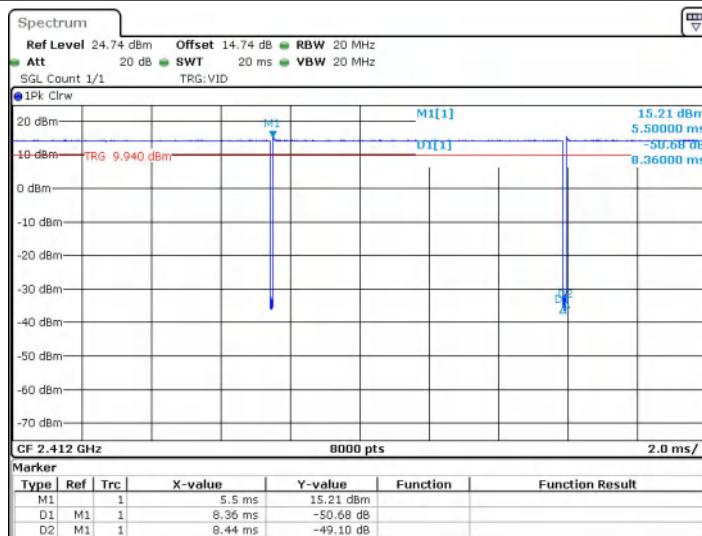Test Graph_IEEE802.11b Duty Cycle:


Date: 29 MAY 2025 12:54:56

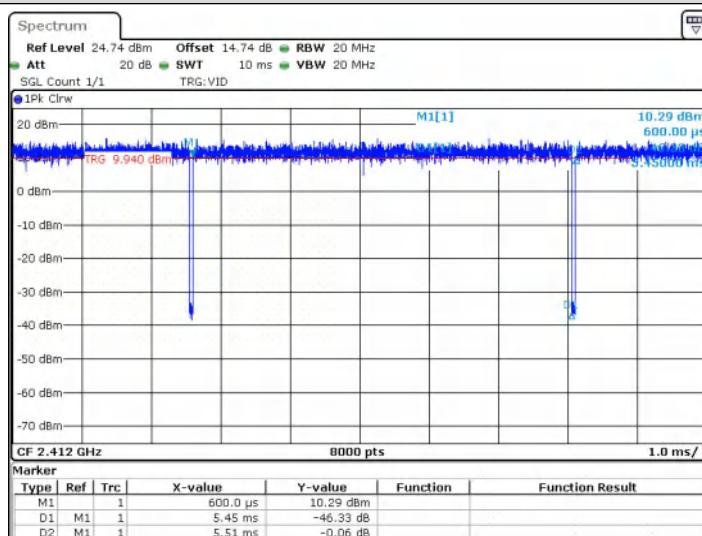Test Graph_IEEE802.11g Duty Cycle:


Date: 29 MAY 2025 13:01:39

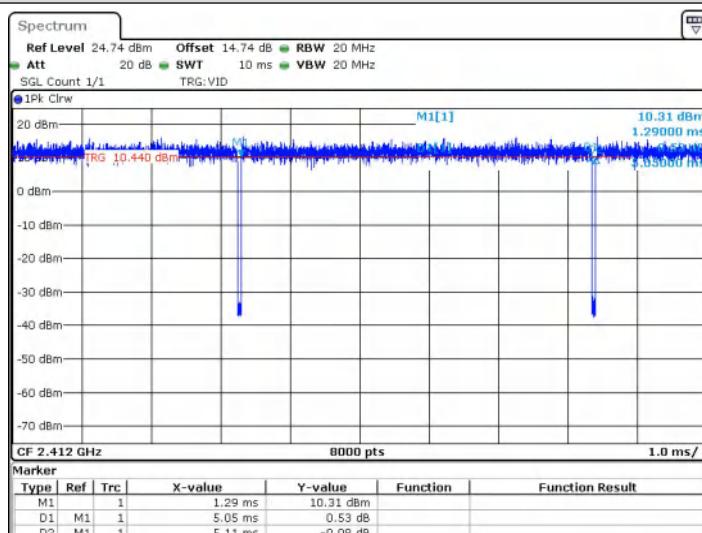Test Graph_IEEE802.11 n (HT20) Duty Cycle:


Date: 29 MAY 2025 14:58:27

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	MI	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:


• A2LA (Certificate No. 4742.01)

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

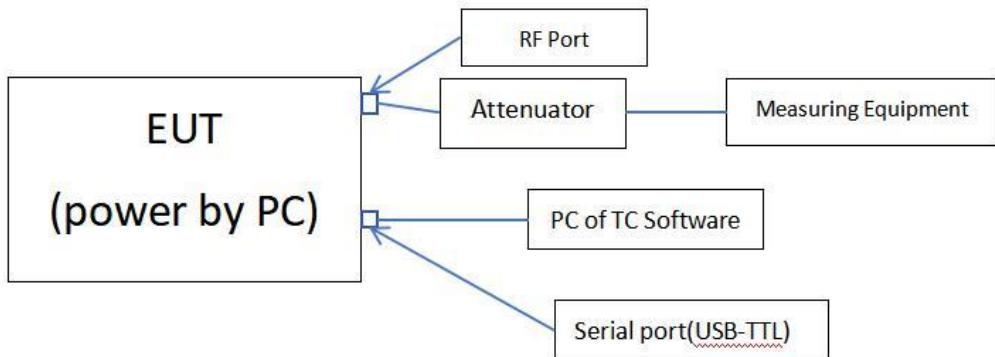

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Power meter	R&S	NRVD	CQA-029	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2	2025/9/1

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:	The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
EUT Antenna:	
<p>The antenna is PCB antenna.</p> <p>The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment</p> <p>This is either permanently attachment or a unique coupling that satisfies the requirement.</p>	


5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	150kHz to 30MHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
	* Decreases with the logarithm of the frequency.														
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Setup:															

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

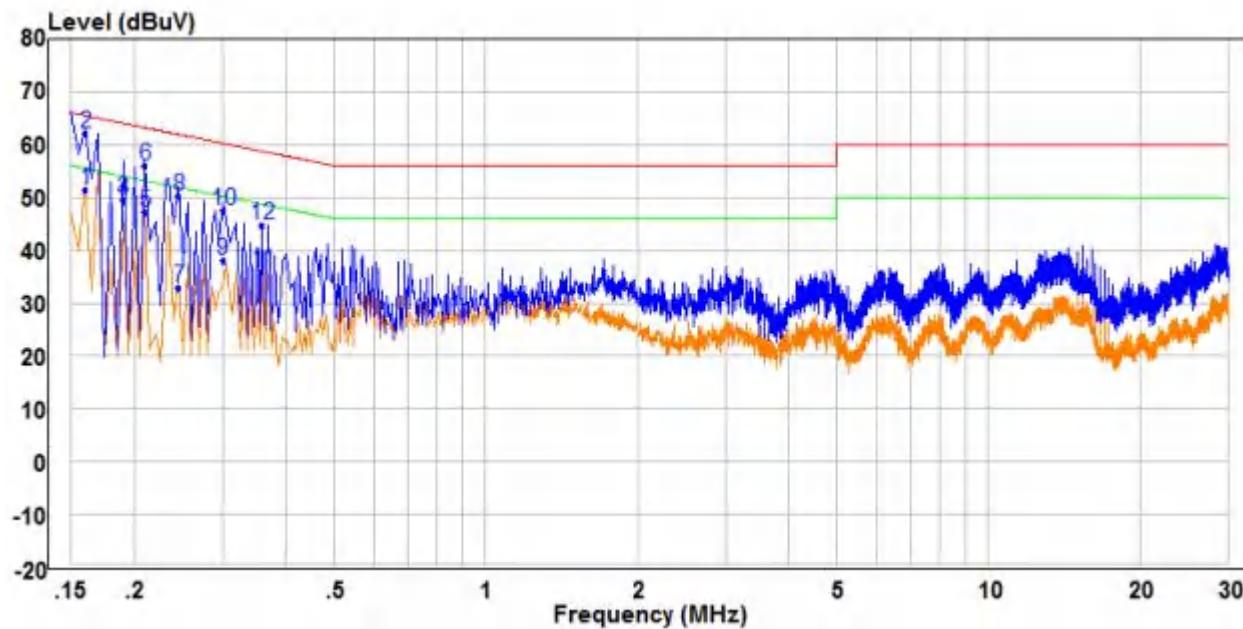


Freq	Read		Limit		Over		Pol/Phase
	Freq	Level	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dBuV	dBuV	dB	
1 AV	0.160	41.81	9.68	51.49	55.46	-3.97	Average Line
2 PP	0.160	52.37	9.68	62.05	65.46	-3.41	QP Line
3	0.190	39.93	9.63	49.56	54.04	-4.48	Average Line
4	0.190	39.69	9.63	49.32	64.04	-14.72	QP Line
5	0.210	37.49	9.60	47.09	53.21	-6.12	Average Line
6	0.210	46.38	9.60	55.98	63.21	-7.23	QP Line
7	0.245	23.22	9.55	32.77	51.92	-19.15	Average Line
8	0.245	40.66	9.55	50.21	61.92	-11.71	QP Line
9	0.300	28.60	9.49	38.09	50.24	-12.15	Average Line
10	0.300	38.02	9.49	47.51	60.24	-12.73	QP Line
11	0.360	26.48	9.56	36.04	48.73	-12.69	Average Line
12	0.360	35.23	9.56	44.79	58.73	-13.94	QP Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

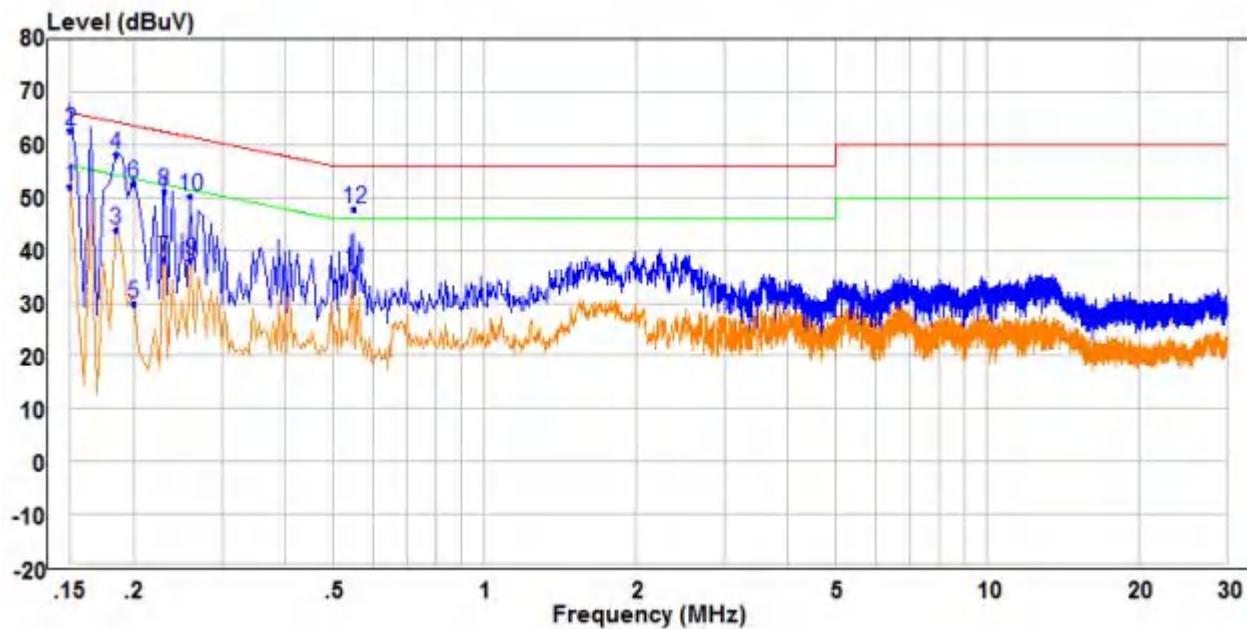


Freq	Read		Limit Level	Line	Over Limit	Remark	Pol/Phase
	Freq	Level					
	MHz	dBuV	dB	dBuV	dB		
1 AV	0.150	42.40	9.70	52.10	56.00	-3.90 Average	Neutral
2 PP	0.150	53.11	9.70	62.81	66.00	-3.19 QP	Neutral
3	0.185	34.32	9.63	43.95	54.26	-10.31 Average	Neutral
4	0.185	48.52	9.63	58.15	64.26	-6.11 QP	Neutral
5	0.200	20.26	9.61	29.87	53.61	-23.74 Average	Neutral
6	0.200	42.97	9.61	52.58	63.61	-11.03 QP	Neutral
7	0.230	28.88	9.56	38.44	52.45	-14.01 Average	Neutral
8	0.230	41.70	9.56	51.26	62.45	-11.19 QP	Neutral
9	0.260	28.44	9.53	37.97	51.43	-13.46 Average	Neutral
10	0.260	40.71	9.53	50.24	61.43	-11.19 QP	Neutral
11	0.550	26.47	9.75	36.22	46.00	-9.78 Average	Neutral
12	0.550	38.08	9.75	47.83	56.00	-8.17 QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p><i>Setup for Power meter measurement method</i></p>  <p><i>Setup for Spectrum analyser measurement method</i></p> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result


Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	11.18	≤30.00	PASS
	2437	11.41	≤30.00	PASS
	2462	12.02	≤30.00	PASS
11G	2412	6.16	≤30.00	PASS
	2437	6.57	≤30.00	PASS
	2462	7.40	≤30.00	PASS
11N20SISO	2412	6.05	≤30.00	PASS
	2437	6.51	≤30.00	PASS
	2462	7.24	≤30.00	PASS



Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs

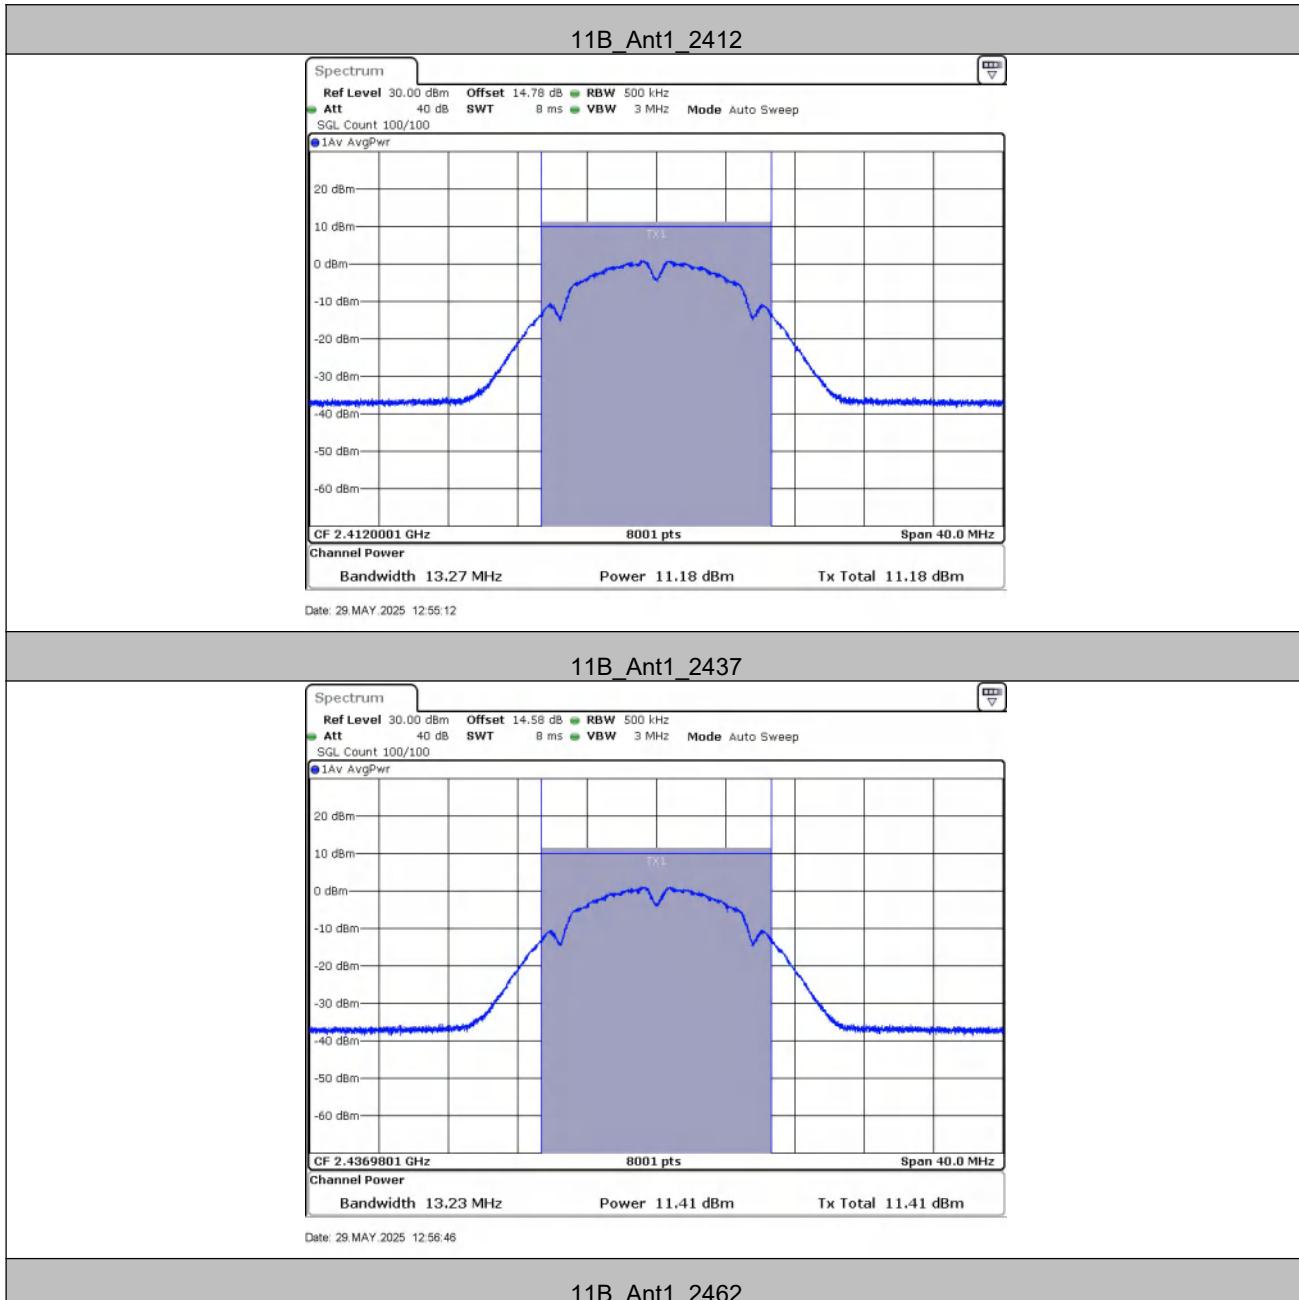


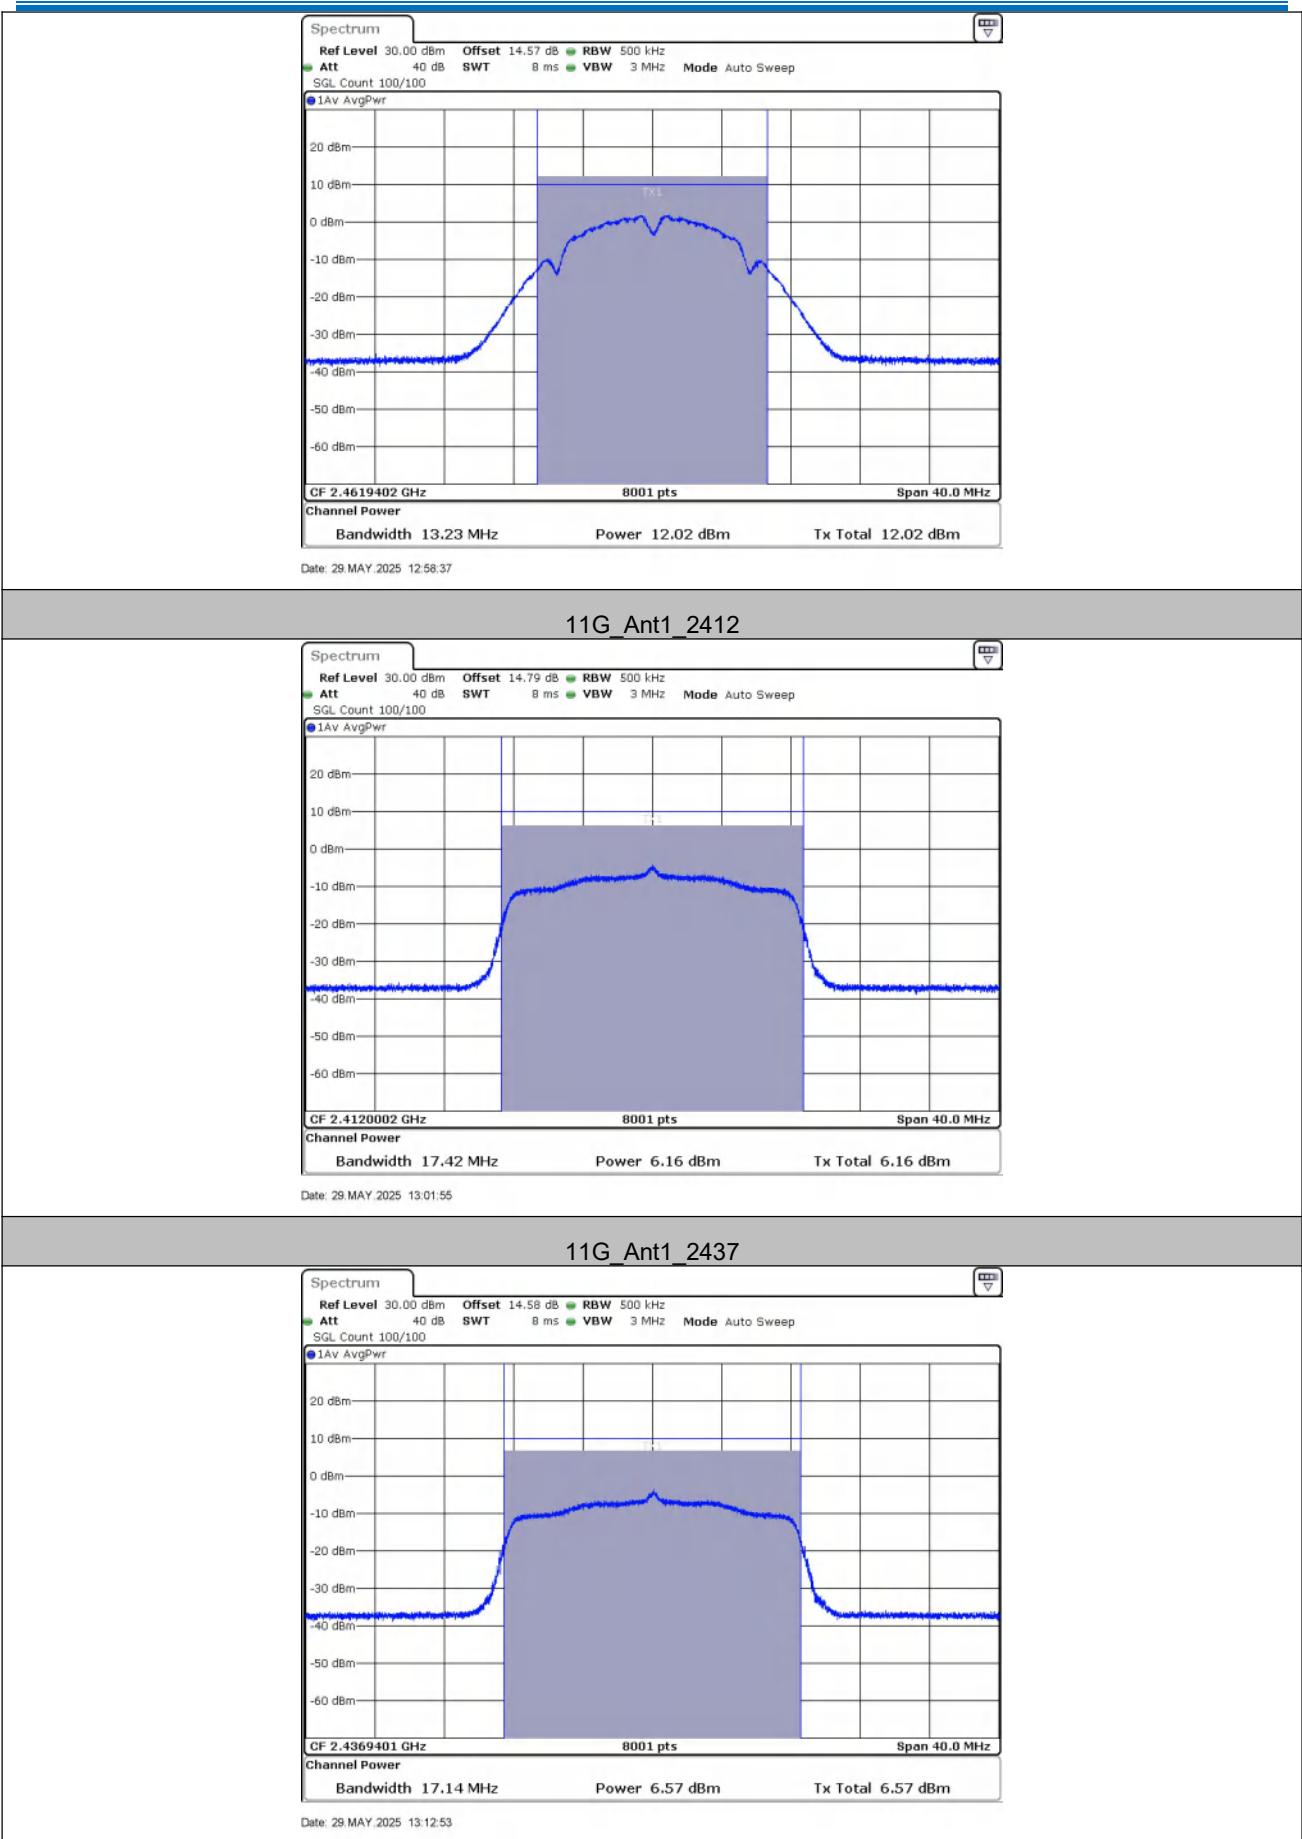

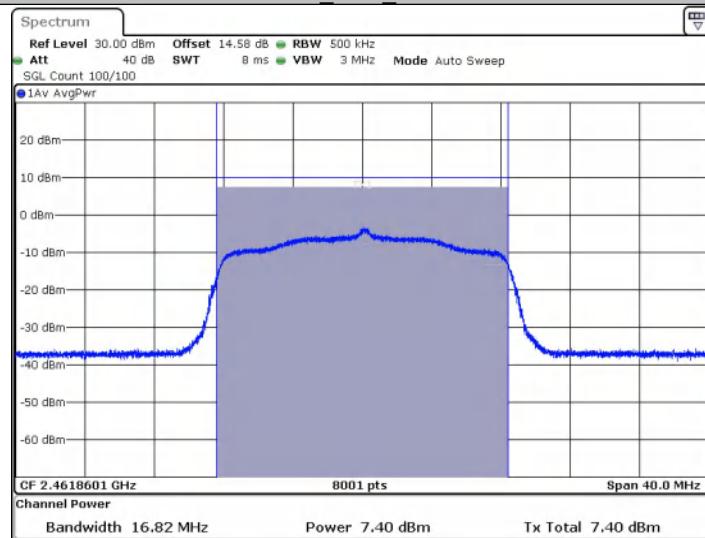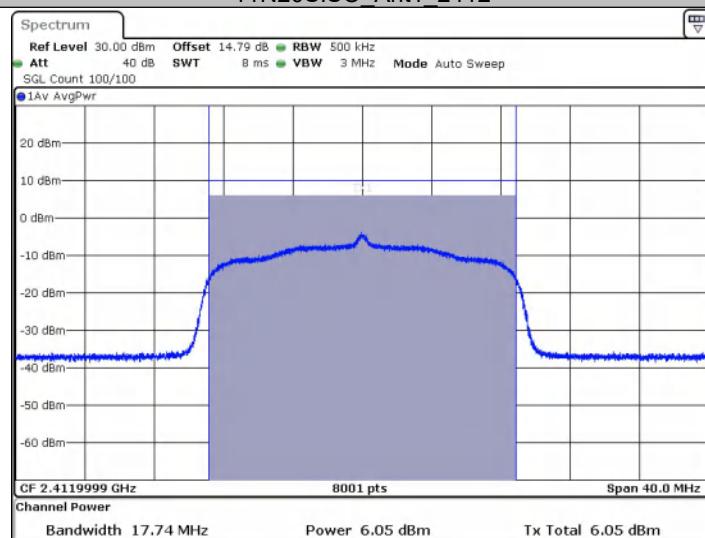11G_Ant1_2462

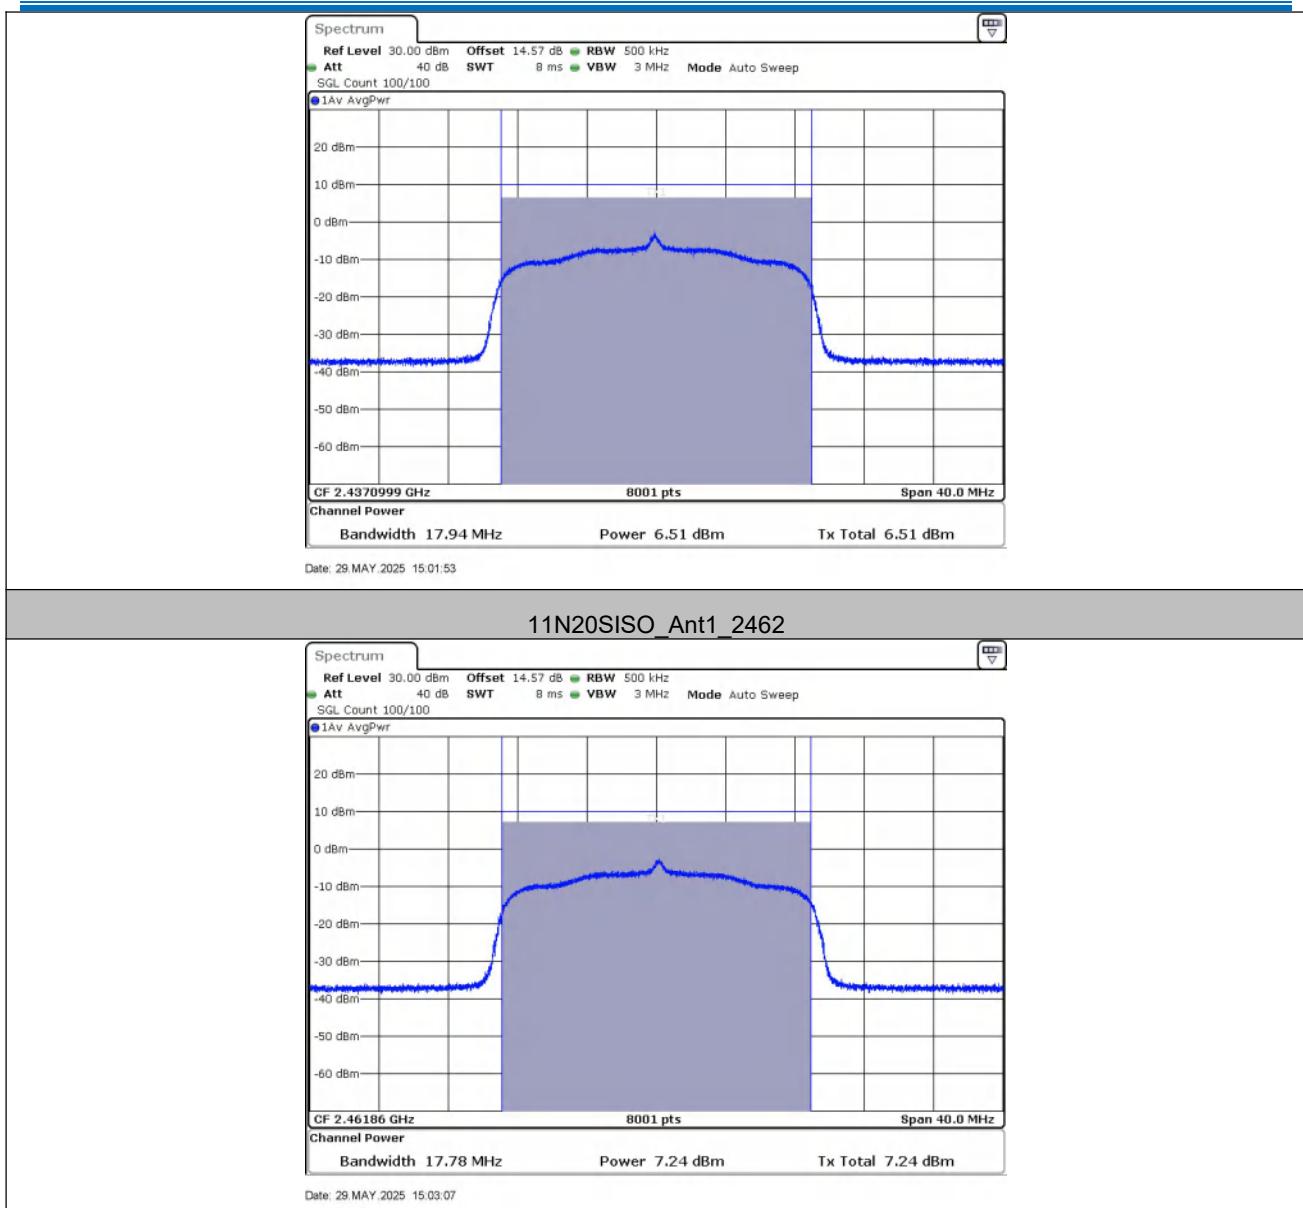11N20SISO_Ant1_2412

11N20SISO_Ant1_2437




5.4 99% Occupied Bandwidth


Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass


Test Result

TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	13.267	2405.3666	2418.6334
	2437	13.227	2430.3666	2443.5934
	2462	13.227	2455.3267	2468.5534
11G	2412	17.423	2403.2887	2420.7113
	2437	17.143	2428.3686	2445.5115
	2462	16.823	2453.4486	2470.2717
11N20SISO	2412	17.742	2403.1289	2420.8711
	2437	17.942	2428.1289	2446.0709
	2462	17.782	2452.9690	2470.7512


Test Graphs

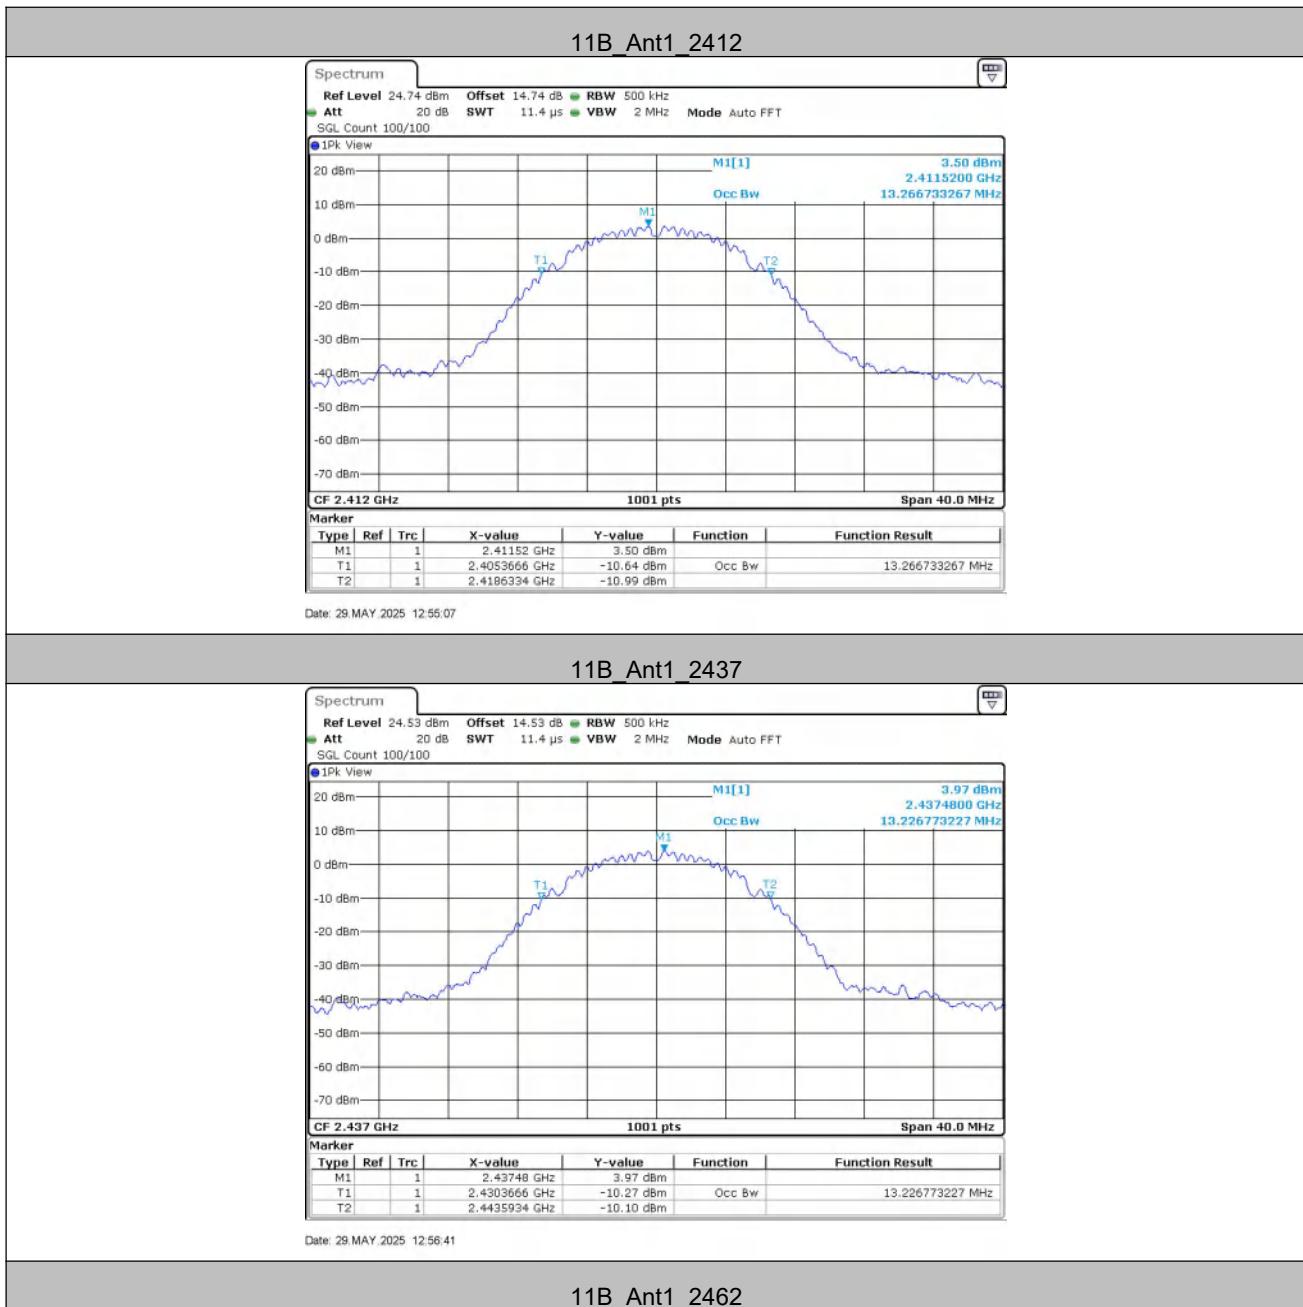

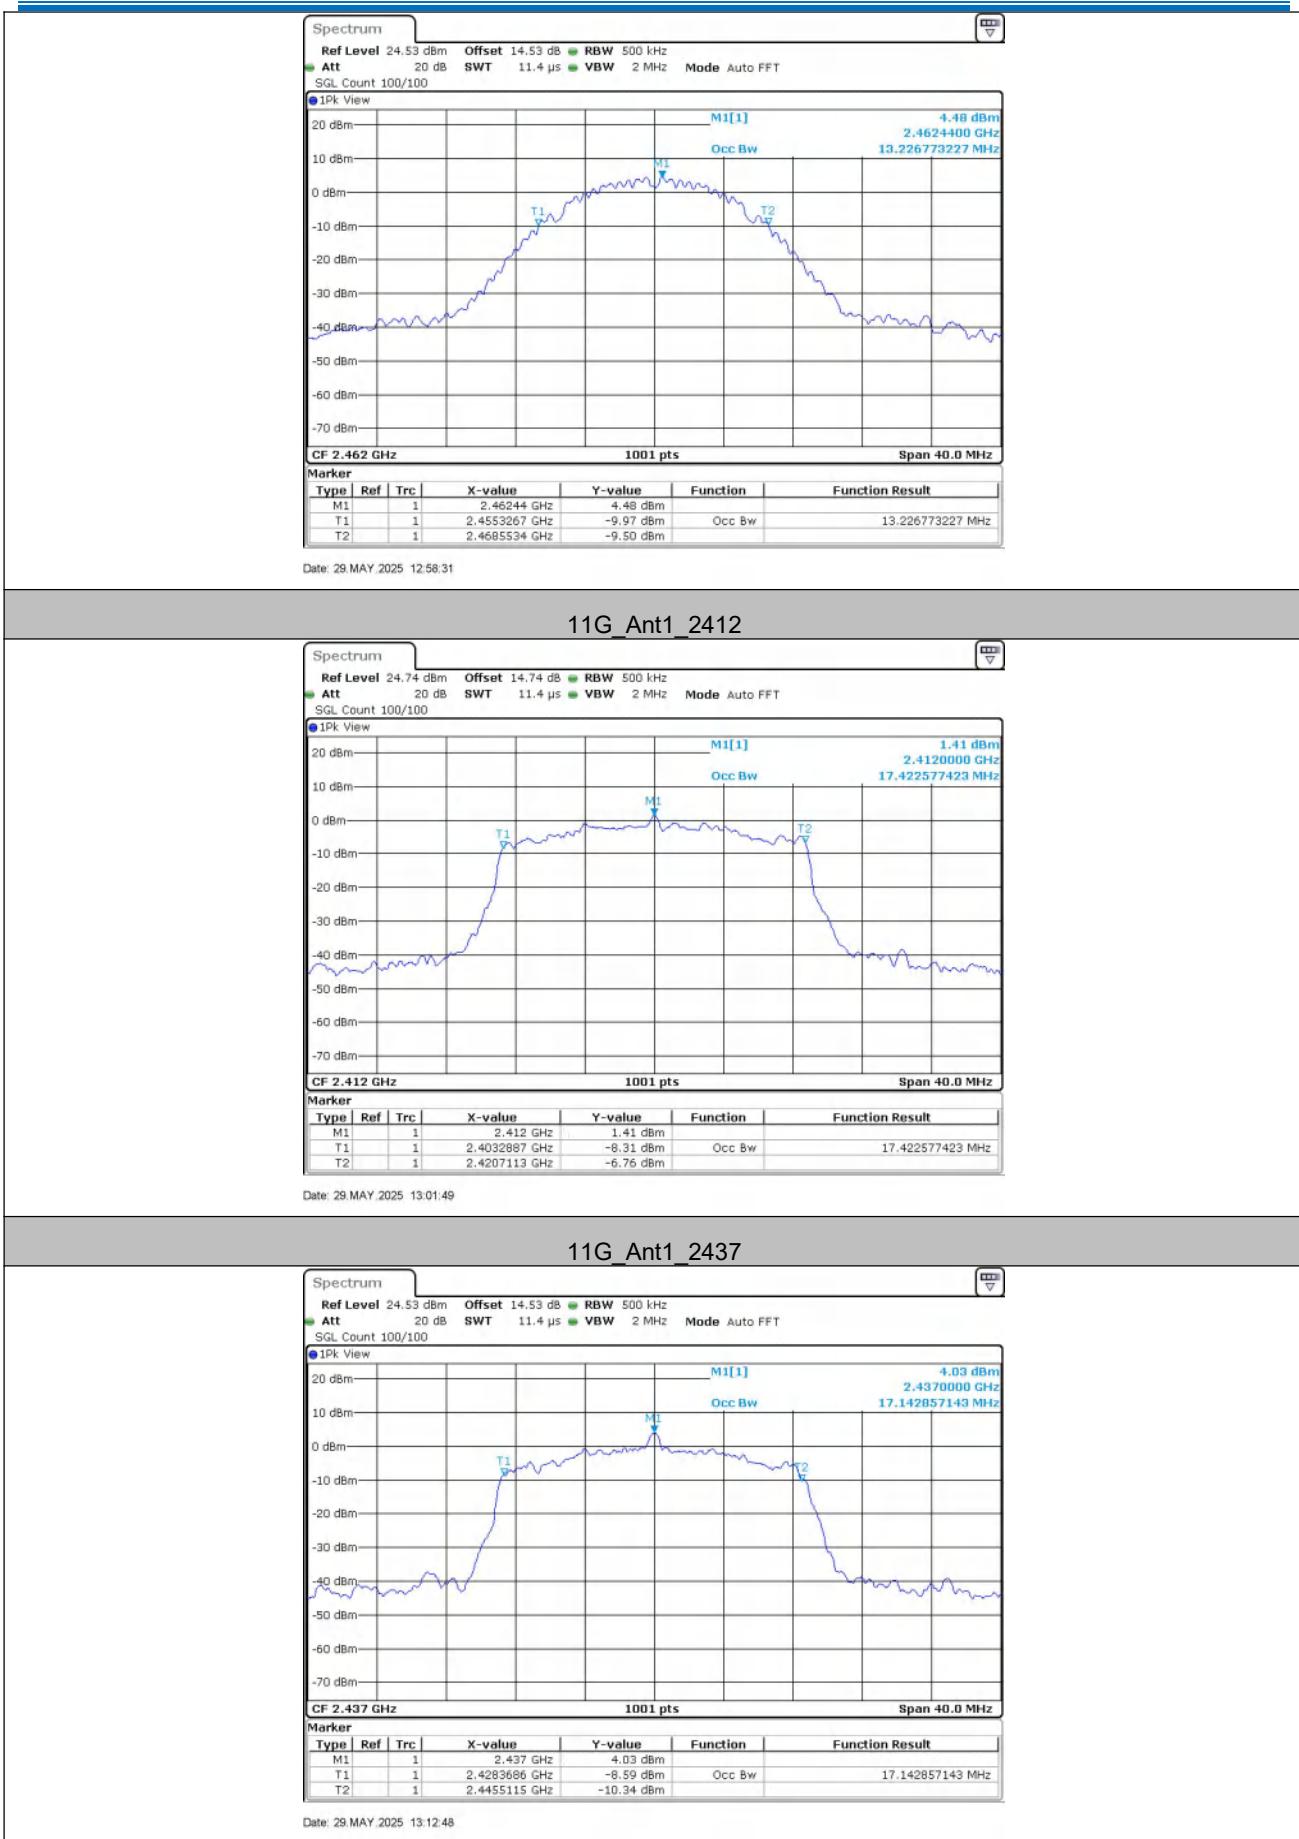

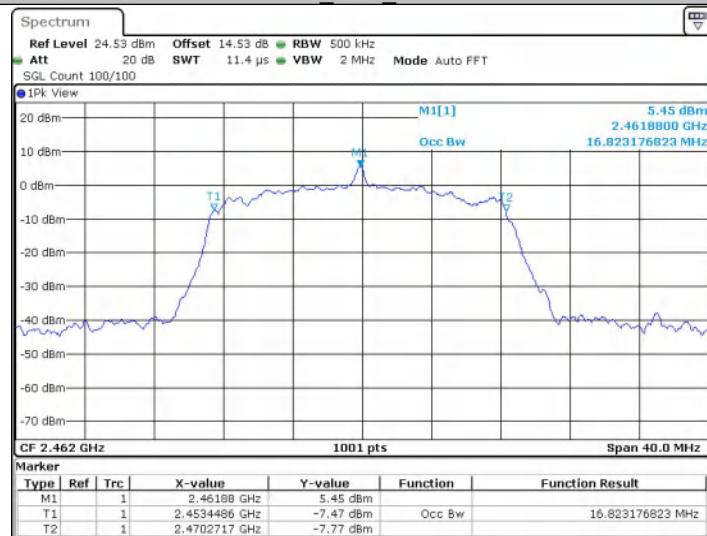
11G_Ant1_2462


Date: 29 MAY 2025 14:57:23

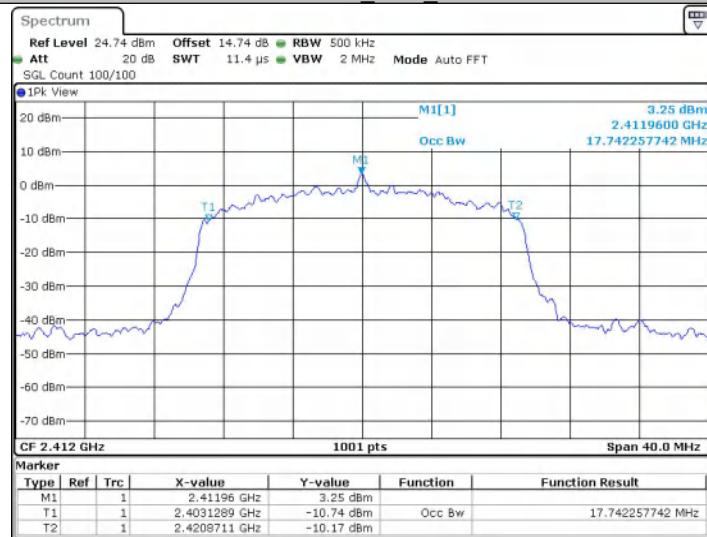
11N20SISO_Ant1_2412


Date: 29 MAY 2025 14:58:37

11N20SISO_Ant1_2437

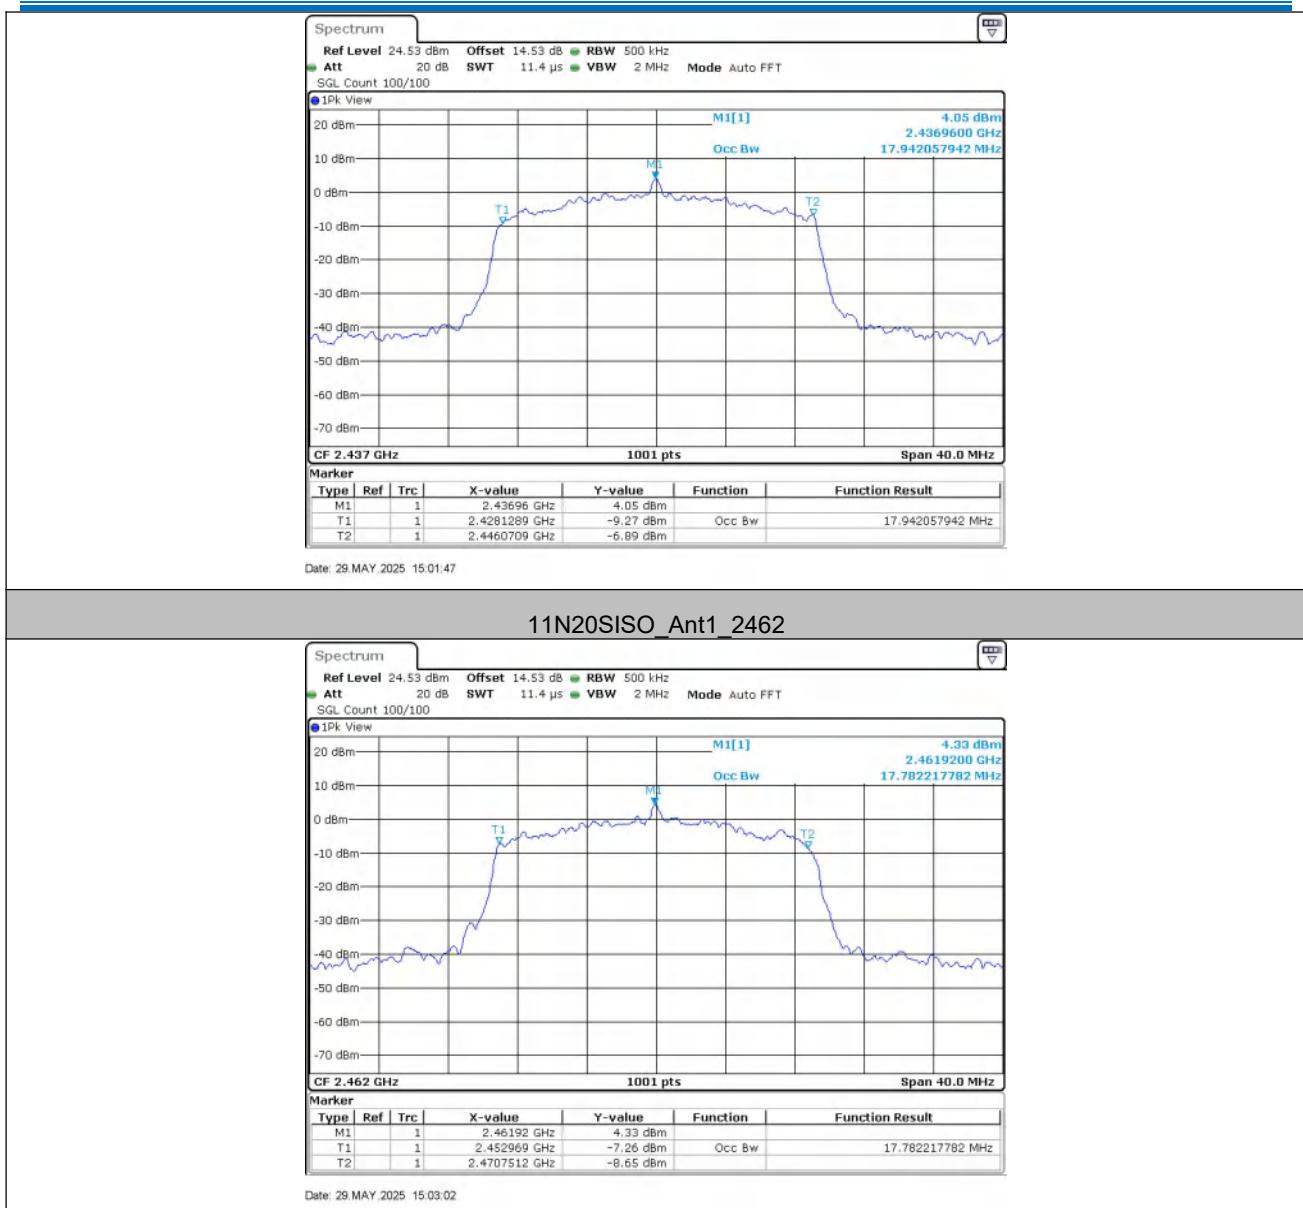



5.5 6dB Occupied Bandwidth



Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass


Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.08	0.5	PASS
		2437	9.04	0.5	PASS
		2462	9.08	0.5	PASS
11G	Ant1	2412	6.52	0.5	PASS
		2437	12.60	0.5	PASS
		2462	9.04	0.5	PASS
11N20SISO	Ant1	2412	10.04	0.5	PASS
		2437	2.88	0.5	PASS
		2462	7.44	0.5	PASS

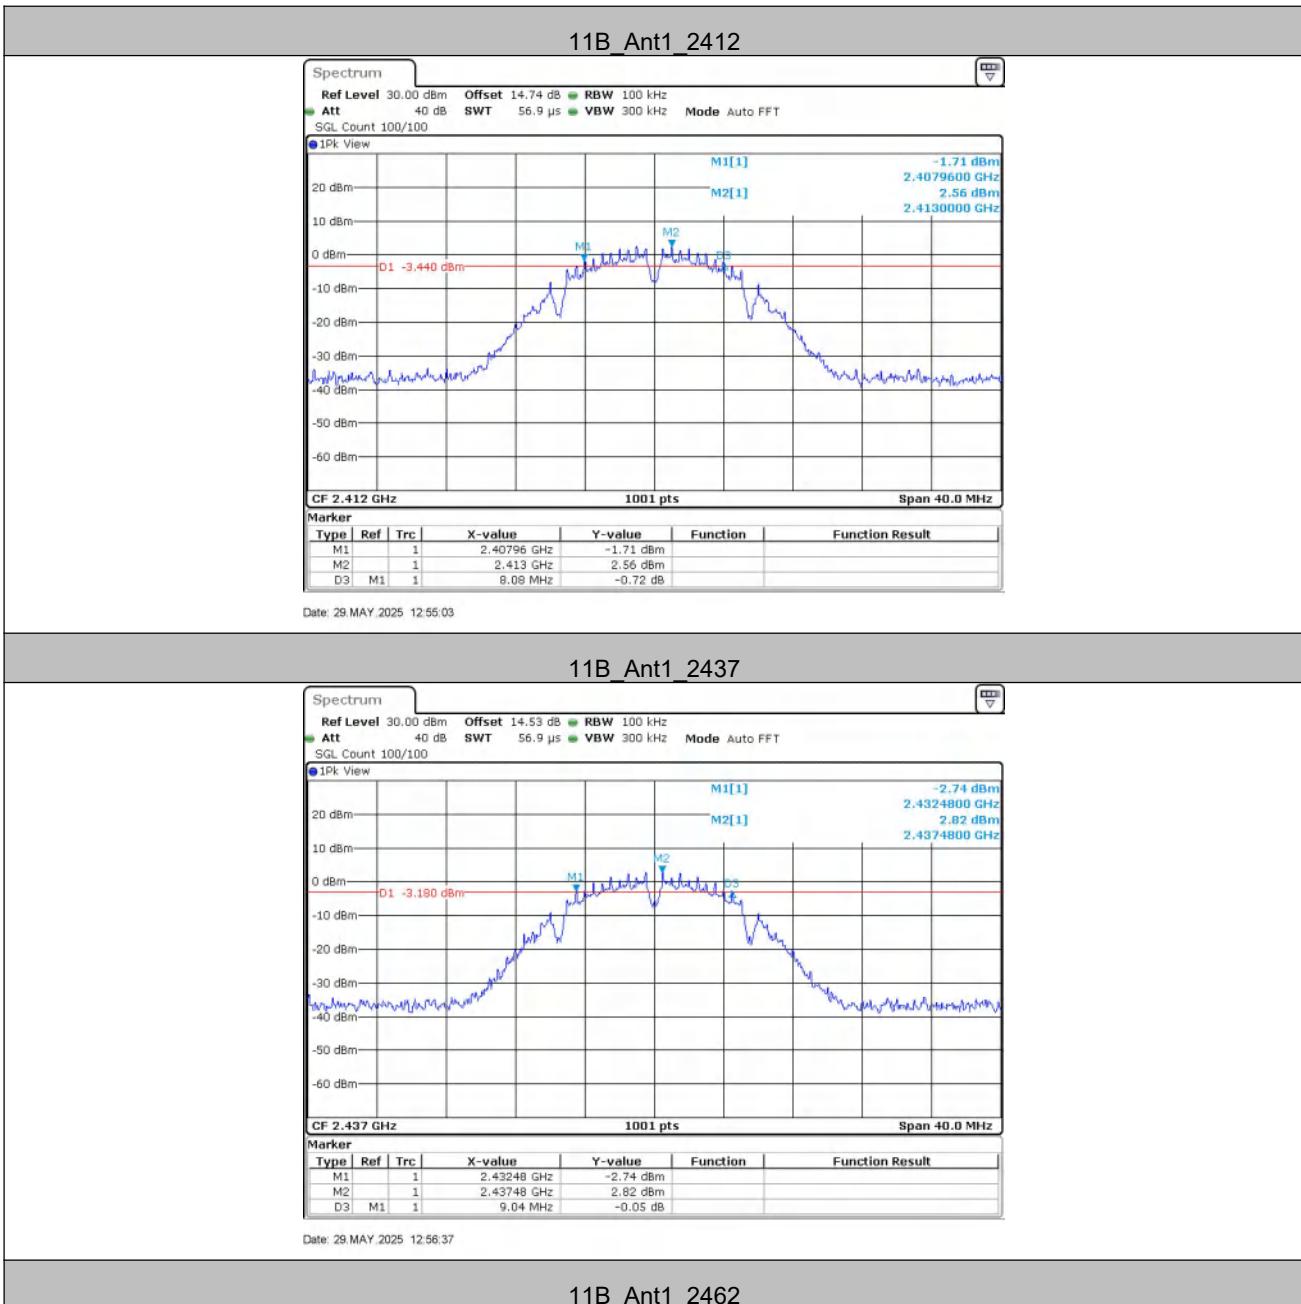
Test Graphs

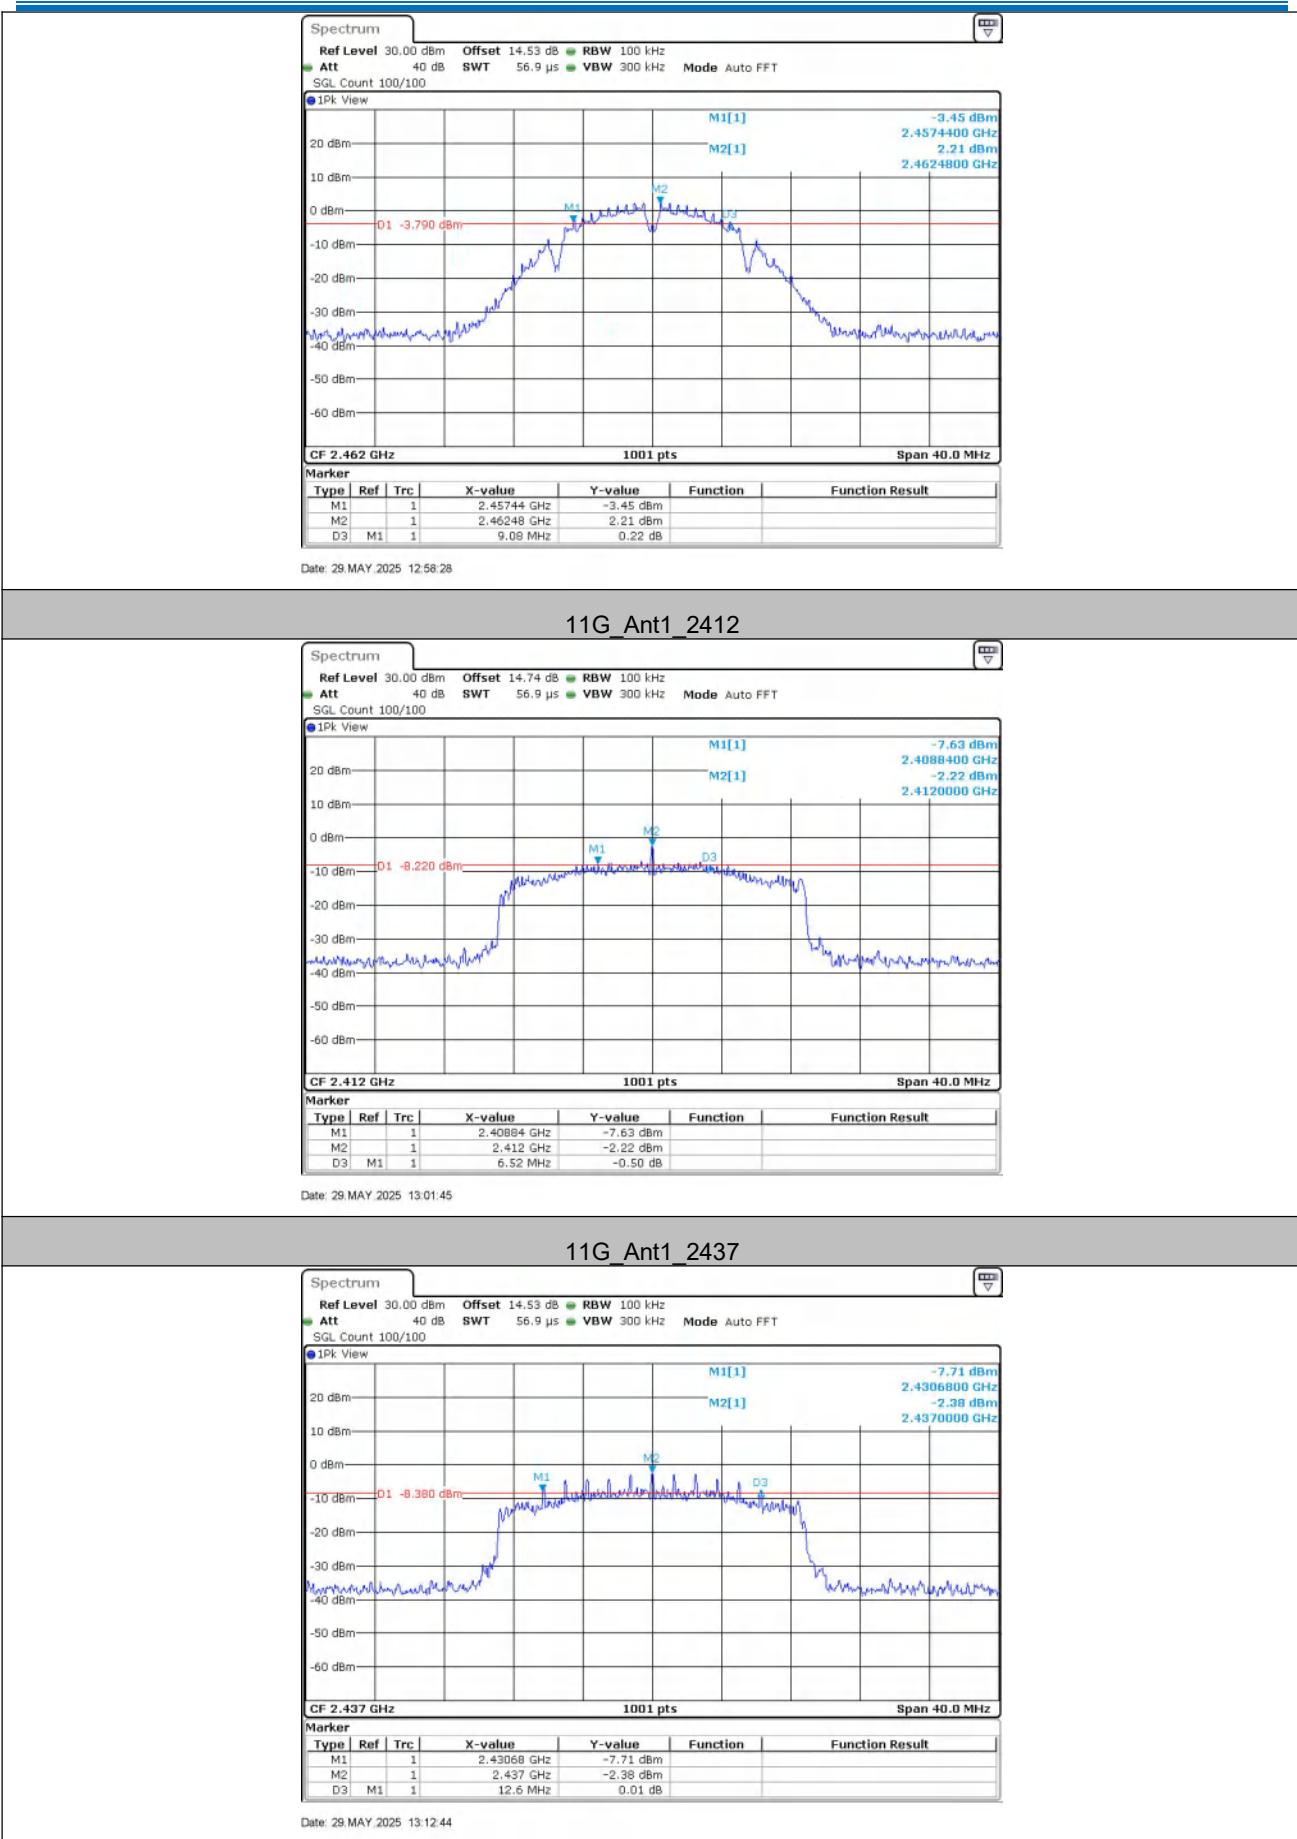

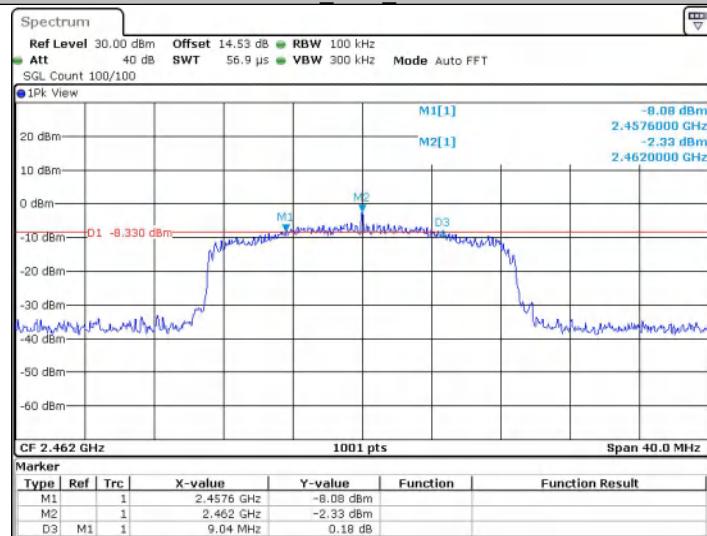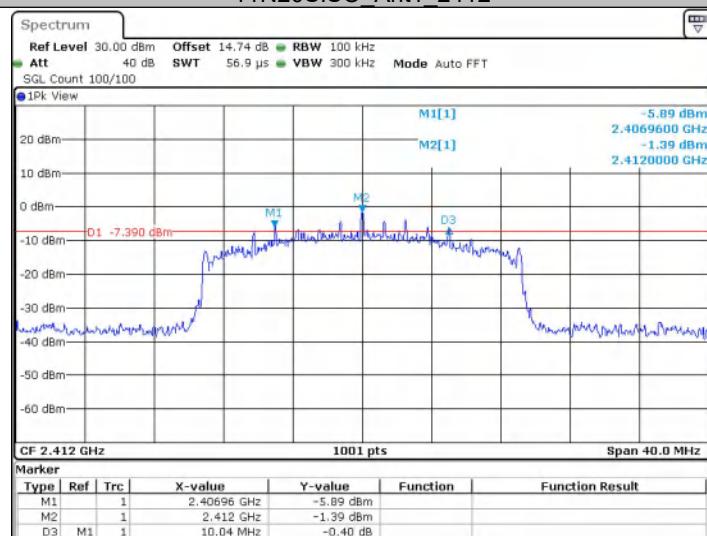
11G_Ant1_2462

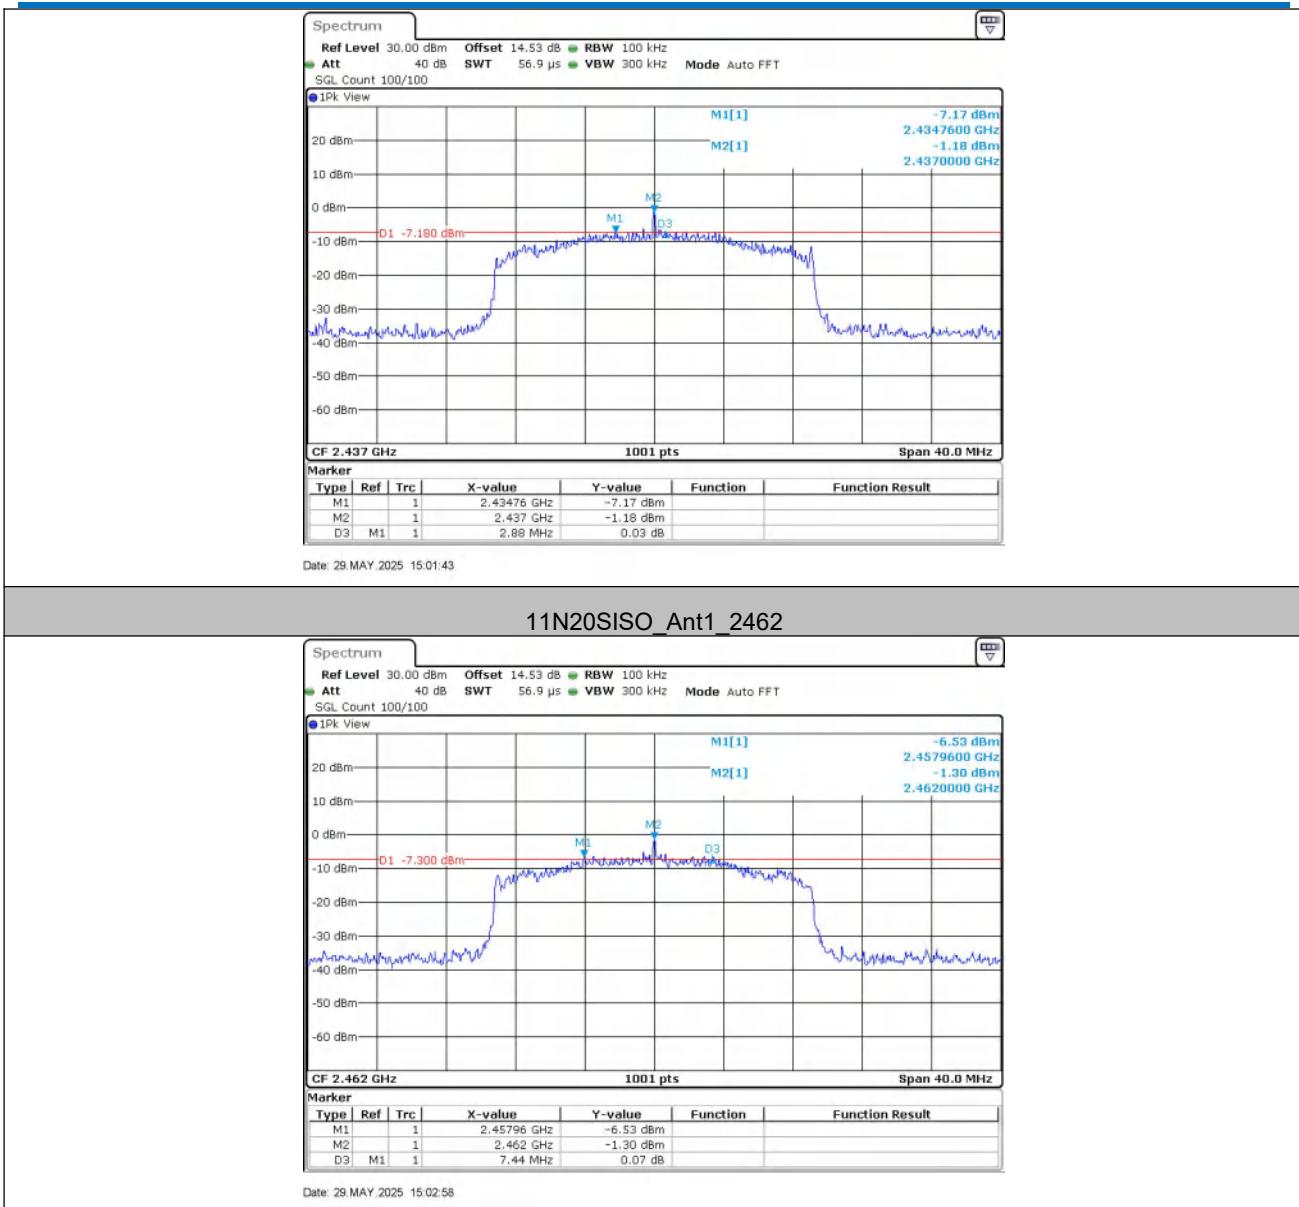11N20SISO_Ant1_2412

11N20SISO_Ant1_2437



5.6 Power Spectral Density


Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	$\leq 8.00 \text{dBm}/3\text{kHz}$
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-11.03	≤8.00	PASS
	2437	-10.10	≤8.00	PASS
	2462	-9.36	≤8.00	PASS
11G	2412	-7.41	≤8.00	PASS
	2437	-6.84	≤8.00	PASS
	2462	-6.37	≤8.00	PASS
11N20SISO	2412	-6.76	≤8.00	PASS
	2437	-6.17	≤8.00	PASS
	2462	-5.79	≤8.00	PASS


Note: Duty cycle correction factor details please see section 4.4.

When Duty cycle >98%, D.C.F is not required.

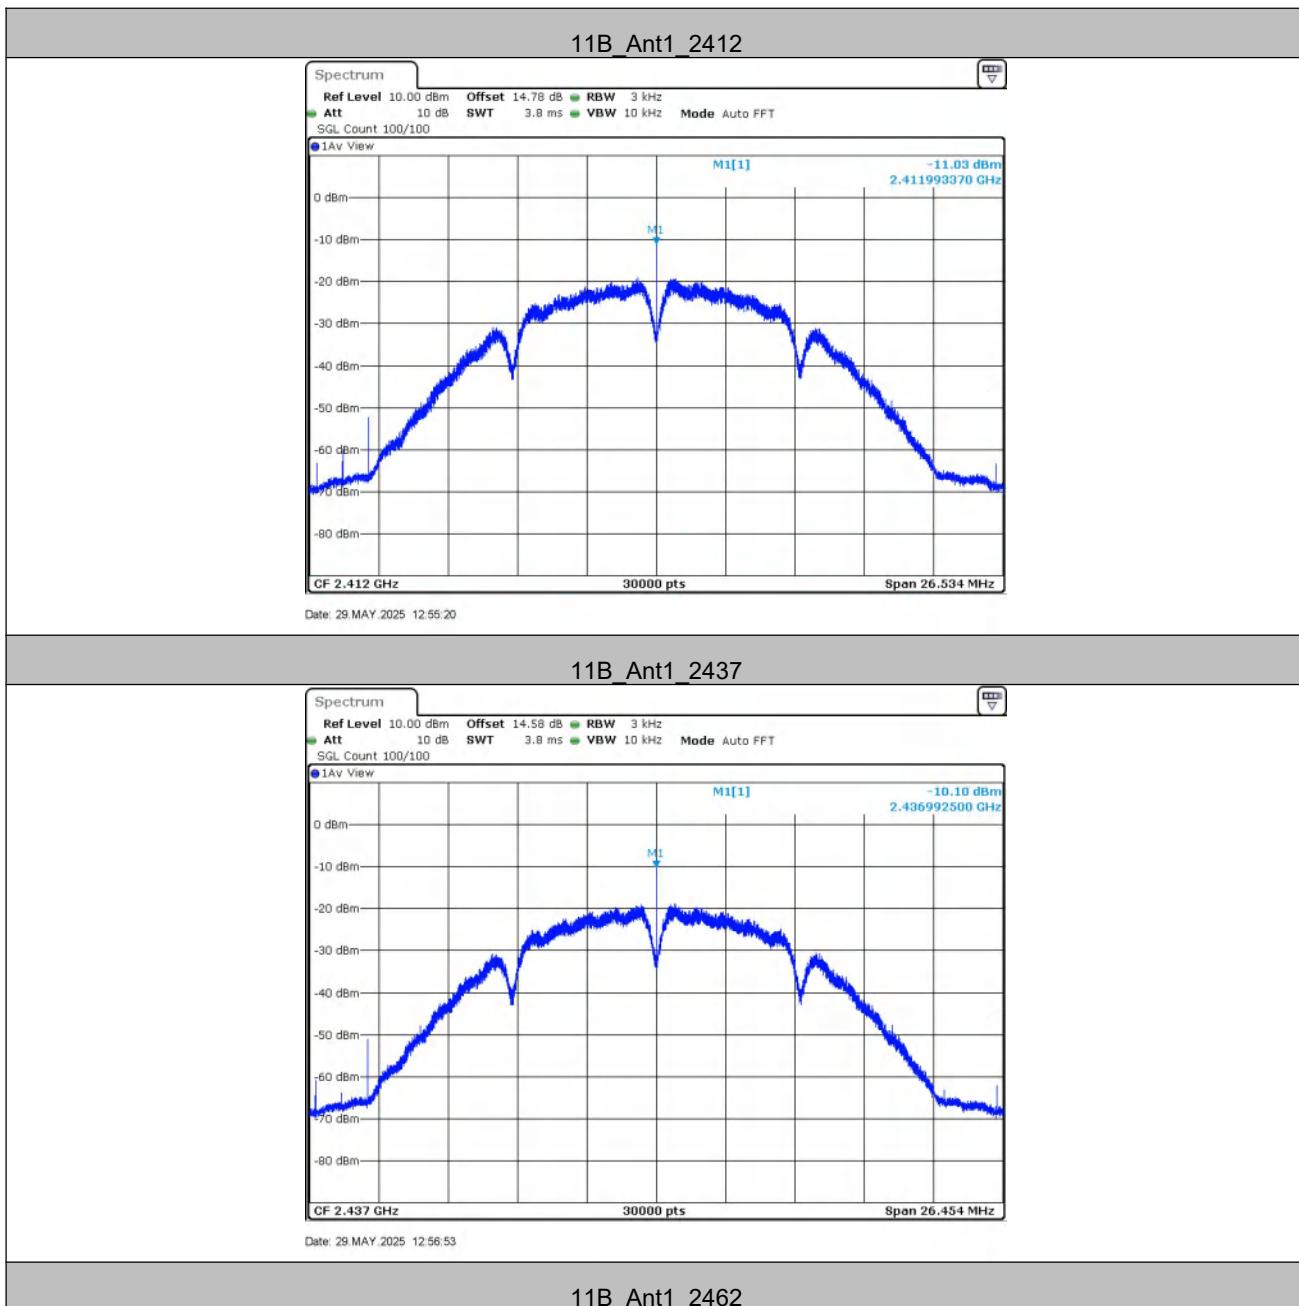Test Graphs

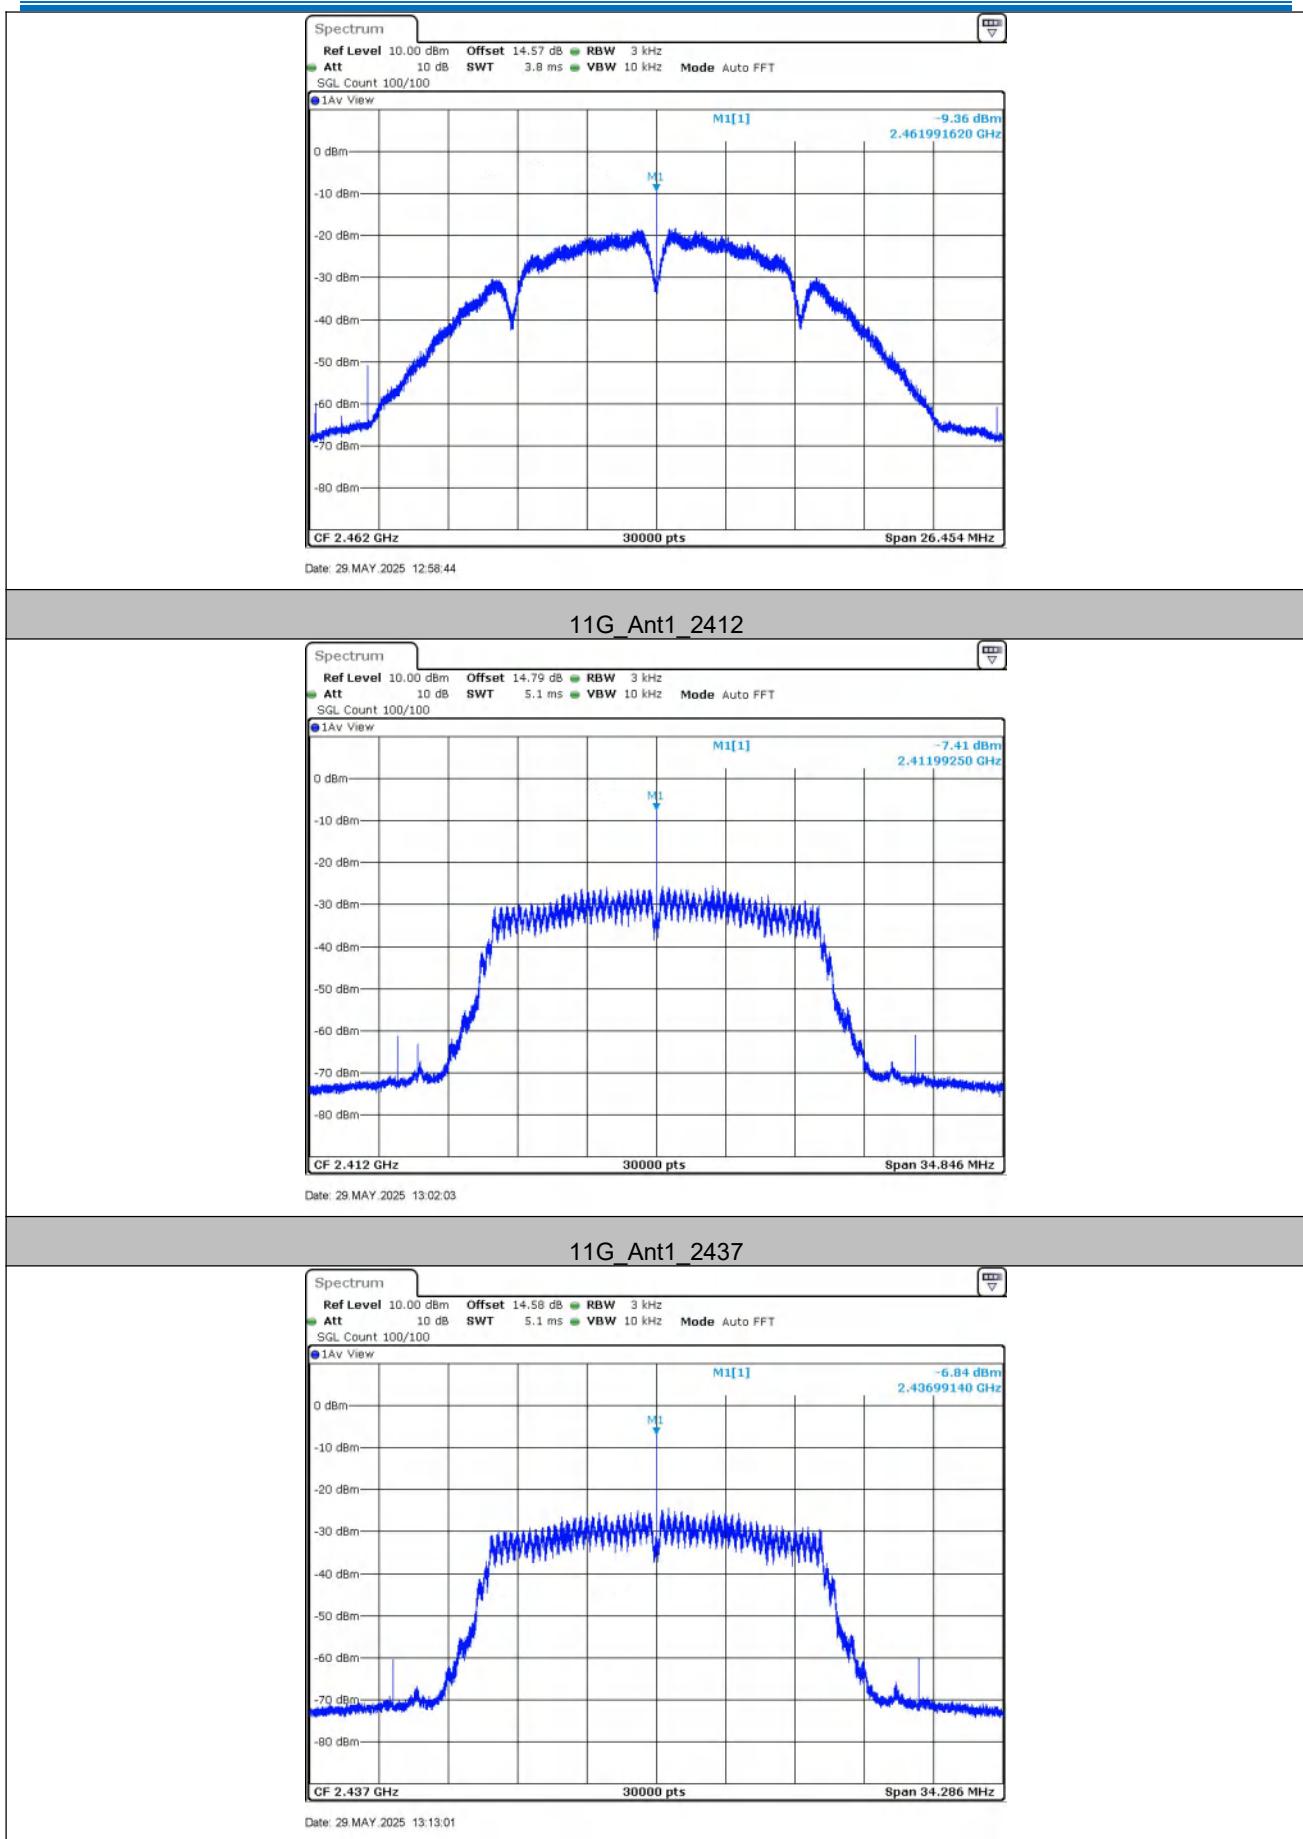


11G_Ant1_2462

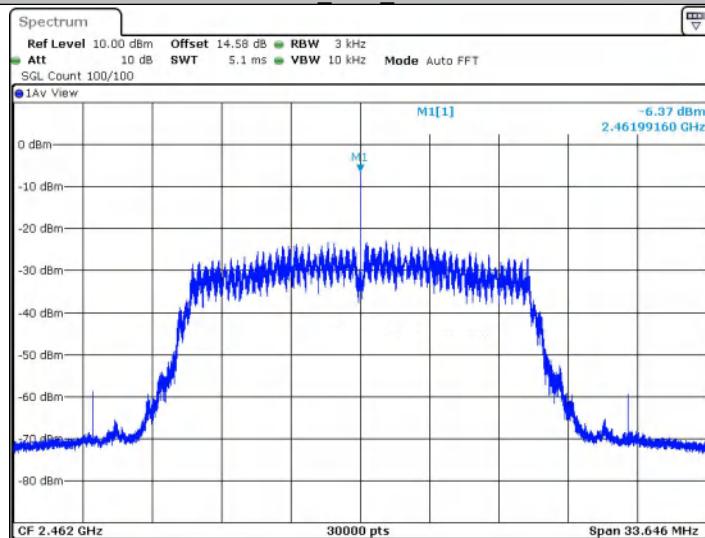


Date: 29 MAY 2025 14:57:35

11N20SISO_Ant1_2412

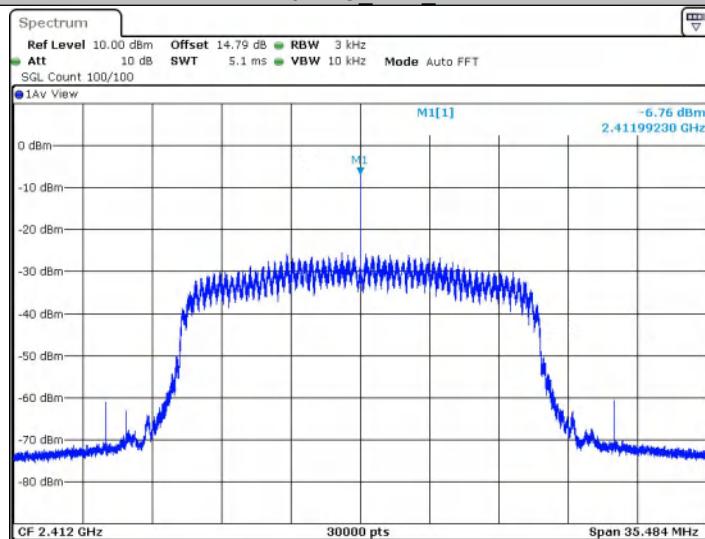


Date: 29 MAY 2025 14:58:51

11N20SISO_Ant1_2437

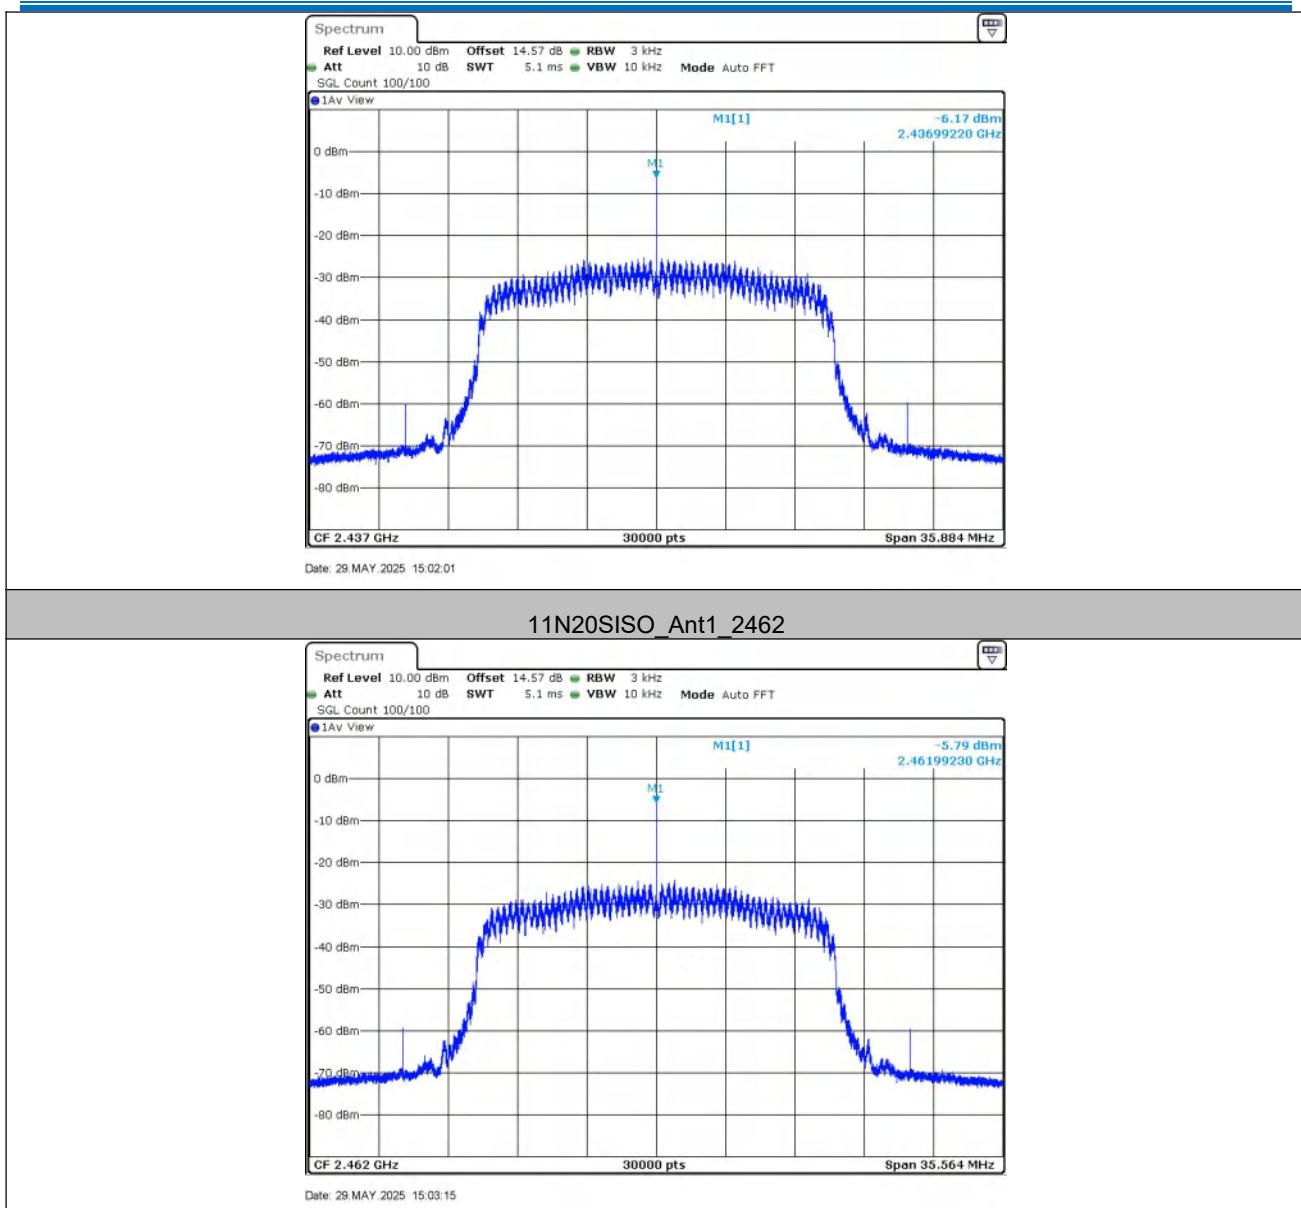


5.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	1.43	-40.22	≤-28.57	PASS
	High	2462	3.10	-40.62	≤-26.9	PASS
11G	Low	2412	-0.97	-41.88	≤-30.97	PASS
	High	2462	-0.68	-40.31	≤-30.68	PASS
11N20SISO	Low	2412	-1.73	-41.44	≤-31.73	PASS
	High	2462	1.43	-40.68	≤-28.57	PASS


5.7.1 Test Graphs

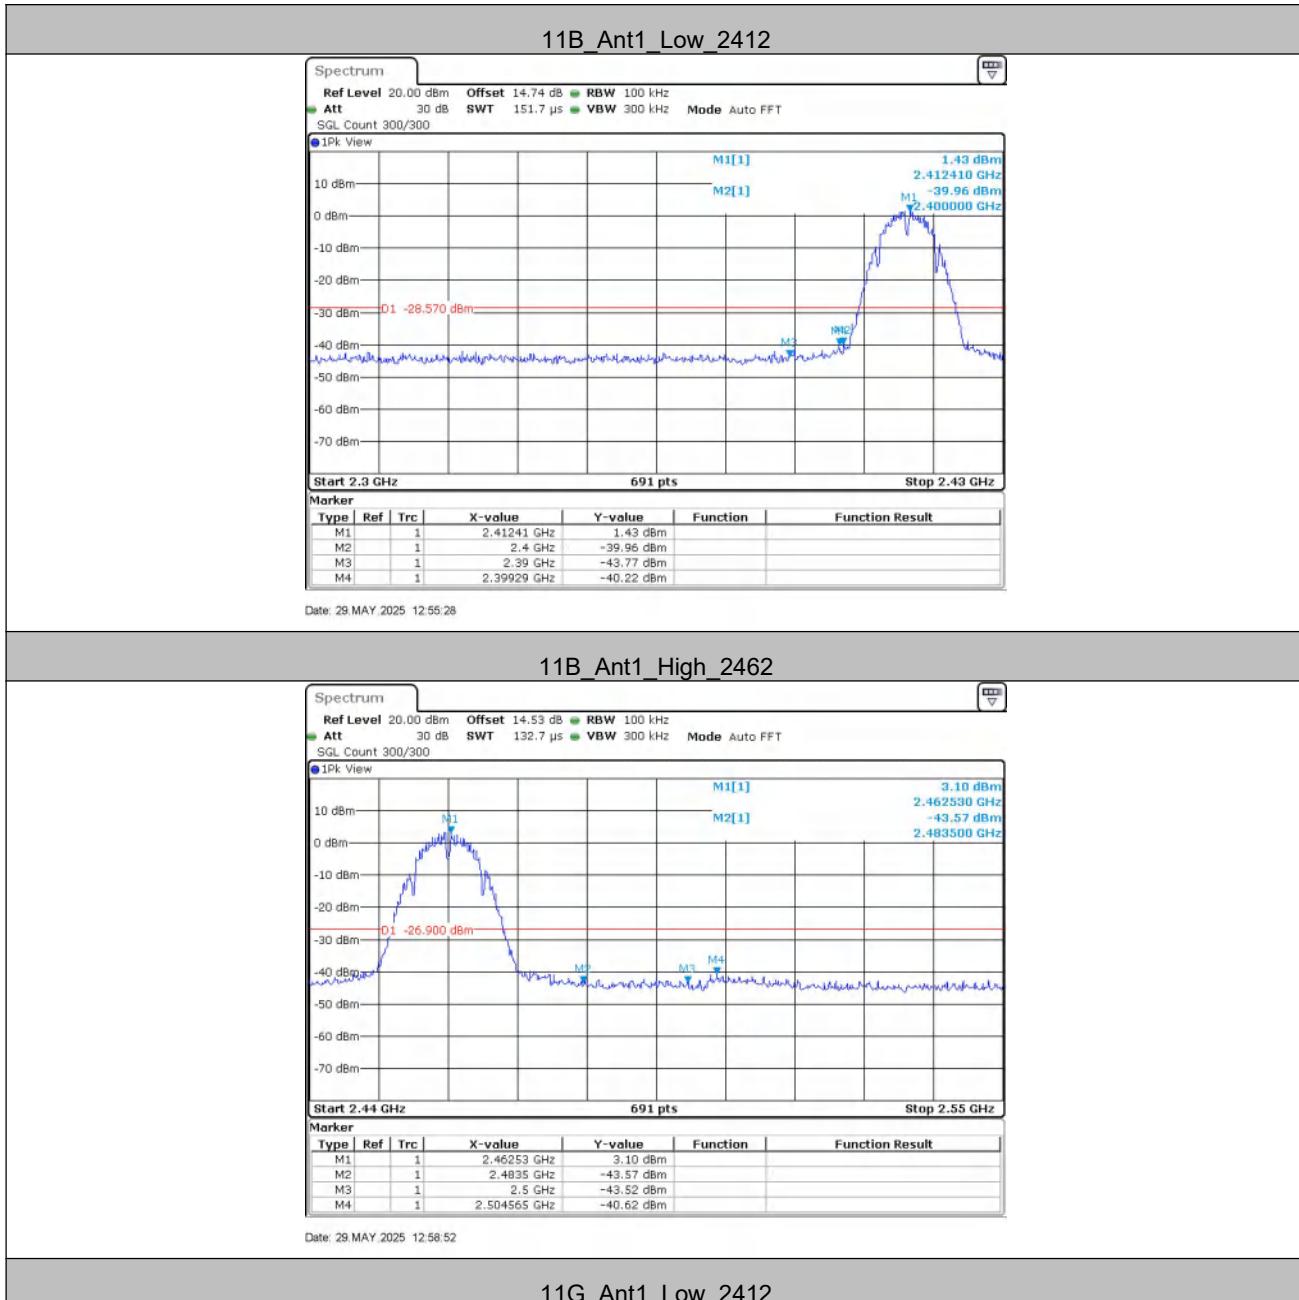



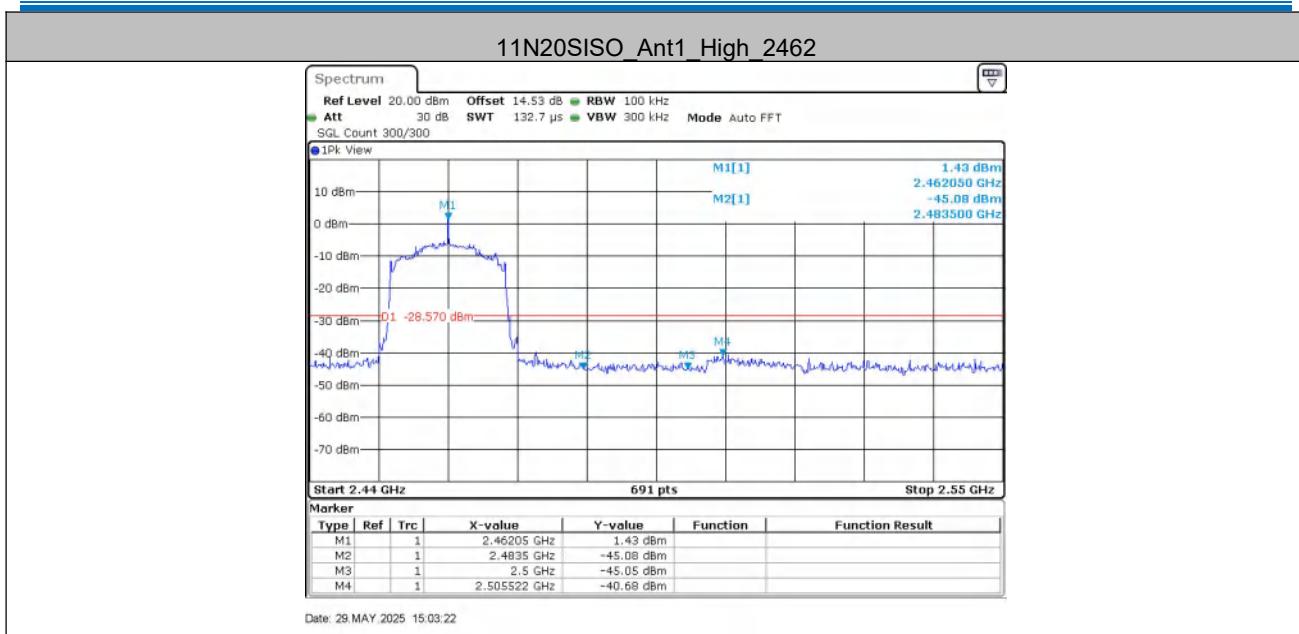


5.8 RF Conducted Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	1.82	1.82	---	PASS
		30~1000	1.82	-49.96	≤-28.18	PASS
		1000~26500	1.82	-40.68	≤-28.18	PASS
	2437	Reference	2.42	2.42	---	PASS
		30~1000	2.42	-50.77	≤-27.58	PASS
		1000~26500	2.42	-41.98	≤-27.58	PASS
	2462	Reference	0.72	0.72	---	PASS
		30~1000	0.72	-51.66	≤-29.28	PASS
		1000~26500	0.72	-42	≤-29.28	PASS
11G	2412	Reference	-4.38	-4.38	---	PASS
		30~1000	-4.38	-50.66	≤-34.38	PASS
		1000~26500	-4.38	-41.55	≤-34.38	PASS
	2437	Reference	-4.09	-4.09	---	PASS
		30~1000	-4.09	-51.31	≤-34.09	PASS
		1000~26500	-4.09	-42.43	≤-34.09	PASS
	2462	Reference	-3.52	-3.52	---	PASS
		30~1000	-3.52	-50.54	≤-33.52	PASS
		1000~26500	-3.52	-42.15	≤-33.52	PASS
11N20SISO	2412	Reference	-4.25	-4.25	---	PASS
		30~1000	-4.25	-49.85	≤-34.25	PASS
		1000~26500	-4.25	-41.06	≤-34.25	PASS
	2437	Reference	-4.03	-4.03	---	PASS
		30~1000	-4.03	-51.55	≤-34.03	PASS
		1000~26500	-4.03	-41.46	≤-34.03	PASS
	2462	Reference	-1.05	-1.05	---	PASS
		30~1000	-1.05	-50.74	≤-31.05	PASS
		1000~26500	-1.05	-42.42	≤-31.05	PASS


Test Graphs

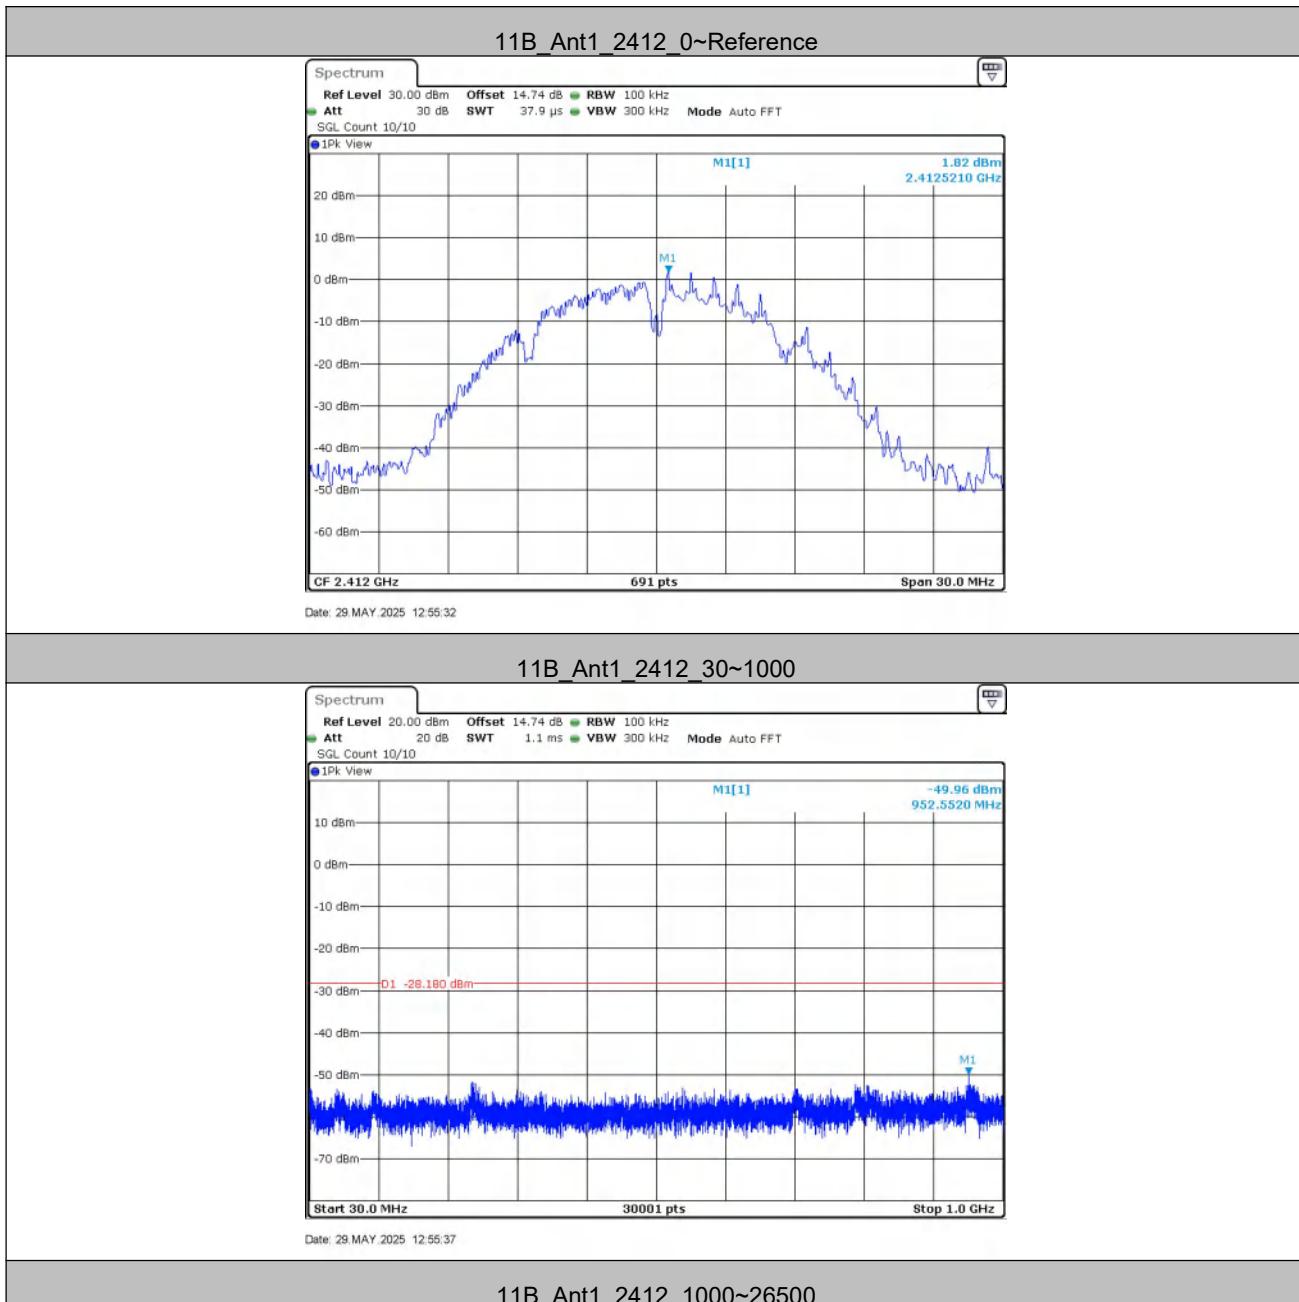

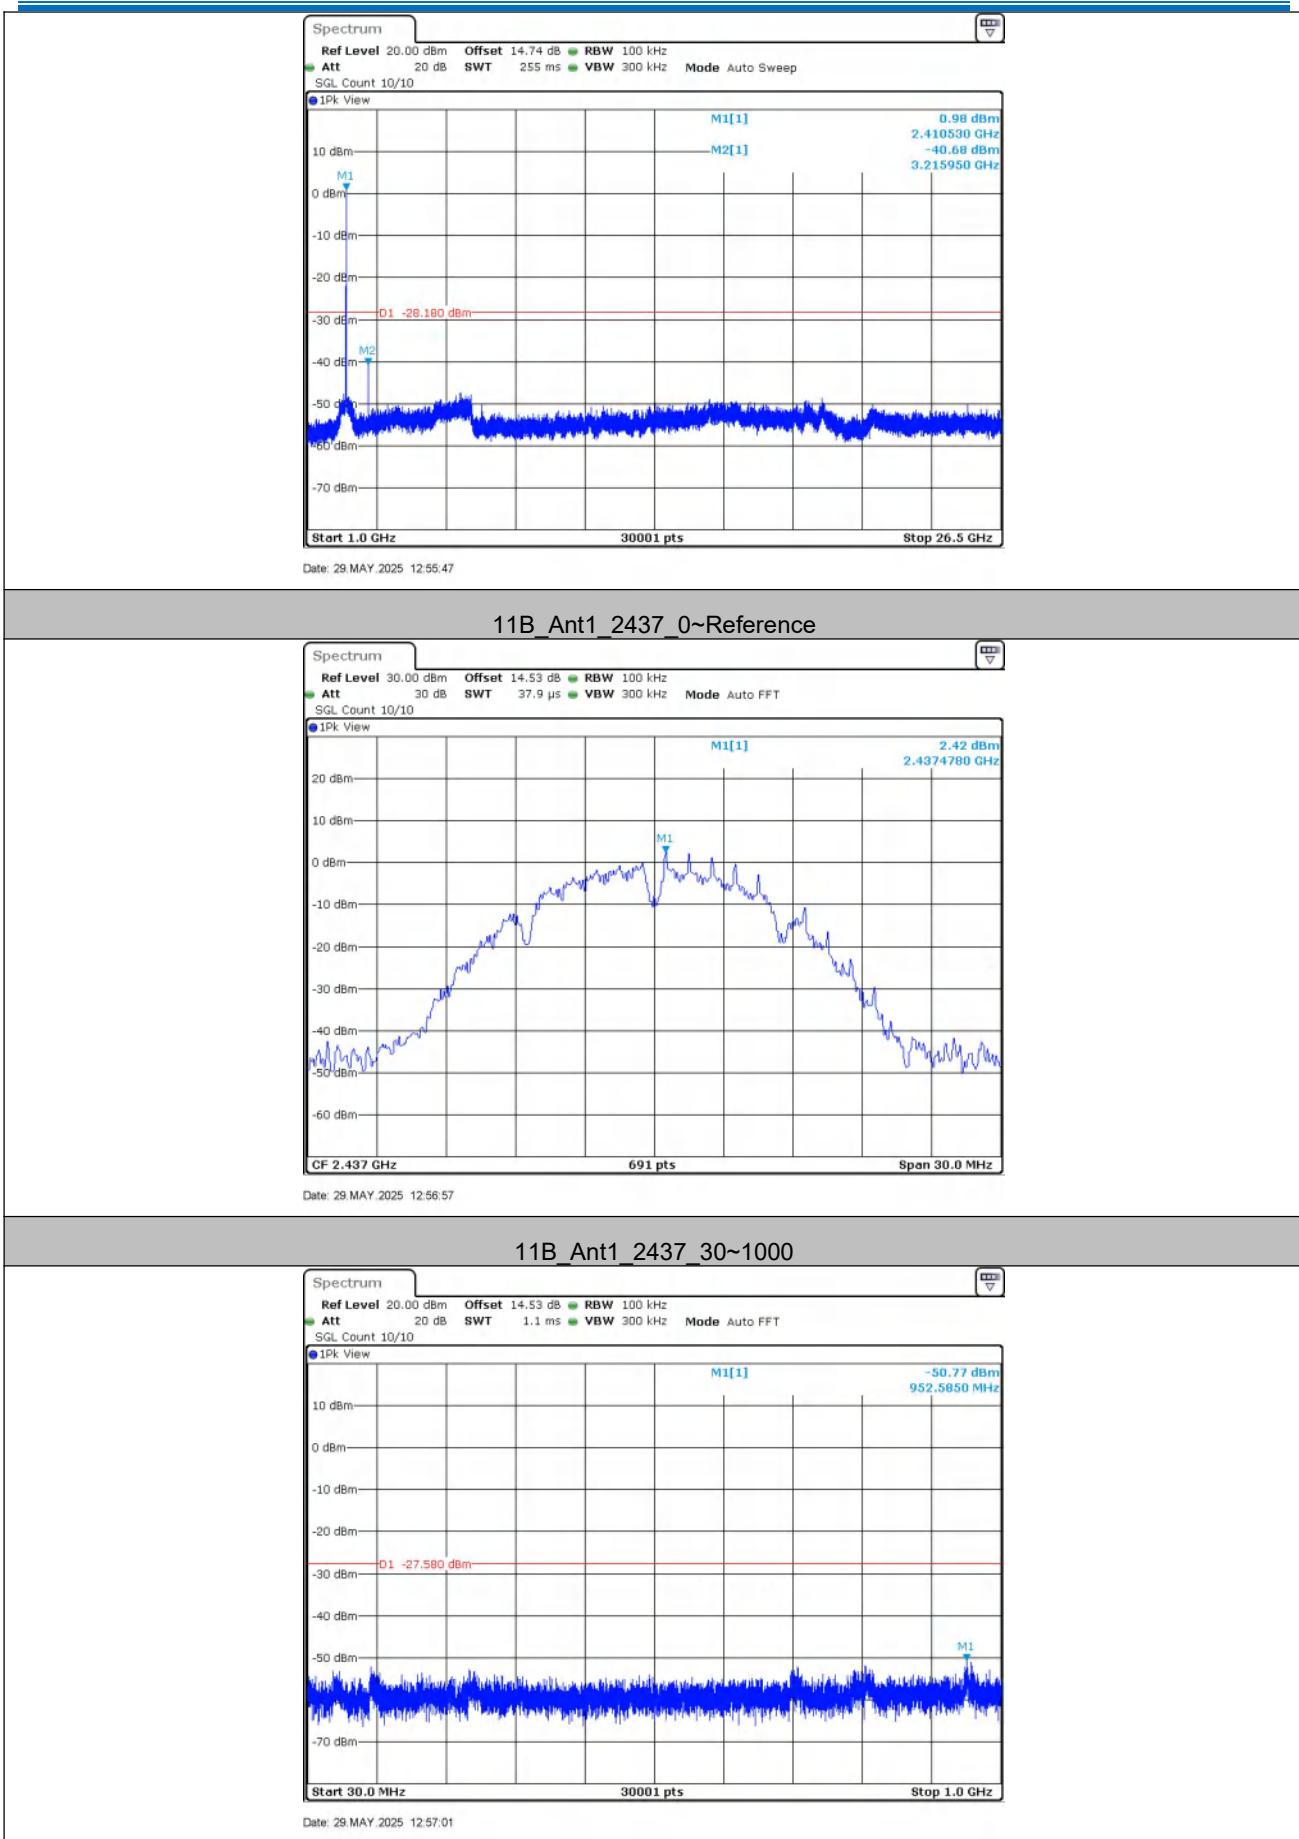

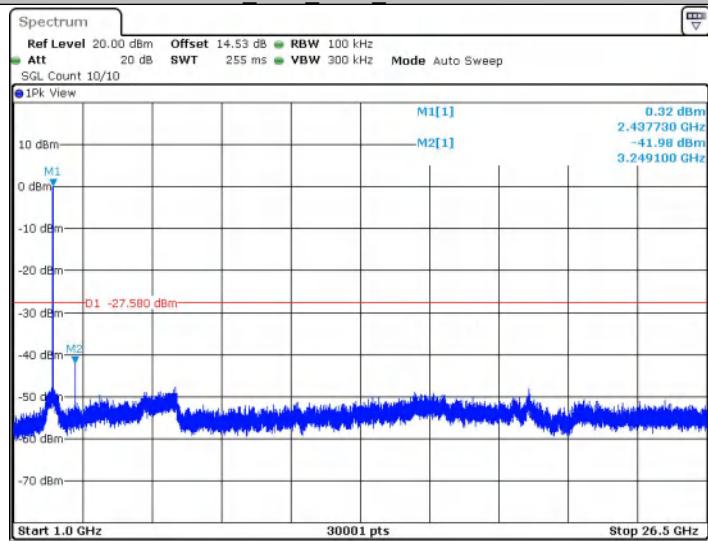
11B_Ant1_2437_1000~26500


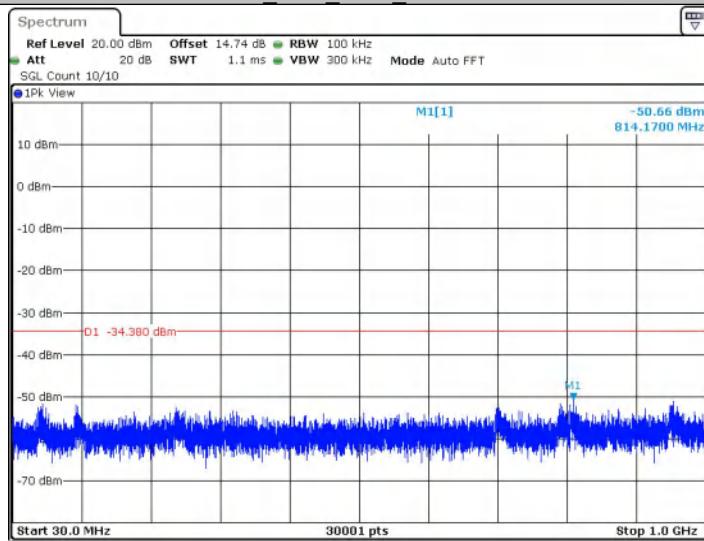
Date: 29 MAY 2025 12:57:12

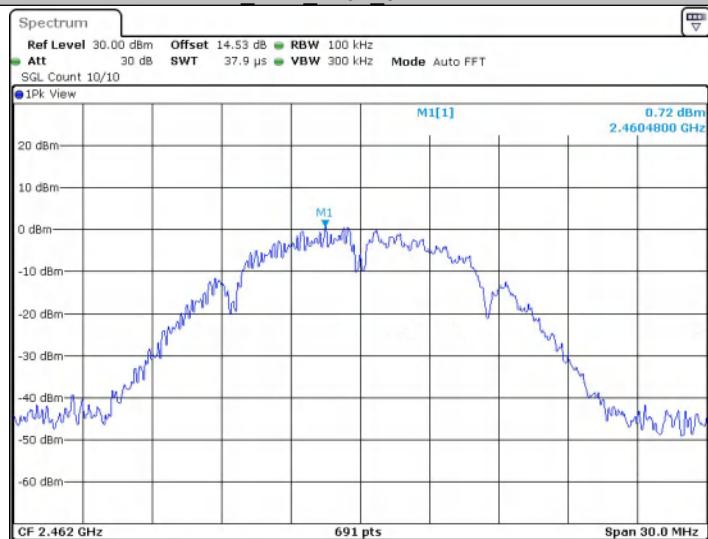11B_Ant1_2462_0~Reference


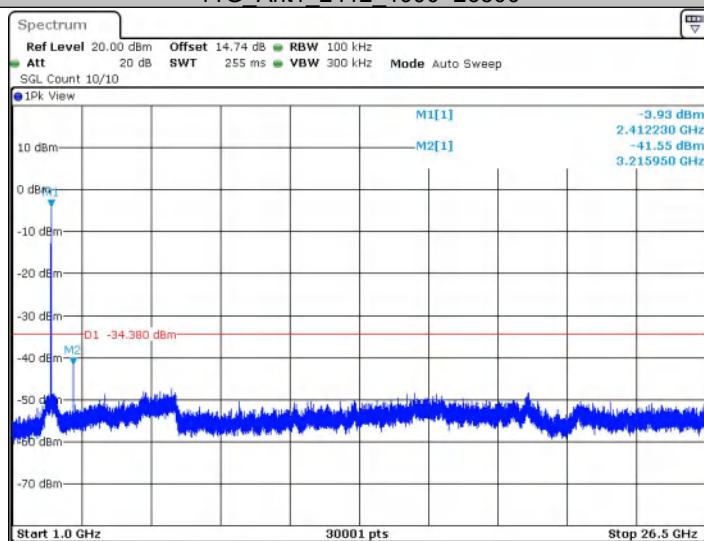
Date: 29 MAY 2025 12:58:56

11B_Ant1_2462_30~1000

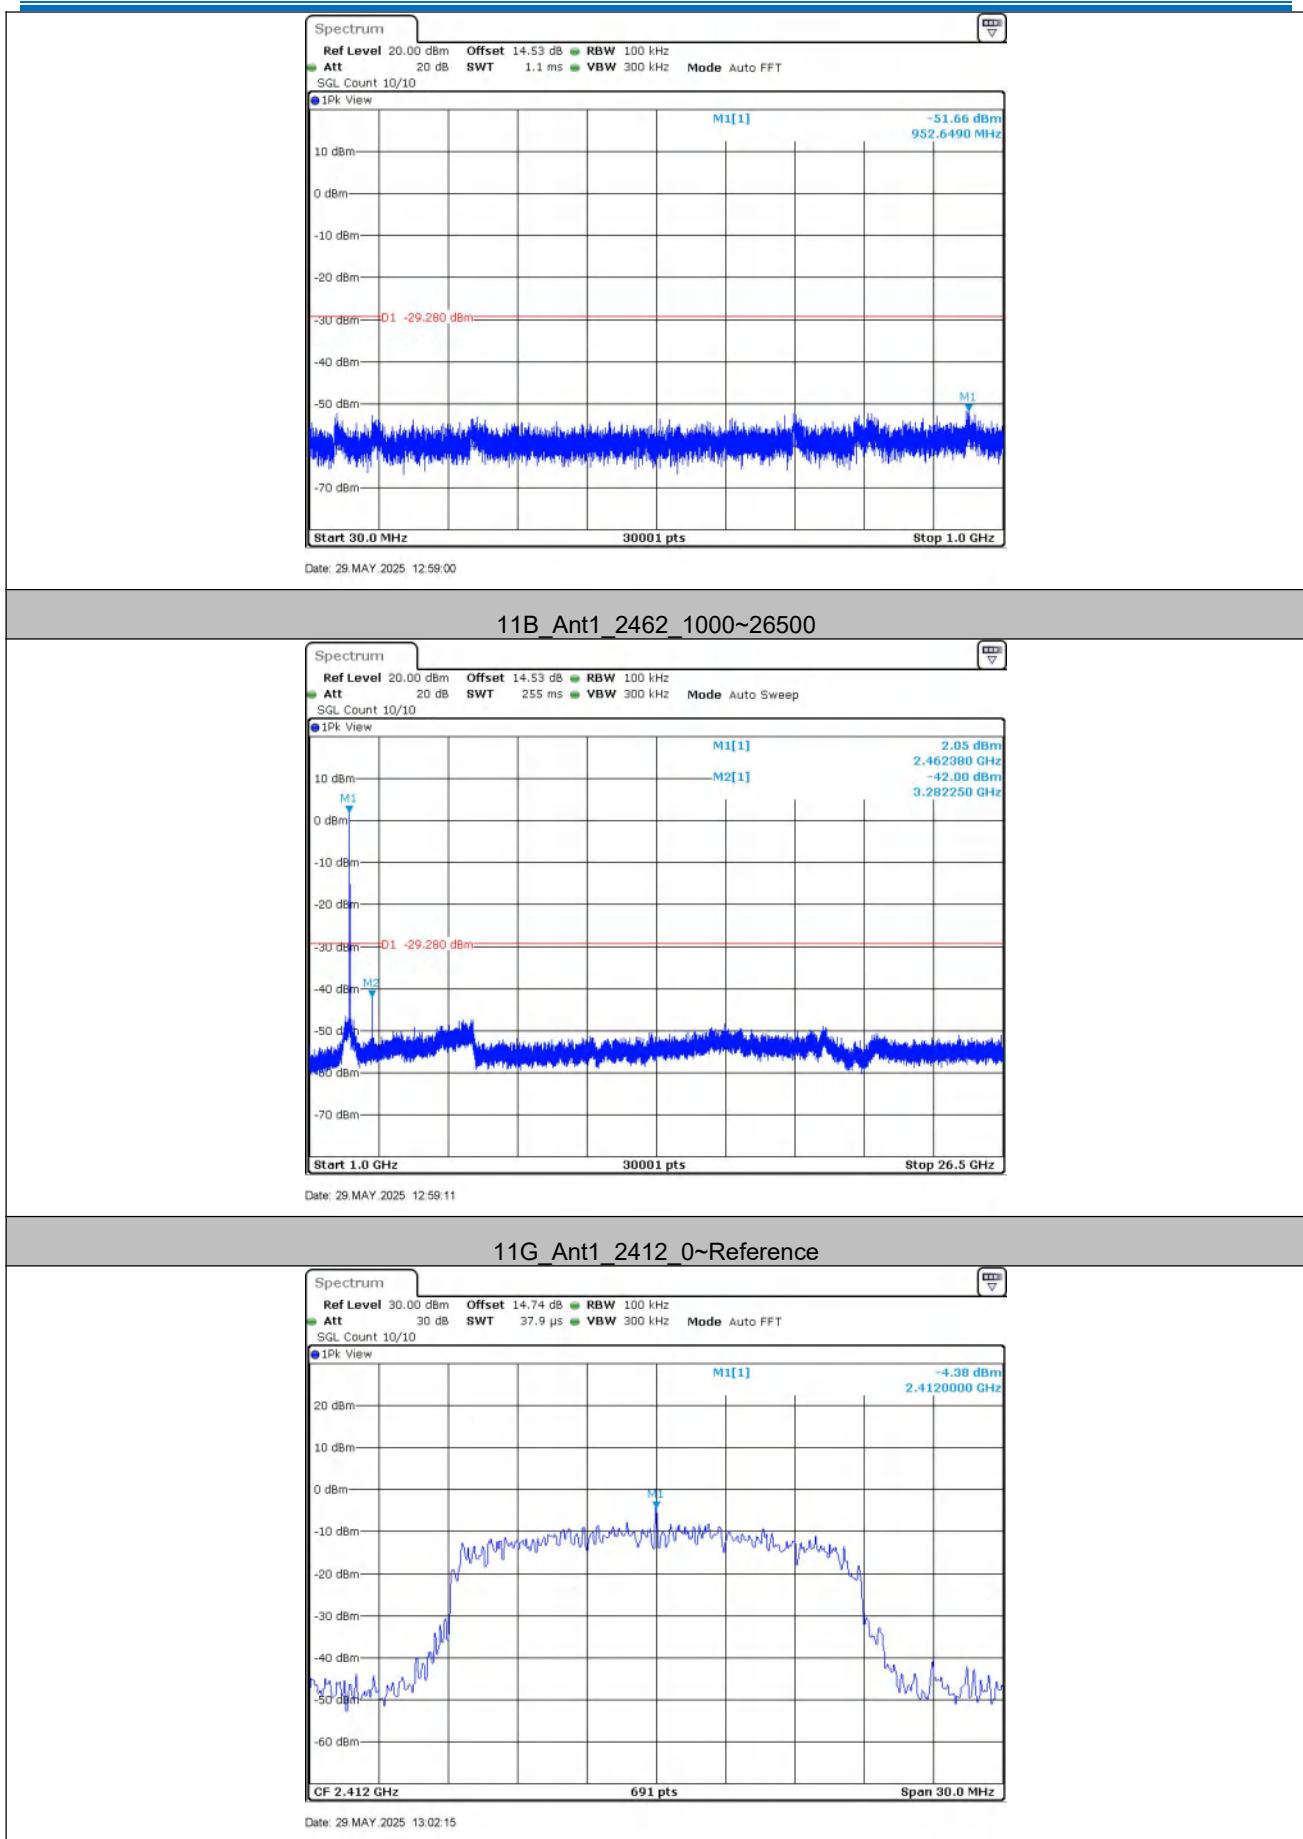


11G_Ant1_2412_30~1000


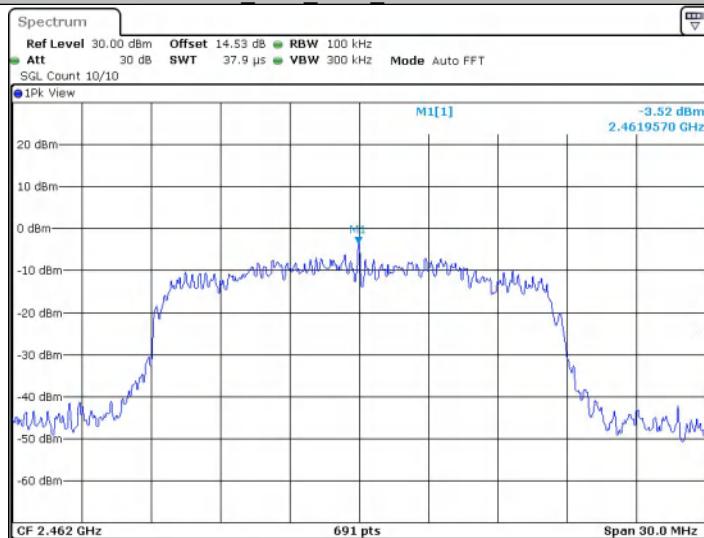
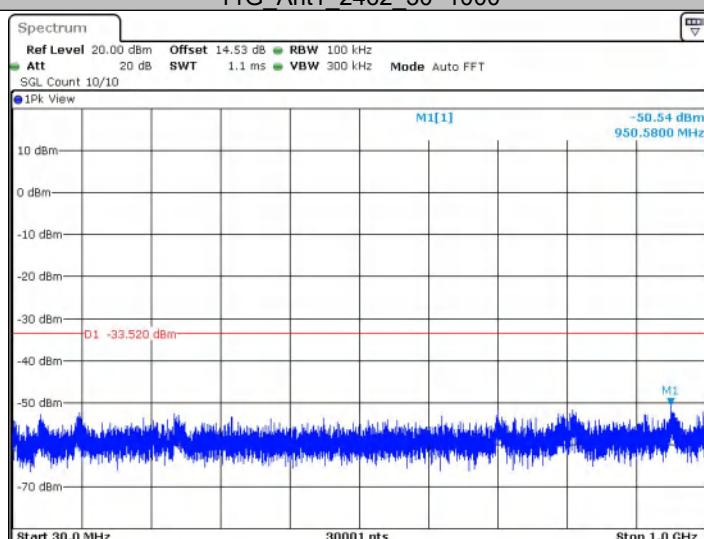
Date: 29 MAY 2025 13:02:19


11G_Ant1_2412_1000~26500


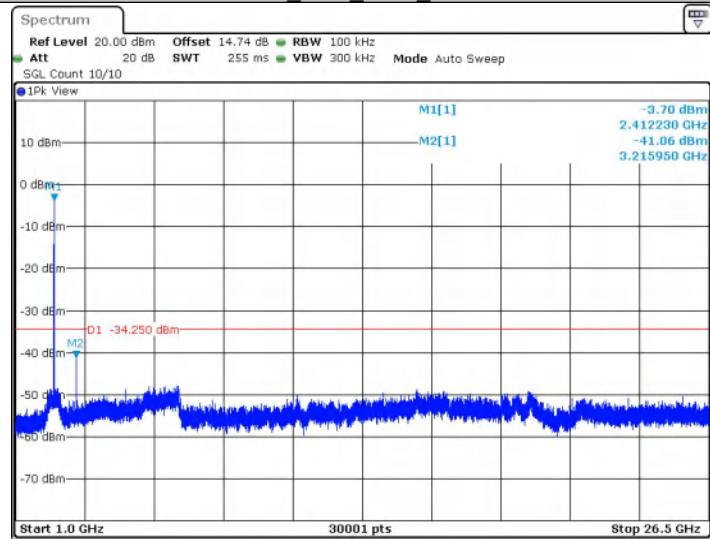
Date: 29 MAY 2025 13:02:30

11G_Ant1_2437_0~Reference

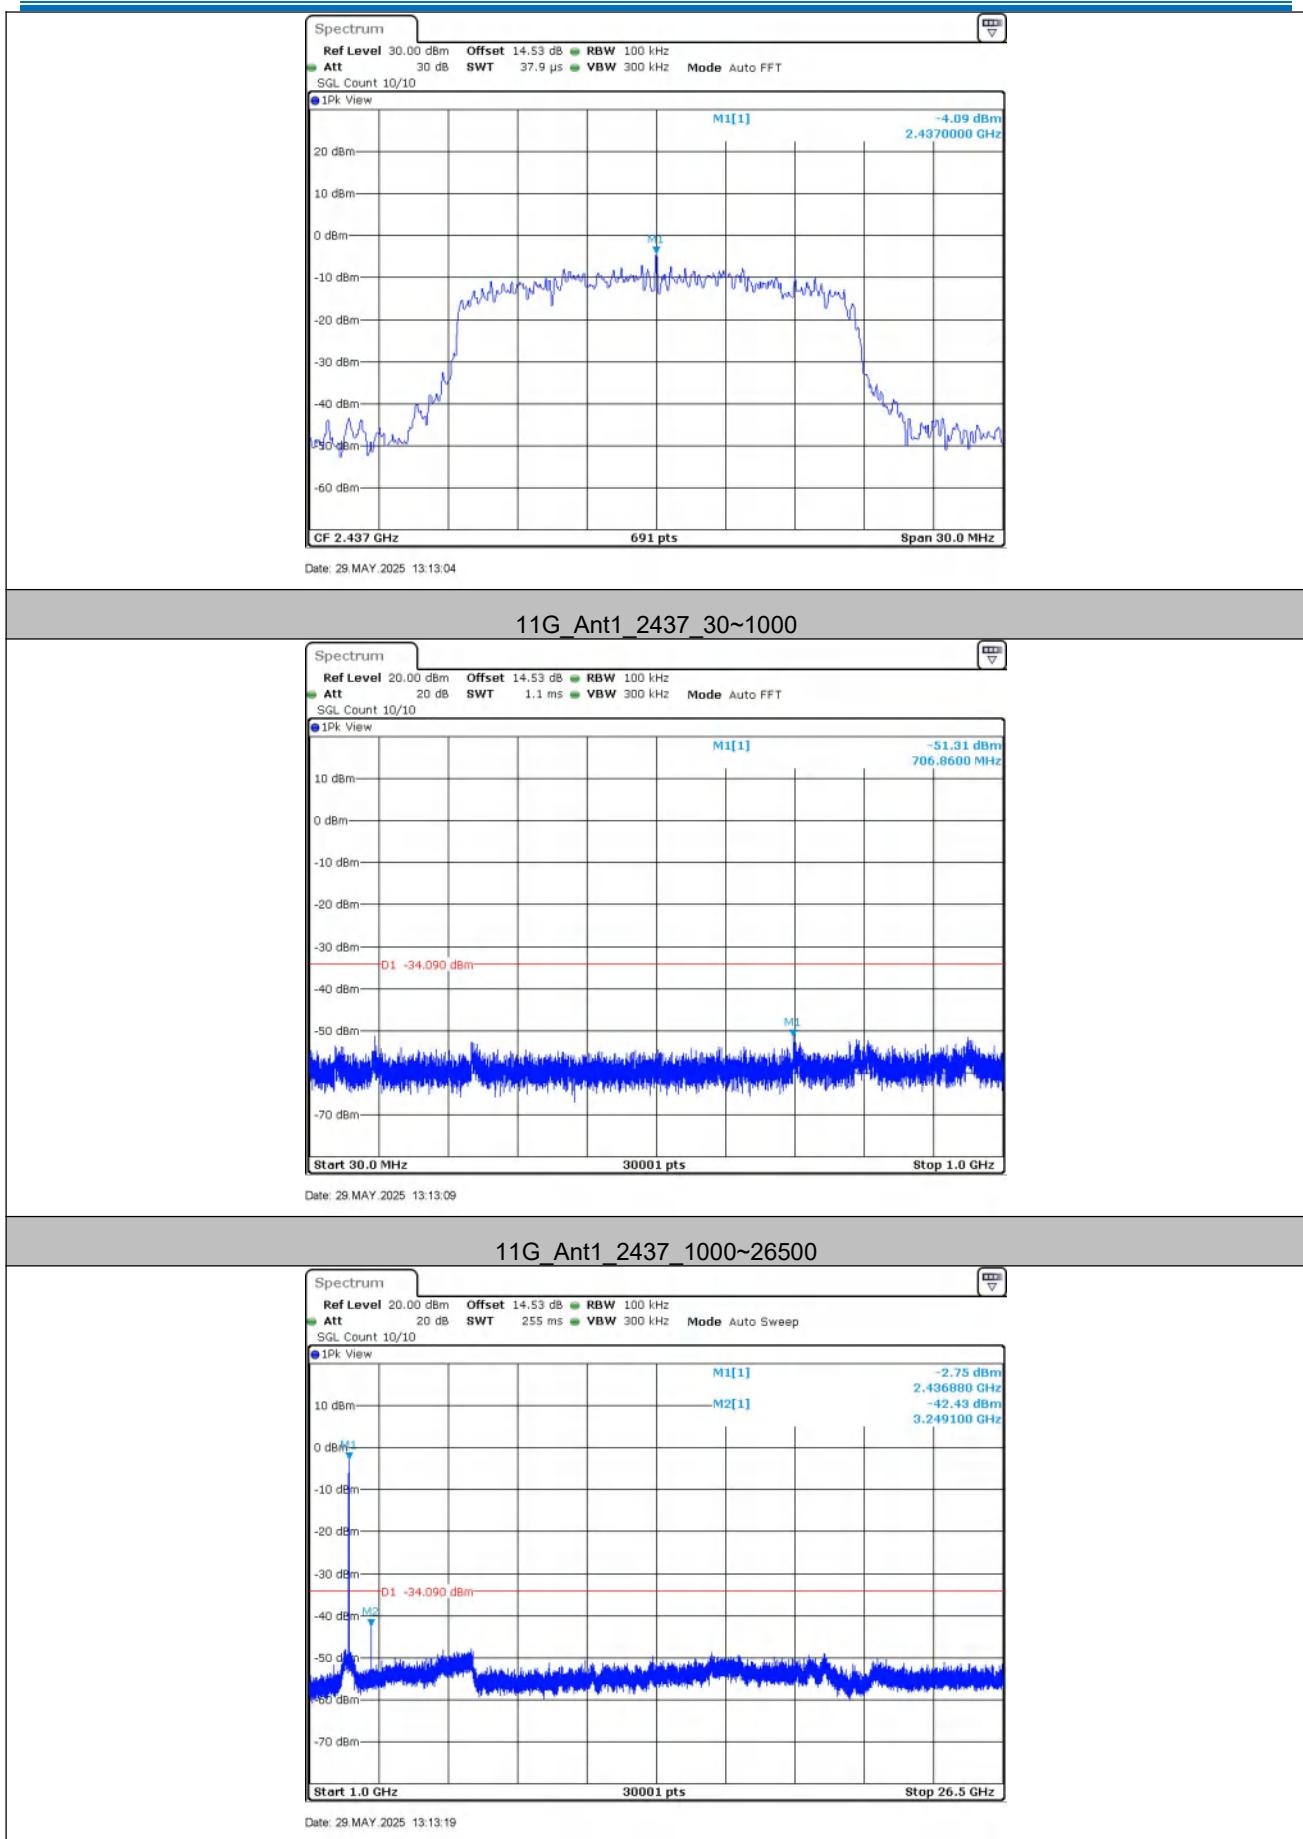


11G_Ant1_2462_0~Reference

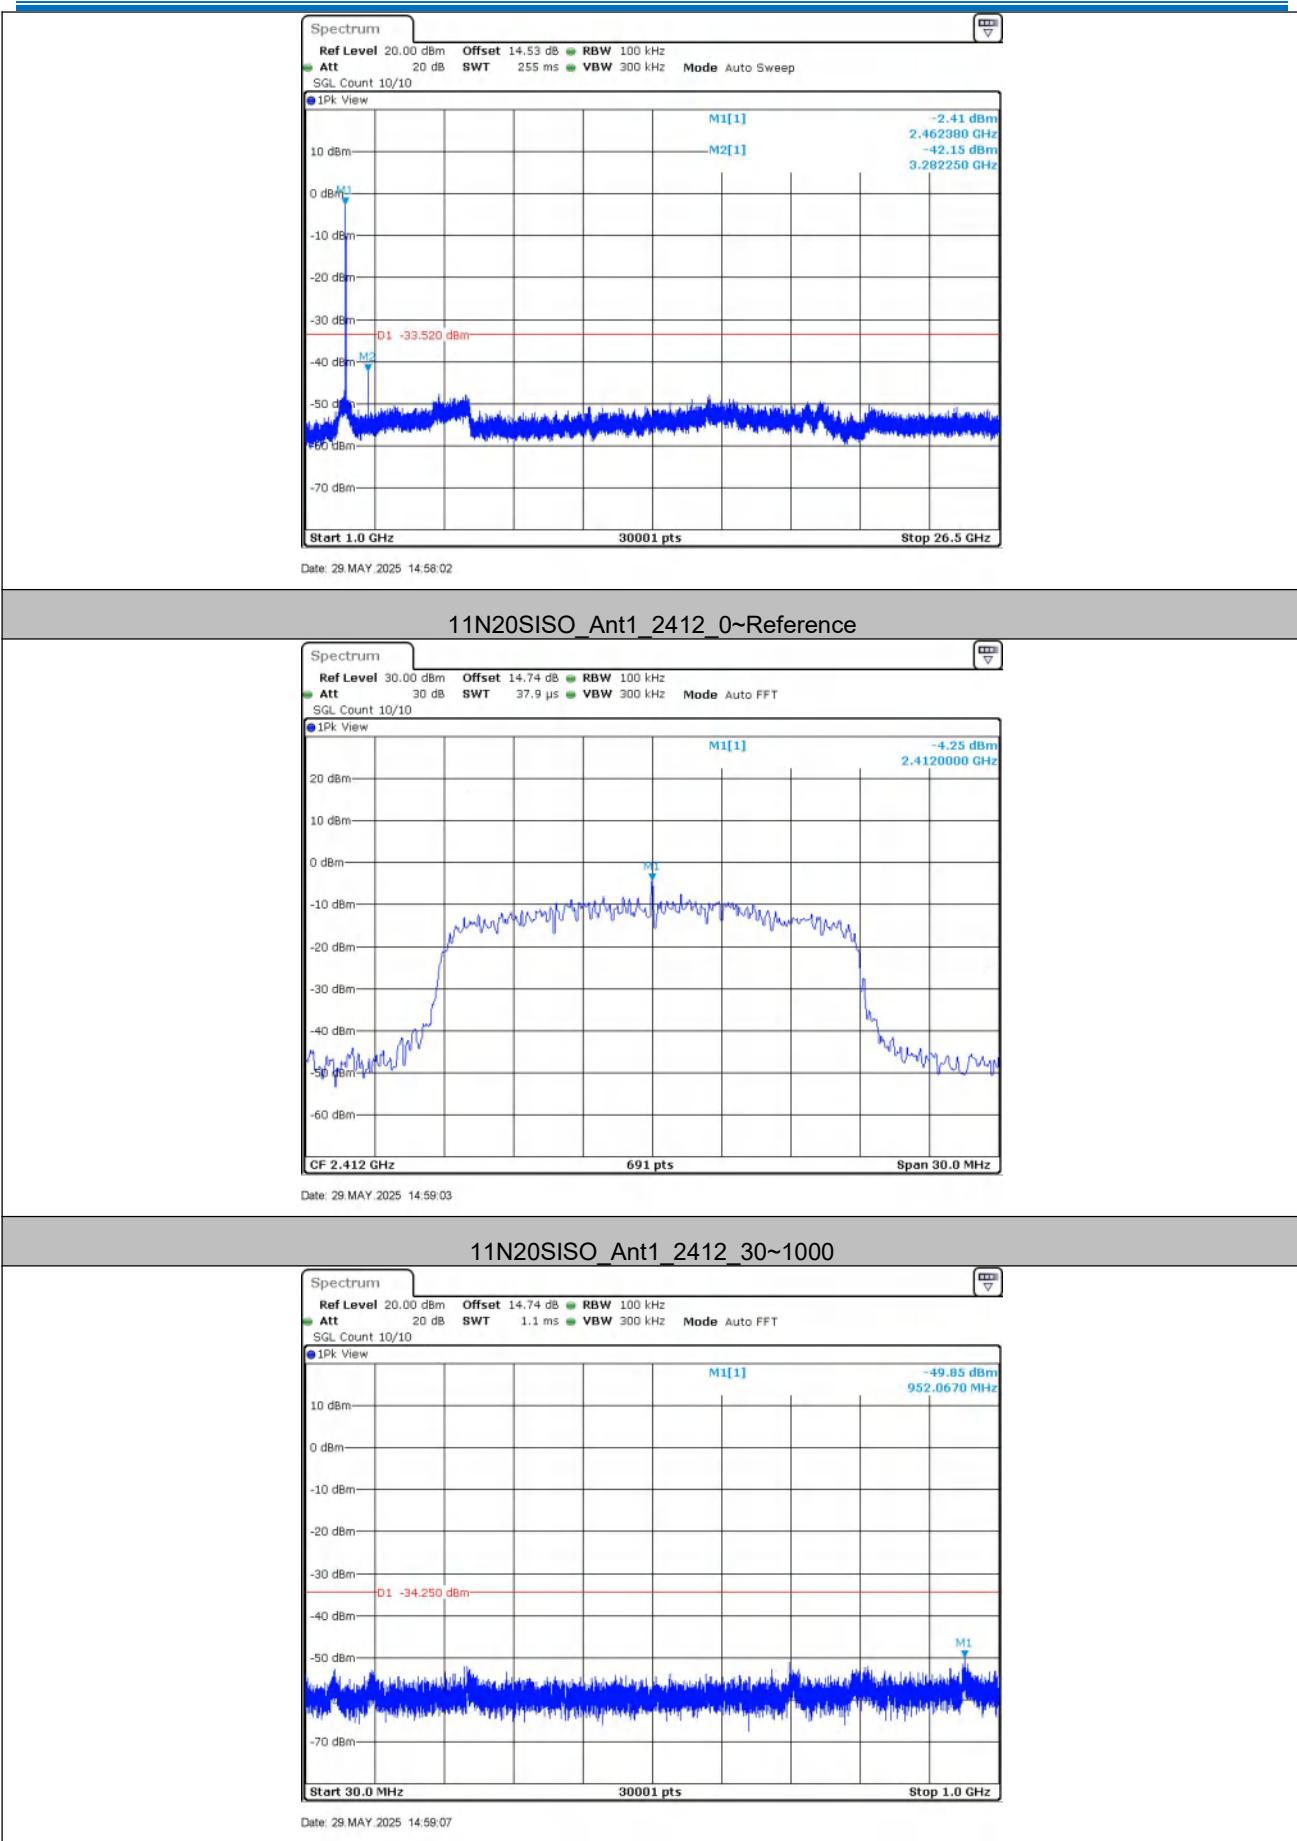11G_Ant1_2462_30~1000

11G_Ant1_2462_1000~26500

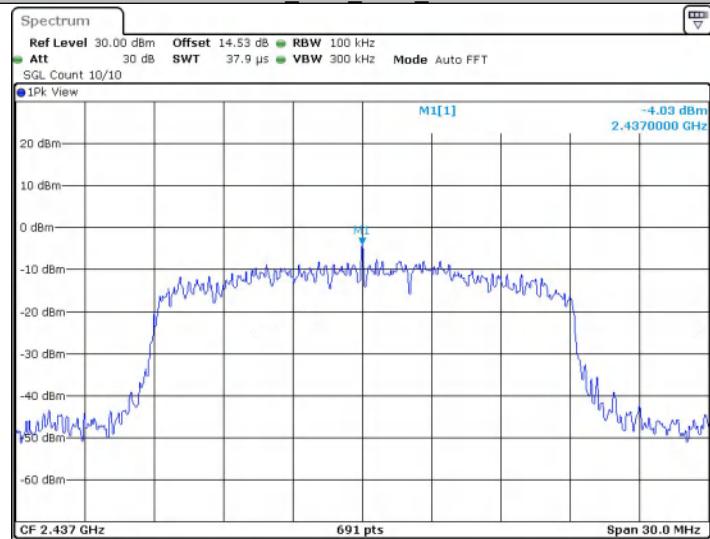


11N20SISO_Ant1_2412_1000~26500


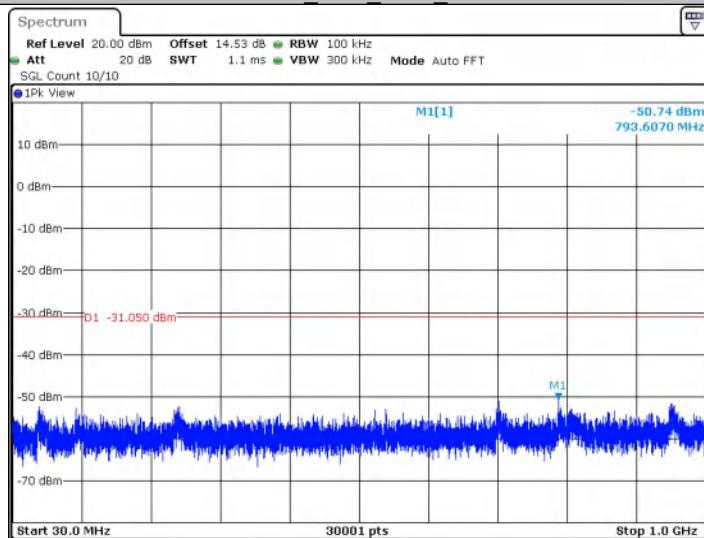
Date: 29 MAY 2025 14:59:18

11N20SISO_Ant1_2437_0~Reference


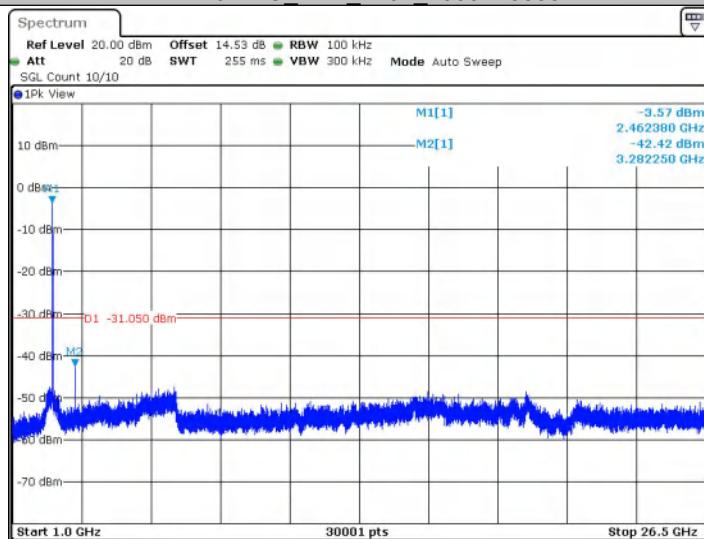
Date: 29 MAY 2025 15:02:04

11N20SISO_Ant1_2437_30~1000

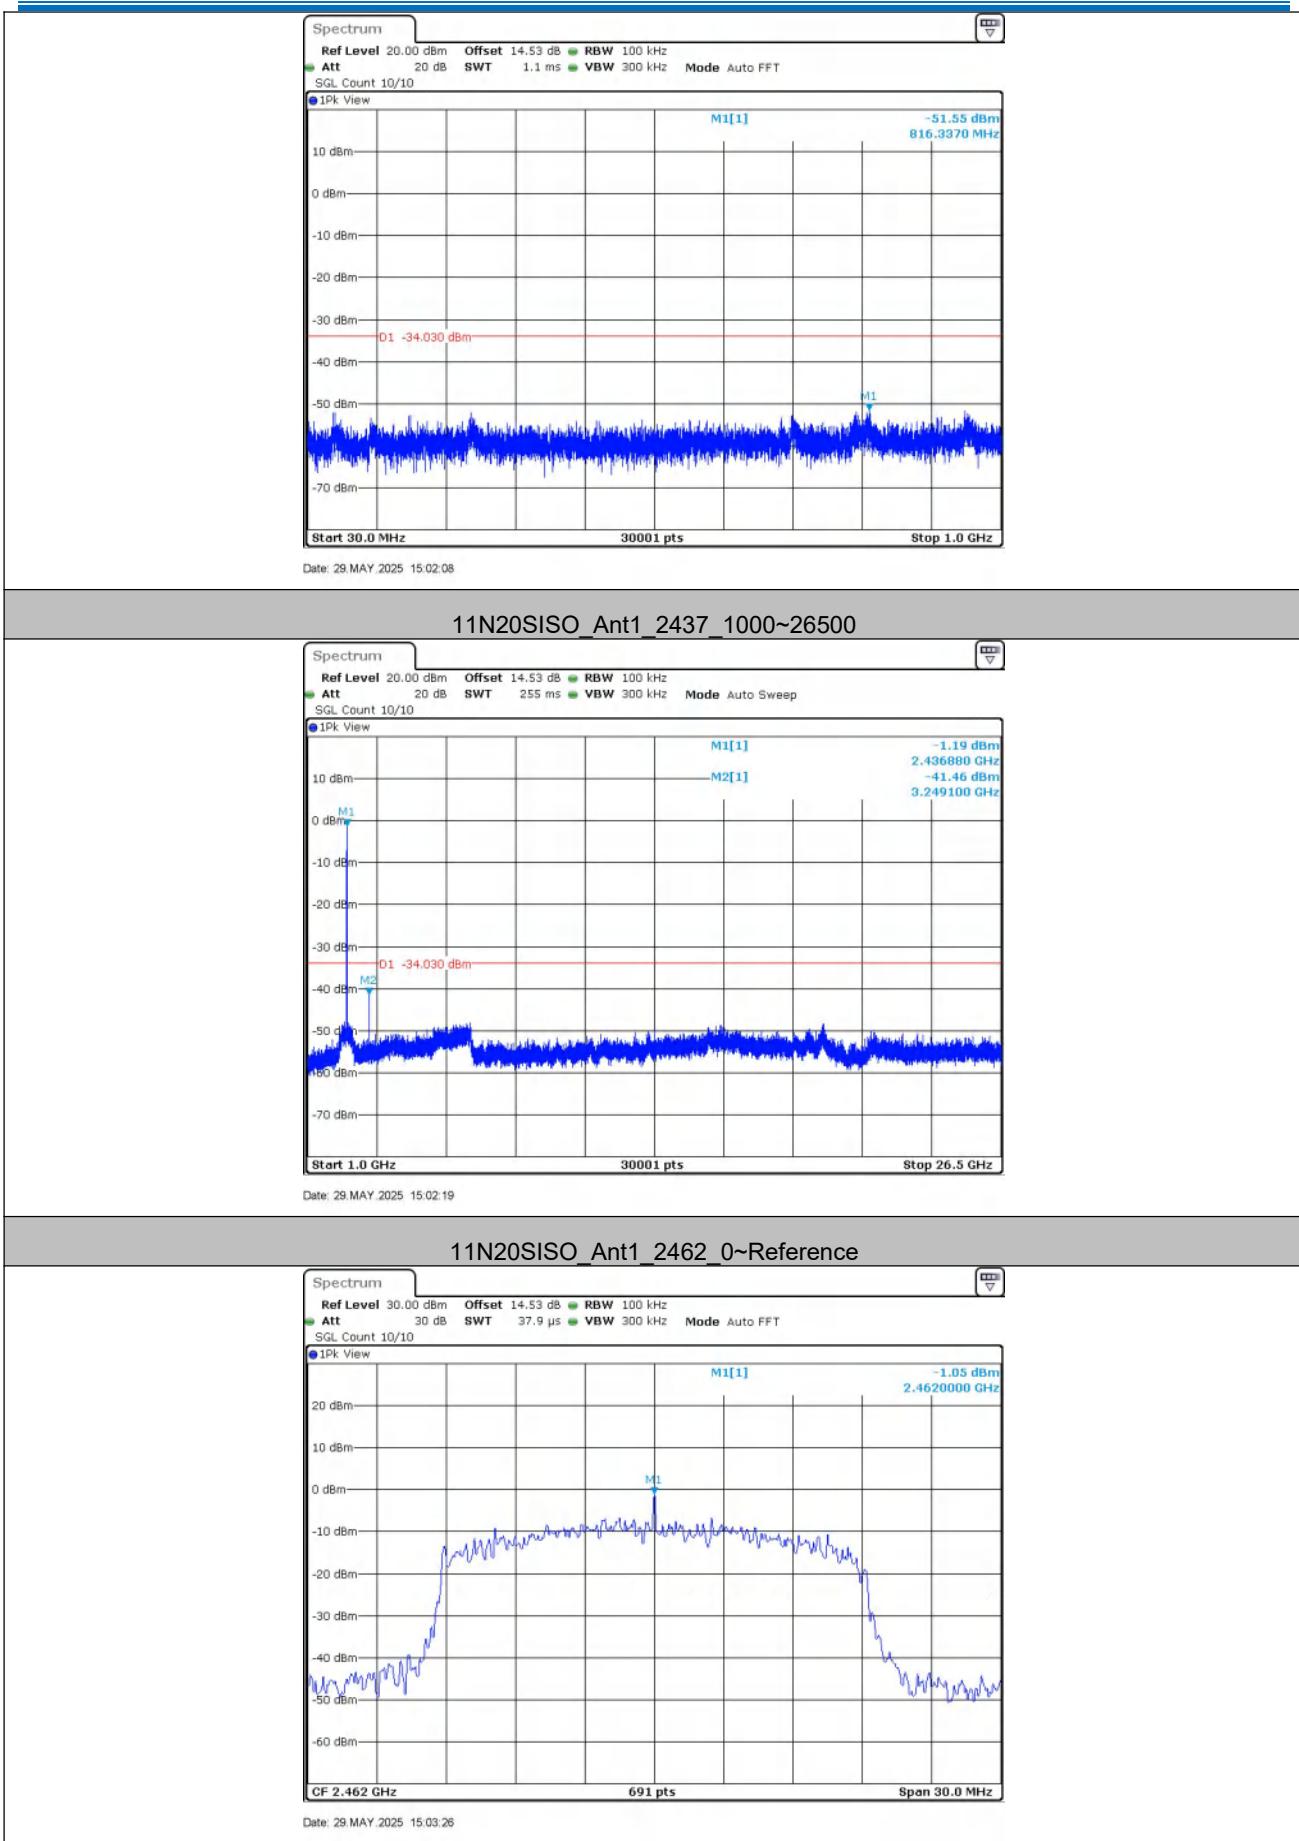

11N20SISO_Ant1_2462_30~1000


Date: 29 MAY 2025 15:03:31

11N20SISO_Ant1_2462_1000~26500


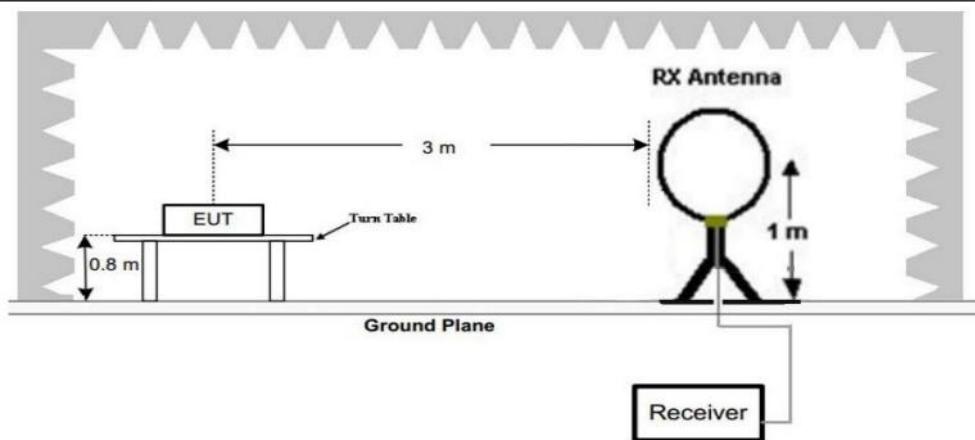
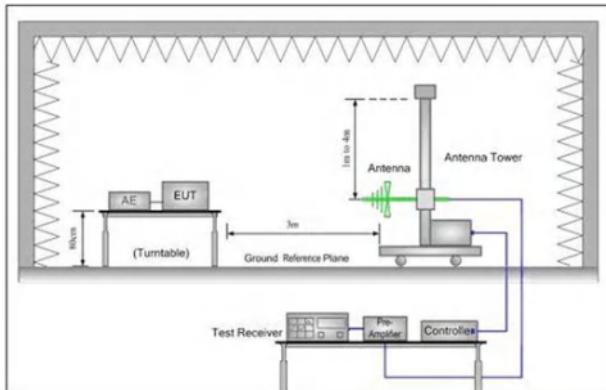
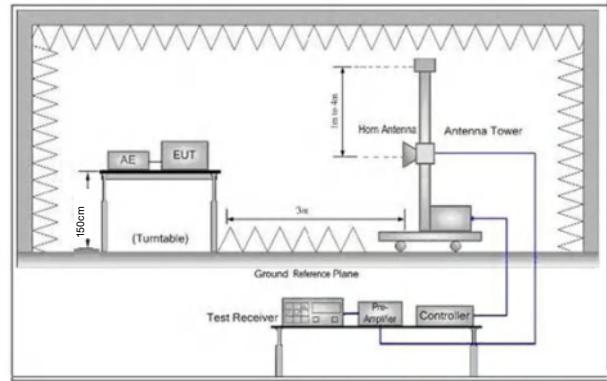
Date: 29 MAY 2025 15:03:41

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

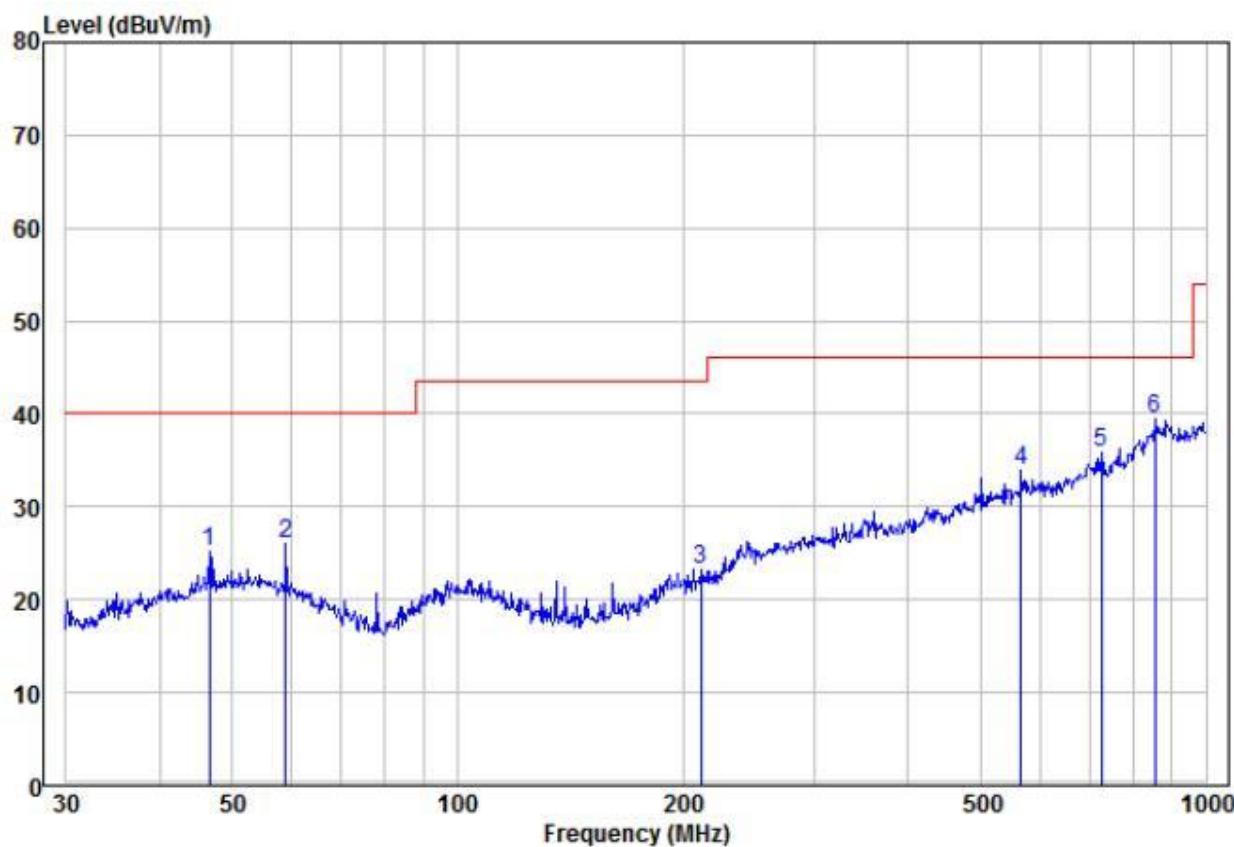
Test Setup:

Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz
Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	<p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case .</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.9.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical



Freq	Read			Limit		Over Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	Level	Factor	Level	dBuV/m						
1	46.67	12.00	13.20	25.20	40.00	-14.80	Peak		VERTICAL	100	177
2	59.03	12.96	13.06	26.02	40.00	-13.98	Peak		VERTICAL	100	23
3	211.53	9.93	13.33	23.26	43.50	-20.24	Peak		VERTICAL	100	96
4	566.62	11.36	22.64	34.00	46.00	-12.00	Peak		VERTICAL	100	158
5	724.26	11.28	24.64	35.92	46.00	-10.08	Peak		VERTICAL	100	51
6 pp	854.02	10.42	29.12	39.54	46.00	-6.46	Peak		VERTICAL	100	3


Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

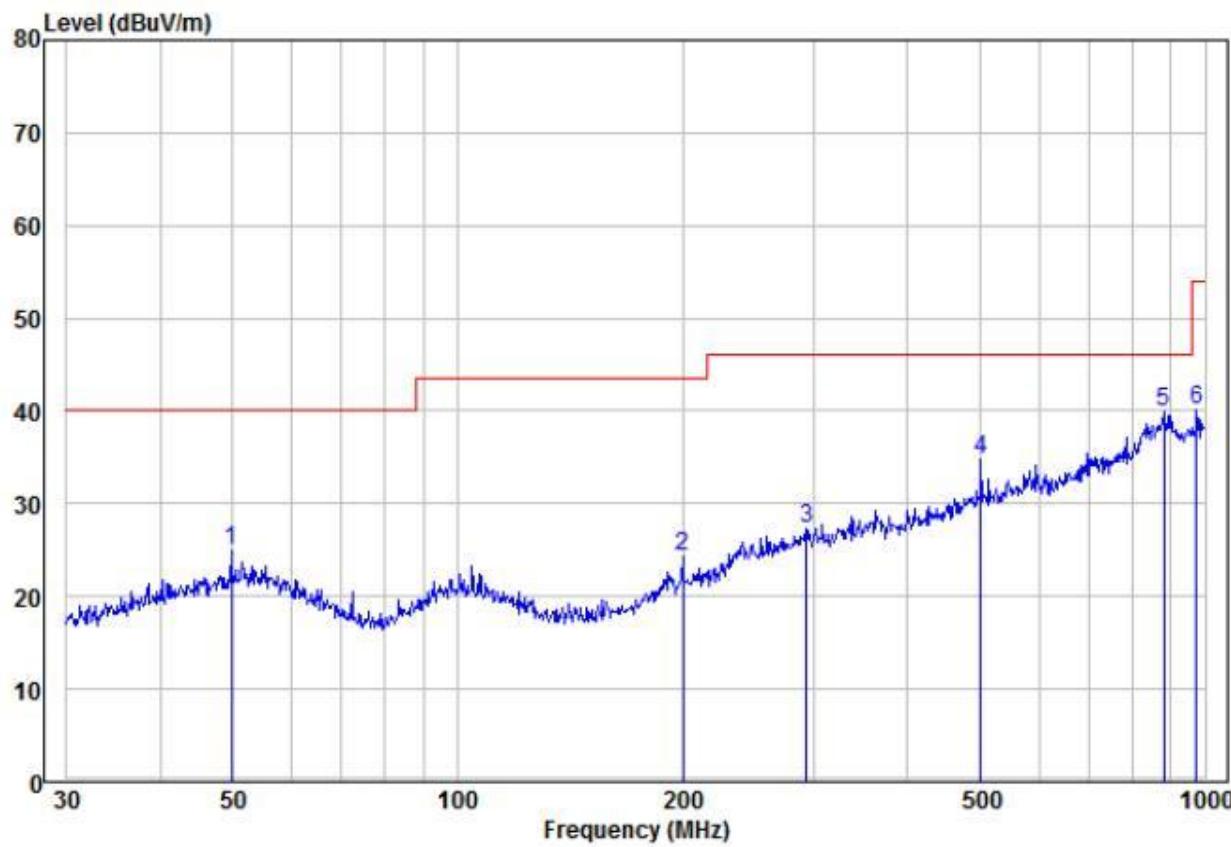Horizontal


Freq	Read			Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos	
	Freq	Level	Factor							
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	deg	
1	49.88	11.25	13.75	25.00	40.00	-15.00	Peak	HORIZONTAL	100	31
2	199.99	11.37	13.02	24.39	43.50	-19.11	Peak	HORIZONTAL	100	146
3	293.08	9.80	17.58	27.38	46.00	-18.62	Peak	HORIZONTAL	100	15
4	501.18	12.88	21.84	34.72	46.00	-11.28	Peak	HORIZONTAL	100	220
5 pp	881.41	10.41	29.52	39.93	46.00	-6.07	Peak	HORIZONTAL	100	109
6	975.75	11.20	28.96	40.16	54.00	-13.84	Peak	HORIZONTAL	100	306

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.9.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over (dB)	Detector Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
							H/V		
4824.000	53.32	-4.26	49.06	74	-24.94	peak	H	1.5	258
4824.000	37.20	-4.26	32.94	54	-21.06	AVG	H	1.5	81
7236.000	51.78	1.18	52.96	74	-21.04	peak	H	1.5	244
7236.000	38.73	1.18	39.91	54	-14.09	AVG	H	1.5	55
4824.000	54.61	-4.26	50.35	74	-23.65	peak	V	1.5	242
4824.000	38.29	-4.26	34.03	54	-19.97	AVG	V	1.5	323
7236.000	51.03	1.18	52.21	74	-21.79	peak	V	1.5	135
7236.000	35.90	1.18	37.08	54	-16.92	AVG	V	1.5	198

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over (dB)	Detector or Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
							H/V		
4874.000	52.62	-4.12	48.50	74	-25.50	peak	H	1.5	223
4874.000	36.14	-4.12	32.02	54	-21.98	AVG	H	1.5	265
7311.000	49.12	1.46	50.58	74	-23.42	peak	H	1.5	243
7311.000	36.52	1.46	37.98	54	-16.02	AVG	H	1.5	237
4874.000	54.01	-4.12	49.89	74	-24.11	peak	V	1.5	171
4874.000	37.28	-4.12	33.16	54	-20.84	AVG	V	1.5	297
7311.000	48.43	1.46	49.89	74	-24.11	peak	V	1.5	314
7311.000	35.66	1.46	37.12	54	-16.88	AVG	V	1.5	215

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor	Emission Level (dB μ V/m)	Limits	Over (dB)	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
		(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		(m)	(Degree)	
4924.000	51.33	-4.03	47.30	74	-26.70	peak	H	1.5	94
4924.000	37.92	-4.03	33.89	54	-20.11	AVG	H	1.5	274
7386.000	51.14	1.66	52.80	74	-21.20	peak	H	1.5	119
7386.000	37.42	1.66	39.08	54	-14.92	AVG	H	1.5	33
4924.000	55.23	-4.03	51.20	74	-22.80	peak	V	1.5	292
4924.000	37.15	-4.03	33.12	54	-20.88	AVG	V	1.5	245
7386.000	49.85	1.66	51.51	74	-22.49	peak	V	1.5	196
7386.000	36.68	1.66	38.34	54	-15.66	AVG	V	1.5	113

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detect or Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
							H/V		
4824.000	53.11	-4.26	48.85	74	-25.15	peak	H	1.5	230
4824.000	36.97	-4.26	32.71	54	-21.29	AVG	H	1.5	243
7236.000	52.05	1.18	53.23	74	-20.77	peak	H	1.5	45
7236.000	37.59	1.18	38.77	54	-15.23	AVG	H	1.5	4
4824.000	54.92	-4.26	50.66	74	-23.34	peak	V	1.5	33
4824.000	38.28	-4.26	34.02	54	-19.98	AVG	V	1.5	270
7236.000	50.82	1.18	52.00	74	-22.00	peak	V	1.5	111
7236.000	36.81	1.18	37.99	54	-16.01	AVG	V	1.5	71

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detect or Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
							H/V		
4874.000	51.49	-4.12	47.37	74	-26.63	peak	H	1.5	260
4874.000	36.80	-4.12	32.68	54	-21.32	AVG	H	1.5	118
7311.000	48.88	1.46	50.34	74	-23.66	peak	H	1.5	173
7311.000	36.63	1.46	38.09	54	-15.91	AVG	H	1.5	196
4874.000	53.10	-4.12	48.98	74	-25.02	peak	V	1.5	198
4874.000	37.44	-4.12	33.32	54	-20.68	AVG	V	1.5	79
7311.000	50.11	1.46	51.57	74	-22.43	peak	V	1.5	101
7311.000	36.98	1.46	38.44	54	-15.56	AVG	V	1.5	228

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor	Emission Level (dB μ V/m)	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
		(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
4924.000	52.87	-4.03	48.84	74	-25.16	peak	H	1.5	56
4924.000	38.65	-4.03	34.62	54	-19.38	AVG	H	1.5	221
7386.000	49.77	1.66	51.43	74	-22.57	peak	H	1.5	20
7386.000	36.62	1.66	38.28	54	-15.72	AVG	H	1.5	197
4924.000	53.87	-4.03	49.84	74	-24.16	peak	V	1.5	59
4924.000	38.36	-4.03	34.33	54	-19.67	AVG	V	1.5	354
7386.000	49.27	1.66	50.93	74	-23.07	peak	V	1.5	337
7386.000	36.89	1.66	38.55	54	-15.45	AVG	V	1.5	193

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
							H/V		
4824.000	53.35	-4.26	49.09	74	-24.91	peak	H	1.5	57
4824.000	36.21	-4.26	31.95	54	-22.05	AVG	H	1.5	319
7236.000	51.93	1.18	53.11	74	-20.89	peak	H	1.5	77
7236.000	37.43	1.18	38.61	54	-15.39	AVG	H	1.5	158
4824.000	54.44	-4.26	50.18	74	-23.82	peak	V	1.5	213
4824.000	38.12	-4.26	33.86	54	-20.14	AVG	V	1.5	36
7236.000	51.79	1.18	52.97	74	-21.03	peak	V	1.5	131
7236.000	36.20	1.18	37.38	54	-16.62	AVG	V	1.5	1

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
							H/V		
4874.000	51.58	-4.12	47.46	74	-26.54	peak	H	1.5	36
4874.000	36.24	-4.12	32.12	54	-21.88	AVG	H	1.5	44
7311.000	48.27	1.46	49.73	74	-24.27	peak	H	1.5	308
7311.000	36.11	1.46	37.57	54	-16.43	AVG	H	1.5	197
4874.000	52.80	-4.12	48.68	74	-25.32	peak	V	1.5	103
4874.000	36.84	-4.12	32.72	54	-21.28	AVG	V	1.5	225
7311.000	50.00	1.46	51.46	74	-22.54	peak	V	1.5	93
7311.000	36.54	1.46	38.00	54	-16.00	AVG	V	1.5	222

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor	Emission Level (dB μ V/m)	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
		(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.68	-4.03	47.65	74	-26.35	peak	H	1.5	35
4924.000	38.82	-4.03	34.79	54	-19.21	AVG	H	1.5	349
7386.000	50.84	1.66	52.50	74	-21.50	peak	H	1.5	249
7386.000	37.13	1.66	38.79	54	-15.21	AVG	H	1.5	23
4924.000	54.87	-4.03	50.84	74	-23.16	peak	V	1.5	358
4924.000	38.55	-4.03	34.52	54	-19.48	AVG	V	1.5	77
7386.000	50.65	1.66	52.31	74	-21.69	peak	V	1.5	118
7386.000	37.90	1.66	39.56	54	-14.44	AVG	V	1.5	51

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

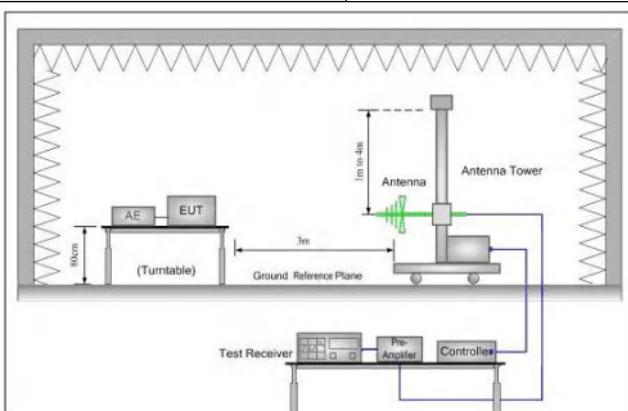


Figure 1. 30MHz to 1GHz

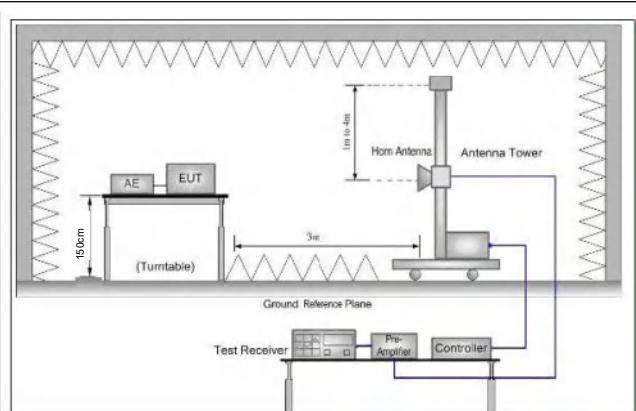


Figure 2. Above 1 GHz

Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p> <p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and</p>
-----------------	--

	<p>then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <ul style="list-style-type: none"> e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	<p>Transmitting with all kind of modulations, data rates. Transmitting mode.</p>
Final Test Mode:	<p>Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.</p>
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.70	-9.2	49.50	74	-24.50	peak	H	1.5	349
2390.000	44.72	-9.2	35.52	54	-18.48	AVG	H	1.5	78
2400.000	59.80	-9.39	50.41	74	-23.59	peak	H	1.5	277
2400.000	46.44	-9.39	37.05	54	-16.95	AVG	H	1.5	313
2390.000	58.47	-9.2	49.27	74	-24.73	peak	V	1.5	128
2390.000	44.47	-9.2	35.27	54	-18.73	AVG	V	1.5	299
2400.000	59.57	-9.39	50.18	74	-23.82	peak	V	1.5	12
2400.000	46.02	-9.39	36.63	54	-17.37	AVG	V	1.5	213

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2483.500	58.34	-9.29	49.05	74	-24.95	peak	H	1.5	192
2483.500	44.44	-9.29	35.15	54	-18.85	AVG	H	1.5	172
2483.500	57.96	-9.29	48.67	74	-25.33	peak	V	1.5	1
2483.500	45.79	-9.29	36.50	54	-17.50	AVG	V	1.5	198

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2390.000	59.24	-9.2	50.04	74	-23.96	peak	H	1.5	179
2390.000	44.37	-9.2	35.17	54	-18.83	AVG	H	1.5	6
2400.000	59.36	-9.39	49.97	74	-24.03	peak	H	1.5	147
2400.000	46.10	-9.39	36.71	54	-17.29	AVG	H	1.5	99
2390.000	58.67	-9.2	49.47	74	-24.53	peak	V	1.5	293
2390.000	44.28	-9.2	35.08	54	-18.92	AVG	V	1.5	214
2400.000	59.41	-9.39	50.02	74	-23.98	peak	V	1.5	16
2400.000	46.39	-9.39	37.00	54	-17.00	AVG	V	1.5	5

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.98	-9.29	48.69	74	-25.31	peak	H	1.5	135
2483.500	43.99	-9.29	34.70	54	-19.30	AVG	H	1.5	314
2483.500	58.14	-9.29	48.85	74	-25.15	peak	V	1.5	227
2483.500	45.57	-9.29	36.28	54	-17.72	AVG	V	1.5	289

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor	Emission Level (dB μ V/m)	Limits	Over	Detector Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
		(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.31	-9.2	49.11	74	-24.89	peak	H	1.5	340
2390.000	44.76	-9.2	35.56	54	-18.44	AVG	H	1.5	127
2400.000	59.35	-9.39	49.96	74	-24.04	peak	H	1.5	11
2400.000	46.93	-9.39	37.54	54	-16.46	AVG	H	1.5	110
2390.000	58.59	-9.2	49.39	74	-24.61	peak	V	1.5	88
2390.000	44.20	-9.2	35.00	54	-19.00	AVG	V	1.5	231
2400.000	60.04	-9.39	50.65	74	-23.35	peak	V	1.5	305
2400.000	46.84	-9.39	37.45	54	-16.55	AVG	V	1.5	296

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor	Emission Level (dB μ V/m)	Limits	Over	Detector Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
		(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.52	-9.29	48.23	74	-25.77	peak	H	1.5	101
2483.500	43.54	-9.29	34.25	54	-19.75	AVG	H	1.5	27
2483.500	58.38	-9.29	49.09	74	-24.91	peak	V	1.5	324
2483.500	46.40	-9.29	37.11	54	-16.89	AVG	V	1.5	137

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

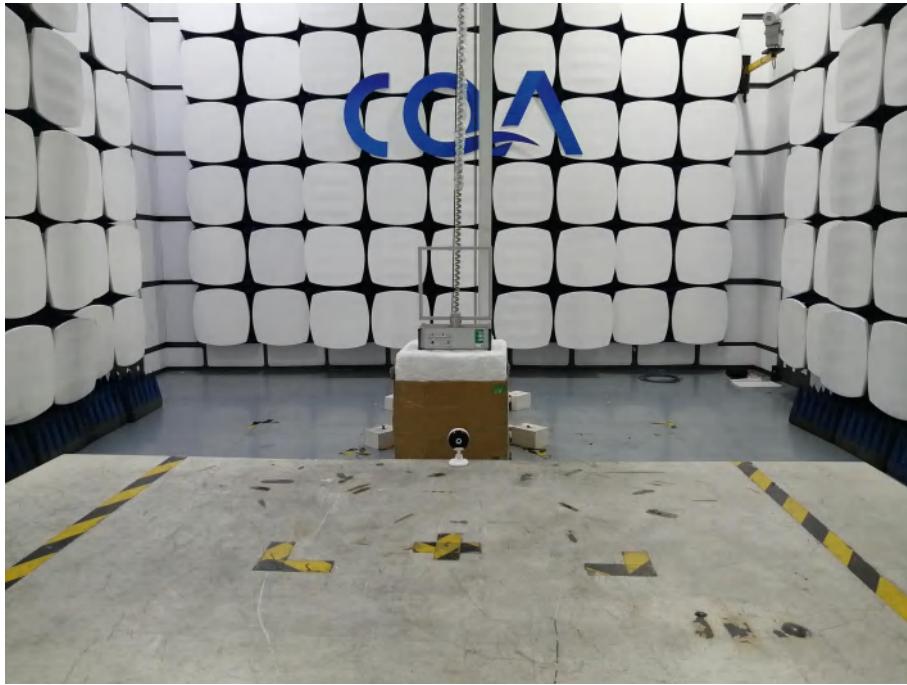

30MHz~1GHz:

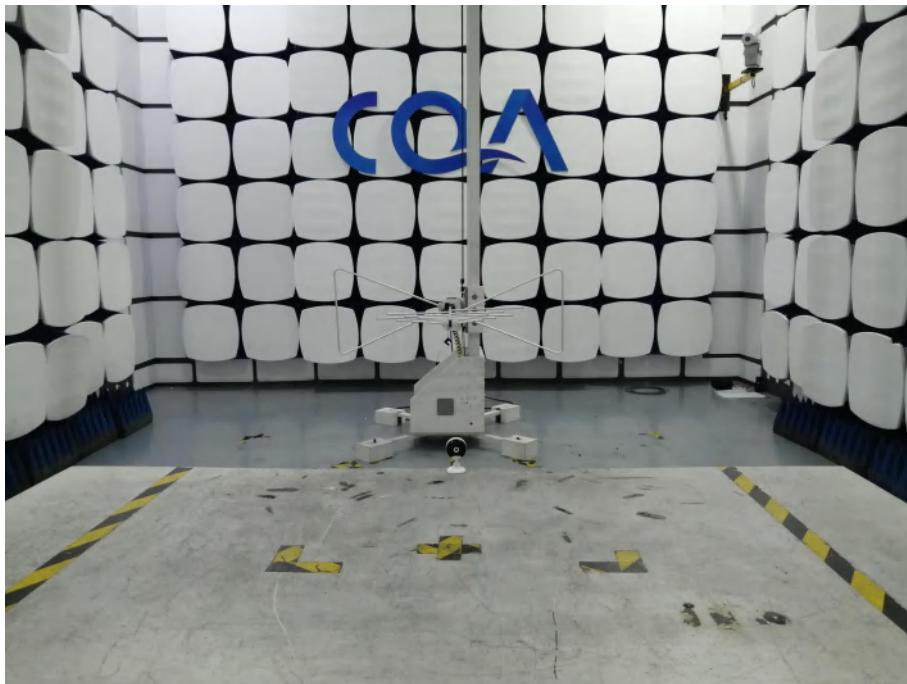


Above 1GHz:



6.2 Conducted Emission



6.3 RF Conducted measurement

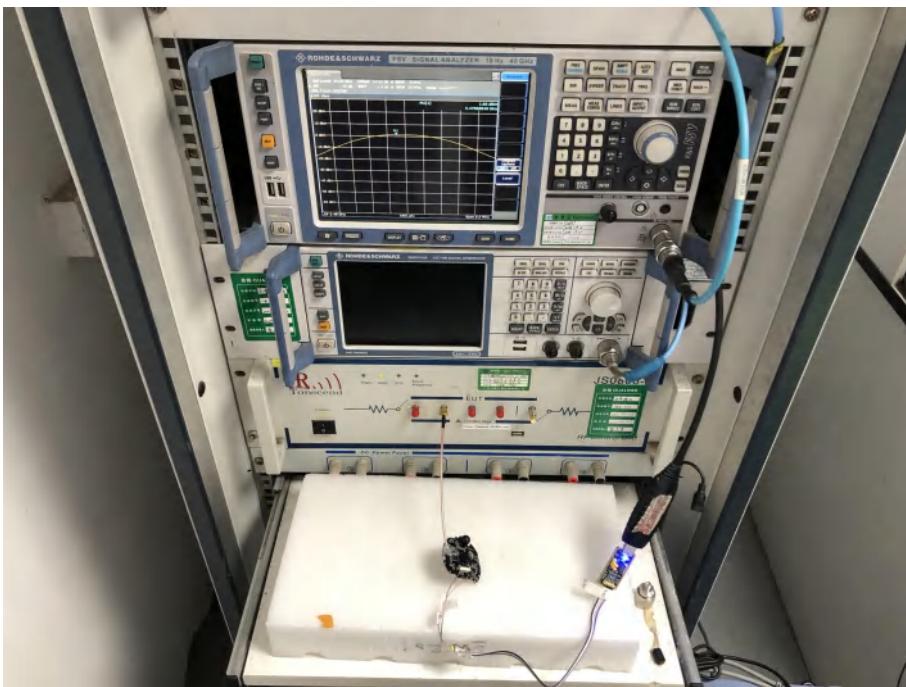

7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20250501165E-01.

*** END OF REPORT ***