



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20220400584E-01
Applicant: SHENZHEN XINWU TECHNOLOGY LIMITED
Address of Applicant: Floor 5, Building 2, Chungu Science park, Meisheng Huigu Science Park, 83 Dabao Road, Baoan District
Equipment Under Test (EUT):
Product: Smart Doorbell X9
Model No.: XW133-X1, XW133-X2, XW133-X3, XW133-X4, XW133-X5, XW133-X6, XW133-X7, XW133-X8, XW133-X9, XW133-X10
Test Model No.: XW133-X9
Brand Name: N/A
FCC ID: 2AW97-XW133
Standards: 47 CFR Part 15, Subpart C
Date of Receipt: 2022-2-18
Date of Test: 2022-2-18 to 2022-4-25
Date of Issue: 2022-4-28
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Rock Huang

(Rock Huang)

Approved By:

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20220400584E-01	Rev.01	Initial report	2022-4-28

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST ENVIRONMENT AND MODE	8
4.5 DESCRIPTION OF SUPPORT UNITS	16
4.6 TEST LOCATION	16
4.7 TEST FACILITY	16
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY	17
4.9 DEVIATION FROM STANDARDS	17
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	17
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	17
4.12 EQUIPMENT LIST	18
5 TEST RESULTS AND MEASUREMENT DATA	19
5.1 ANTENNA REQUIREMENT	19
5.2 CONDUCTED EMISSIONS	20
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	24
<i>Test Result</i>	25
<i>Test Graphs</i>	26
5.4 6dB OCCUPY BANDWIDTH	32
<i>Test Result</i>	33
<i>Test Graphs</i>	34
5.5 POWER SPECTRAL DENSITY	40
<i>Test Result</i>	41
<i>Test Graphs</i>	42
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	48
<i>Test Result</i>	49
5.7 RF CONDUCTED SPURIOUS EMISSIONS	54
<i>Test Result</i>	55
<i>Test Graphs</i>	57
5.8 RADIATED SPURIOUS EMISSIONS	75
5.8.1 Radiated emission below 1GHz	78
5.8.2 Transmitter emission above 1GHz	80
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	82
6 PHOTOGRAPHS - EUT TEST SETUP	88
6.1 RADIATED SPURIOUS EMISSION	88
6.2 CONDUCTED EMISSION	89
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	90

4 General Information

4.1 Client Information

Applicant:	SHENZHEN XINWU TECHNOLOGY LIMITED
Address of Applicant:	Floor 5, Building 2, Chungu Science park, Meisheng Huigu Science Park, 83 Dabao Road, Baoan District
Manufacturer:	SHENZHEN XINWU TECHNOLOGY LIMITED
Address of Manufacturer:	Floor 5, Building 2, Chungu Science park, Meisheng Huigu Science Park, 83 Dabao Road, Baoan District
Factory:	KEITHY INNOVATION TECHNOLOGY CO.,LTD
Address of Factory:	Room 1588 electronic technology building, Block C, No.2070 shennan mid road, futian shenzhen

4.2 General Description of EUT

Product Name:	Smart Doorbell X9
Model No.:	XW133-X1, XW133-X2, XW133-X3, XW133-X4, XW133-X5, XW133-X6, XW133-X7, XW133-X8, XW133-X9, XW133-X10
Test Model No.:	XW133-X9
Trade Mark:	N/A
Software Version:	XW133-X9_V1.5
Hardware Version:	XW133-X9-P0_V1.0&XW133-X9-P1_V1.0
Power Supply:	lithium battery:DC 3.7V 750mA form DC 5V adapter
EUT Supports Radios application:	BLE: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz 433.92MHz

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) :

	13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location
Test Software of EUT:	Wifi Test Tool v1.6.5
Antenna Type:	PCB antenna
Antenna Gain:	2dBi

NOTE:

Model No.: XW133-X1,XW133-X2,XW133-X3,XW133-X4,XW133-X5,XW133-X6,
XW133-X7,XW133-X8,XW133-X9,XW133-X10

Their electrical circuit design, layout, components used and internal wiring are identical,
Only the model is different.

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz


Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Run Software:

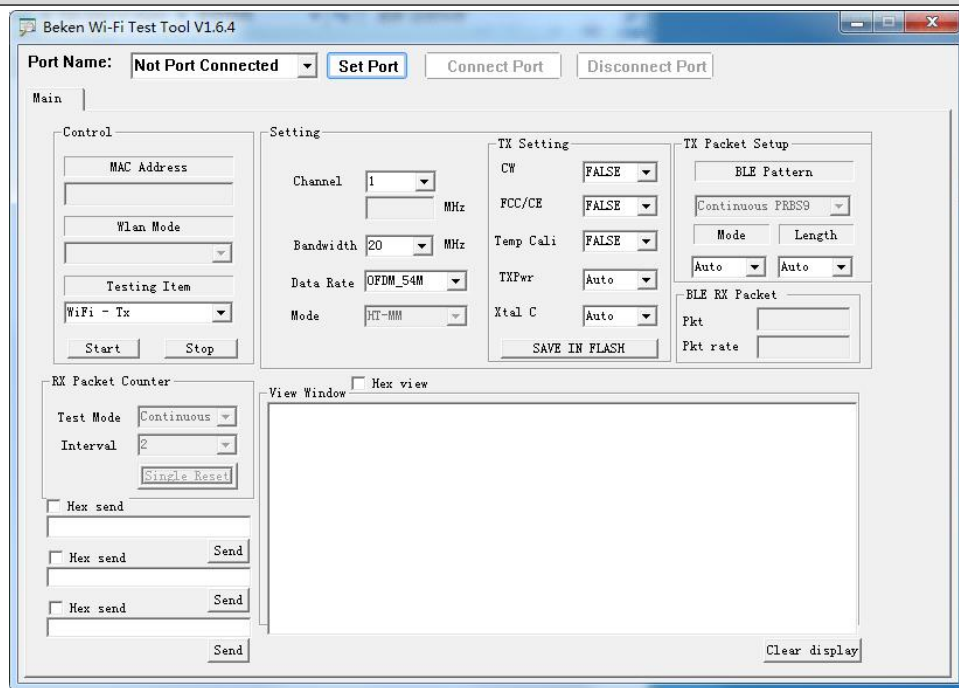


Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	0.93	0.95	97.89
		2437	0.94	0.95	98.95
		2462	0.93	0.95	97.89
11G	Ant1	2412	1.39	1.40	99.29
		2437	1.38	1.40	98.57
		2462	1.38	1.40	98.57
11N20SISO	Ant1	2412	0.16	0.18	88.89
		2437	0.17	0.18	94.44
		2462	0.16	0.17	94.12
11N40SISO	Ant1	2422	0.10	0.11	90.91
		2437	0.10	0.11	90.91
		2452	0.10	0.11	90.91

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

11B_Ant1_2412

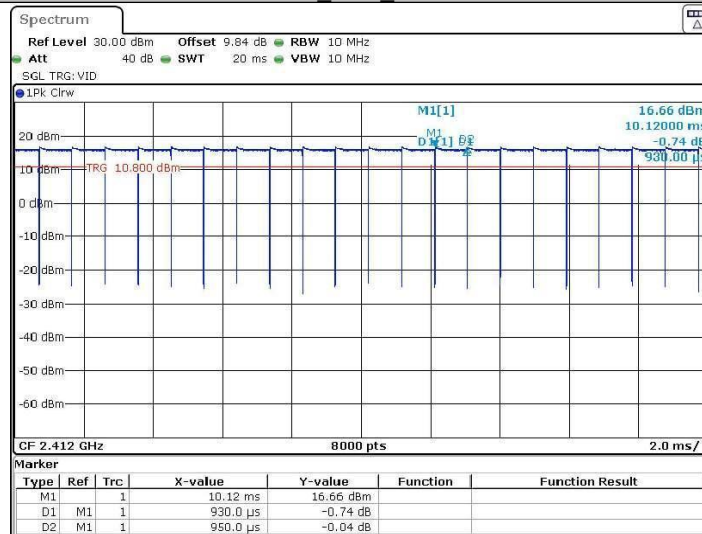


Date: 18-APR-2022 15:02:01

11B_Ant1_2437

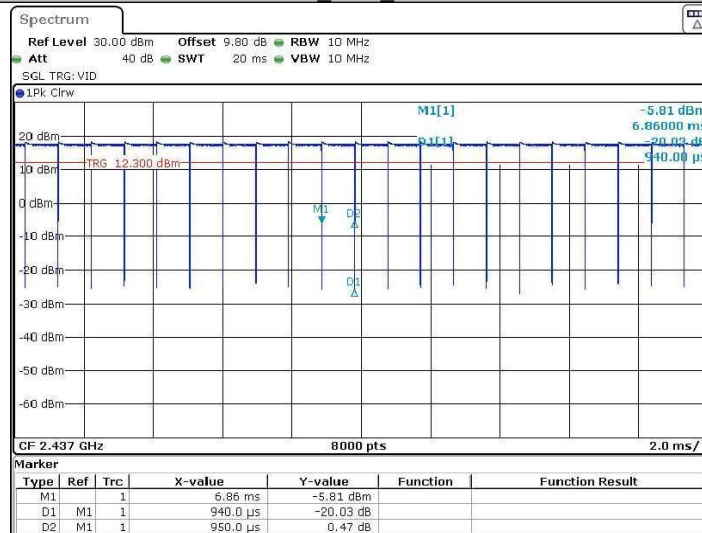


Date: 18-APR-2022 15:05:33

11B_Ant1_2462

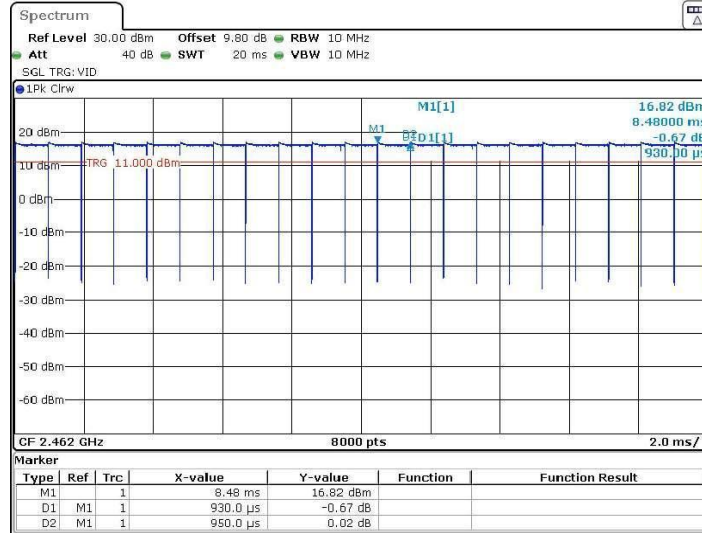


Date: 18-APR-2022 15:07:36

11G_Ant1_2412

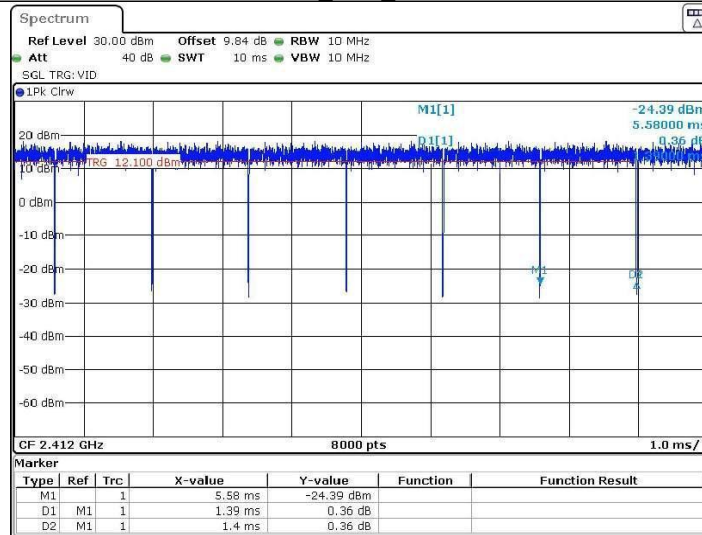


Date: 18-APR-2022 15:12:11

11G_Ant1_2437

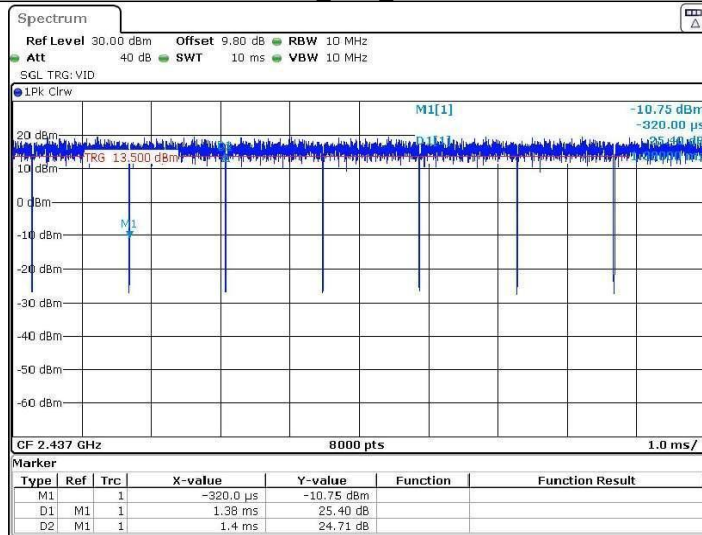


Date: 18-APR-2022 15:15:16

11G_Ant1_2462

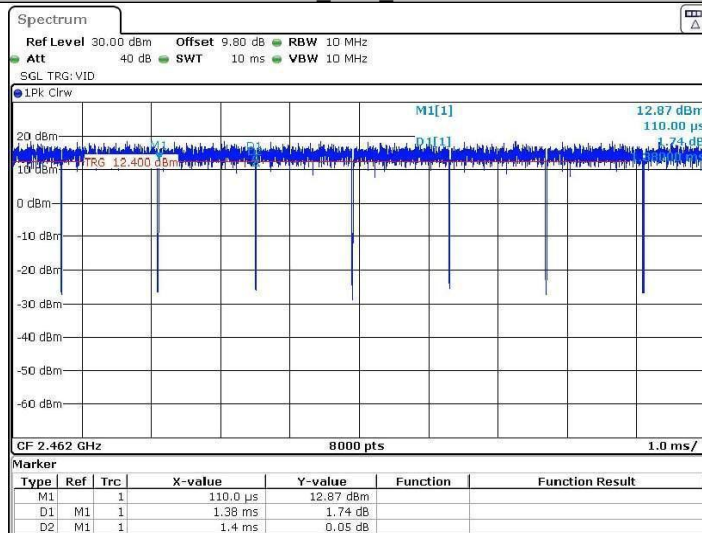


Date: 18-APR-2022 15:18:39

11N20SISO_Ant1_2412

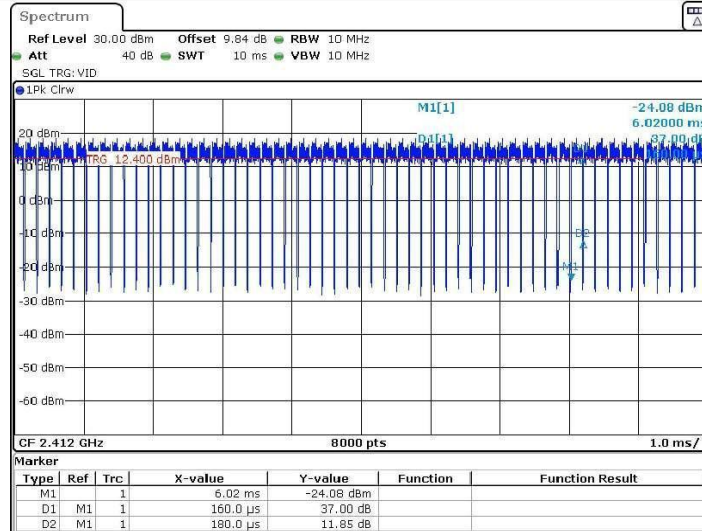


Date: 19 APR 2022 02:51:29

11N20SISO_Ant1_2437

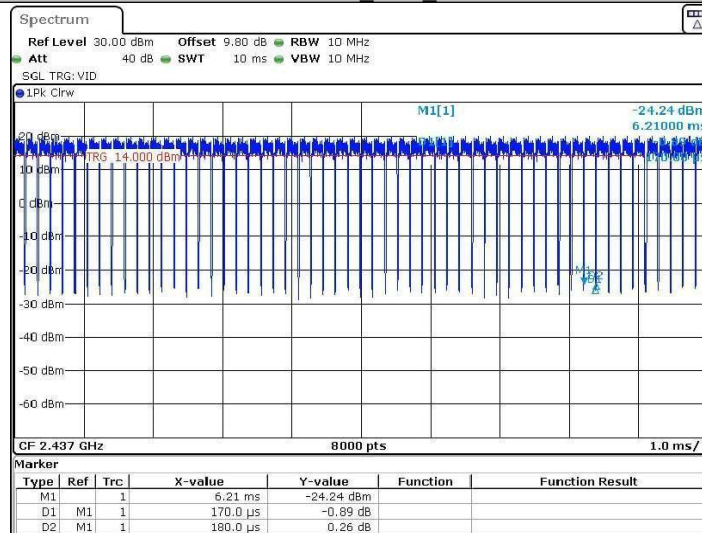


Date: 19 APR 2022 03:19:46

11N20SISO_Ant1_2462

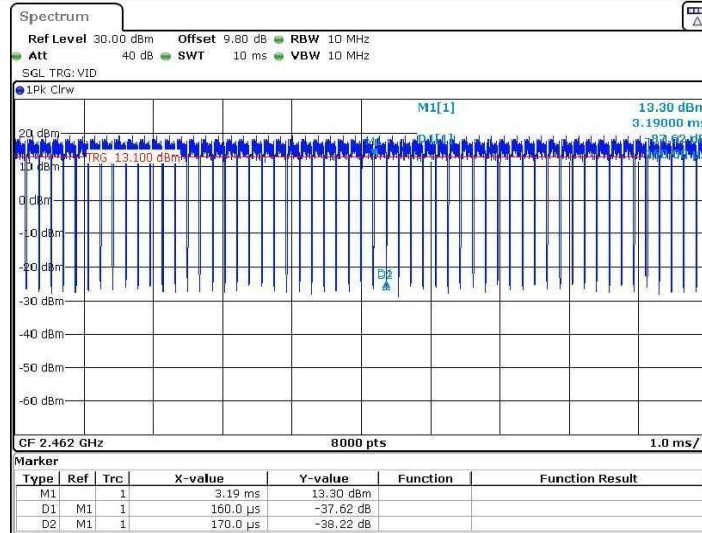


Date: 19 APR 2022 03:22:15

11N40SISO_Ant1_2422

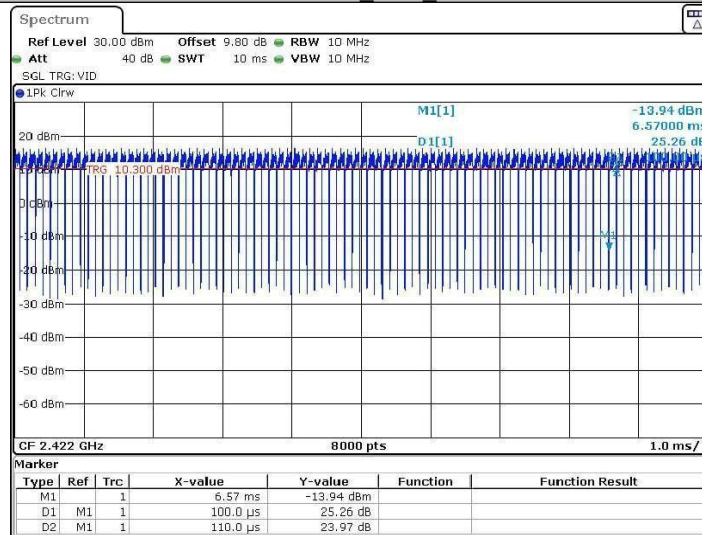


Date: 19 APR 2022 03:25:57

11N40SISO_Ant1_2437

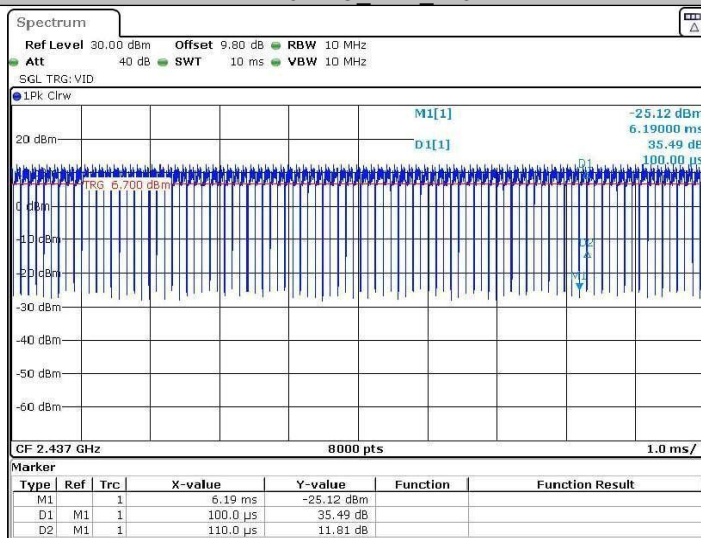

Date: 19 APR 2022 03:32:59

11N40SISO_Ant1_2452

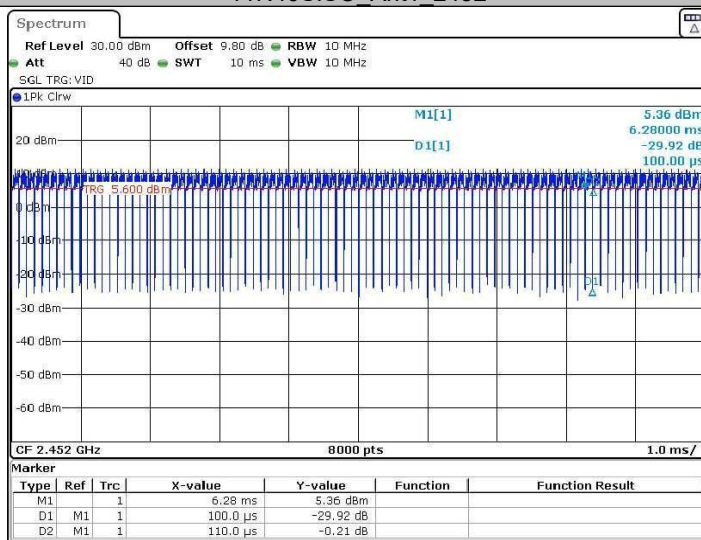

Date: 19 APR 2022 03:34:46

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	/	HW-0502000C01	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 4742.01)

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.9 Deviation from Standards

None.

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2021/09/10	2022/09/09
Spectrum analyzer	R&S	FSU26	CQA-038	2021/09/10	2022/09/09
Spectrum analyzer	R&S	FSU40	CQA-075	2021/09/10	2022/09/09
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2021/09/10	2022/09/09
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/09/10	2022/09/09
Preamplifier	EMCI	EMC184055SE	CQA-089	2021/09/10	2022/09/09
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2021/09/10	2022/09/09
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2021/09/10	2022/09/09
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2021/09/10	2022/09/09
Antenna Connector	CQA	RFC-01	CQA-080	2021/09/10	2022/09/09
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2021/09/10	2022/09/09
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2021/09/10	2022/09/09
Power meter	R&S	NRVD	CQA-029	2021/09/10	2022/09/09
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2021/09/10	2022/09/09
EMI Test Receiver	R&S	ESR7	CQA-005	2021/09/10	2022/09/09
LISN	R&S	ENV216	CQA-003	2021/09/10	2022/09/09
Coaxial cable	CQA	N/A	CQA-C009	2021/09/10	2022/09/09
DC power	KEYSIGHT	E3631A	CQA-028	2021/09/10	2022/09/09

Test software:


	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

5 Test results and Measurement Data

5.1 Antenna Requirement

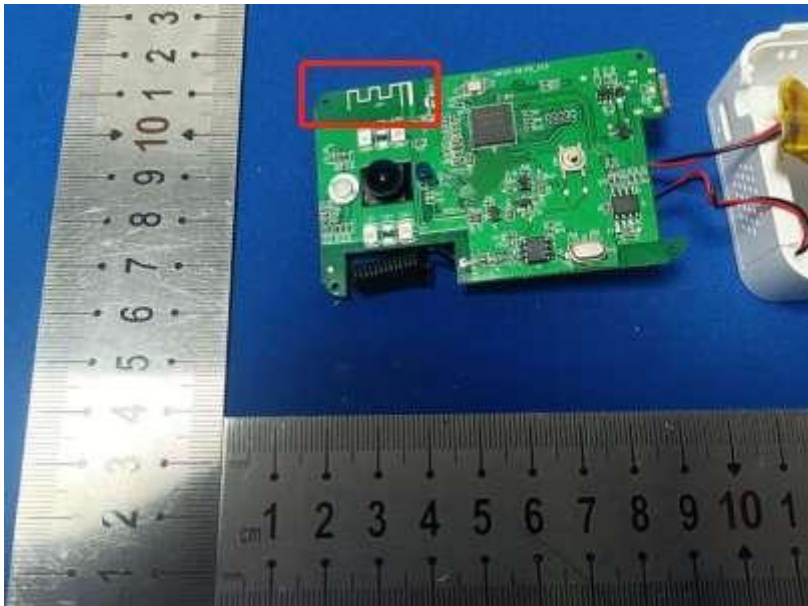Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is PCB antenna. The best case gain of the antenna is 2 dBi.	


5.2 Conducted Emissions

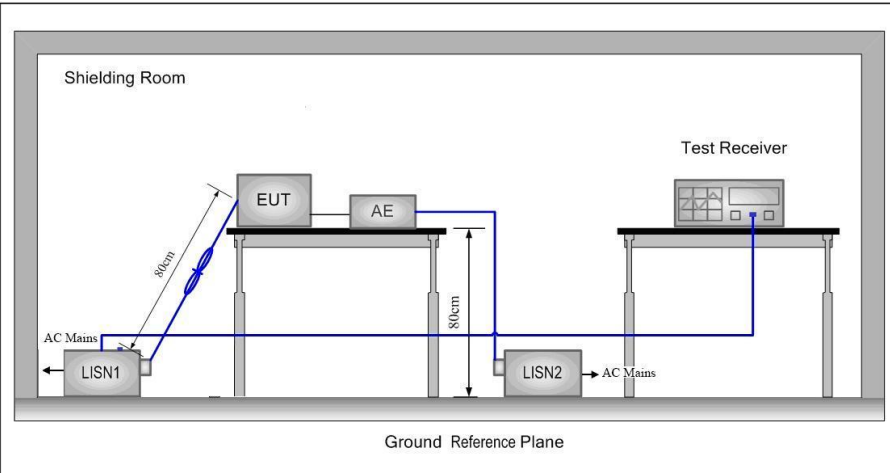Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

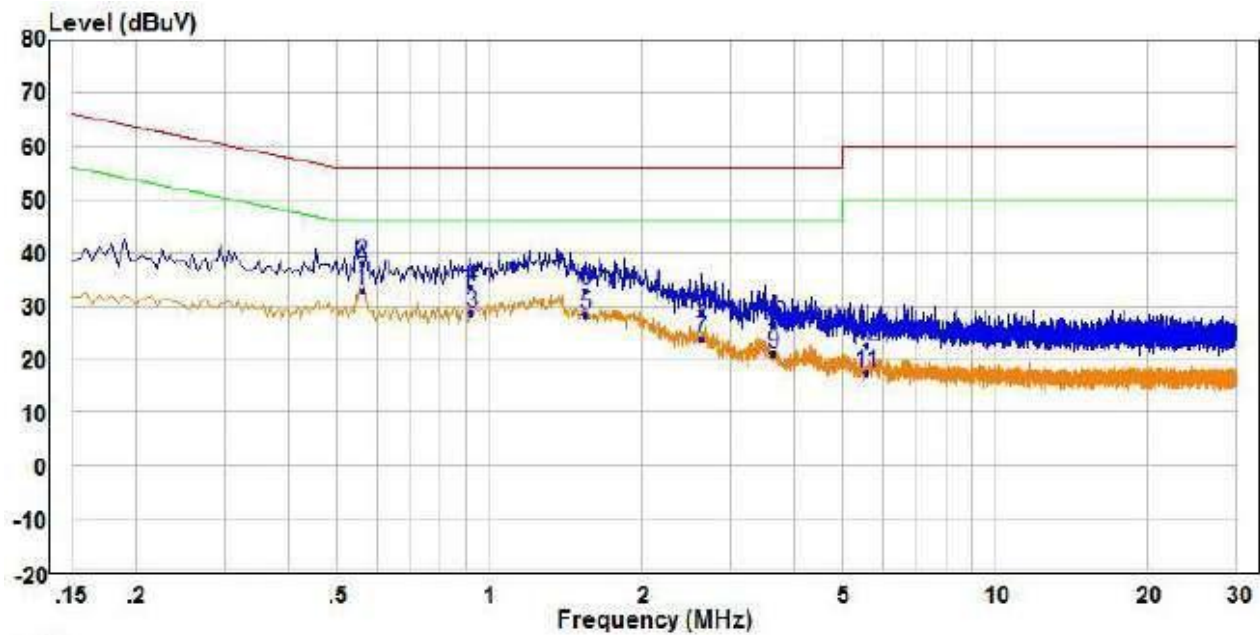


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	PP	0.560	23.02	9.76	32.78	46.00	-13.22 Average
2	QP	0.560	28.42	9.76	38.18	56.00	-17.82 QP
3		0.920	18.81	9.75	28.56	46.00	-17.44 Average
4		0.920	23.83	9.75	33.58	56.00	-22.42 QP
5		1.555	17.45	10.94	28.39	46.00	-17.61 Average
6		1.555	22.10	10.94	33.04	56.00	-22.96 QP
7		2.630	12.71	11.06	23.77	46.00	-22.23 Average
8		2.630	17.86	11.06	28.92	56.00	-27.08 QP
9		3.650	10.74	10.38	21.12	46.00	-24.88 Average
10		3.650	16.01	10.38	26.39	56.00	-29.61 QP
11		5.565	7.74	9.76	17.50	50.00	-32.50 Average
12		5.565	12.82	9.76	22.58	60.00	-37.42 QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

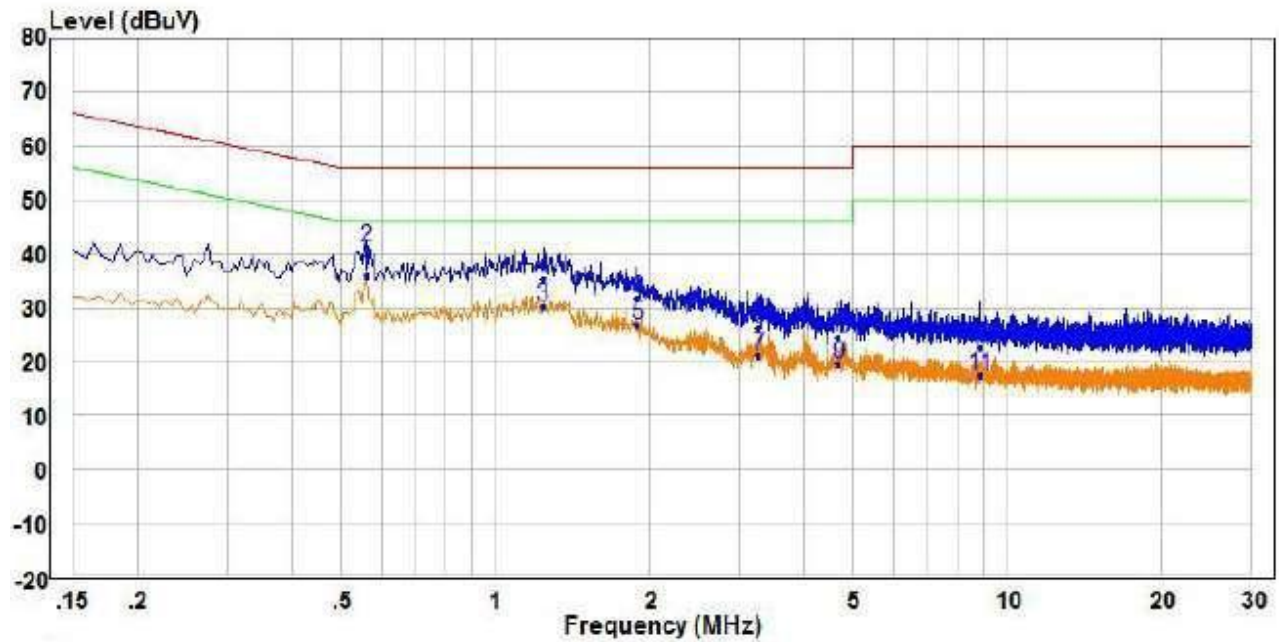


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	PP	0.560	26.20	9.76	35.96	46.00	-10.04 Average
2	QP	0.560	31.23	9.76	40.99	56.00	-15.01 QP
3		1.240	20.61	9.71	30.32	46.00	-15.68 Average
4		1.240	25.62	9.71	35.33	56.00	-20.67 QP
5		1.895	17.04	9.74	26.78	46.00	-19.22 Average
6		1.895	22.02	9.74	31.76	56.00	-24.24 QP
7		3.265	11.27	9.77	21.04	46.00	-24.96 Average
8		3.265	16.51	9.77	26.28	56.00	-29.72 QP
9		4.690	9.77	9.81	19.58	46.00	-26.42 Average
10		4.690	14.68	9.81	24.49	56.00	-31.51 QP
11		8.860	7.59	9.86	17.45	50.00	-32.55 Average
12		8.860	12.66	9.86	22.52	60.00	-37.48 QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Conducted Peak & Average Output Power

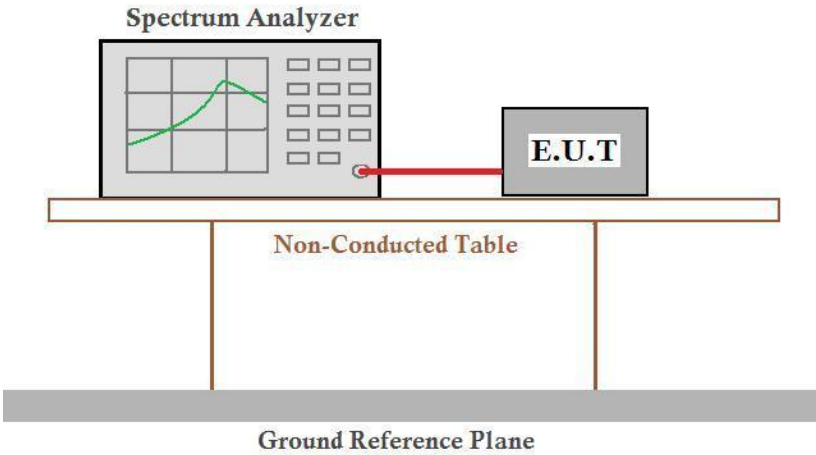Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	14.90	≤30	PASS
		2437	17.06	≤30	PASS
		2462	14.00	≤30	PASS
11G	Ant1	2412	11.43	≤30	PASS
		2437	12.37	≤30	PASS
		2462	10.91	≤30	PASS
11N20SISO	Ant1	2412	11.52	≤30	PASS
		2437	12.41	≤30	PASS
		2462	10.99	≤30	PASS
11N40SISO	Ant1	2422	11.47	≤30	PASS
		2437	12.24	≤30	PASS
		2452	10.93	≤30	PASS

Test Graphs

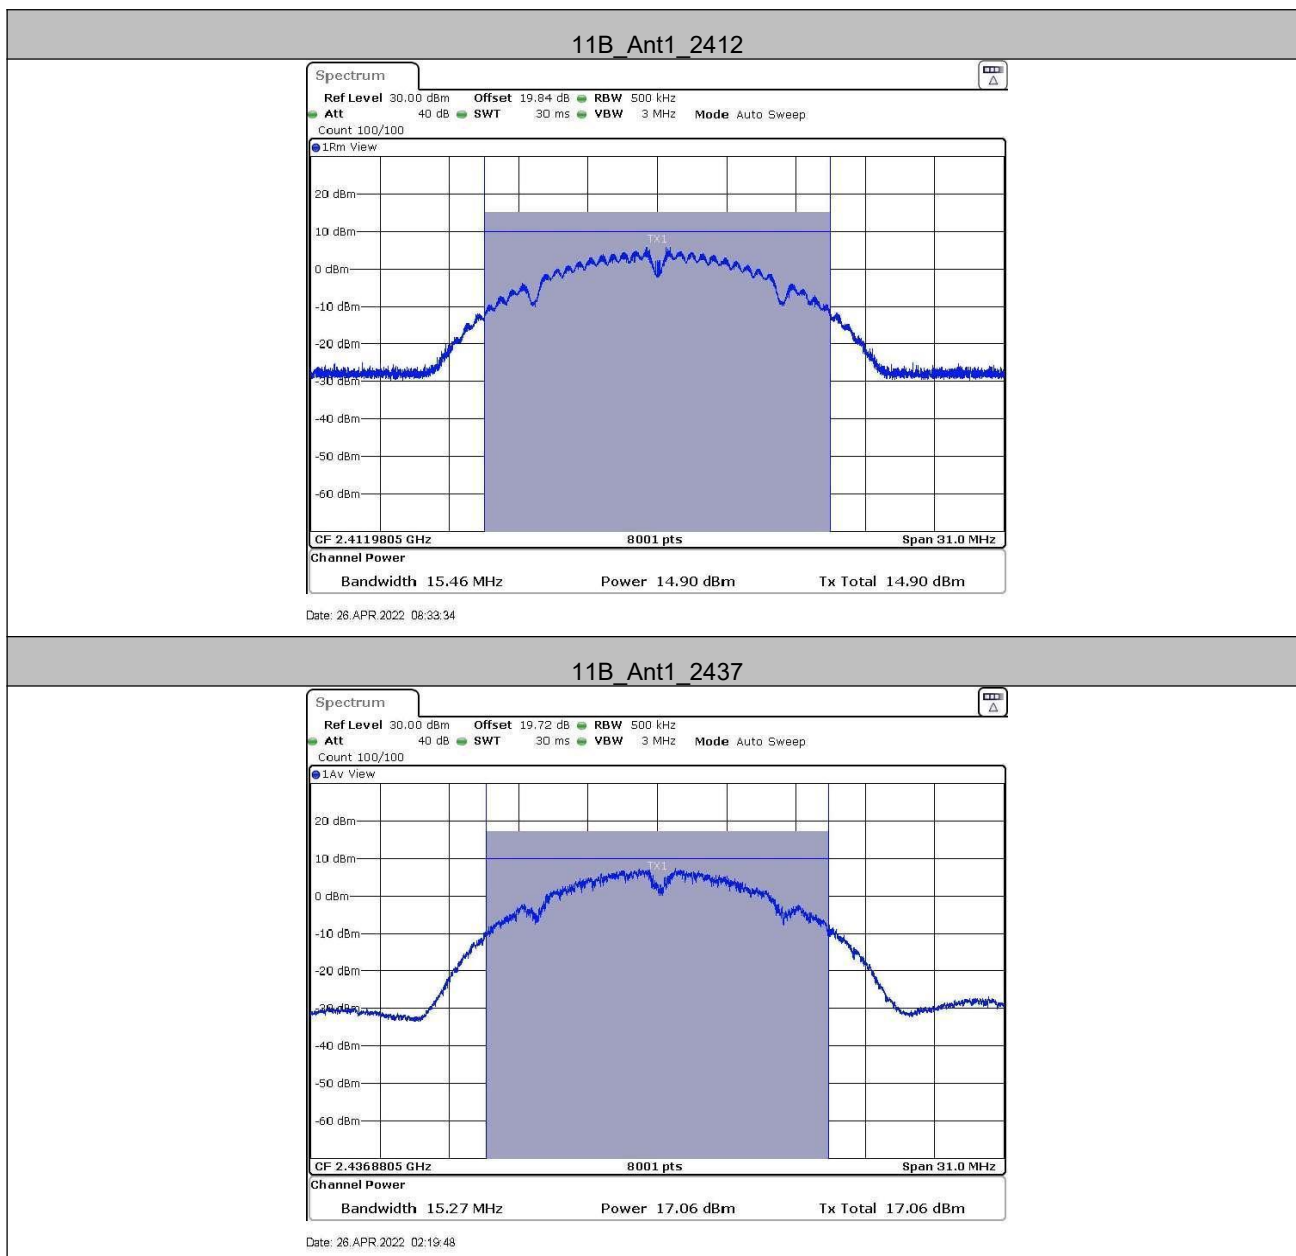


11B_Ant1_2462

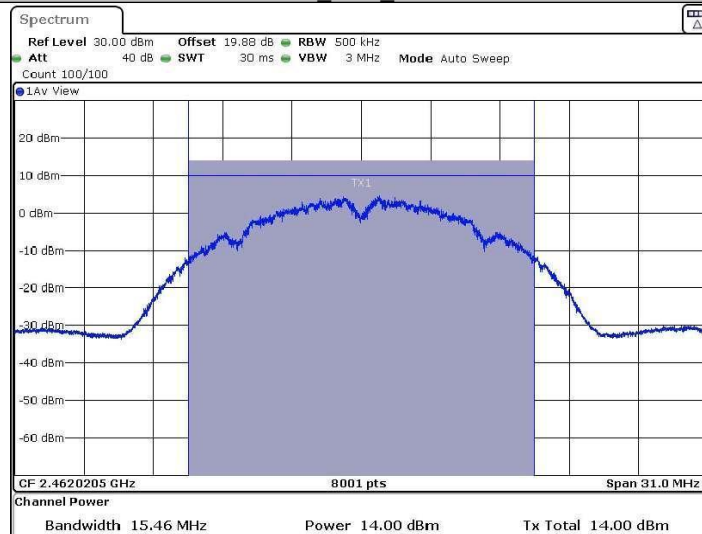


Date: 26.APR.2022 02:20:50

11G_Ant1_2412

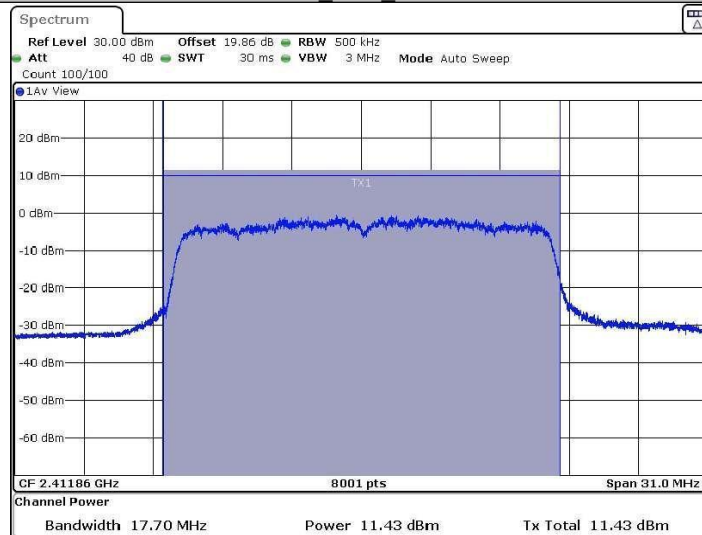


Date: 26.APR.2022 02:21:26

11G_Ant1_2437

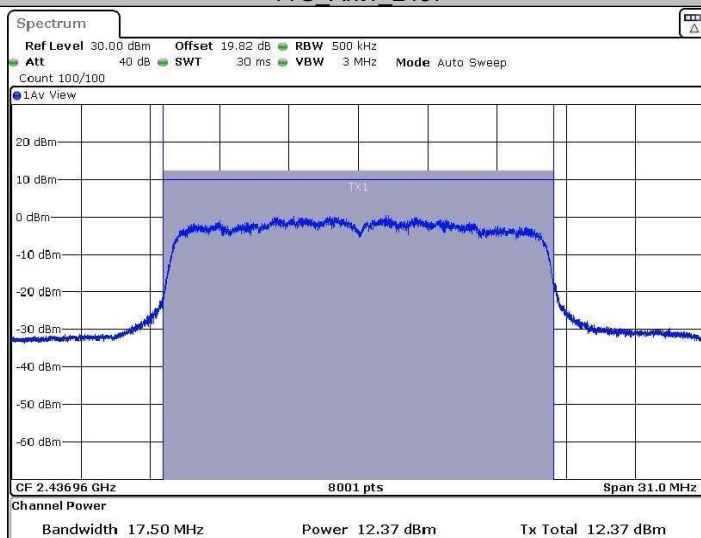


Date: 26.APR.2022 02:21:44

11G_Ant1_2462

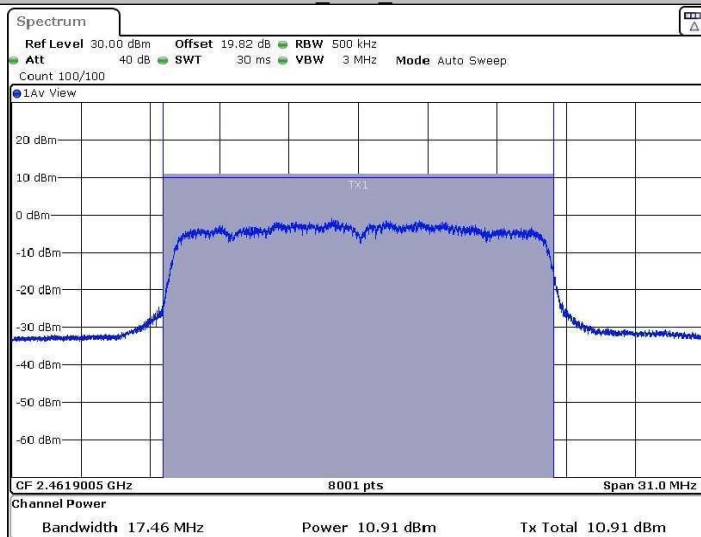


Date: 26.APR.2022 02:22:02

11N20SISO_Ant1_2412

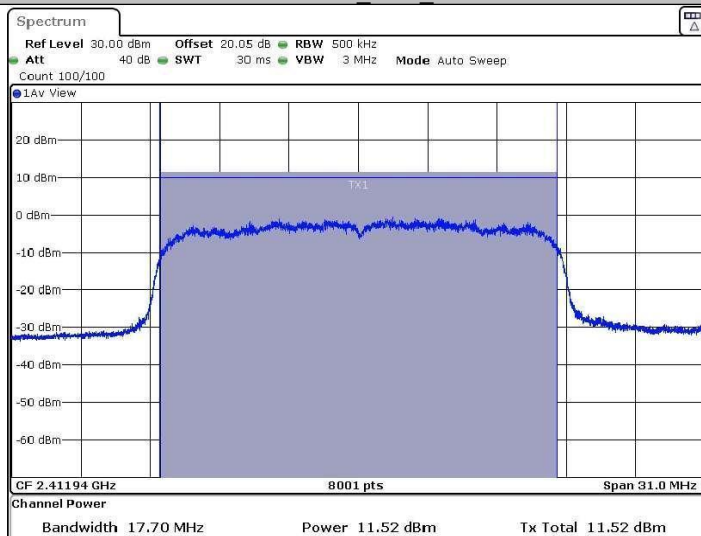


Date: 26.APR.2022 02:22:26

11N20SISO_Ant1_2437

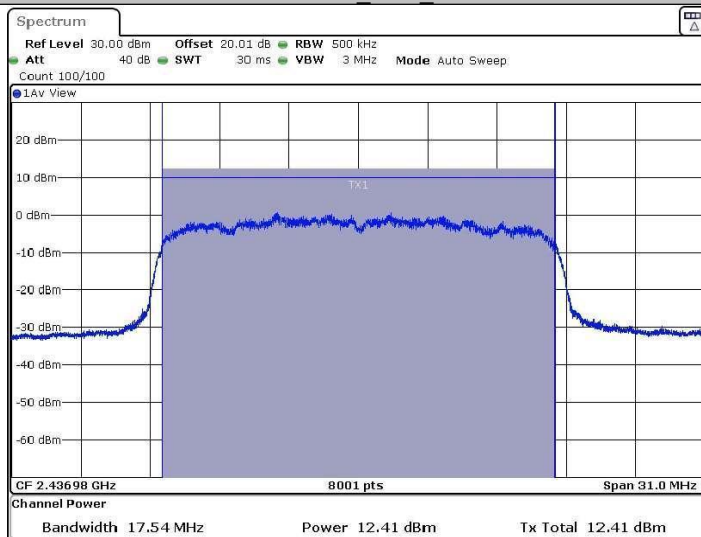


Date: 26.APR.2022 02:22:50

11N20SISO_Ant1_2462

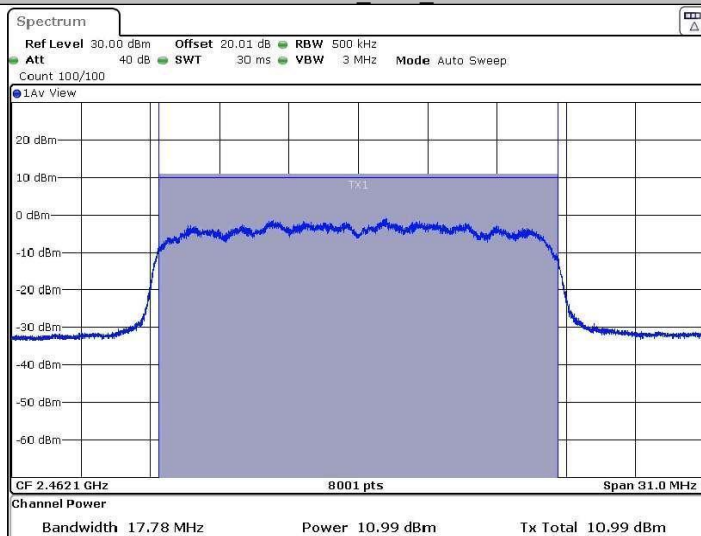


Date: 26.APR.2022 02:23:11

11N40SISO_Ant1_2422

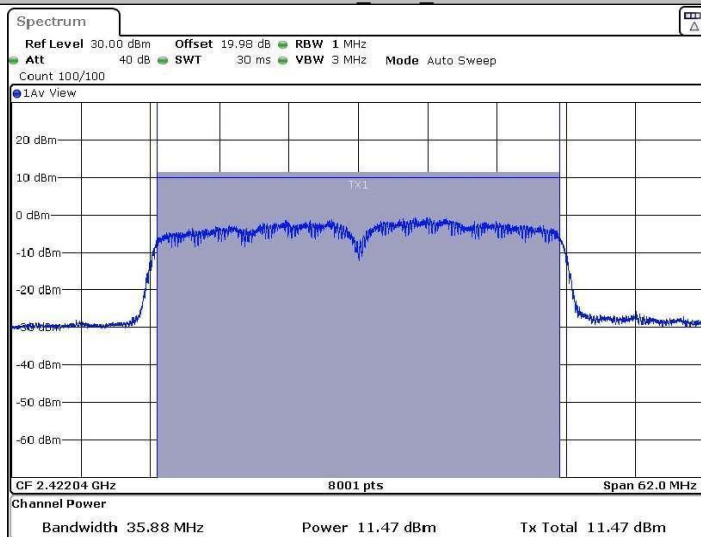


Date: 26.APR.2022 02:23:59

11N40SISO_Ant1_2437

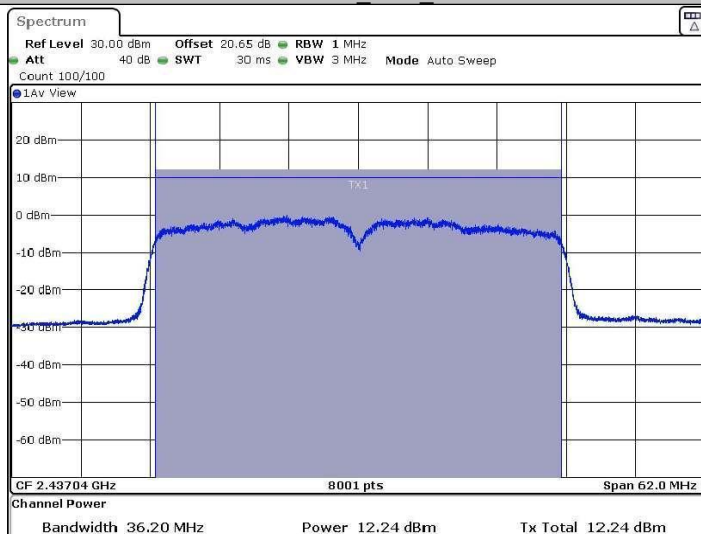


Date: 26.APR.2022 02:24:56

11N40SISO_Ant1_2452

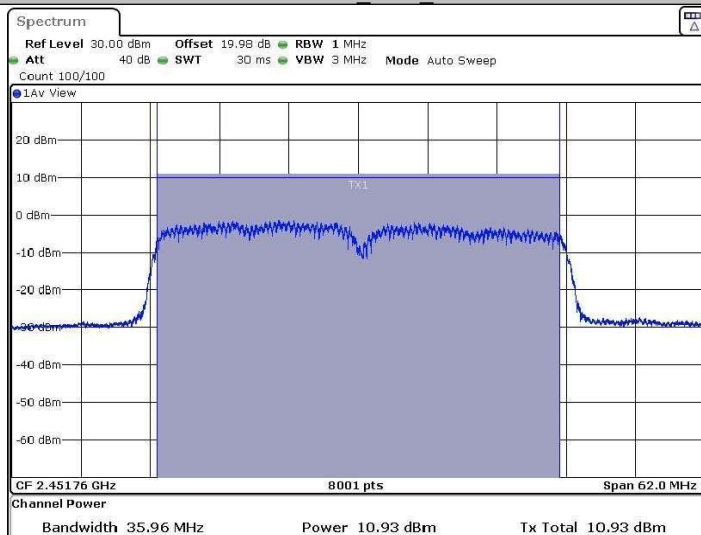

Date: 26.APR.2022 02:25:27


5.4 6dB Occupy Bandwidth

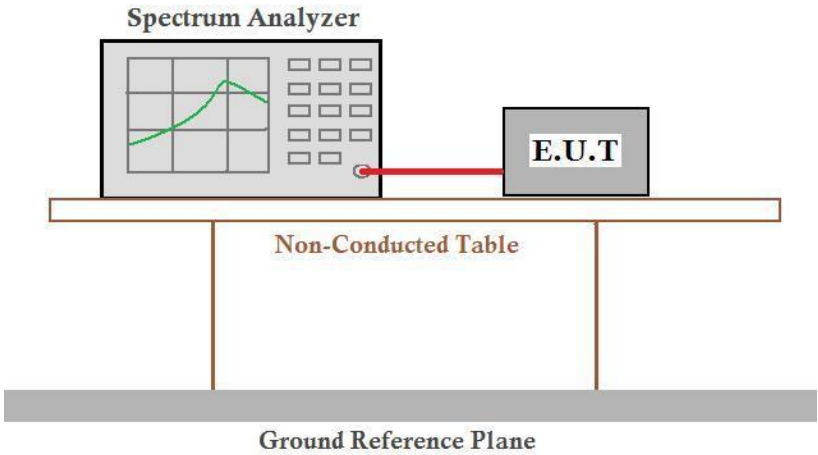Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass


Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.560	2406.640	2416.200	0.5	PASS
		2437	9.560	2431.640	2441.200	0.5	PASS
		2462	9.560	2456.640	2466.200	0.5	PASS
11G	Ant1	2412	11.400	2405.720	2417.120	0.5	PASS
		2437	11.400	2430.720	2442.120	0.5	PASS
		2462	11.400	2455.720	2467.120	0.5	PASS
11N20SISO	Ant1	2412	16.400	2403.840	2420.240	0.5	PASS
		2437	15.840	2428.800	2444.640	0.5	PASS
		2462	16.360	2453.840	2470.200	0.5	PASS
11N40SISO	Ant1	2422	35.280	2404.400	2439.680	0.5	PASS
		2437	35.280	2419.400	2454.680	0.5	PASS
		2452	35.520	2434.160	2469.680	0.5	PASS

Test Graphs

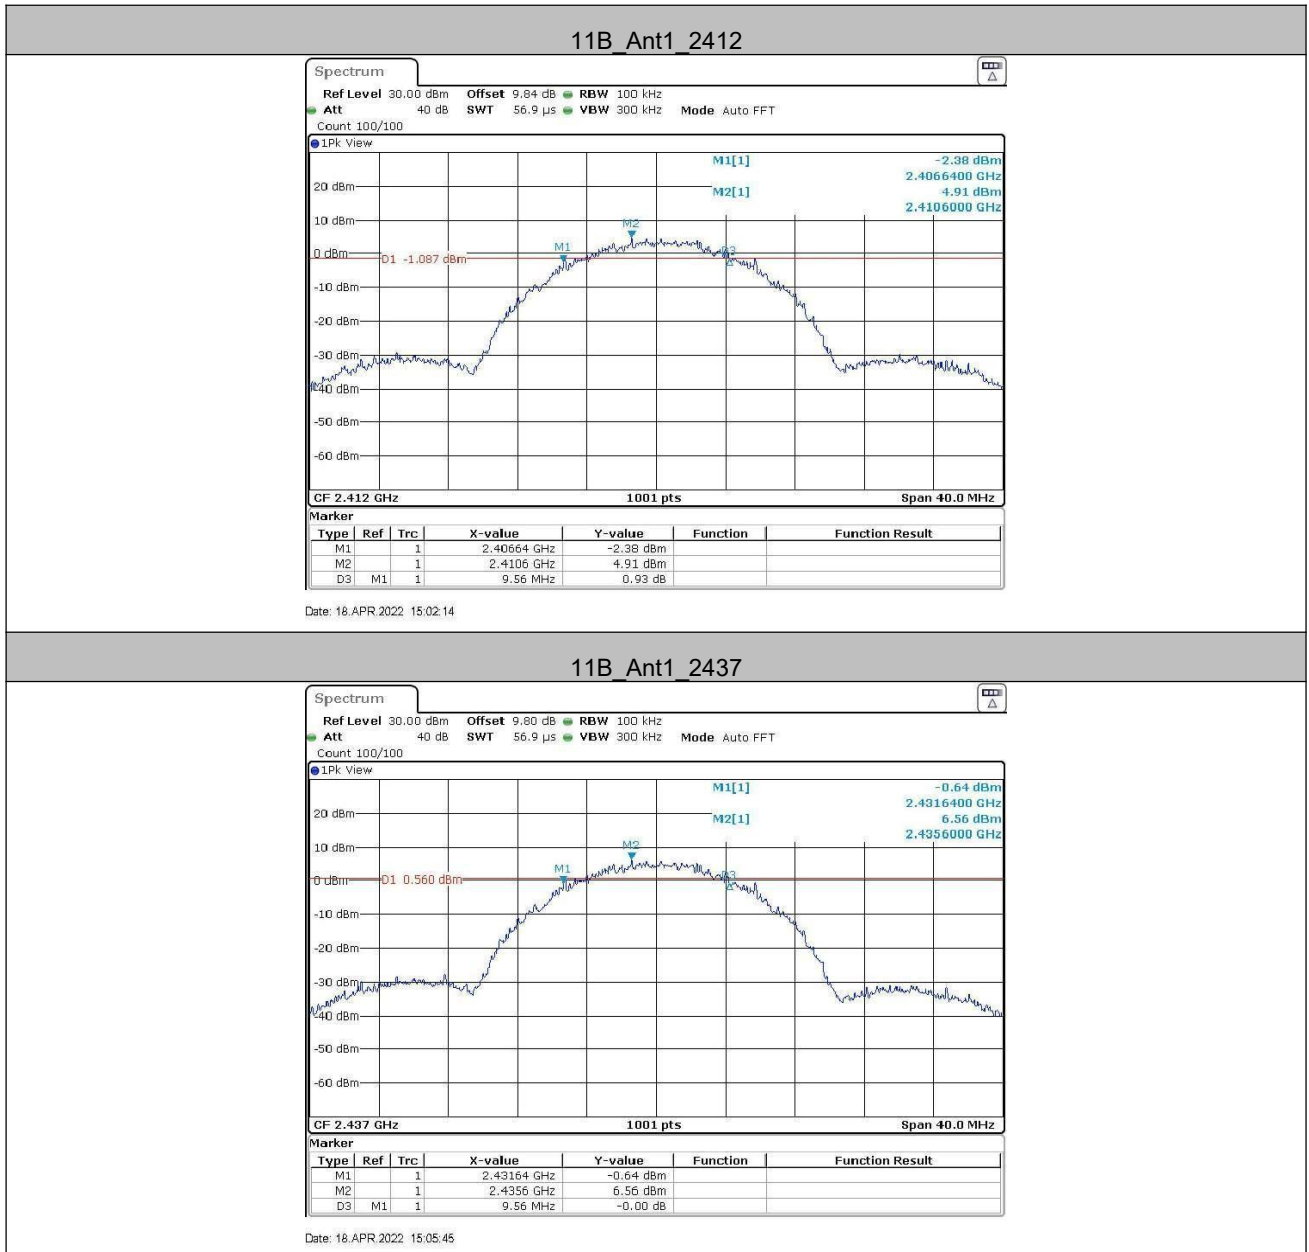


11B Ant1_2462

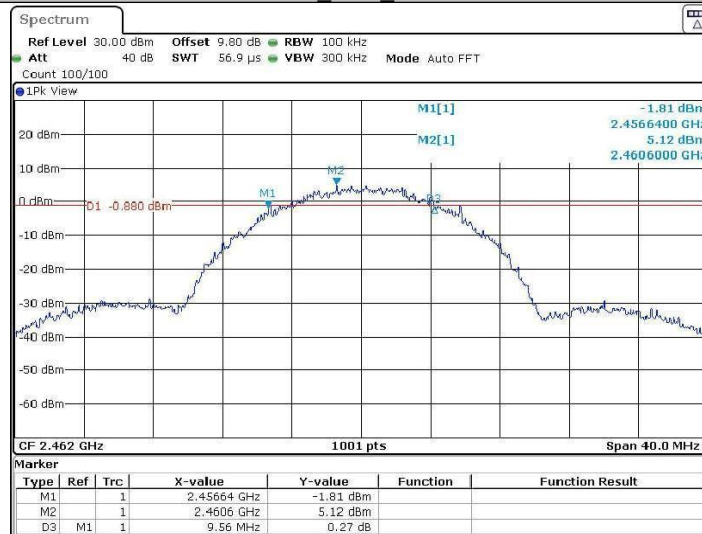


Date: 18.APR.2022 15:07:49

11G Ant1_2412

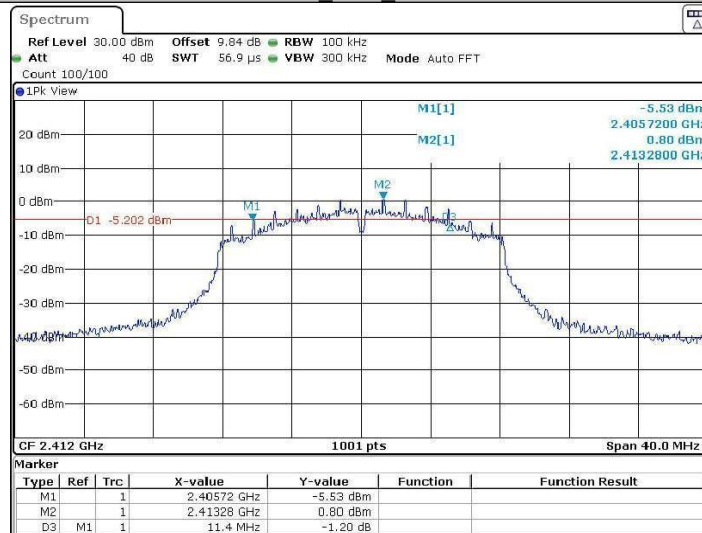


Date: 18.APR.2022 15:12:23

11G_Ant1_2437

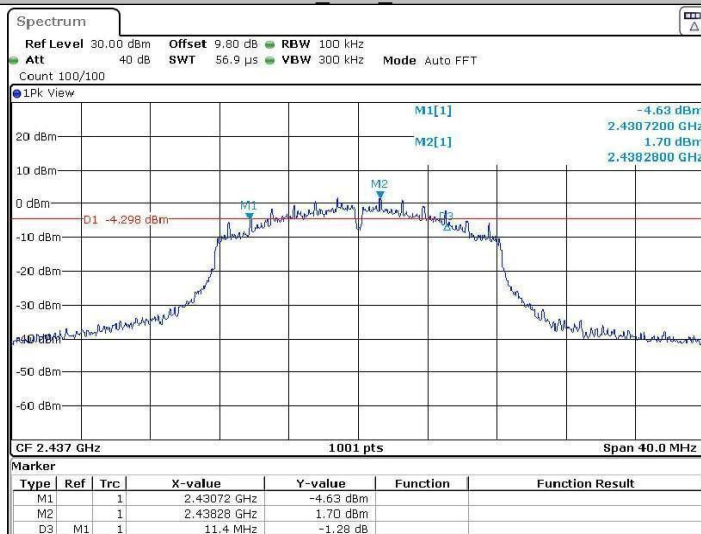


Date: 18.APR.2022 15:15:29

11G_Ant1_2462

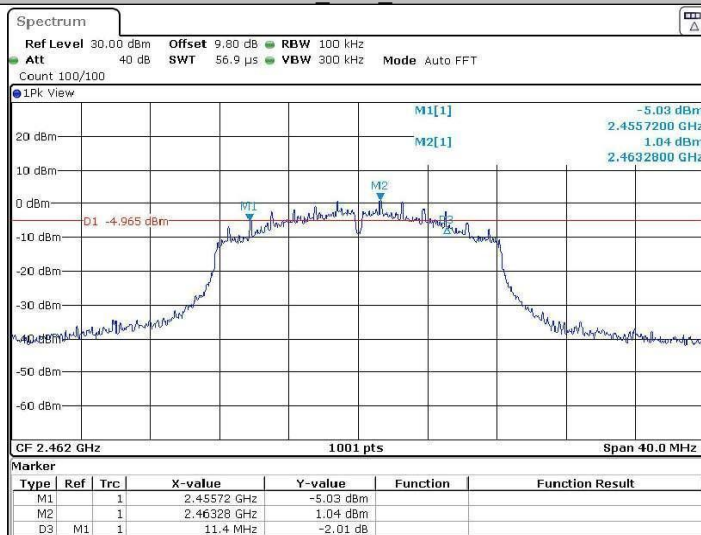


Date: 18.APR.2022 15:18:52

11N20SISO_Ant1_2412

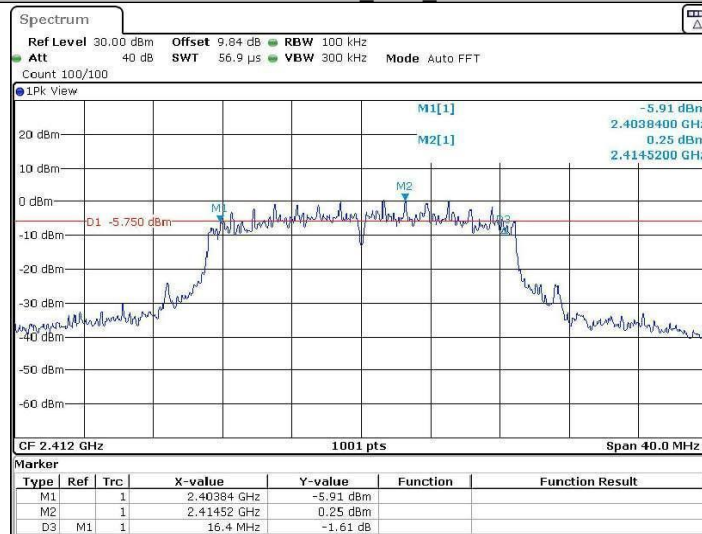


Date: 19.APR.2022 02:51:43

11N20SISO_Ant1_2437

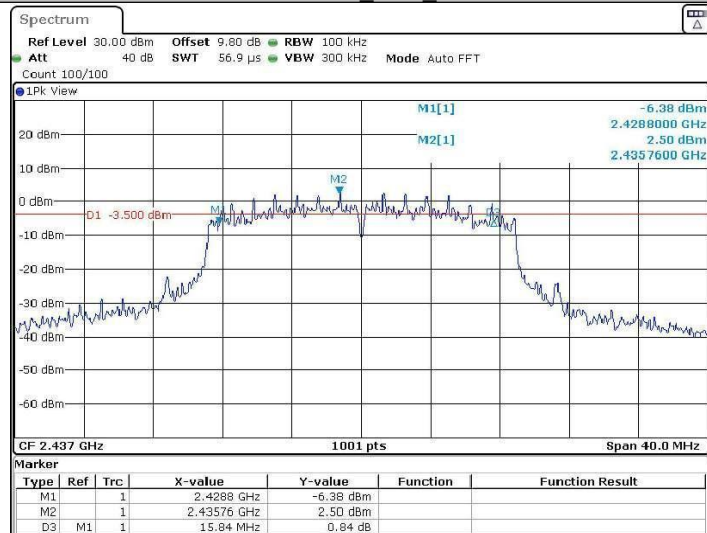


Date: 19.APR.2022 03:19:59

11N20SISO_Ant1_2462

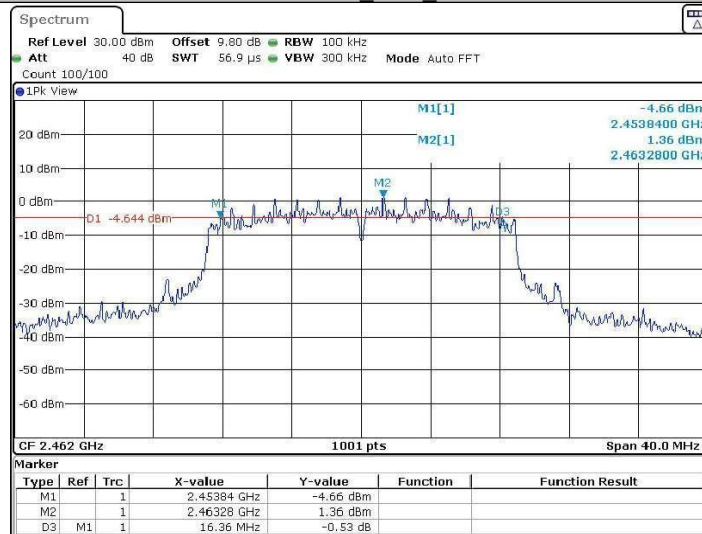


Date: 19.APR.2022 03:22:28

11N40SISO_Ant1_2422

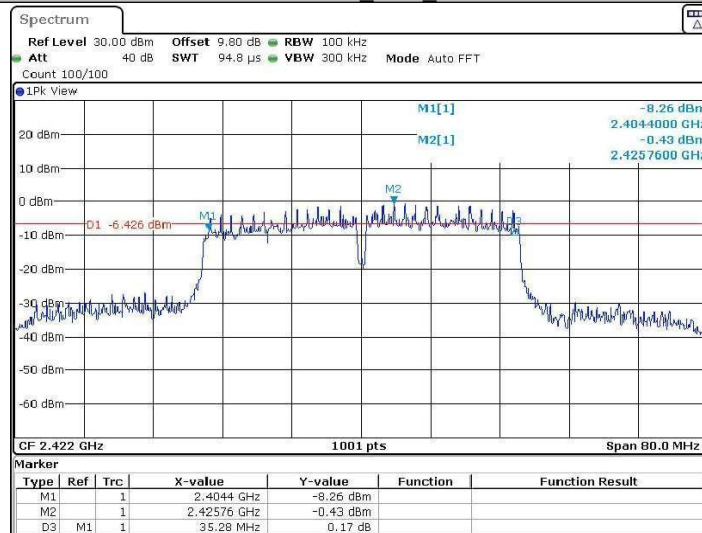


Date: 19.APR.2022 03:26:10

11N40SISO_Ant1_2437

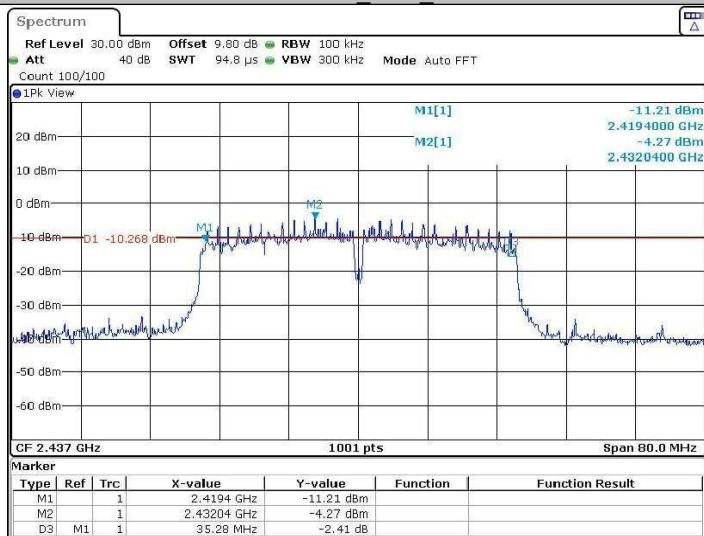


Date: 19.APR.2022 03:33.12

11N40SISO_Ant1_2452

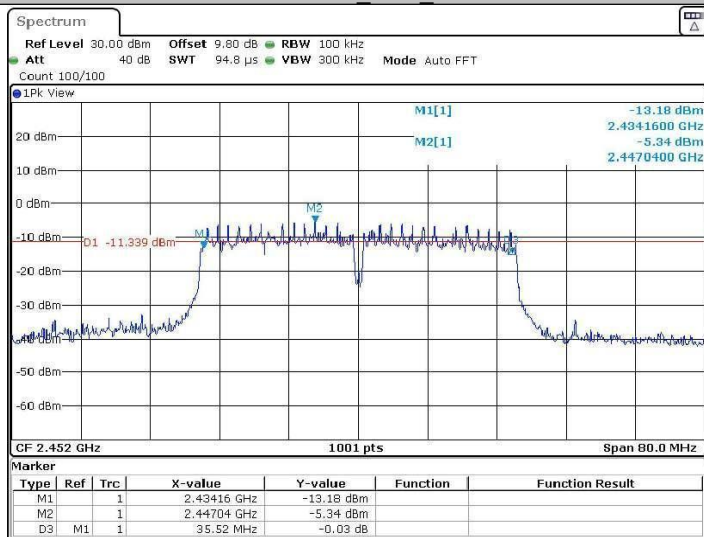

Date: 19.APR.2022 03:34.59


5.5 Power Spectral Density

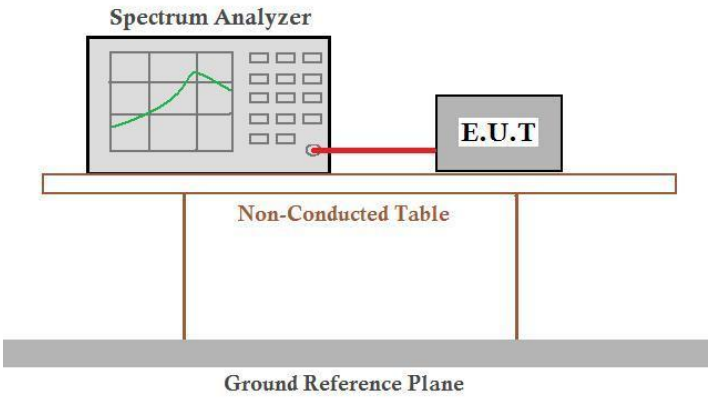Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass


Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-5.12	≤8	PASS
		2437	-4.21	≤8	PASS
		2462	-5.43	≤8	PASS
11G	Ant1	2412	-7.95	≤8	PASS
		2437	-7.12	≤8	PASS
		2462	-8.61	≤8	PASS
11N20SISO	Ant1	2412	-4.86	≤8	PASS
		2437	-7.40	≤8	PASS
		2462	-8.87	≤8	PASS
11N40SISO	Ant1	2422	-10.27	≤8	PASS
		2437	-9.64	≤8	PASS
		2452	-10.95	≤8	PASS

Test Graphs

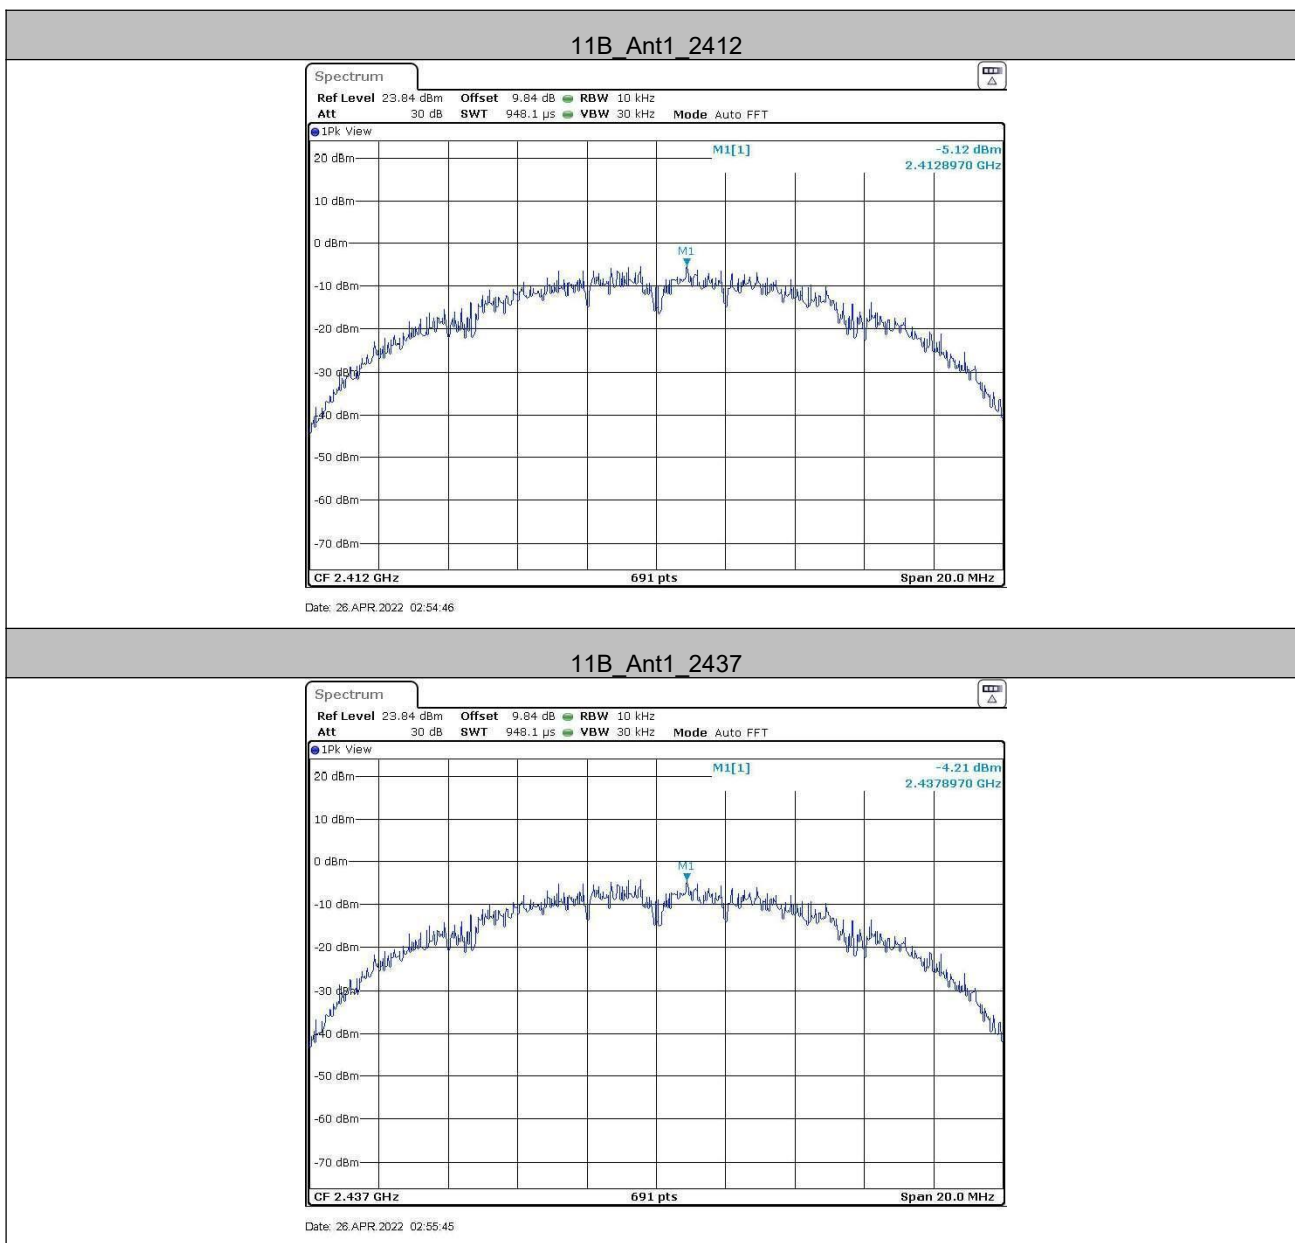


11B_Ant1_2462

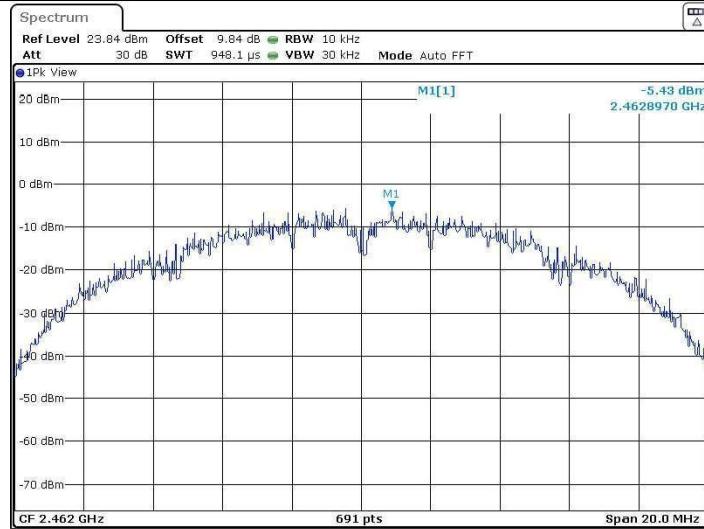


Date: 26 APR 2022 02:56:33

11G_Ant1_2412

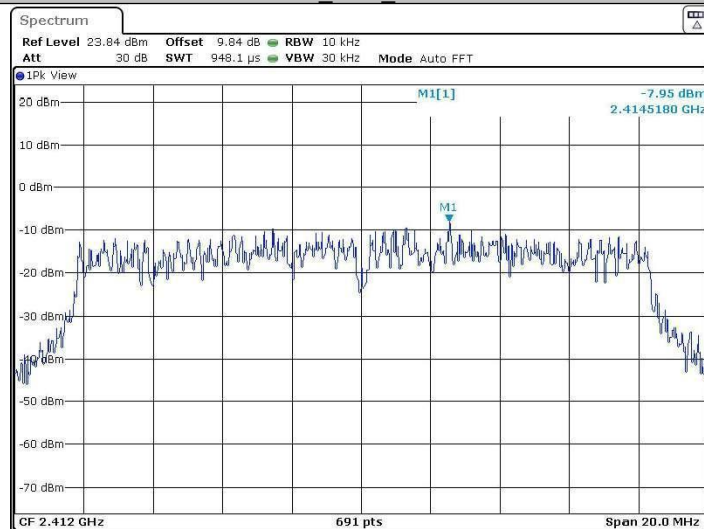


Date: 26 APR 2022 02:57:19

11G_Ant1_2437

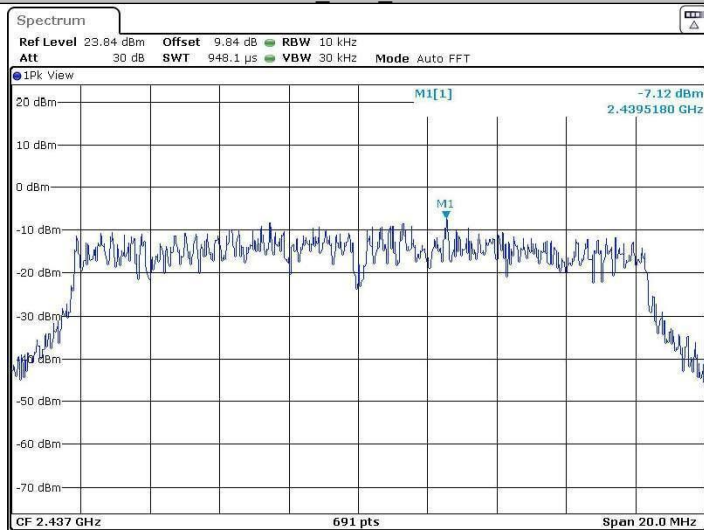


Date: 26 APR 2022 02:57:57

11G_Ant1_2462

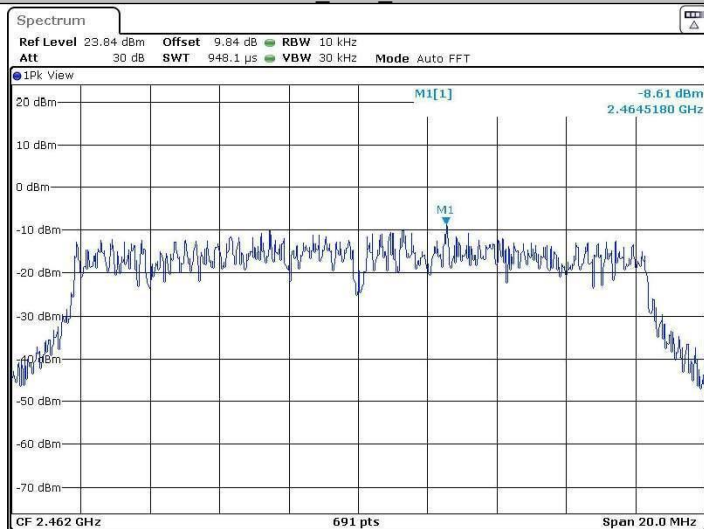


Date: 26 APR 2022 02:59:16

11N20SISO_Ant1_2412

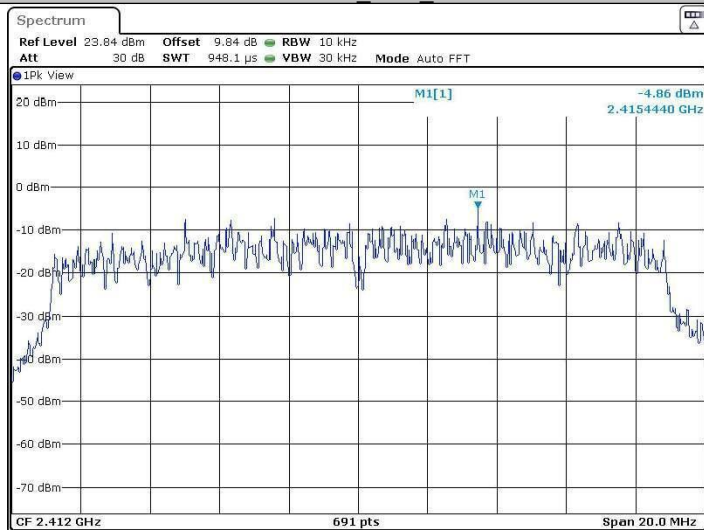


Date: 26 APR 2022 02:59:37

11N20SISO_Ant1_2437

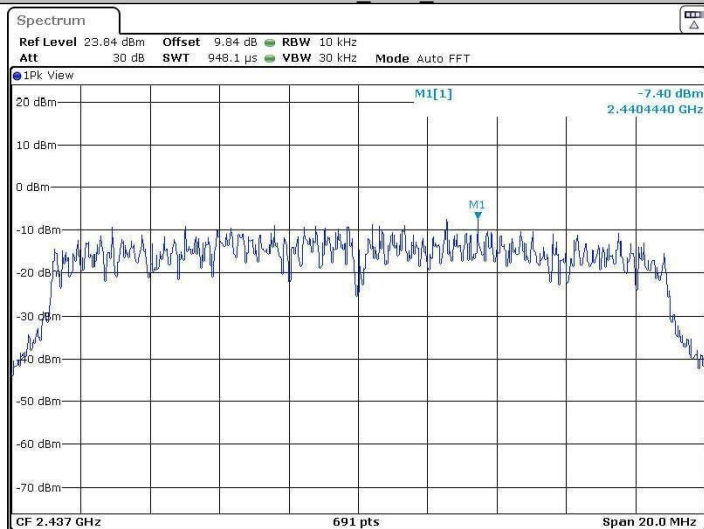


Date: 26 APR 2022 03:00:19

11N20SISO_Ant1_2462

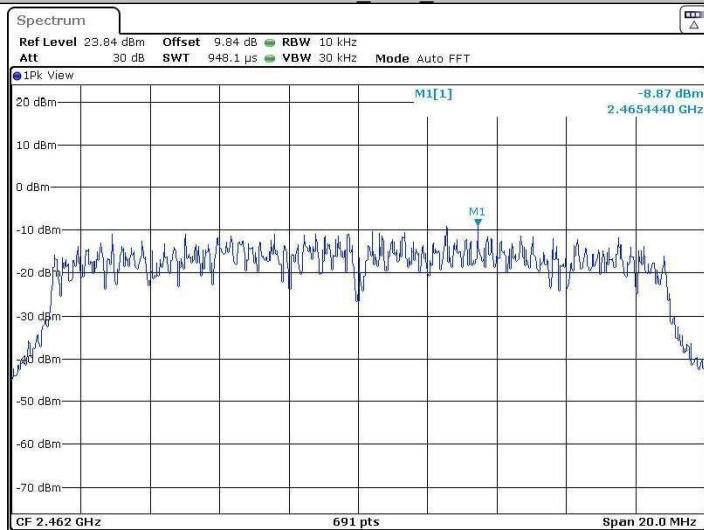


Date: 26 APR 2022 03:01:04

11N40SISO_Ant1_2422

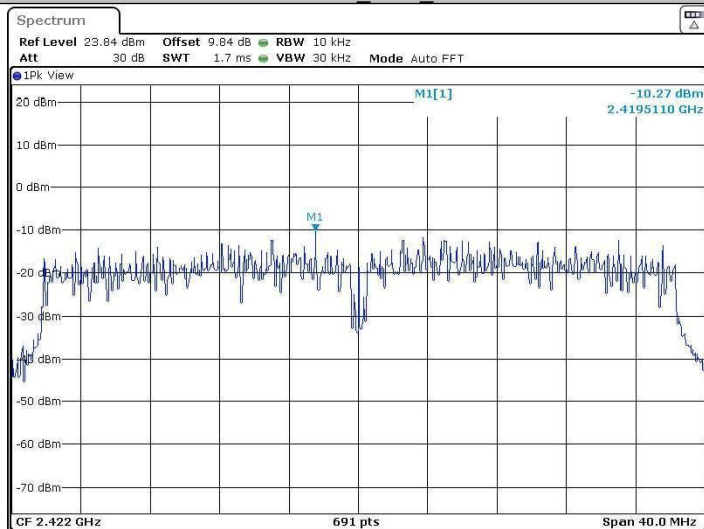


Date: 26 APR 2022 03:01:44

11N40SISO_Ant1_2437

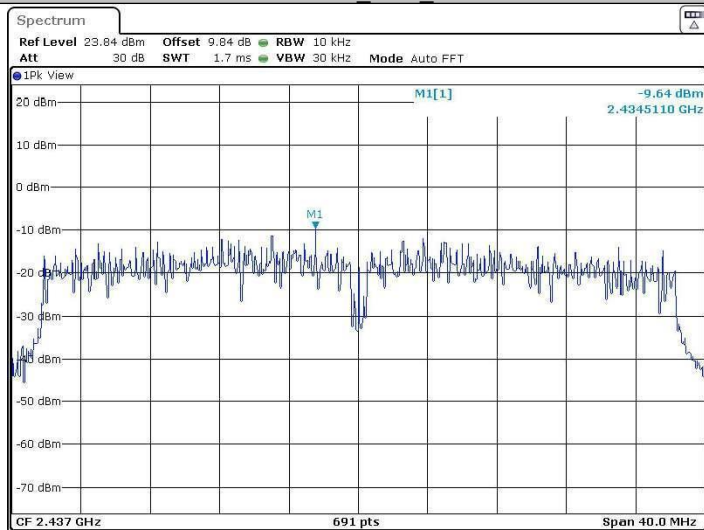


Date: 26 APR 2022 03:02:15

11N40SISO_Ant1_2452

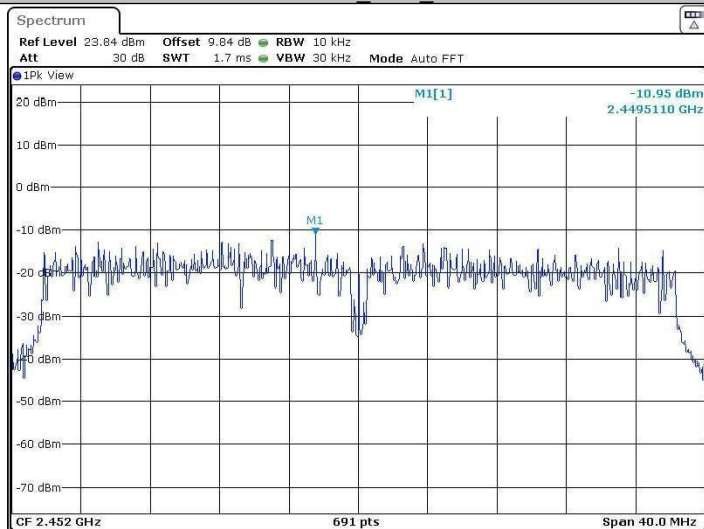

Date: 26 APR 2022 03:02:54

5.6 Band-edge for RF Conducted Emissions

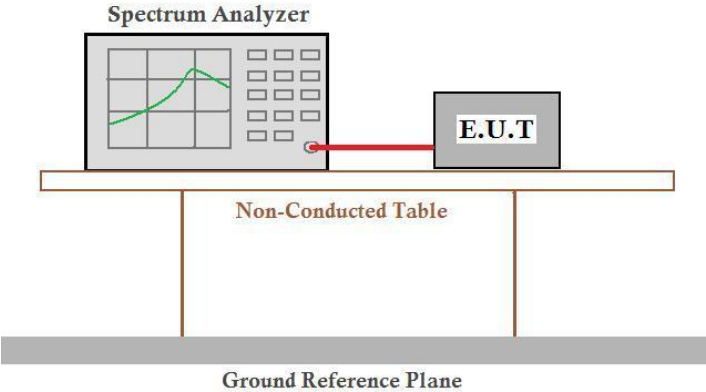
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.32	-30.71	≤ -25.68	PASS
		High	2462	5.28	-45.34	≤ -24.72	PASS
11G	Ant1	Low	2412	-0.30	-36.8	≤ -30.3	PASS
		High	2462	0.95	-47.17	≤ -29.05	PASS
11N20SISO	Ant1	Low	2412	0.07	-32.64	≤ -29.93	PASS
		High	2462	1.34	-43.61	≤ -28.66	PASS
11N40SISO	Ant1	Low	2422	-4.69	-34.9	≤ -34.69	PASS
		High	2452	-5.14	-42.3	≤ -35.14	PASS


Test Graphs

11B_Ant1_Low_2412

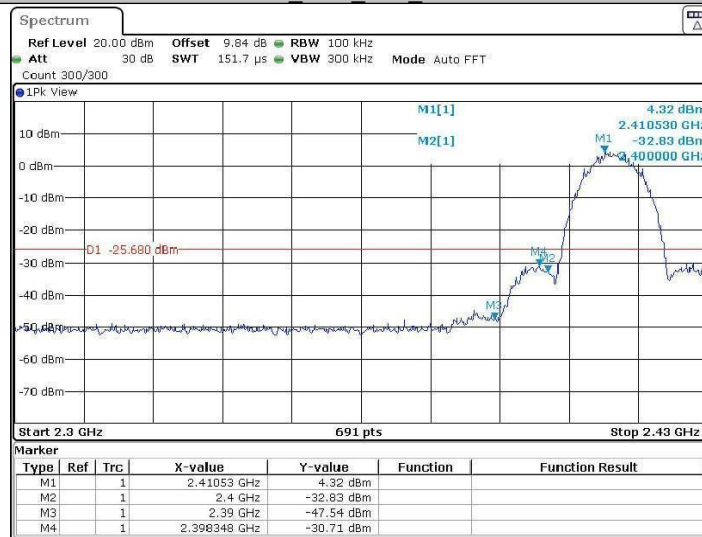

Date: 18-APR-2022 15:02:47

11B_Ant1_High_2462

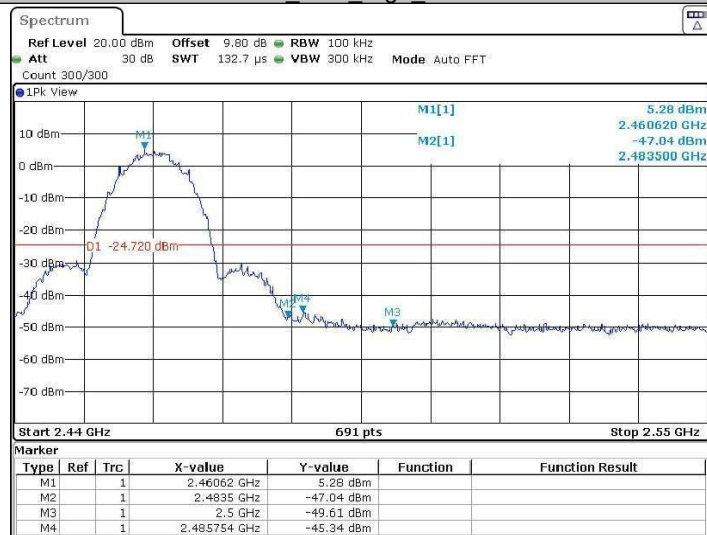


Date: 18-APR-2022 15:08:22

11G_Ant1_Low_2412




Date: 18.APR.2022 15:12:56

11G_Ant1_High_2462

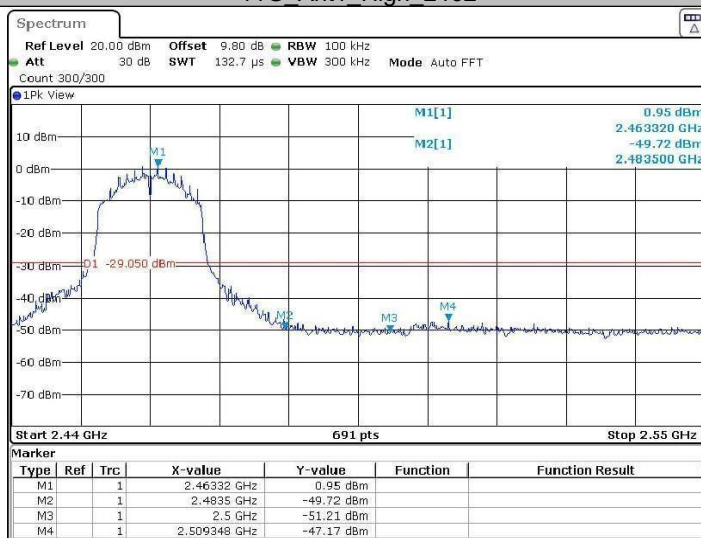


Date: 18.APR.2022 15:19:25

11N20SISO_Ant1_Low_2412

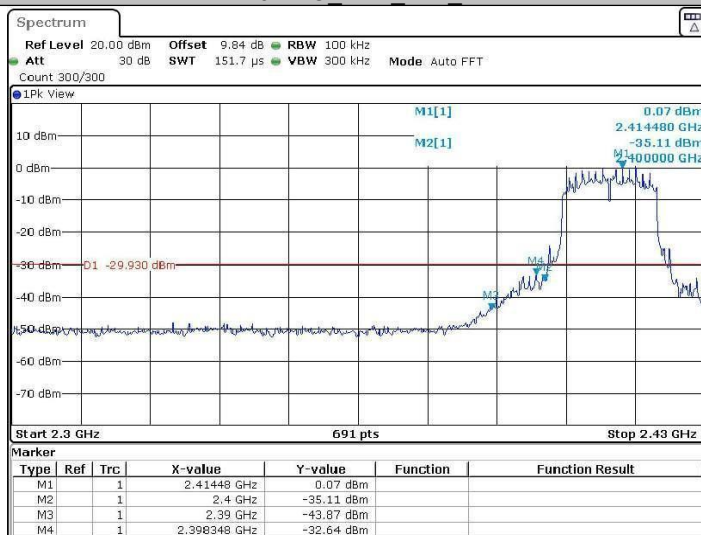


Date: 19 APR 2022 02:52:18

11N20SISO_Ant1_High_2462

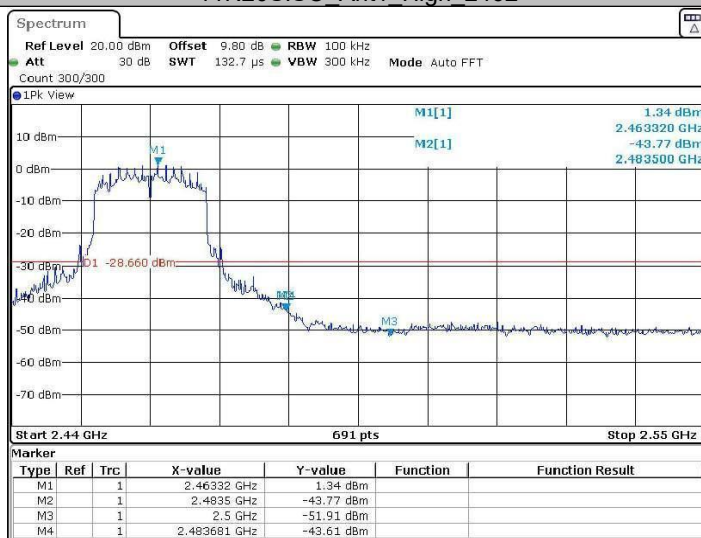


Date: 19 APR 2022 03:23:02

11N40SISO_Ant1_Low_2422

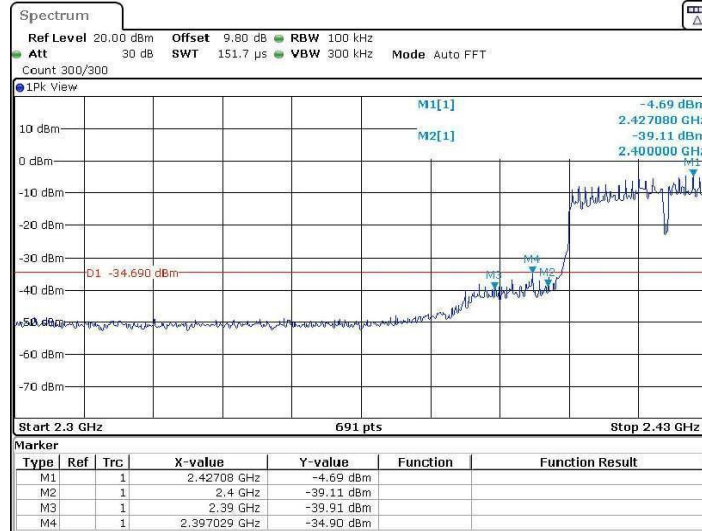


Date: 19 APR 2022 03:30:59

11N40SISO_Ant1_High_2452

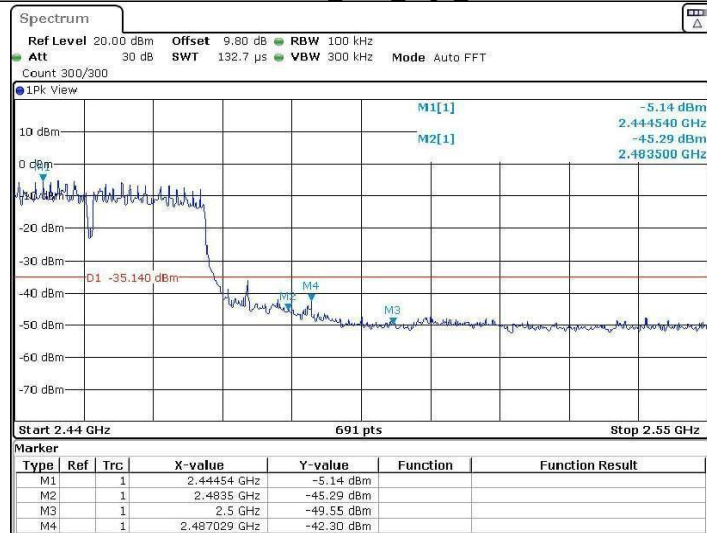

Date: 19 APR 2022 03:35:33

5.7 RF Conducted Spurious Emissions

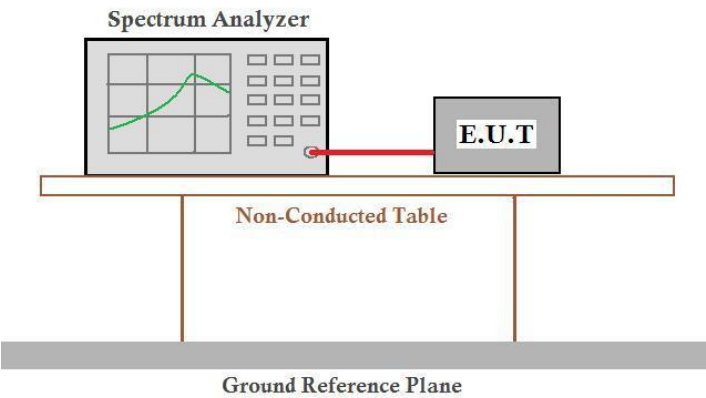
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result


TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	4.83	4.83	---	PASS
			30~1000	4.83	-55.65	≤-25.17	PASS
			1000~26500	4.83	-37.87	≤-25.17	PASS
		2437	Reference	6.56	6.56	---	PASS
			30~1000	6.56	-56.44	≤-23.44	PASS
			1000~26500	6.56	-38.86	≤-23.44	PASS
		2462	Reference	5.20	5.20	---	PASS
			30~1000	5.20	-55.2	≤-24.8	PASS
			1000~26500	5.20	-40.74	≤-24.8	PASS
11G	Ant1	2412	Reference	0.74	0.74	---	PASS
			30~1000	0.74	-56.34	≤-29.26	PASS
			1000~26500	0.74	-52.1	≤-29.26	PASS
		2437	Reference	2.18	2.18	---	PASS
			30~1000	2.18	-56.2	≤-27.82	PASS
			1000~26500	2.18	-52.19	≤-27.82	PASS
		2462	Reference	1.10	1.10	---	PASS
			30~1000	1.10	-54.55	≤-28.9	PASS
			1000~26500	1.10	-52.42	≤-28.9	PASS
11N20SISO	Ant1	2412	Reference	1.14	1.14	---	PASS
			30~1000	1.14	-55.74	≤-28.86	PASS
			1000~26500	1.14	-49.39	≤-28.86	PASS
		2437	Reference	2.50	2.50	---	PASS
			30~1000	2.50	-56.19	≤-27.5	PASS
			1000~26500	2.50	-48.38	≤-27.5	PASS
		2462	Reference	1.29	1.29	---	PASS
			30~1000	1.29	-56.2	≤-28.71	PASS
			1000~26500	1.29	-52.18	≤-28.71	PASS
11N40SISO	Ant1	2422	Reference	-4.54	-4.54	---	PASS
			30~1000	-4.54	-53.29	≤-34.54	PASS
			1000~26500	-4.54	-53.62	≤-34.54	PASS
		2437	Reference	-4.28	-4.28	---	PASS
			30~1000	-4.28	-53.4	≤-34.28	PASS
			1000~26500	-4.28	-53.42	≤-34.28	PASS
		2452	Reference	-5.20	-5.20	---	PASS

			30~1000	-5.20	-52.79	≤ 35.2	PASS
			1000~26500	-5.20	-53.37	≤ 35.2	PASS

Test Graphs

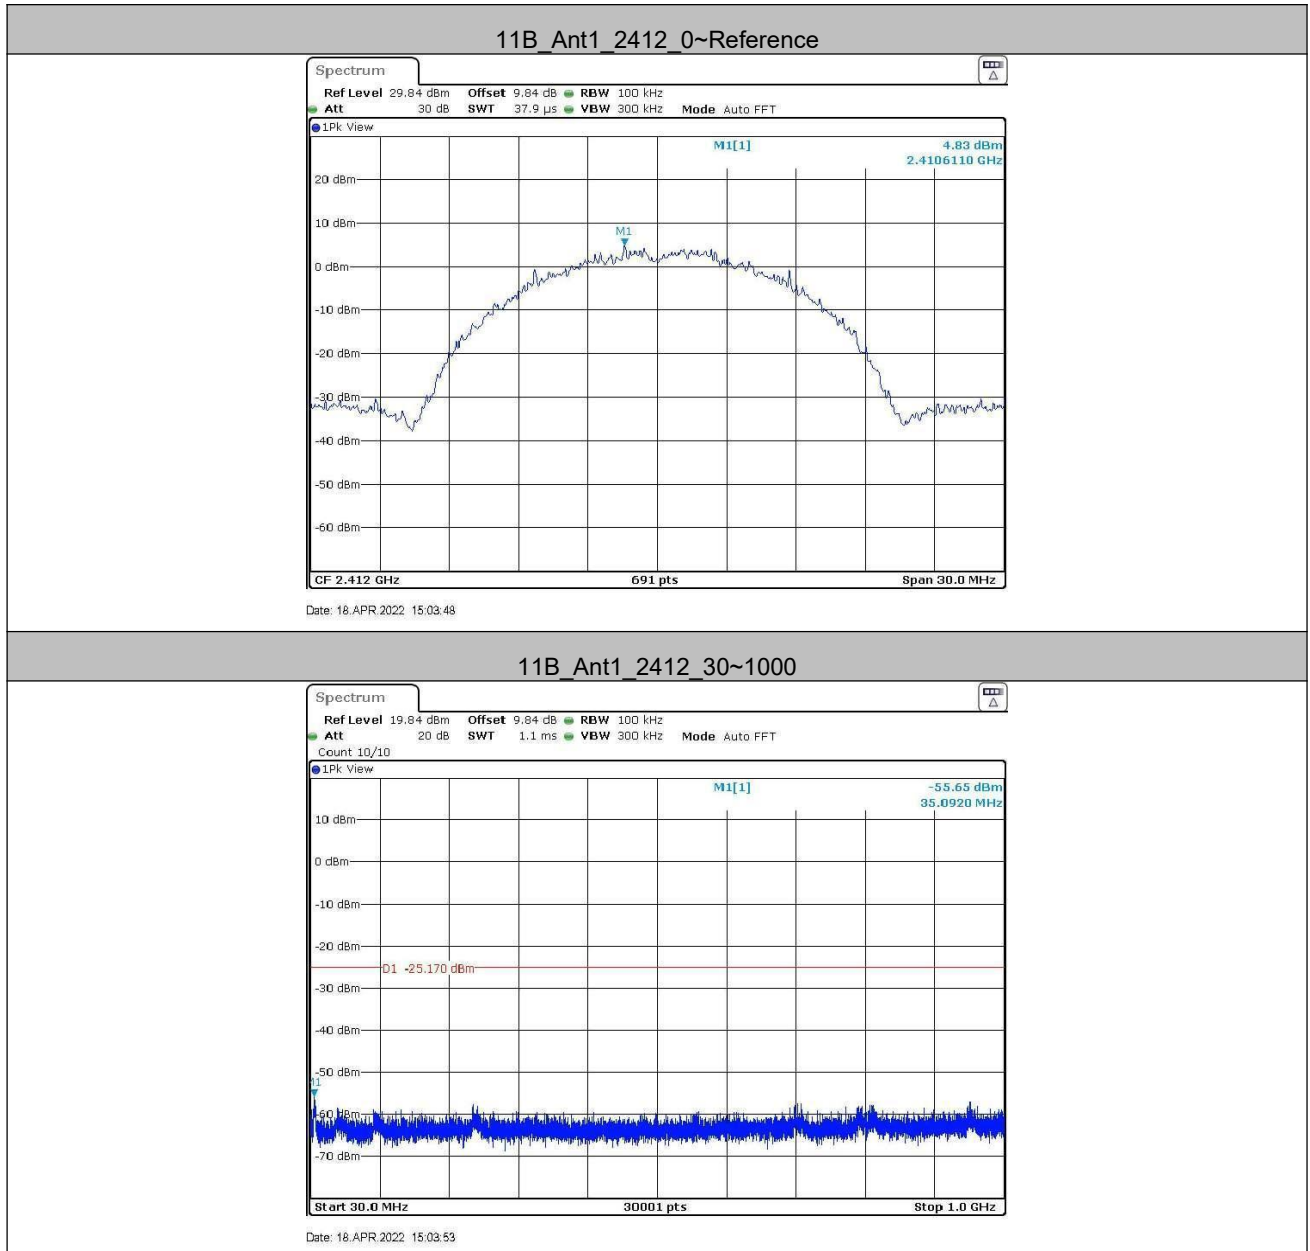


11B_Ant1_2412_1000~26500

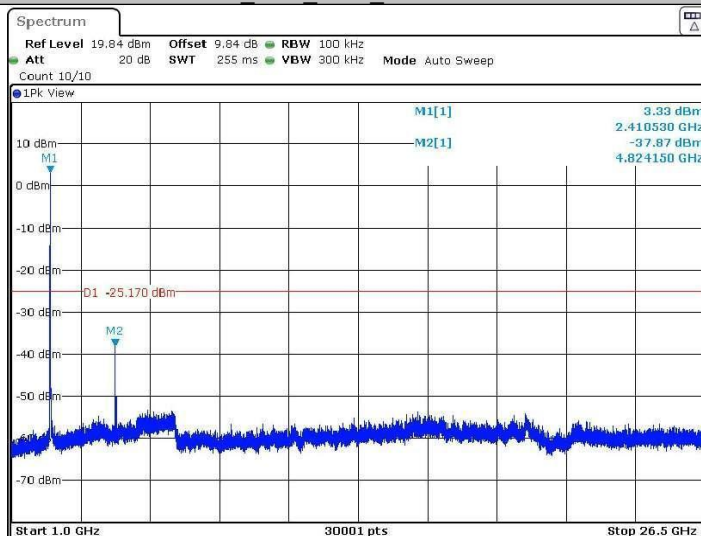


Date: 18.APR.2022 15:04:14

11B_Ant1_2437_0~Reference

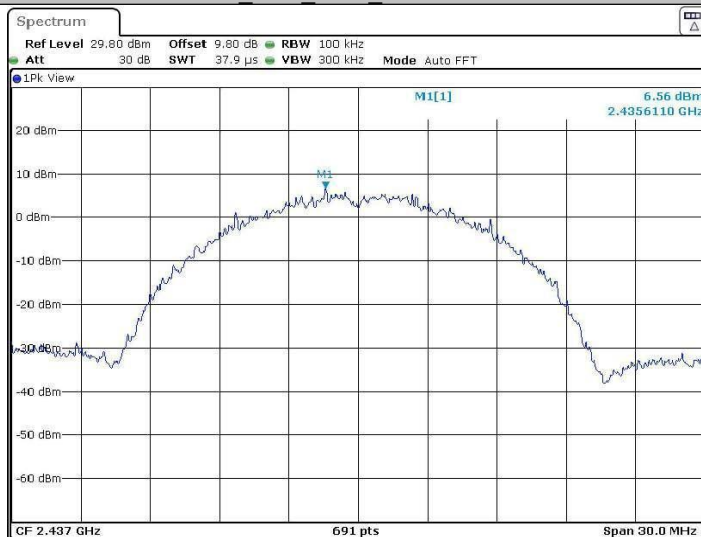


Date: 18.APR.2022 15:06:15

11B_Ant1_2437_30~1000

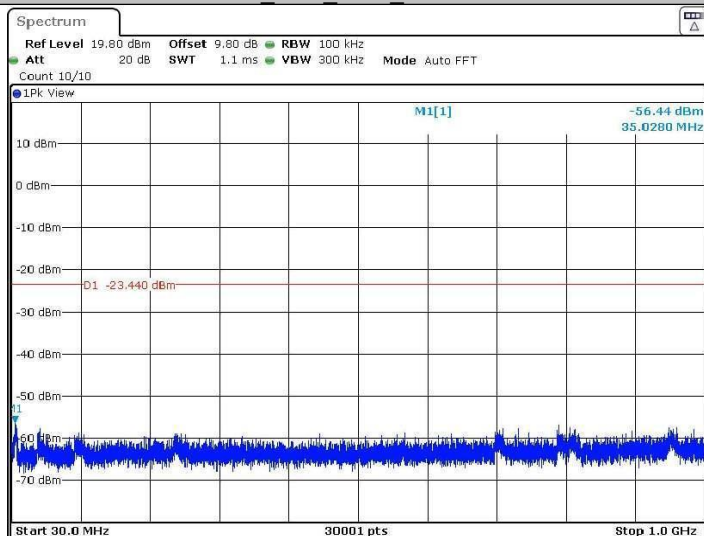


Date: 18-APR-2022 15:06:19

11B_Ant1_2437_1000~26500

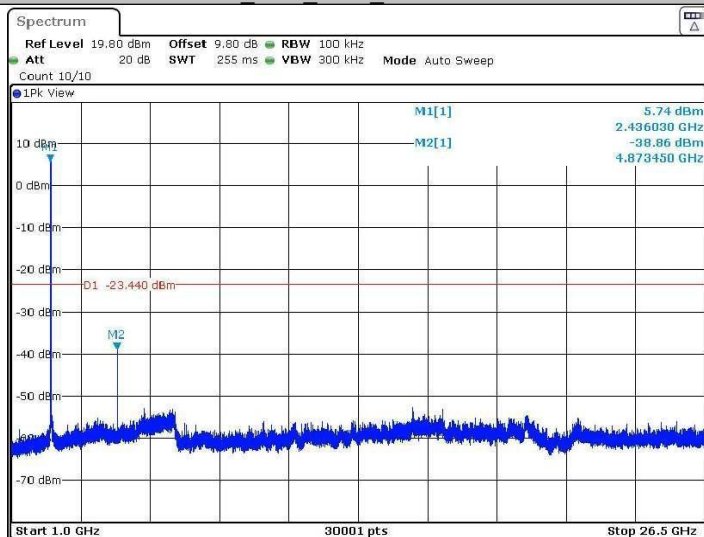


Date: 18-APR-2022 15:06:41

11B_Ant1_2462_0~Reference

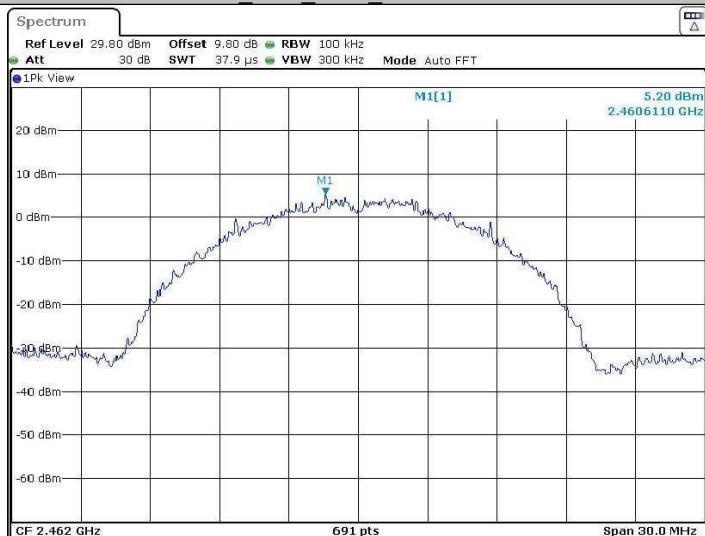

Date: 18.APR.2022 15:09:23

11B_Ant1_2462_30~1000

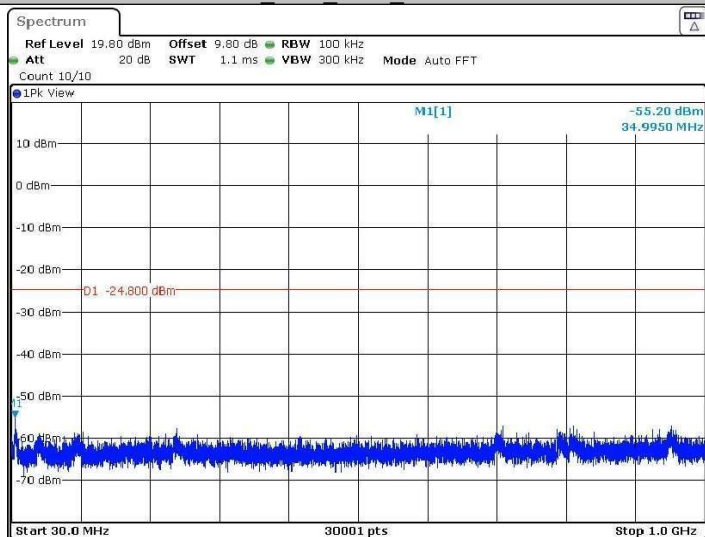

Date: 18.APR.2022 15:09:27