

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:

鑫东声

客 戶 料 號:
CUST P/N:

10-0110-0022

頂 智 料 號:
FINE P/N:

TX-DZ43.505.300.65-K6.5-L30 开双槽

日 期:
DATE:

2023/7/13

版 本:
Version:

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	Φ 20.5x43-6.3uH-0.08x105-20mm	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	鑫东声
---------------	-------------------------------	----------------	----------------------------	-----

一、尺寸 DIMENSION:(mm)

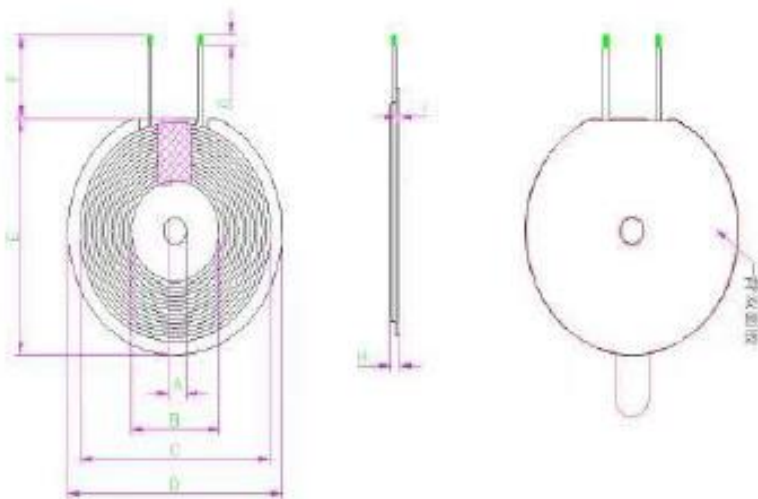

A	5.2 $\pm$ 0.5
B	20.0 $\pm$ 1.0
C	38.5 $\pm$ 1.5
D	43.5 $\pm$ 1.5
E	43.0 $\pm$ 1.5
F	30.0 $\pm$ 2.0
G	3.0 $\pm$ 2.0
H	1.7 $\pm$ 0.3
I	0.65 $\pm$ 0.2

- 1) 线径: 0.08*24P*2P 漆包线
- 2) 绕线圈数: 10TS
- 3) 起尾线是否交叉: 是
- 4) 线圈包 8mm 宽高温胶带
- 5) 线圈与磁片需粘贴居中`
- 6) 磁片背 42 圆白胶

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.08*105P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.3uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤54m Ω	100KHz/1.0V	LCZ METER 502B
4	Q 值	S-F	≥75m Ω	100KHz/1.0V	LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE