

天線規格承認書

Acceptance of antenna specifications


汕頭市龍湖区科馬電子加工場
製造商：Shantou Longhu District Koma Electronic Processing
Manufacturer: Factory

規格：2.4G 天線 全長40MM白色
Specifications:

產品料號：17芯 * 0.1 * 1.6 PVC
Part NO.:

汕頭市龍湖区新津街道金泰街22號二樓
地址：No. 22, Jintai Street, Xinjin Sub-district, Longhu District,
Shantou City, Second Floor
Address:

图示：

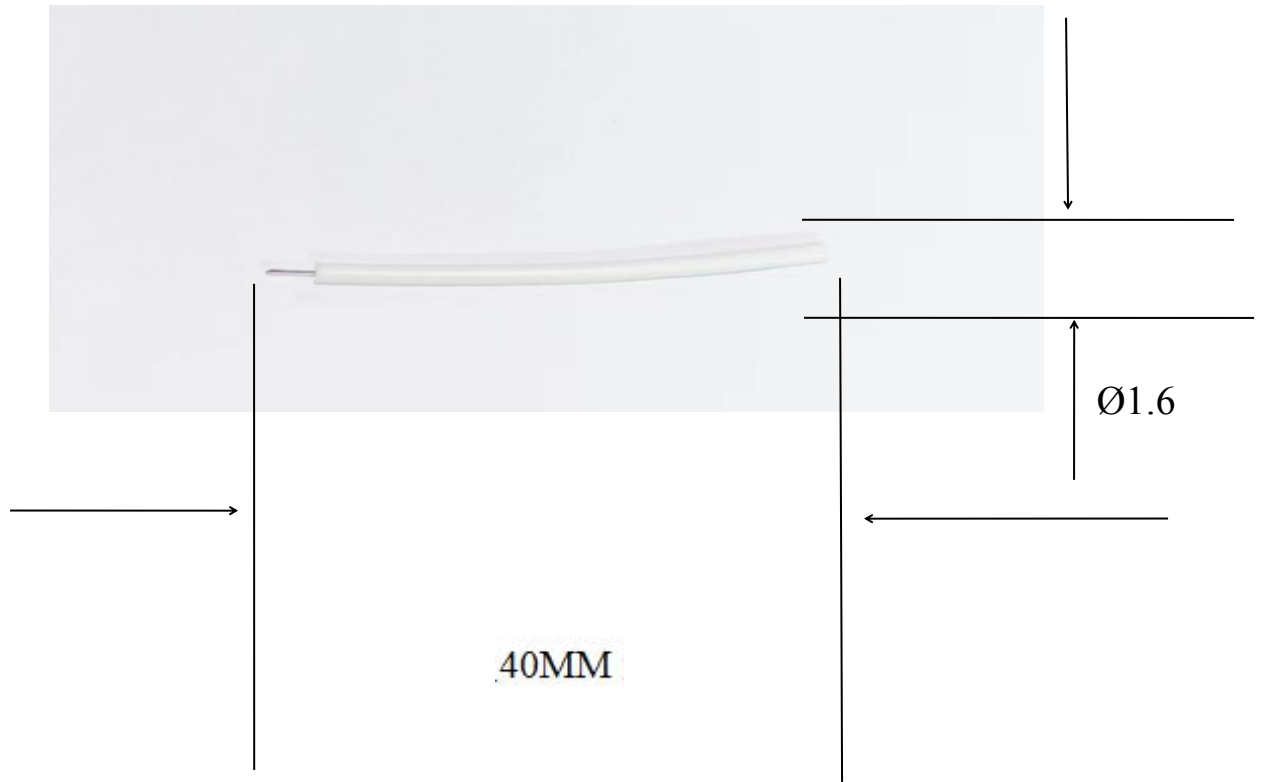

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >20%

Impedance 50 Ohm

Gain 2.2DBi

Polarization mode: linear polarization

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.4 white

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions




1. Network Analyzers :

Agilent 8753D 5071B

2. Communications Test Set:

Agilent E5515C

3. 3D Chamber Test System

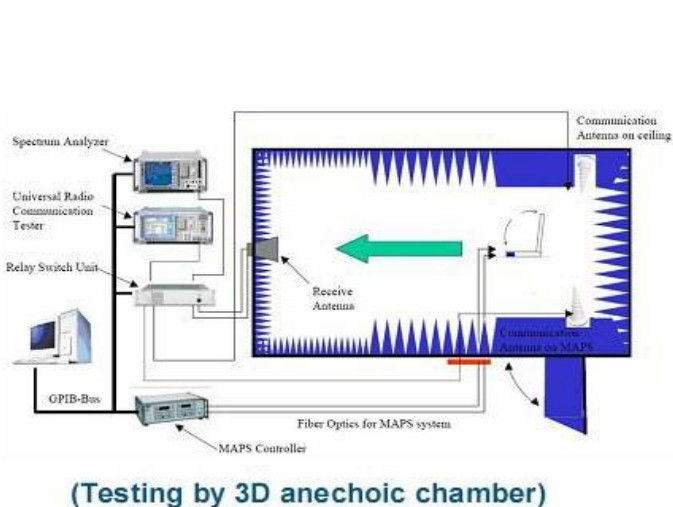


Effiency &Gain


Freq (MHz)	Effi (%)	Gain (dBi)
2400	23.66	1.2
2410	23.19	0.38
2420	23.03	0.49
2430	22.41	0.42
2440	21.67	0.45
2450	20.24	1.2
2460	20.61	0.51
2470	21.41	0.59
2480	23.89	0.56
2490	26.46	0.53
2500	25.73	2.2

Radiation Pattern


2400.000MHz

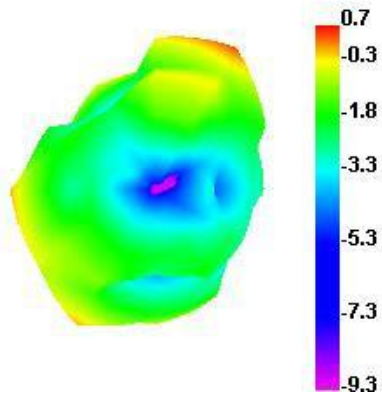


2400.000MHz H

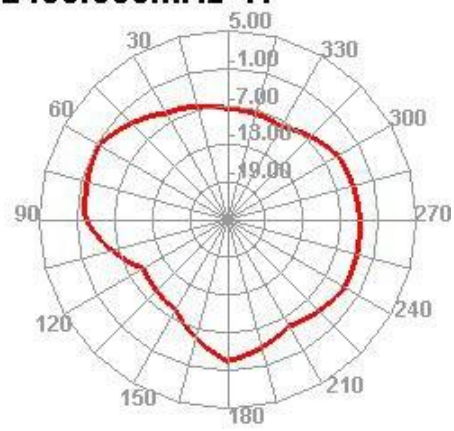


2400.000MHz E1

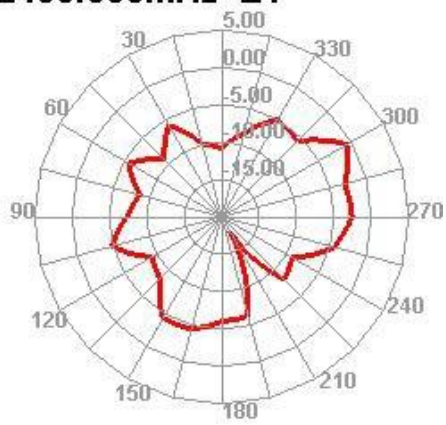


2400.000MHz E2

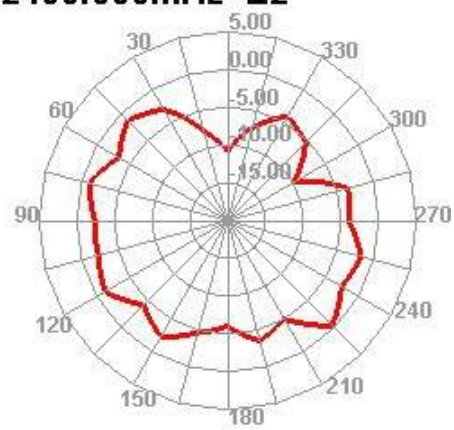


2450.000MHz

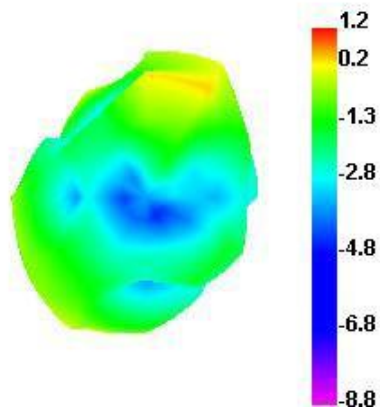


2450.000MHz H

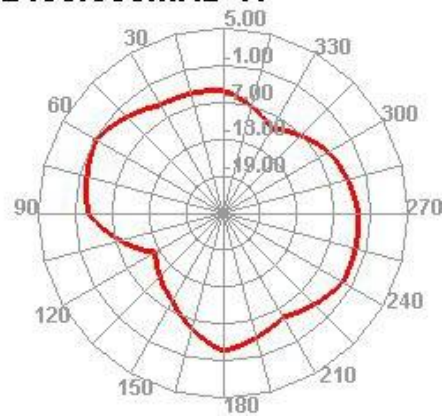


2450.000MHz E1

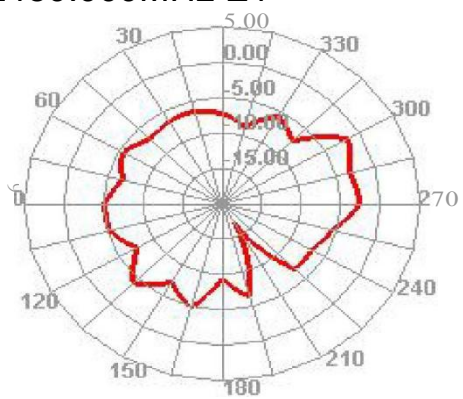


2450.000MHz E2

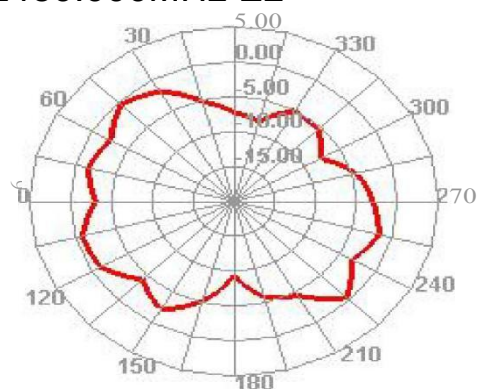


2500.000MHz

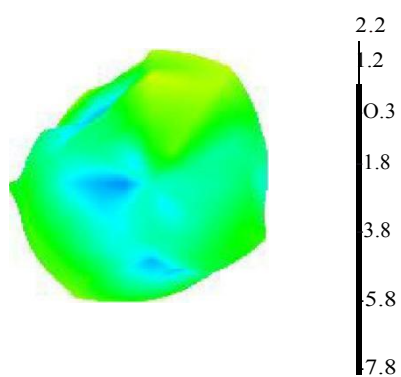

2500.000MHz H

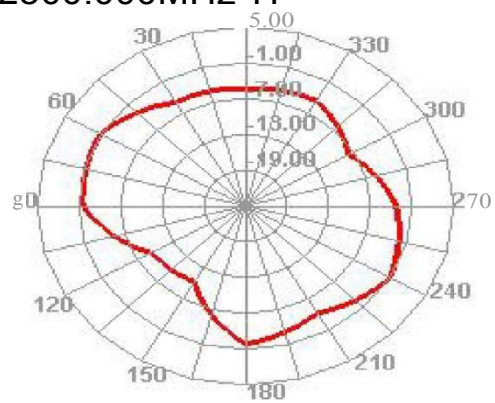

2500.000MHz E1

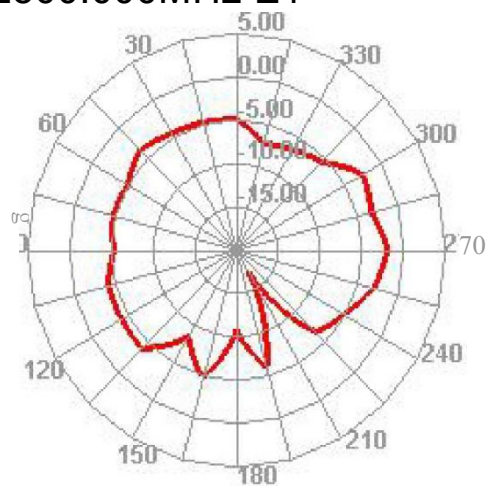

2500.000MHz E2

