



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V04  
Report Template Revision Date: 2018-07-06

# TEST REPORT

**Report No.:** CQASZ20200800871E-01

**Applicant:** IoTTree Limited

**Address of Applicant:** Room B2, 4/F, Wah Shing Industrial Building, 18 Cheung Shun Street, Cheung Sha Wan, Hong Kong

**Equipment Under Test (EUT):**

**EUT Name:** IoT Gateway

**Model No.:** ICT-GW001

**Brand Name:** IoTTree

**FCC ID:** 2AW9Y-GW001

**Standards:** 47 CFR Part 15, Subpart C

**Date of Receipt:** 2020-08-18

**Date of Test:** 2018-08-18 to 2020-09-01

**Date of Issue:** 2020-09-01

**Test Result:** PASS\*

\*In the configuration tested, the EUT complied with the standards specified above

**Tested By:**

*Martin Lee*

( Martin Lee )

**Reviewed By:**

*Sheek Luo*

( Sheek Luo )

**Approved By:**

*Jack Ai*

( Jack Ai )



## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20200800871E-01	Rev.01	Initial report	2020-09-01

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

### 3 Contents

	Page
1 VERSION .....	2
2 TEST SUMMARY .....	3
3 CONTENTS .....	4
4 GENERAL INFORMATION .....	5
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 ADDITIONAL INSTRUCTIONS .....	7
4.4 TEST ENVIRONMENT .....	9
4.5 DESCRIPTION OF SUPPORT UNITS .....	9
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	10
4.7 TEST LOCATION .....	11
4.8 TEST FACILITY .....	11
4.9 DEVIATION FROM STANDARDS .....	11
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	11
4.11 EQUIPMENT LIST .....	12
5 TEST RESULTS AND MEASUREMENT DATA .....	13
5.1 ANTENNA REQUIREMENT .....	13
5.2 CONDUCTED EMISSIONS .....	14
5.3 CONDUCTED PEAK OUTPUT POWER .....	18
5.4 6dB OCCUPY BANDWIDTH .....	21
5.5 POWER SPECTRAL DENSITY .....	24
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....	27
5.7 SPURIOUS RF CONDUCTED EMISSIONS .....	29
5.8 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS .....	35
5.8.1 Spurious Emissions .....	35
6 PHOTOGRAPHS - EUT TEST SETUP .....	41
6.1 RADIATED SPURIOUS EMISSION .....	41
6.2 CONDUCTED EMISSION .....	42
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....	43

## 4 General Information

### 4.1 Client Information

Applicant:	IoTree Limited
Address of Applicant:	Room B2, 4/F, Wah Shing Industrial Building, 18 Cheung Shun Street, Cheung Sha Wan, Hong Kong
Manufacturer:	Icreatec Limited
Address of Manufacturer:	Room 13, 25/F, ONE Midtown, 11 Hoi Shing Road, Tsuen Wan, N.T. Hong Kong
Factory:	Icreatec Limited
Address of Factory:	Room 13, 25/F, ONE Midtown, 11 Hoi Shing Road, Tsuen Wan, N.T. Hong Kong

### 4.2 General Description of EUT

Product Name:	IoT Gateway
Model No.:	ICT-GW001
Trade Mark:	IoTree
Hardware Version:	ICT-GW-S-V1.0
Software Version:	ICT-GW-H-V1.0
Operation Frequency:	2430MHz~2475MHz
Channel Numbers:	10
Channel Separation:	5MHz
Type of Modulation:	O-QPSK
Product Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Test Software of EUT:	RF Test (manufacturer declare)
Antenna Type:	PCB antenna
Antenna Gain:	2.0dBi
EUT Power Supply:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2430MHz	4	2445MHz	7	2460MHz	10	2475MHz
2	2435MHz	5	2450MHz	8	2465MHz	/	/
3	2440MHz	6	2455MHz	9	2470MHz	/	/

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2430MHz
The middle channel	2450MHz
The highest channel	2475MHz

### 4.3 Additional Instructions

<b>EUT Test Software Settings:</b>	
Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: *#*#3646633#*#*

## Run Software:

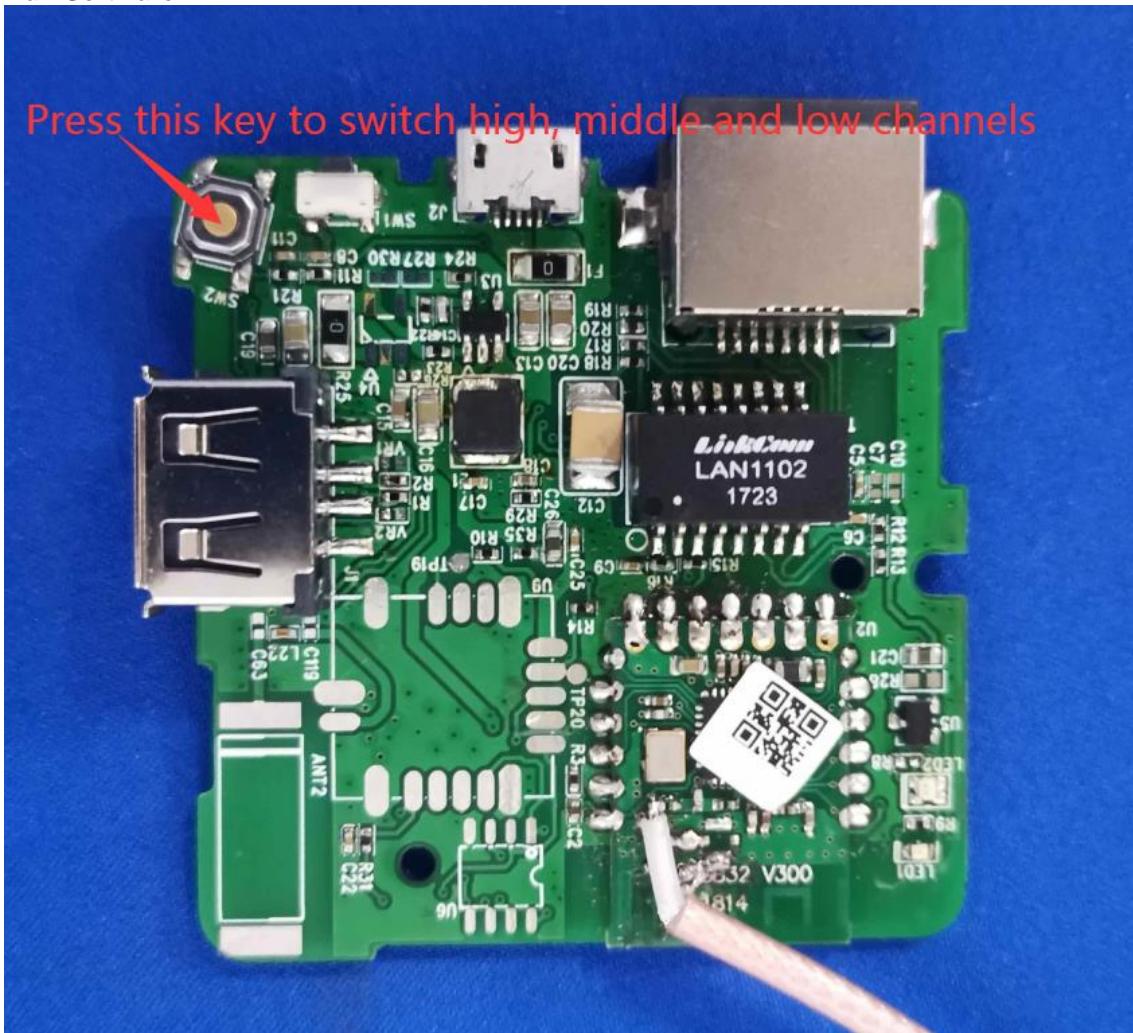


## Operated Mode for Worst Duty Cycle:

Test Mode	Duty Cycle(x)	Average correction factor(dB)
O-QPSK	1.56%	18.07
<b>Power Level:</b>		
The lowest channel		17 dBm
The middle channel		16 dBm
The highest channel		17 dBm

### Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;

## Test Graph\_Duty Cycle:

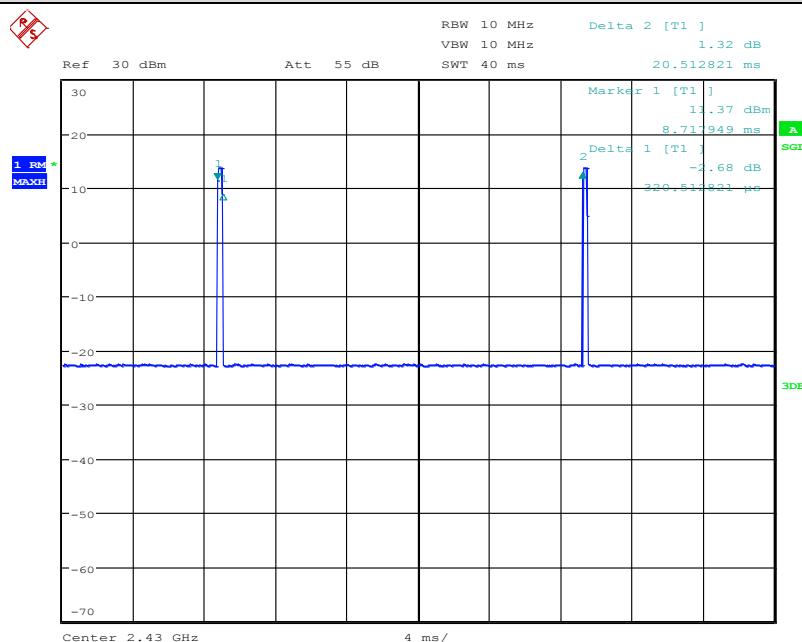

Date: 1.SEP.2020 17:33:52

## 4.4 Test Environment

<b>Operating Environment:</b>	
<b>Radiated Emissions:</b>	
Temperature:	25.6 °C
Humidity:	56 % RH
Atmospheric Pressure:	1009 mbar
<b>Conducted Emissions:</b>	
Temperature:	25.6 °C
Humidity:	56 % RH
Atmospheric Pressure:	1009 mbar
<b>Radio conducted item test (RF Conducted test room):</b>	
Temperature:	25.4 °C
Humidity:	70 % RH
Atmospheric Pressure:	1009 mbar
<b>Test mode:</b>	
Transmitting mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

## 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

### 1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	HUAWEI	LPL-C010050200Z	DOC	CQA

### 2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

## 4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	$3 \times 10^{-8}$	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## **4.7 Test Location**

**Shenzhen Huaxia Testing Technology Co., Ltd,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

## **4.8 Test Facility**

- A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## **4.9 Deviation from Standards**

None.

## **4.10 Other Information Requested by the Customer**

None.

## 4.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2019/10/25	2020/10/24
Spectrum analyzer	R&S	FSU26	CQA-038	2019/10/25	2020/10/24
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2019/10/25	2020/10/24
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2019/10/21	2020/10/20
Bilog Antenna	R&S	HL562	CQA-011	2019/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2019/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2019/9/25	2020/9/24
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2019/9/26	2020/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2019/9/26	2020/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2019/9/26	2020/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2019/9/26	2020/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2019/9/26	2020/9/25
EMI Test Receiver	R&S	ESR7	CQA-005	2019/10/25	2020/10/24
LISN	R&S	ENV216	CQA-003	2019/10/23	2020/10/22
Coaxial cable	CQA	N/A	CQA-C009	2019/9/26	2020/9/25
DC power	KEYSIGHT	E3631A	CQA-028	2019/9/26	2020/9/25

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

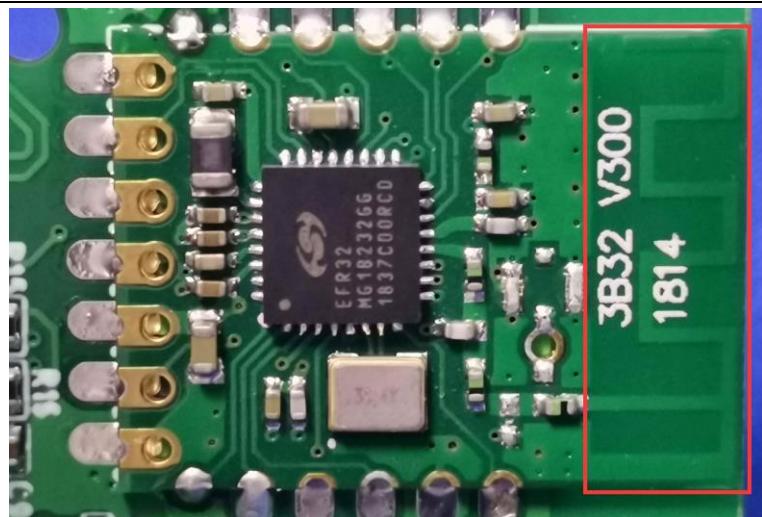Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
15.247(b) (4) requirement:	<p>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
EUT Antenna:	 <p>The antenna is PCB antenna. The best case gain of the antenna is 2.0dBi.</p>


## 5.2 Conducted Emissions

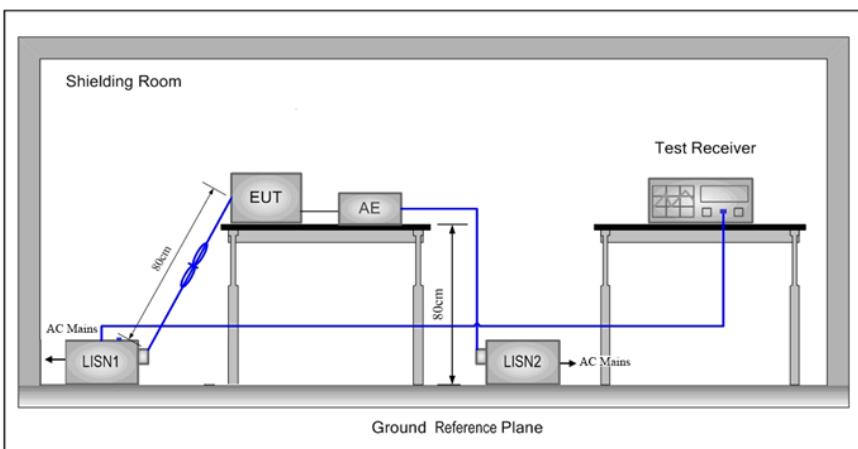Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak      Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>		
Test Setup:			
Test Mode:	Transmitting with O-QPSK at lowest, middle and highest channel.		
Final Test Mode:	Through Pre-scan, find at lowest channel is the worst case.		

	Only the worst case is recorded in the report.
Test voltage:	120V60Hz
Test Results:	Pass

**Measurement Data**

Live line:

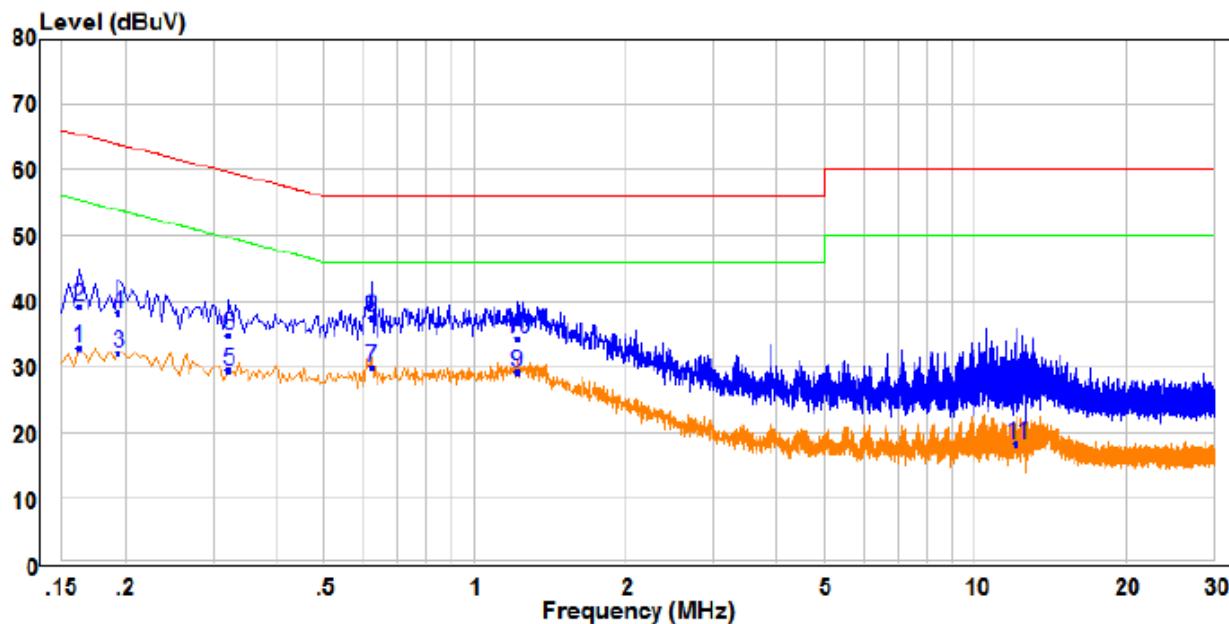


Freq	Read		Level	Limit	Over	Remark	Pol/Phase
	Freq	Level					
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.162	23.24	9.49	32.73	55.36	-22.63	Average Line
2	0.162	29.75	9.49	39.24	65.36	-26.12	QP Line
3	0.194	22.71	9.49	32.20	53.86	-21.66	Average Line
4	0.194	28.82	9.49	38.31	63.86	-25.55	QP Line
5	0.322	19.92	9.49	29.41	49.66	-20.25	Average Line
6	0.322	25.31	9.49	34.80	59.66	-24.86	QP Line
7	PP 0.622	20.22	9.74	29.96	46.00	-16.04	Average Line
8	QP 0.622	27.81	9.74	37.55	56.00	-18.45	QP Line
9	1.214	19.75	9.53	29.28	46.00	-16.72	Average Line
10	1.214	24.77	9.53	34.30	56.00	-21.70	QP Line
11	12.097	8.49	9.85	18.34	50.00	-31.66	Average Line
12	12.097	16.39	9.85	26.24	60.00	-33.76	QP Line

**Remark:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

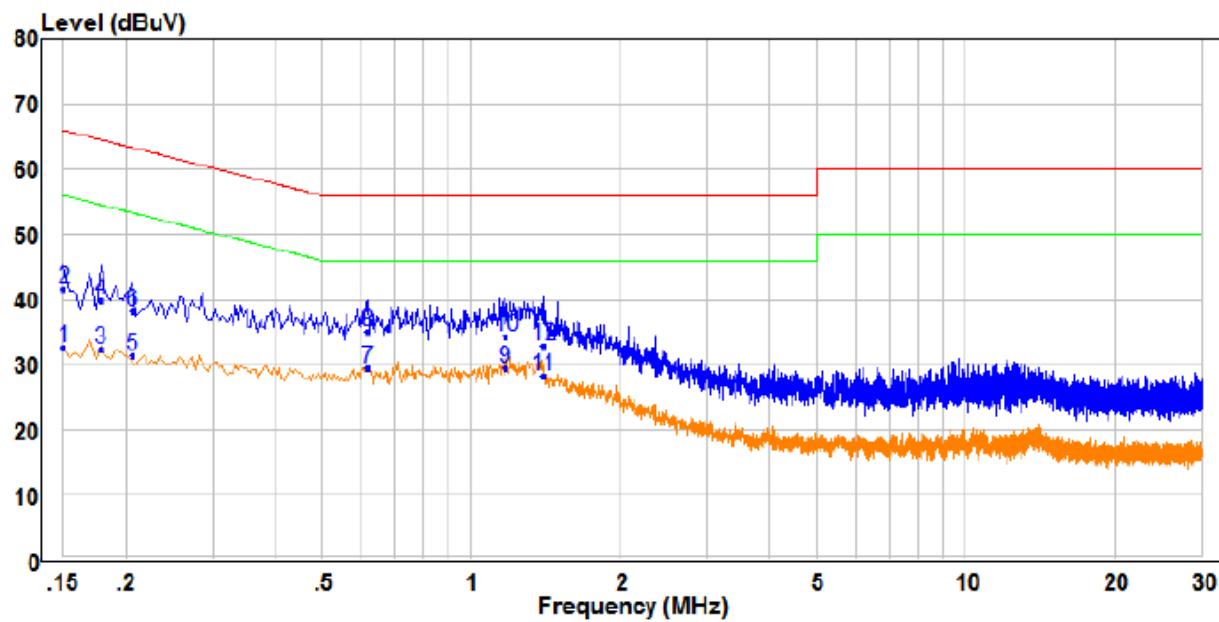


Freq	Read Level	Factor	Limit		Over Line	Over Limit	Remark	Pol/Phase
			Level	dBuV				
	MHz		dB	dBuV		dB		
1	0.150	23.23	9.48	32.71	56.00	-23.29	Average	Neutral
2	0.150	32.03	9.48	41.51	66.00	-24.49	QP	Neutral
3	0.178	22.96	9.48	32.44	54.58	-22.14	Average	Neutral
4	0.178	30.47	9.48	39.95	64.58	-24.63	QP	Neutral
5	0.206	21.86	9.48	31.34	53.37	-22.03	Average	Neutral
6	0.206	28.71	9.48	38.19	63.37	-25.18	QP	Neutral
7	PP 0.618	19.75	9.74	29.49	46.00	-16.51	Average	Neutral
8	QP 0.618	25.17	9.74	34.91	56.00	-21.09	QP	Neutral
9	1.170	19.72	9.72	29.44	46.00	-16.56	Average	Neutral
10	1.170	24.69	9.72	34.41	56.00	-21.59	QP	Neutral
11	1.398	18.58	9.72	28.30	46.00	-17.70	Average	Neutral
12	1.398	23.17	9.72	32.89	56.00	-23.11	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


### 5.3 Conducted Peak Output Power

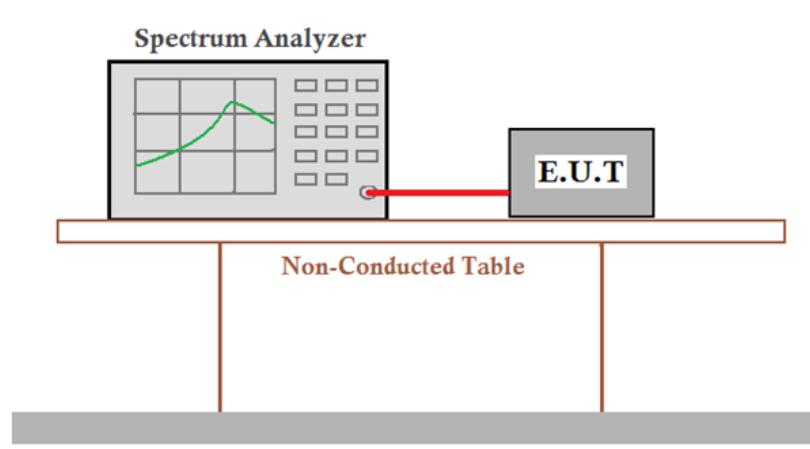
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b></p> <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Limit:	30dBm
Test Mode:	Transmitting with O-QPSK at lowest, middle and highest channel.
Test Results:	Pass

#### Measurement Data


O-QPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	16.94	30.00	Pass
Middle	15.86	30.00	Pass
Highest	16.72	30.00	Pass

Test plot as follows:

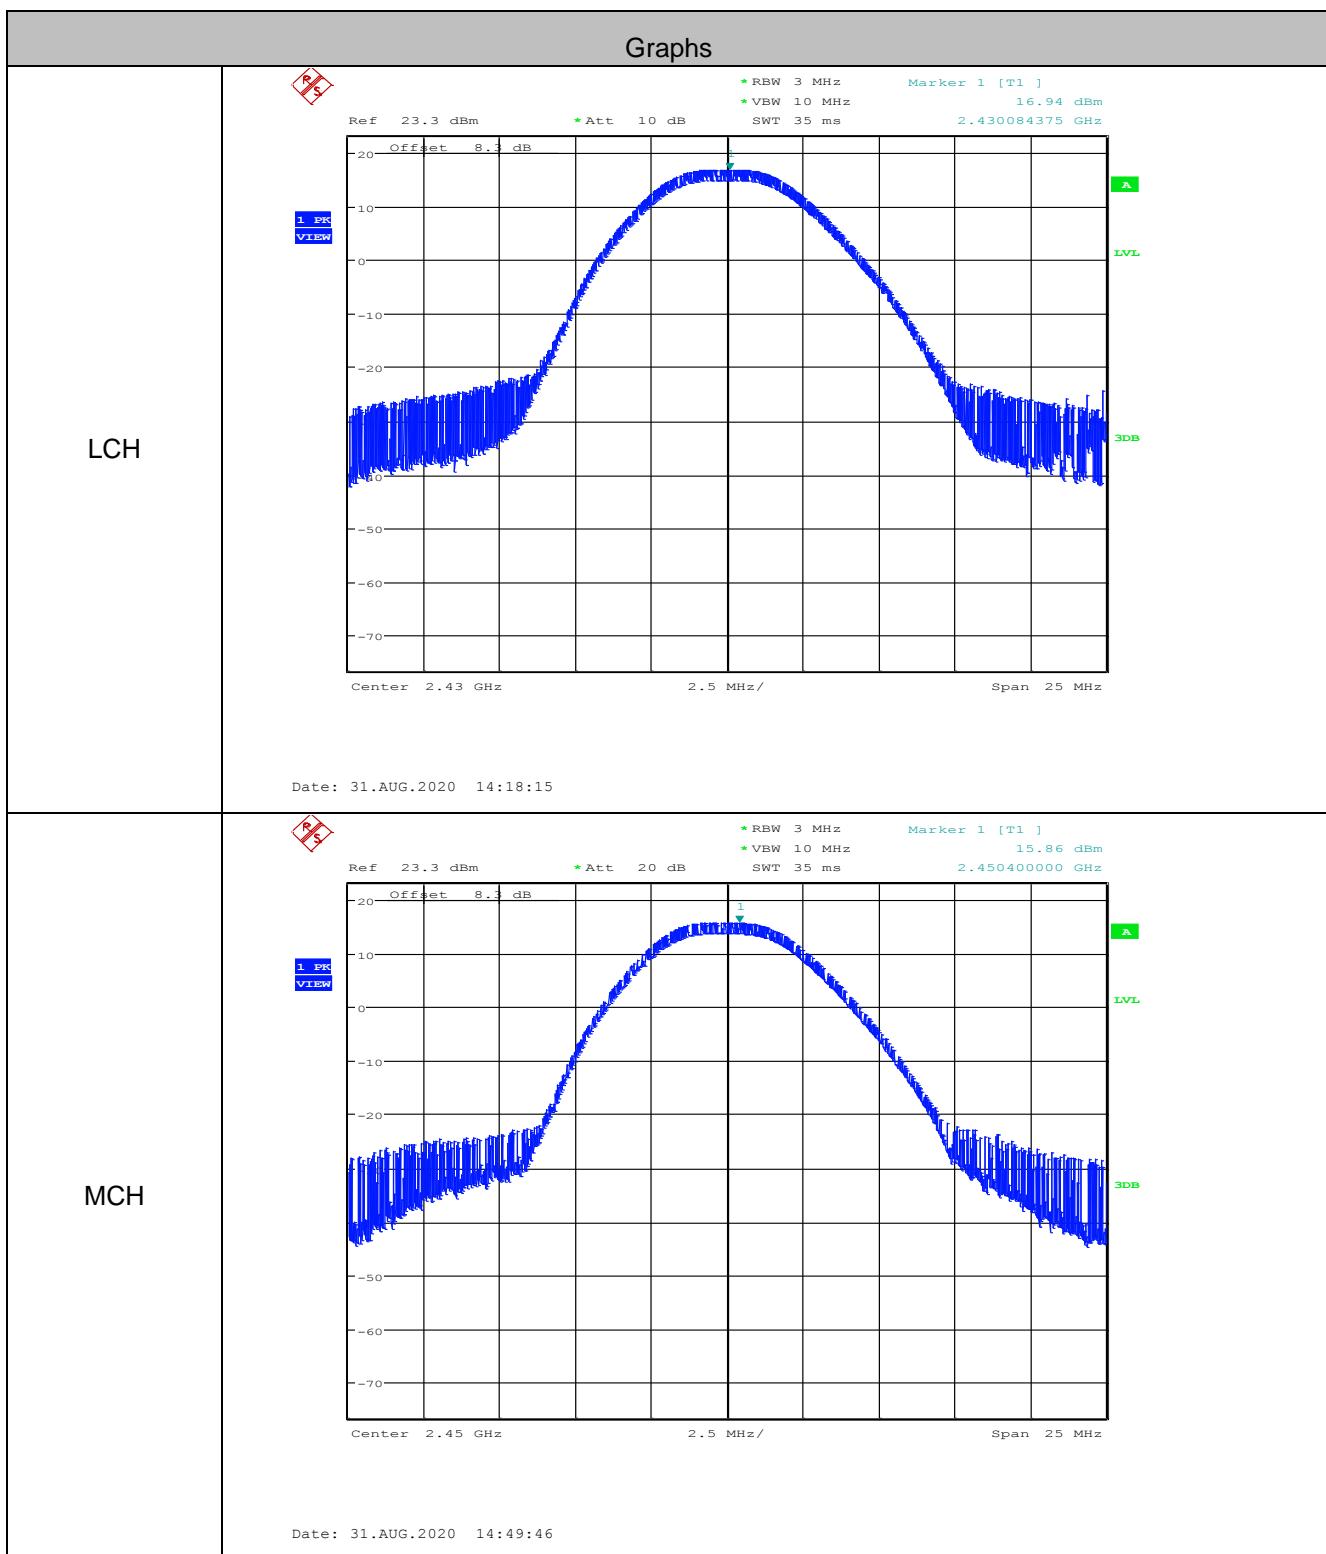

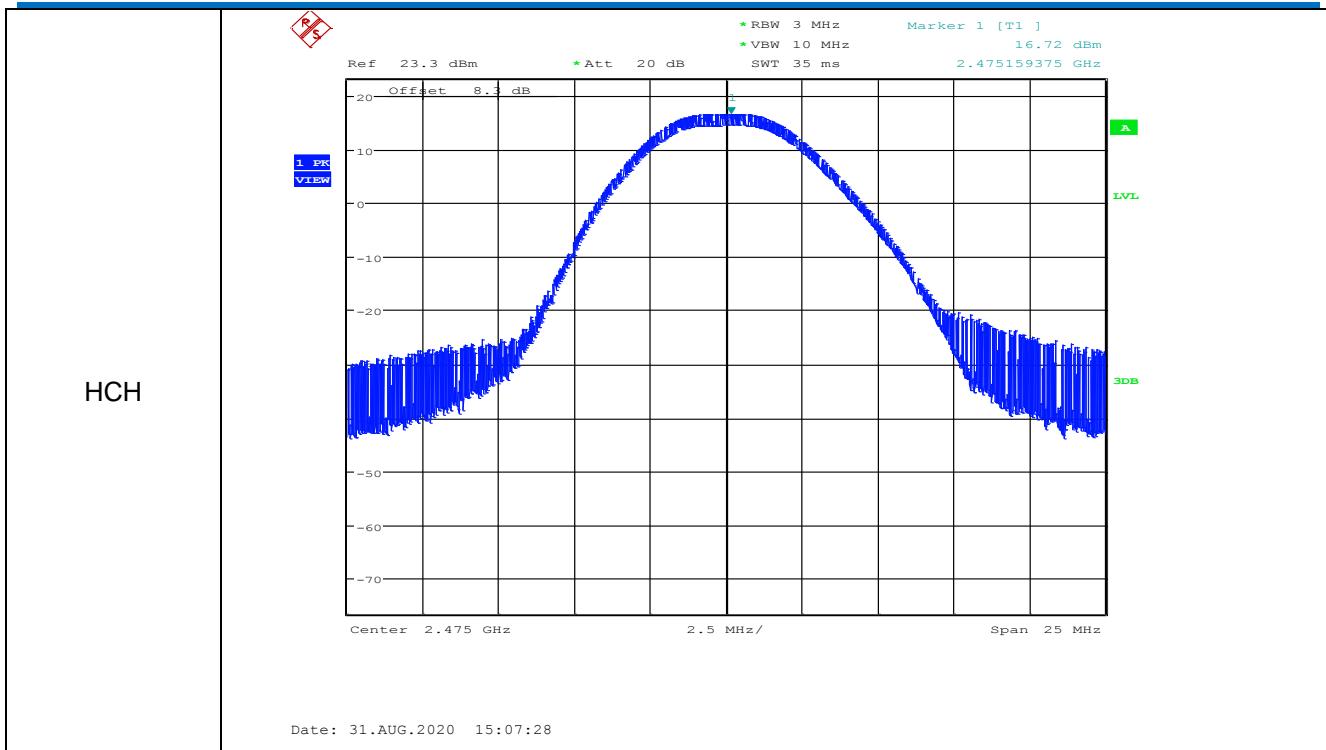


## 5.4 6dB Occupy Bandwidth

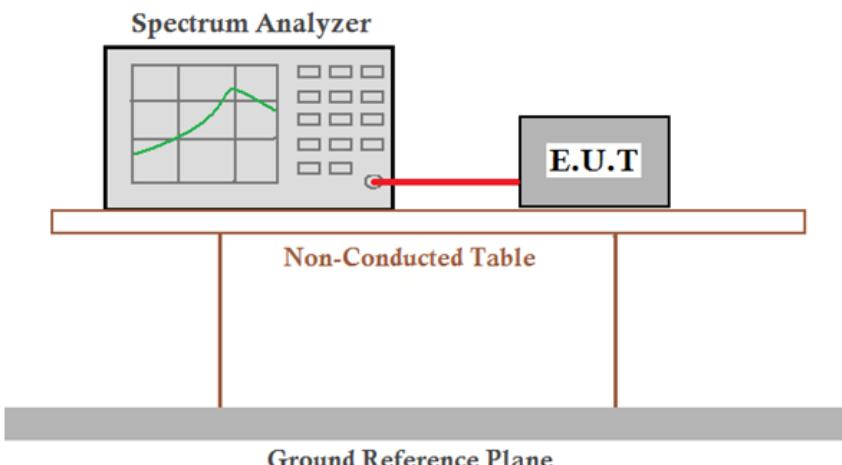
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b></p> <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Mode:	Transmitting with O-QPSK at lowest, middle and highest channel.
Limit:	$\geq 500$ kHz
Test Results:	Pass

### Measurement Data


O-QPSK mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (MHz)	Result
Lowest	1.384	$\geq 0.5$	Pass
Middle	1.145	$\geq 0.5$	Pass
Highest	1.144	$\geq 0.5$	Pass

Test plot as follows:

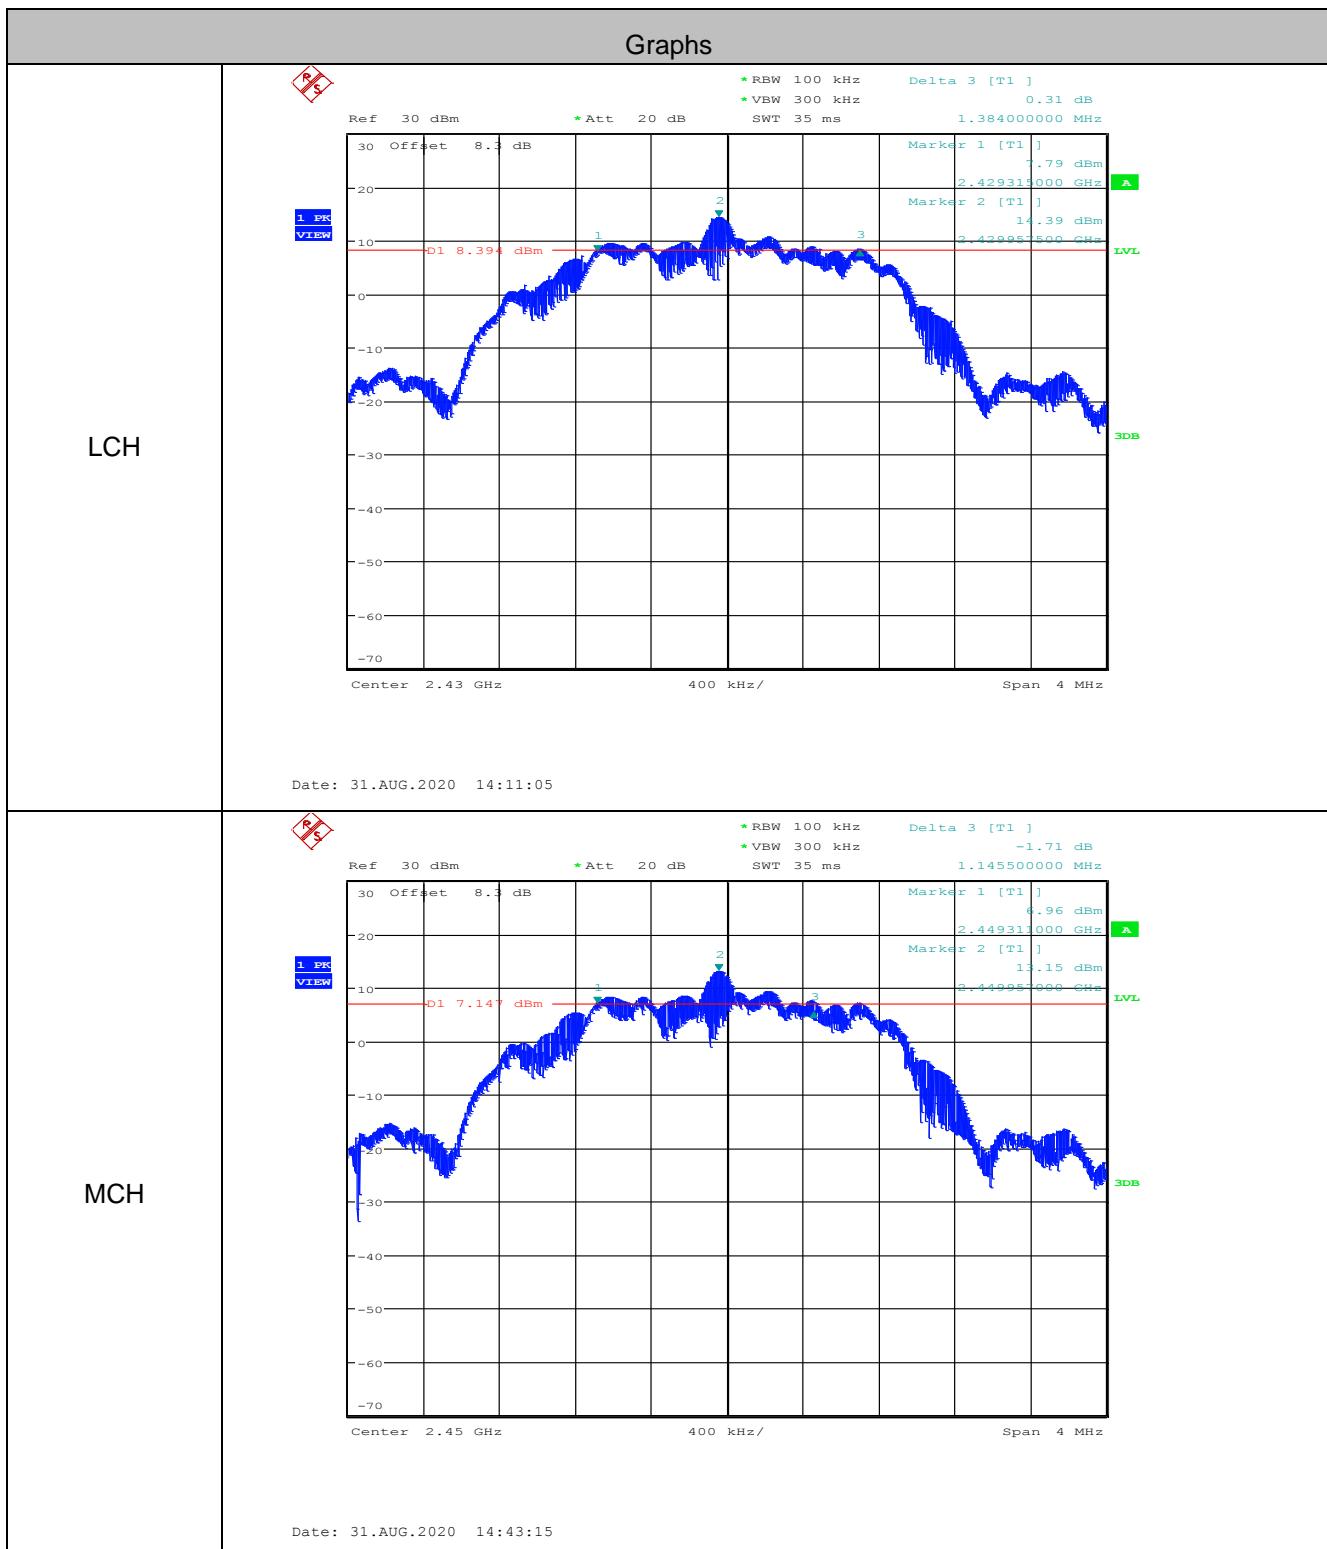

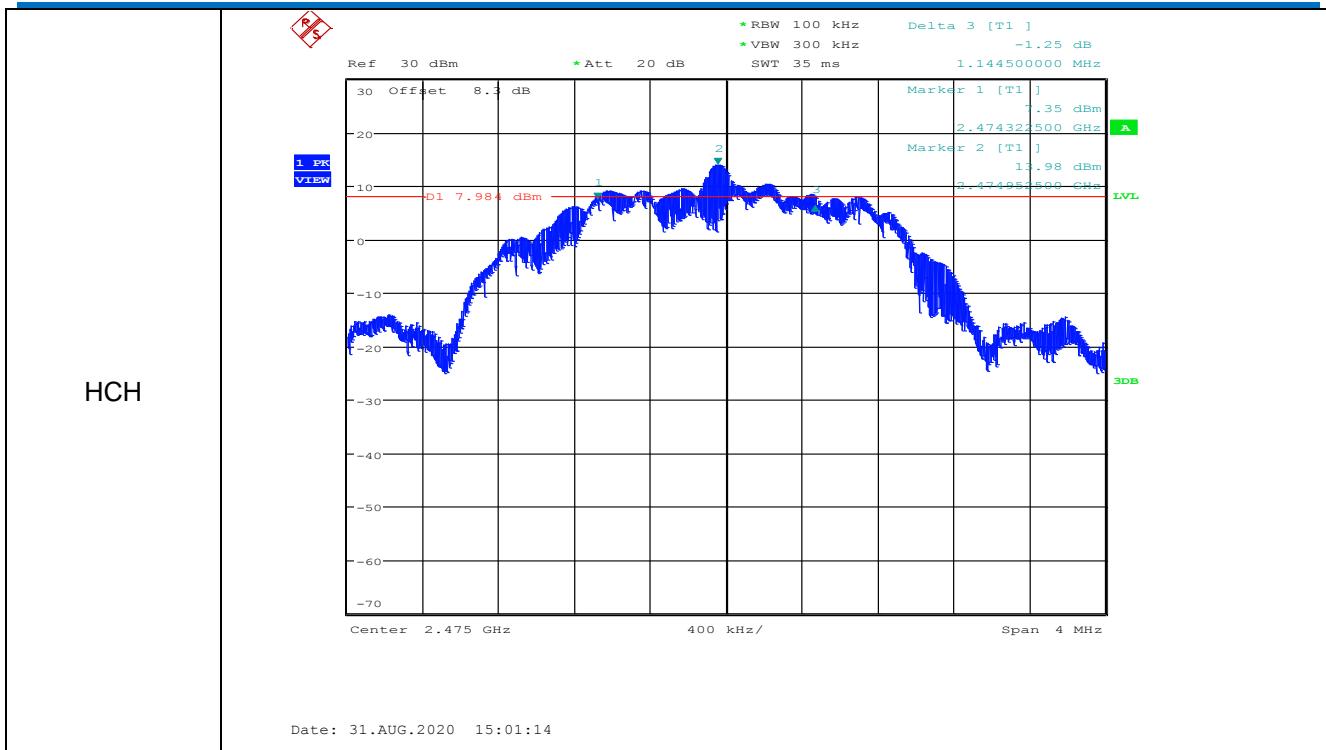


## 5.5 Power Spectral Density

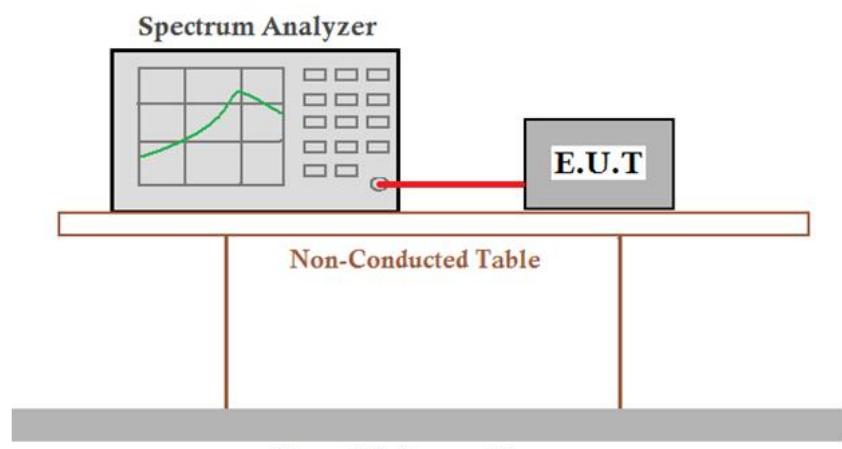
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Limit:	≤8.00dBm/3kHz
Test Mode:	Transmitting with O-QPSK at lowest, middle and highest channel.
Test Results:	Pass

### Measurement Data


O-QPSK mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	2.100	≤8.00	Pass
Middle	0.480	≤8.00	Pass
Highest	1.870	≤8.00	Pass

Test plot as follows:

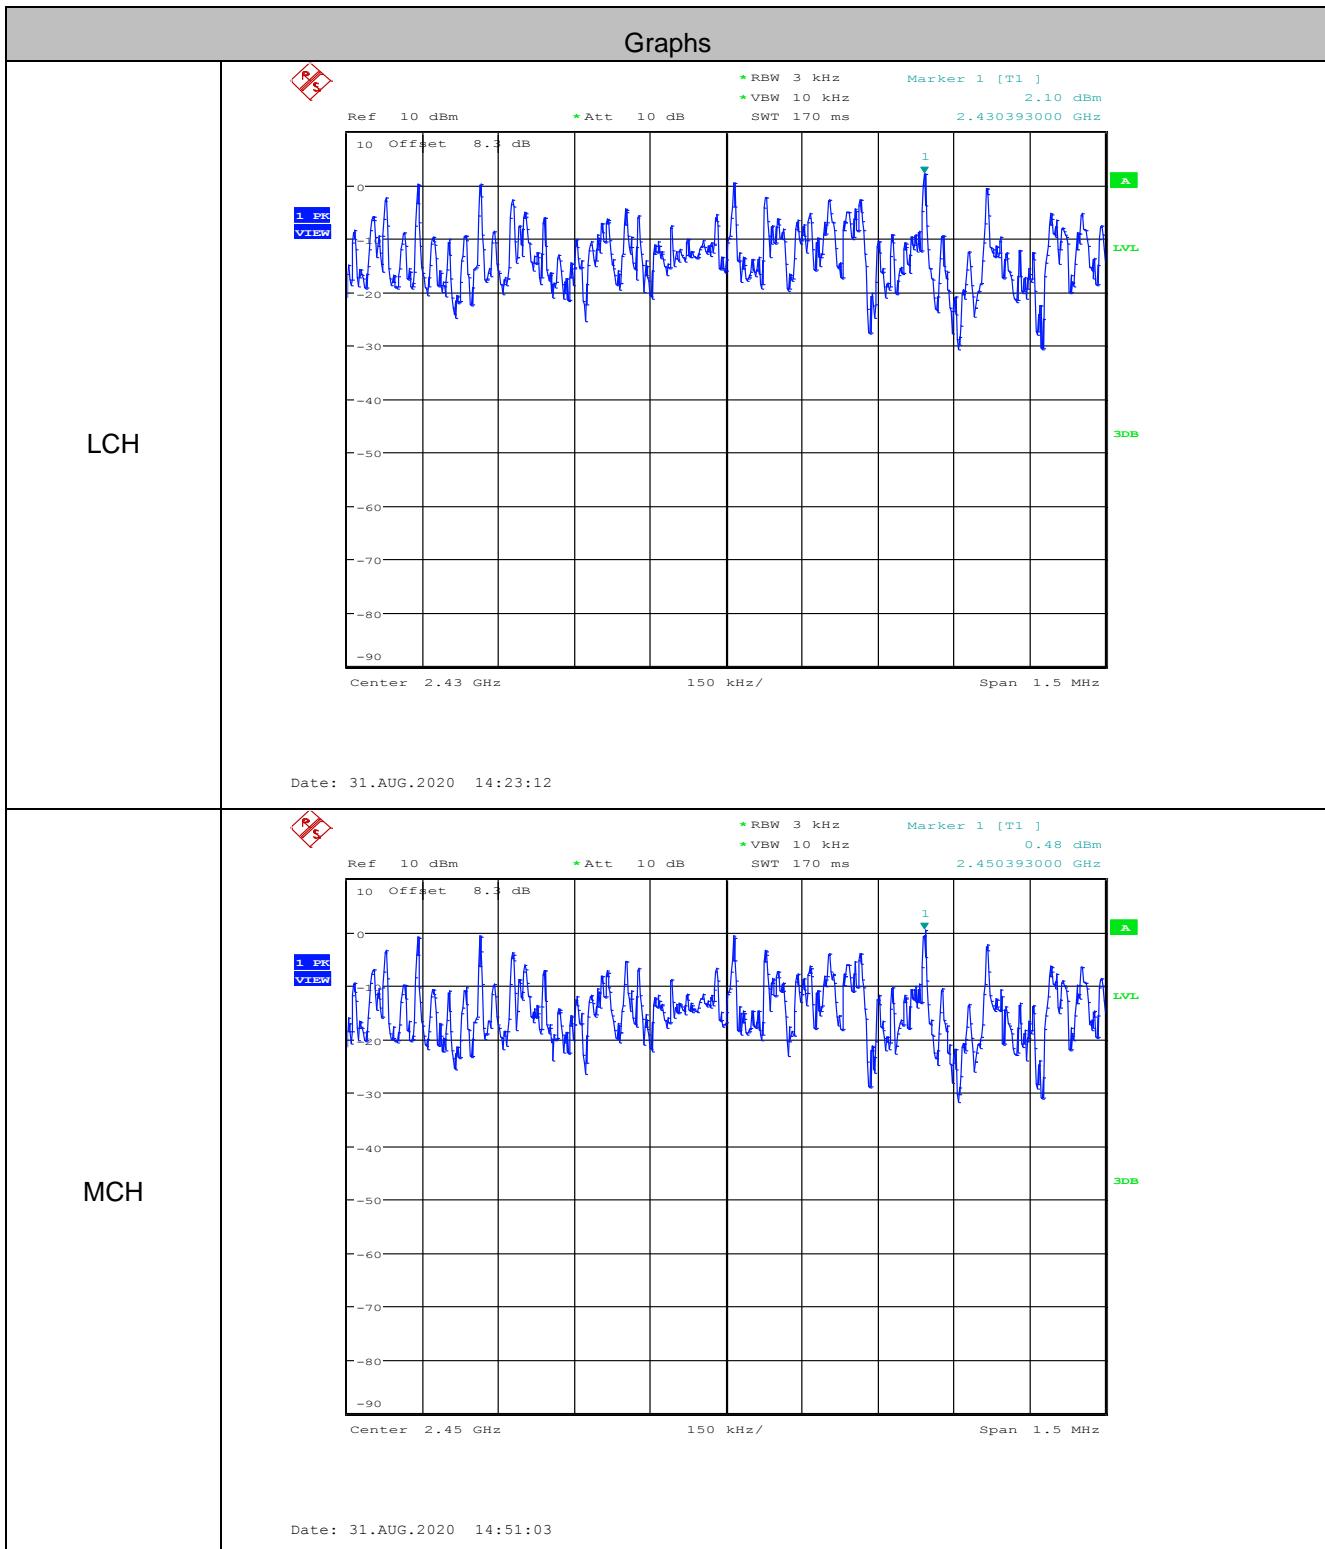

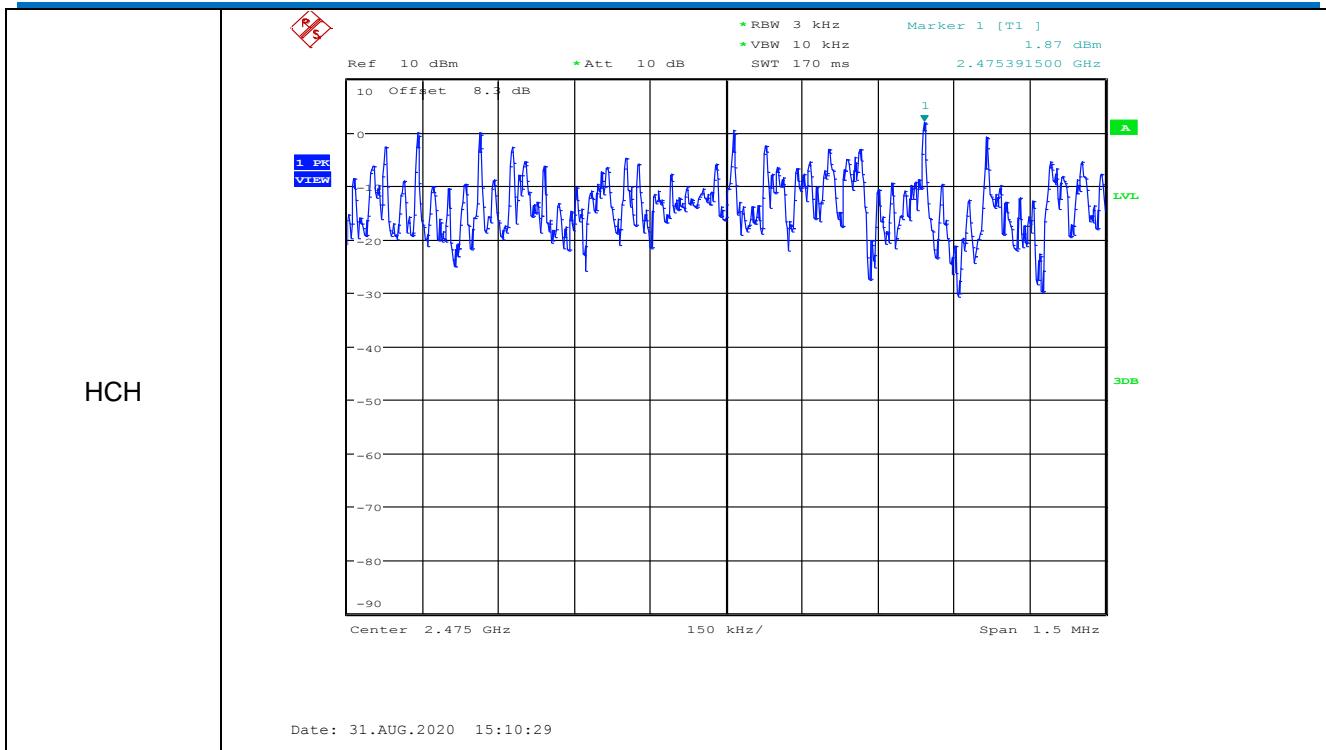


## 5.6 Band-edge for RF Conducted Emissions

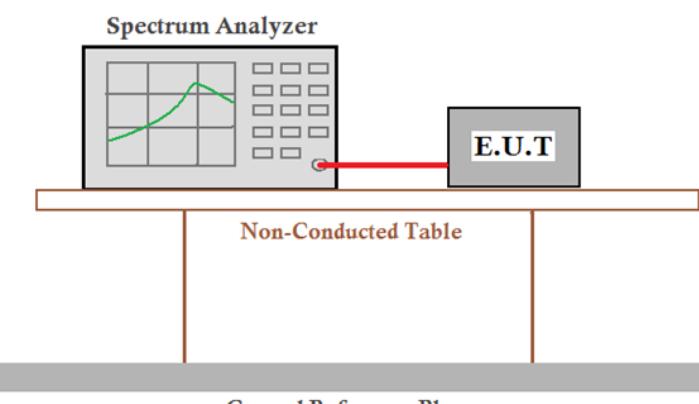
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with O-QPSK at lowest, middle and highest channel.
Test Results:	Pass

O-QPSK mode				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-55.800	-5.79	Pass
Highest	2483.5	-53.640	-6.12	Pass


Test plot as follows:


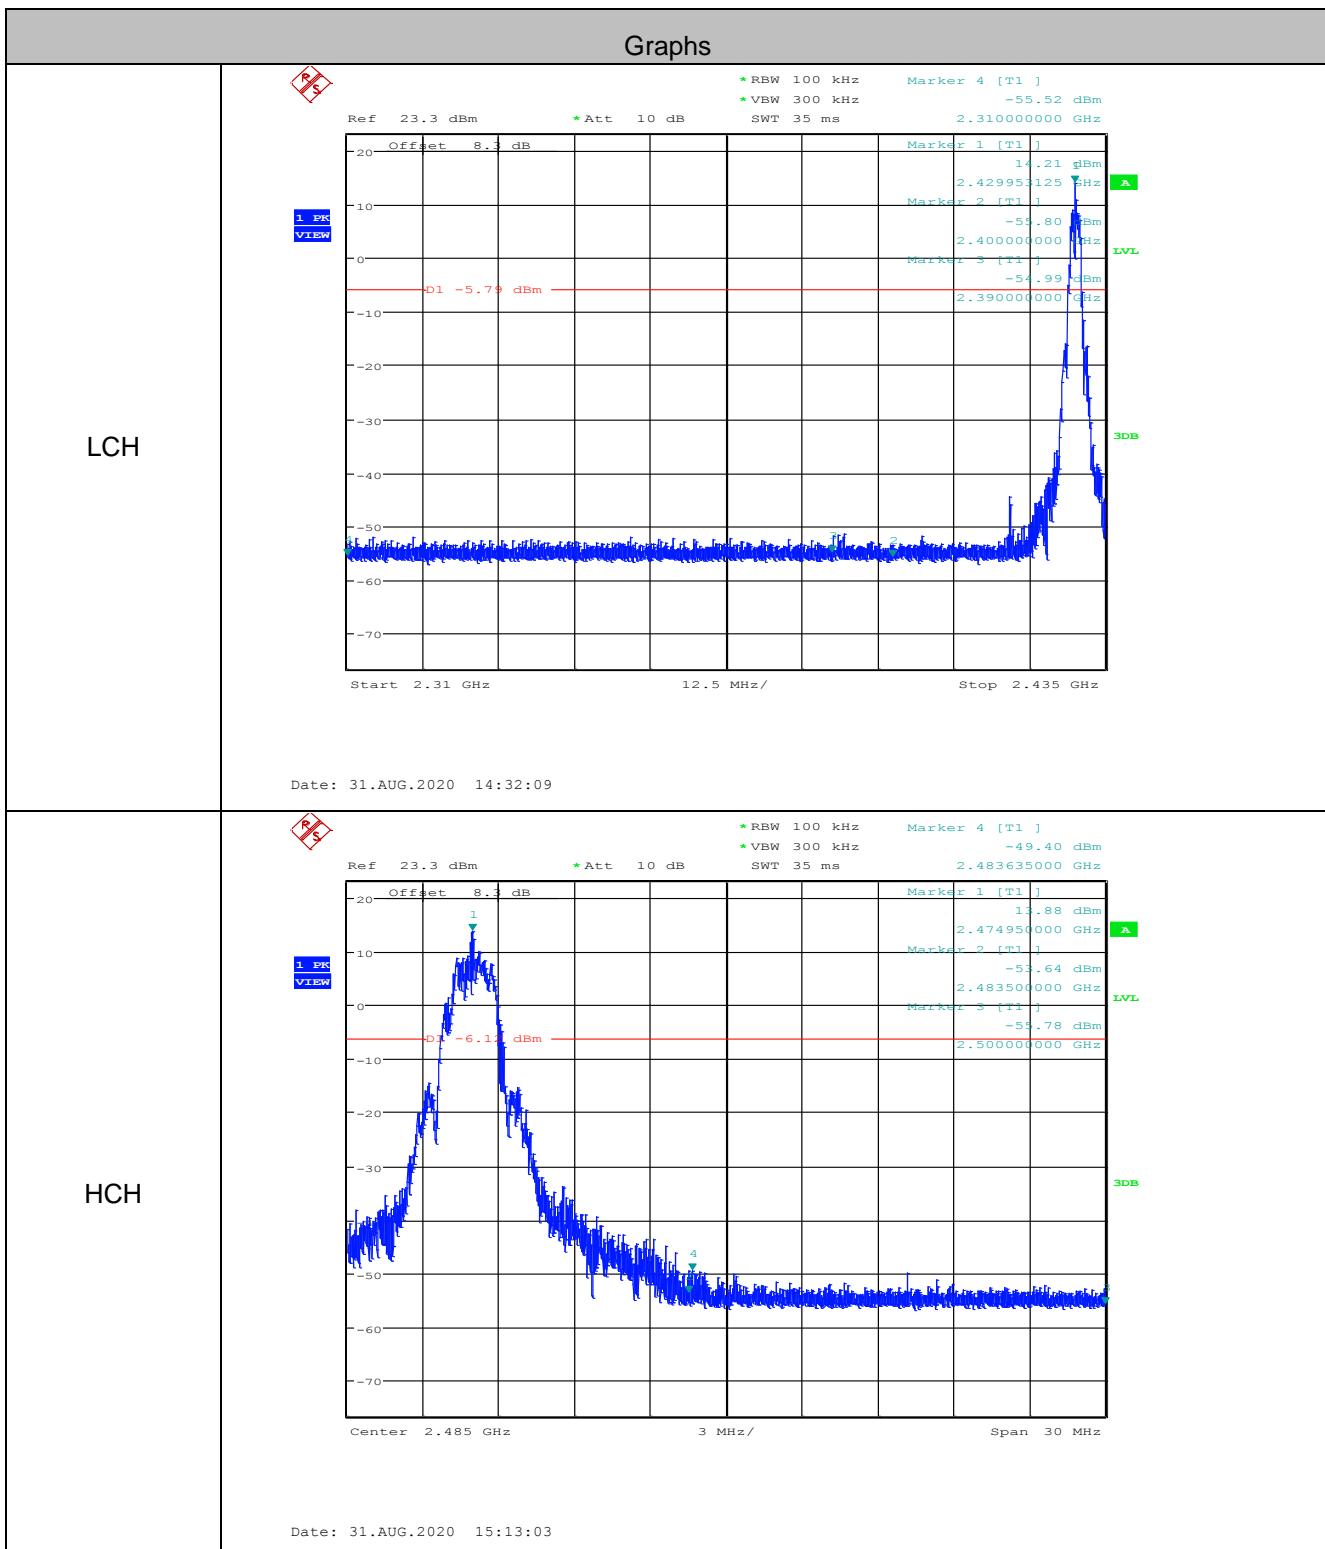



## 5.7 Spurious RF Conducted Emissions

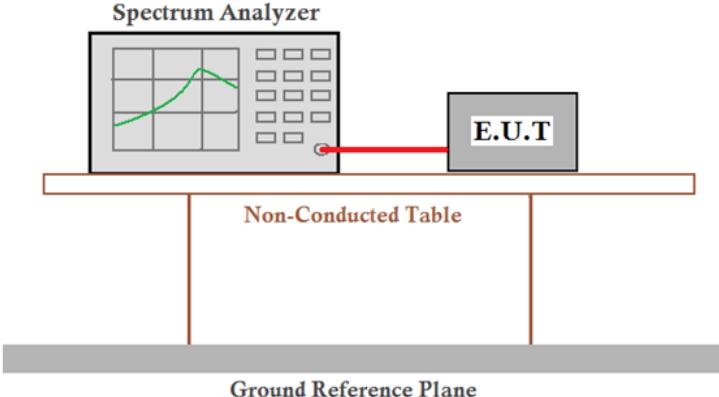
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b></p> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with O-QPSK at lowest, middle and highest channel.
Test Results:	Pass


Test plot as follows:

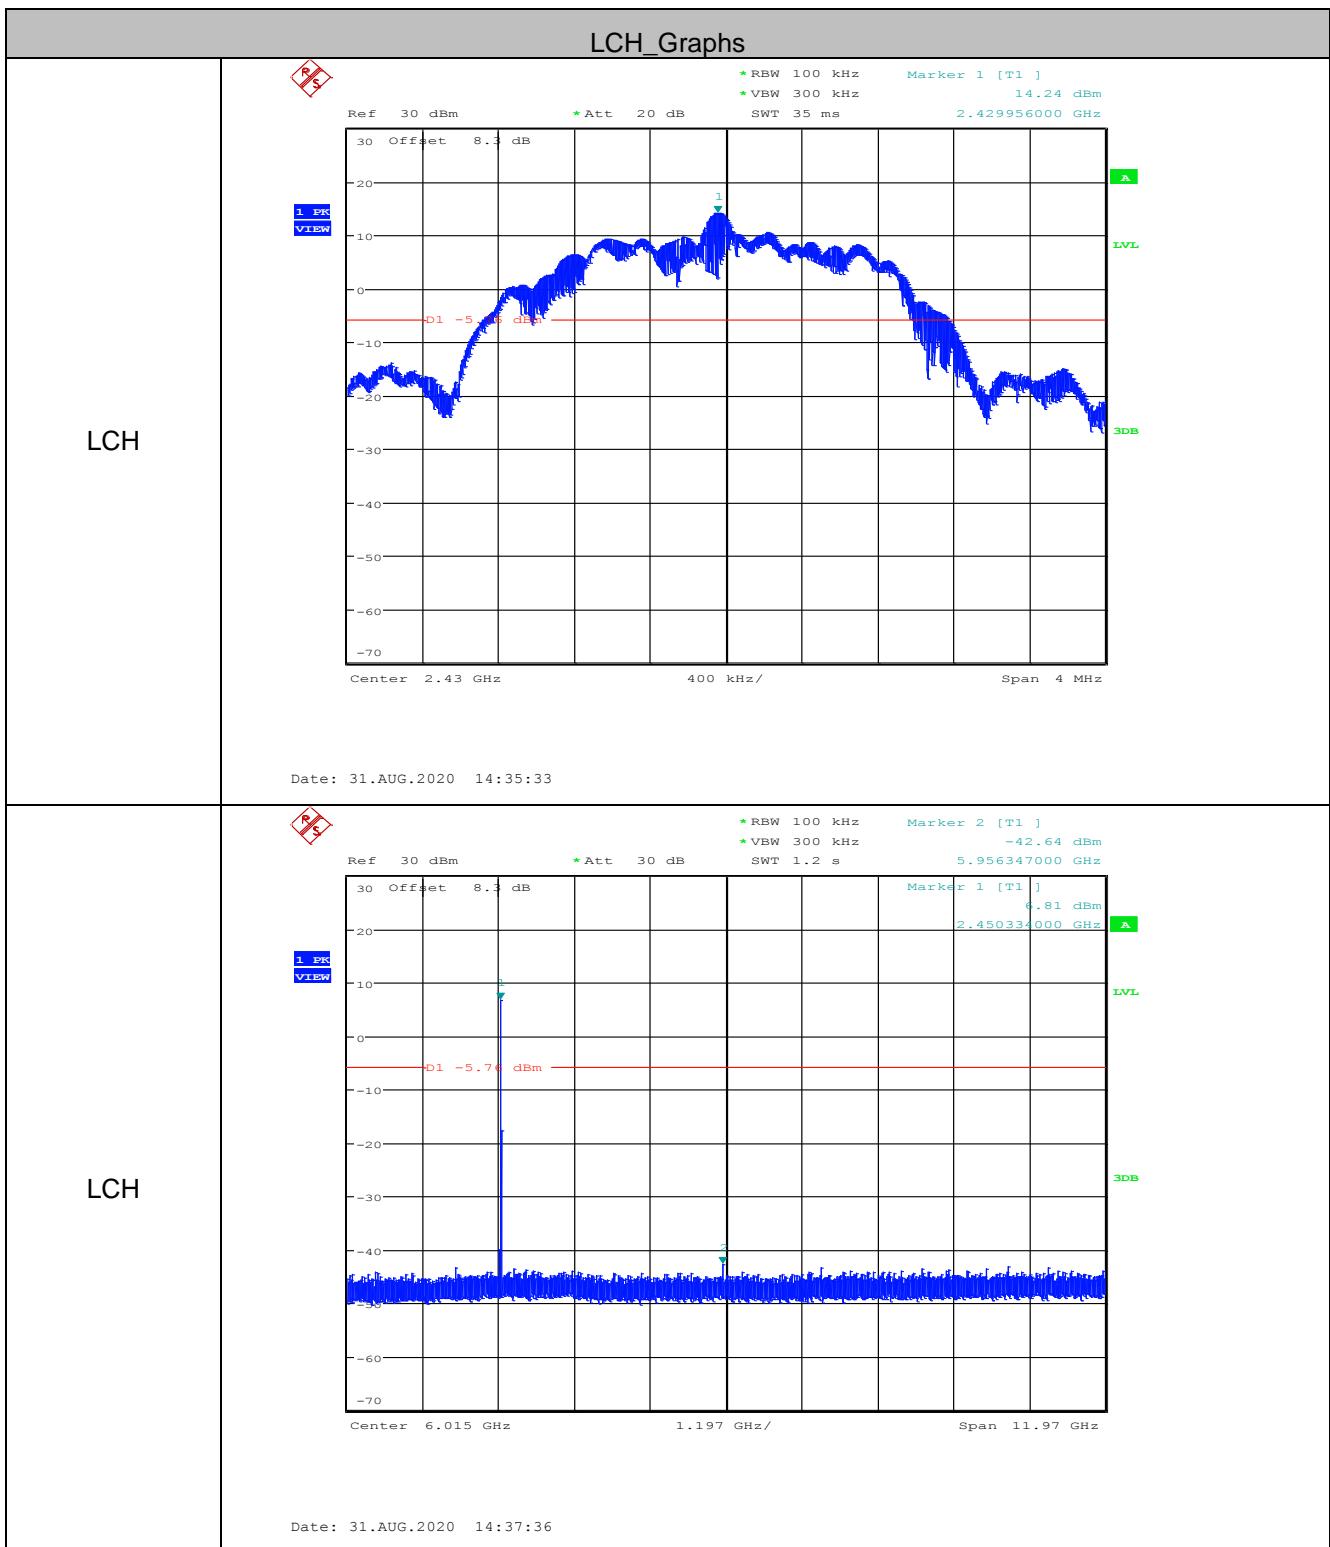

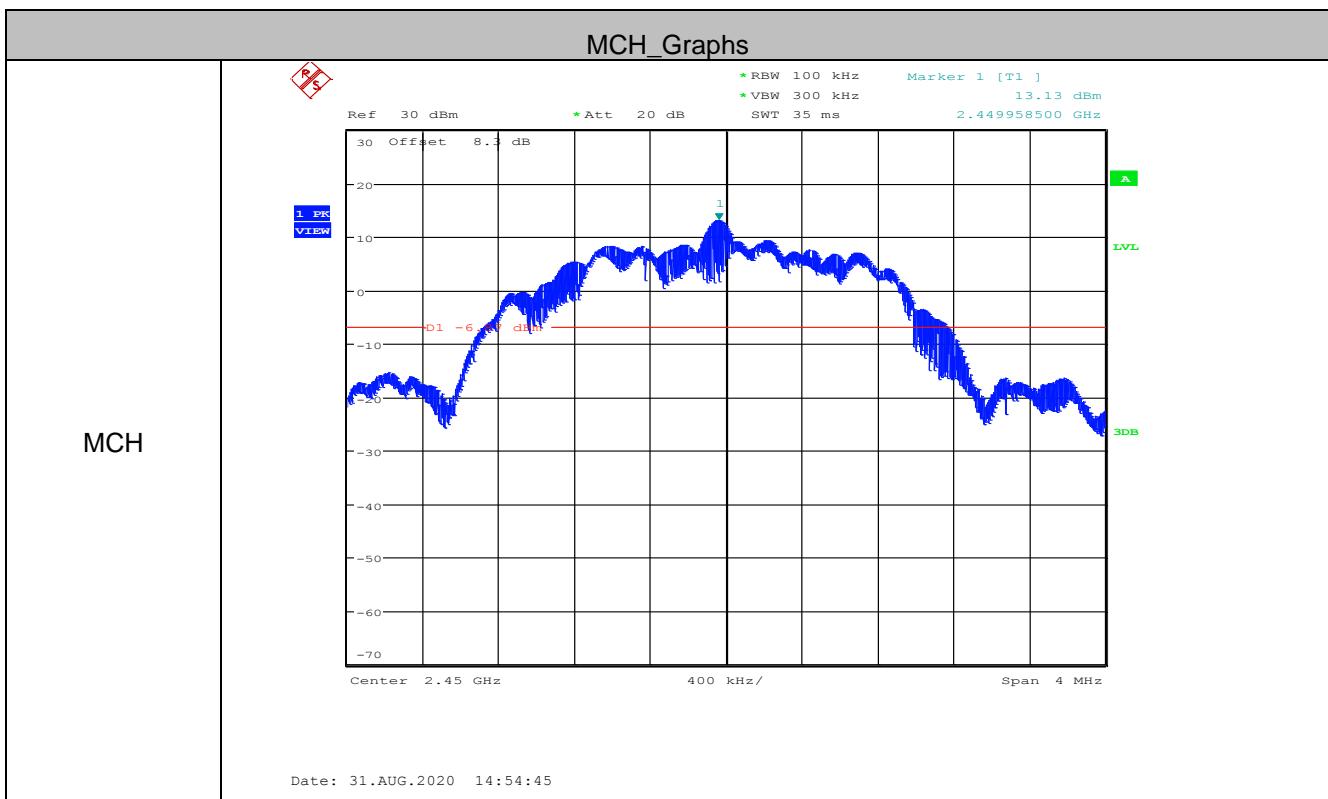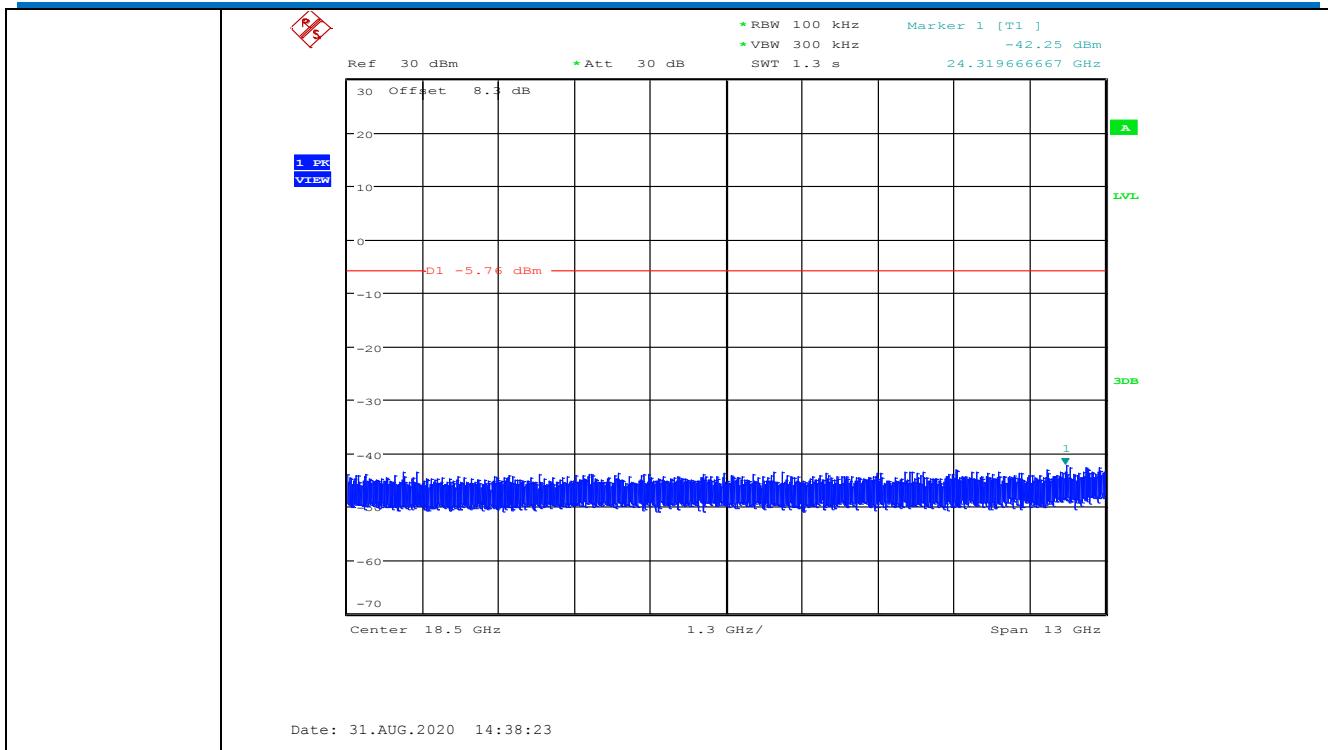

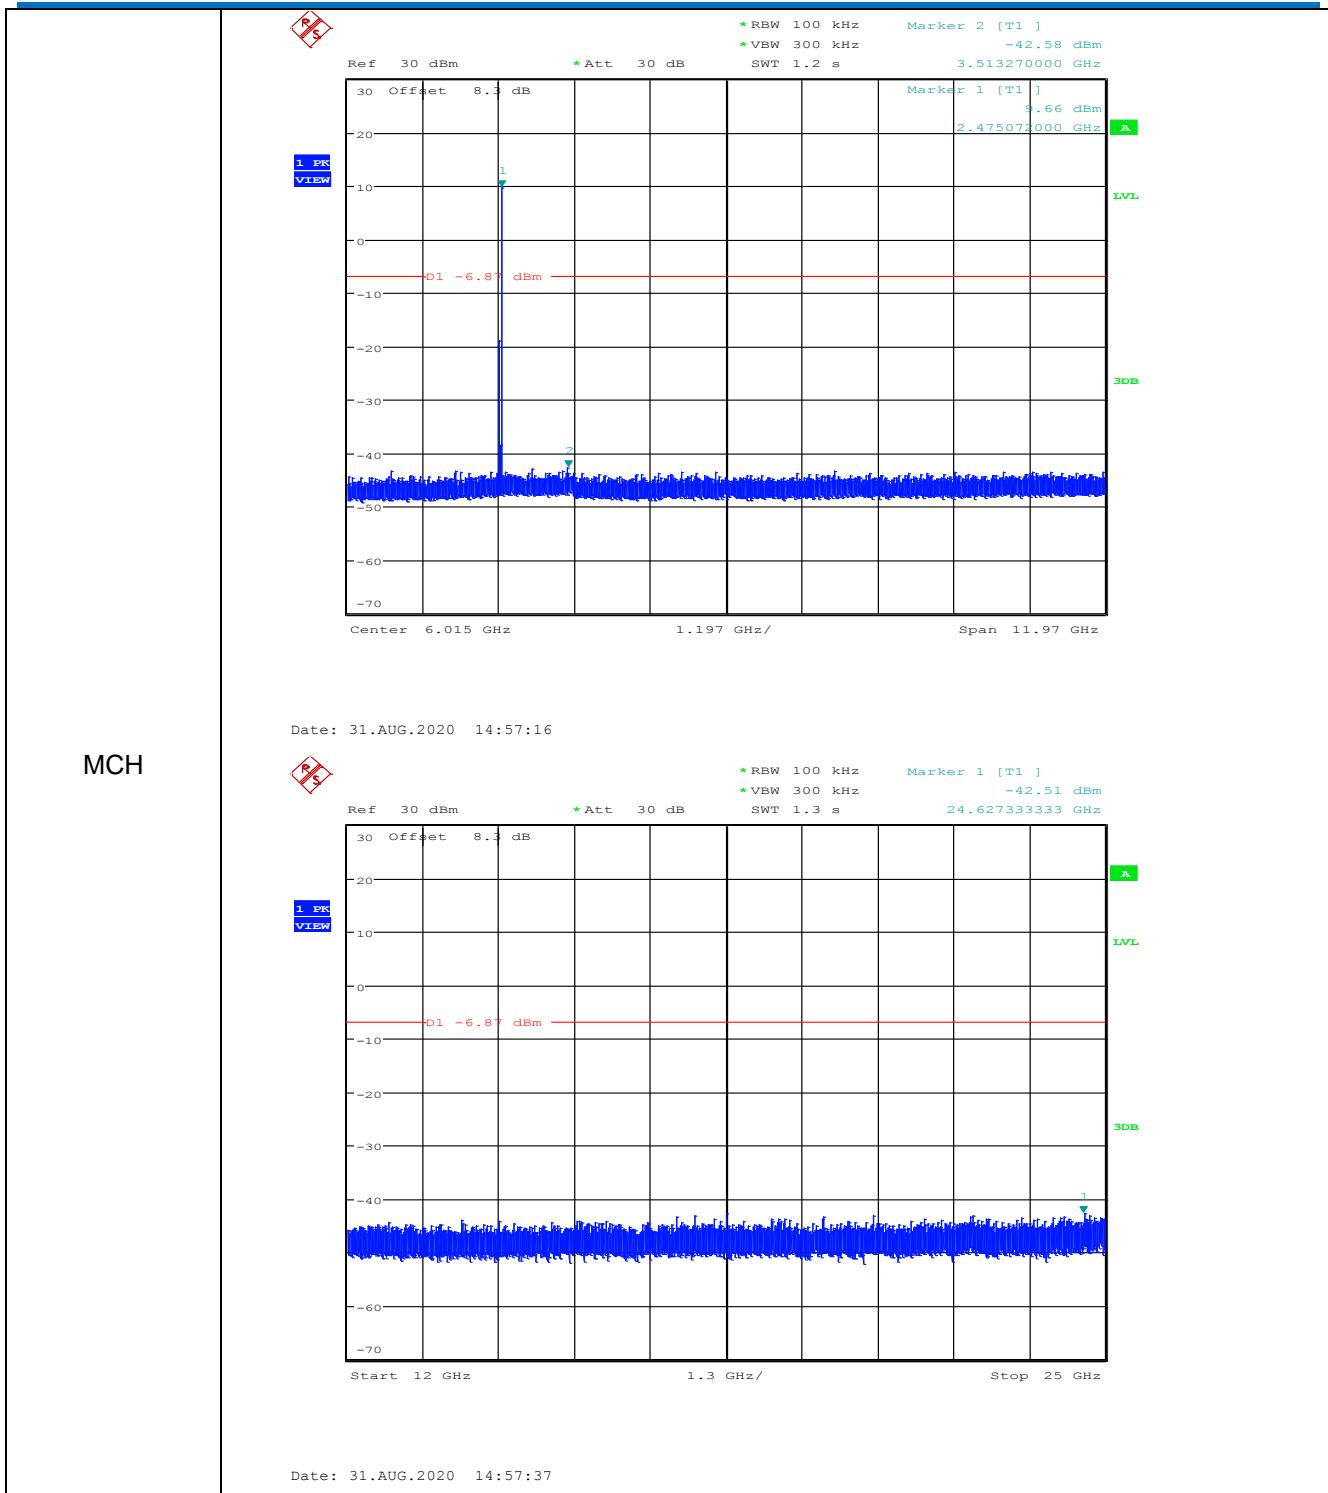

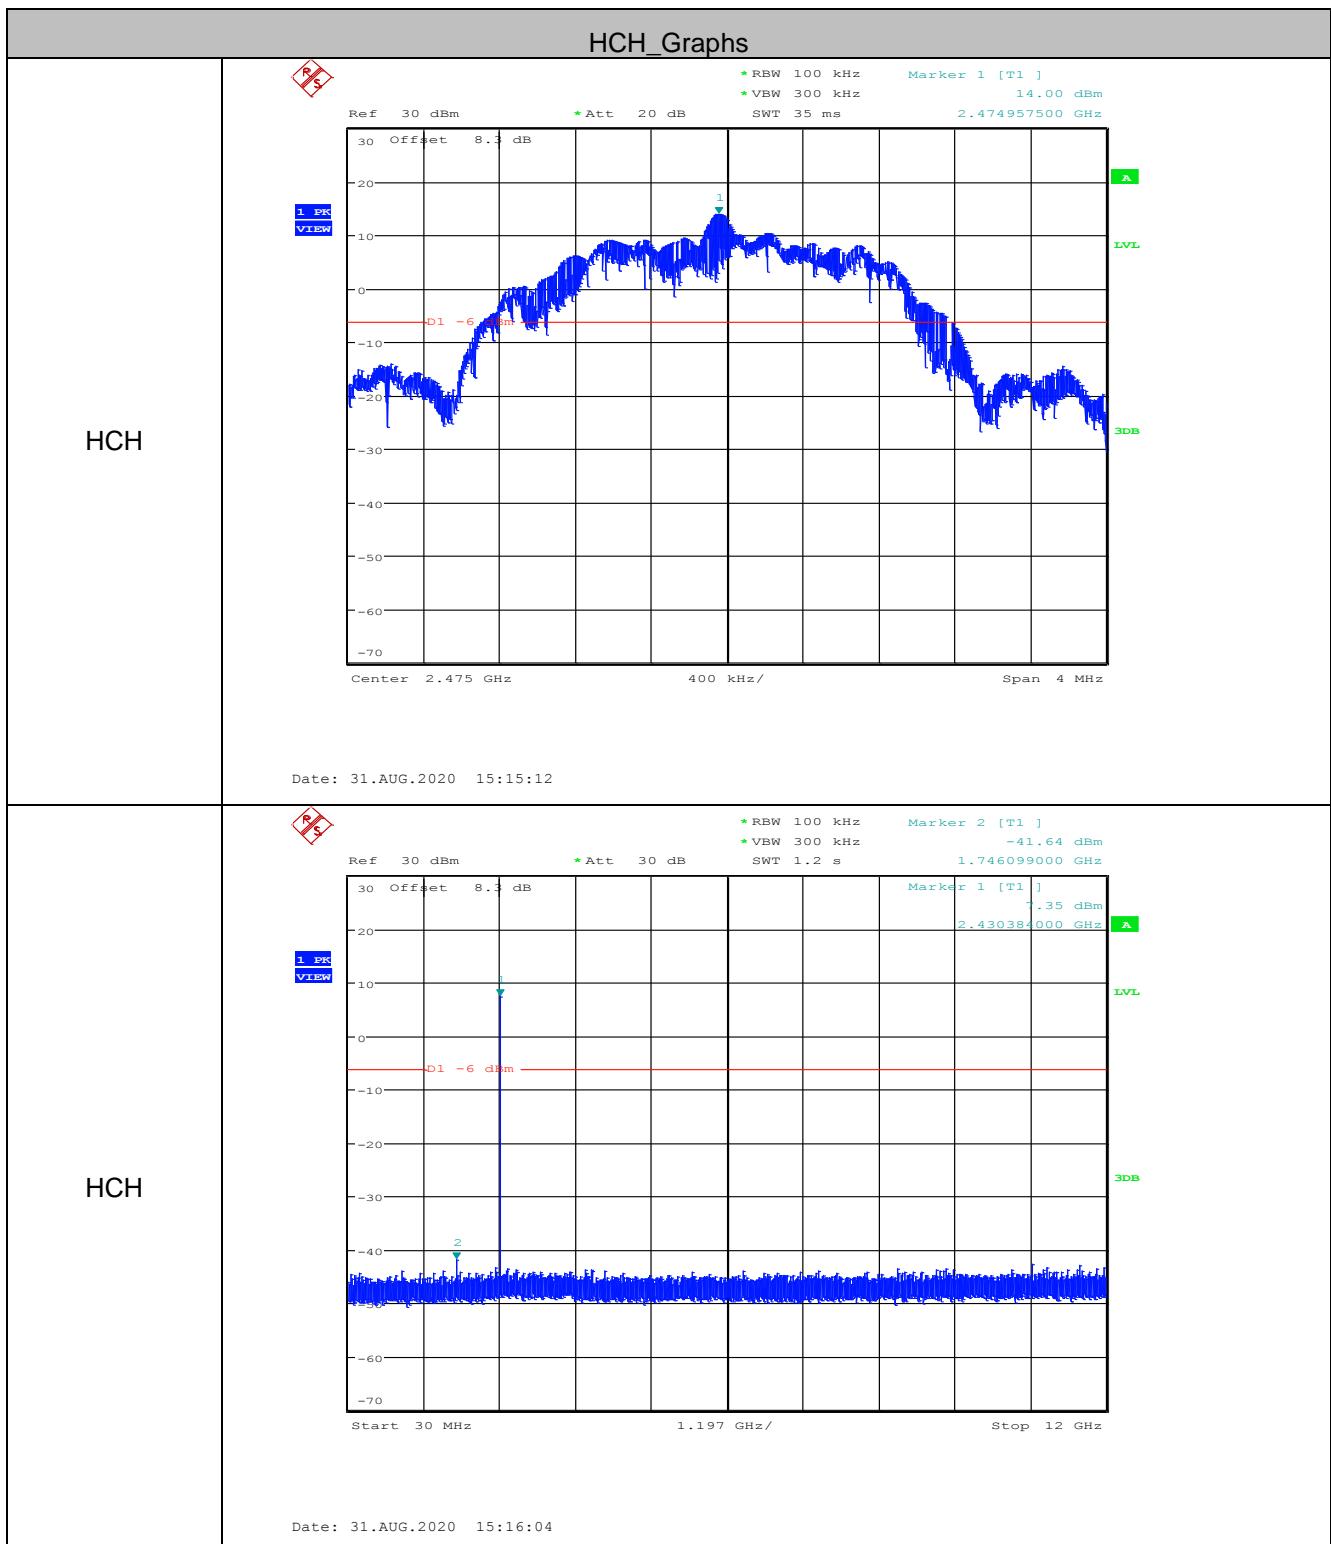

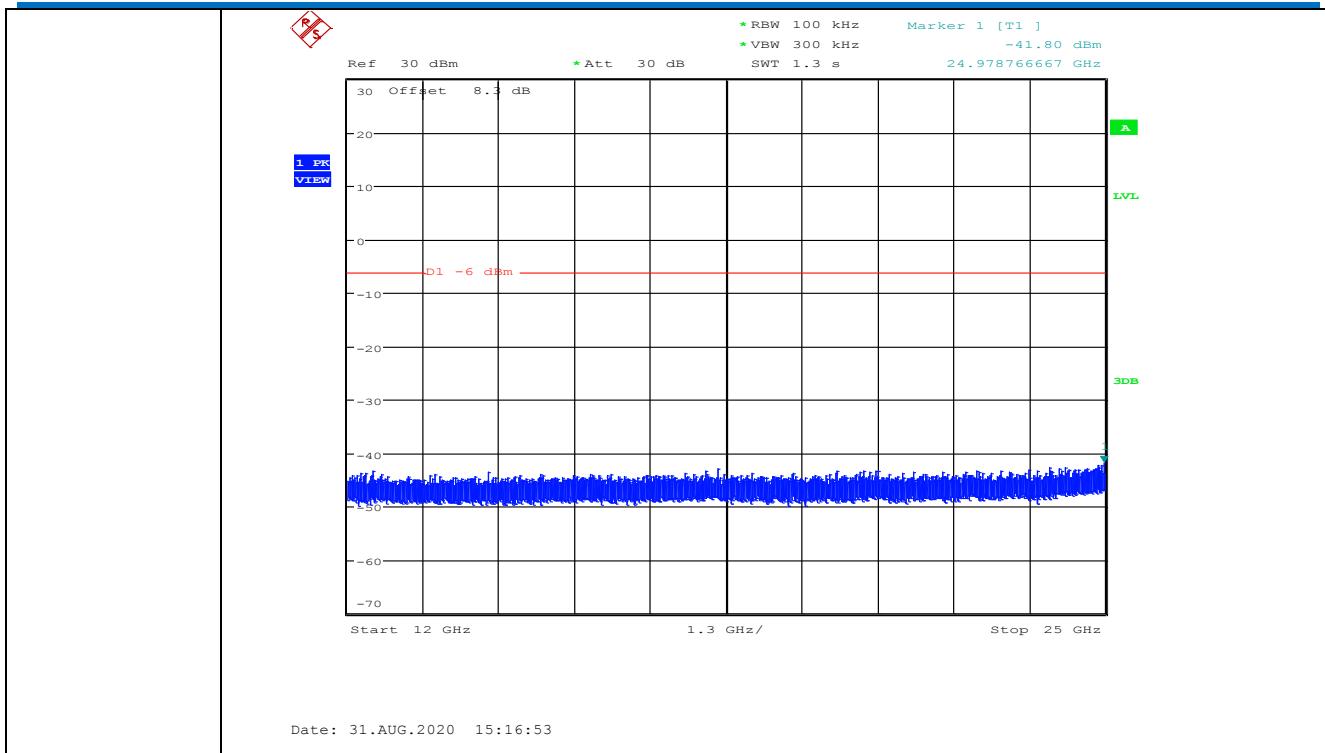

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## 5.8 Radiated Spurious Emission & Restricted bands

<b>5.8.1 Spurious Emissions</b>						
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205					
Test Method:	ANSI C63.10 2013					
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)					
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak	
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average	
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak	
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak	
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average	
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak	
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
		Peak	1MHz	10Hz <sup>1)</sup>	Average	
1): VBW = 10 Hz or 1/T for average levels,						
Mode		On Time (msec)		1/ T Minimum VBW (kHz)		
O-QPSK		0.321		3.12		
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)	
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300	
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30	
	1.705MHz-30MHz	30	-	-	30	
	30MHz-88MHz	100	40.0	Quasi-peak	3	
	88MHz-216MHz	150	43.5	Quasi-peak	3	
	216MHz-960MHz	200	46.0	Quasi-peak	3	
	960MHz-1GHz	500	54.0	Quasi-peak	3	
	Above 1GHz	500	54.0	Average	3	
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						

Test Setup:

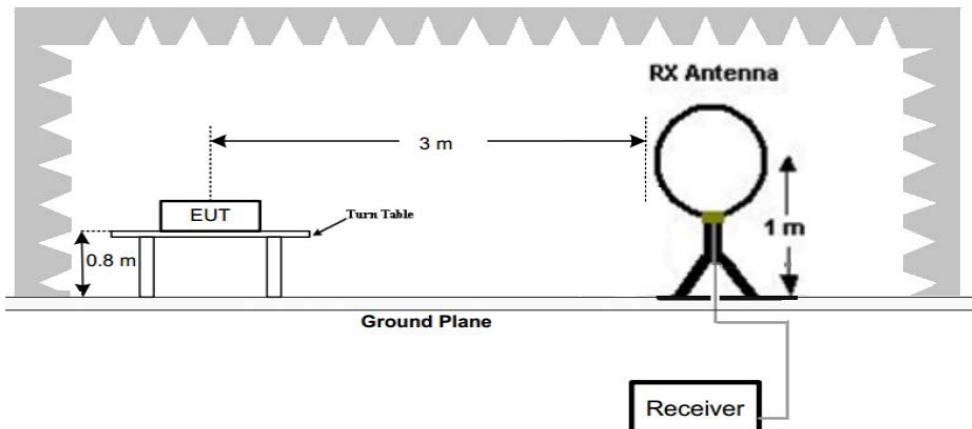


Figure 1. Below 30MHz

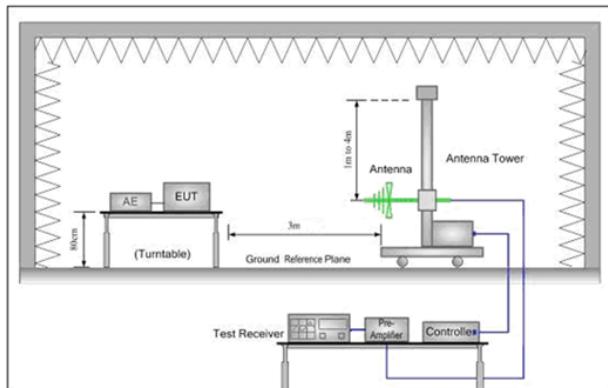


Figure 2. 30MHz to 1GHz

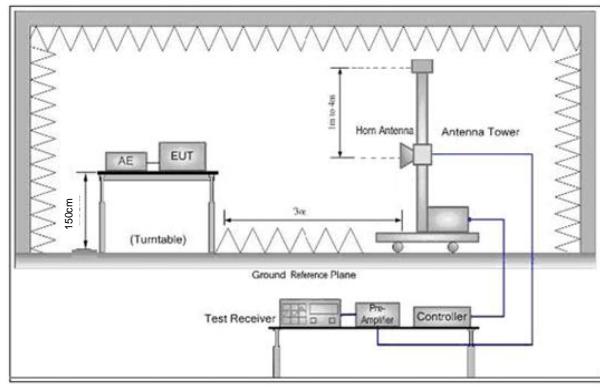


Figure 3. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

Note: For the radiated emission test above 1GHz:  
 Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	<p>measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting with O-QPSK at lowest, middle and highest channel.
Final Test Mode:	For below 1GHz, through Pre-scan, find at middle channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

Radiated Emission below 1GHz

30MHz~1GHz, the worst case

Test mode:	Transmitting mode	Vertical
------------	-------------------	----------

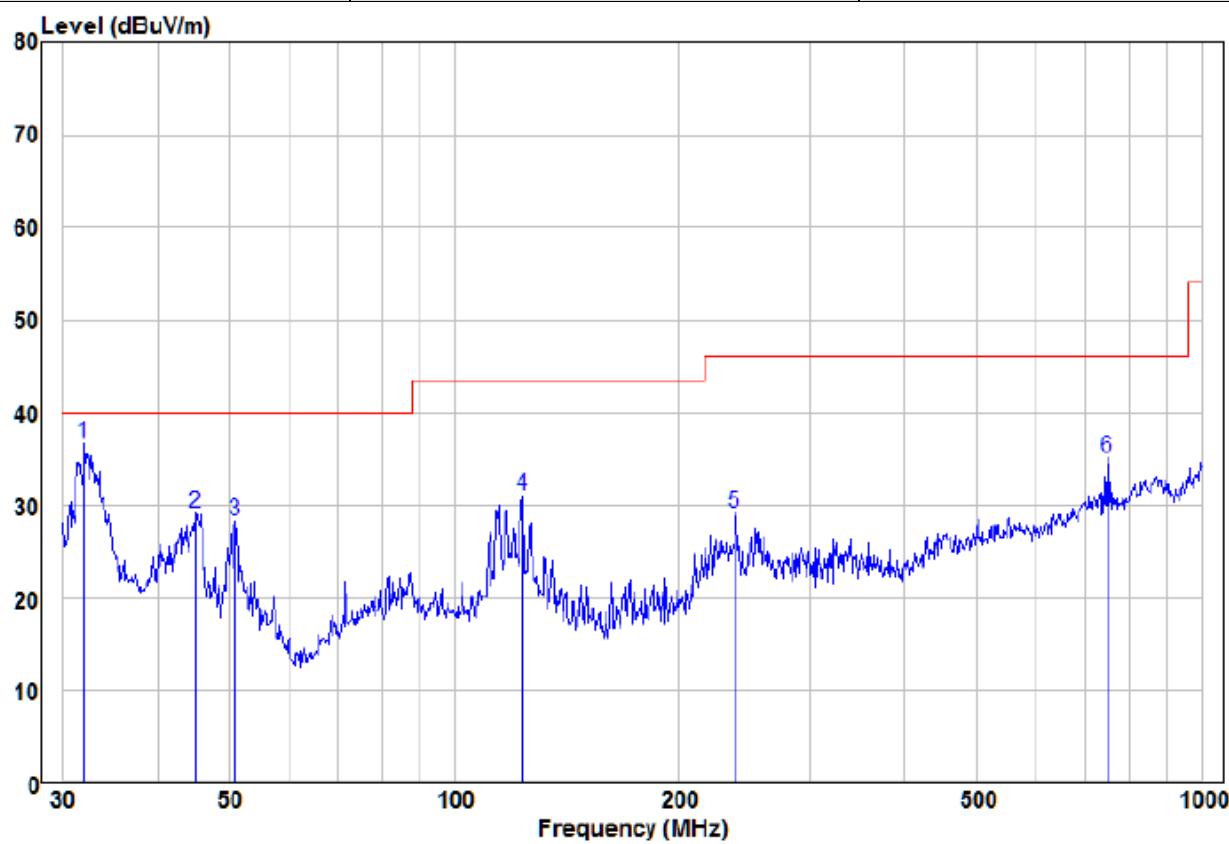


Freq	Read Level	Read Factor		Limit Level	Line	Over Limit	Remark	Pol/Phase
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 pp	31.95	21.20	15.41	36.61	40.00	-3.39	QP	VERTICAL
2	45.06	18.72	10.42	29.14	40.00	-10.86	QP	VERTICAL
3	50.94	20.44	7.89	28.33	40.00	-11.67	QP	VERTICAL
4	123.70	20.49	10.56	31.05	43.50	-12.45	QP	VERTICAL
5	237.48	17.87	11.28	29.15	46.00	-16.85	QP	VERTICAL
6	747.48	13.22	21.90	35.12	46.00	-10.88	QP	VERTICAL

30MHz~1GHz, the worst case

Test mode:

Transmitting mode

Horizontal

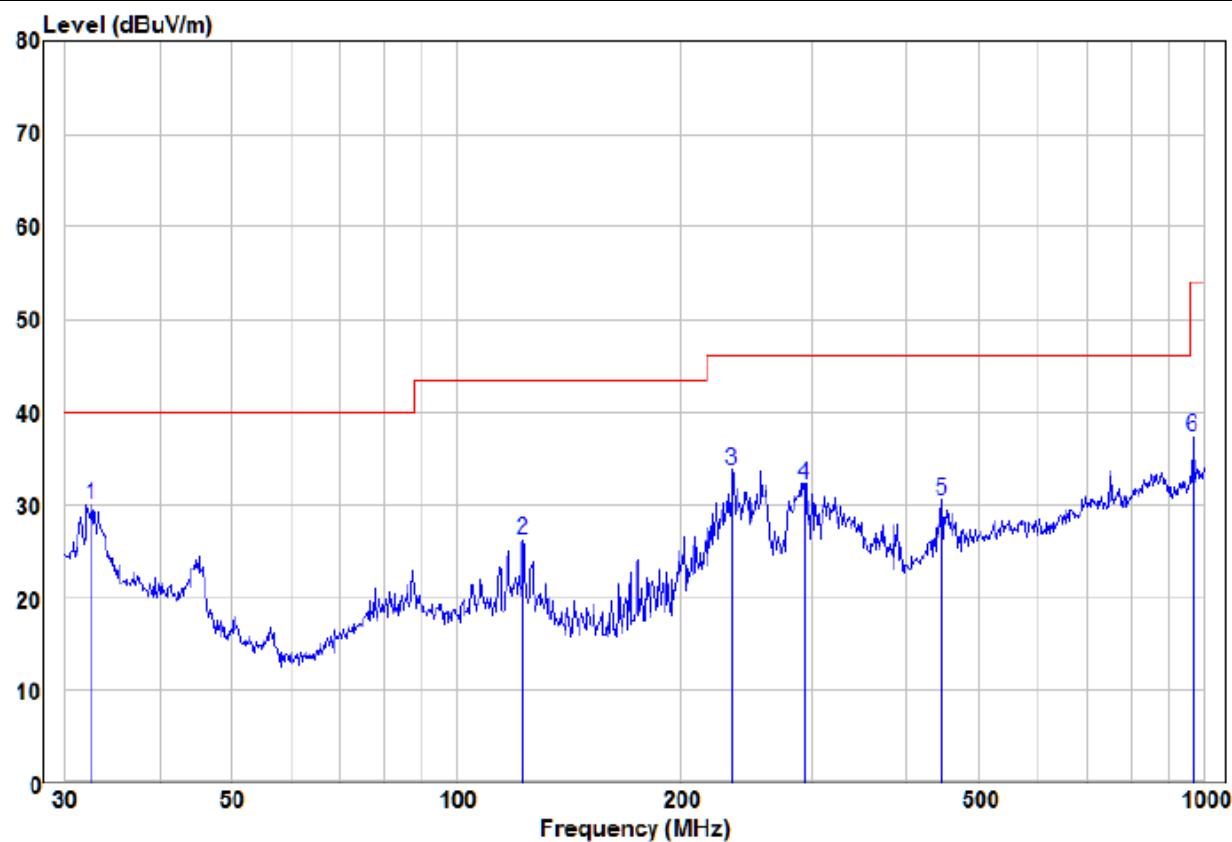

Freq	Read		Limit Line	Over Limit	Remark	Pol/Phase		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	32.52	14.82	15.25	30.07	40.00	-9.93	QP	HORIZONTAL
2	122.83	15.70	10.59	26.29	43.50	-17.21	QP	HORIZONTAL
3	234.17	22.95	10.91	33.86	46.00	-12.14	QP	HORIZONTAL
4	292.06	18.84	13.46	32.30	46.00	-13.70	QP	HORIZONTAL
5	446.41	13.98	16.62	30.60	46.00	-15.40	QP	HORIZONTAL
6	968.93	13.05	24.27	37.32	54.00	-16.68	QP	HORIZONTAL

**Transmitter Emission above 1GHz**

Test mode:		O-QPSK		Test channel:		Lowest	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
<b>2390</b>	<b>53.95</b>	<b>-9.2</b>	<b>44.75</b>	<b>74</b>	<b>-29.25</b>	<b>Peak</b>	<b>H</b>
2400	54.92	-9.39	45.53	74	-28.47	Peak	H
4860	51.72	-4.17	47.55	74	-26.45	Peak	H
7290	50.96	0.63	51.59	74	-22.41	Peak	H
<b>2390</b>	<b>55.02</b>	<b>-9.2</b>	<b>45.82</b>	<b>74</b>	<b>-28.18</b>	<b>Peak</b>	<b>V</b>
2400	52.03	-9.39	42.64	74	-31.36	Peak	V
4860	54.67	-4.17	50.5	74	-23.5	Peak	V
7290	49.54	0.63	50.17	74	-23.83	Peak	V

Test mode:		O-QPSK		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
4900	53.16	-4.12	49.04	74	-24.96	peak	H
7350	49.31	1.46	50.77	74	-23.23	peak	H
4900	52.26	-4.12	48.14	74	-25.86	peak	V
7350	48.83	1.46	50.29	74	-23.71	peak	V

Test mode:		O-QPSK		Test channel:		Highest	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
<b>2483.5</b>	<b>56.24</b>	<b>-9.29</b>	<b>46.95</b>	<b>74</b>	<b>-27.05</b>	<b>Peak</b>	<b>H</b>
4950	52.85	-4.04	48.81	74	-25.19	Peak	H
7425	49.30	1.65	50.95	74	-23.05	Peak	H
<b>2483.5</b>	<b>55.41</b>	<b>-9.29</b>	<b>46.12</b>	<b>74</b>	<b>-27.88</b>	<b>Peak</b>	<b>V</b>
4950	50.47	-4.04	46.43	74	-27.57	Peak	V
7425	49.16	1.65	50.81	74	-23.19	Peak	V

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


## 6 Photographs - EUT Test Setup

### 6.1 Radiated Spurious Emission

9kHz~30MHz:




30MHz~1GHz:

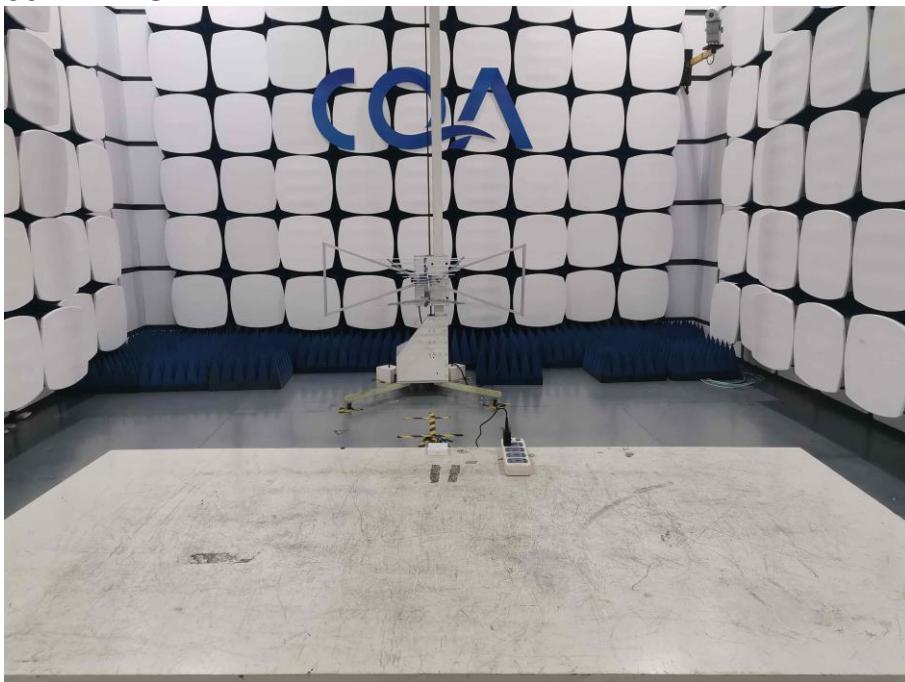

Above 1GHz:




## 6.2 Conducted Emission

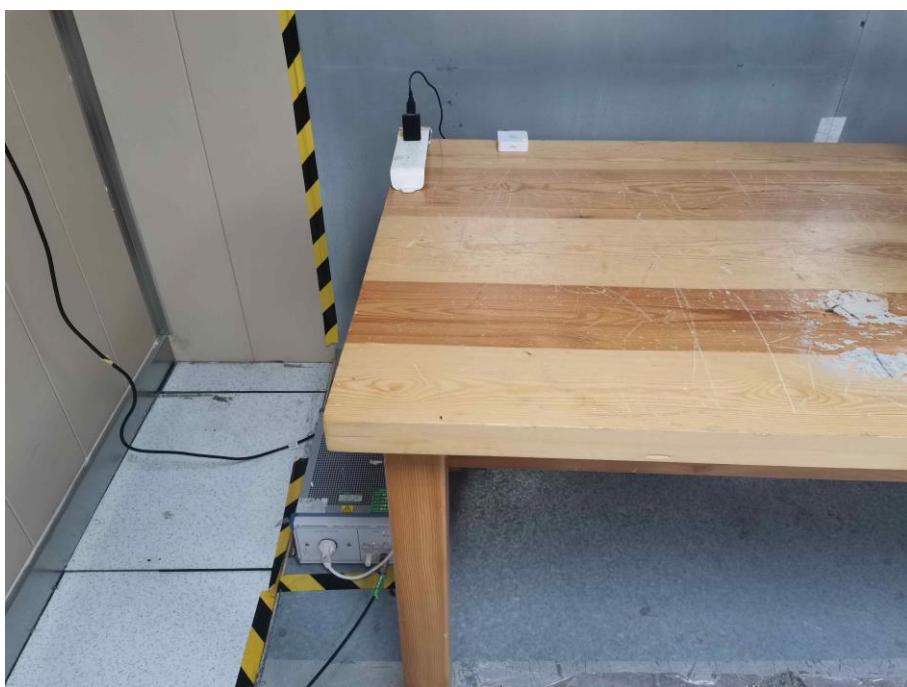


## 7 Photographs - EUT Constructional Details



Test Model No.: ICT-GW001

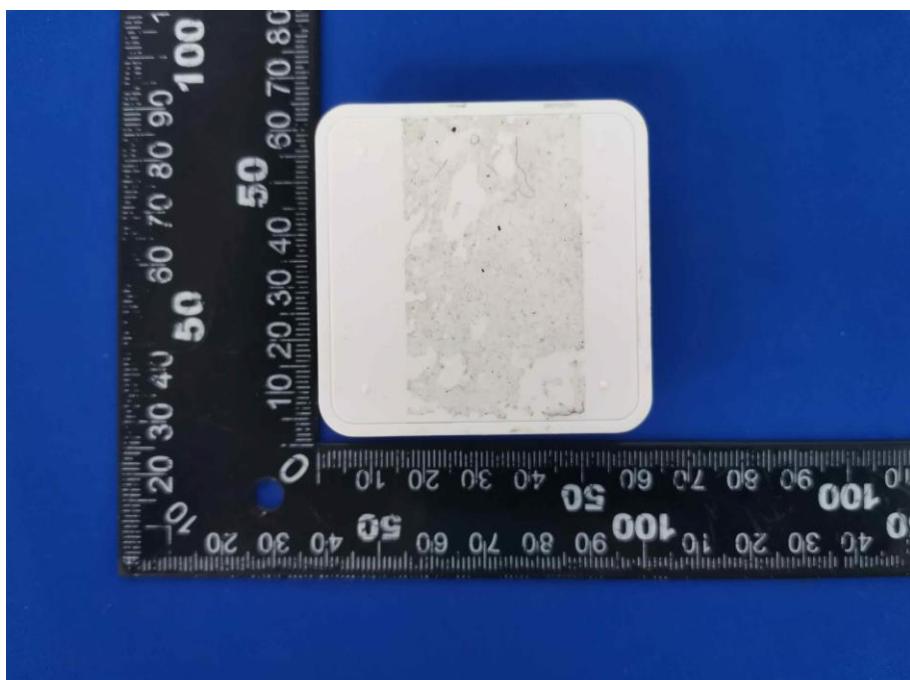





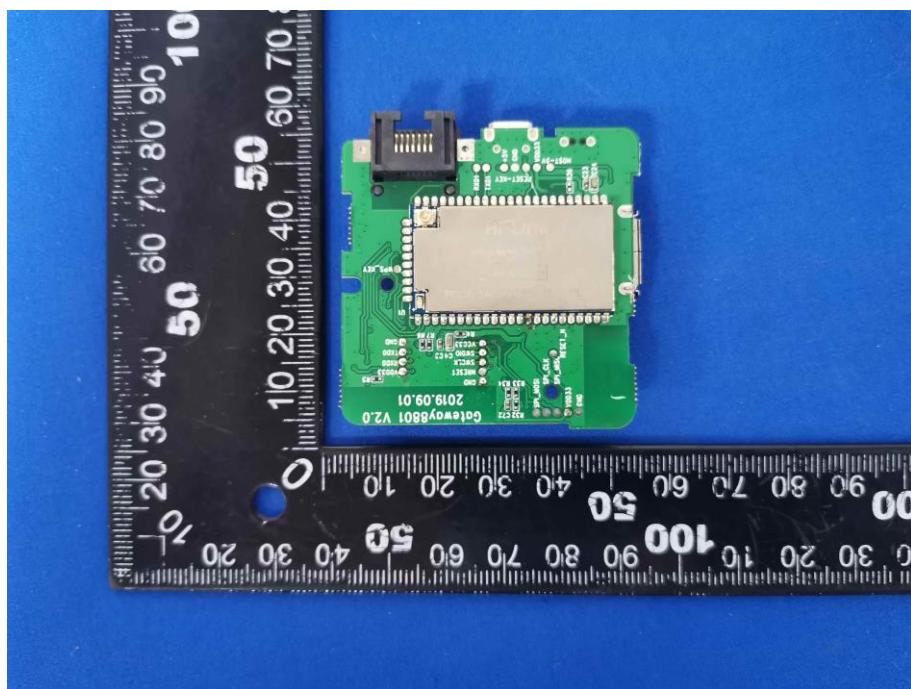

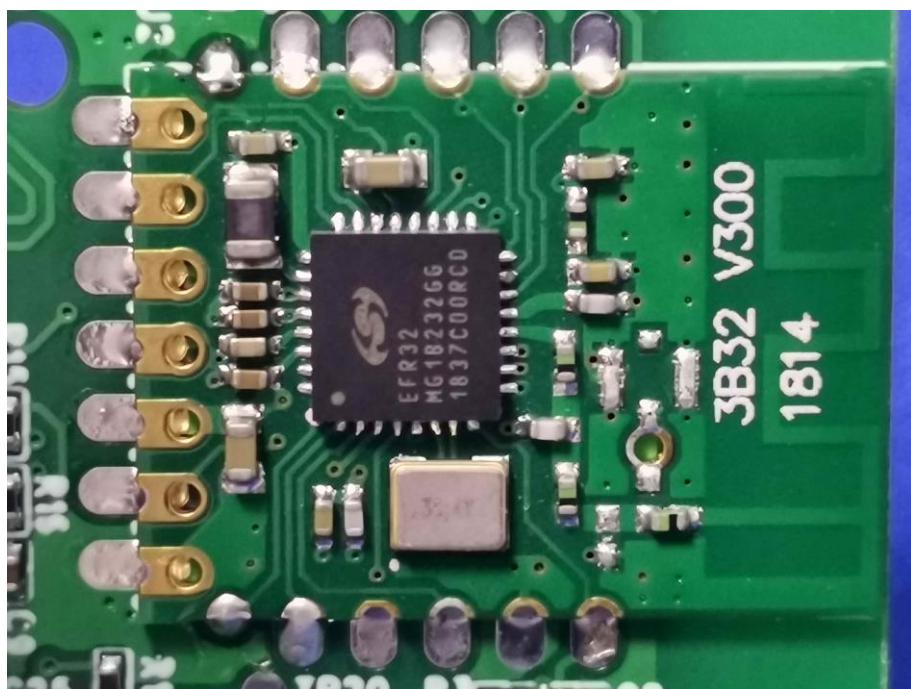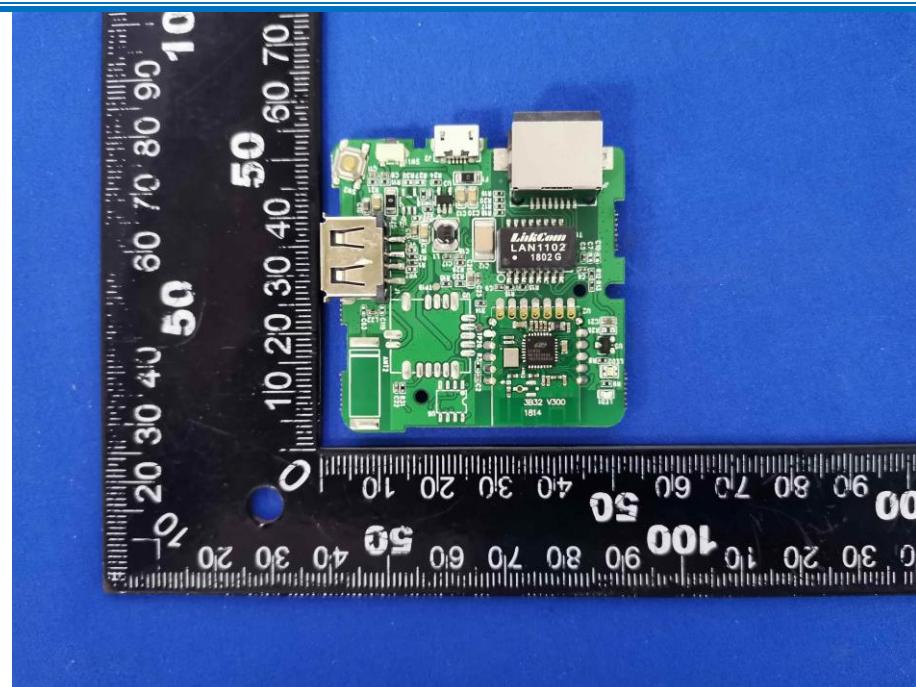

---

The End