



TEST REPORT

Application No.: GZCR2105020327AT
Applicant: Echelon Fitness Multimedia, LLC
Address of Applicant: 605 Chestnut Street, Suite 700, Chattanooga, TN 37450 USA
Manufacturer: Echelon Fitness Multimedia, LLC
Address of Manufacturer: 605 Chestnut Street, Suite 700, Chattanooga, TN 37450 USA
Factory: TES Touch Embedded Solutions (Xiamen) CO., LTD.
Factory of Manufacturer: No. 60, Xinglin South Rd., Jimei District, Xiamen, Fujian 361022, China
Equipment Under Test (EUT):
EUT Name: Echelon Touch Screen
Model No.: ECHTES-156, ECHTES-215, ECHTES-238 ♣
♣ Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2021-05-26
Date of Test: 2021-06-08 to 2021-07-16
Date of Issue: 2021-07-16

Test Result:	Pass*
---------------------	--------------



* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kechu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.ssgroup.com.cn
Guangzhou Branch: 82075058 EMC Laboratory. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-07-16		Original

Authorized for issue by				
Tested By		 <hr/> Jim Li/Project Engineer		
Reviewed By		 <hr/> Ricky Liu/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart C 15.407 (c)	Pass
Frequency Stability		KDB 789033 II A 3	47 CFR Part 15, Subpart C 15.407 (g)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass
Duty Cycle		KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
99% Bandwidth		KDB 789033 II D	N/A	Pass
26dB Emission bandwidth		KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	Pass
Maximum Conducted output power		KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Peak Power spectrum density		KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Radiated Emissions		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Band Edge		KDB 789033 D02 II	47 CFR Part 15, Subpart C 15.407(b)	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

♣ Declaration of EUT Family Grouping:

Model No.: ECHTES-156, ECHTES-215, ECHTES-238

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on the LCD panel size.

Therefore, only the model ECHTES-156 was tested.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, or email: CN.Qcccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kaifu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075068 www.sgs.com.cn
Guangzhou Branch: 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075068 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	7
4.3 Measurement Uncertainty	7
4.4 Test Location.....	7
4.5 Test Facility	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List.....	9
6 Radio Spectrum Technical Requirement	15
6.1 Antenna Requirement	15
6.1.1 Test Requirement:	15
6.1.2 Conclusion	15
6.2 Transmission in the Absence of Data	16
6.2.1 Test Requirement:	16
6.2.2 Conclusion	16
6.3 Frequency Stability	16
6.3.1 Test Requirement:	16
6.3.2 Conclusion	16
7 Radio Spectrum Matter Test Results	17
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	17
7.1.1 E.U.T. Operation	17
7.1.2 Test Mode Description	17
7.1.3 Test Setup Diagram.....	18
7.1.4 Measurement Procedure and Data.....	18
7.2 Duty Cycle.....	21
7.2.1 E.U.T. Operation	21
7.2.2 Test Mode Description	21
7.2.3 Test Setup Diagram.....	22
7.2.4 Measurement Procedure and Data.....	22
7.3 99% Bandwidth	23
7.3.1 E.U.T. Operation	23
7.3.2 Test Mode Description	23
7.3.3 Test Setup Diagram.....	24
7.3.4 Measurement Procedure and Data.....	24
7.4 26dB Emission bandwidth.....	25
7.4.1 E.U.T. Operation	25
7.4.2 Test Mode Description	25
7.4.3 Test Setup Diagram.....	26



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, or email: CN.Qoscheck@sgs.com

7.4.4	Measurement Procedure and Data.....	26
7.5	Minimum 6 dB bandwidth (5.725-5.85 GHz band).....	27
7.5.1	E.U.T. Operation	27
7.5.2	Test Mode Description	27
7.5.3	Test Setup Diagram	28
7.5.4	Measurement Procedure and Data.....	28
7.6	Maximum Conducted output power	29
7.6.1	E.U.T. Operation	29
7.6.2	Test Mode Description	29
7.6.3	Test Setup Diagram	30
7.6.4	Measurement Procedure and Data.....	30
7.7	Peak Power spectrum density.....	31
7.7.1	E.U.T. Operation	31
7.7.2	Test Mode Description	31
7.7.3	Test Setup Diagram	32
7.7.4	Measurement Procedure and Data.....	32
7.8	Radiated Emissions	33
7.8.1	E.U.T. Operation	33
7.8.2	Test Mode Description	33
7.8.3	Test Setup Diagram	34
7.8.4	Measurement Procedure and Data.....	35
7.9	Radiated Emissions which fall in the restricted bands	90
7.9.1	E.U.T. Operation	90
7.9.2	Test Mode Description	91
7.9.3	Test Setup Diagram	92
7.9.4	Measurement Procedure and Data.....	93
7.10	Band Edge.....	122
7.10.1	E.U.T. Operation.....	122
7.10.2	Test Mode Description.....	122
7.10.3	Test Setup Diagram.....	123
7.10.4	Measurement Procedure and Data	123
8	Appendix.....	123

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 12V powered by SWITCHING ADAPTER as below: MODEL: SOY-1200500-327 INPUT:100-240VAC~, 50/60Hz, 1.7A Max OUTPUT:12.0V, 5.0A, 60.0W
Cable(s):	AC mains for adapter:3 wires, 1.8m, unshielded DC input for main unit:1.8m, with ferrite bead DC IN Port USB Port USB/OTG Port TF Card Slot HDMI Port LAN Port LINE OUT Port DC OUT Port 3.5mm Headphone Jack
Operation Frequency (20MHz):	U-NII-1: 5180-5240MHz U-NII-2A: 5260-5320MHz U-NII-2C: 5500-5700MHz U-NII-3: 5745-5825MHz
Operation Frequency (40MHz):	U-NII-1: 5190-5230MHz U-NII-2A: 5270-5310MHz U-NII-2C: 5510-5670MHz U-NII-3: 5755-5795MHz
Operation Frequency (80MHz):	U-NII-1: 5210MHz U-NII-2A: 5290MHz U-NII-2C: 5530-5610MHz U-NII-3: 5775MHz
Modulation Type:	802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	802.11a/n(HT20)/ac(HT20): 20MHz 802.11n(HT40)/ac(HT40): 40MHz 802.11ac(HT80): 80MHz
DFS Function:	Slave without Radar detection
TPC Function:	Support TPC function
Antenna Type:	Integral Antenna
Antenna Gain(Max):	Antenna 1: 2dBi and Antenna 2: 2dBi declared by applicant.
Remark:	Two antennas can simultaneous transmission

Firmware Version: MTB-818 V1-2 C002B002-20210610
 Hardware Version: rk3288_mtb818
 Testing Software: WLAN Test
 Sample NO.: 119C105921
 Power Setting: 6dBm can not be changed by user.
 Function: Media PAD with 5G Wi-Fi Classic function.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Mobile Phone	SAMSUNG	SM-G9810	RFCN309Q9QF
Note Book PC	LENOVO	Lenovo Xiaoxinchao 5000	PF0TLJX7
Wireless Router	Honor	HiRouter-CD30	AWTEQ20C04001295

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	3.12dB
Duty Cycle	± 0.37%
99% Bandwidth	± 3%
26dB Emission bandwidth	± 3%
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	± 3%
Maximum Conducted output power	± 0.75dB
Peak Power spectrum density	± 2.84dB
Radiated Emissions	5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz)
Radiated Emissions which fall in the restricted bands	5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz)
Frequency Stability	± 7.25 x 10 ⁻⁸

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
 Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 Guangzhou Branch EMC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK (Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm (Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-01-08	2022-01-06
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2020-09-25	2021-09-24
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A
EMI Test Receiver(9kHz-3.6GHz)	Rohde & Schwarz	ESR4	EMC2221	2021/6/1	2022/5/31

Duty Cycle					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

99% Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14



Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

26dB Emission bandwidth

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18



Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Maximum Conducted output power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz- 6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Peak Power spectrum density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz- 6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18



EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Radiated Emissions

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/9/9	2022/9/8
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-29	2021-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preampfier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08

Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/9/9	2022/9/8
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, or email: CN.Qcccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kaifu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075068 www.sgs.com.cn
Guangzhou Branch: CEC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075068 sgs.china@sgs.com

MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-29	2021-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08

Frequency Stability					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Band Edge					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN-Qoscheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch • EMC Laboratory

No. 198 Kaifu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 | (86-20) 82155555 | (86-20) 82075068 | www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 | (86-20) 82155555 | (86-20) 82075068 | sgs.china@sgs.com

EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2021-07-05	2022-07-05
DMM	Fluke	73	EMC0007	2021-07-05	2022-07-05



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the Antenna 1: 2 dBi; Antenna 2: 2 dBi.

EUT support 2x2 MIMO for 802.11a/n/ac, any transmit signals are correlated with each other, as unequal antenna gains for antenna 1 and antenna 2 but with equal transmit power, therefore,

$$\text{Directional gain} = G_{\text{ANT}} + 10 \log (N_{\text{ANT}}) \text{ dBi}$$

Directional gain= 2+10log (2) dBi=5.01 dBi

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

Wi-Fi chip (RTL8822CS) support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

6.3 Frequency Stability

6.3.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (g)

6.3.2 Conclusion

The grantee declared that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual, it comply the frequency stability requirement.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 52 % RH Atmospheric Pressure: 1010 mbar


7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

Pre-scan 09

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

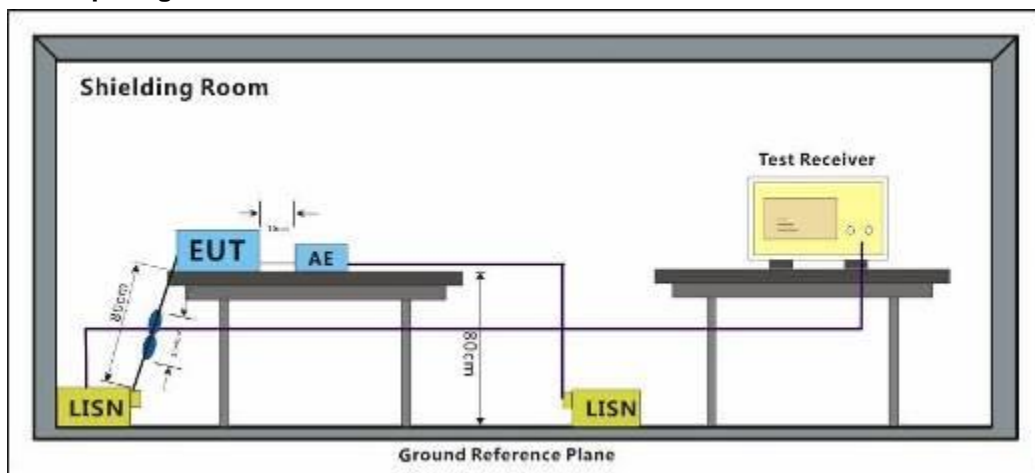


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor


Test Mode: 06; Line: Live line

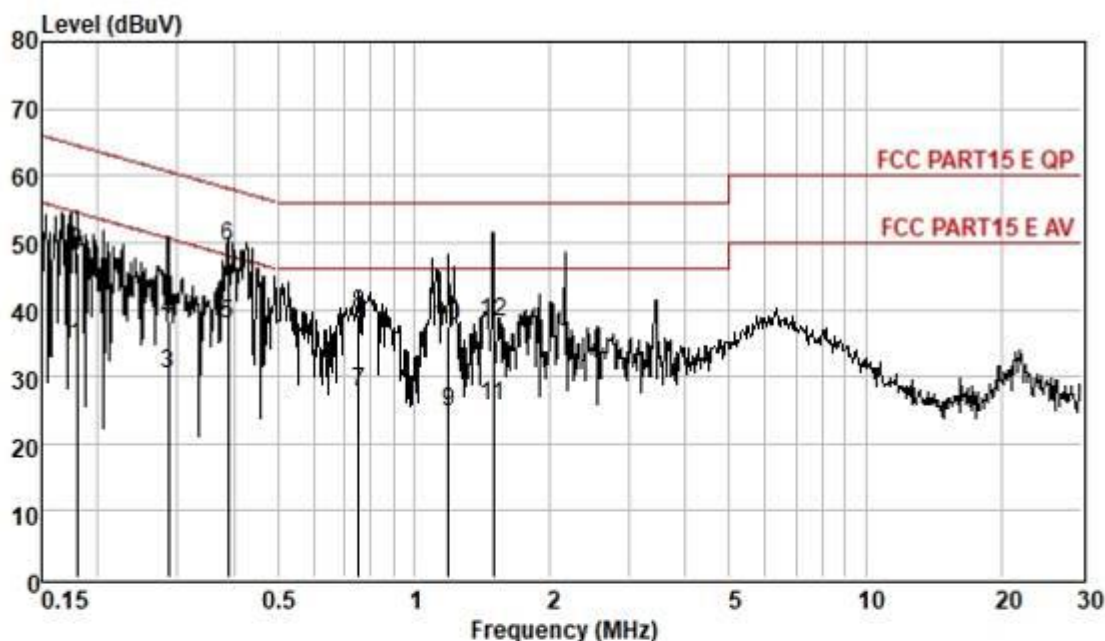

Pol :LINE
Mode :
Model :156

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.18	24.91	0.06	9.62	34.59	54.50	-19.91	Average
0.18	38.72	0.06	9.62	48.40	64.50	-16.10	QP
0.29	20.52	0.06	9.62	30.20	50.63	-20.43	Average
0.29	28.64	0.06	9.62	38.32	60.63	-22.31	QP
0.39	27.96	0.06	9.62	37.64	48.08	-10.44	Average
0.39	39.77	0.06	9.62	49.45	58.08	-8.63	QP
0.75	18.02	0.07	9.63	27.72	46.00	-18.28	Average
0.75	29.64	0.07	9.63	39.34	56.00	-16.66	QP
1.19	14.96	0.08	9.61	24.65	46.00	-21.35	Average
1.19	27.64	0.08	9.61	37.33	56.00	-18.67	QP
1.50	15.73	0.10	9.61	25.44	46.00	-20.56	Average
1.50	28.28	0.10	9.61	37.99	56.00	-18.01	QP

Test Mode: 06; Line: Neutral Line

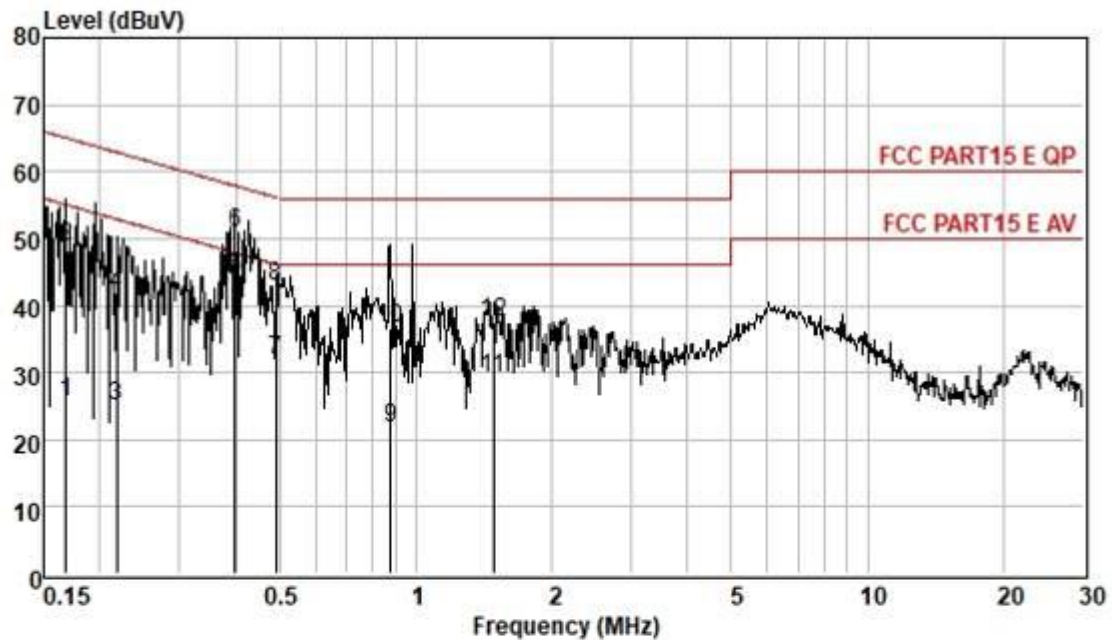

Pol : NEUTRAL
Mode :
Model : 156

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	15.96	0.06	9.55	25.57	55.03	-29.46	Average
0.17	39.24	0.06	9.55	48.85	65.03	-16.18	QP
0.22	15.26	0.06	9.54	24.86	52.92	-28.06	Average
0.22	32.12	0.06	9.54	41.72	62.92	-21.20	QP
0.40	34.28	0.06	9.56	43.90	47.90	-4.00	Average
0.40	41.38	0.06	9.56	51.00	57.90	-6.90	QP
0.49	22.33	0.07	9.55	31.95	46.14	-14.19	Average
0.49	33.16	0.07	9.55	42.78	56.14	-13.36	QP
0.88	12.21	0.07	9.55	21.83	46.00	-24.17	Average
0.88	27.00	0.07	9.55	36.62	56.00	-19.38	QP
1.48	19.45	0.10	9.55	29.10	46.00	-16.90	Average
1.48	27.86	0.10	9.55	37.51	56.00	-18.49	QP

7.2 Duty Cycle

Test Requirement KDB 789033 D02 II B 1
Test Method: KDB 789033 D02 II B 2

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

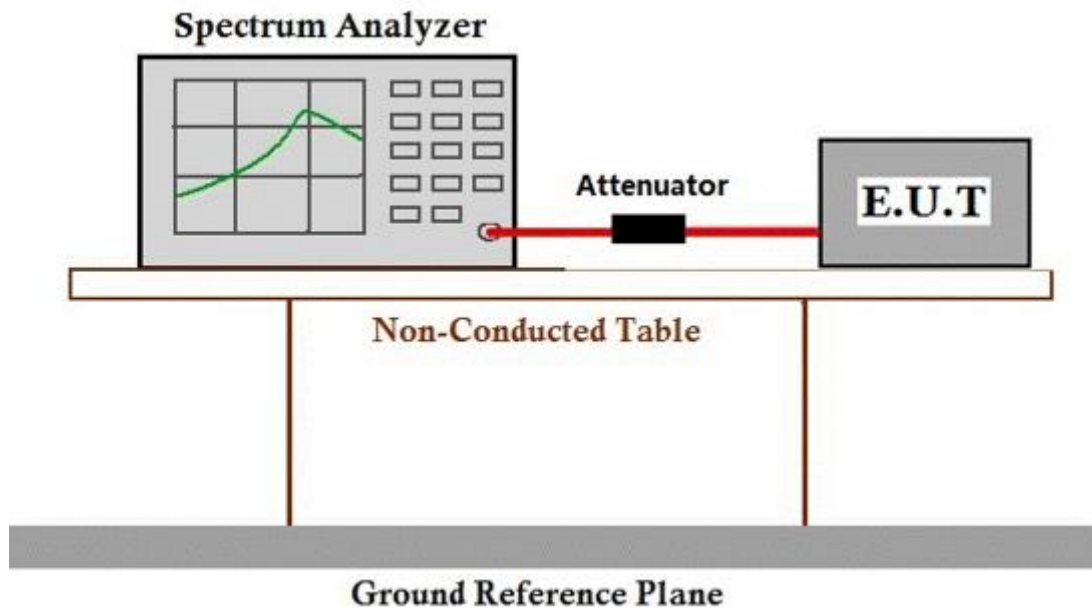

7.2.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.3 99% Bandwidth

Test Requirement N/A
Test Method: KDB 789033 II D


7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

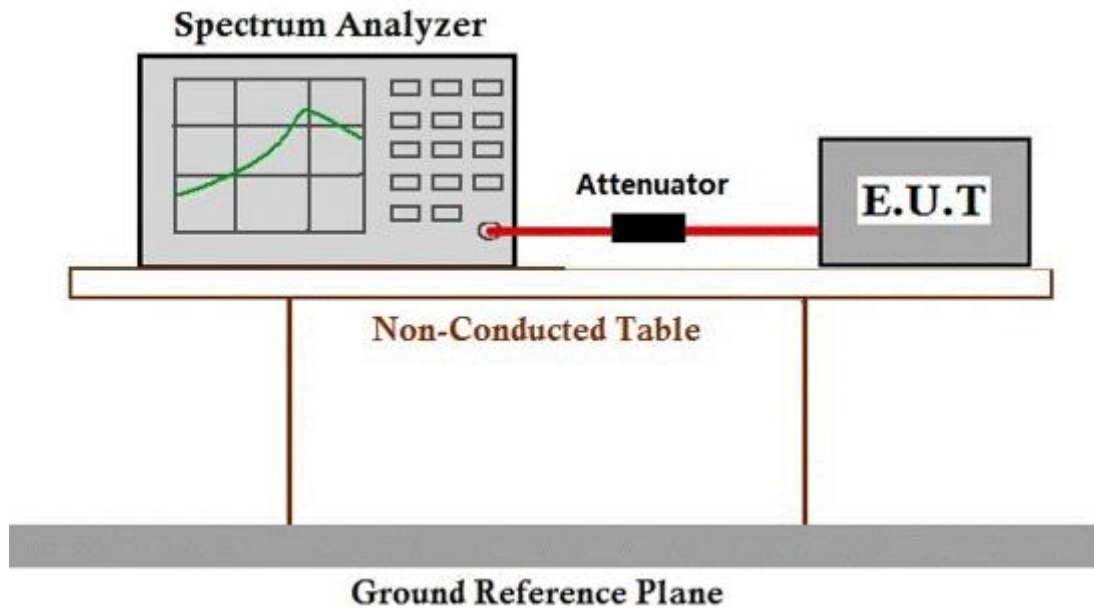

7.3.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)
Test Method: KDB 789033 D02 II C 1


7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

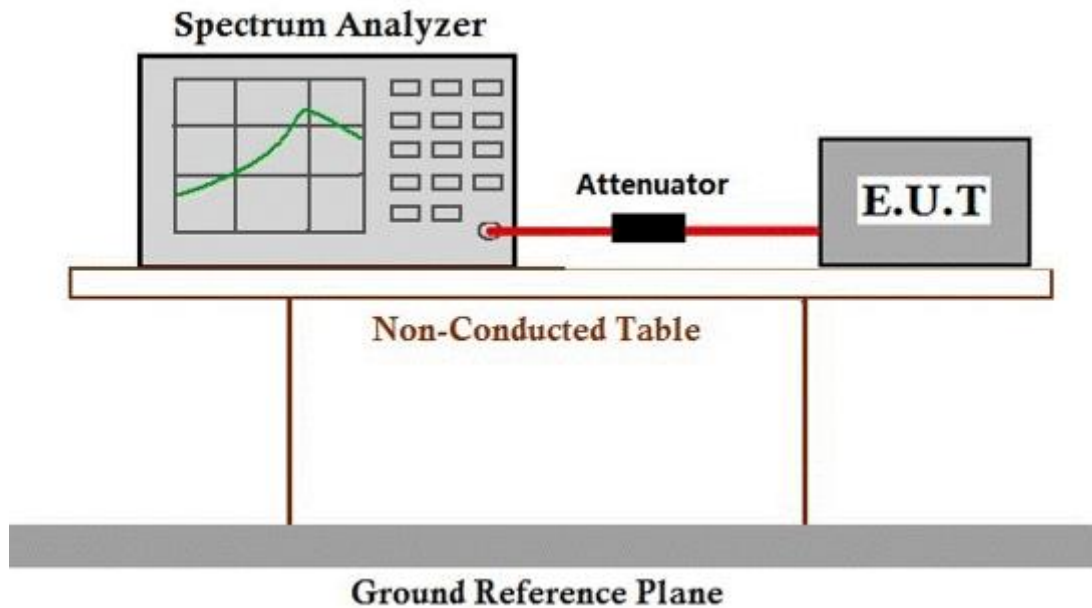

7.4.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 29.6 °C

Humidity: 53.3 % RH

Atmospheric Pressure: 1005 mbar

7.5.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, or email: CN.Qcccheck@sgs.com

7.5.3 Test Setup Diagram

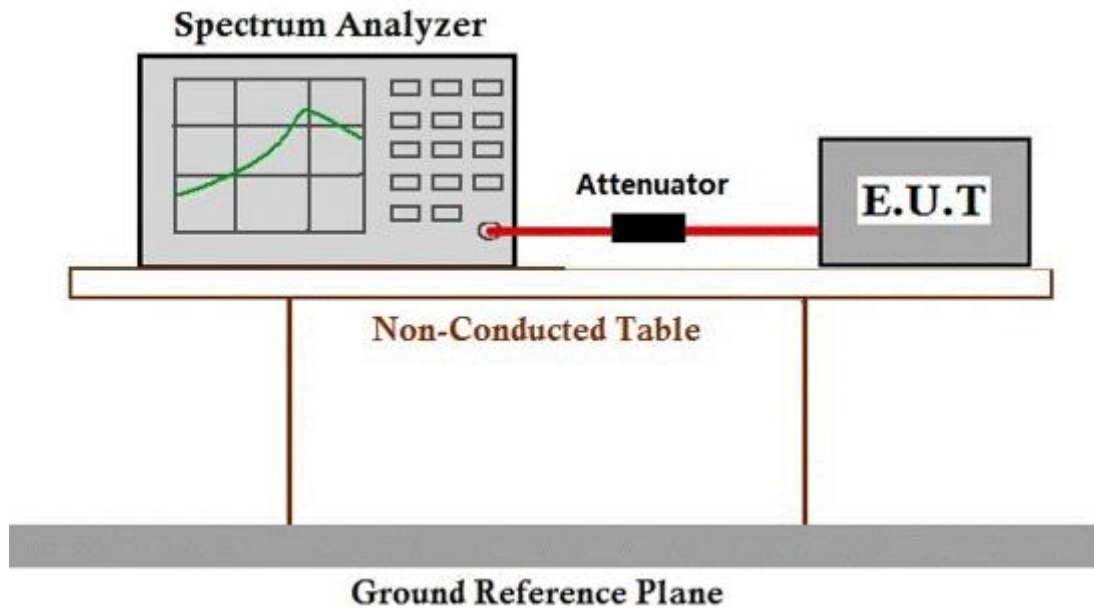

7.5.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.6 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 29.6 °C

Humidity: 53.3 % RH

Atmospheric Pressure: 1005 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
------------	----	--


Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
------------	----	--

Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
------------	----	--

Final test 09

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

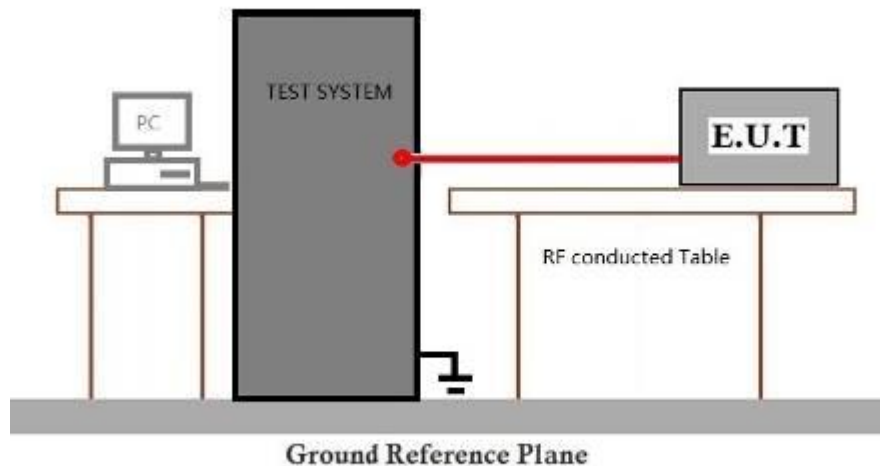

7.6.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.7 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
------------	----	--


Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
------------	----	--

Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
------------	----	--

Final test 09

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

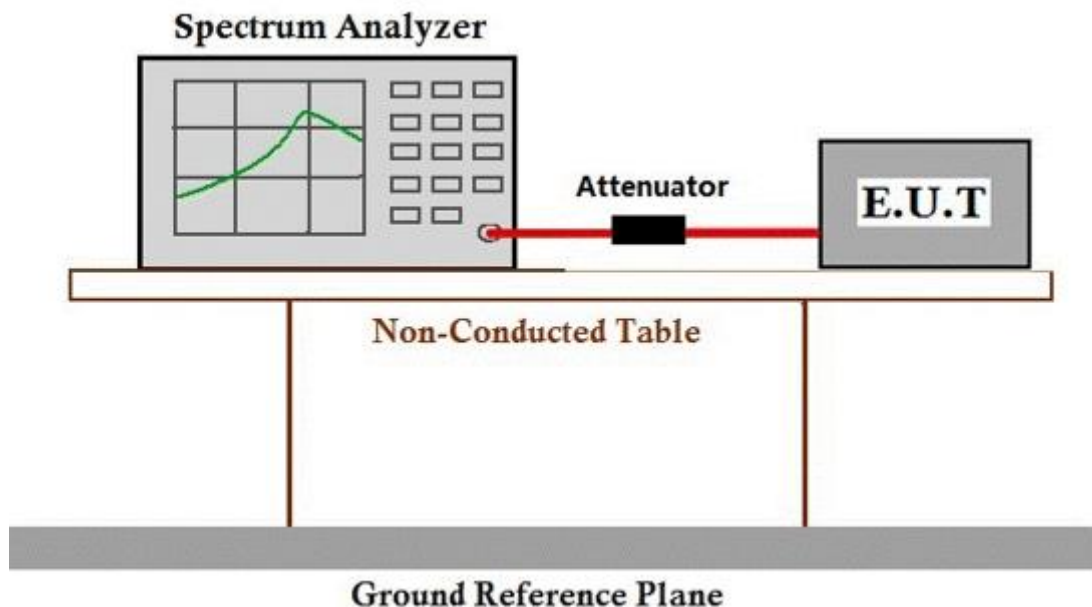

7.7.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.8 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 26.2 °C Humidity: 62.5 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of
------------	----	---



- Final test 07 IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
- TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
- Final test 08 TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
- Final test 09 TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

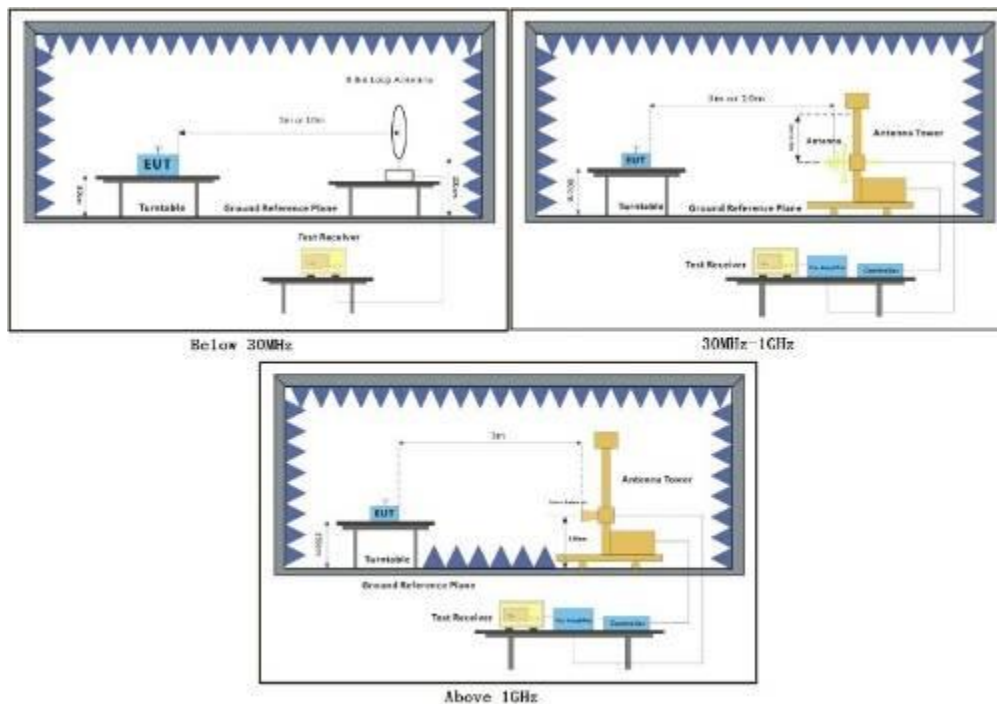

7.8.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark1:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11ac. Only the worst case is recorded in the report.
3. Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark2:


1. The disturbance below 30MHz and above 18GHz was very low, and the below harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
2. Pretest the EUT at antenna 1 and antenna 2 and MIMO mode find the worst case is MIMO mode.
3. Pretest the EUT in 802.11a/ n(20)/ n(40)/ ac (20)/ ac (40)/ ac(80) find the worst case are 802.11a /n(40)/ ac(80), only record the worst case test data 802.11a in this report.
4. For the emission 30MHz to 1Ghz, lowest, middle, highest channel test performed at band U-NII-1, U-NII-2A, U-NII-2C, U-NII-3, find the worst case is band U-NII-1 802.11a mode lowest channel, only record the worst case.



Test Mode: 06; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: Low

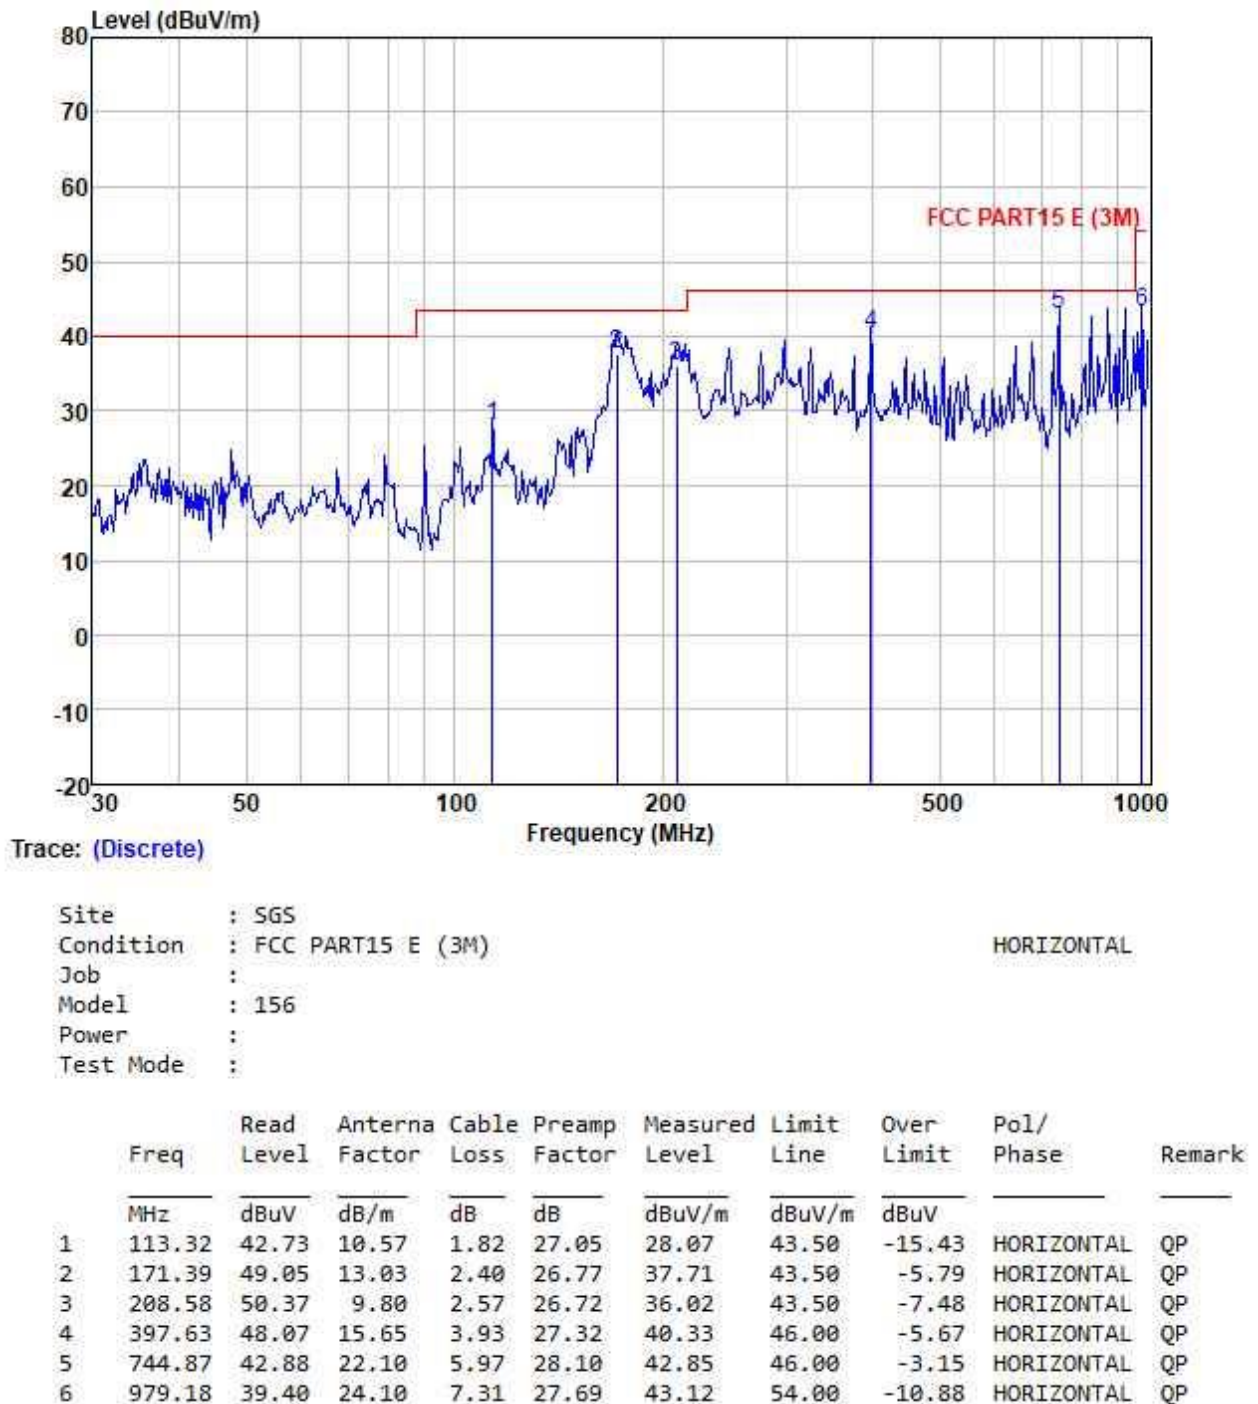


Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

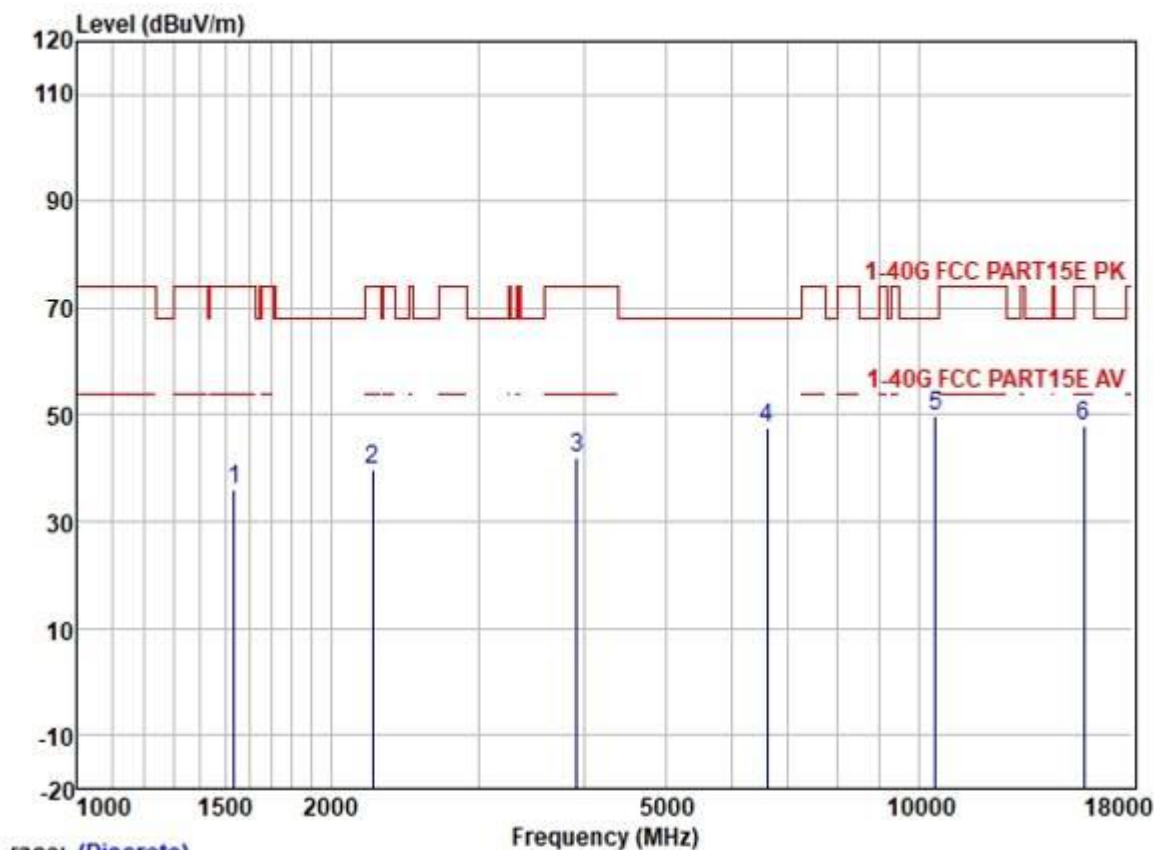


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1538.281	45.62	25.53	2.80	38.03	35.92	74.00	-38.08	HORIZONTAL	Peak
2	2246.344	47.11	26.88	3.25	37.64	39.60	74.00	-34.40	HORIZONTAL	Peak
3	3924.135	44.29	29.72	4.60	36.82	41.79	74.00	-32.21	HORIZONTAL	Peak
4	6602.265	44.67	34.16	5.84	37.04	47.63	68.20	-20.57	HORIZONTAL	Peak
5	10480.560	40.33	39.46	7.40	37.36	49.83	68.20	-18.37	HORIZONTAL	Peak
6	15720.410	34.67	38.78	9.87	35.39	47.93	74.00	-26.07	HORIZONTAL	Peak

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

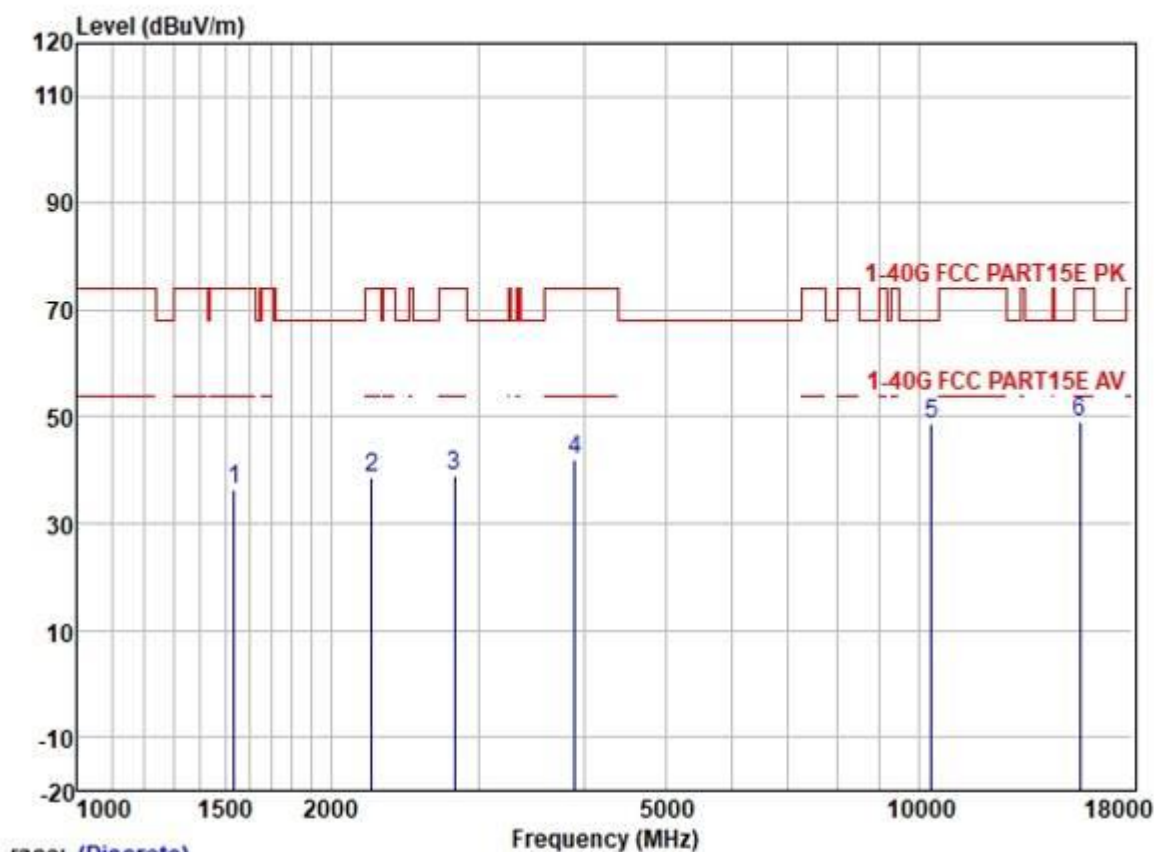

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1538.281	46.02	25.53	2.80	38.03	36.32	74.00	-37.68	HORIZONTAL Peak
2	2239.861	46.24	26.84	3.24	37.64	38.68	74.00	-35.32	HORIZONTAL Peak
3	2806.288	44.57	28.15	3.70	37.41	39.01	74.00	-34.99	HORIZONTAL Peak
4	3901.516	44.57	29.69	4.60	36.82	42.04	74.00	-31.96	HORIZONTAL Peak
5	10360.800	39.65	39.28	7.29	37.37	48.85	68.20	-19.35	HORIZONTAL Peak
6	15540.710	35.41	39.05	9.88	35.39	48.95	74.00	-25.05	HORIZONTAL Peak

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

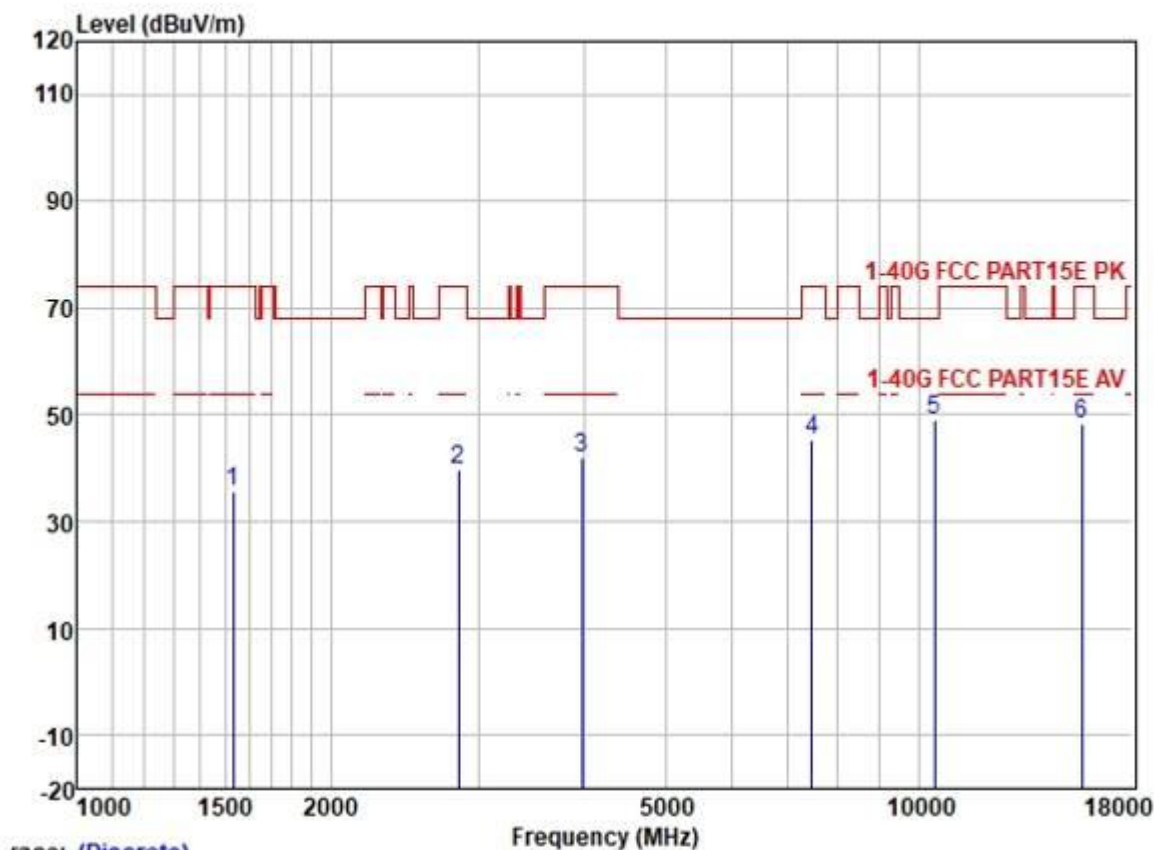

race: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1533.841	45.29	25.52	2.80	38.07	35.54	74.00	-38.46	HORIZONTAL	Peak
2	2838.921	45.36	28.21	3.70	37.38	39.89	74.00	-34.11	HORIZONTAL	Peak
3	3981.257	44.29	29.78	4.60	36.81	41.86	74.00	-32.14	HORIZONTAL	Peak
4	7476.006	40.02	36.36	6.25	37.48	45.15	74.00	-28.85	HORIZONTAL	Peak
5	10440.820	39.59	39.42	7.37	37.36	49.02	68.20	-19.18	HORIZONTAL	Peak
6	15660.710	35.00	38.86	9.87	35.39	48.34	74.00	-25.66	HORIZONTAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is deemed to have read, understood and accepted the Terms and Conditions of the Company and the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is strictly prohibited and may result in severe civil or criminal penalties, damages and/or legal actions. The results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CTI Standards Technical Services Co., Ltd.
Guangzhou Environmental & Energy EEC Laboratory

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 | (86-20) 82155555 | (86-20) 82075058 | sgs.china@sgs.com


Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

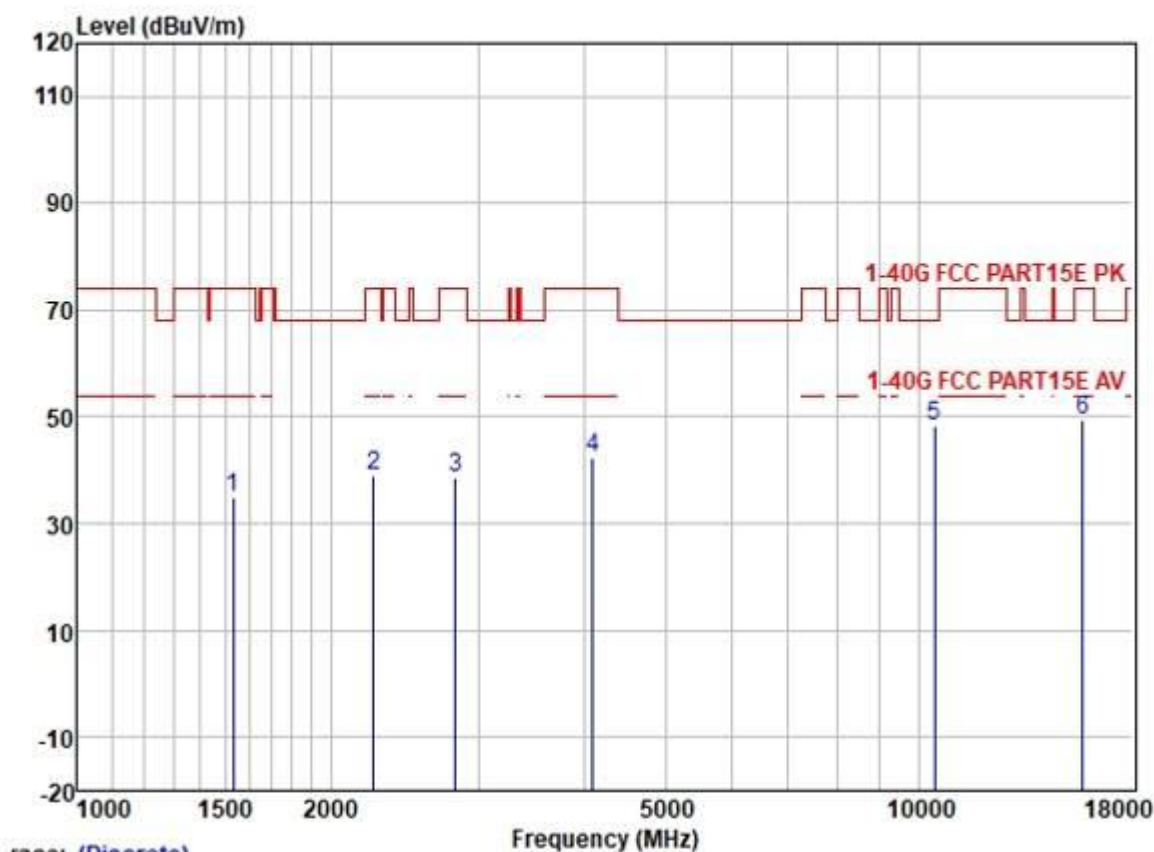

race: (Discrete)

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1533.841	44.60	25.52	2.80	38.07	34.85	74.00	-39.15	HORIZONTAL	Peak
2	2252.846	46.42	26.92	3.26	37.64	38.96	74.00	-35.04	HORIZONTAL	Peak
3	2814.411	43.96	28.17	3.70	37.40	38.43	74.00	-35.57	HORIZONTAL	Peak
4	4098.010	44.72	29.94	4.60	36.80	42.46	74.00	-31.54	HORIZONTAL	Peak
5	10460.310	39.04	39.42	7.37	37.36	48.47	68.20	-19.73	HORIZONTAL	Peak
6	15690.560	36.23	38.86	9.87	35.39	49.57	74.00	-24.43	HORIZONTAL	Peak


Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

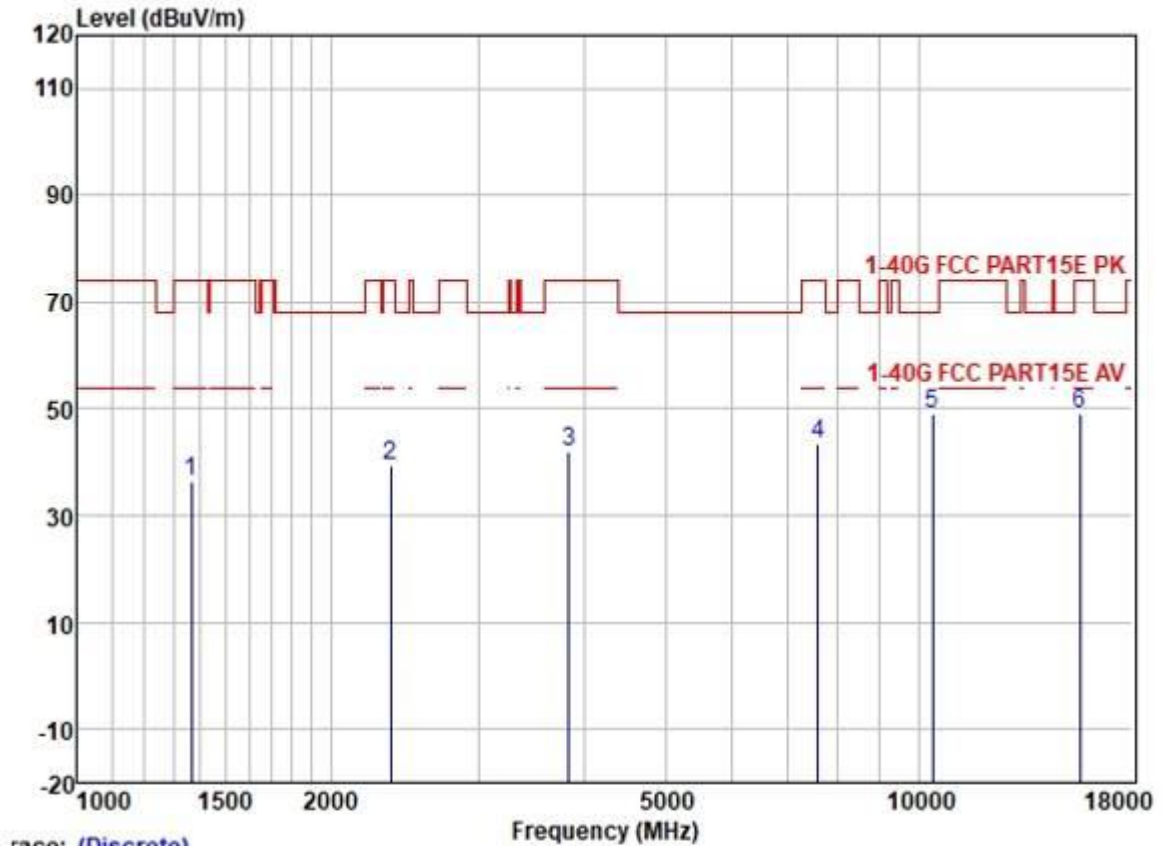

race: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1366.374	46.81	25.34	2.60	38.25	36.50	74.00	-37.50	HORIZONTAL	Peak
2	2359.478	46.10	27.27	3.42	37.61	39.18	74.00	-34.82	HORIZONTAL	Peak
3	3845.537	44.54	29.60	4.60	36.84	41.90	74.00	-32.10	HORIZONTAL	Peak
4	7584.833	38.42	36.47	6.24	37.51	43.62	74.00	-30.38	HORIZONTAL	Peak
5	10380.330	39.60	39.33	7.32	37.37	48.88	68.20	-19.32	HORIZONTAL	Peak
6	15570.690	35.68	38.99	9.88	35.39	49.16	74.00	-24.84	HORIZONTAL	Peak

Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: Low

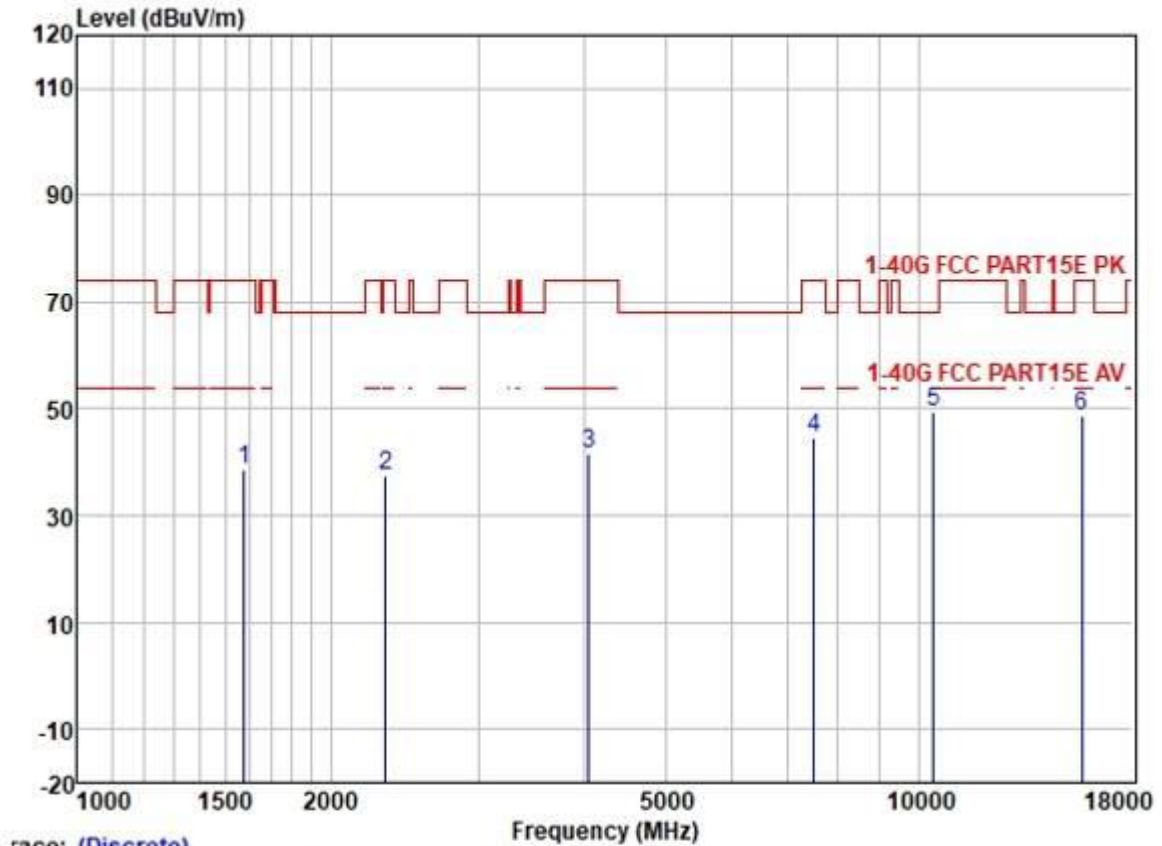

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1578.822	48.36	25.56	2.80	38.00	38.72	74.00	-35.28	HORIZONTAL Peak
2	2325.624	44.73	27.19	3.34	37.62	37.64	74.00	-36.36	HORIZONTAL Peak
3	4050.904	43.81	29.87	4.60	36.80	41.48	74.00	-32.52	HORIZONTAL Peak
4	7519.349	39.51	36.42	6.26	37.50	44.69	74.00	-29.31	HORIZONTAL Peak
5	10420.180	40.01	39.38	7.35	37.36	49.38	68.20	-18.82	HORIZONTAL Peak
6	15630.900	35.11	38.92	9.87	35.39	48.51	74.00	-25.49	HORIZONTAL Peak


Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

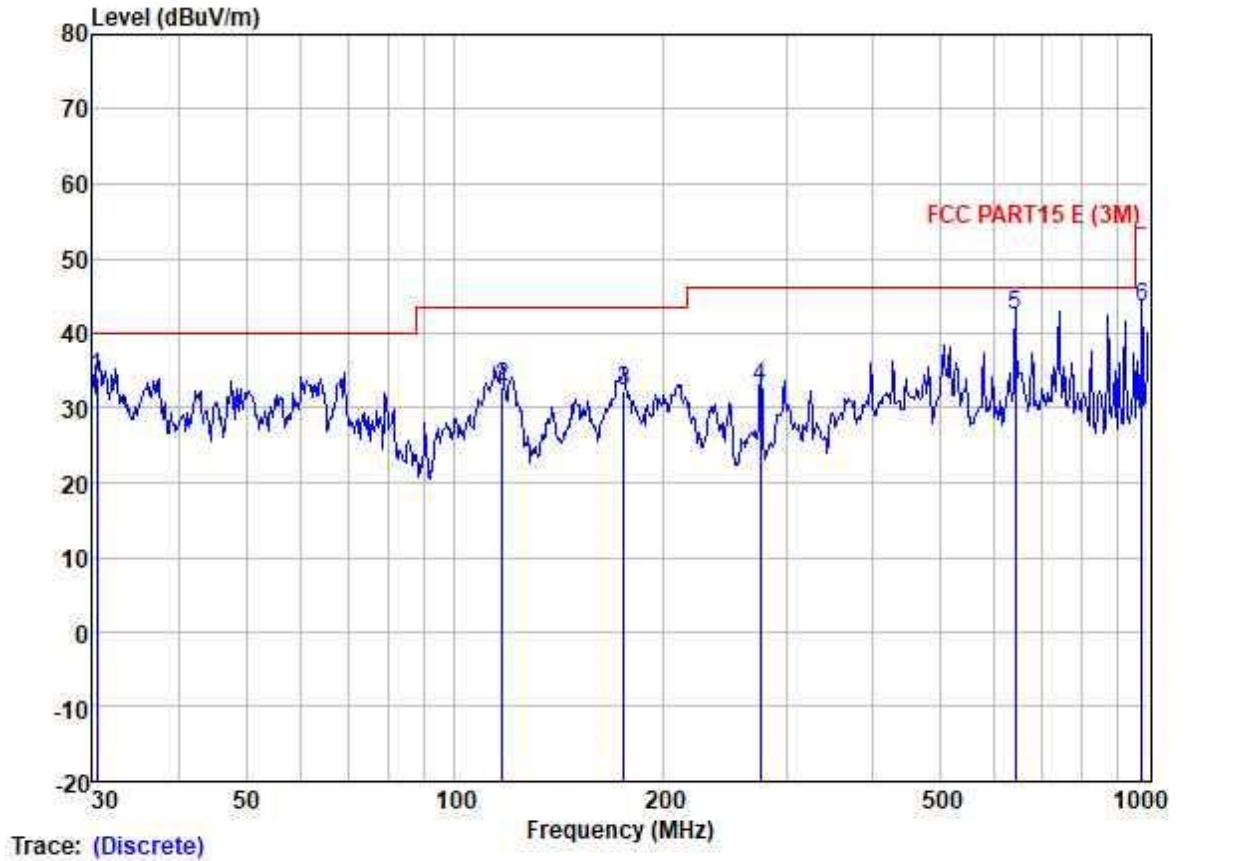

Site : SGS
Condition : FCC PART15 E (3M) VERTICAL
Job :
Model : 156
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	30.42	47.80	12.46	1.02	27.20	34.08	40.00	-5.92	VERTICAL	QP
2	116.95	47.38	10.70	1.84	27.04	32.88	43.50	-10.62	VERTICAL	QP
3	175.04	43.97	12.60	2.42	26.76	32.23	43.50	-11.27	VERTICAL	QP
4	276.12	43.34	13.05	3.07	26.57	32.89	46.00	-13.11	VERTICAL	QP
5	642.86	44.59	20.42	5.45	28.19	42.27	46.00	-3.73	VERTICAL	QP
6	979.18	39.74	24.10	7.31	27.69	43.46	54.00	-10.54	VERTICAL	QP


Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

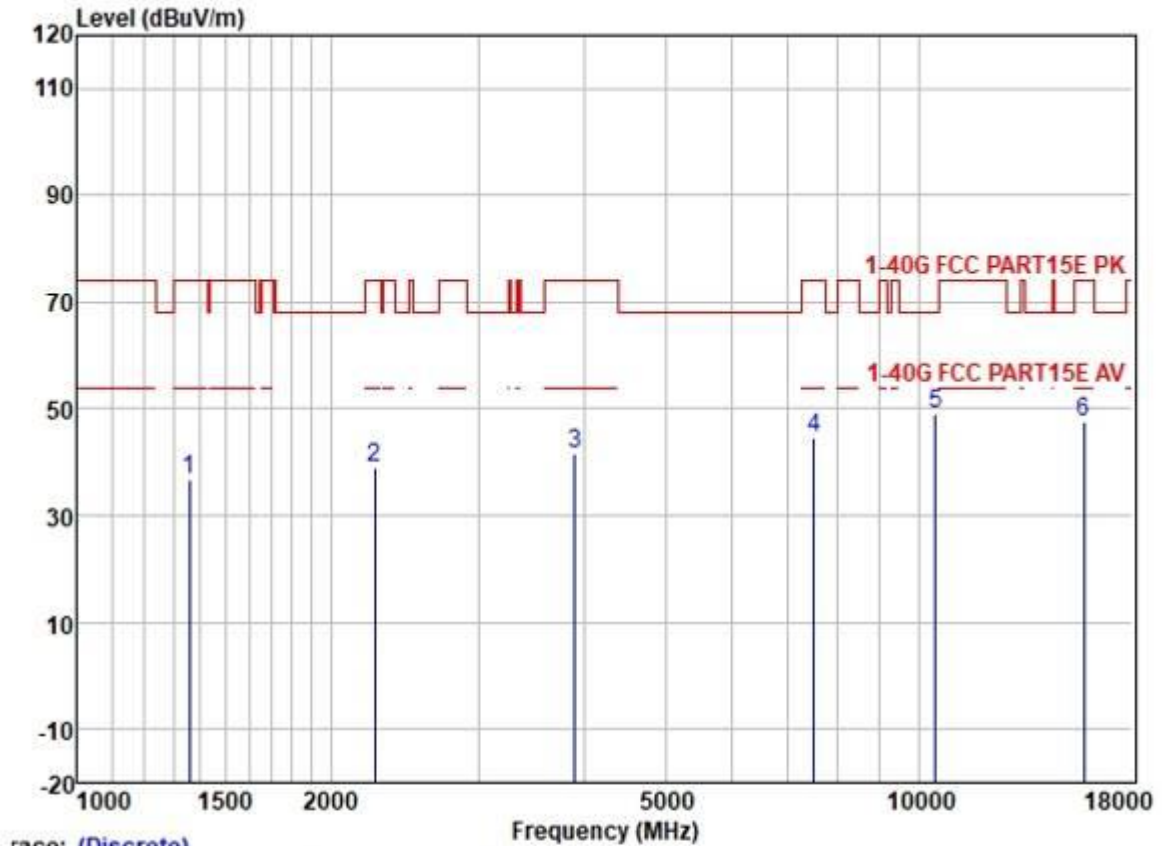

race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1358.498	46.99	25.33	2.60	38.27	36.65	74.00	-37.35	VERTICAL Peak
2	2259.367	46.37	26.95	3.27	37.64	38.95	74.00	-35.05	VERTICAL Peak
3	3901.516	44.31	29.69	4.60	36.82	41.78	74.00	-32.22	VERTICAL Peak
4	7519.349	39.42	36.42	6.26	37.50	44.60	74.00	-29.40	VERTICAL Peak
5	10480.140	39.61	39.46	7.40	37.36	49.11	68.20	-19.09	VERTICAL Peak
6	15720.900	34.35	38.78	9.87	35.39	47.61	74.00	-26.39	VERTICAL Peak


Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

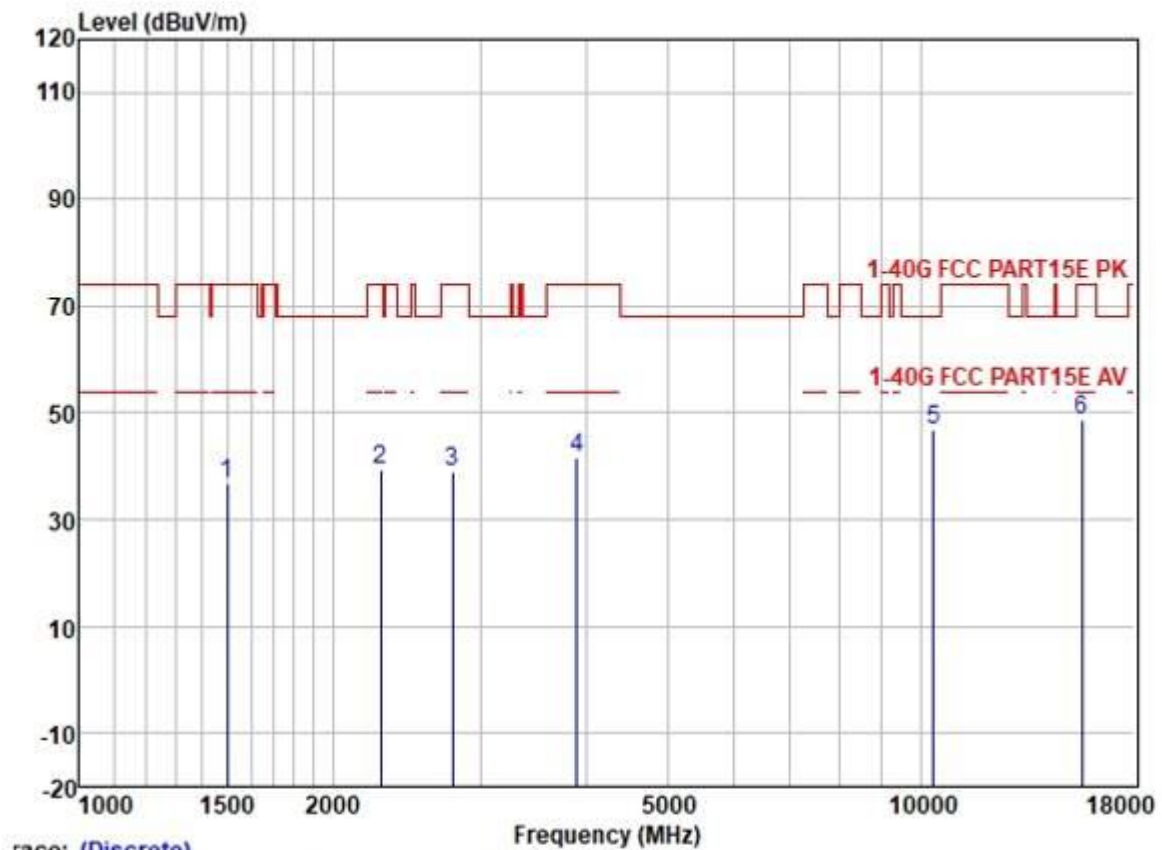

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1498.781	46.44	25.50	2.80	38.10	36.64	74.00	-37.36	VERTICAL	Peak
2	2279.044	46.64	27.03	3.28	37.63	39.32	74.00	-34.68	VERTICAL	Peak
3	2774.030	44.69	28.08	3.68	37.43	39.02	74.00	-34.98	VERTICAL	Peak
4	3901.516	43.98	29.69	4.60	36.82	41.45	74.00	-32.55	VERTICAL	Peak
5	10360.790	37.63	39.28	7.29	37.37	46.83	68.20	-21.37	VERTICAL	Peak
6	15540.900	35.19	39.05	9.88	35.39	48.73	74.00	-25.27	VERTICAL	Peak

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

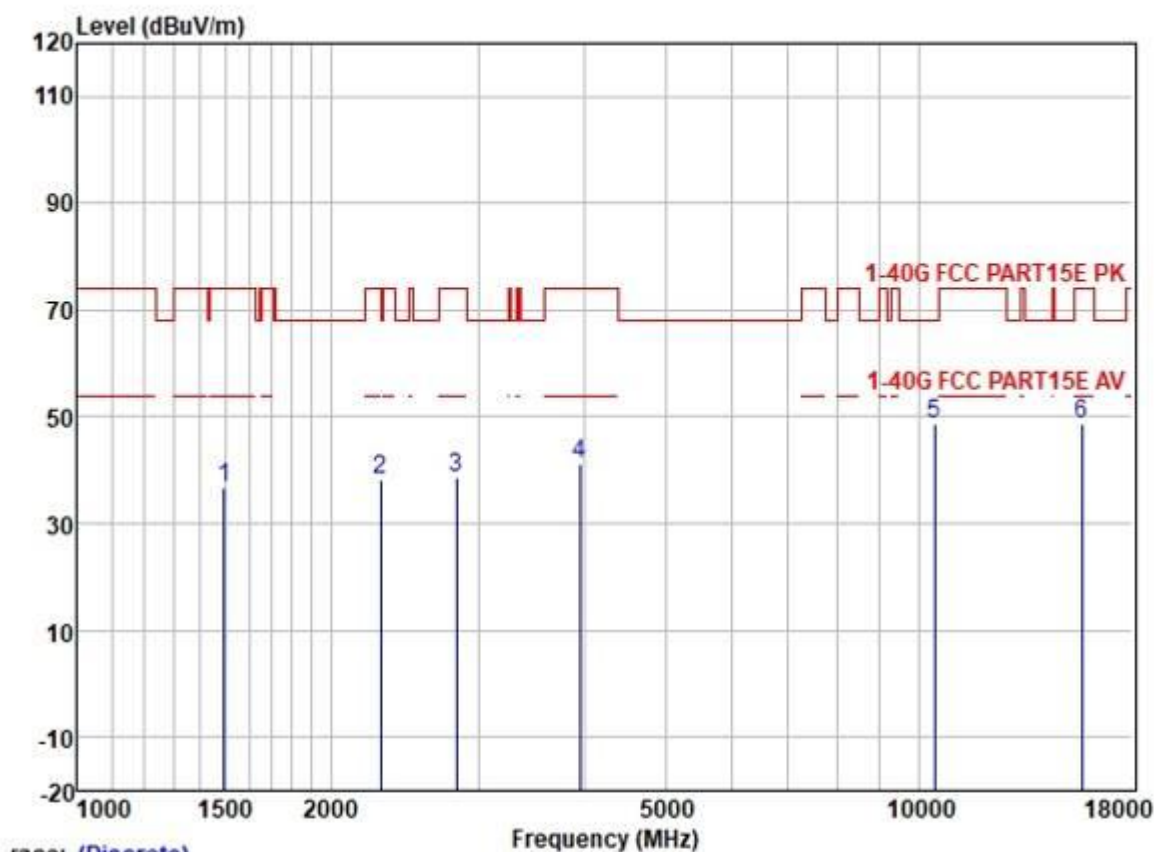


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1494.455	46.49	25.50	2.79	38.10	36.68	74.00	-37.32	VERTICAL Peak
2	2292.257	45.51	27.08	3.30	37.62	38.27	74.00	-35.73	VERTICAL Peak
3	2822.558	44.16	28.18	3.70	37.40	38.64	74.00	-35.36	VERTICAL Peak
4	3958.309	43.76	29.75	4.60	36.81	41.30	74.00	-32.70	VERTICAL Peak
5	10440.980	39.14	39.42	7.37	37.36	48.57	68.20	-19.63	VERTICAL Peak
6	15660.220	35.24	38.86	9.87	35.39	48.58	74.00	-25.42	VERTICAL Peak

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

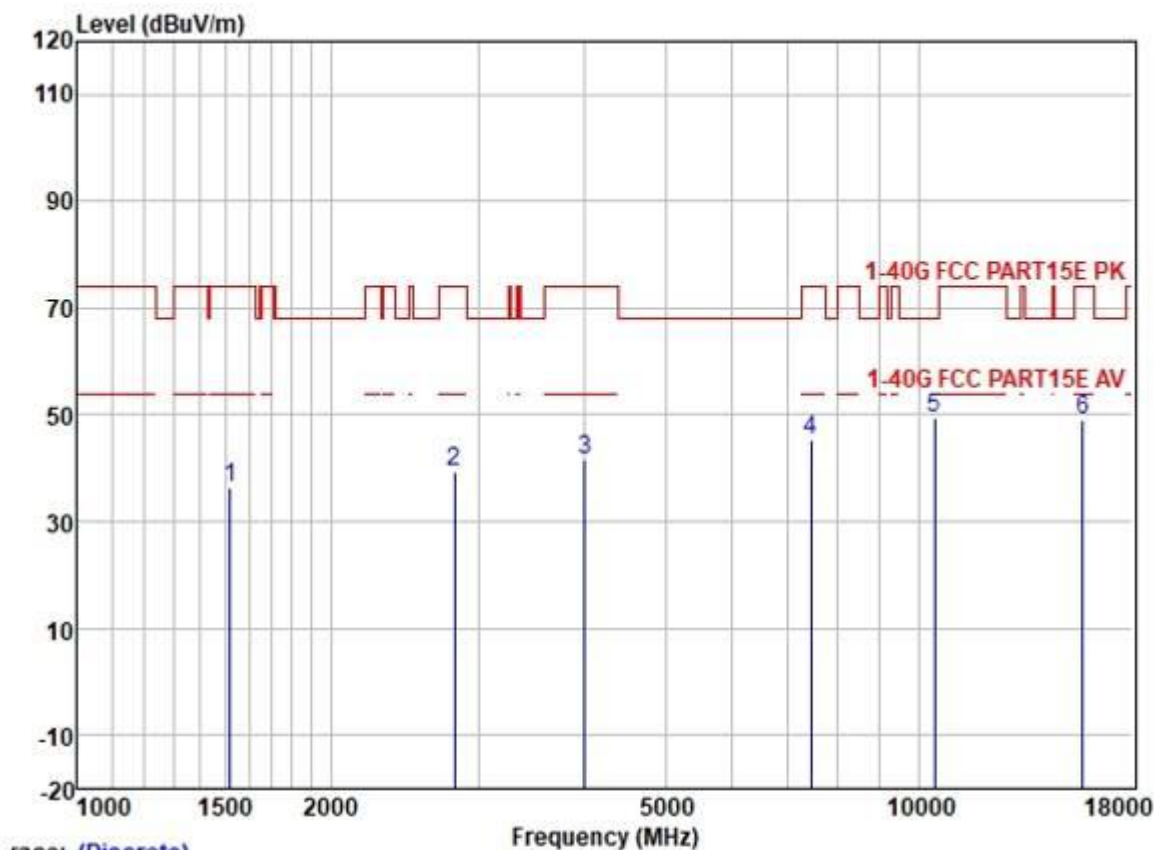


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1520.598	46.28	25.51	2.80	38.07	36.52	74.00	-37.48	VERTICAL	Peak
2	2806.288	44.84	28.15	3.70	37.41	39.28	74.00	-34.72	VERTICAL	Peak
3	4015.929	43.86	29.82	4.60	36.80	41.48	74.00	-32.52	VERTICAL	Peak
4	7454.429	40.28	36.32	6.23	37.47	45.36	74.00	-28.64	VERTICAL	Peak
5	10460.930	40.04	39.42	7.37	37.36	49.47	68.20	-18.73	VERTICAL	Peak
6	15690.900	35.72	38.78	9.87	35.39	48.98	74.00	-25.02	VERTICAL	Peak

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

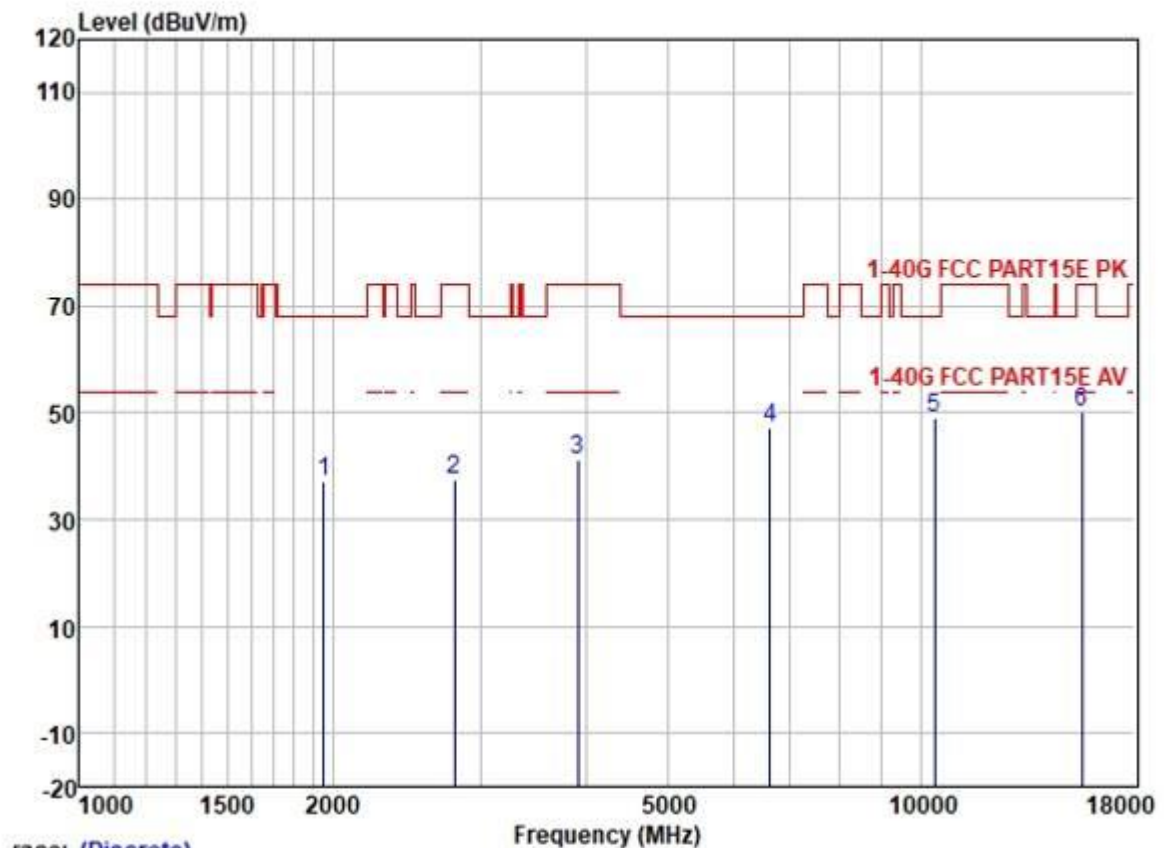


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1955.344	45.91	26.08	3.01	37.73	37.27	68.20	-30.93	VERTICAL	Peak
2	2790.113	43.14	28.12	3.69	37.41	37.54	74.00	-36.46	VERTICAL	Peak
3	3912.809	43.75	29.70	4.60	36.82	41.23	74.00	-32.77	VERTICAL	Peak
4	6621.375	44.06	34.20	5.83	37.05	47.04	68.20	-21.16	VERTICAL	Peak
5	10380.800	39.64	39.33	7.32	37.37	48.92	68.20	-19.28	VERTICAL	Peak
6	15570.210	36.66	38.99	9.88	35.39	50.14	74.00	-23.86	VERTICAL	Peak

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

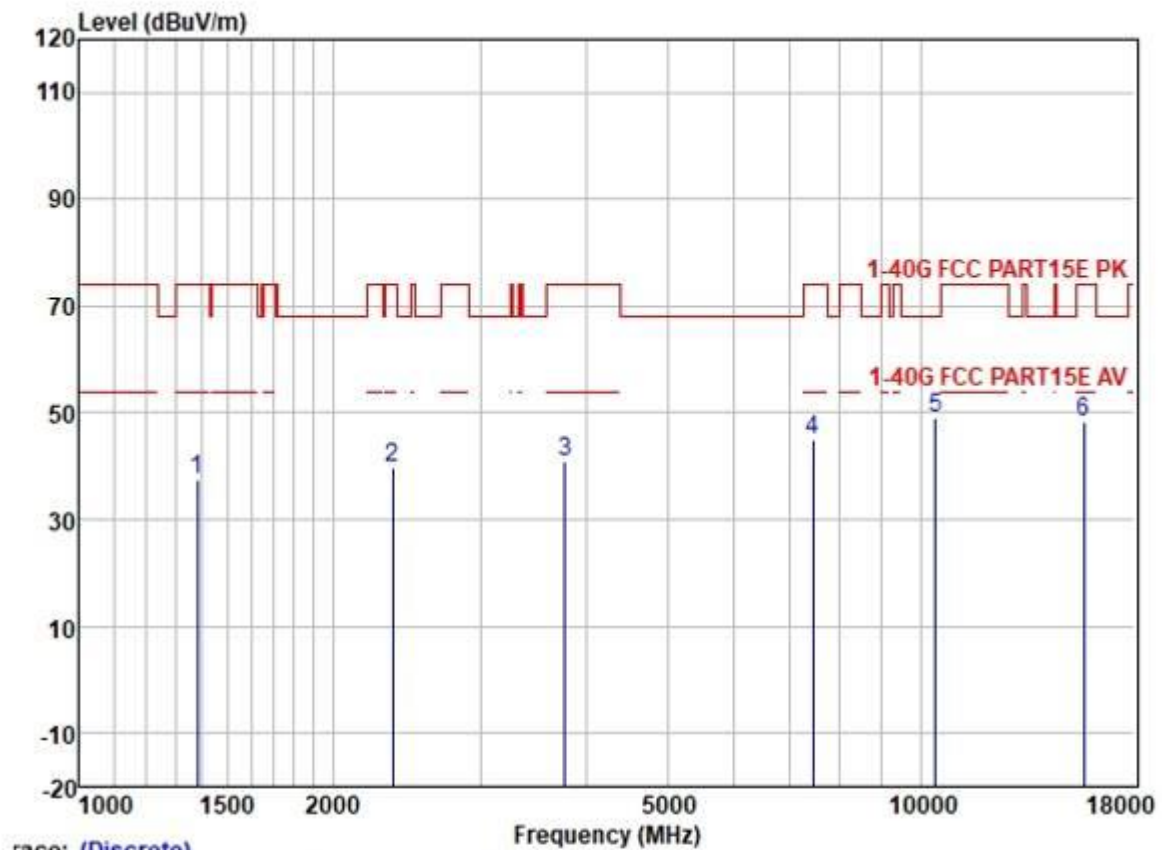

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1382.262	47.92	25.37	2.60	38.25	37.64	74.00	-36.36	VERTICAL	Peak
2	2359.478	46.69	27.27	3.42	37.61	39.77	74.00	-34.23	VERTICAL	Peak
3	3779.422	43.84	29.47	4.59	36.86	41.04	74.00	-32.96	VERTICAL	Peak
4	7454.429	39.96	36.32	6.23	37.47	45.04	74.00	-28.96	VERTICAL	Peak
5	10420.350	39.86	39.38	7.35	37.36	49.23	68.20	-18.97	VERTICAL	Peak
6	15630.050	34.94	38.92	9.87	35.39	48.34	74.00	-25.66	VERTICAL	Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

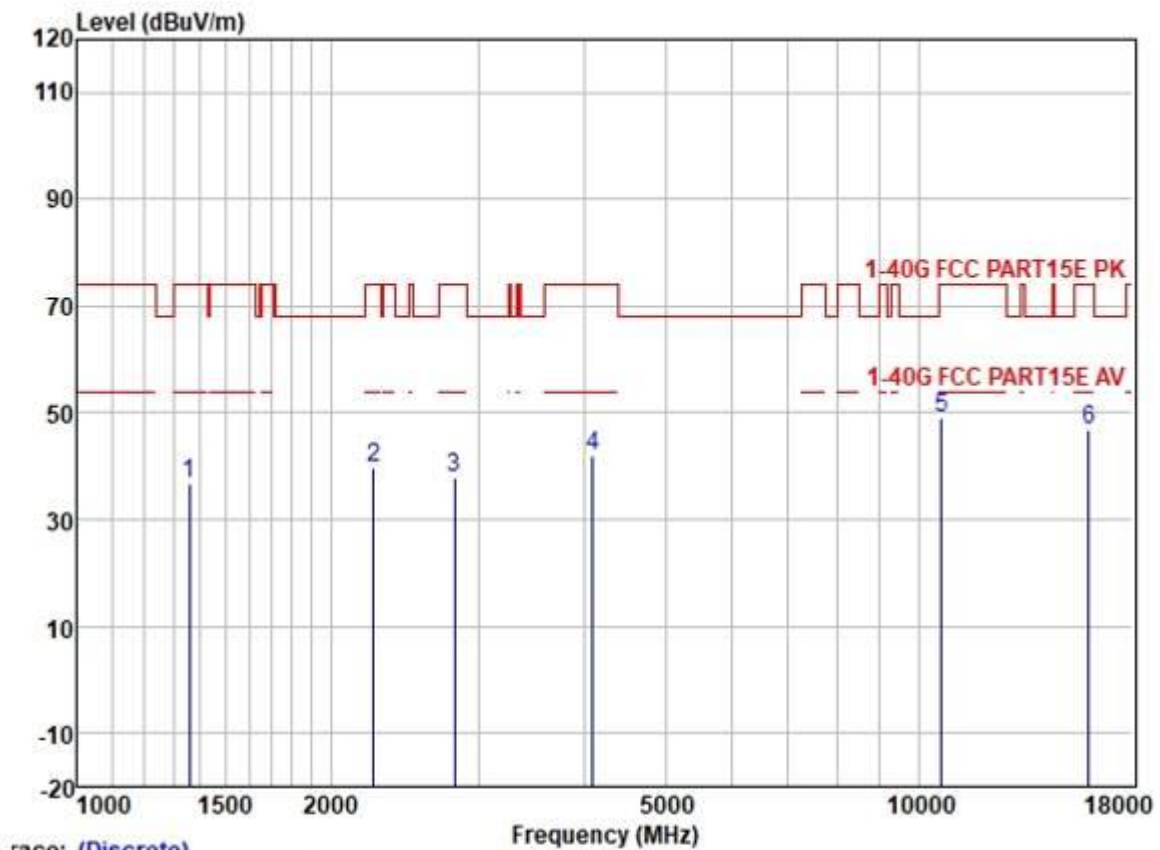

race: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1358.498	46.95	25.33	2.60	38.27	36.61	74.00	-37.39	HORIZONTAL	Peak
2	2252.846	47.10	26.92	3.26	37.64	39.64	74.00	-34.36	HORIZONTAL	Peak
3	2806.288	43.60	28.15	3.70	37.41	38.04	74.00	-35.96	HORIZONTAL	Peak
4	4098.010	44.27	29.94	4.60	36.80	42.01	74.00	-31.99	HORIZONTAL	Peak
5	10640.480	39.18	39.63	7.48	37.33	48.96	74.00	-25.04	HORIZONTAL	Peak
6	15960.290	34.12	38.37	9.85	35.40	46.94	74.00	-27.06	HORIZONTAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

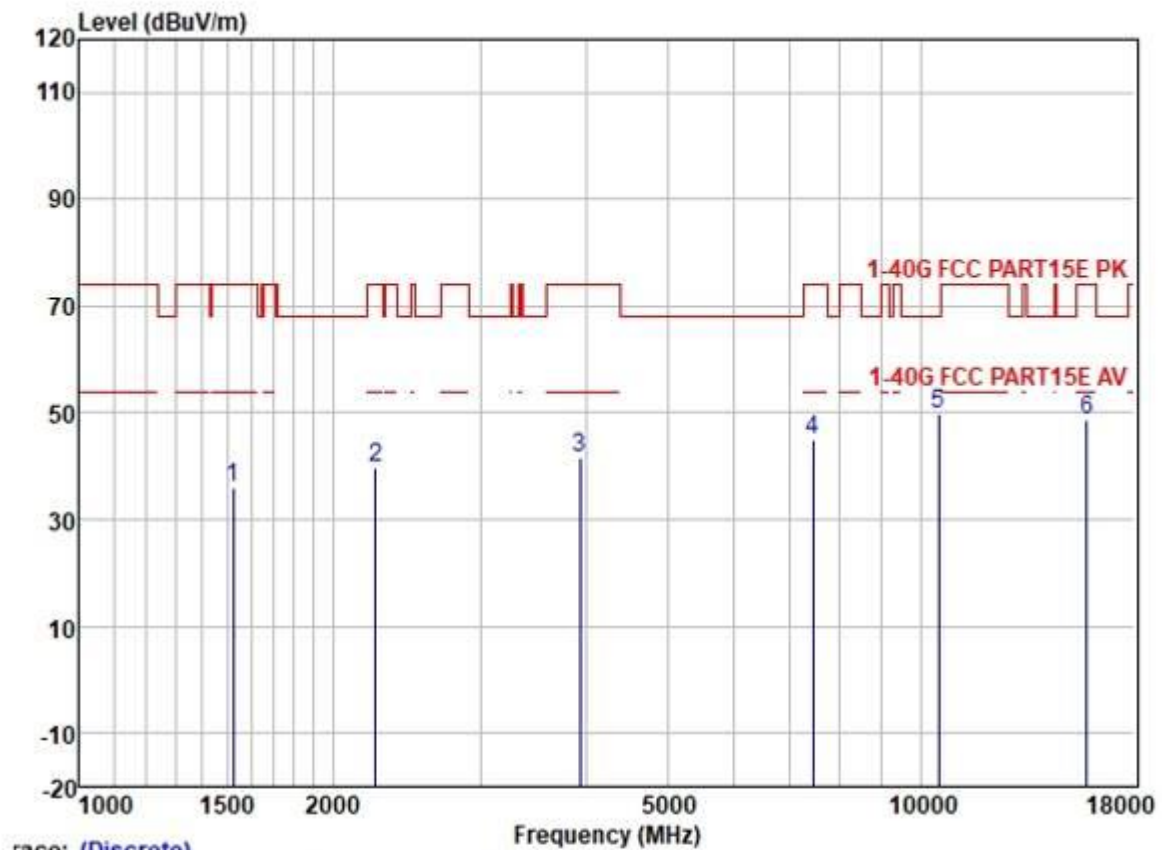


	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1525.000	45.88	25.52	2.80	38.07	36.13	74.00	-37.87	HORIZONTAL Peak
2	2252.846	47.12	26.92	3.26	37.64	39.66	74.00	-34.34	HORIZONTAL Peak
3	3935.493	44.08	29.73	4.60	36.82	41.59	74.00	-32.41	HORIZONTAL Peak
4	7454.429	39.82	36.32	6.23	37.47	44.90	74.00	-29.10	HORIZONTAL Peak
5	10520.190	40.35	39.50	7.42	37.35	49.92	68.20	-18.28	HORIZONTAL Peak
6	15780.940	35.69	38.70	9.86	35.39	48.86	74.00	-25.14	HORIZONTAL Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

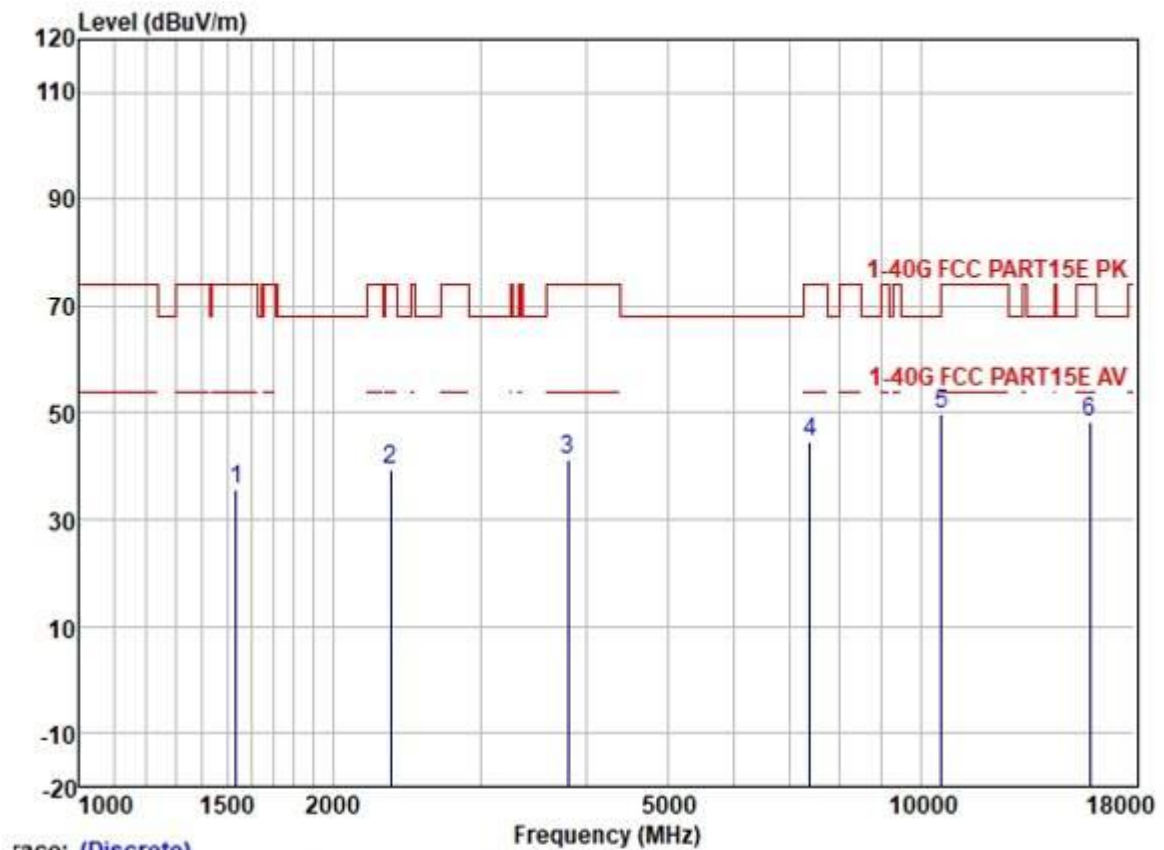


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1538.281	45.40	25.53	2.80	38.03	35.70	74.00	-38.30	HORIZONTAL Peak
2	2345.878	46.24	27.24	3.38	37.61	39.25	74.00	-34.75	HORIZONTAL Peak
3	3812.336	43.96	29.55	4.60	36.85	41.26	74.00	-32.74	HORIZONTAL Peak
4	7390.070	39.82	36.17	6.19	37.46	44.72	74.00	-29.28	HORIZONTAL Peak
5	10600.180	40.28	39.59	7.46	37.34	49.99	74.00	-24.01	HORIZONTAL Peak
6	15900.110	35.57	38.44	9.86	35.40	48.47	74.00	-25.53	HORIZONTAL Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

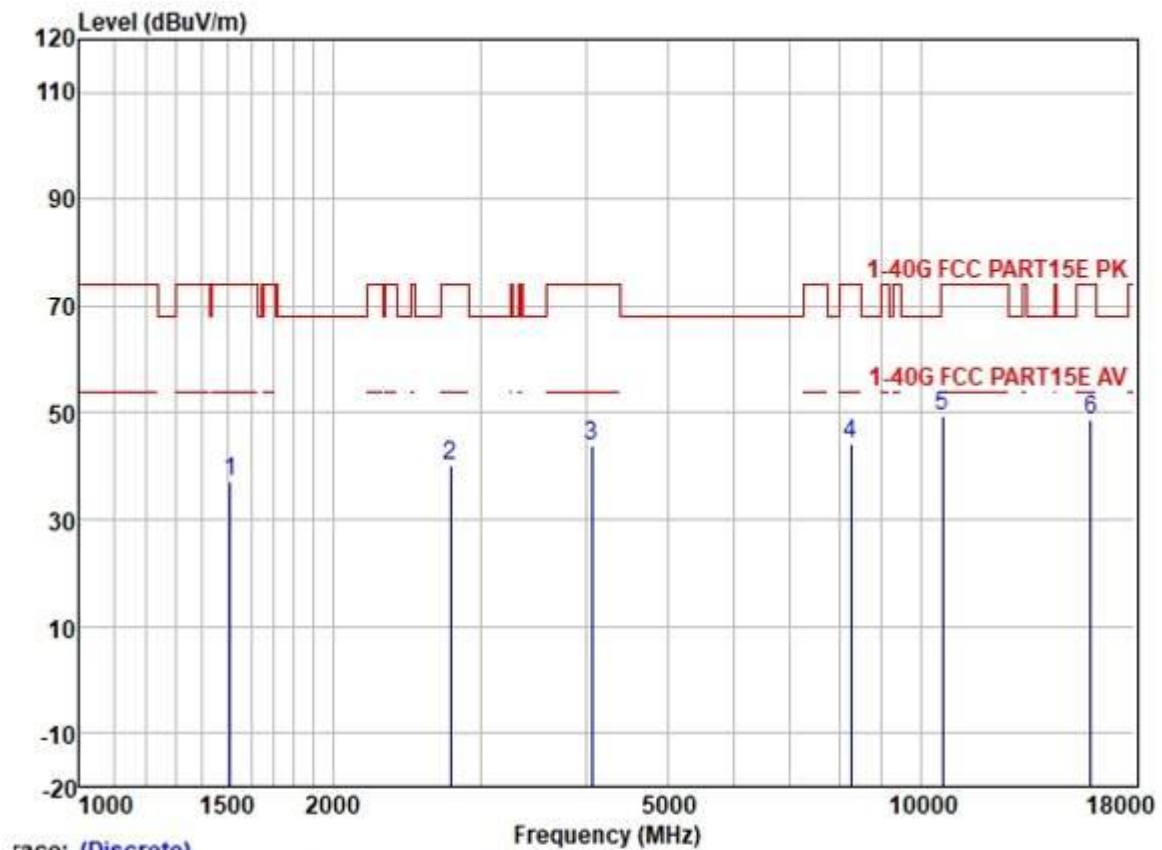


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1511.833	46.81	25.51	2.80	38.10	37.02	74.00	-36.98	HORIZONTAL	Peak
2	2758.041	45.67	28.03	3.66	37.44	39.92	74.00	-34.08	HORIZONTAL	Peak
3	4062.629	46.06	29.88	4.60	36.80	43.74	74.00	-30.26	HORIZONTAL	Peak
4	8271.880	38.44	37.01	6.46	37.58	44.33	74.00	-29.67	HORIZONTAL	Peak
5	10620.540	39.91	39.59	7.46	37.34	49.62	74.00	-24.38	HORIZONTAL	Peak
6	15930.990	36.05	38.37	9.85	35.40	48.87	74.00	-25.13	HORIZONTAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

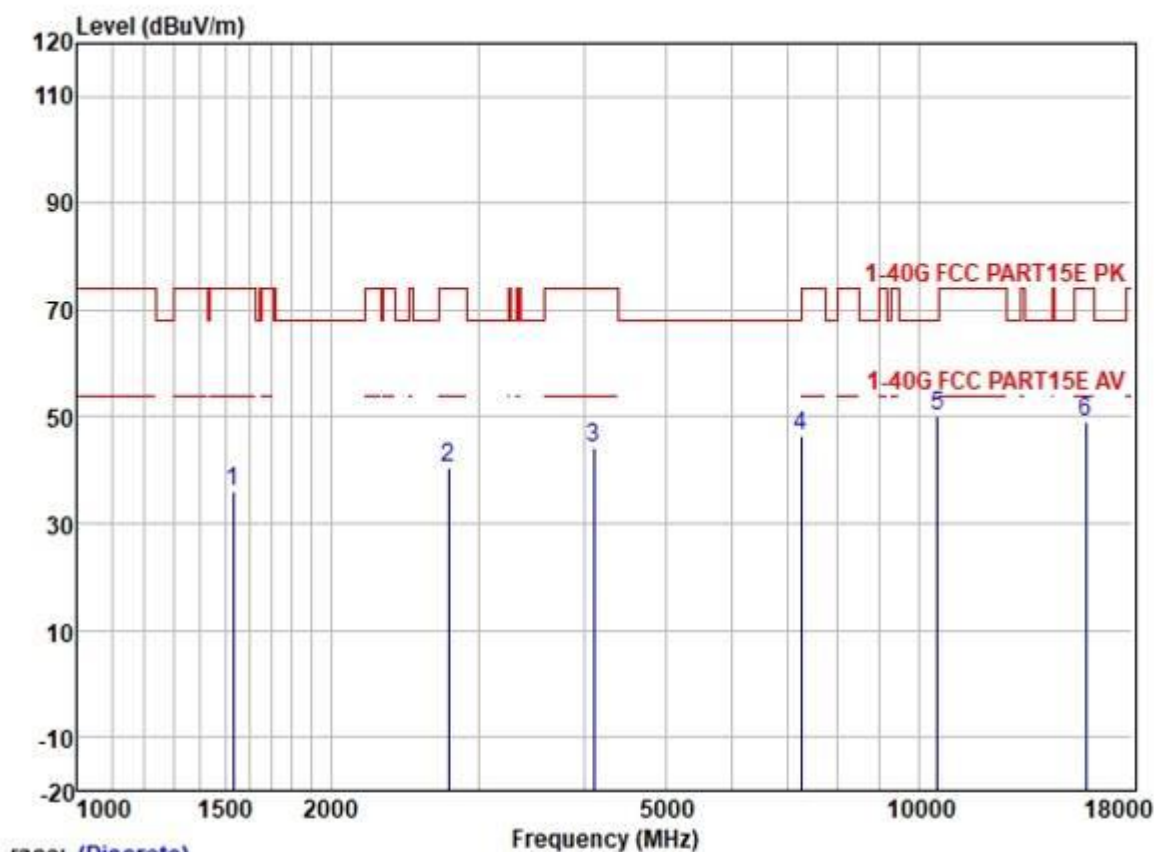


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1533.841	45.76	25.52	2.80	38.07	36.01	74.00	-37.99	HORIZONTAL	Peak
2	2758.041	46.12	28.03	3.66	37.44	40.37	74.00	-33.63	HORIZONTAL	Peak
3	4109.872	46.35	29.96	4.60	36.80	44.11	74.00	-29.89	HORIZONTAL	Peak
4	7242.052	42.11	35.70	6.03	37.40	46.44	68.20	-21.76	HORIZONTAL	Peak
5	10540.480	40.57	39.53	7.43	37.35	50.18	68.20	-18.02	HORIZONTAL	Peak
6	15810.880	36.01	38.61	9.86	35.39	49.09	74.00	-24.91	HORIZONTAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

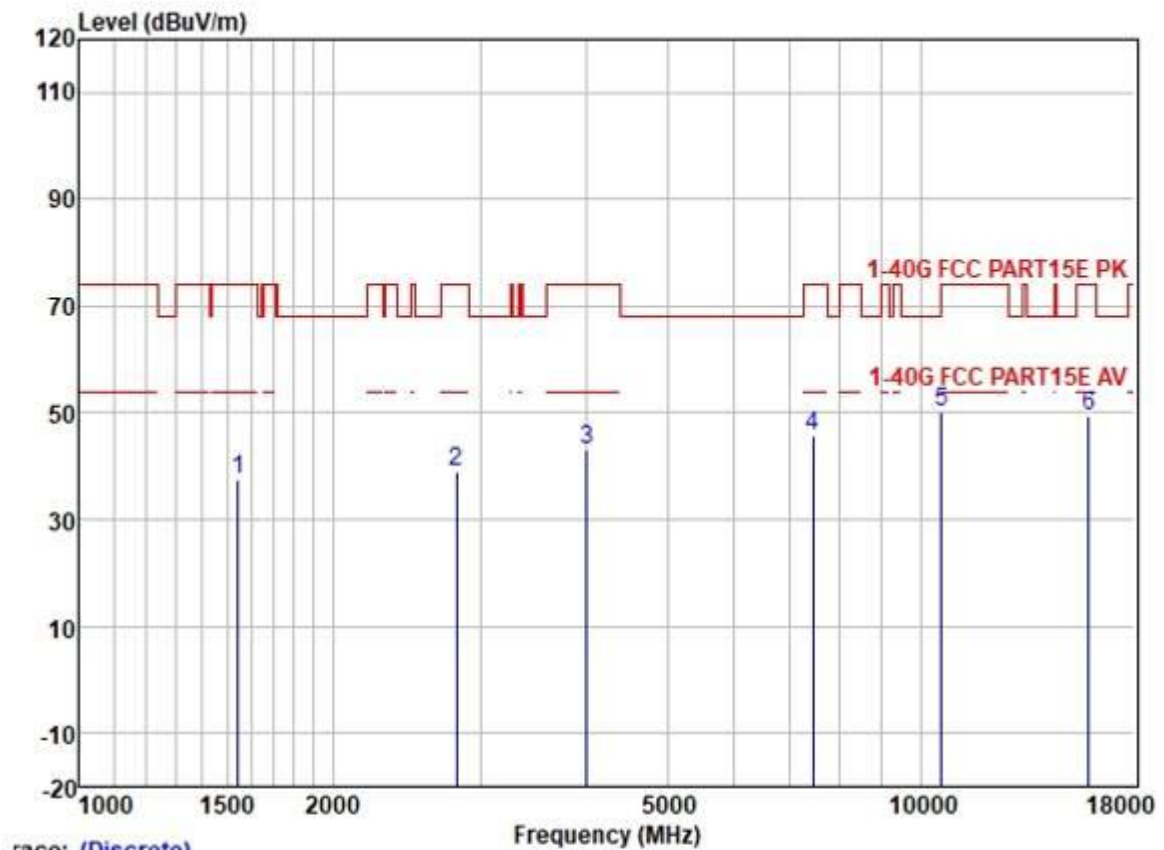


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1542.733	47.07	25.53	2.80	38.03	37.37	74.00	-36.63	HORIZONTAL	Peak
2	2806.288	44.61	28.15	3.70	37.41	39.05	74.00	-34.95	HORIZONTAL	Peak
3	4015.929	45.29	29.82	4.60	36.80	42.91	74.00	-31.09	HORIZONTAL	Peak
4	7454.429	40.46	36.32	6.23	37.47	45.54	74.00	-28.46	HORIZONTAL	Peak
5	10580.390	40.34	39.56	7.45	37.34	50.01	68.20	-18.19	HORIZONTAL	Peak
6	15870.390	36.42	38.52	9.86	35.40	49.40	74.00	-24.60	HORIZONTAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

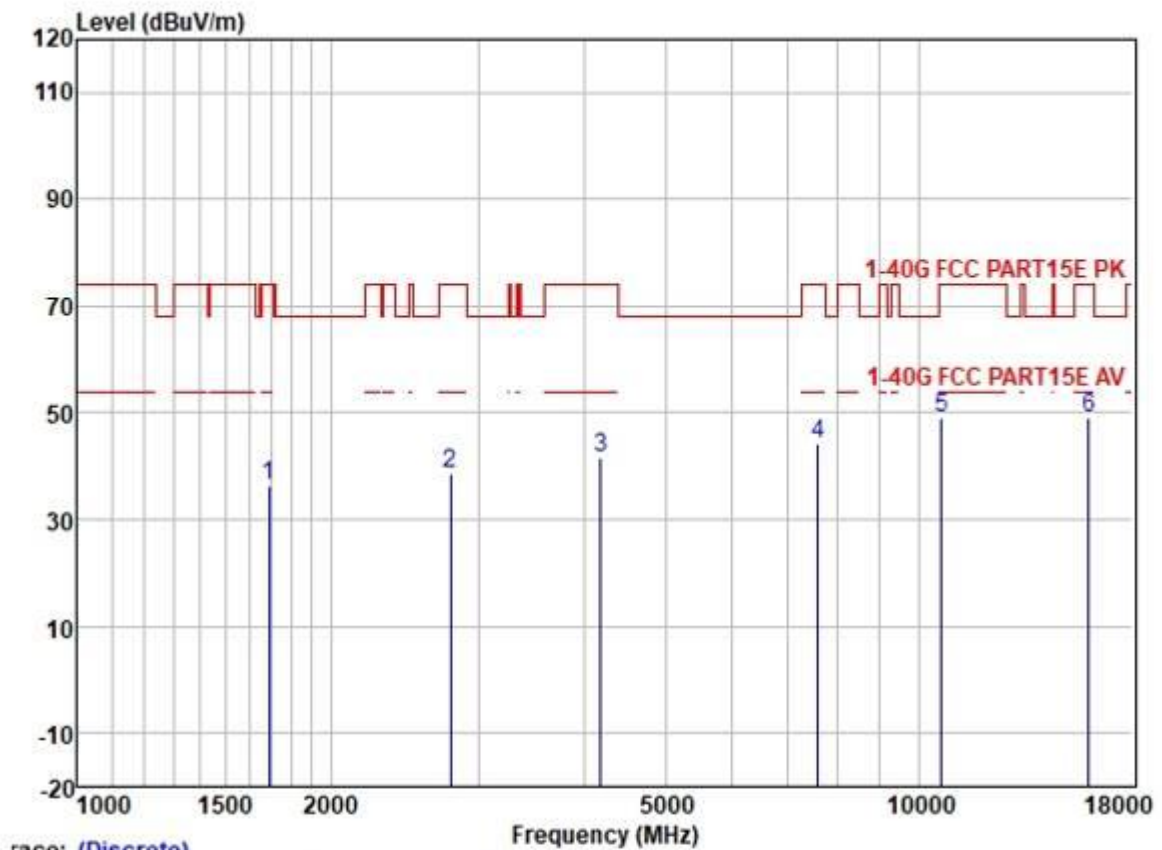

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1692.231	45.59	25.70	2.80	37.89	36.20	74.00	-37.80	VERTICAL	Peak
2	2774.030	44.13	28.08	3.68	37.43	38.46	74.00	-35.54	VERTICAL	Peak
3	4193.872	43.79	30.15	4.60	36.81	41.73	74.00	-32.27	VERTICAL	Peak
4	7584.833	38.96	36.47	6.24	37.51	44.16	74.00	-29.84	VERTICAL	Peak
5	10640.150	39.43	39.63	7.48	37.33	49.21	74.00	-24.79	VERTICAL	Peak
6	15960.560	36.28	38.37	9.85	35.40	49.10	74.00	-24.90	VERTICAL	Peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

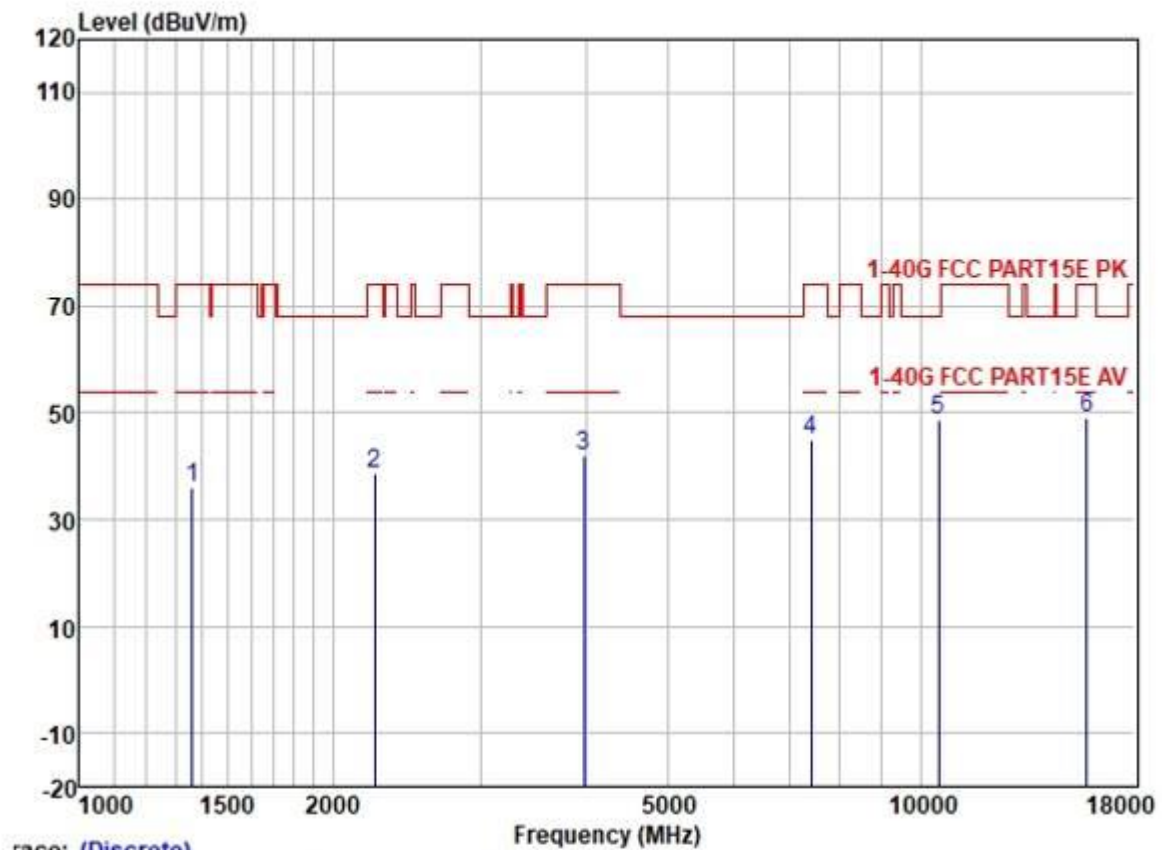

race: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1362.430	46.45	25.33	2.60	38.27	36.11	74.00	-37.89	VERTICAL	Peak
2	2246.344	46.10	26.88	3.25	37.64	38.59	74.00	-35.41	VERTICAL	Peak
3	3981.257	44.29	29.78	4.60	36.81	41.86	74.00	-32.14	VERTICAL	Peak
4	7411.461	39.83	36.22	6.20	37.46	44.79	74.00	-29.21	VERTICAL	Peak
5	10520.070	39.25	39.50	7.42	37.35	48.82	68.20	-19.38	VERTICAL	Peak
6	15780.560	35.80	38.70	9.86	35.39	48.97	74.00	-25.03	VERTICAL	Peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

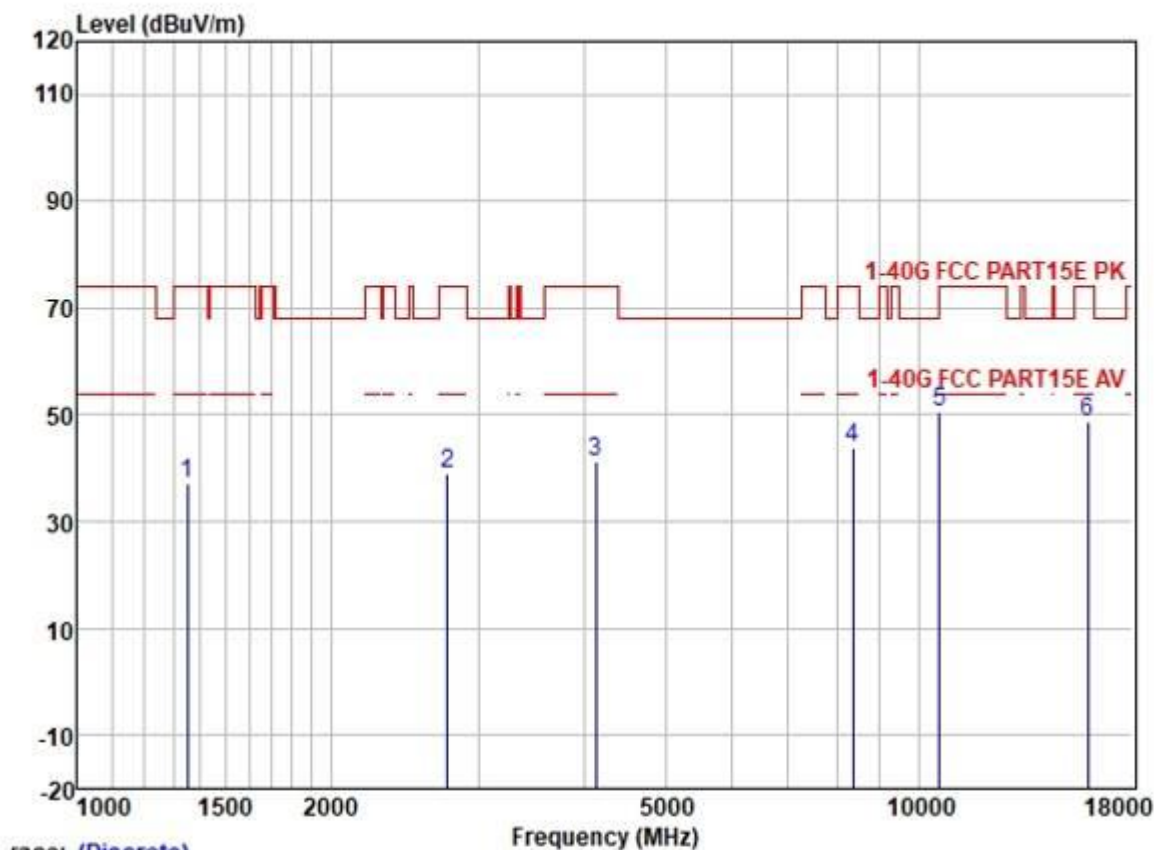

race: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1350.667	47.37	25.31	2.60	38.27	37.01	74.00	-36.99	VERTICAL	Peak
2	2750.080	44.74	28.01	3.65	37.44	38.96	74.00	-35.04	VERTICAL	Peak
3	4133.699	43.38	30.01	4.60	36.80	41.19	74.00	-32.81	VERTICAL	Peak
4	8343.918	37.70	37.05	6.56	37.58	43.73	74.00	-30.27	VERTICAL	Peak
5	10600.910	40.81	39.59	7.46	37.34	50.52	74.00	-23.48	VERTICAL	Peak
6	15900.640	35.63	38.44	9.86	35.40	48.53	74.00	-25.47	VERTICAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

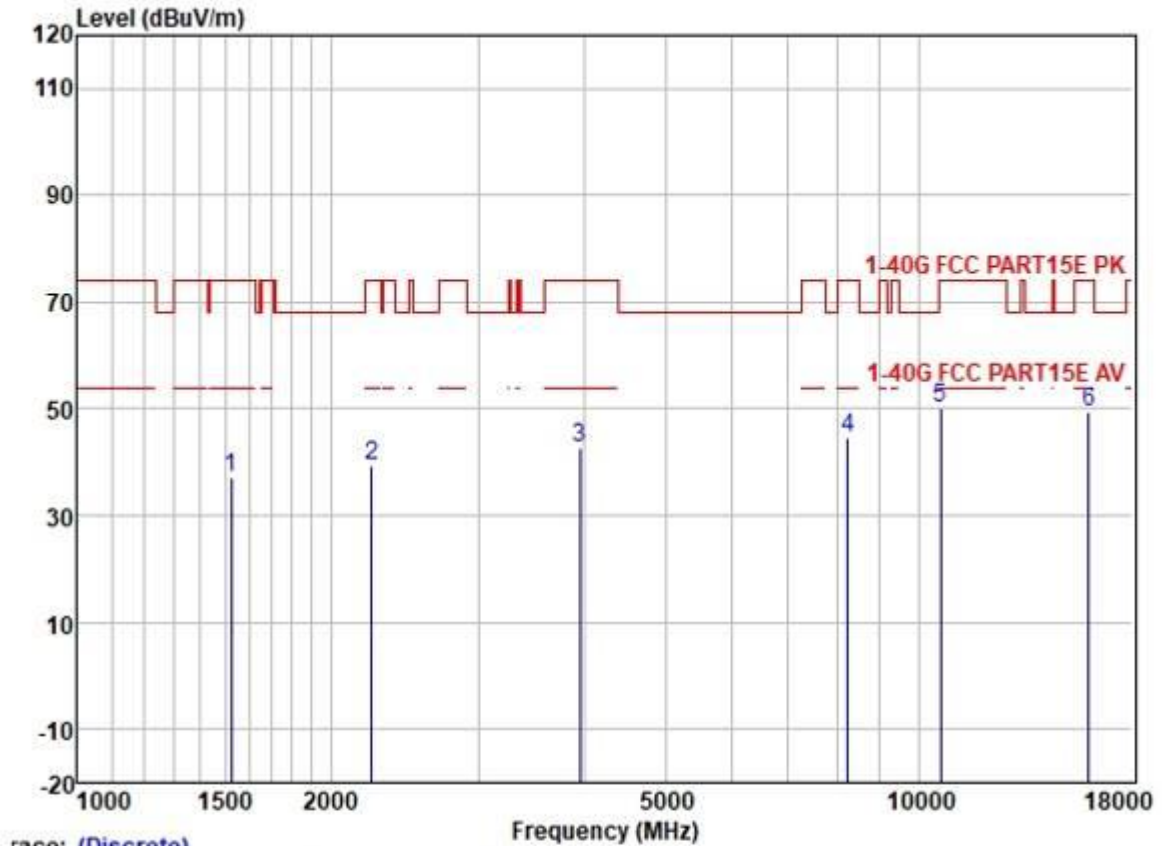


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1525.000	46.83	25.52	2.80	38.07	37.08	74.00	-36.92	VERTICAL	Peak
2	2239.861	46.88	26.84	3.24	37.64	39.32	74.00	-34.68	VERTICAL	Peak
3	3958.309	45.33	29.75	4.60	36.81	42.87	74.00	-31.13	VERTICAL	Peak
4	8248.005	38.58	37.00	6.43	37.59	44.42	74.00	-29.58	VERTICAL	Peak
5	10620.330	40.56	39.59	7.46	37.34	50.27	74.00	-23.73	VERTICAL	Peak
6	15930.210	36.48	38.37	9.85	35.40	49.30	74.00	-24.70	VERTICAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

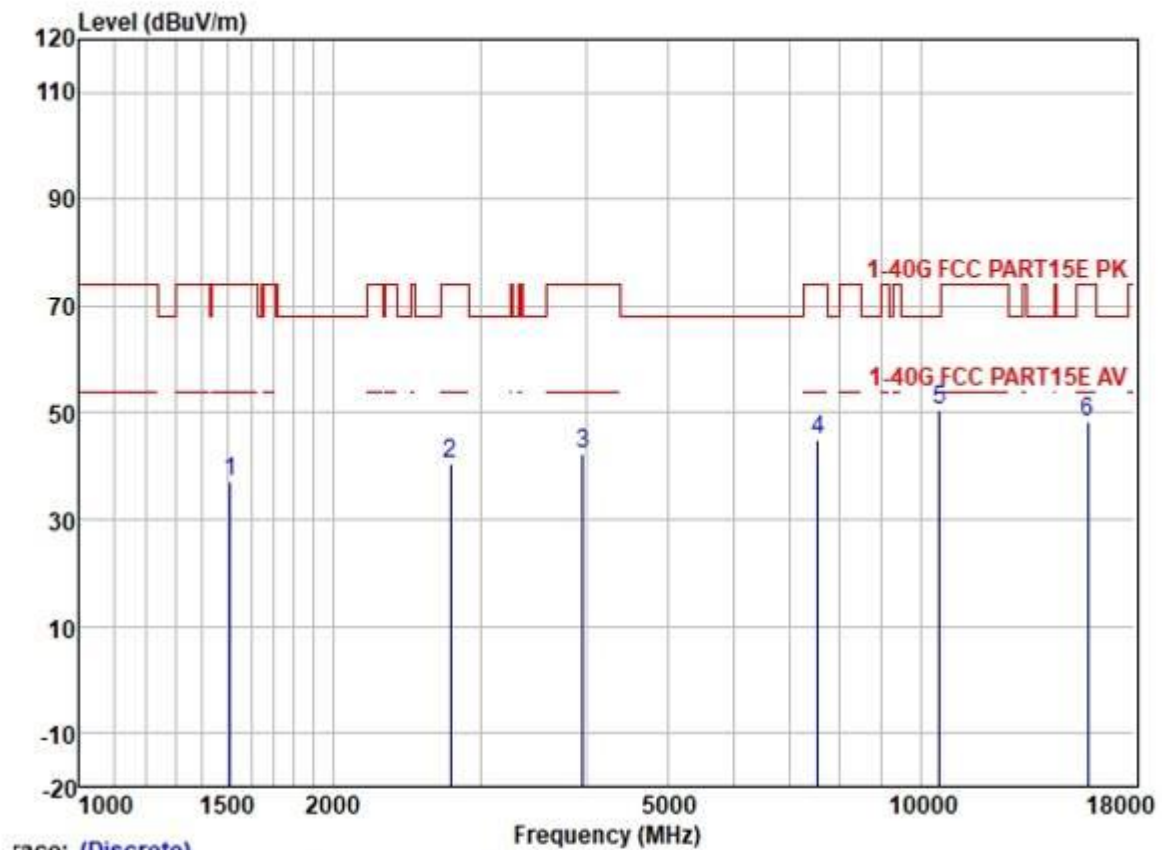

		ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1511.833	46.94	25.51	2.80	38.10	37.15	74.00	-36.85	VERTICAL	Peak
2	2758.041	46.22	28.03	3.66	37.44	40.47	74.00	-33.53	VERTICAL	Peak
3	3969.767	44.68	29.77	4.60	36.81	42.24	74.00	-31.76	VERTICAL	Peak
4	7562.942	39.90	36.45	6.25	37.51	45.09	74.00	-28.91	VERTICAL	Peak
5	10540.540	40.97	39.53	7.43	37.35	50.58	68.20	-17.62	VERTICAL	Peak
6	15810.140	35.31	38.61	9.86	35.39	48.39	74.00	-25.61	VERTICAL	Peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

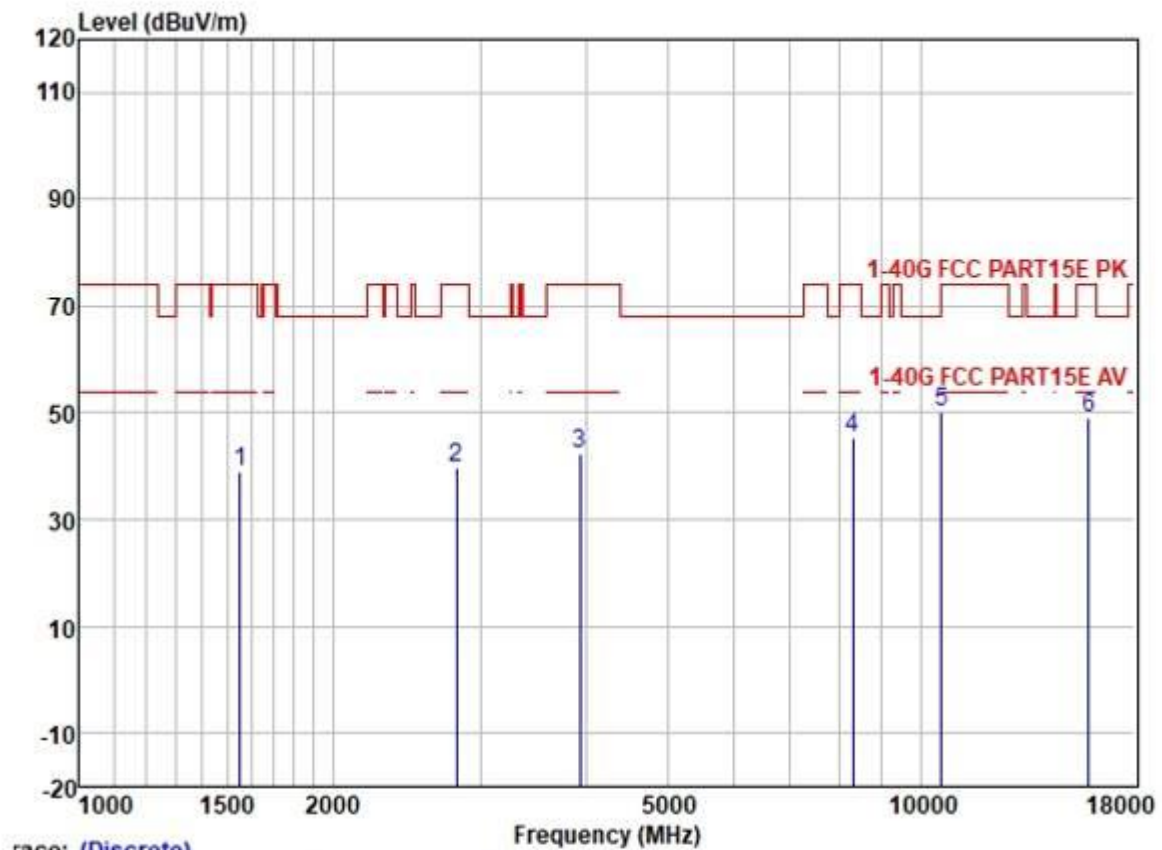

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1551.677	48.53	25.54	2.80	38.03	38.84	74.00	-35.16	VERTICAL	Peak
2	2806.288	45.17	28.15	3.70	37.41	39.61	74.00	-34.39	VERTICAL	Peak
3	3935.493	44.78	29.73	4.60	36.82	42.29	74.00	-31.71	VERTICAL	Peak
4	8319.836	39.51	37.03	6.53	37.58	45.49	74.00	-28.51	VERTICAL	Peak
5	10580.870	40.66	39.56	7.45	37.34	50.33	68.20	-17.87	VERTICAL	Peak
6	15870.050	36.06	38.52	9.86	35.40	49.04	74.00	-24.96	VERTICAL	Peak

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

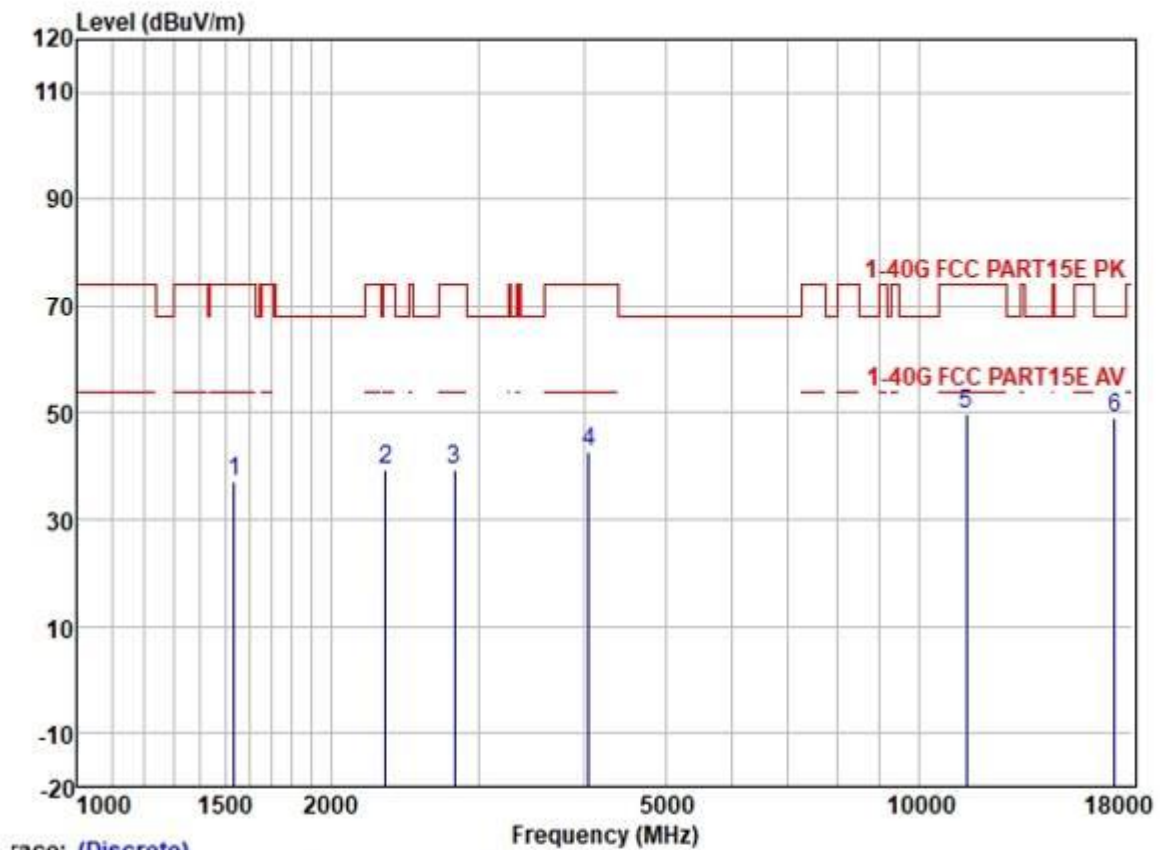

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1538.281	46.79	25.53	2.80	38.03	37.09	74.00	-36.91	HORIZONTAL Peak
2	2325.624	46.44	27.19	3.34	37.62	39.35	74.00	-34.65	HORIZONTAL Peak
3	2806.288	44.94	28.15	3.70	37.41	39.38	74.00	-34.62	HORIZONTAL Peak
4	4050.904	44.97	29.87	4.60	36.80	42.64	74.00	-31.36	HORIZONTAL Peak
5	11400.420	38.58	39.94	8.28	37.16	49.64	74.00	-24.36	HORIZONTAL Peak
6	17100.560	32.55	42.32	9.63	35.34	49.16	68.20	-19.04	HORIZONTAL Peak


Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

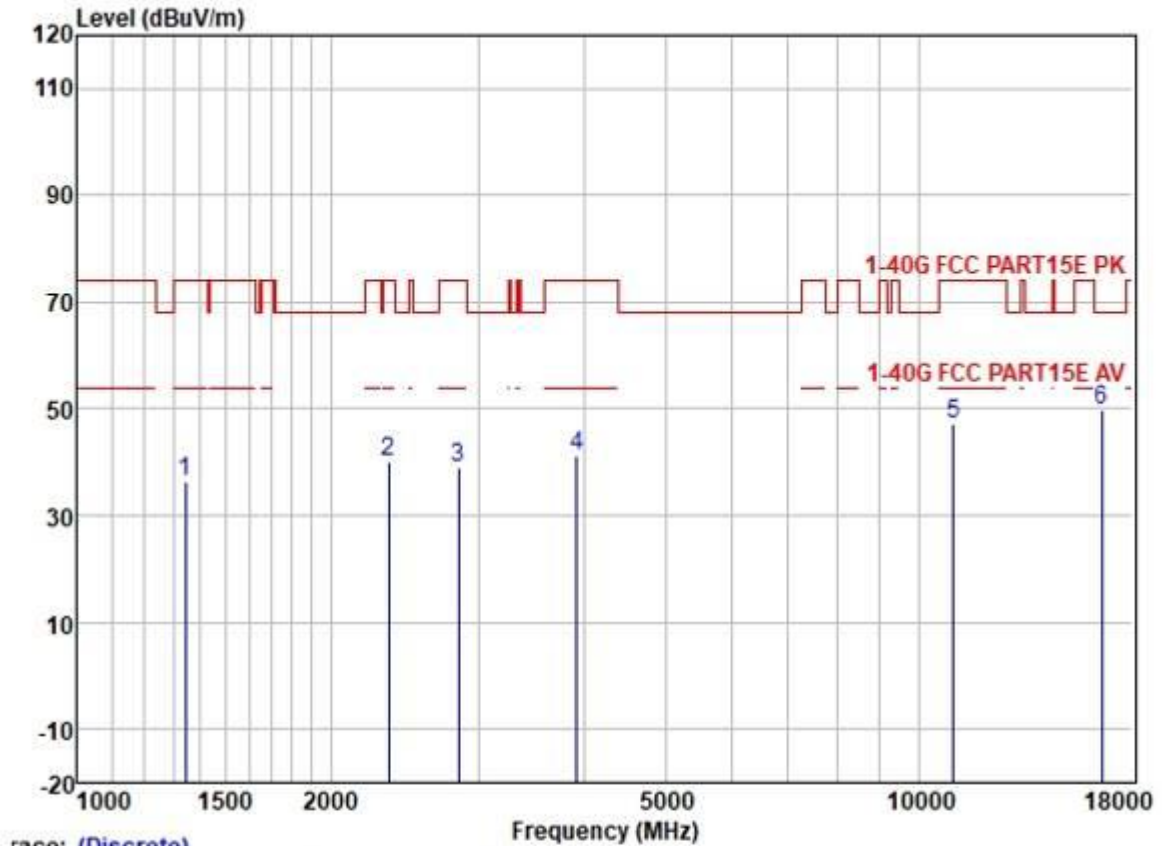

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1342.882	46.66	25.30	2.60	38.27	36.29	74.00	-37.71	HORIZONTAL Peak
2	2345.878	47.27	27.24	3.38	37.61	40.28	74.00	-33.72	HORIZONTAL Peak
3	2838.921	44.50	28.21	3.70	37.38	39.03	74.00	-34.97	HORIZONTAL Peak
4	3924.135	43.70	29.72	4.60	36.82	41.20	74.00	-32.80	HORIZONTAL Peak
5	11000.200	36.49	40.10	7.71	37.25	47.05	74.00	-26.95	HORIZONTAL Peak
6	16500.160	35.99	39.60	9.44	35.38	49.65	68.20	-18.55	HORIZONTAL Peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

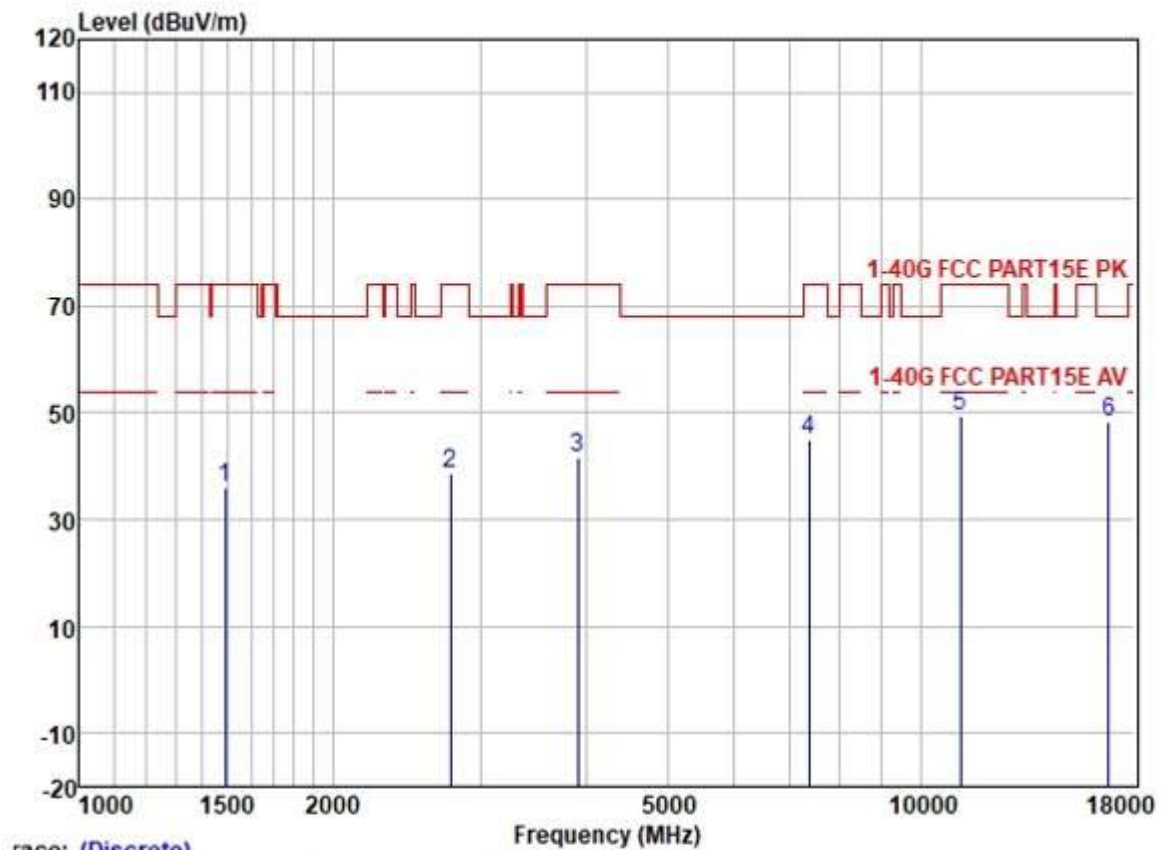

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1490.142	45.72	25.49	2.79	38.10	35.90	74.00	-38.10	HORIZONTAL	Peak
2	2758.041	44.48	28.03	3.66	37.44	38.73	74.00	-35.27	HORIZONTAL	Peak
3	3912.809	44.27	29.70	4.60	36.82	41.75	74.00	-32.25	HORIZONTAL	Peak
4	7368.741	40.17	36.12	6.17	37.45	45.01	74.00	-28.99	HORIZONTAL	Peak
5	11160.480	38.64	40.04	7.90	37.21	49.37	74.00	-24.63	HORIZONTAL	Peak
6	16740.730	33.66	40.49	9.41	35.37	48.19	68.20	-20.01	HORIZONTAL	Peak


Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

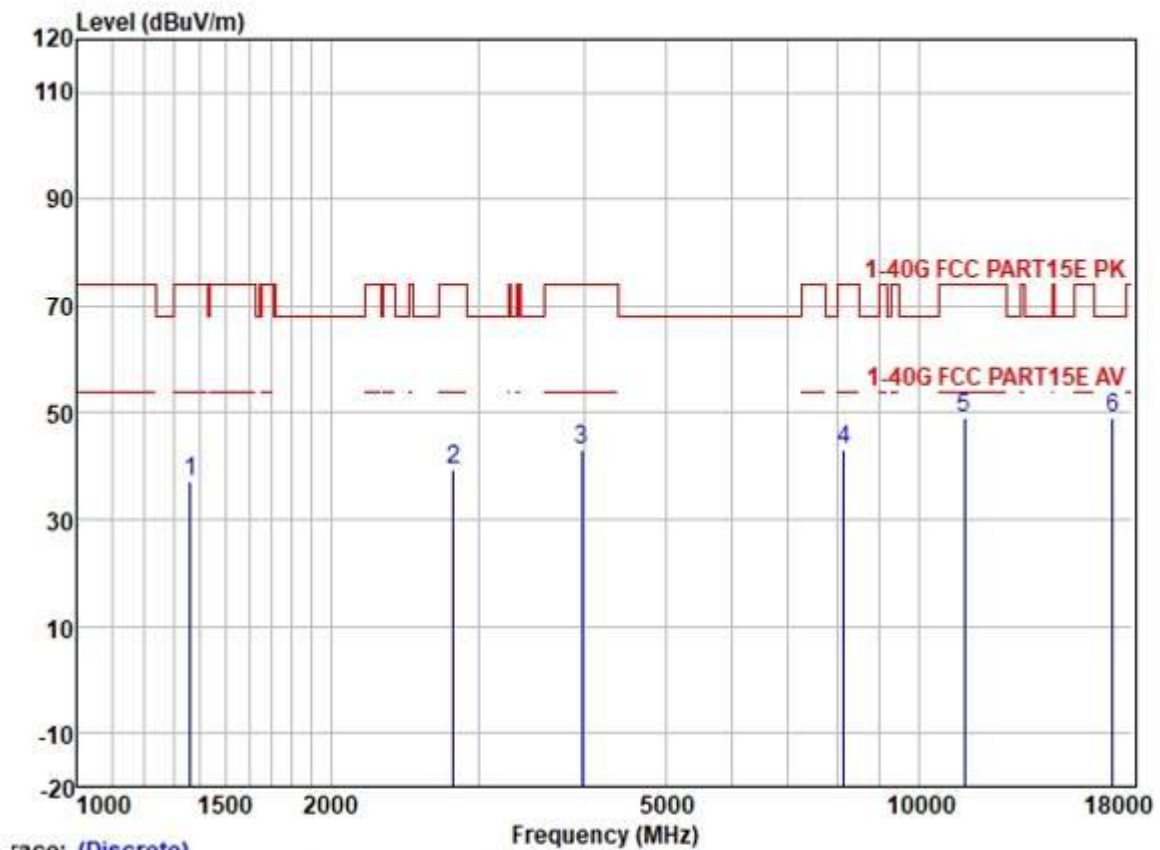

race: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1362.430	47.35	25.33	2.60	38.27	37.01	74.00	-36.99	HORIZONTAL	Peak
2	2798.189	44.95	28.13	3.70	37.41	39.37	74.00	-34.63	HORIZONTAL	Peak
3	3981.257	45.56	29.78	4.60	36.81	43.13	74.00	-30.87	HORIZONTAL	Peak
4	8153.195	37.50	36.96	6.30	37.59	43.17	74.00	-30.83	HORIZONTAL	Peak
5	11340.950	37.91	39.97	8.18	37.17	48.89	74.00	-25.11	HORIZONTAL	Peak
6	17010.560	33.37	41.75	9.39	35.35	49.16	68.20	-19.04	HORIZONTAL	Peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

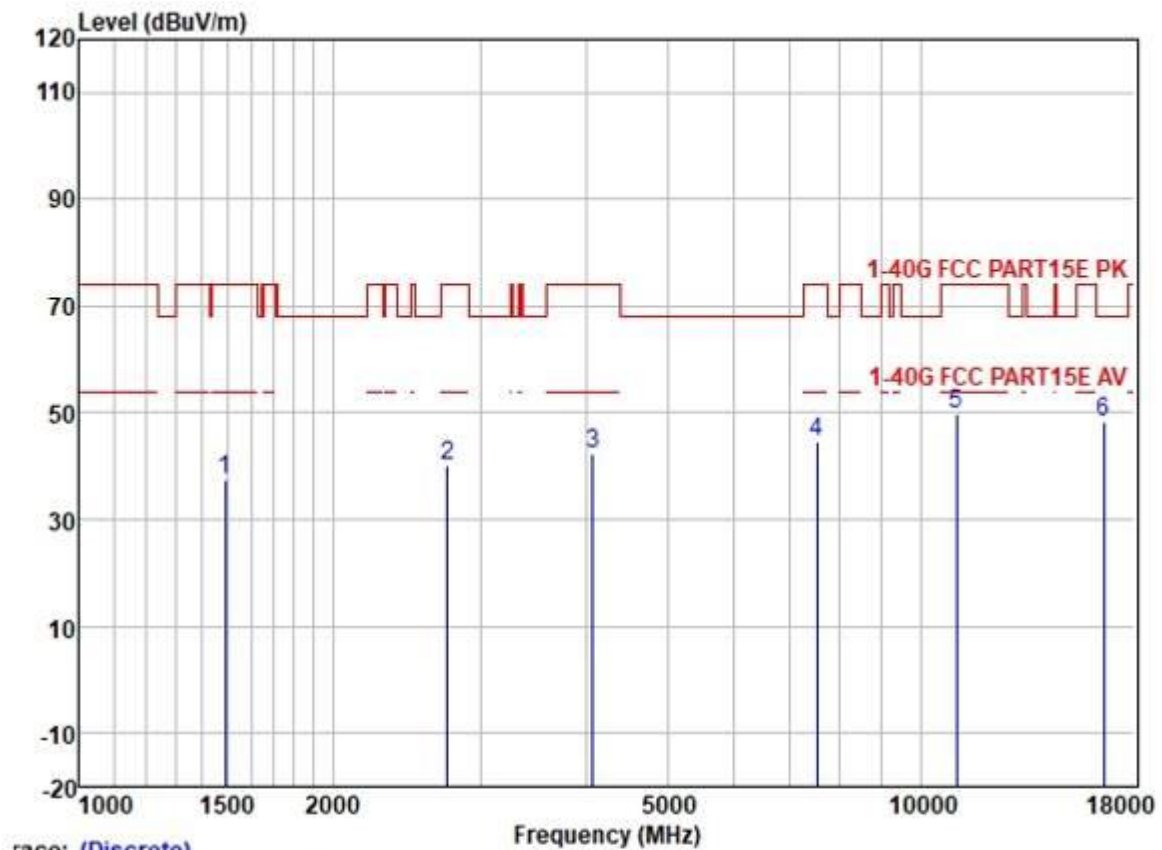

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1490.142	47.35	25.49	2.79	38.10	37.53	74.00	-36.47	HORIZONTAL	Peak
2	2742.143	45.87	27.98	3.64	37.44	40.05	74.00	-33.95	HORIZONTAL	Peak
3	4074.388	44.71	29.90	4.60	36.80	42.41	74.00	-31.59	HORIZONTAL	Peak
4	7541.114	39.58	36.43	6.25	37.50	44.76	74.00	-29.24	HORIZONTAL	Peak
5	11020.870	39.06	40.10	7.71	37.24	49.63	74.00	-24.37	HORIZONTAL	Peak
6	16530.660	34.35	39.76	9.44	35.38	48.17	68.20	-20.03	HORIZONTAL	Peak


Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

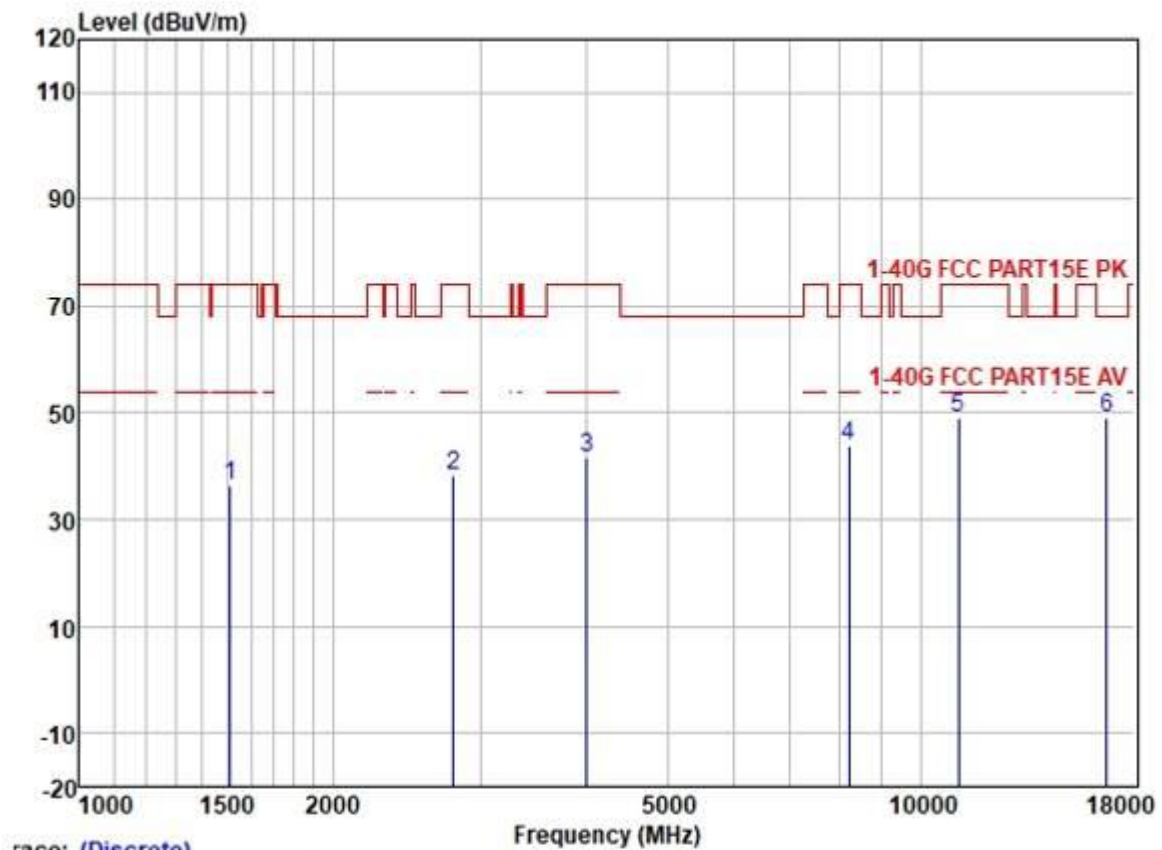

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1511.833	46.19	25.51	2.80	38.10	36.40	74.00	-37.60	HORIZONTAL Peak
2	2782.060	43.99	28.10	3.69	37.43	38.35	74.00	-35.65	HORIZONTAL Peak
3	4015.929	43.99	29.82	4.60	36.80	41.61	74.00	-32.39	HORIZONTAL Peak
4	8224.200	37.99	36.99	6.39	37.59	43.78	74.00	-30.22	HORIZONTAL Peak
5	11100.420	38.30	40.07	7.82	37.22	48.97	74.00	-25.03	HORIZONTAL Peak
6	16650.880	34.87	40.10	9.43	35.38	49.02	68.20	-19.18	HORIZONTAL Peak


Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

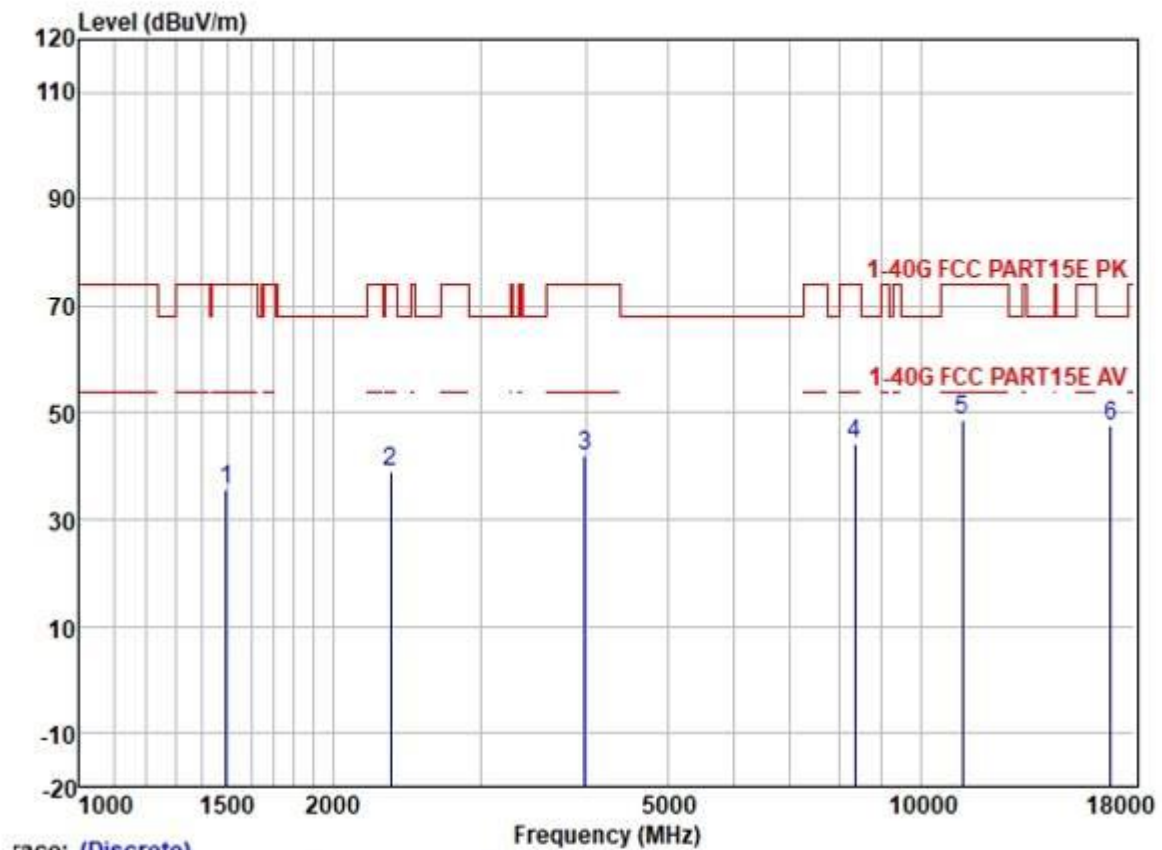

race: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1494.455	45.50	25.50	2.79	38.10	35.69	74.00	-38.31	HORIZONTAL	Peak
2	2345.878	46.00	27.24	3.38	37.61	39.01	74.00	-34.99	HORIZONTAL	Peak
3	3992.781	44.37	29.79	4.60	36.80	41.96	74.00	-32.04	HORIZONTAL	Peak
4	8343.918	38.26	37.05	6.56	37.58	44.29	74.00	-29.71	HORIZONTAL	Peak
5	11220.520	37.87	40.03	7.95	37.19	48.66	74.00	-25.34	HORIZONTAL	Peak
6	16830.050	32.78	40.94	9.40	35.37	47.75	68.20	-20.45	HORIZONTAL	Peak

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: Low

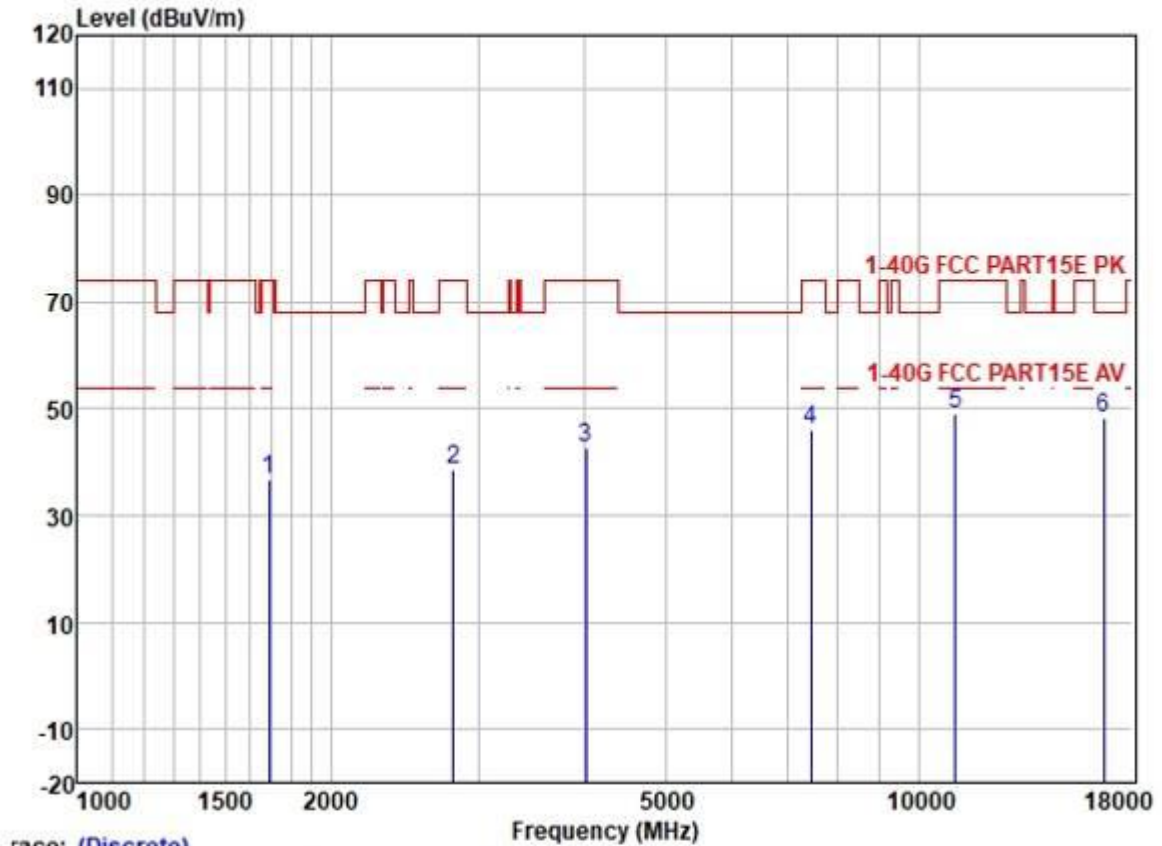


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1692.231	46.19	25.70	2.80	37.89	36.80	74.00	-37.20	HORIZONTAL	Peak
2	2798.189	44.28	28.13	3.70	37.41	38.70	74.00	-35.30	HORIZONTAL	Peak
3	4027.554	44.96	29.83	4.60	36.80	42.59	74.00	-31.41	HORIZONTAL	Peak
4	7454.429	41.10	36.32	6.23	37.47	46.18	74.00	-27.82	HORIZONTAL	Peak
5	11060.610	38.28	40.08	7.78	37.23	48.91	74.00	-25.09	HORIZONTAL	Peak
6	16590.410	34.28	39.93	9.43	35.38	48.26	68.20	-19.94	HORIZONTAL	Peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

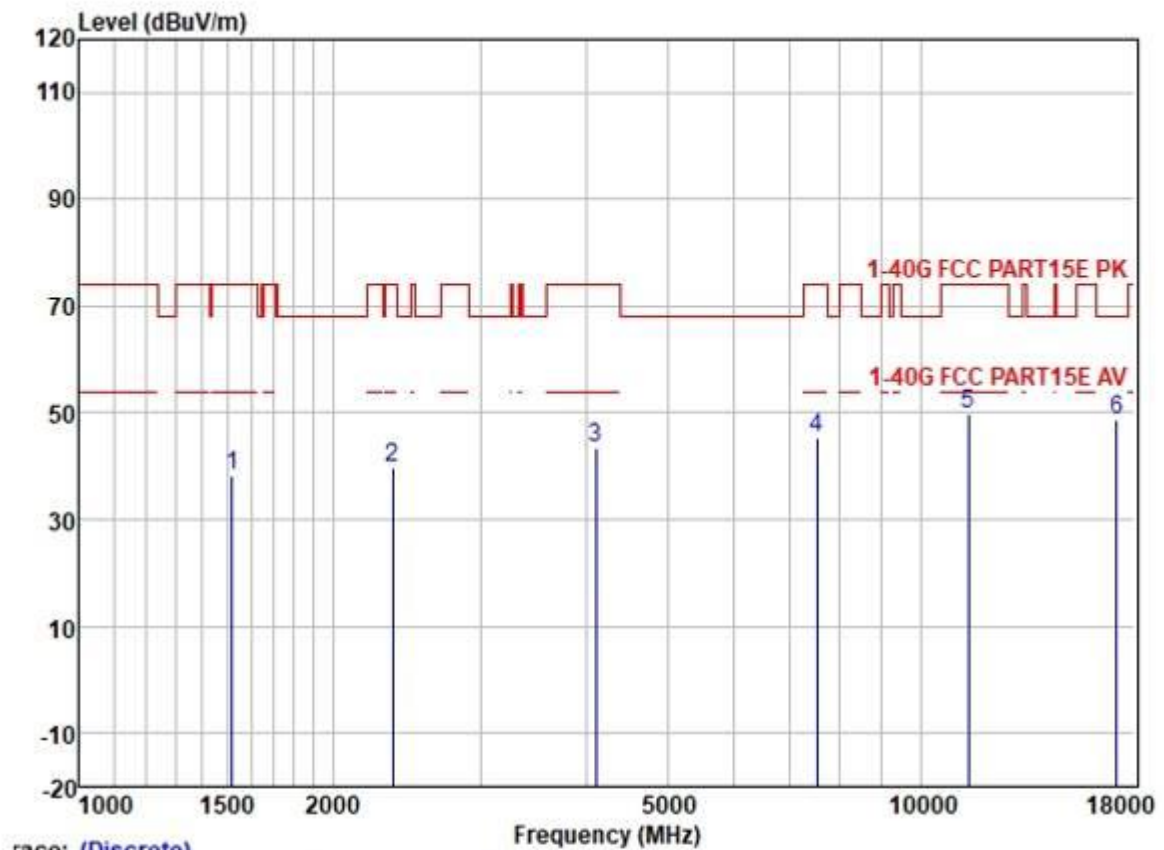


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1520.598	47.82	25.51	2.80	38.07	38.06	74.00	-35.94	VERTICAL	Peak
2	2359.478	46.69	27.27	3.42	37.61	39.77	74.00	-34.23	VERTICAL	Peak
3	4109.872	45.53	29.96	4.60	36.80	43.29	74.00	-30.71	VERTICAL	Peak
4	7541.114	40.07	36.43	6.25	37.50	45.25	74.00	-28.75	VERTICAL	Peak
5	11400.350	38.91	39.94	8.28	37.16	49.97	74.00	-24.03	VERTICAL	Peak
6	17100.660	31.91	42.32	9.63	35.34	48.52	68.20	-19.68	VERTICAL	Peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

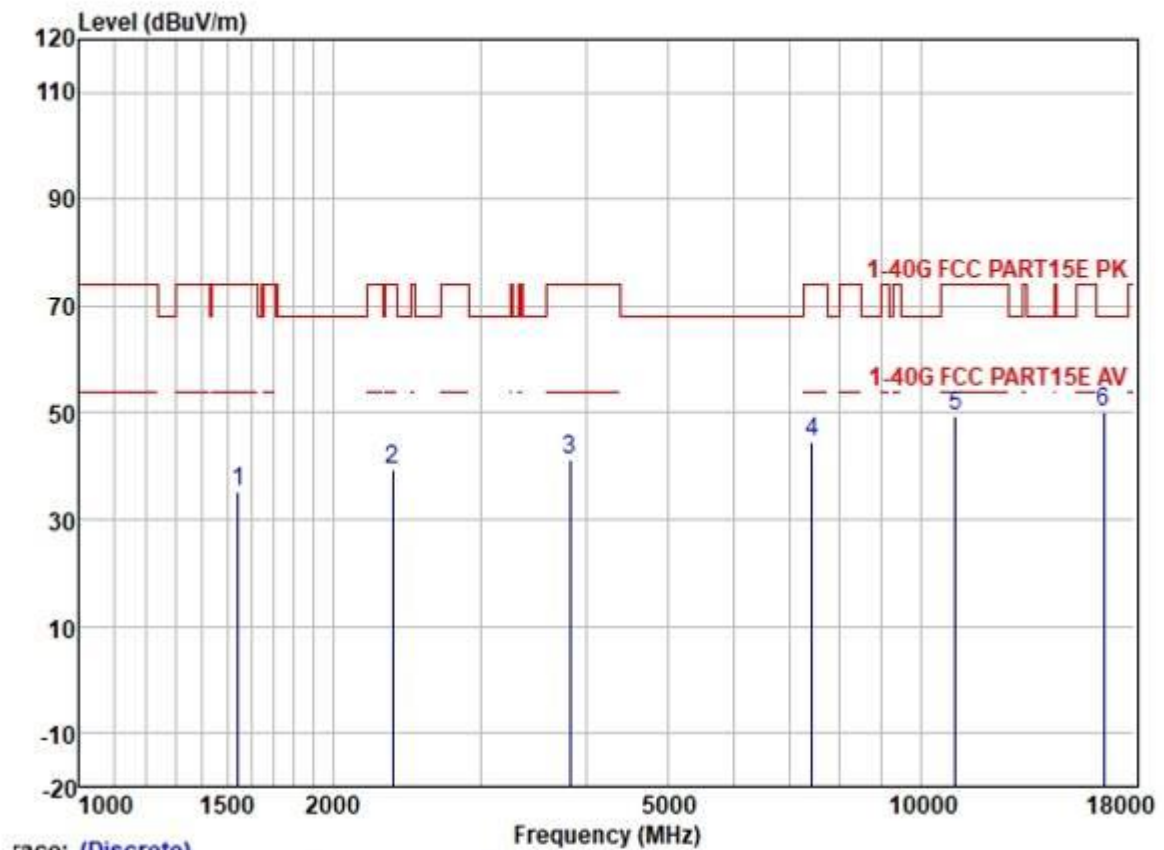

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1542.733	44.97	25.53	2.80	38.03	35.27	74.00	-38.73	VERTICAL	Peak
2	2359.478	46.42	27.27	3.42	37.61	39.50	74.00	-34.50	VERTICAL	Peak
3	3834.438	43.80	29.59	4.60	36.84	41.15	74.00	-32.85	VERTICAL	Peak
4	7432.914	39.73	36.27	6.22	37.47	44.75	74.00	-29.25	VERTICAL	Peak
5	11000.350	38.88	40.10	7.71	37.25	49.44	74.00	-24.56	VERTICAL	Peak
6	16500.390	36.57	39.60	9.44	35.38	50.23	68.20	-17.97	VERTICAL	Peak


Test Mode: 08; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: middle

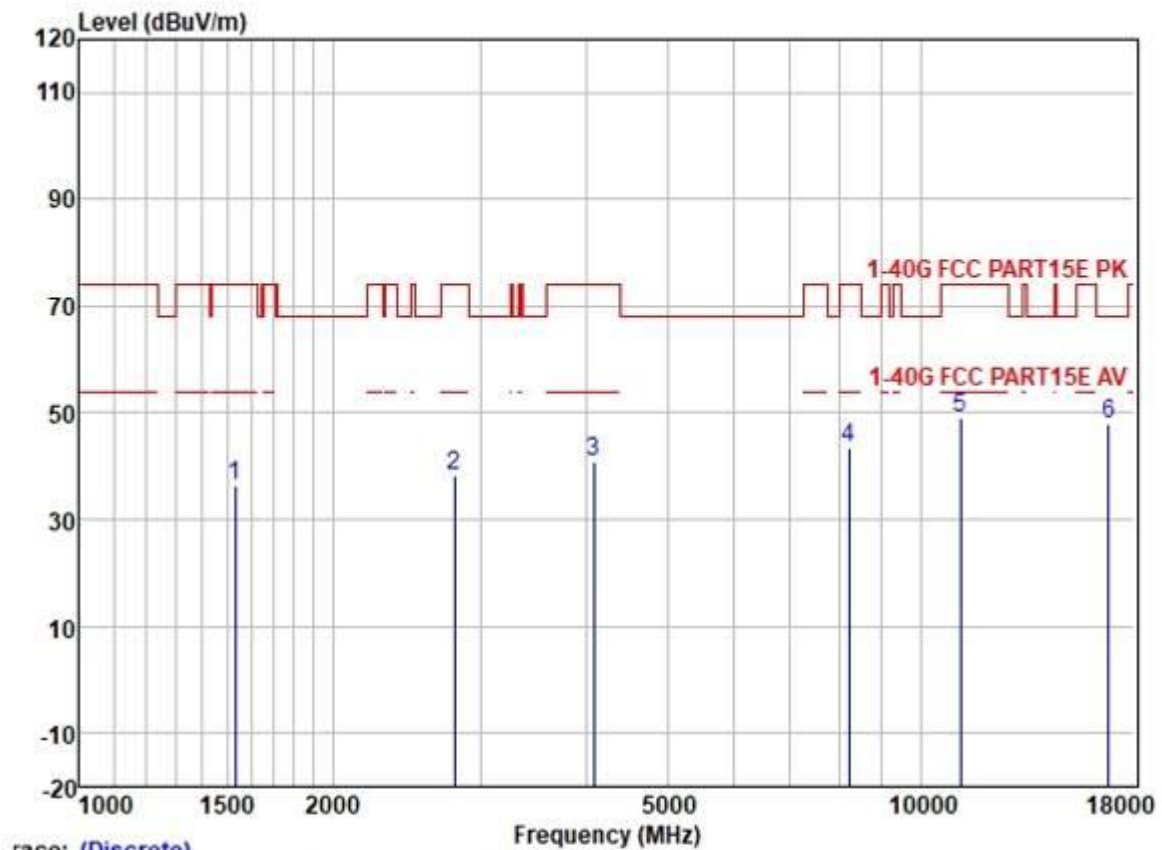

race: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1533.841	46.29	25.52	2.80	38.07	36.54	74.00	-37.46	VERTICAL	Peak
2	2790.113	43.72	28.12	3.69	37.41	38.12	74.00	-35.88	VERTICAL	Peak
3	4086.182	42.99	29.92	4.60	36.80	40.71	74.00	-33.29	VERTICAL	Peak
4	8224.200	37.54	36.99	6.39	37.59	43.33	74.00	-30.67	VERTICAL	Peak
5	11160.860	38.29	40.04	7.90	37.21	49.02	74.00	-24.98	VERTICAL	Peak
6	16740.410	33.37	40.49	9.41	35.37	47.90	68.20	-20.30	VERTICAL	Peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

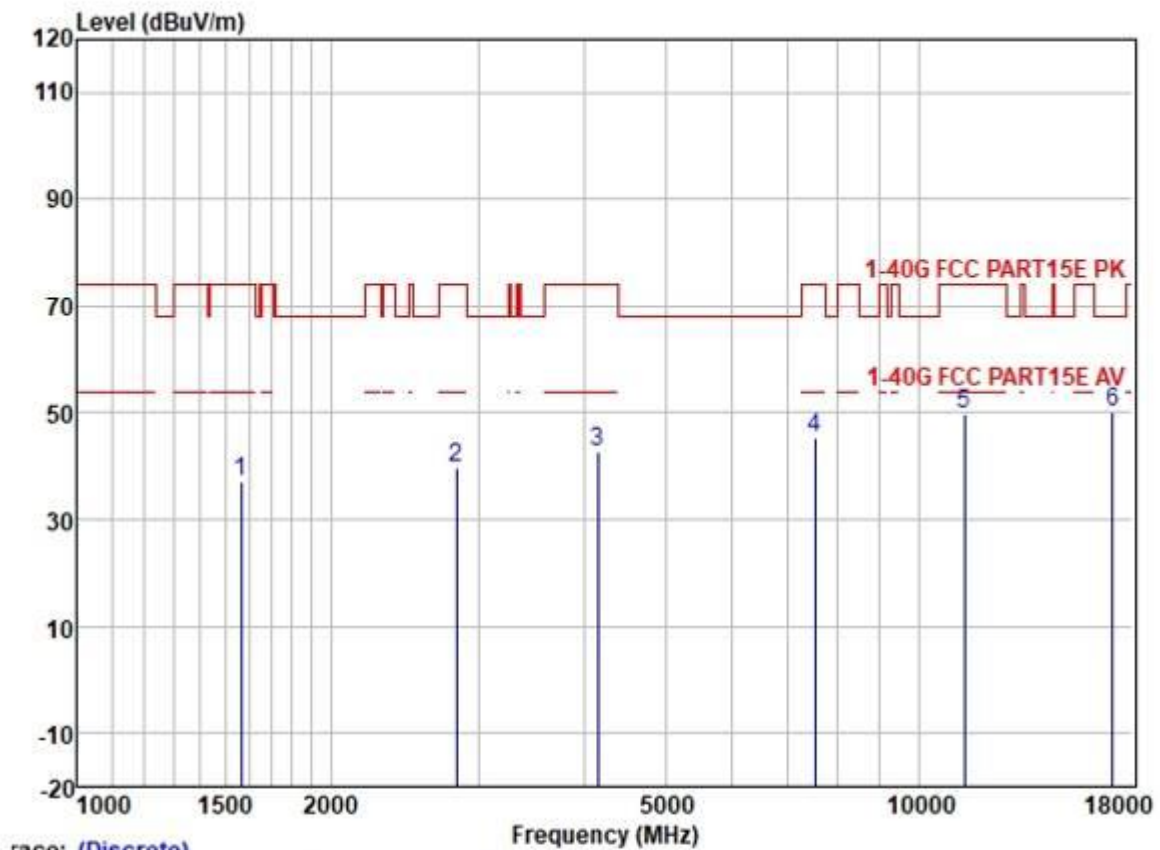


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1565.191	46.60	25.55	2.80	38.00	36.95	74.00	-37.05	VERTICAL Peak
2	2822.558	45.13	28.18	3.70	37.40	39.61	74.00	-34.39	VERTICAL Peak
3	4157.664	44.94	30.06	4.60	36.80	42.80	74.00	-31.20	VERTICAL Peak
4	7541.114	40.07	36.43	6.25	37.50	45.25	74.00	-28.75	VERTICAL Peak
5	11340.350	38.99	39.97	8.18	37.17	49.97	74.00	-24.03	VERTICAL Peak
6	17010.880	34.35	41.75	9.39	35.35	50.14	68.20	-18.06	VERTICAL Peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

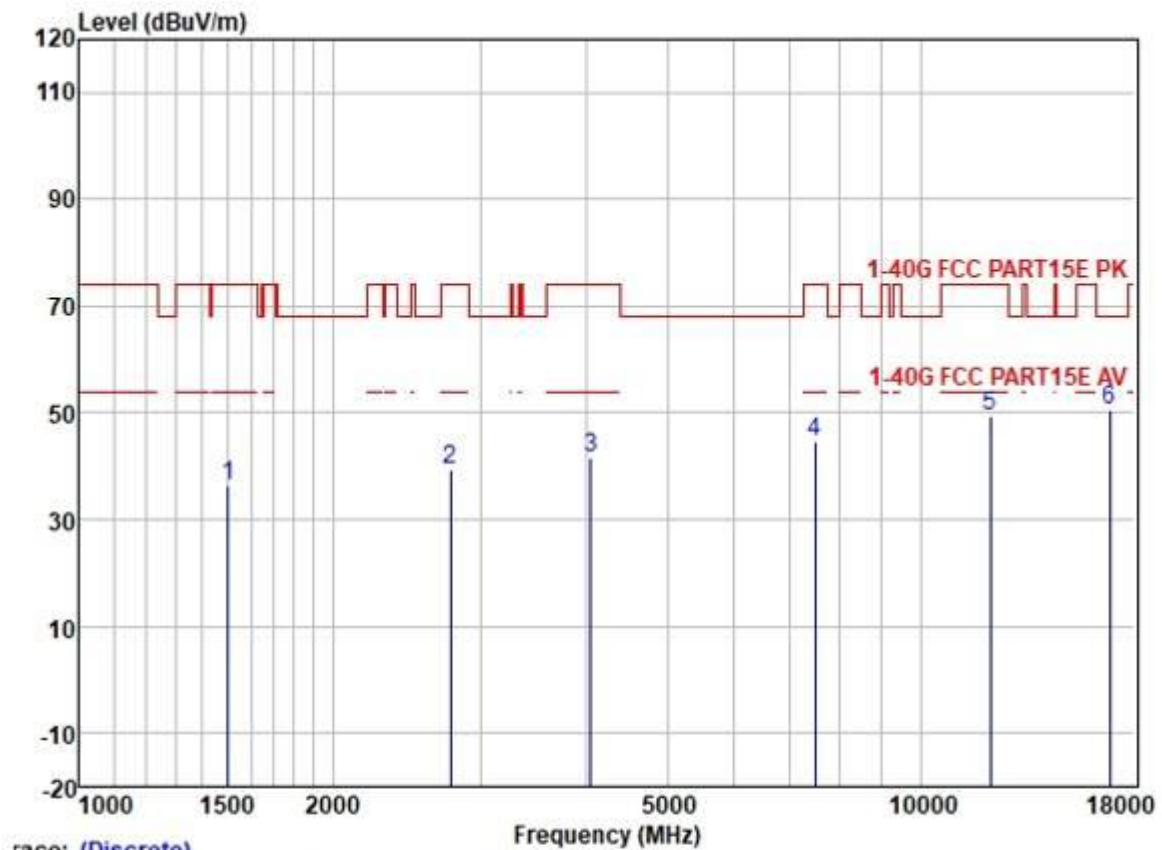


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1503.119	46.17	25.50	2.80	38.10	36.37	74.00	-37.63	VERTICAL Peak
2	2758.041	45.04	28.03	3.66	37.44	39.29	74.00	-34.71	VERTICAL Peak
3	4050.904	43.98	29.87	4.60	36.80	41.65	74.00	-32.35	VERTICAL Peak
4	7497.646	39.44	36.40	6.26	37.49	44.61	74.00	-29.39	VERTICAL Peak
5	12114.350	39.34	38.83	8.14	37.04	49.27	74.00	-24.73	VERTICAL Peak
6	16793.680	35.82	40.71	9.41	35.37	50.57	68.20	-17.63	VERTICAL Peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

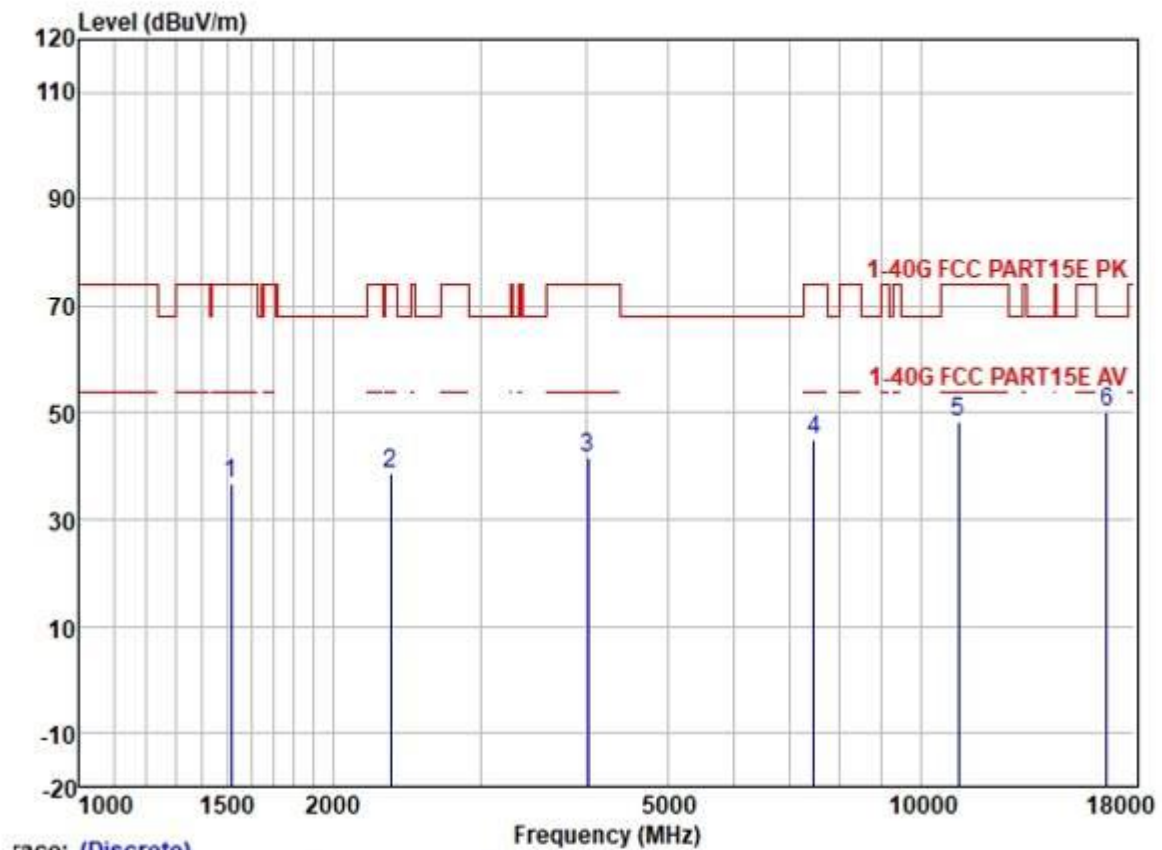


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1516.210	46.55	25.51	2.80	38.07	36.79	74.00	-37.21	VERTICAL	Peak
2	2345.878	45.51	27.24	3.38	37.61	38.52	74.00	-35.48	VERTICAL	Peak
3	4027.554	44.08	29.83	4.60	36.80	41.71	74.00	-32.29	VERTICAL	Peak
4	7476.006	39.76	36.36	6.25	37.48	44.89	74.00	-29.11	VERTICAL	Peak
5	11100.450	37.55	40.07	7.82	37.22	48.22	74.00	-25.78	VERTICAL	Peak
6	16650.040	35.88	40.10	9.43	35.38	50.03	68.20	-18.17	VERTICAL	Peak

Test Mode: 08; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: High

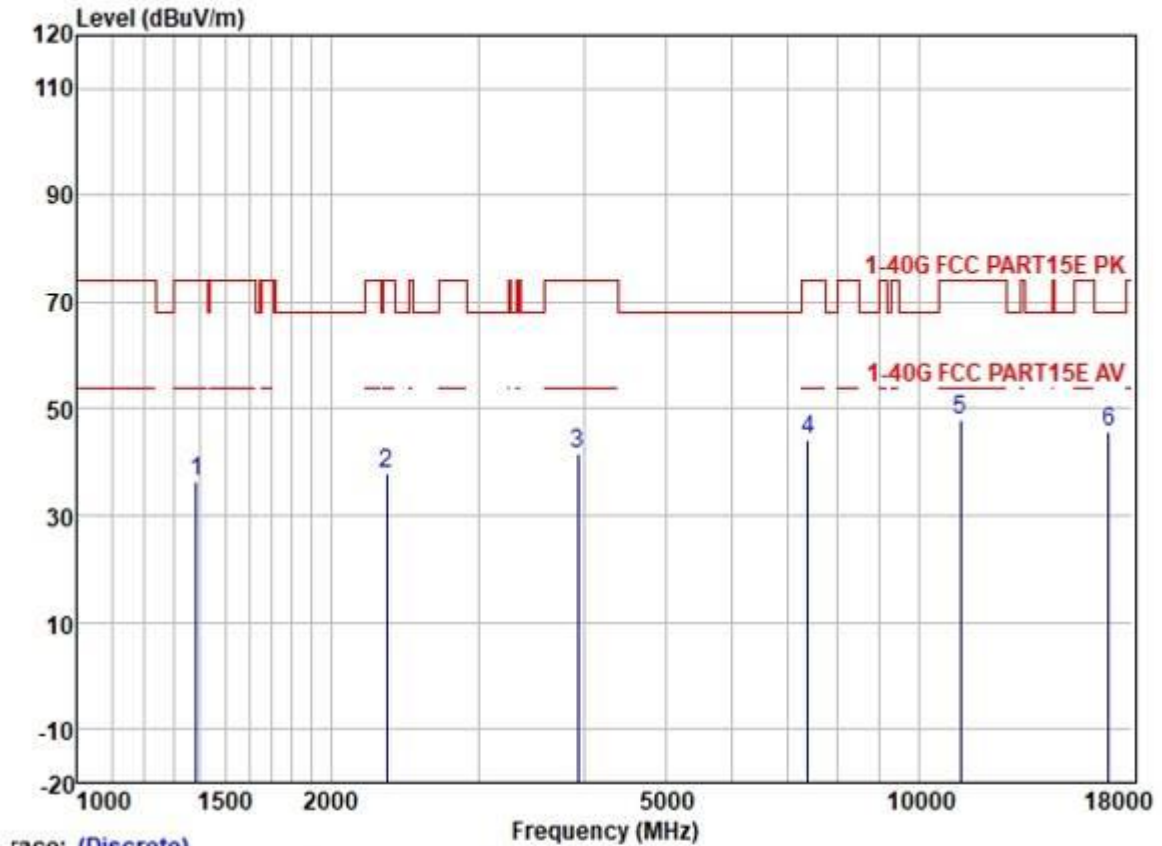

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1386.264	46.75	25.37	2.60	38.25	36.47	74.00	-37.53	VERTICAL	Peak
2	2332.356	44.98	27.20	3.36	37.62	37.92	74.00	-36.08	VERTICAL	Peak
3	3935.493	44.22	29.73	4.60	36.82	41.73	74.00	-32.27	VERTICAL	Peak
4	7390.070	39.50	36.17	6.19	37.46	44.40	74.00	-29.60	VERTICAL	Peak
5	11220.450	37.09	40.03	7.95	37.19	47.88	74.00	-26.12	VERTICAL	Peak
6	16830.290	30.78	40.94	9.40	35.37	45.75	68.20	-22.45	VERTICAL	Peak


Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

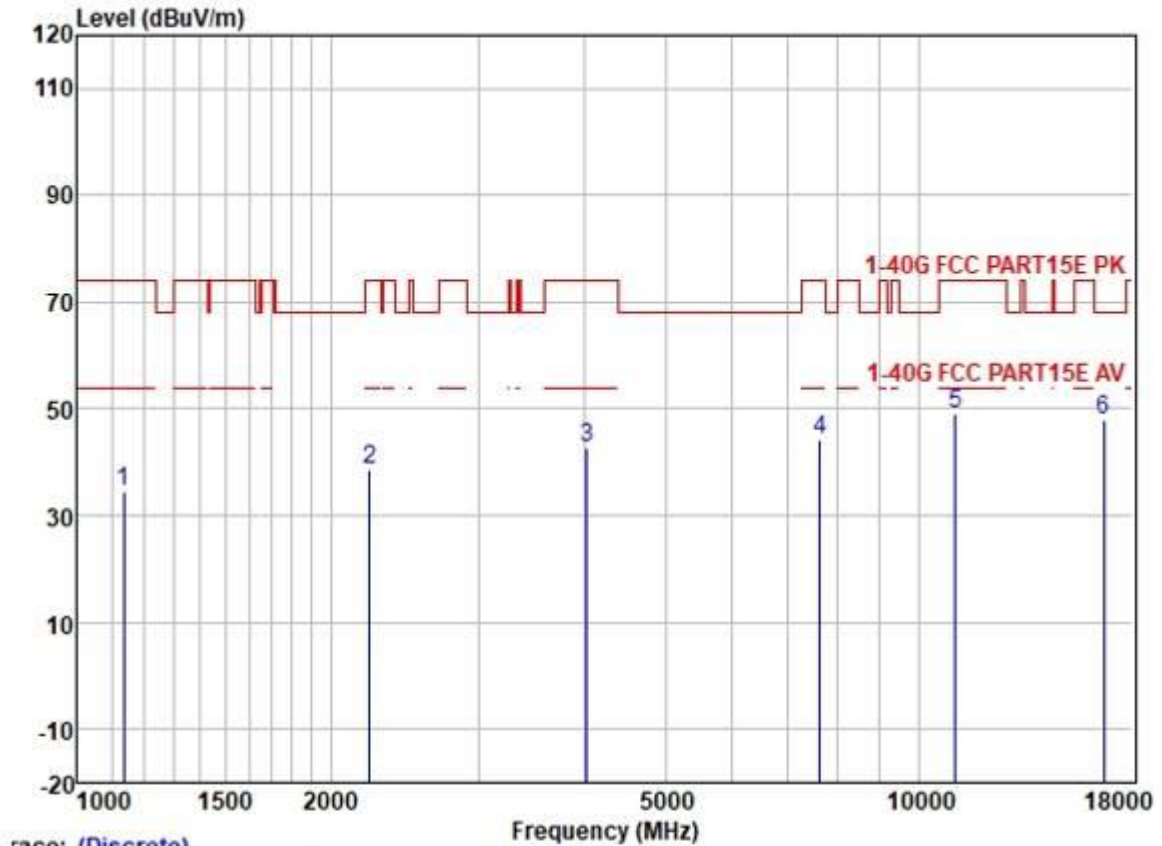

race: (Discrete)


		ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1135.617	46.38	24.45	2.25	38.43	34.65	74.00	-39.35	VERTICAL	Peak
2	2226.950	46.32	26.76	3.23	37.64	38.67	74.00	-35.33	VERTICAL	Peak
3	4039.212	45.04	29.85	4.60	36.80	42.69	74.00	-31.31	VERTICAL	Peak
4	7628.806	39.00	36.51	6.24	37.52	44.23	74.00	-29.77	VERTICAL	Peak
5	11060.270	38.35	40.08	7.78	37.23	48.98	74.00	-25.02	VERTICAL	Peak
6	16590.660	34.14	39.93	9.43	35.38	48.12	68.20	-20.08	VERTICAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

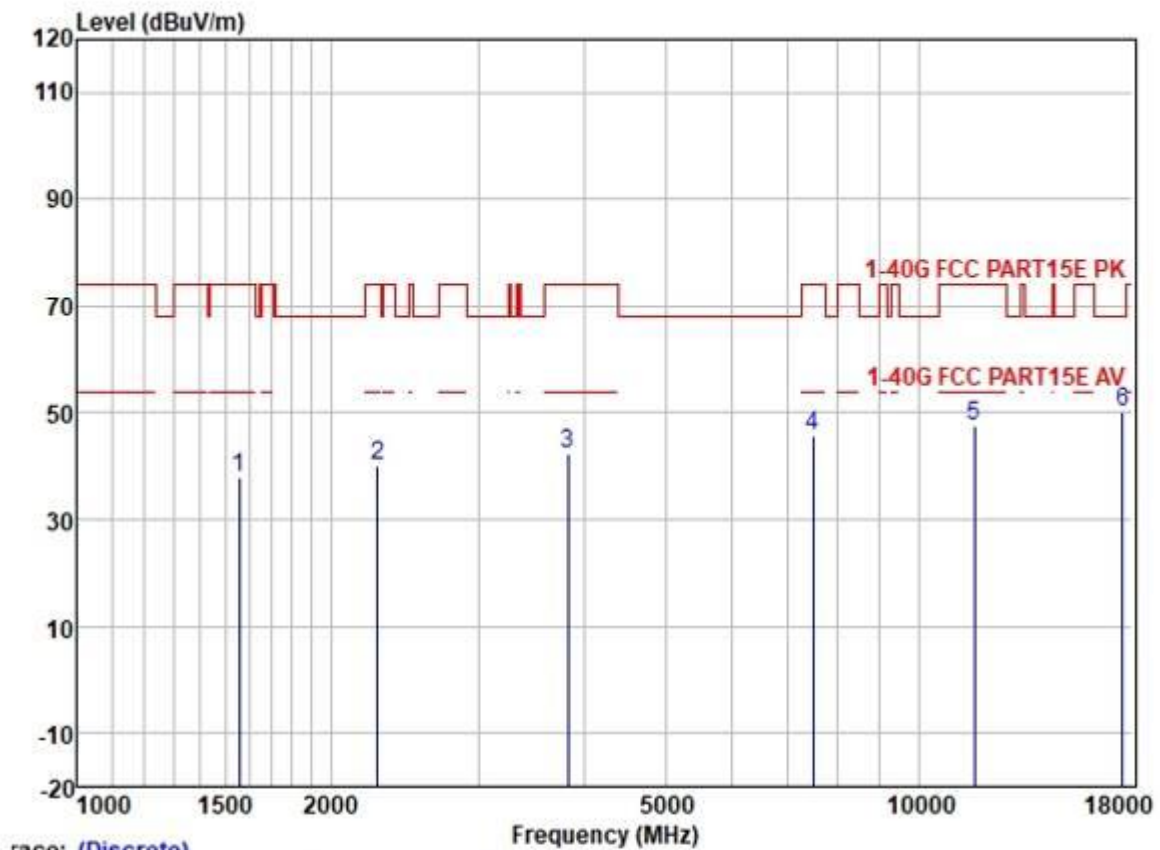

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1556.169	47.45	25.54	2.80	38.03	37.76	74.00	-36.24	HORIZONTAL Peak
2	2272.466	47.45	27.01	3.28	37.63	40.11	74.00	-33.89	HORIZONTAL Peak
3	3834.438	45.16	29.59	4.60	36.84	42.51	74.00	-31.49	HORIZONTAL Peak
4	7497.646	40.55	36.40	6.26	37.49	45.72	74.00	-28.28	HORIZONTAL Peak
5	11650.220	36.78	39.65	8.35	37.13	47.65	74.00	-26.35	HORIZONTAL Peak
6	17475.680	30.78	43.90	10.77	35.32	50.13	68.20	-18.07	HORIZONTAL Peak

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: Low

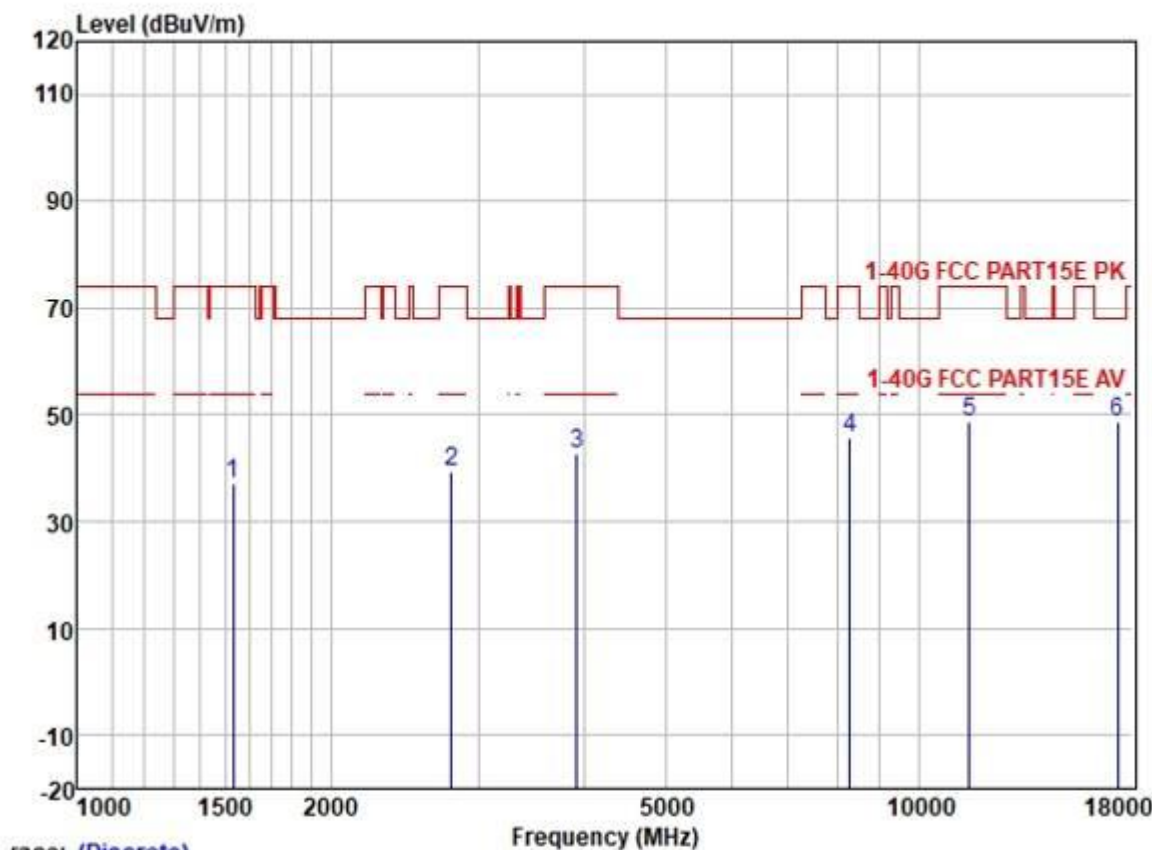

race: (Discrete)


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1533.841	46.72	25.52	2.80	38.07	36.97	74.00	-37.03	HORIZONTAL	Peak
2	2782.060	44.91	28.10	3.69	37.43	39.27	74.00	-34.73	HORIZONTAL	Peak
3	3924.135	45.29	29.72	4.60	36.82	42.79	74.00	-31.21	HORIZONTAL	Peak
4	8295.823	39.68	37.02	6.50	37.58	45.62	74.00	-28.38	HORIZONTAL	Peak
5	11490.710	37.53	39.90	8.41	37.15	48.69	74.00	-25.31	HORIZONTAL	Peak
6	17235.140	30.78	43.01	10.08	35.33	48.54	68.20	-19.66	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is deemed to have read, understood and accepted the Terms and Conditions of the Company's General Conditions of Service, and the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is strictly prohibited and may result in criminal action. If the Client has otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,
or email: CN.DOCcheck@sqs.com
No. 198 Kechu Road, Shenzhen Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 | (86-20) 82155555 | (86-20) 82075058 www.sqsgroup.com
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 | (86-20) 82155555 | (86-20) 82075058 sqs.china@sqs.com

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

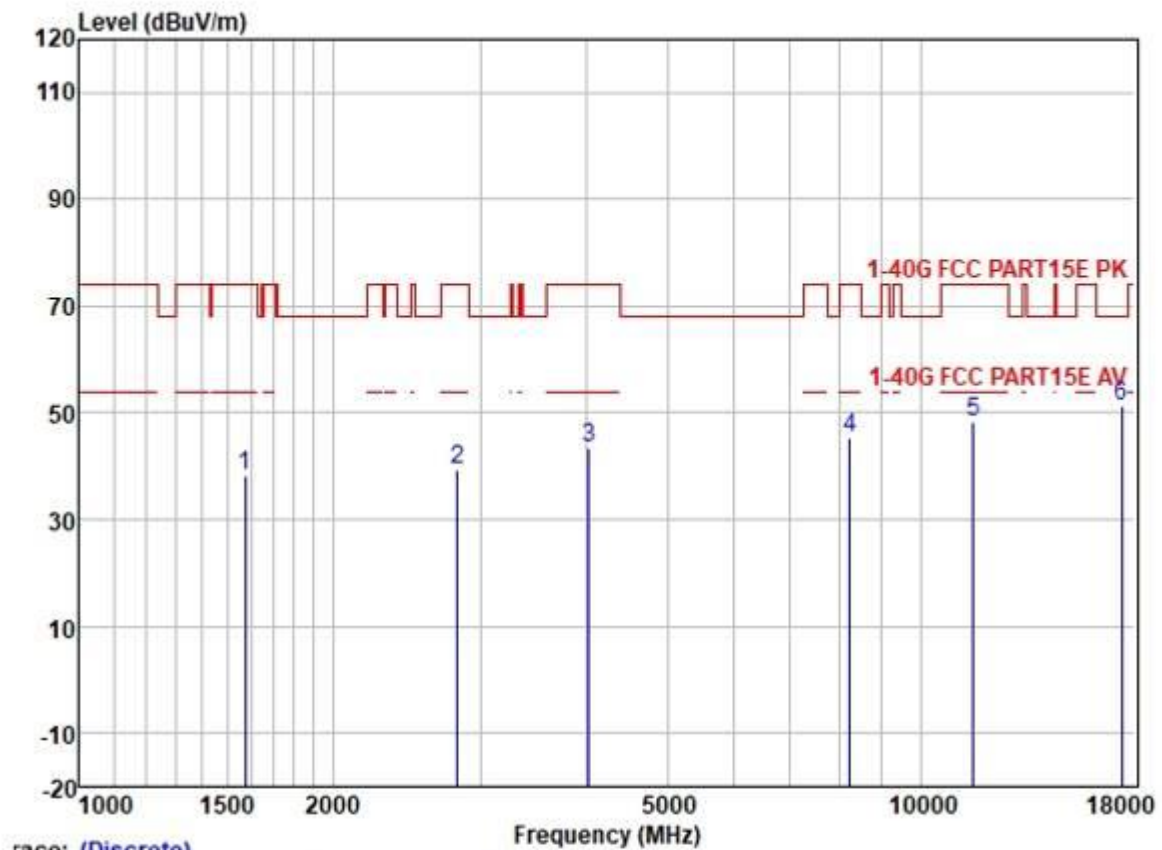


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1574.265	47.88	25.56	2.80	38.00	38.24	74.00	-35.76	HORIZONTAL	Peak
2	2814.411	44.96	28.17	3.70	37.40	39.43	74.00	-34.57	HORIZONTAL	Peak
3	4039.212	45.66	29.85	4.60	36.80	43.31	74.00	-30.69	HORIZONTAL	Peak
4	8248.005	39.40	37.00	6.43	37.59	45.24	74.00	-28.76	HORIZONTAL	Peak
5	11570.420	37.44	39.78	8.38	37.14	48.46	74.00	-25.54	HORIZONTAL	Peak
6	17355.410	32.69	43.40	10.39	35.32	51.16	68.20	-17.04	HORIZONTAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:40MHz; Channel:High

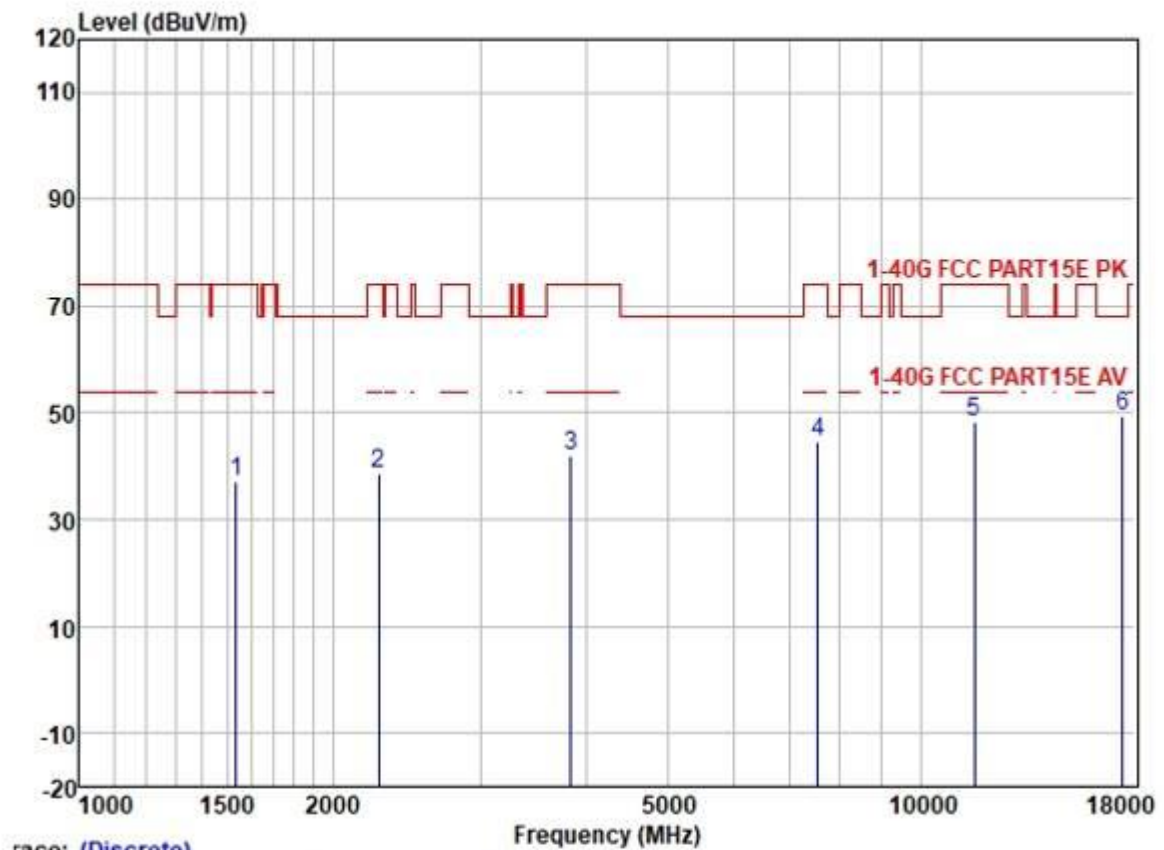

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1538.281	46.73	25.53	2.80	38.03	37.03	74.00	-36.97	HORIZONTAL Peak
2	2265.907	46.16	26.98	3.27	37.63	38.78	74.00	-35.22	HORIZONTAL Peak
3	3845.537	44.63	29.60	4.60	36.84	41.99	74.00	-32.01	HORIZONTAL Peak
4	7562.942	39.25	36.45	6.25	37.51	44.44	74.00	-29.56	HORIZONTAL Peak
5	11590.500	37.18	39.72	8.37	37.14	48.13	74.00	-25.87	HORIZONTAL Peak
6	17385.560	30.76	43.57	10.53	35.32	49.54	68.20	-18.66	HORIZONTAL Peak


Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:40MHz; Channel:Low

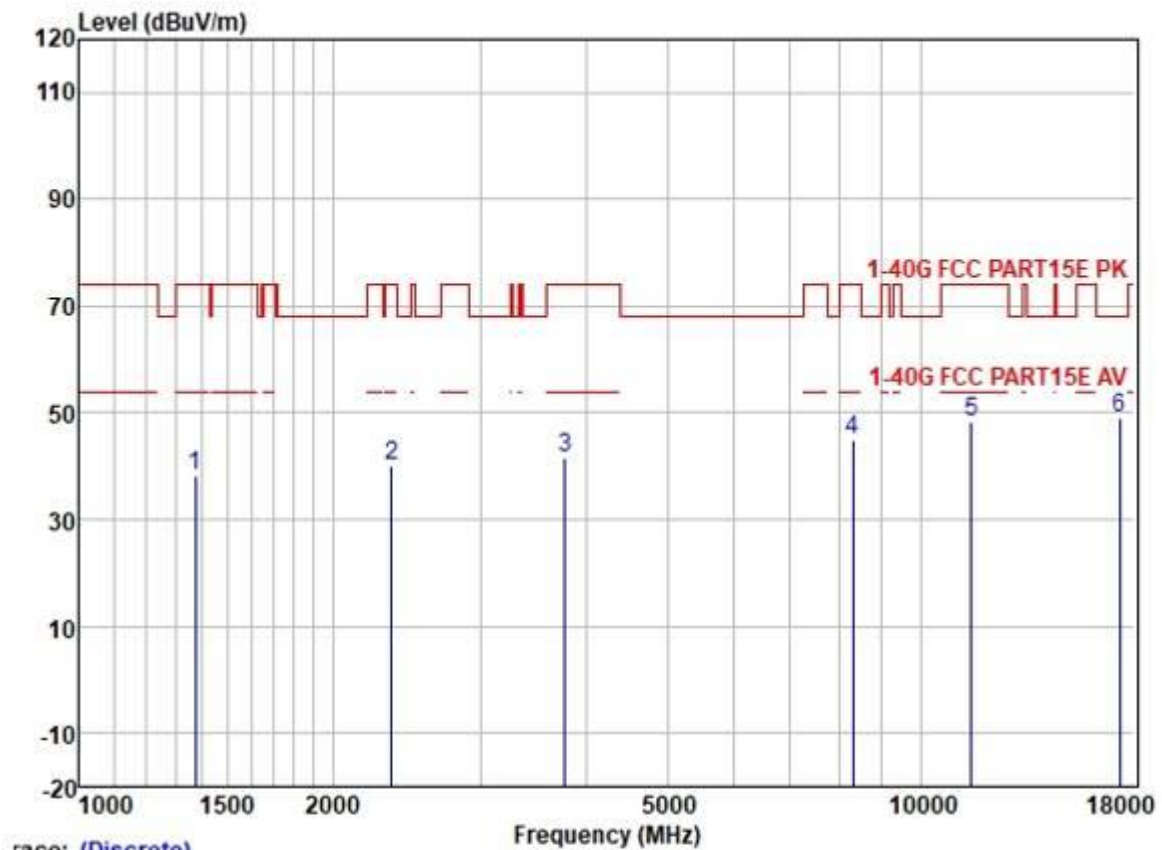

race: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1374.295	48.66	25.35	2.60	38.25	38.36	74.00	-35.64	HORIZONTAL	Peak
2	2352.668	46.95	27.25	3.40	37.61	39.99	74.00	-34.01	HORIZONTAL	Peak
3	3779.422	44.23	29.47	4.59	36.86	41.43	74.00	-32.57	HORIZONTAL	Peak
4	8319.836	39.13	37.03	6.53	37.58	45.11	74.00	-28.89	HORIZONTAL	Peak
5	11510.610	37.11	39.90	8.41	37.15	48.27	74.00	-25.73	HORIZONTAL	Peak
6	17265.300	30.80	43.21	10.24	35.33	48.92	68.20	-19.28	HORIZONTAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:80MHz; Channel:Low

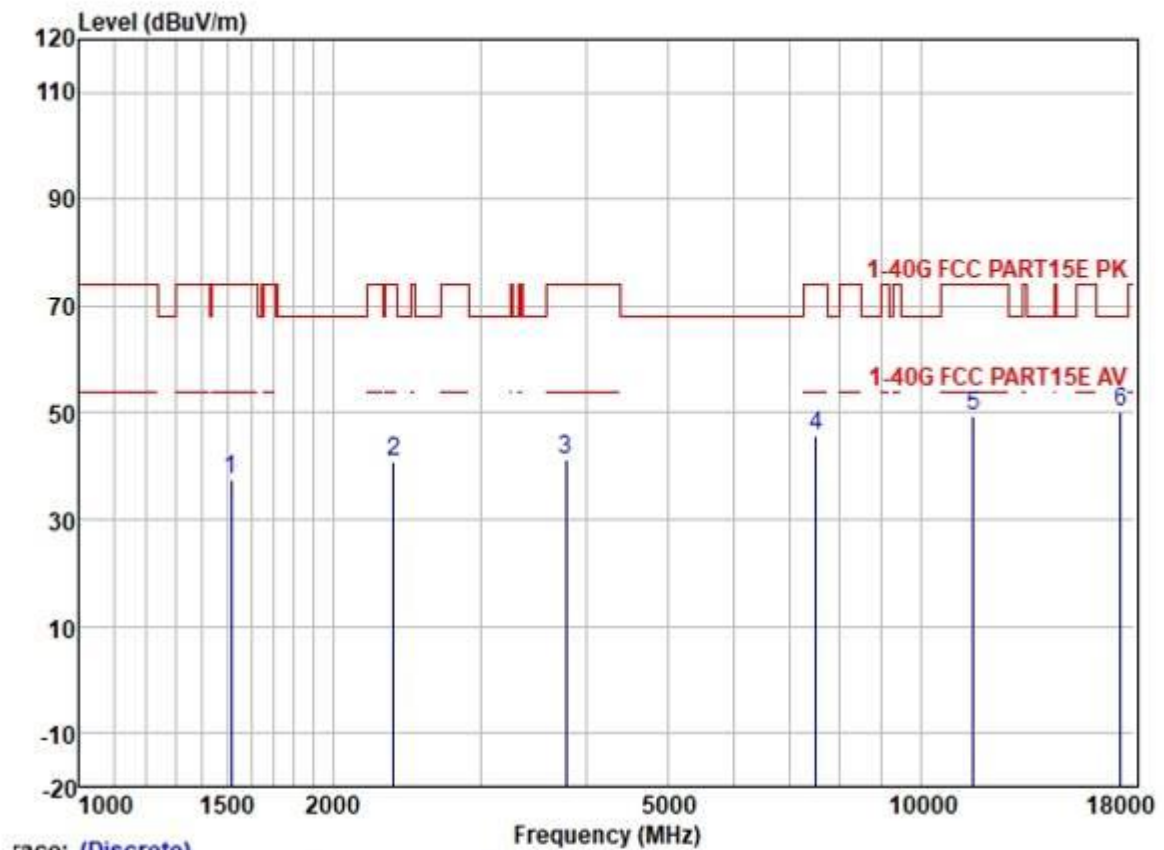


	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1516.210	47.37	25.51	2.80	38.07	37.61	74.00	-36.39	HORIZONTAL Peak
2	2366.308	47.78	27.28	3.43	37.60	40.89	74.00	-33.11	HORIZONTAL Peak
3	3790.361	44.12	29.50	4.60	36.85	41.37	74.00	-32.63	HORIZONTAL Peak
4	7519.349	40.70	36.42	6.26	37.50	45.88	74.00	-28.12	HORIZONTAL Peak
5	11550.130	38.34	39.84	8.40	37.14	49.44	74.00	-24.56	HORIZONTAL Peak
6	17325.110	31.57	43.40	10.39	35.32	50.04	68.20	-18.16	HORIZONTAL Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

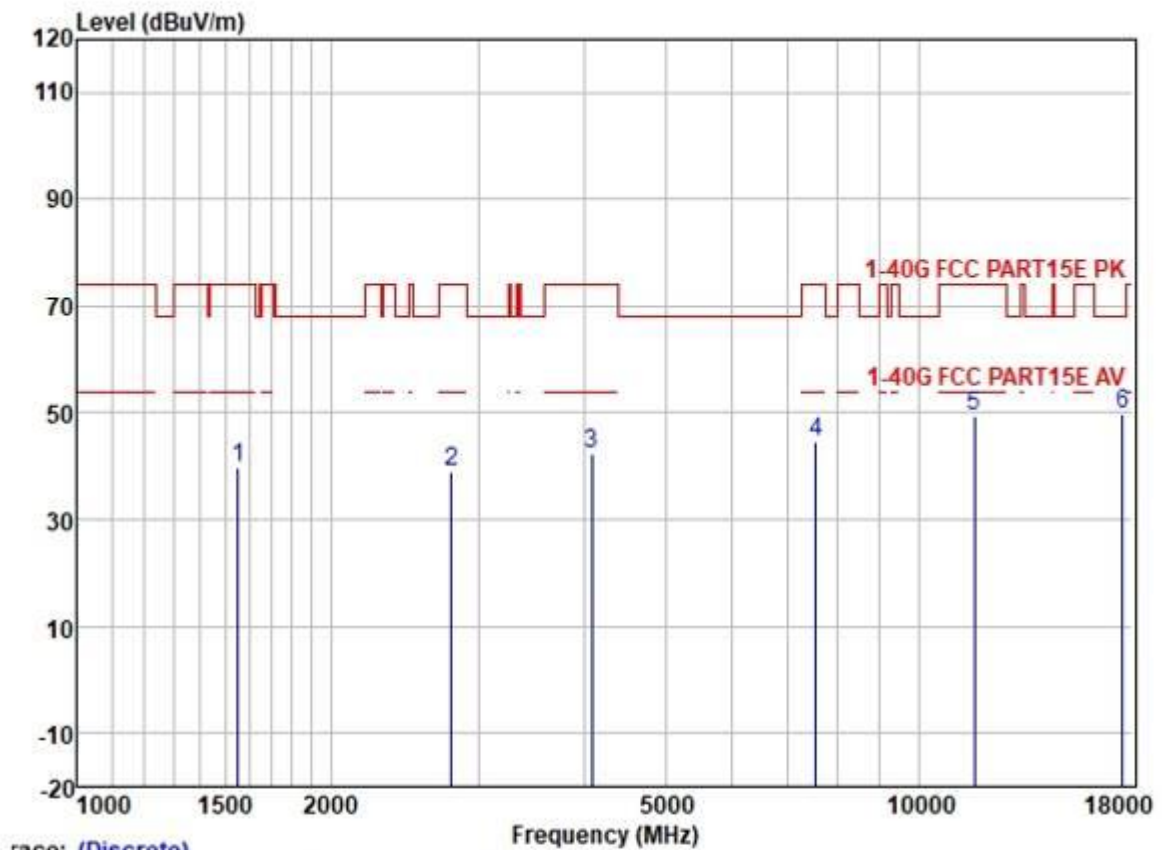


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1551.677	49.38	25.54	2.80	38.03	39.69	74.00	-34.31	VERTICAL	Peak
2	2782.060	44.68	28.10	3.69	37.43	39.04	74.00	-34.96	VERTICAL	Peak
3	4086.182	44.54	29.92	4.60	36.80	42.26	74.00	-31.74	VERTICAL	Peak
4	7562.942	39.58	36.45	6.25	37.51	44.77	74.00	-29.23	VERTICAL	Peak
5	11650.850	38.68	39.57	8.34	37.13	49.46	74.00	-24.54	VERTICAL	Peak
6	17475.560	30.46	43.90	10.77	35.32	49.81	68.20	-18.39	VERTICAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

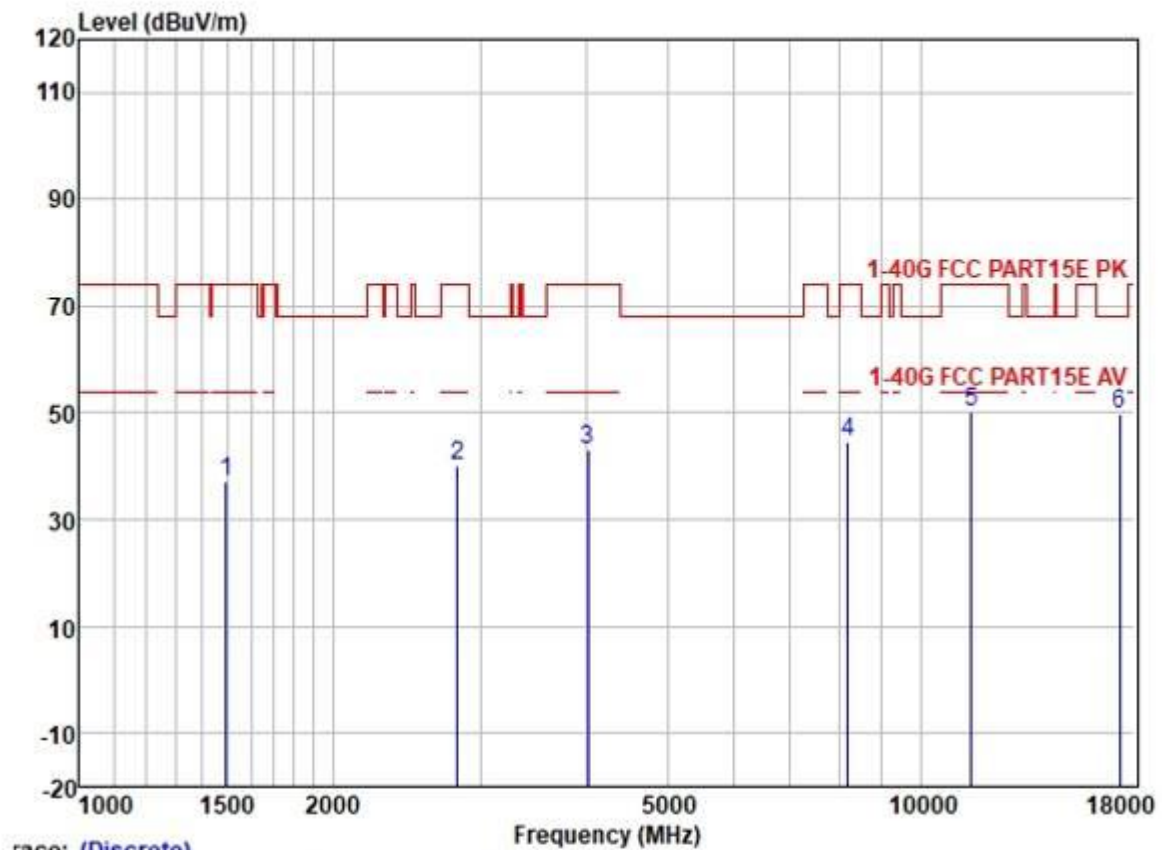

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1494.455	46.81	25.50	2.79	38.10	37.00	74.00	-37.00	VERTICAL	Peak
2	2814.411	45.67	28.17	3.70	37.40	40.14	74.00	-33.86	VERTICAL	Peak
3	4027.554	45.57	29.83	4.60	36.80	43.20	74.00	-30.80	VERTICAL	Peak
4	8200.463	38.87	36.98	6.36	37.59	44.62	74.00	-29.38	VERTICAL	Peak
5	11490.520	38.86	39.90	8.41	37.15	50.02	74.00	-23.98	VERTICAL	Peak
6	17235.560	32.05	43.01	10.08	35.33	49.81	68.20	-18.39	VERTICAL	Peak


Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

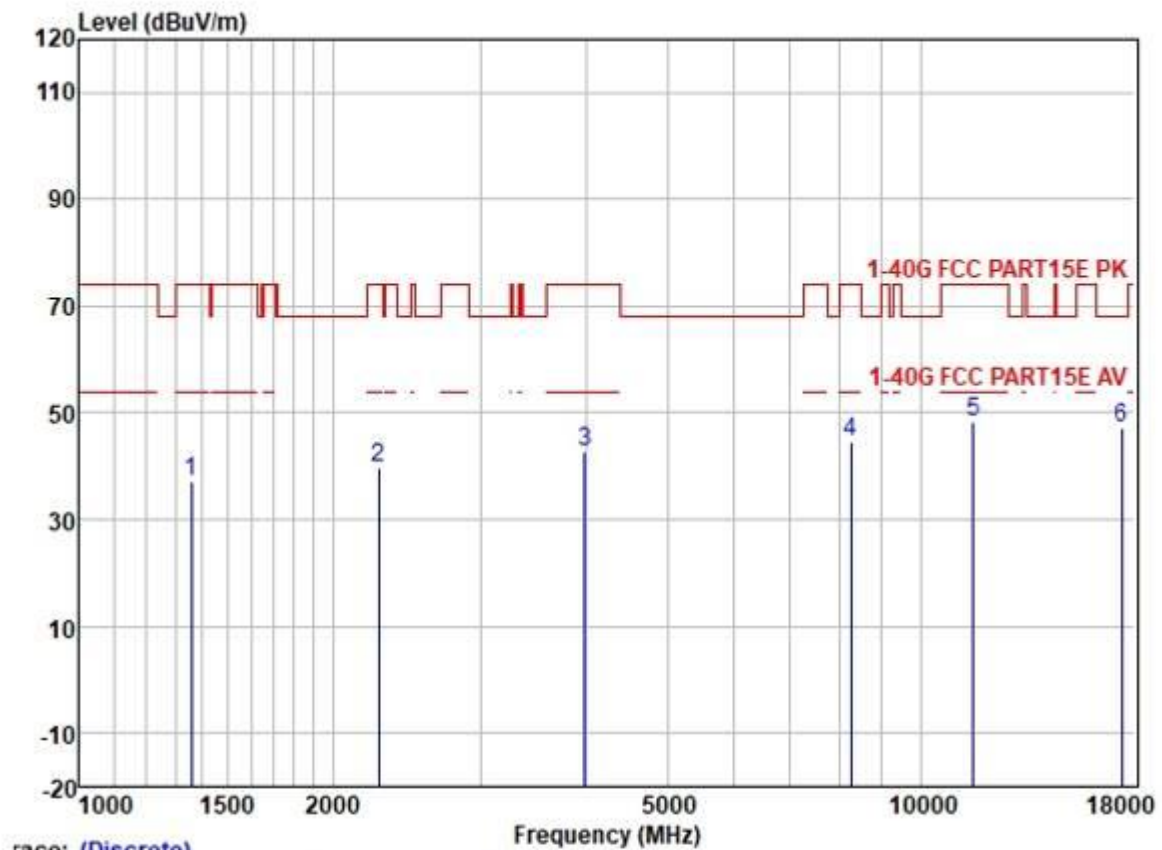

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1358.498	47.28	25.33	2.60	38.27	36.94	74.00	-37.06	VERTICAL	Peak
2	2265.907	46.95	26.98	3.27	37.63	39.57	74.00	-34.43	VERTICAL	Peak
3	3992.781	45.20	29.79	4.60	36.80	42.79	74.00	-31.21	VERTICAL	Peak
4	8271.880	38.64	37.01	6.46	37.58	44.53	74.00	-29.47	VERTICAL	Peak
5	11570.740	37.12	39.78	8.38	37.14	48.14	74.00	-25.86	VERTICAL	Peak
6	17355.190	28.76	43.40	10.39	35.32	47.23	68.20	-20.97	VERTICAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:40MHz; Channel:High

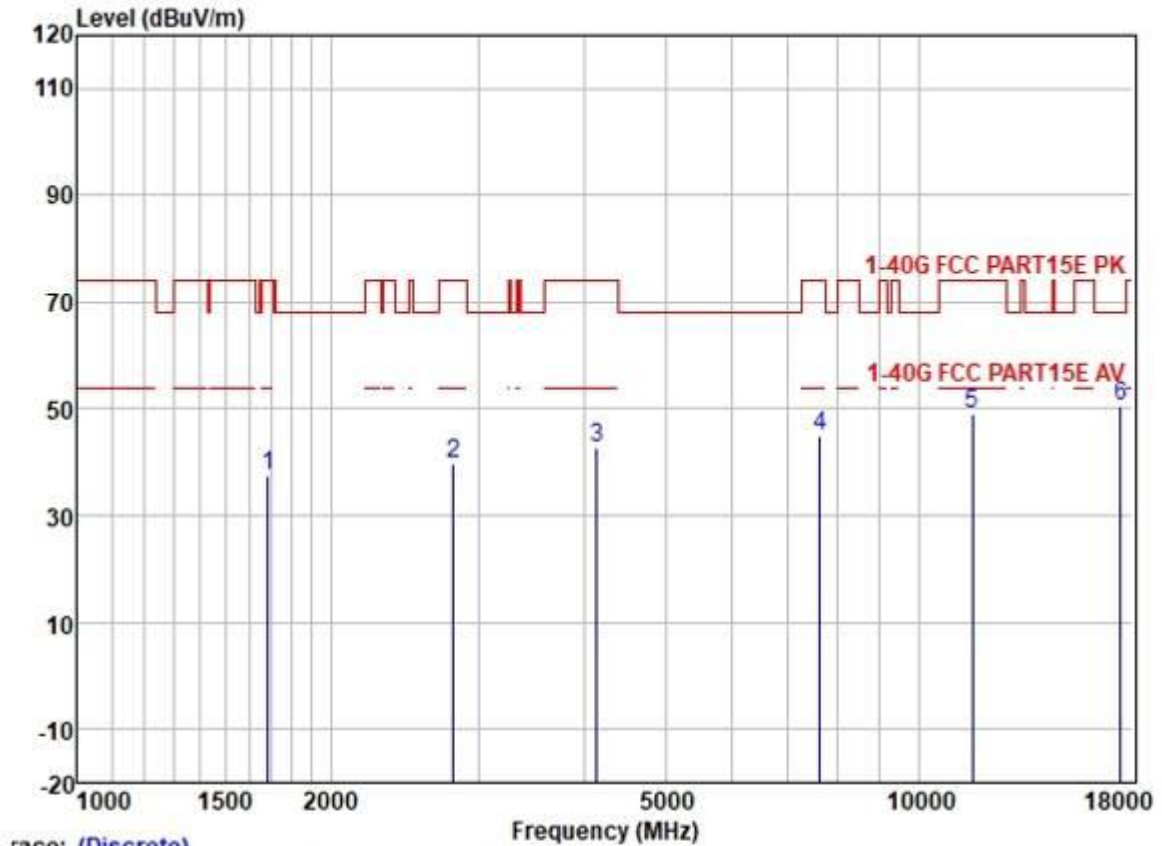


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1687.347	47.06	25.69	2.80	37.91	37.64	74.00	-36.36	VERTICAL	Peak
2	2798.189	45.46	28.13	3.70	37.41	39.88	74.00	-34.12	VERTICAL	Peak
3	4145.664	45.05	30.03	4.60	36.80	42.88	74.00	-31.12	VERTICAL	Peak
4	7628.806	39.57	36.51	6.24	37.52	44.80	74.00	-29.20	VERTICAL	Peak
5	11590.610	38.10	39.72	8.37	37.14	49.05	74.00	-24.95	VERTICAL	Peak
6	17385.640	31.73	43.57	10.53	35.32	50.51	68.20	-17.69	VERTICAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:40MHz; Channel:Low

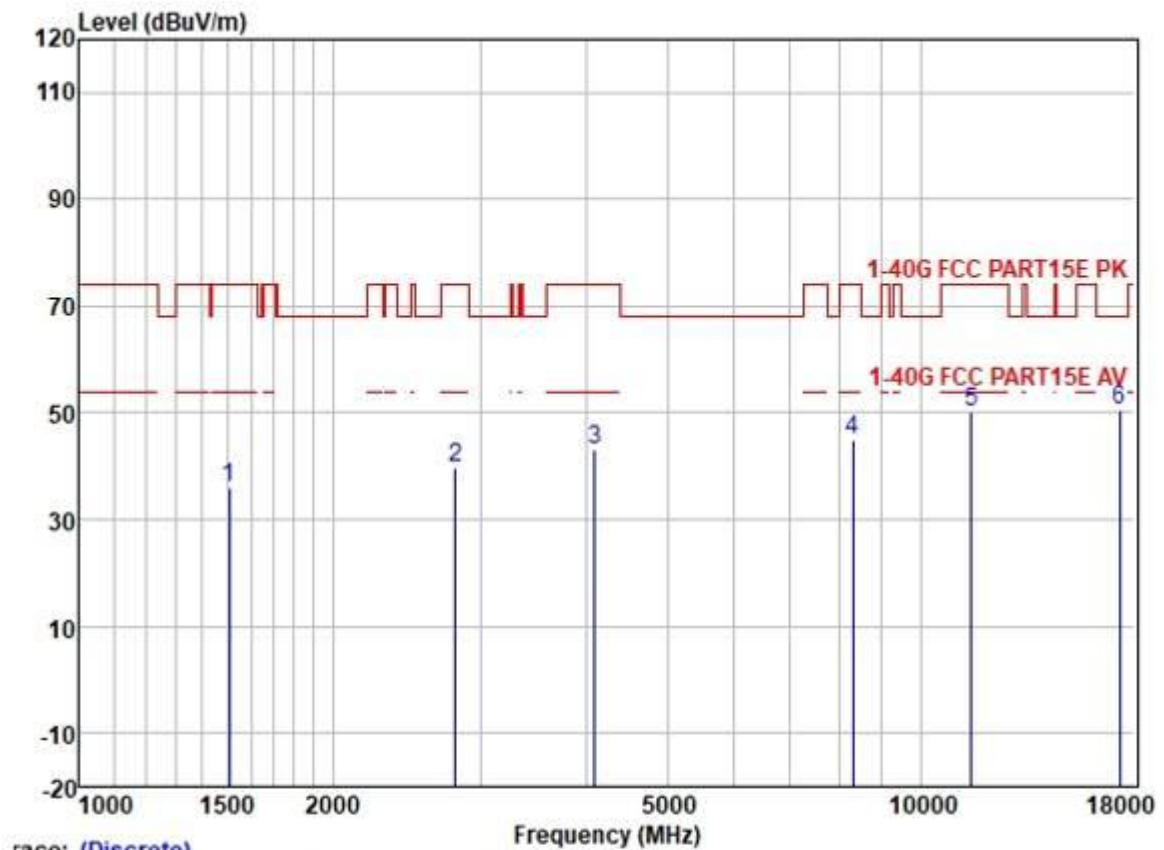

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1507.470	45.86	25.51	2.80	38.10	36.07	74.00	-37.93	VERTICAL Peak
2	2798.189	45.46	28.13	3.70	37.41	39.88	74.00	-34.12	VERTICAL Peak
3	4098.010	45.51	29.94	4.60	36.80	43.25	74.00	-30.75	VERTICAL Peak
4	8319.836	38.88	37.03	6.53	37.58	44.86	74.00	-29.14	VERTICAL Peak
5	11510.390	38.86	39.90	8.41	37.15	50.02	74.00	-23.98	VERTICAL Peak
6	17265.730	32.32	43.21	10.24	35.33	50.44	68.20	-17.76	VERTICAL Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:80MHz; Channel:Low

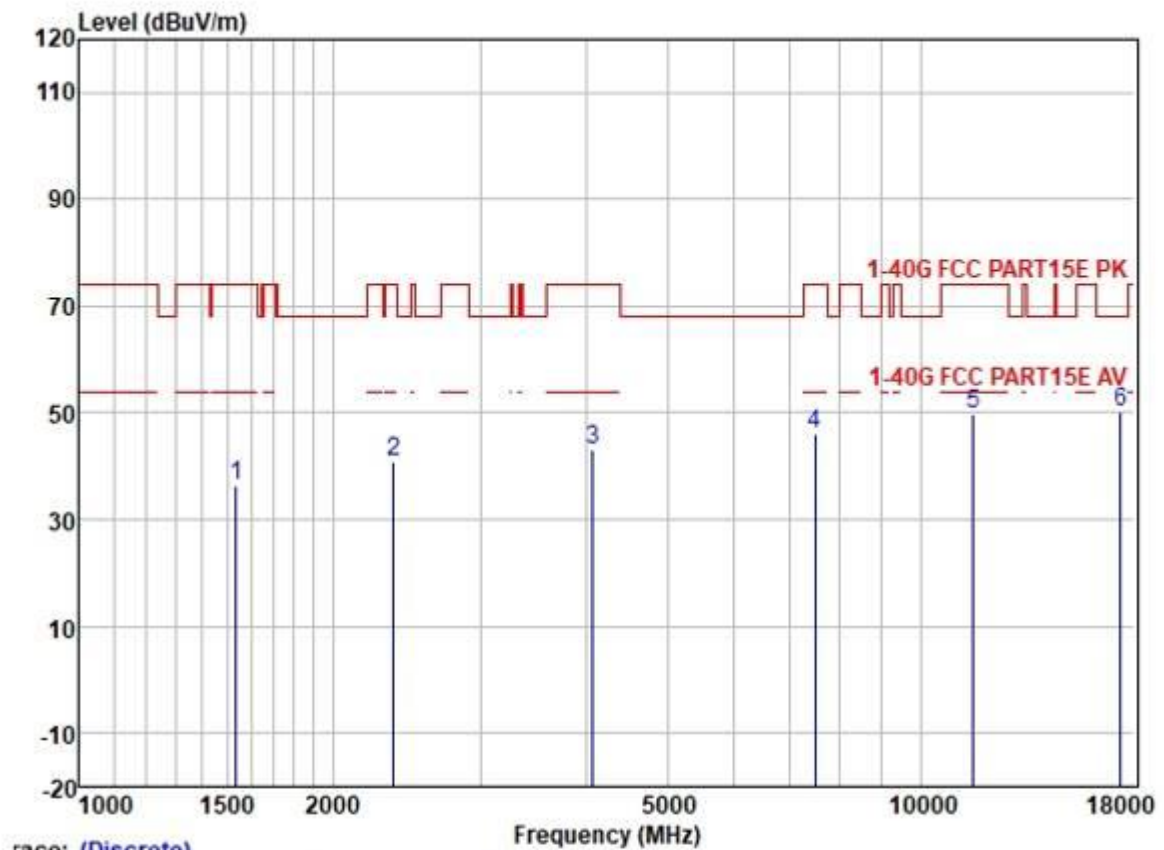

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1538.281	46.18	25.53	2.80	38.03	36.48	74.00	-37.52	VERTICAL Peak
2	2366.308	47.78	27.28	3.43	37.60	40.89	74.00	-33.11	VERTICAL Peak
3	4074.388	45.53	29.90	4.60	36.80	43.23	74.00	-30.77	VERTICAL Peak
4	7497.646	40.80	36.40	6.26	37.49	45.97	74.00	-28.03	VERTICAL Peak
5	11550.420	38.63	39.78	8.38	37.14	49.65	74.00	-24.35	VERTICAL Peak
6	17325.050	31.73	43.40	10.39	35.32	50.20	68.20	-18.00	VERTICAL Peak

7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 26.2 °C

Humidity: 62.5 % RH

Atmospheric Pressure: 1010 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, or email: CN.Qcccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kaifu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075068 www.sgs.com.cn
Guangzhou Branch: 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075068 sgs.china@sgs.com

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

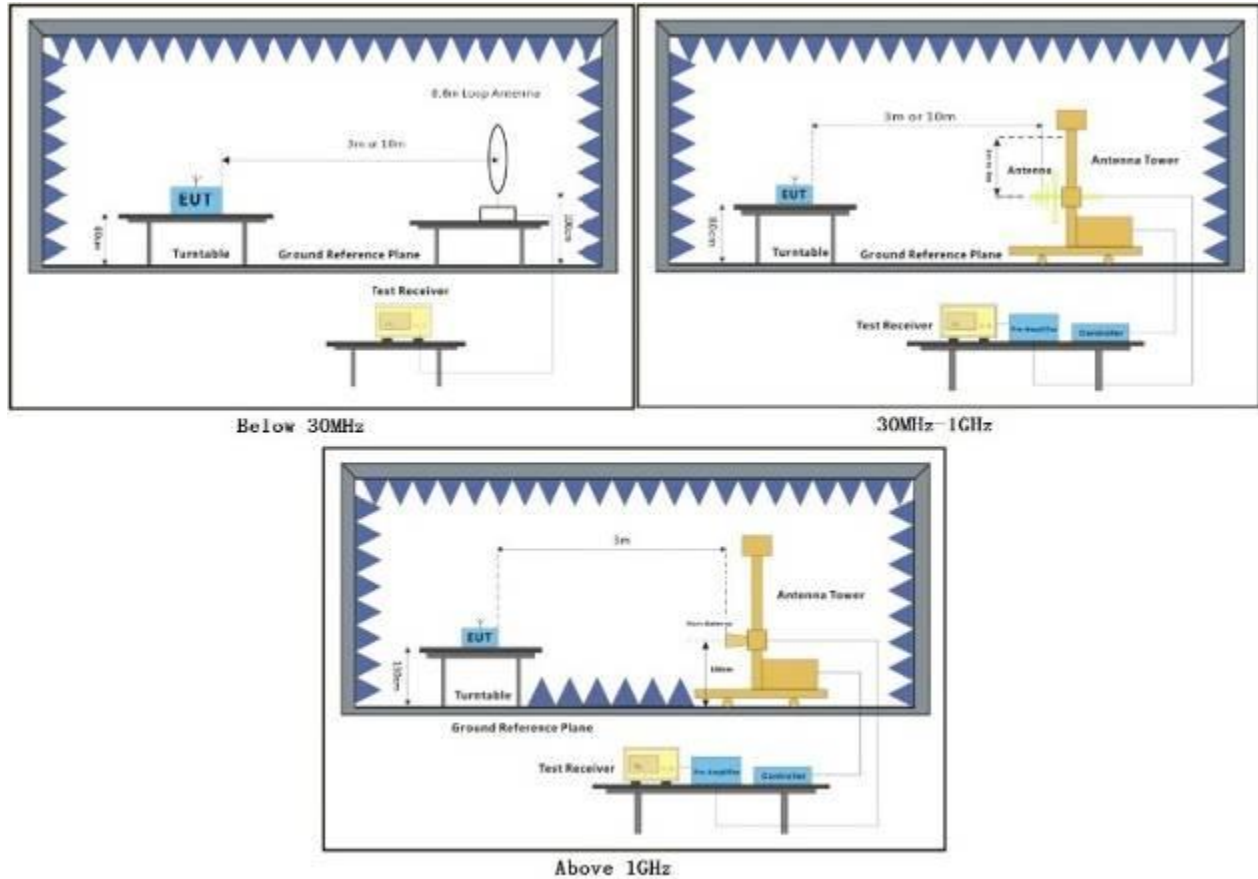

7.9.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark2:


- 1). Pretest the EUT at antenna 1 and antenna 2 and MIMO mode find the worst case is MIMO mode.
- 2). Pretest the EUT in 802.11a/ n(20)/ n(40)/ac (20)/ ac (40)/ ac(80) find the worst case are 802.11a /n(40)/ ac(80), only record the worst case test data 802.11a /n(40)/ ac(80) in this report.
- 3). The port 1 for high channel and port 2 for low channel is the fundamental frequency of the band and refer to section 7.6 for details.

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

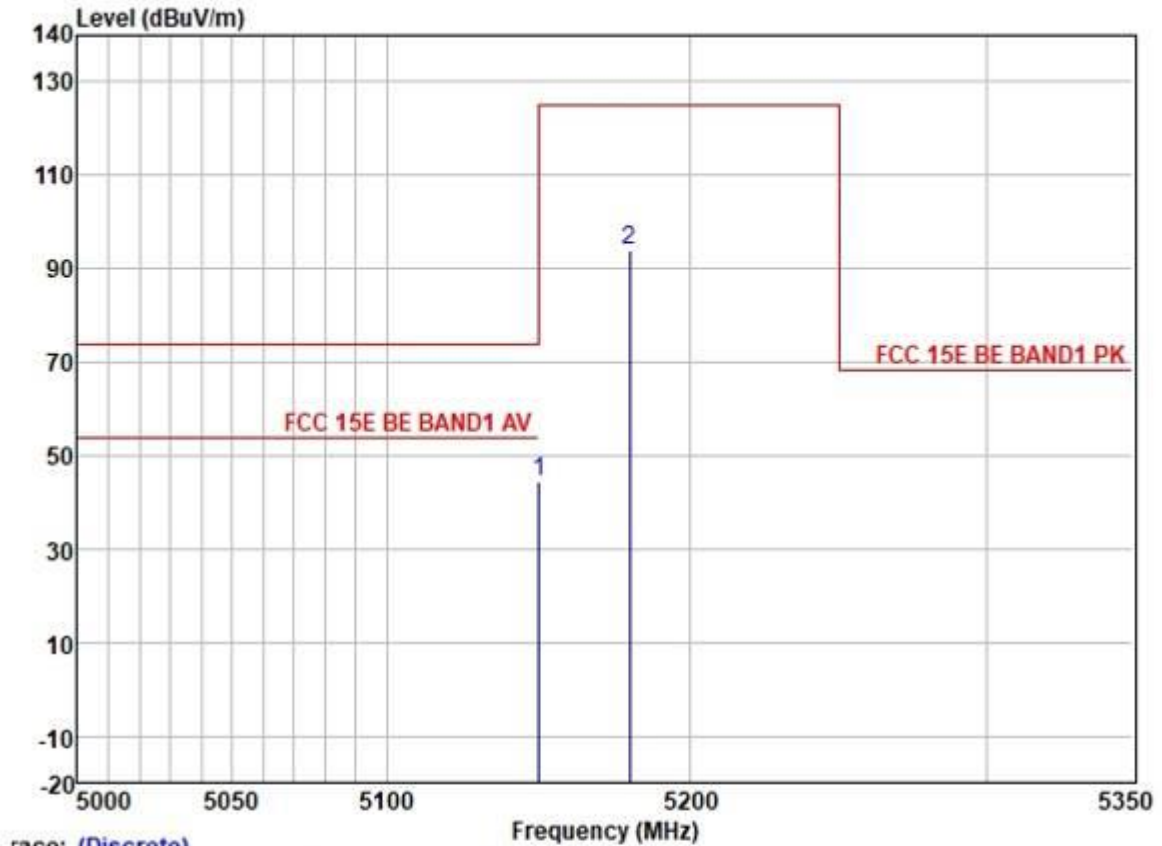


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5150.000	44.09	31.72	5.62	36.86	44.57	74.00	-29.43
2	5180.000	93.42	31.73	5.61	36.87	93.89	125.20	-31.31

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

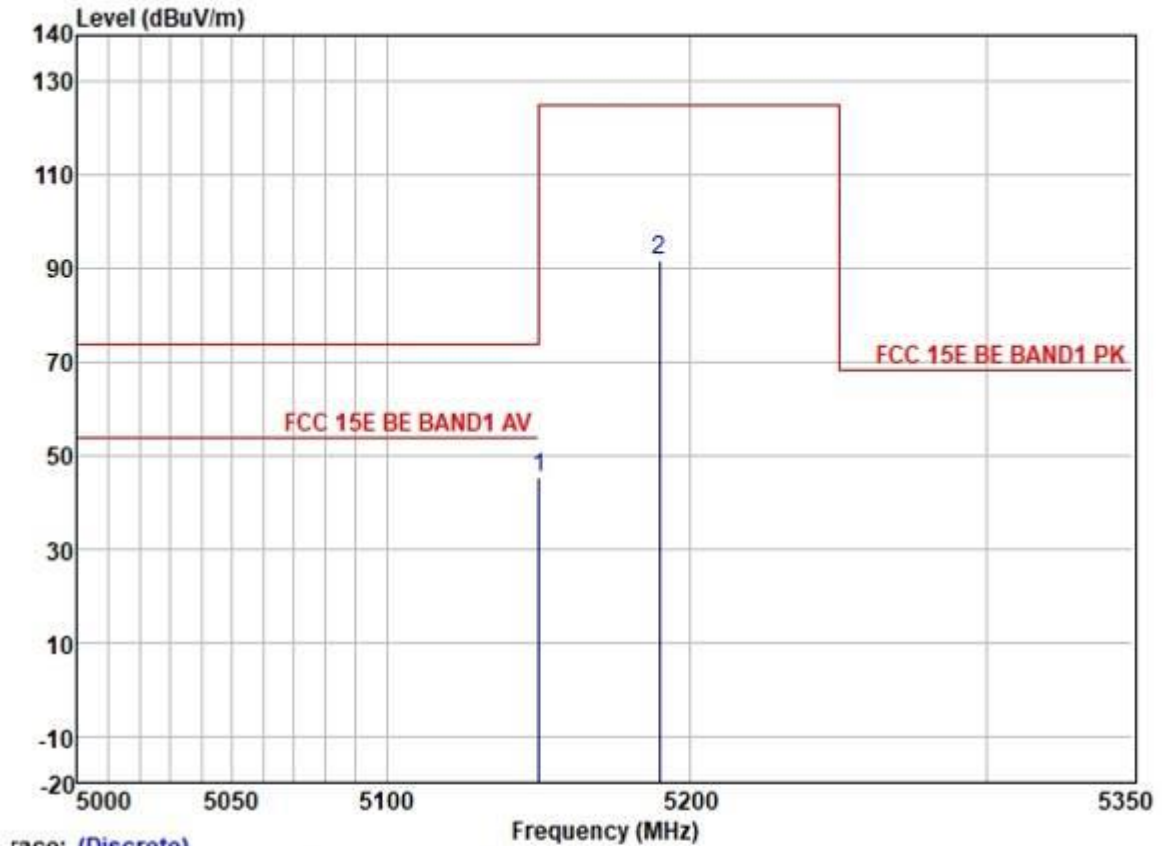

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5150.000	44.61	31.72	5.62	36.86	45.09	74.00	-28.91
2	5190.000	91.16	31.73	5.60	36.87	91.62	125.20	-33.58


Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: Low

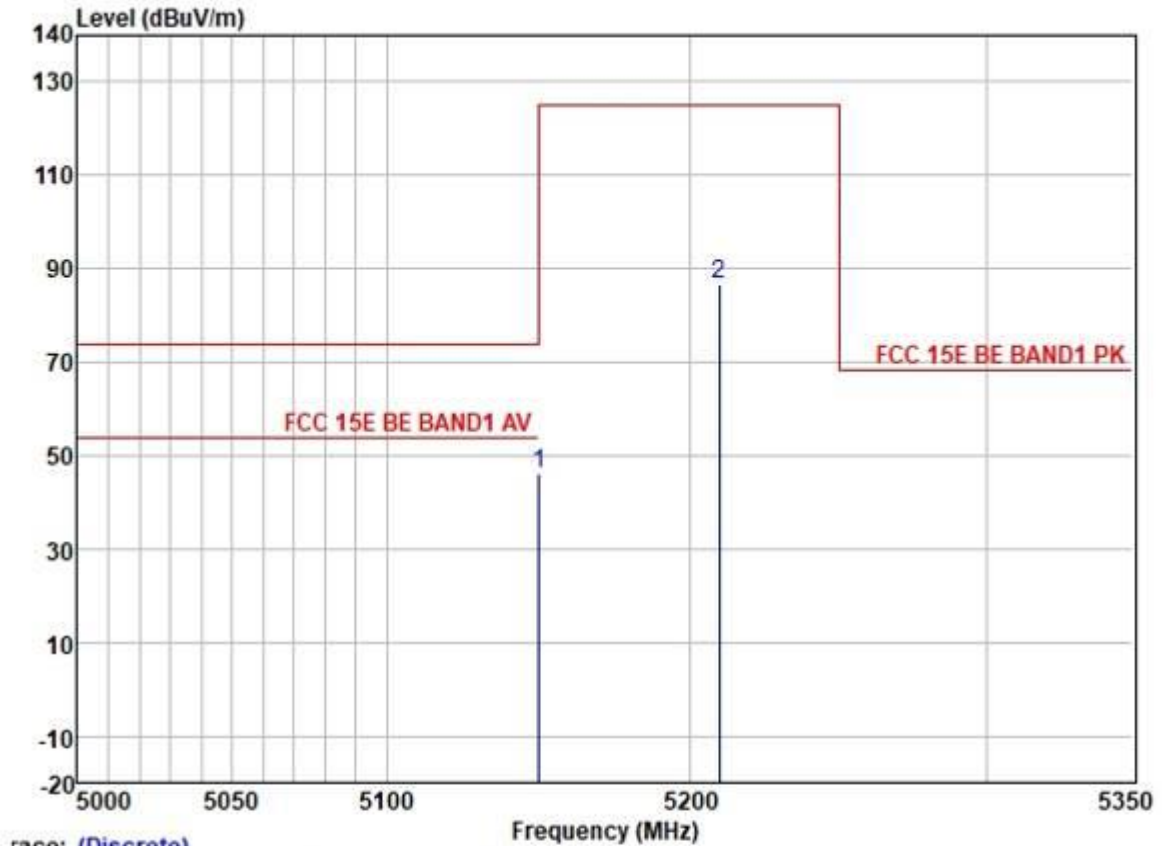


race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5150.000	45.68	31.72	5.62	36.86	46.16	74.00	-27.84	HORIZONTAL Peak
2	5210.000	86.23	31.74	5.65	36.87	86.75	125.20	-38.45	HORIZONTAL Peak

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

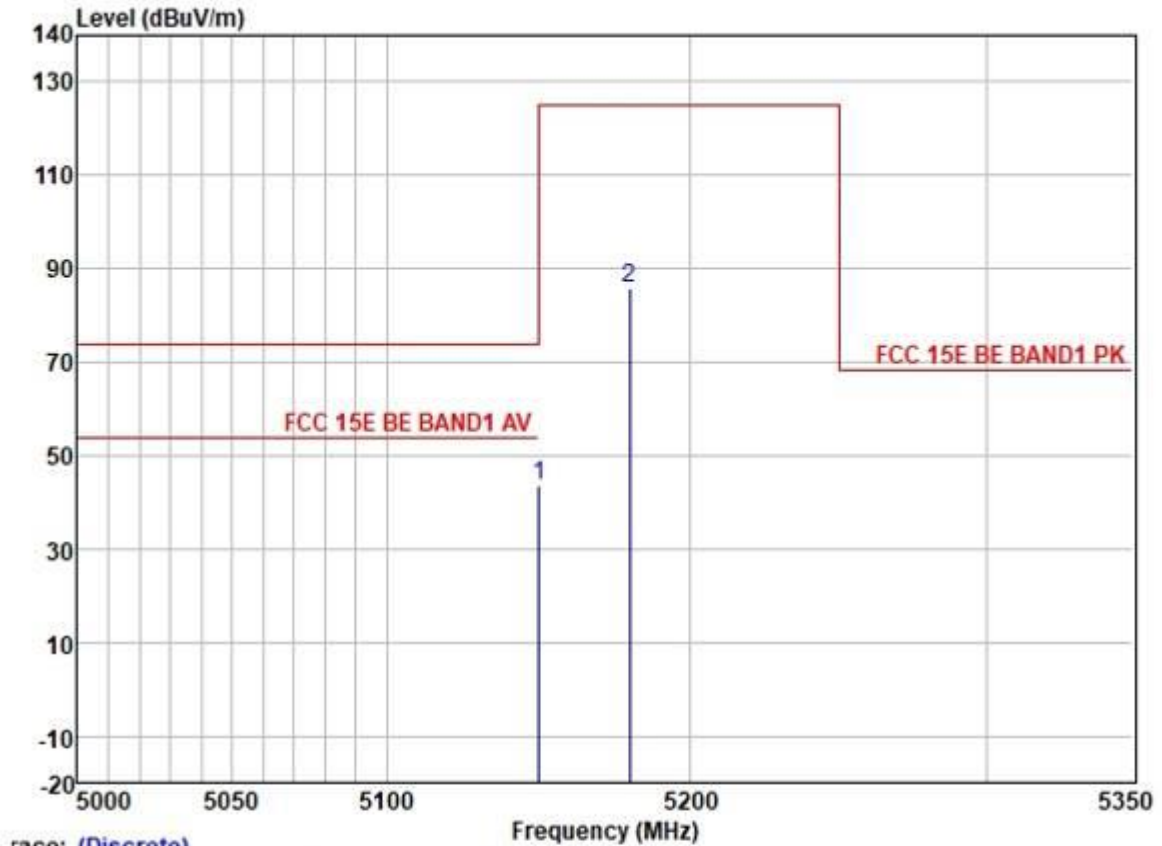


Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

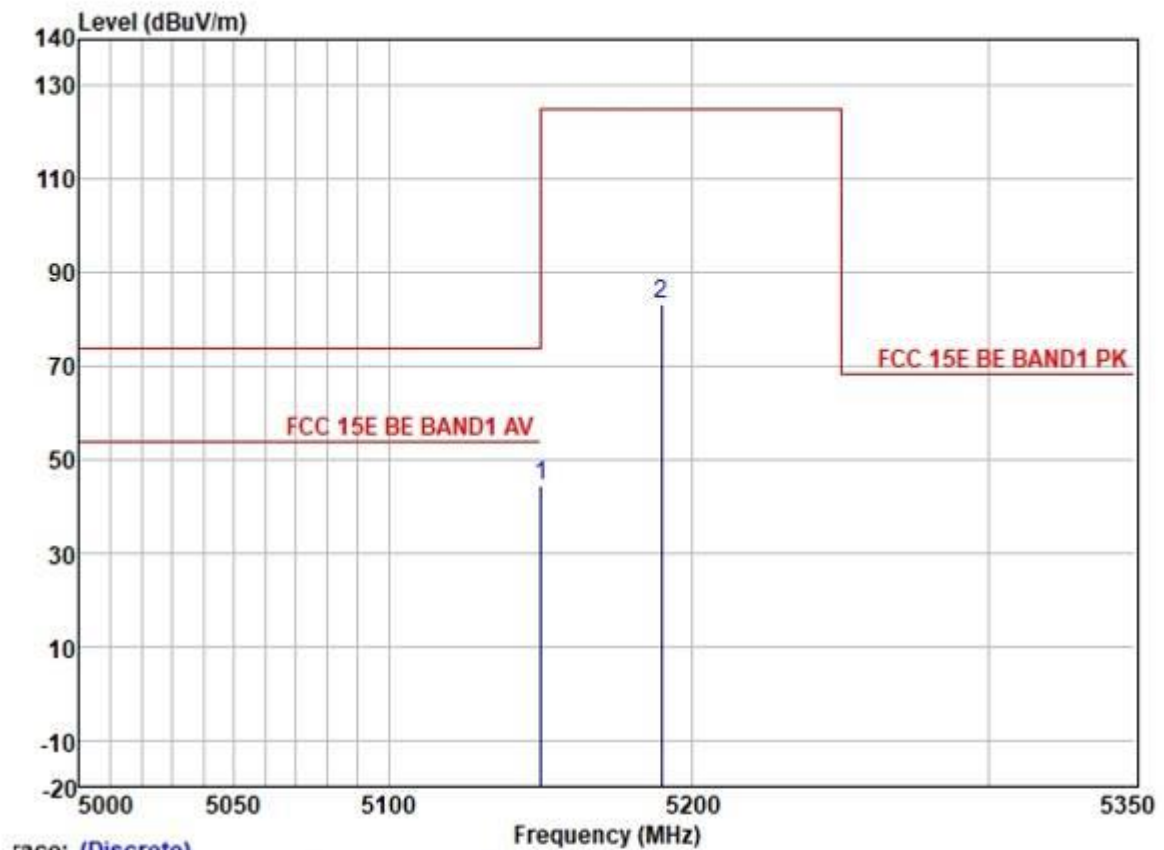


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5150.000	43.90	31.72	5.62	36.86	44.38	74.00	-29.62	VERTICAL	Peak
2	5190.000	82.71	31.73	5.60	36.87	83.17	125.20	-42.03	VERTICAL	Peak

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

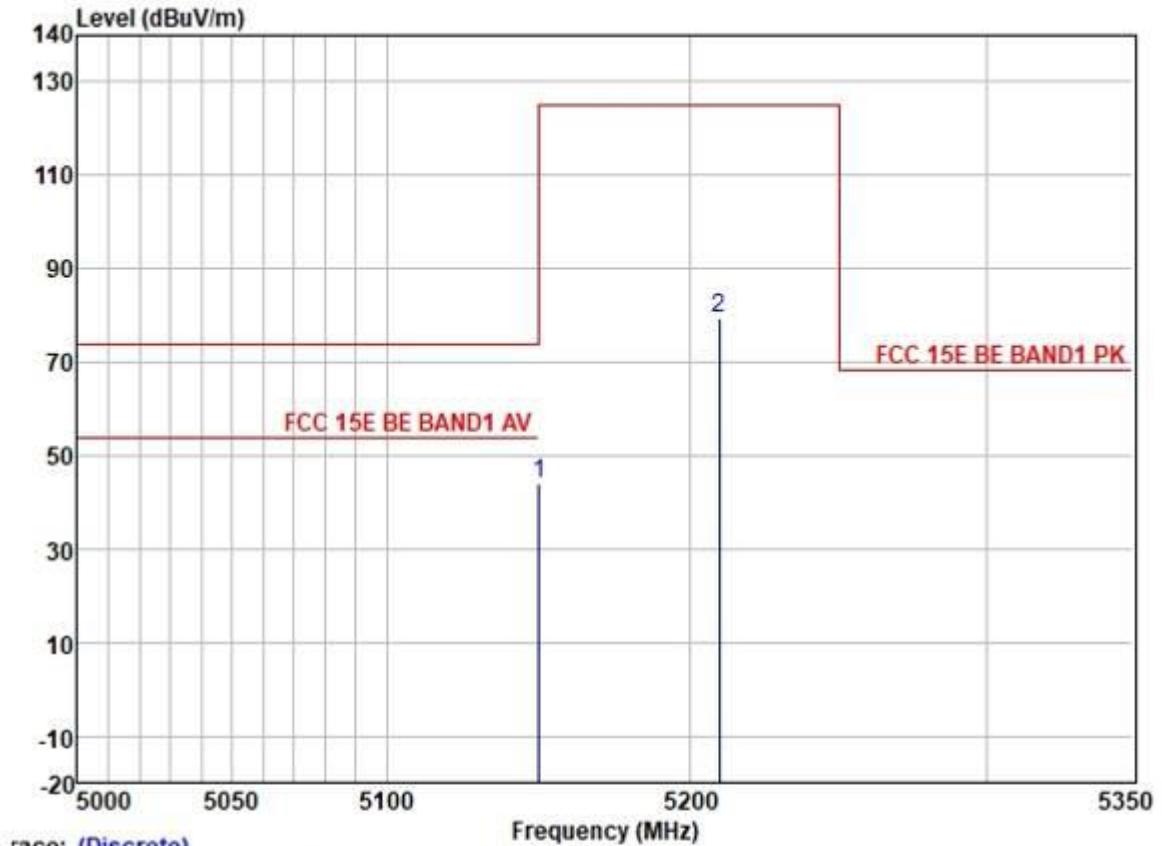

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5150.000	43.31	31.72	5.62	36.86	43.79	74.00	-30.21	VERTICAL Peak
2	5210.000	79.07	31.74	5.65	36.87	79.59	125.20	-45.61	VERTICAL Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

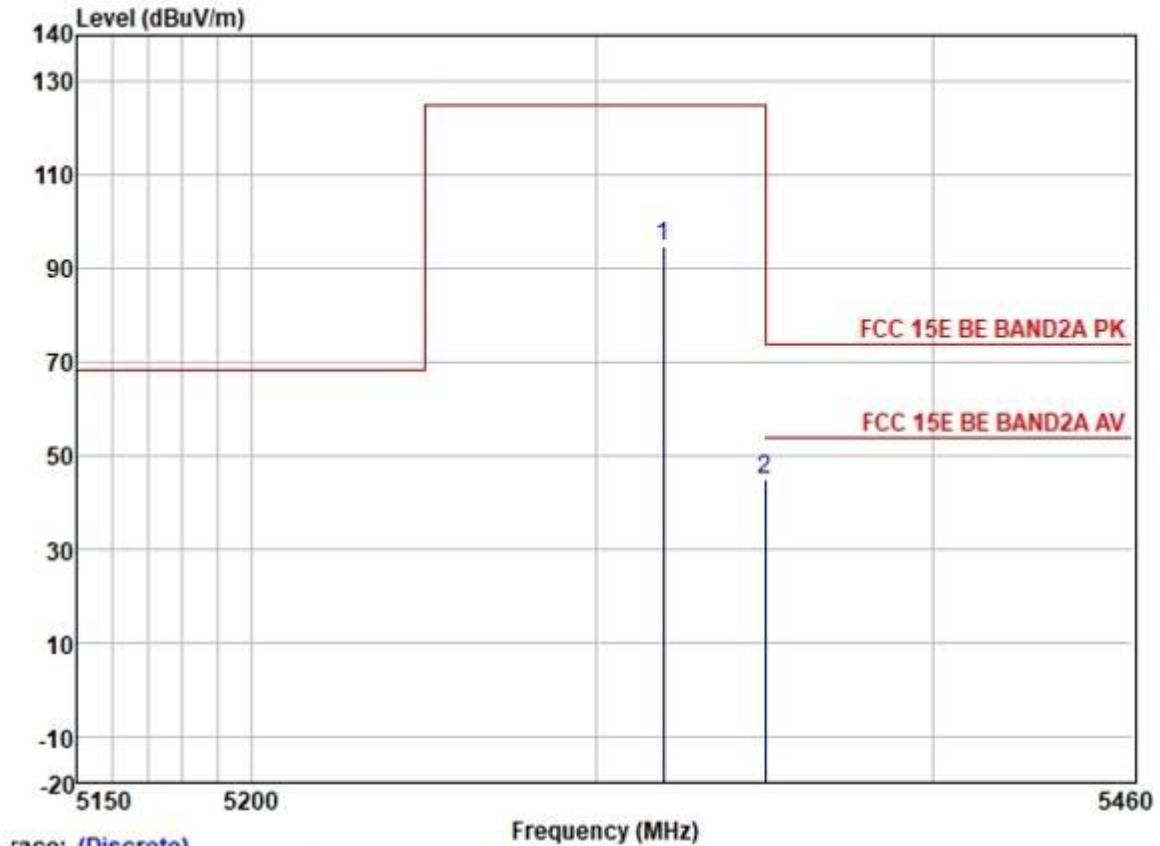

race: (Discrete)

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	93.76	31.77	6.08	36.88	94.73	125.20	-30.47	HORIZONTAL Peak
2	5350.000	43.95	31.77	6.05	36.88	44.89	74.00	-29.11	HORIZONTAL Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

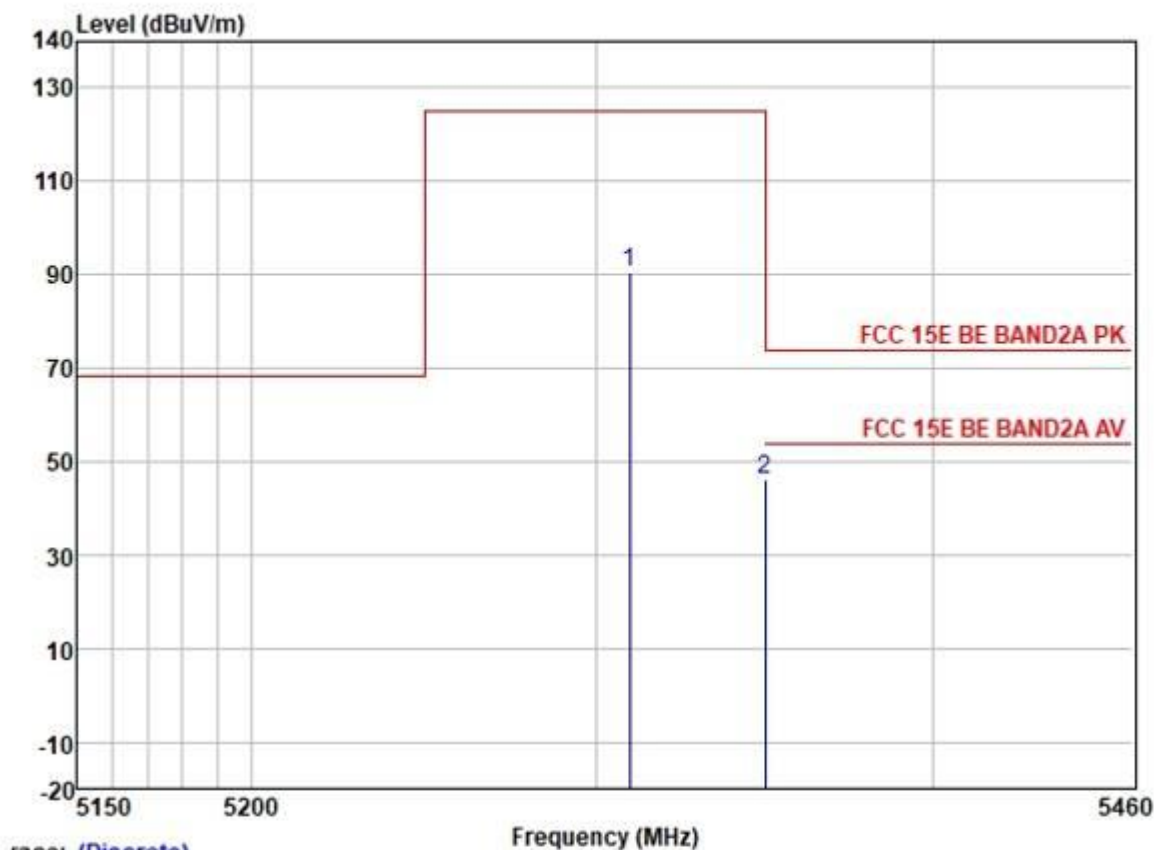

race: (Discrete)

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5310.000	89.71	31.77	6.08	36.87	90.69	125.20	-34.51	HORIZONTAL Peak
2	5350.000	45.27	31.77	6.05	36.88	46.21	74.00	-27.79	HORIZONTAL Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

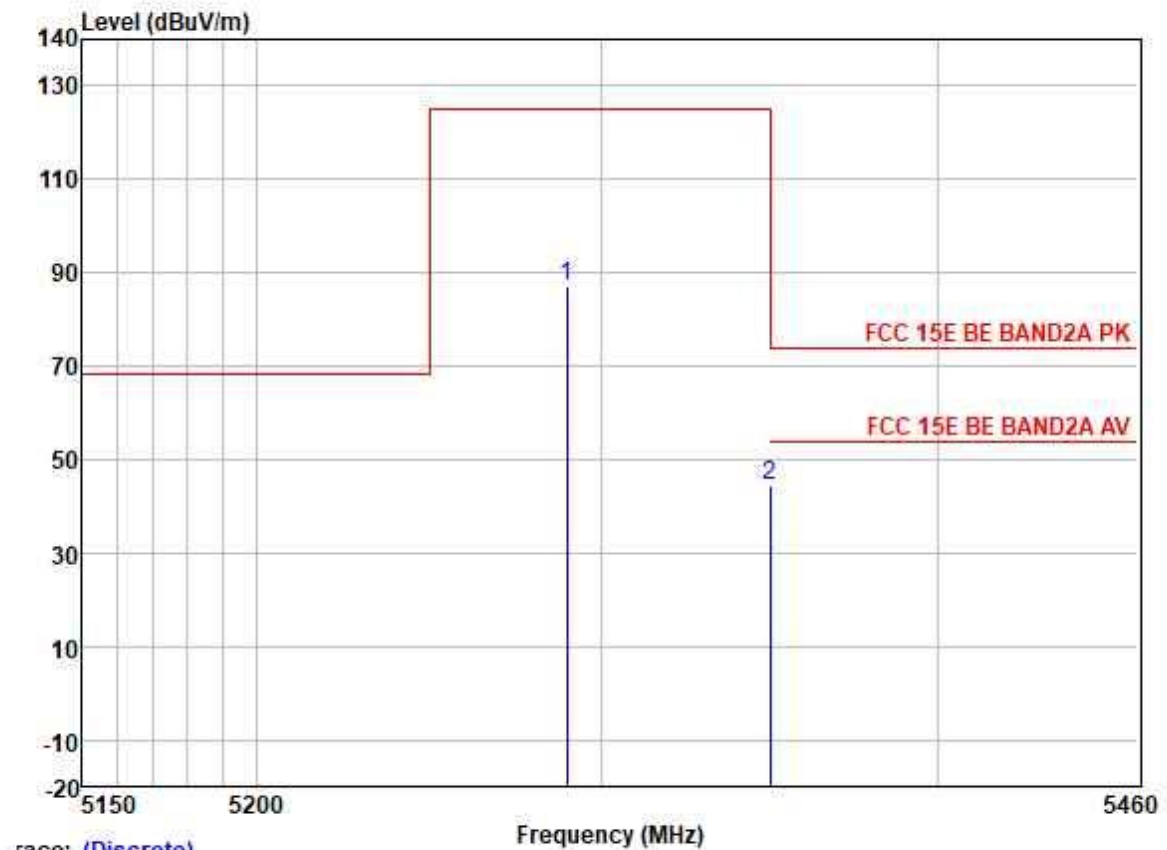

Trace: (Discrete)

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5290.000	86.14	31.76	6.00	36.87	87.03	125.20	-38.17 HORIZONTAL Peak
2	5350.000	43.55	31.77	6.05	36.88	44.49	74.00	-29.51 HORIZONTAL Peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

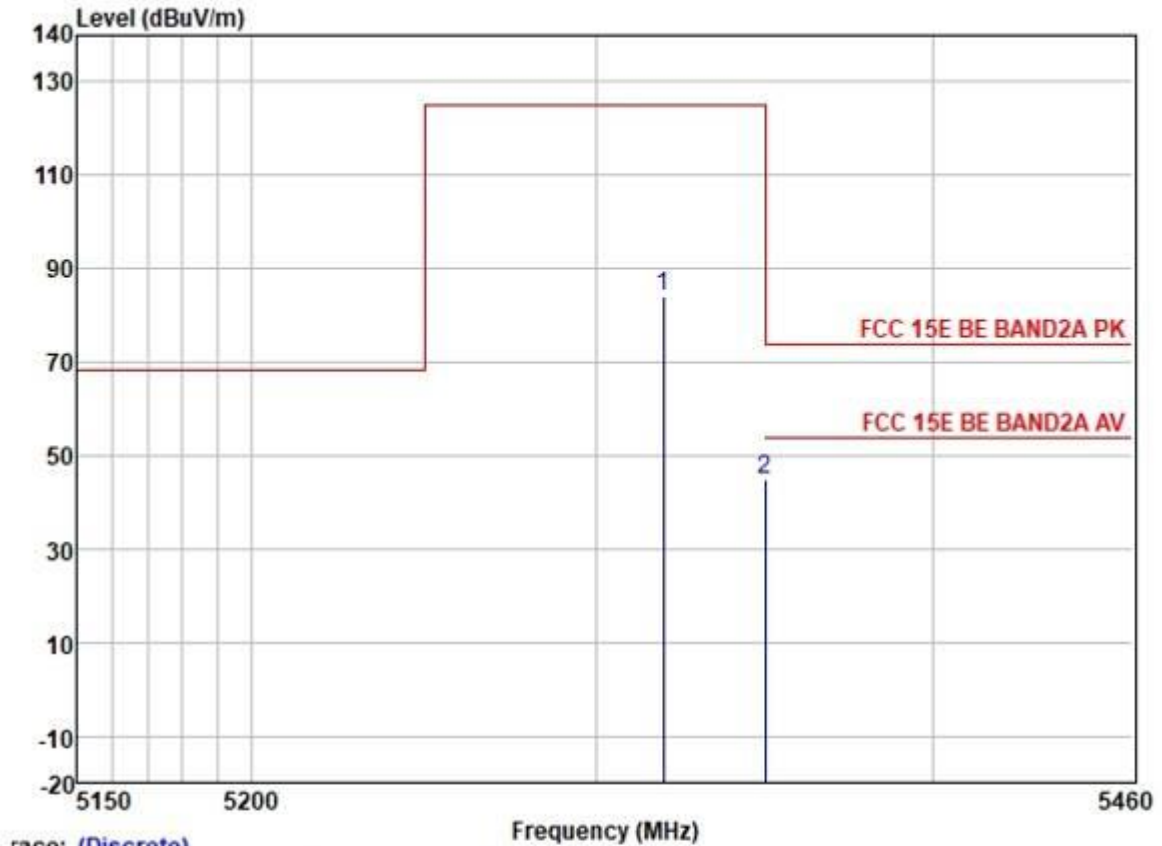

race: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	82.94	31.77	6.08	36.88	83.91	125.20	-41.29	VERTICAL	Peak
2	5350.000	44.00	31.77	6.05	36.88	44.94	74.00	-29.06	VERTICAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

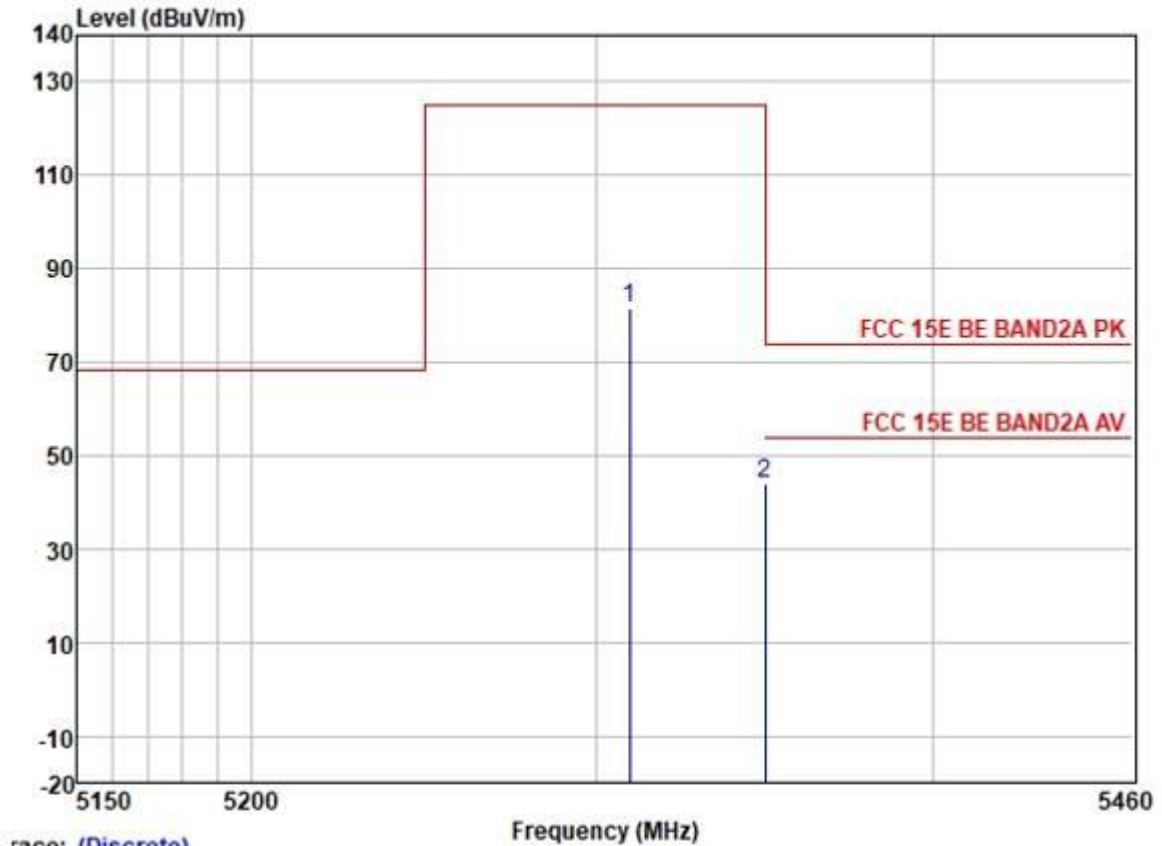


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5310.000	80.51	31.77	6.08	36.87	81.49	125.20	-43.71	VERTICAL	Peak
2	5350.000	43.27	31.77	6.05	36.88	44.21	74.00	-29.79	VERTICAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

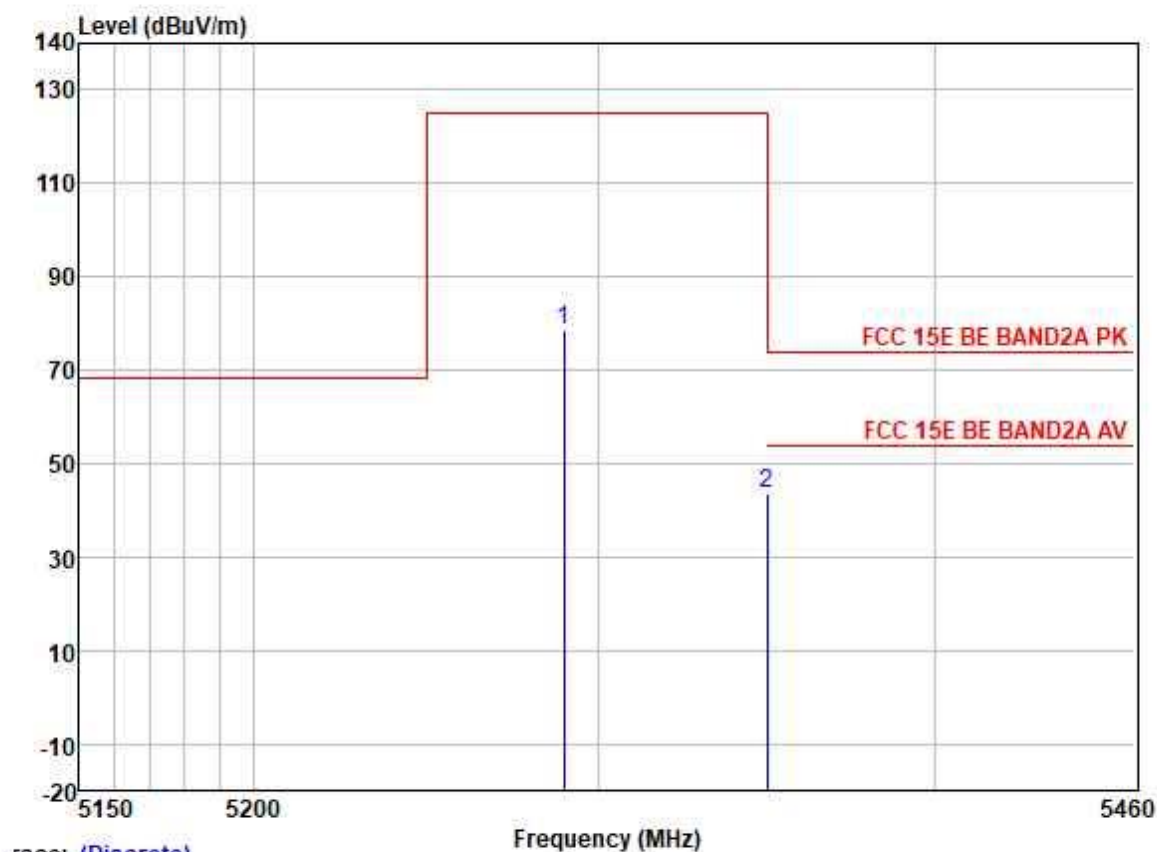

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5290.000	77.79	31.76	6.00	36.87	78.68	125.20	-46.52	VERTICAL Peak
2	5350.000	42.70	31.77	6.05	36.88	43.64	74.00	-30.36	VERTICAL Peak


Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

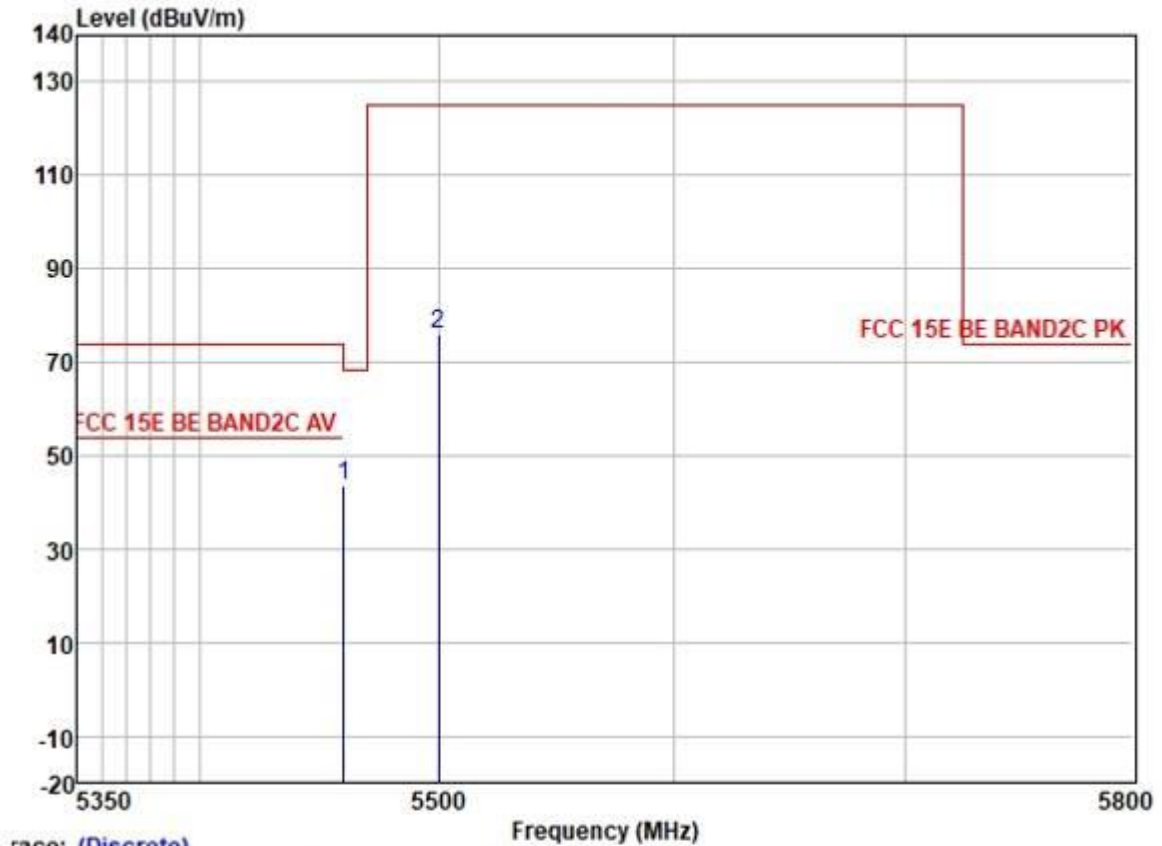

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5460.000	42.45	31.79	6.26	36.88	43.62	68.20	-24.58
2	5500.000	74.87	31.80	6.40	36.88	76.19	125.20	-49.01


Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

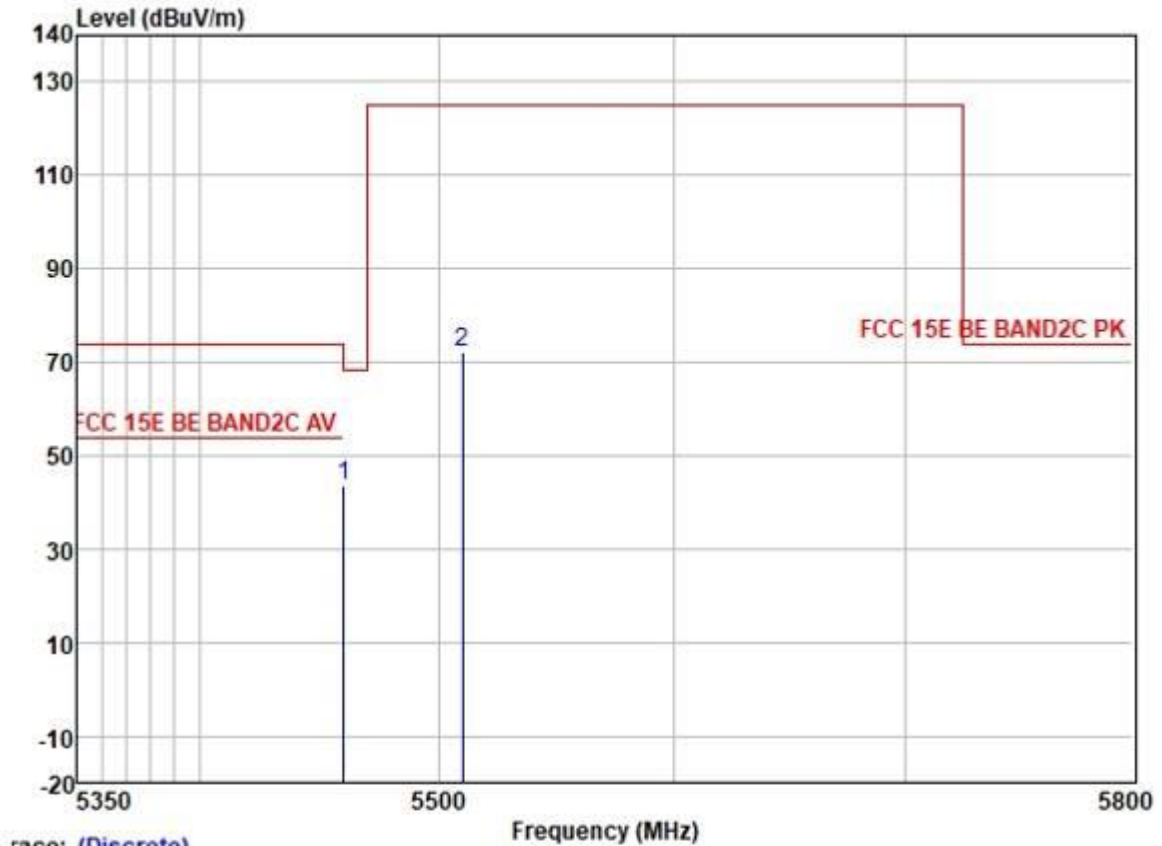

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5460.000	42.57	31.79	6.26	36.88	43.74	68.20	-24.46
2	5510.000	70.70	31.80	6.40	36.88	72.02	125.20	-53.18

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

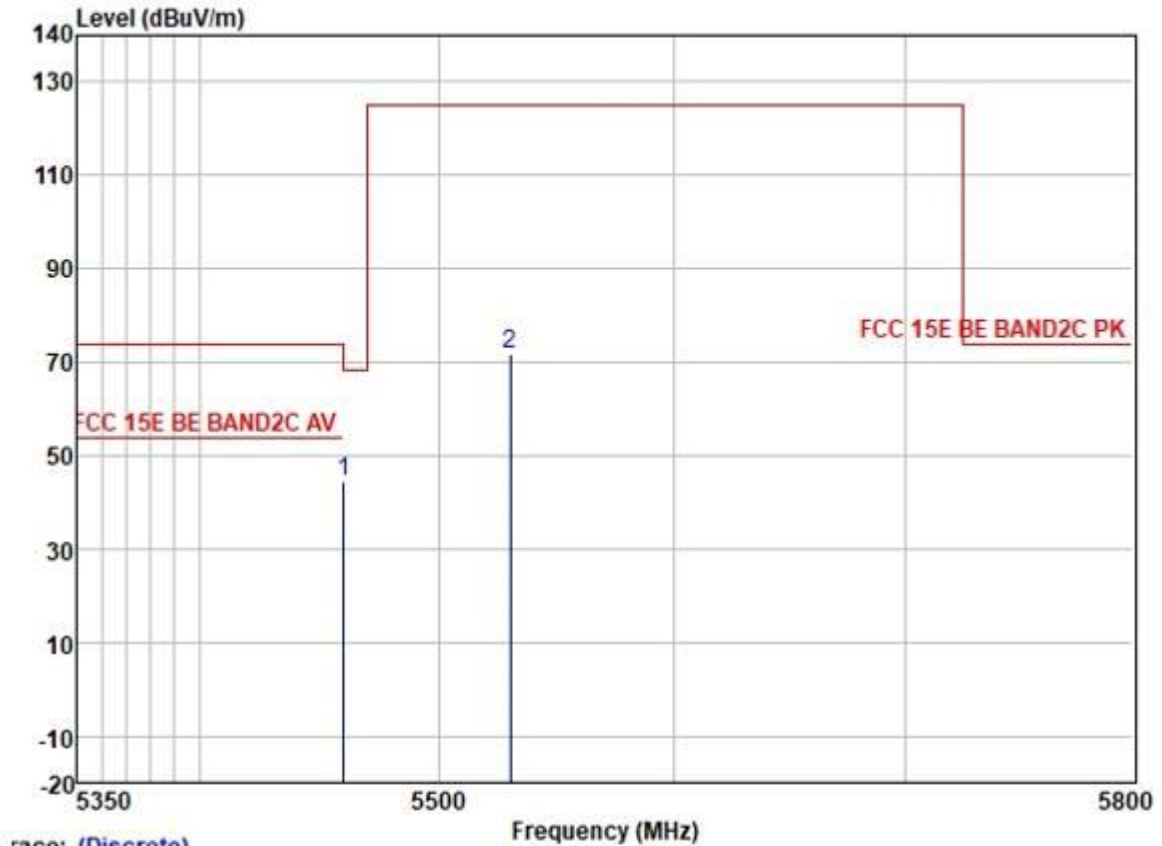


	Freq	Read	Antenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark
		Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5460.000	43.12	31.79	6.26	36.88	44.29	68.20	-23.91	HORIZONTAL	Peak
2	5530.000	70.22	31.83	6.37	36.89	71.53	125.20	-53.67	HORIZONTAL	Peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

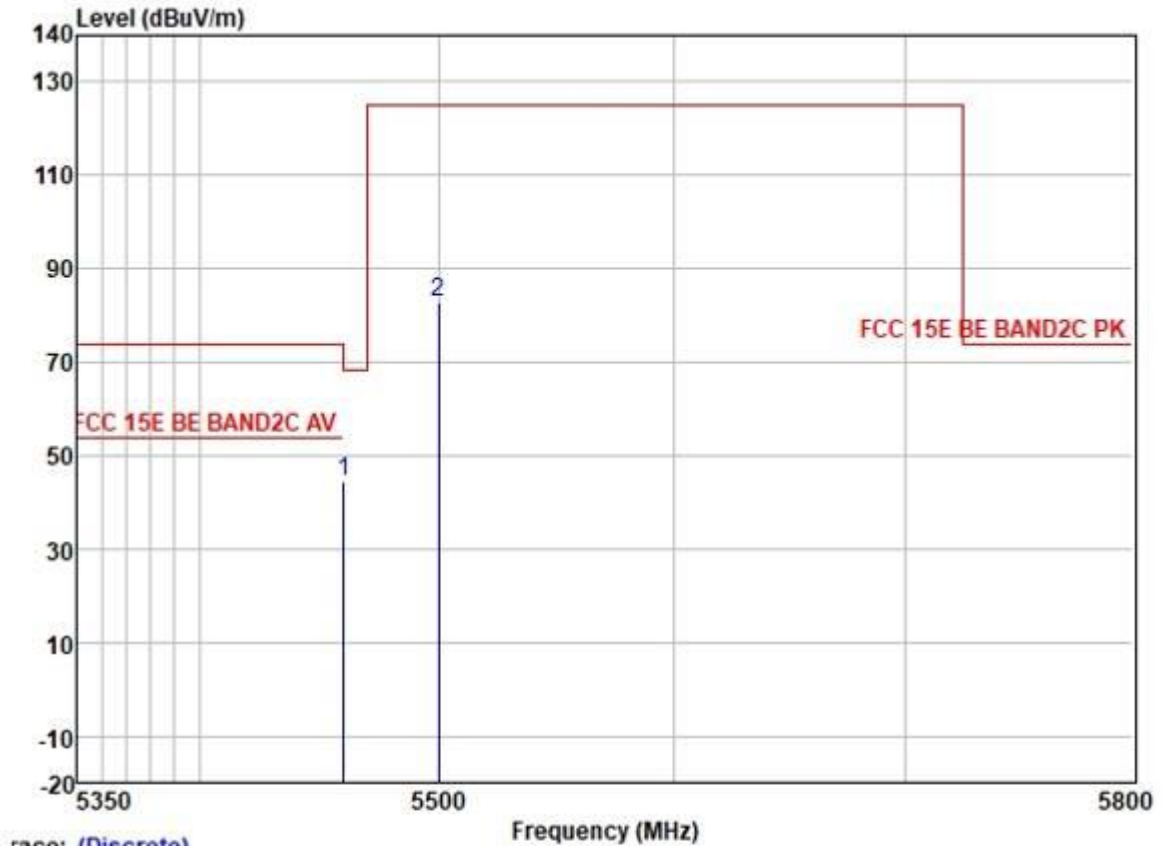


Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

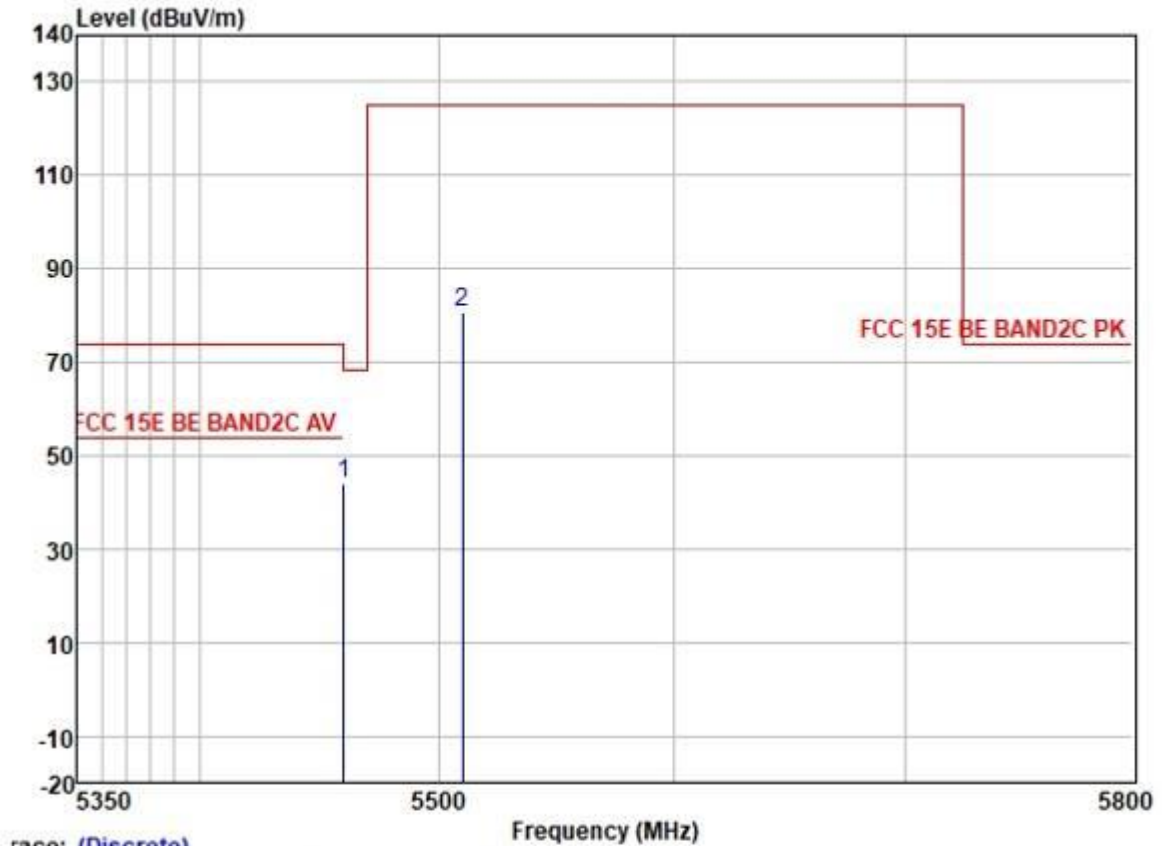

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5460.000	42.73	31.79	6.26	36.88	43.90	68.20	-24.30	VERTICAL	Peak
2	5510.000	79.52	31.80	6.40	36.88	80.84	125.20	-44.36	VERTICAL	Peak


Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

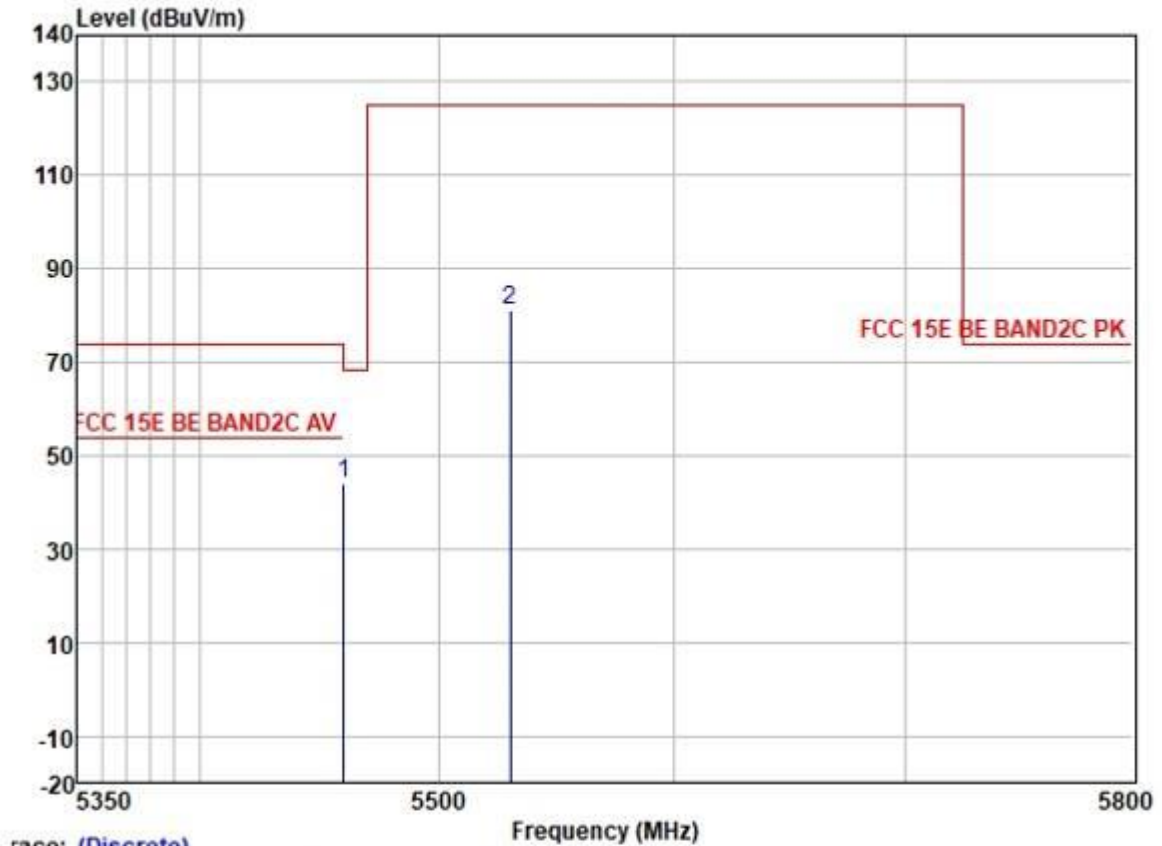

race: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5460.000	42.72	31.79	6.26	36.88	43.89	68.20	-24.31	VERTICAL	Peak
2	5530.000	79.75	31.83	6.37	36.89	81.06	125.20	-44.14	VERTICAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

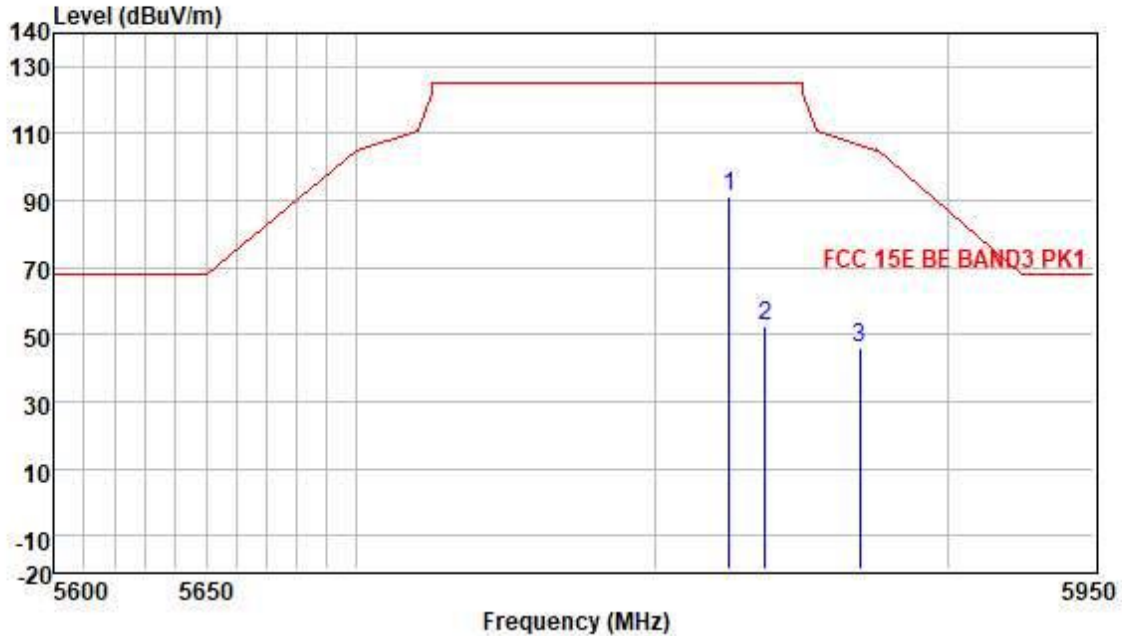


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.00	89.96	32.23	6.04	36.90	91.33	125.20	-33.87	HORIZONTAL	Peak
2	5837.36	51.04	32.23	6.04	36.90	52.41	125.20	-72.79	HORIZONTAL	Peak
3	5869.38	44.41	32.27	5.96	36.90	45.74	106.77	-61.03	HORIZONTAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

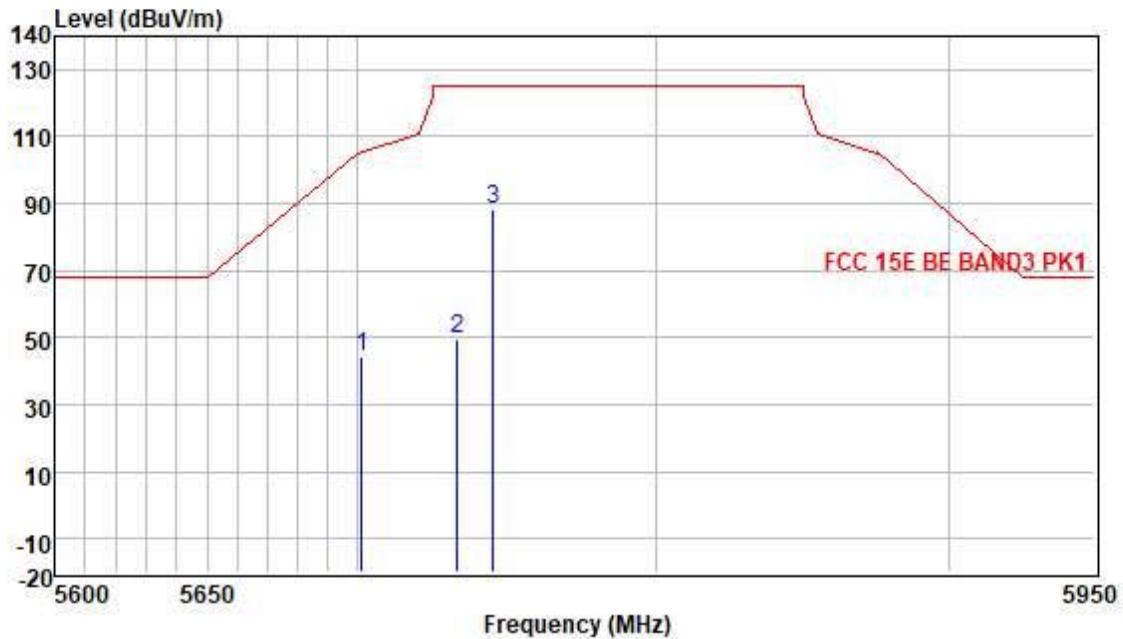


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5701.09	42.70	32.01	6.40	36.89	44.22	105.51	-61.29	HORIZONTAL	Peak
2	5733.03	48.35	32.07	6.25	36.89	49.78	125.20	-75.42	HORIZONTAL	Peak
3	5745.00	86.66	32.10	6.20	36.89	88.07	125.20	-37.13	HORIZONTAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

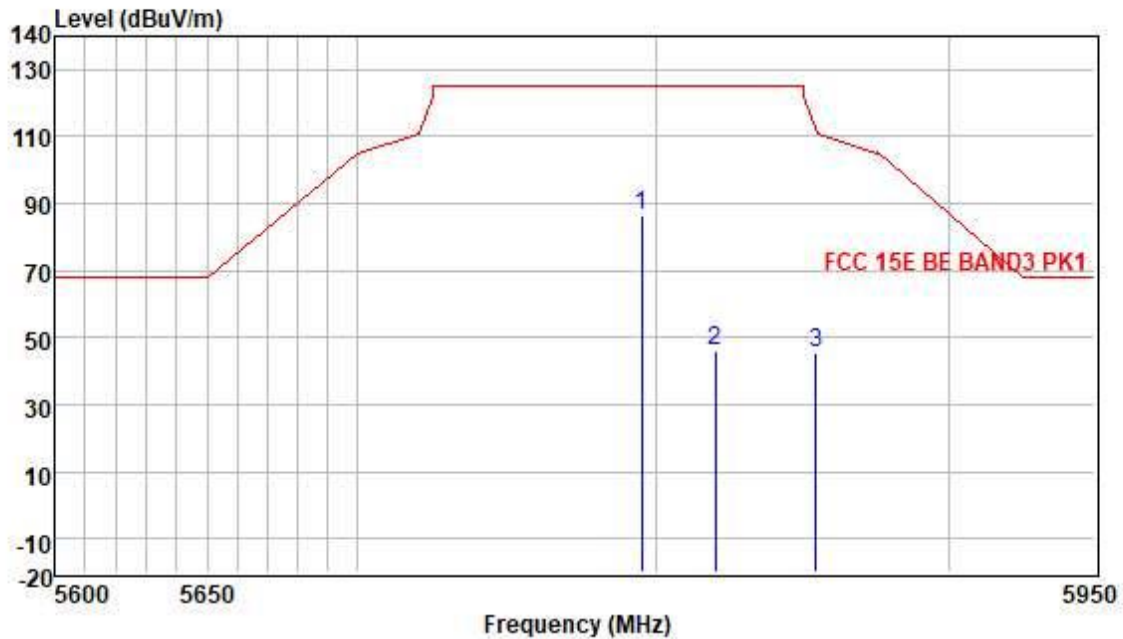


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5795.00	84.79	32.19	6.10	36.89	86.19	125.20	-39.01	HORIZONTAL	Peak
2	5819.82	44.63	32.21	6.07	36.90	46.01	125.20	-79.19	HORIZONTAL	Peak
3	5854.15	44.15	32.25	6.00	36.90	45.50	112.74	-67.24	HORIZONTAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

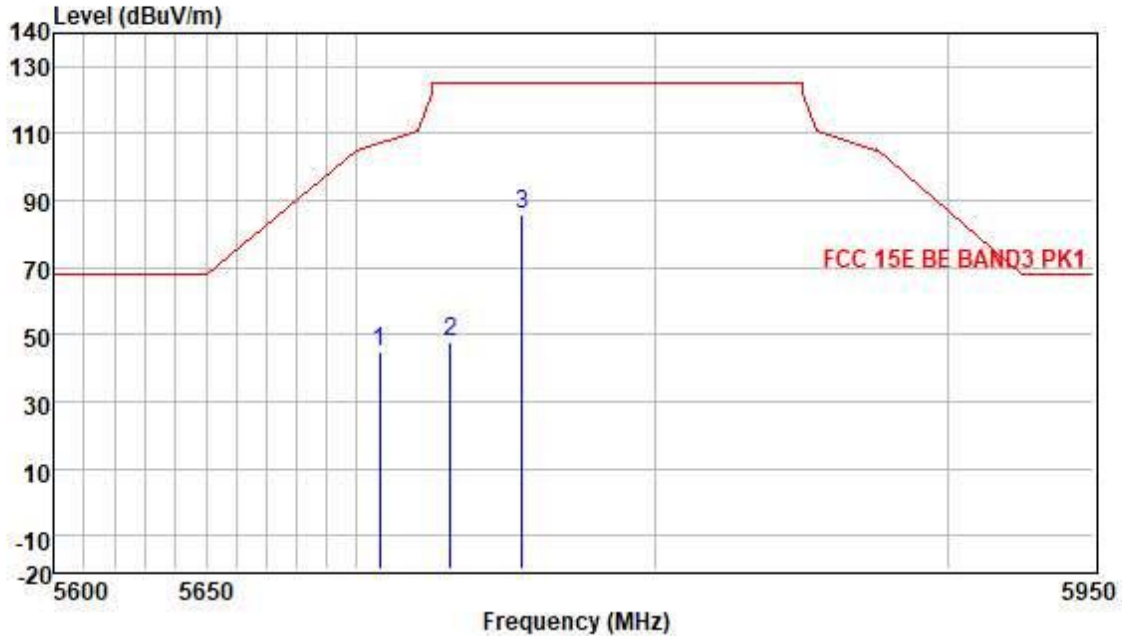


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5707.64	43.54	32.04	6.33	36.89	45.02	107.34	-62.32	HORIZONTAL	Peak
2	5731.25	46.55	32.07	6.25	36.89	47.98	125.20	-77.22	HORIZONTAL	Peak
3	5755.00	84.36	32.10	6.20	36.89	85.77	125.20	-39.43	HORIZONTAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

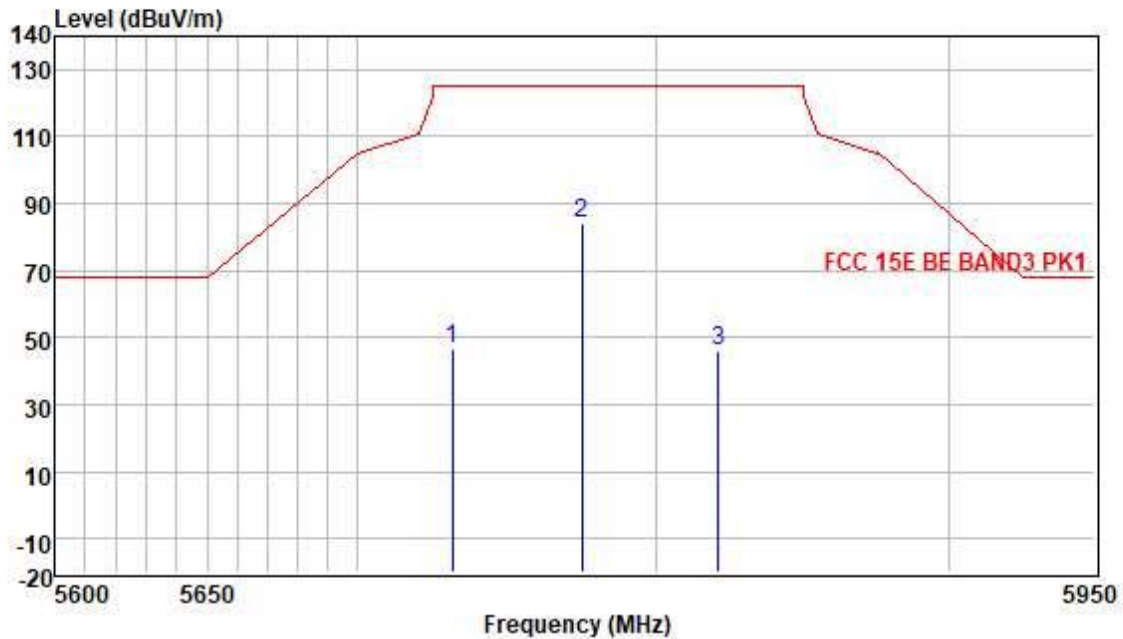

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5731.55	45.36	32.07	6.25	36.89	46.79	125.20	-78.41	HORIZONTAL	Peak
2	5775.00	82.91	32.16	6.10	36.89	84.28	125.20	-40.92	HORIZONTAL	Peak
3	5820.84	44.64	32.21	6.07	36.90	46.02	125.20	-79.18	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

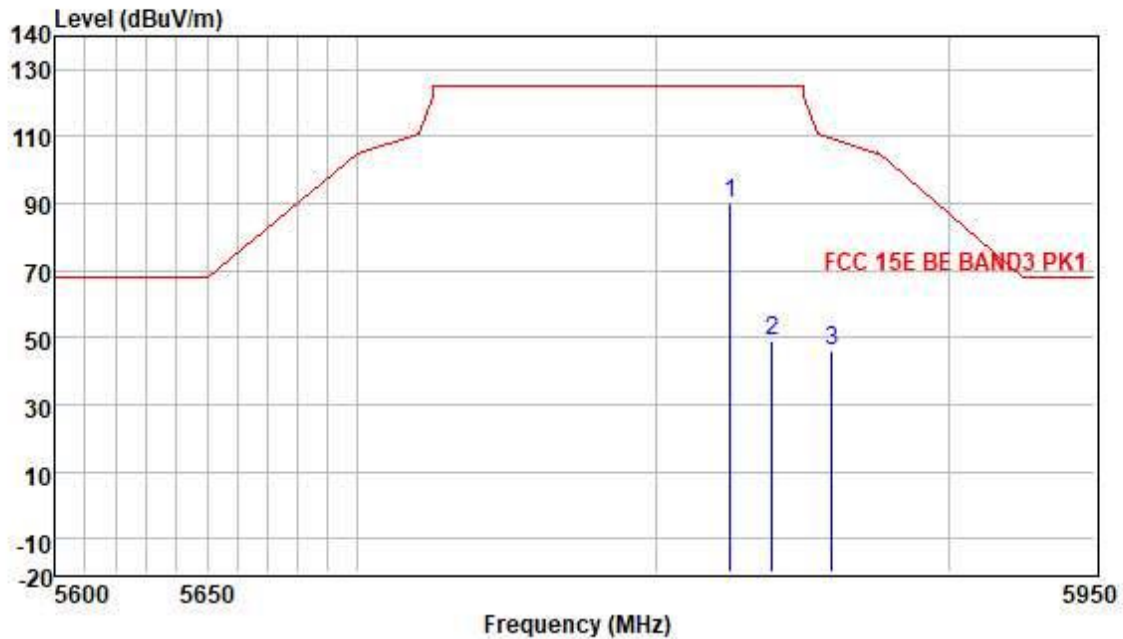


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.00	88.62	32.23	6.04	36.90	89.99	125.20	-35.21	VERTICAL	Peak
2	5839.35	47.61	32.25	6.00	36.90	48.96	125.20	-76.24	VERTICAL	Peak
3	5859.75	44.54	32.27	5.96	36.90	45.87	109.47	-63.60	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

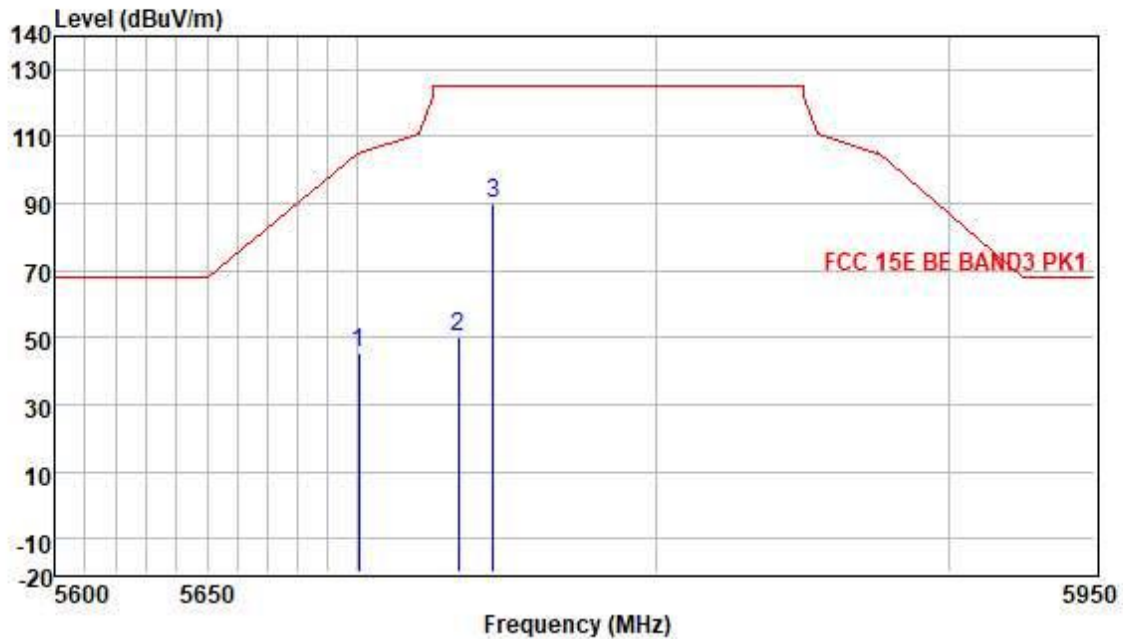


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5700.19	43.67	32.01	6.40	36.89	45.19	105.25	-60.06	VERTICAL	Peak
2	5733.43	49.05	32.07	6.25	36.89	50.48	125.20	-74.72	VERTICAL	Peak
3	5745.00	88.91	32.10	6.20	36.89	90.32	125.20	-34.88	VERTICAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

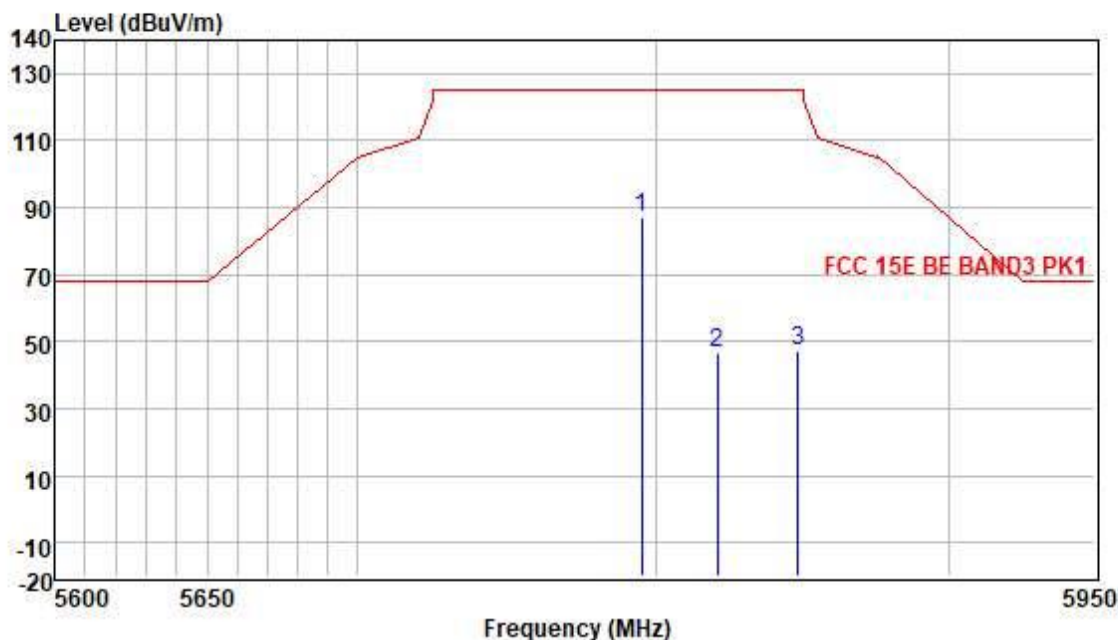


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5795.00	85.82	32.19	6.10	36.89	87.22	125.20	-37.98	VERTICAL	Peak
2	5820.82	45.00	32.21	6.07	36.90	46.38	125.20	-78.82	VERTICAL	Peak
3	5848.15	45.78	32.25	6.00	36.90	47.13	125.20	-78.07	VERTICAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

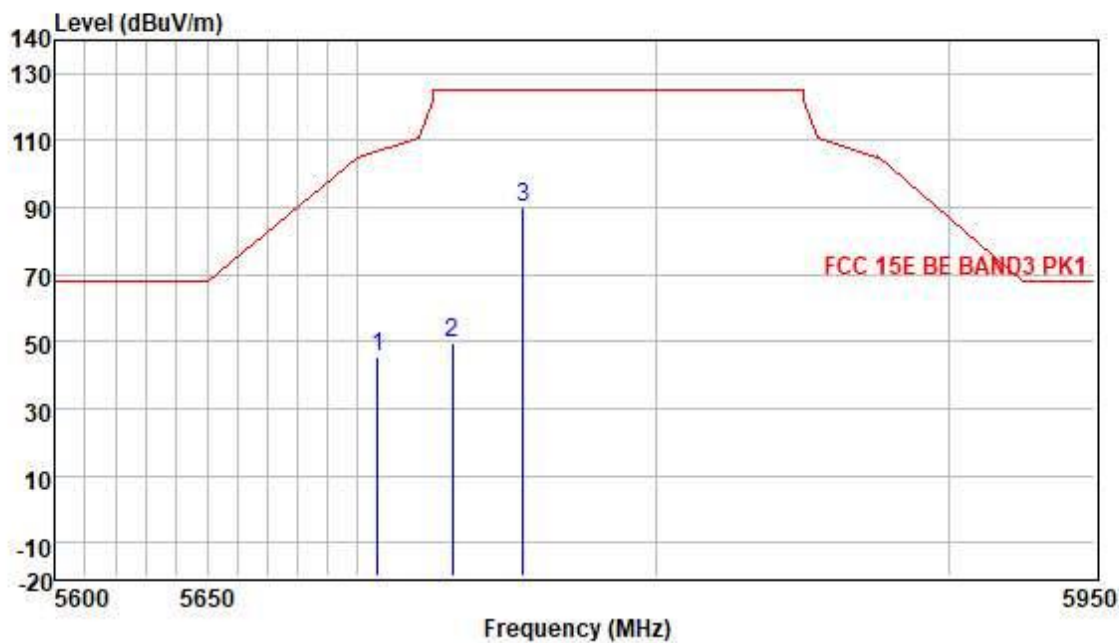

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5706.38	44.18	32.04	6.33	36.89	45.66	106.99	-61.33	VERTICAL	Peak
2	5731.53	48.03	32.07	6.25	36.89	49.46	125.20	-75.74	VERTICAL	Peak
3	5755.00	88.33	32.10	6.20	36.89	89.74	125.20	-35.46	VERTICAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

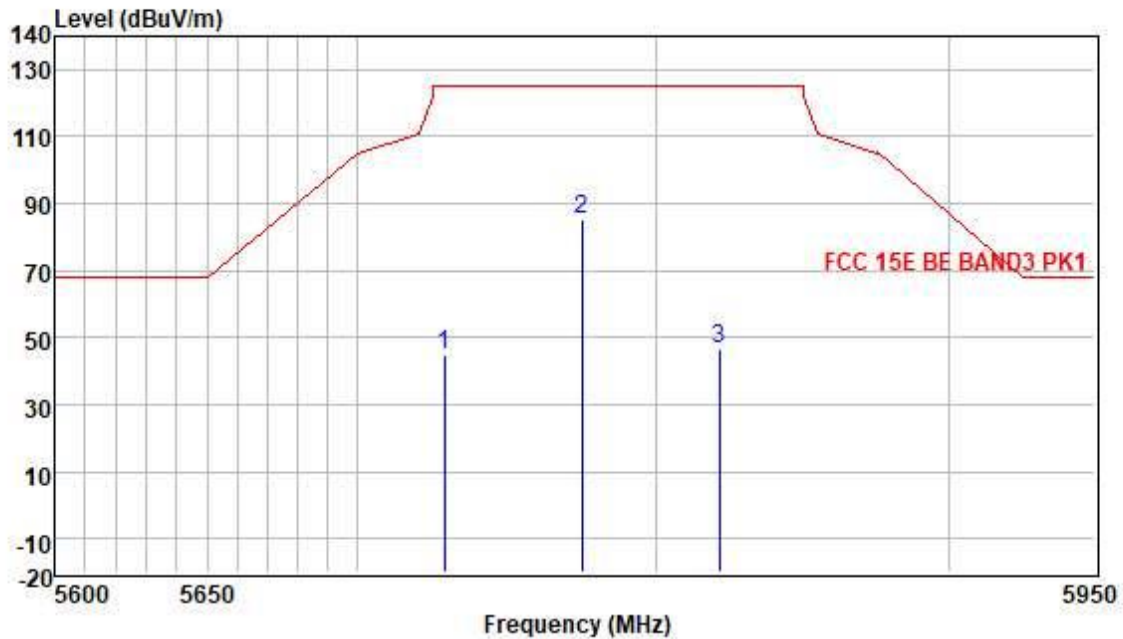

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5728.77	43.46	32.07	6.25	36.89	44.89	125.20	-80.31	VERTICAL	Peak
2	5775.00	84.12	32.16	6.10	36.89	85.49	125.20	-39.71	VERTICAL	Peak
3	5821.20	44.97	32.21	6.07	36.90	46.35	125.20	-78.85	VERTICAL	Peak

7.10 Band Edge

Test Requirement 47 CFR Part 15, Subpart C 15.407(b)
 Test Method: KDB 789033 D02 II
 Limit:

Frequency band(MHz)	Limit
5150-5250	-27dBm/MHz
5250-5350	-27dBm/MHz
5470-5725	-27dBm/MHz
5725-5850	Below 5650MHz & above 5925MHz, -27dBm/MHz 5650-5700MHz & 5875-5925MHz, 10dBm/MHz 5700-5720MHz & 5855-5875MHz, 15.6dBm/MHz 5720-5725MHz & 5850-5855MHz, 27dBm/MHz

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar


7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

Final test 09

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

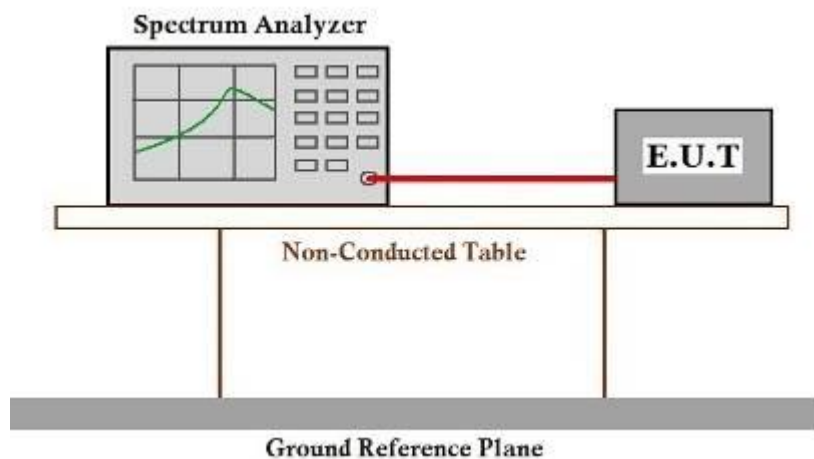

7.10.4 Measurement Procedure and Data

Please Refer To Appendix For Details

8 Appendix

Refer to Appendix _ FCC U-NII BANDS Test Results.

- End of the Report -