

Antenna specification


Electrical Specifications	
Frequency Range	2400—2500HZ
VSWR	≤2.0
GAIN	2.4DBI
Radiation	OMNI
Polarizatin	LINEAR
Input Impedance	50Ω
Mechanical Specifications	
Input connector	pcb
Working Temperature	- 30°C ~ + 80°C
Working Humidity	40~85%

Layout




Antenna Dimensions


unit : mm

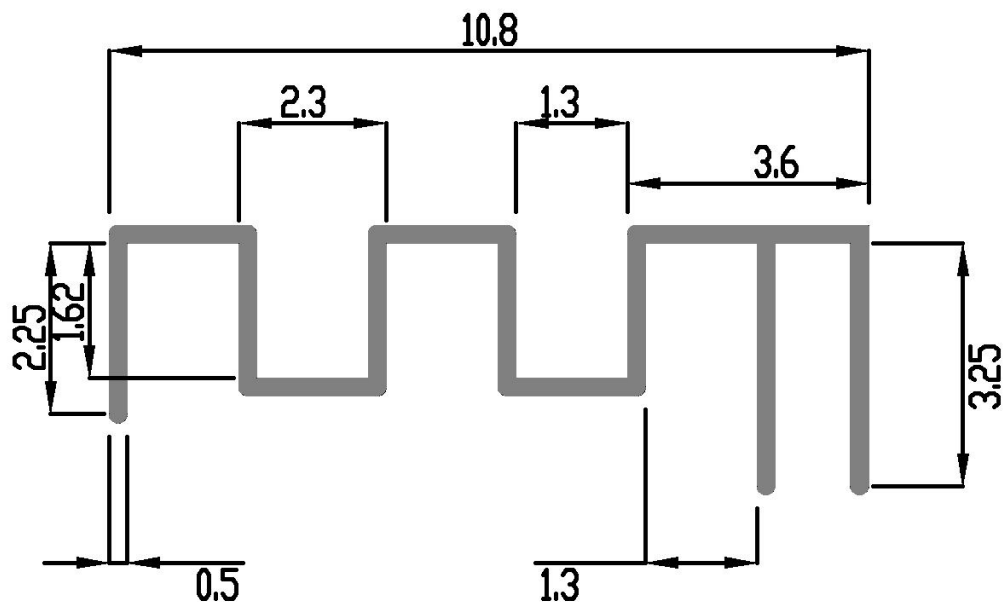


2400.00MHz - 2500.00MHz Efficiency

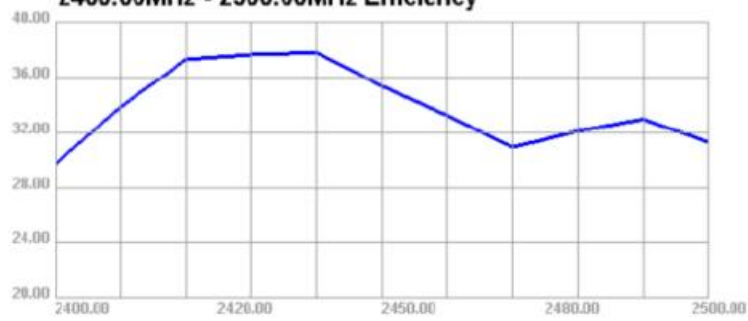


2400.000MHz

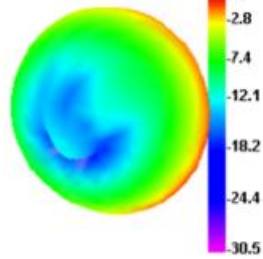


2400.000MHz H

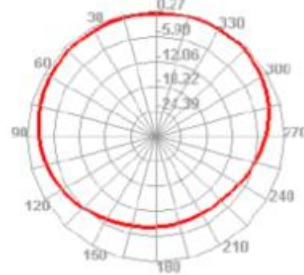


2400.000MHz E1

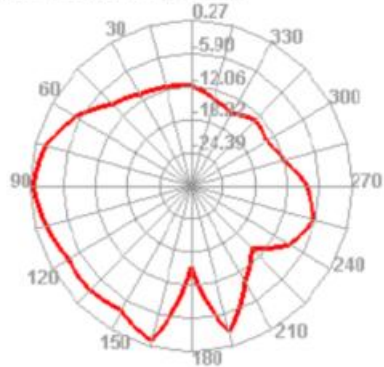


2400.000MHz E2

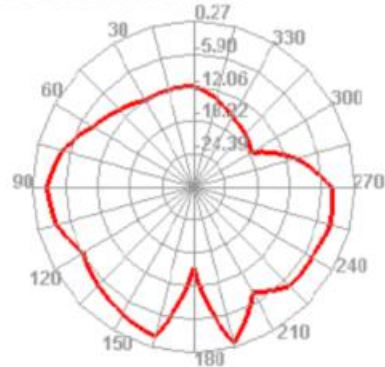


2450.000MHz

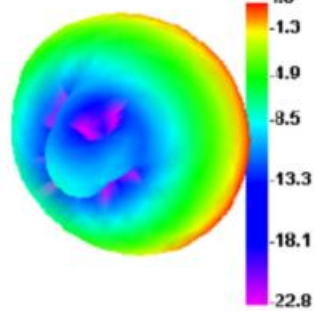


2450.000MHz H

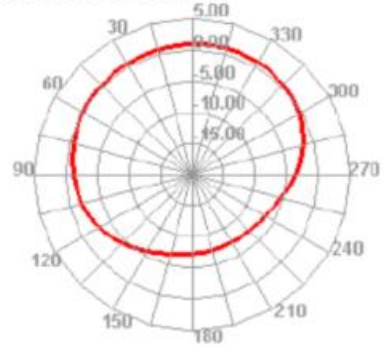


2450.000MHz E1

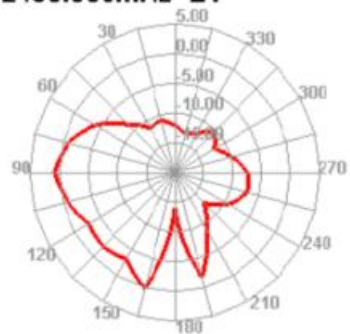


2450.000MHz E2

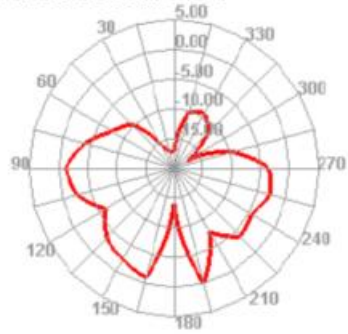


2500.000MHz

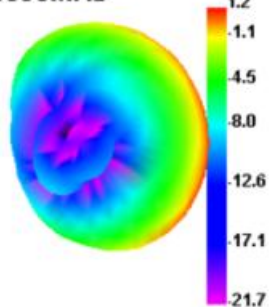


2500.000MHz H

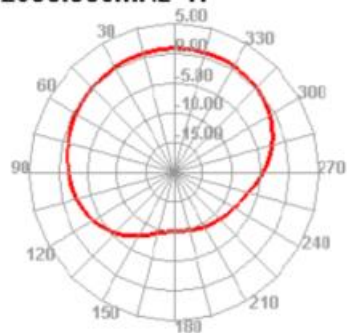

2500.000MHz E1

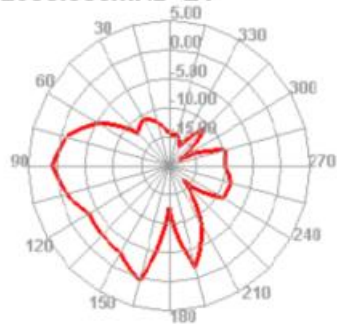

2500.000MHz E2

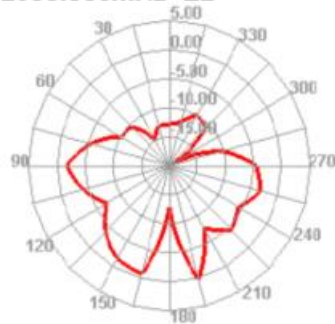

Manufacturer: Shenzhen Jinmaigao Intelligent Technology Co., Ltd.

Address: Room 1103, Jintongsheng International Building, Guanlan Town, Longhua District, Shenzhen