



东莞市亚富智能科技有限公司

DongGuan YaFai Intelligent Technology Co.,ltd

承 认 书

APPROVAL SHEET

物 料 名 称

Product Name: PKE Bare antenna

物 料 描 素

Specification: AP2.5x8x50mm/HD-Mn,345uH $\pm$ 5% @125KHz/1V, 配 Fala472J630V P=7.5 capacitance

物 料 编 号

Part N.O: LF50M351J-125K-NF

客 户 名 称

Customer Name: A surname祥行

版 本


Version : VR0

日 期

Date : 2024-08-16

供 应 商 确 认

APPROVED BY VENDOR

制作 Prepared By	审核 Checked By	批准 Approved By
Yang	Tongwony	 Tongwony

客 户 确 认

APPROVED BY CUSTOMER

确认 Approved By	审核 Checked By	批准 Approved By

Tel: 86-0769-8225 8010 Fax: 86-0769-8225 8020

E-mail: sales@myx555.com Web Site: www.myx555.com

Add: 东莞市虎门镇大宁社区大板路 66 号万亨科技园 A 栋三楼 B 区 Zone B, 3rd Floor, Building A, Wanheng Science Park, No. 66, Daban Road, Daning Community, Humen Town, Dongguan City



东莞市亚富智能科技有限公司


DongGuan YaFai Intelligent Technology Co.,ltd

变更履历表Change the resume

版本 Versions	变更内容描述Change description	project	date
VR0	初次发行Initial offering	杨星海 Yang Xinghai	2024-08-16



一、产品外形尺寸 Dimension(mm):

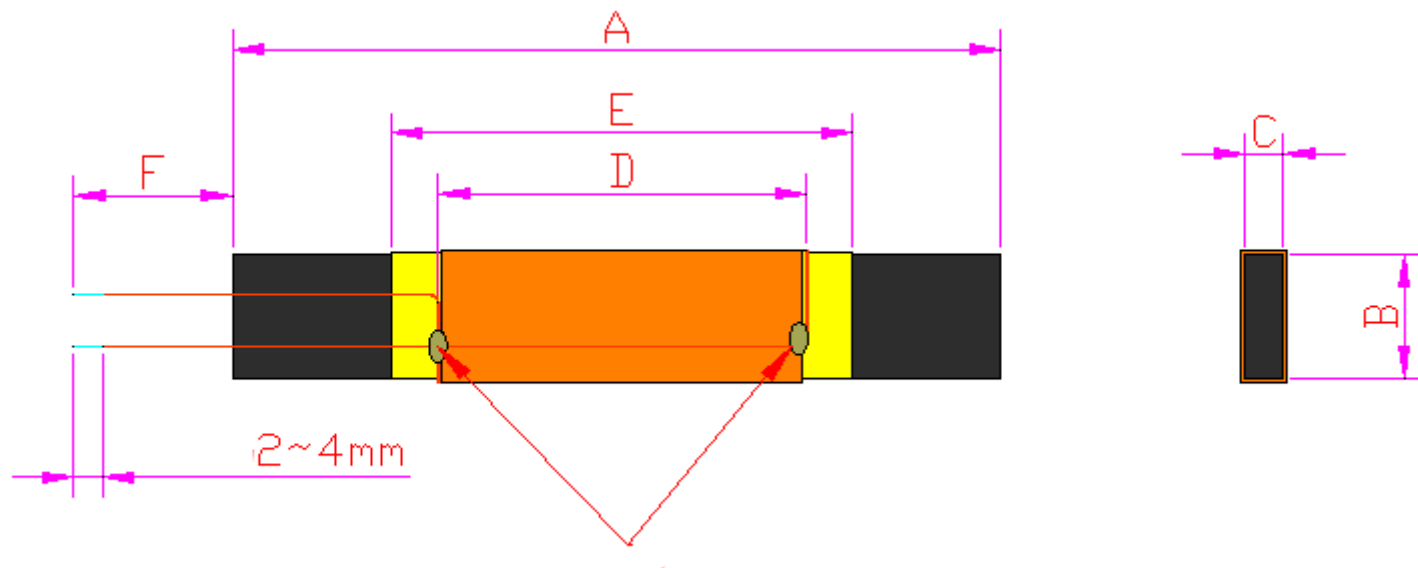


A	B	C	D	E	F	
50+0.3/-0.7	8±0.3	2.5±0.2	32±2	2~4	50±5	mm

二、主要材料 Main Material:

Item	Material	Description	Remark
1	Ferrite Core	AP2.5x8x50mm/HD-Mn	
2	Copper Wire	Φ0.25mm/2UE-N 155° C	
3	Capacitor	Fala 472J630V P=7.5	

三、等效原理图 Schematic:



Notes:

1. L :Ferrite Core Coil Inductance 电感;
2. C:Capacitor 电容;
3. R:Copper Resistance 铜线阻抗;
4. Z:Impedance 阻抗



四、电气性能 Electrical Characteristics:

Parameter (参数)	Symbol (符号)	Conditions (测试条件)	Min. (最小值)	Avg. (平均值)	Max. (最大值)	Unit (单位)
Inductance (电感量)	L	125KHz/1V	327.75	345	362.25	uH
Q min Coil (品质因素)	Q	125KHz/1V	150	180		NA
Capacitor (电容量)	C	1KHz/1V	4.465	4.7	4.935	nF
Frequency (频率)	F	NA	122.5	125	127.5	KHz
Impedance (阻抗)	Z	125KHz/1V	0.5	3.5	10.0	Ω

温馨提示:

(At $T_A=25^{\circ}\text{C}$)环境温度 25 摄氏度测试;

金属会弱化磁场, 靠近金属会引起电感量和 Q 值的改变, 请尽量远离金属。

五、包装 Package:

1、内包装: 裸天线与电容(电容不切脚)分开包装, 对应档位匹配出货;

2、外包装 (外箱 K=A440*320*150mm)

待定

Warm reminder:

(At $T_A=25$) Ambient temperature 25 test;

Metal will weaken the magnetic field, close to metal will cause inductance and Q value change, please try to stay away from metal.

5. Package:

1. Inner packaging: the bare antenna and the capacitor (the capacitor does not cut the foot) are packaged separately, and the corresponding gear matches the shipment;

2. Outer packing (outer box K=A440*320*150mm)
pending