



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640


Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20250200364E-03
Applicant: Icarsoft Technology Inc.
Address of Applicant: 1629 K St. Suite 300 N.W.Washington D.C.,20006 United States.
Equipment Under Test (EUT):
Product: PROFESSIONALMULTI-SYSTEM CAR DAGNOSTIC TOOL
Model No.: BMM V4.0, LR V4.0, MB V4.0, VAWS V4.0, POR V4.0, VOL V4.0, OP V4.0, FR V4.0, US V4.0, JP V4.0, DE V4.0, CR Elite P, CR Pro S, CR V3.0, CR Genius
Test Model No.: BMM V4.0
Brand Name: 
FCC ID: 2AWD8-UNIQUEV40
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013
Date of Receipt: 2025-02-26
Date of Test: 2025-02-26 to 2025-04-22
Date of Issue: 2025-05-08
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: *Lewis Zhou*
(Lewis Zhou)

Reviewed By: *Timo Lei*
(Timo Lei)

Approved By: *Jack Ai*
(Jack Ai)





Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250200364E-03	Rev.01	Initial report	2025-05-08

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	3
2 TEST SUMMARY	4
3 CONTENTS	5
4 GENERAL INFORMATION	7
4.1 CLIENT INFORMATION	7
4.2 GENERAL DESCRIPTION OF EUT	7
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
4.4 TEST ENVIRONMENT AND MODE	10
4.5 DESCRIPTION OF SUPPORT UNITS	14
4.6 TEST LOCATION	14
4.7 TEST FACILITY	14
4.8 TEST CONFIGURATION	14
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY	15
4.10 DEVIATION FROM STANDARDS	15
4.11 ABNORMALITIES FROM STANDARD CONDITIONS	15
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER	15
4.13 EQUIPMENT LIST	16
5 TEST RESULTS AND MEASUREMENT DATA	17
5.1 ANTENNA REQUIREMENT	17
5.2 CONDUCTED EMISSIONS	18
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	22
<i>Test Result</i>	23
<i>Note: Duty cycle correction factor details please see section 4.4</i>	23
<i>When Duty cycle >98%, D.C.F is not required.</i>	23
<i>Test Graphs</i>	24
5.4 99% OCCUPIED BANDWIDTH	29
<i>Test Result</i>	30
<i>Test Graphs</i>	31
5.5 6DB OCCUPIED BANDWIDTH	36
<i>Test Result</i>	37
<i>Test Graphs</i>	38
5.6 POWER SPECTRAL DENSITY	43
<i>Test Result</i>	44
<i>Test Graphs</i>	45
5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS	50
<i>Test Result</i>	51
5.7.1 <i>Test Graphs</i>	52
5.8 RF CONDUCTED SPURIOUS EMISSIONS	56
<i>Test Result</i>	57
<i>Test Graphs</i>	59
5.9 RADIATED SPURIOUS EMISSIONS	74
5.9.1 <i>Radiated emission below 1GHz</i>	77
5.9.2 <i>Transmitter emission above 1GHz</i>	79
5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	87
6 PHOTOGRAPHS - EUT TEST SETUP	93
6.1 RADIATED SPURIOUS EMISSION	93
6.2 CONDUCTED EMISSION	94
6.3 RF CONDUCTED MEASUREMENT	95




7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	96
--	----

4 General Information

4.1 Client Information

Applicant:	Icarsoft Technology Inc.
Address of Applicant:	1629 K St. Suite 300 N.W.Washington D.C.,20006 United States.
Manufacturer:	Icarsoft Technology Inc.
Address of Manufacturer:	1629 K St. Suite 300 N.W.Washington D.C.,20006 United States.
Factory:	Dongguan Yongdong Electronic Technology Co.,Ltd
Address of Factory:	No.10,4th Street,Zhangyang Fuzhu Industrial Zone,Zhangmutou town,Dongguan City

4.2 General Description of EUT

Product Name:	PROFESSIONALMULTI-SYSTEM CAR DAGNOSTIC TOOI
Model No.:	BMM V4.0, LR V4.0, MB V4.0, VAWS V4.0, POR V4.0, VOL V4.0, OP V4.0, FR V4.0, US V4.0, JP V4.0, DE V4.0, CR Elite P, CR Pro S, CR V3.0, CR Genius
Test Model No.:	BMM V4.0
Trade Mark:	
Software Version:	24.09
Hardware Version:	RC-K1014
Power Supply:	Li-ion battery: DC 3.7V 5000mAh, Charge by DC 5V 2A for adapter Adapter: Model No.:BI12T-050200-BdVU Input:100-240V~50/60Hz 0.5A Output:5V 2.0A 10W
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz
Simultaneous Transmission	<input type="checkbox"/> Simultaneous TX is supported and evaluated in this report. <input checked="" type="checkbox"/> Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g :

	6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
Test Software of EUT:	Android
Antenna Type:	FPC antenna
Antenna Gain:	1.83dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz


For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

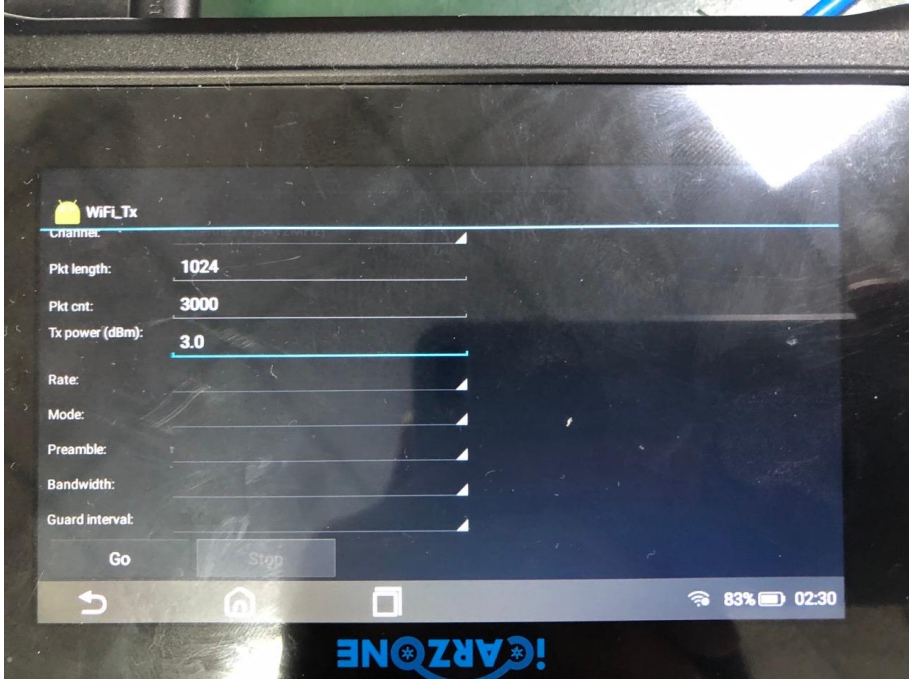
Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class13
Run Software:	
	

Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	0.99	1.00	99.00	/
IEEE802.11g	50.00	50.00	100.00	/
IEEE802.11n (HT20)	50.00	50.00	100.00	/
IEEE802.11n (HT40)	50.00	50.00	100.00	/

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_ IEEE802.11b Duty Cycle:

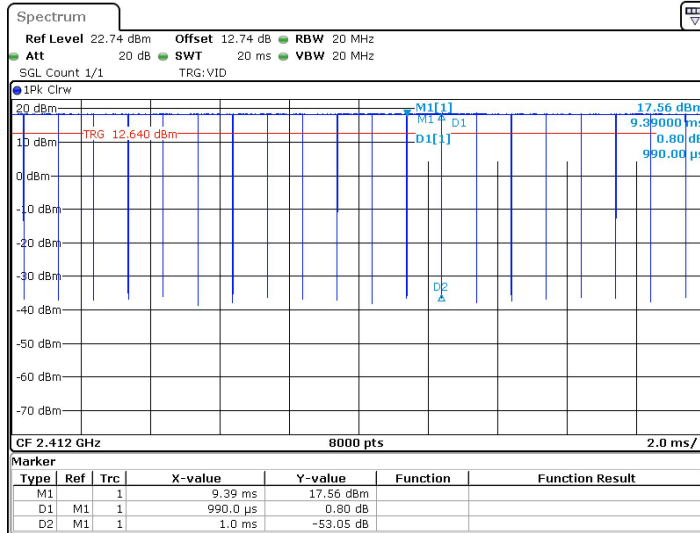


Date: 21.MAR.2025 10:12:50

Test Graph_ IEEE802.11g Duty Cycle:

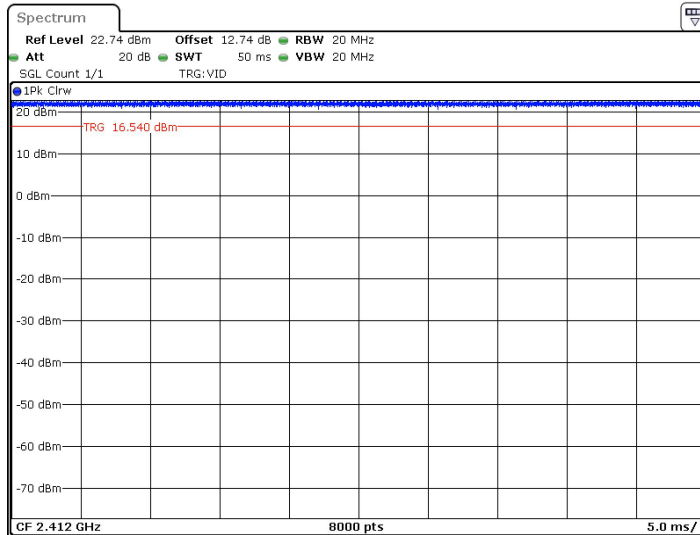


Date: 4.MAR.2025 11:21:53

Test Graph_ IEEE802.11 n (HT20) Duty Cycle:

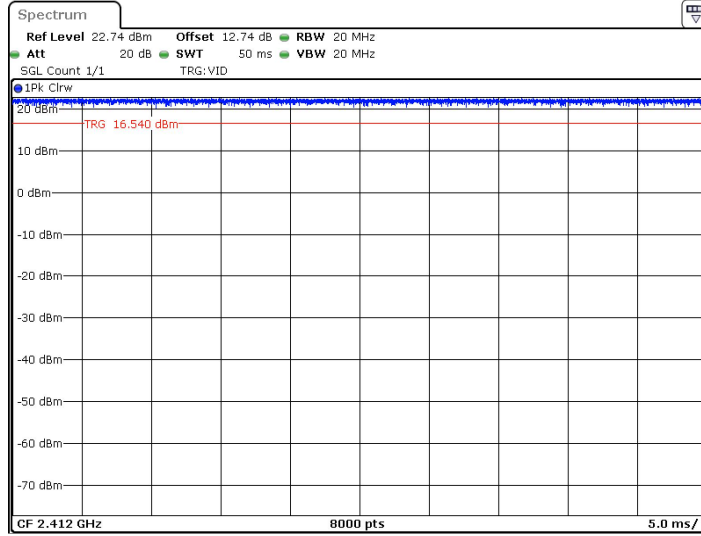

Date: 4.MAR.2025 11:28:21

Test Graph_ IEEE802.11 n (HT40) Duty Cycle:

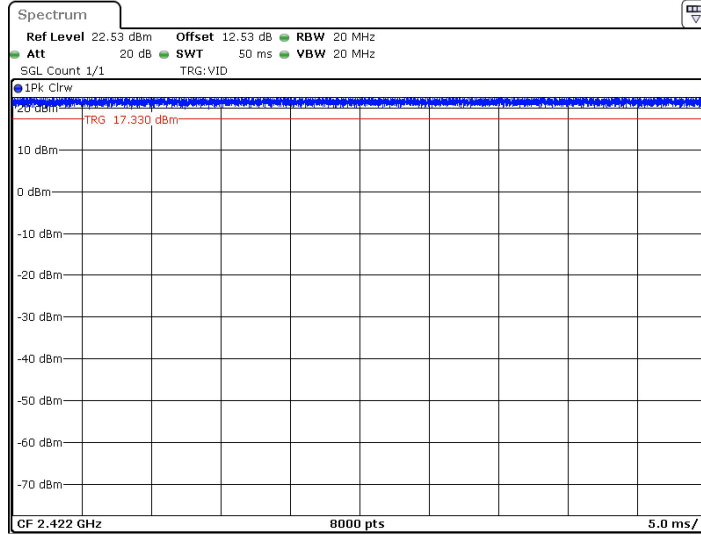

Date: 4.MAR.2025 11:36:13

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:


• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

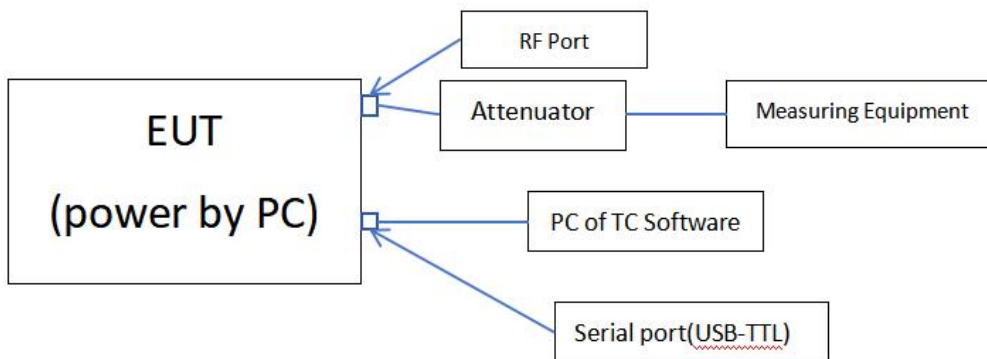

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Power meter	R&S	NRVD	CQA-029	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2	2025/9/1

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

5 Test results and Measurement Data

5.1 Antenna Requirement

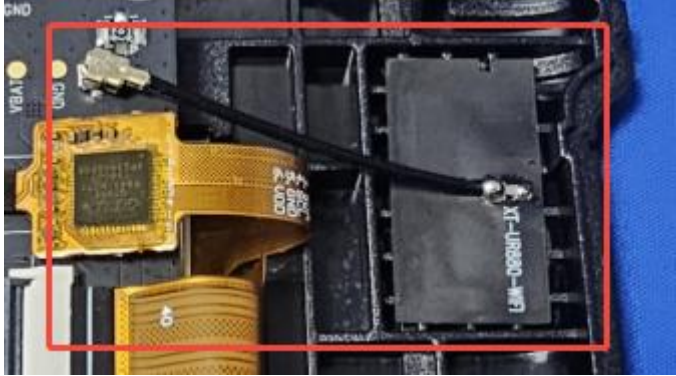Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	
<p>The antenna is FPC antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling This is either permanently attachment or a unique coupling that satisfies the requirement.</p>	


5.2 Conducted Emissions

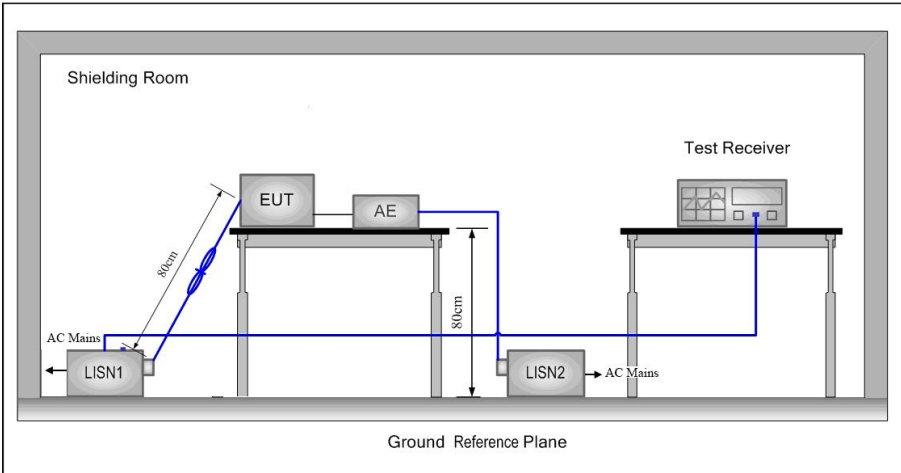Test Requirement:	47 CFR Part 15C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	150kHz to 30MHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency range (MHz)		Limit (dBuV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
	0.5-5	56	46												
5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room.														
	2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.														
	3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,														
	4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.														
	5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Setup:															

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

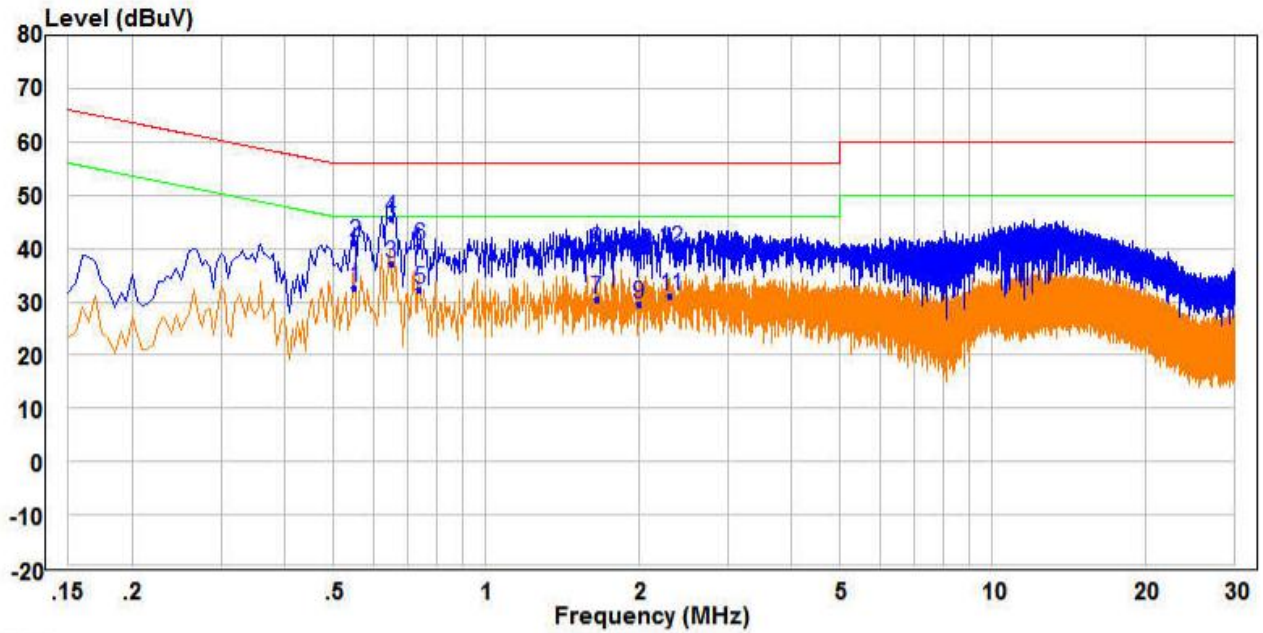


	Read Freq	Read Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.550	22.76	9.75	32.51	46.00	-13.49	Average	Line
2	0.550	31.36	9.75	41.11	56.00	-14.89	QP	Line
3	0.650	27.27	9.85	37.12	46.00	-8.88	Average	Line
4	0.650	35.89	9.85	45.74	56.00	-10.26	QP	Line
5	0.740	22.36	9.87	32.23	46.00	-13.77	Average	Line
6	0.740	30.75	9.87	40.62	56.00	-15.38	QP	Line
7	1.655	19.49	11.11	30.60	46.00	-15.40	Average	Line
8	1.655	28.43	11.11	39.54	56.00	-16.46	QP	Line
9	2.000	17.81	11.65	29.46	46.00	-16.54	Average	Line
10	2.000	27.53	11.65	39.18	56.00	-16.82	QP	Line
11	2.310	19.68	11.35	31.03	46.00	-14.97	Average	Line
12	2.310	28.48	11.35	39.83	56.00	-16.17	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

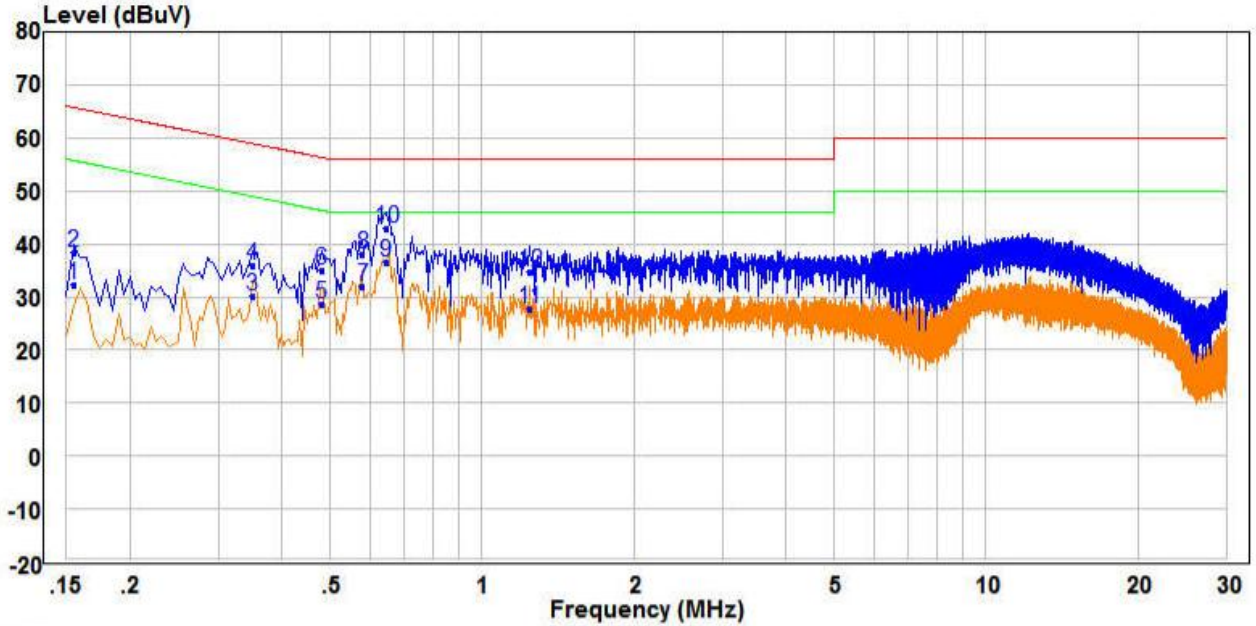



	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.155	22.50	9.69	32.19	55.73	-23.54	Average	Neutral
2	0.155	28.78	9.69	38.47	65.73	-27.26	QP	Neutral
3	0.350	20.71	9.55	30.26	48.96	-18.70	Average	Neutral
4	0.350	26.48	9.55	36.03	58.96	-22.93	QP	Neutral
5	0.480	19.09	9.68	28.77	46.34	-17.57	Average	Neutral
6	0.480	25.48	9.68	35.16	56.34	-21.18	QP	Neutral
7	0.580	22.22	9.78	32.00	46.00	-14.00	Average	Neutral
8	0.580	28.30	9.78	38.08	56.00	-17.92	QP	Neutral
9 PP	0.645	26.62	9.85	36.47	46.00	-9.53	Average	Neutral
10 QP	0.645	33.13	9.85	42.98	56.00	-13.02	QP	Neutral
11	1.240	18.17	9.71	27.88	46.00	-18.12	Average	Neutral
12	1.240	24.99	9.71	34.70	56.00	-21.30	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p><i>Setup for Power meter measurement method</i></p>  <p><i>Setup for Spectrum analyser measurement method</i></p> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result


Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	15.66	≤30.00	PASS
	2437	15.29	≤30.00	PASS
	2462	14.18	≤30.00	PASS
11G	2412	16.14	≤30.00	PASS
	2437	16.76	≤30.00	PASS
	2462	15.04	≤30.00	PASS
11N20SISO	2412	15.92	≤30.00	PASS
	2437	16.74	≤30.00	PASS
	2462	15.02	≤30.00	PASS
11N40SISO	2422	16.19	≤30.00	PASS
	2437	15.76	≤30.00	PASS
	2452	15.22	≤30.00	PASS

Note: Duty cycle correction factor details please see section 4.4.

When Duty cycle >98%, D.C.F is not required.


Test Graphs

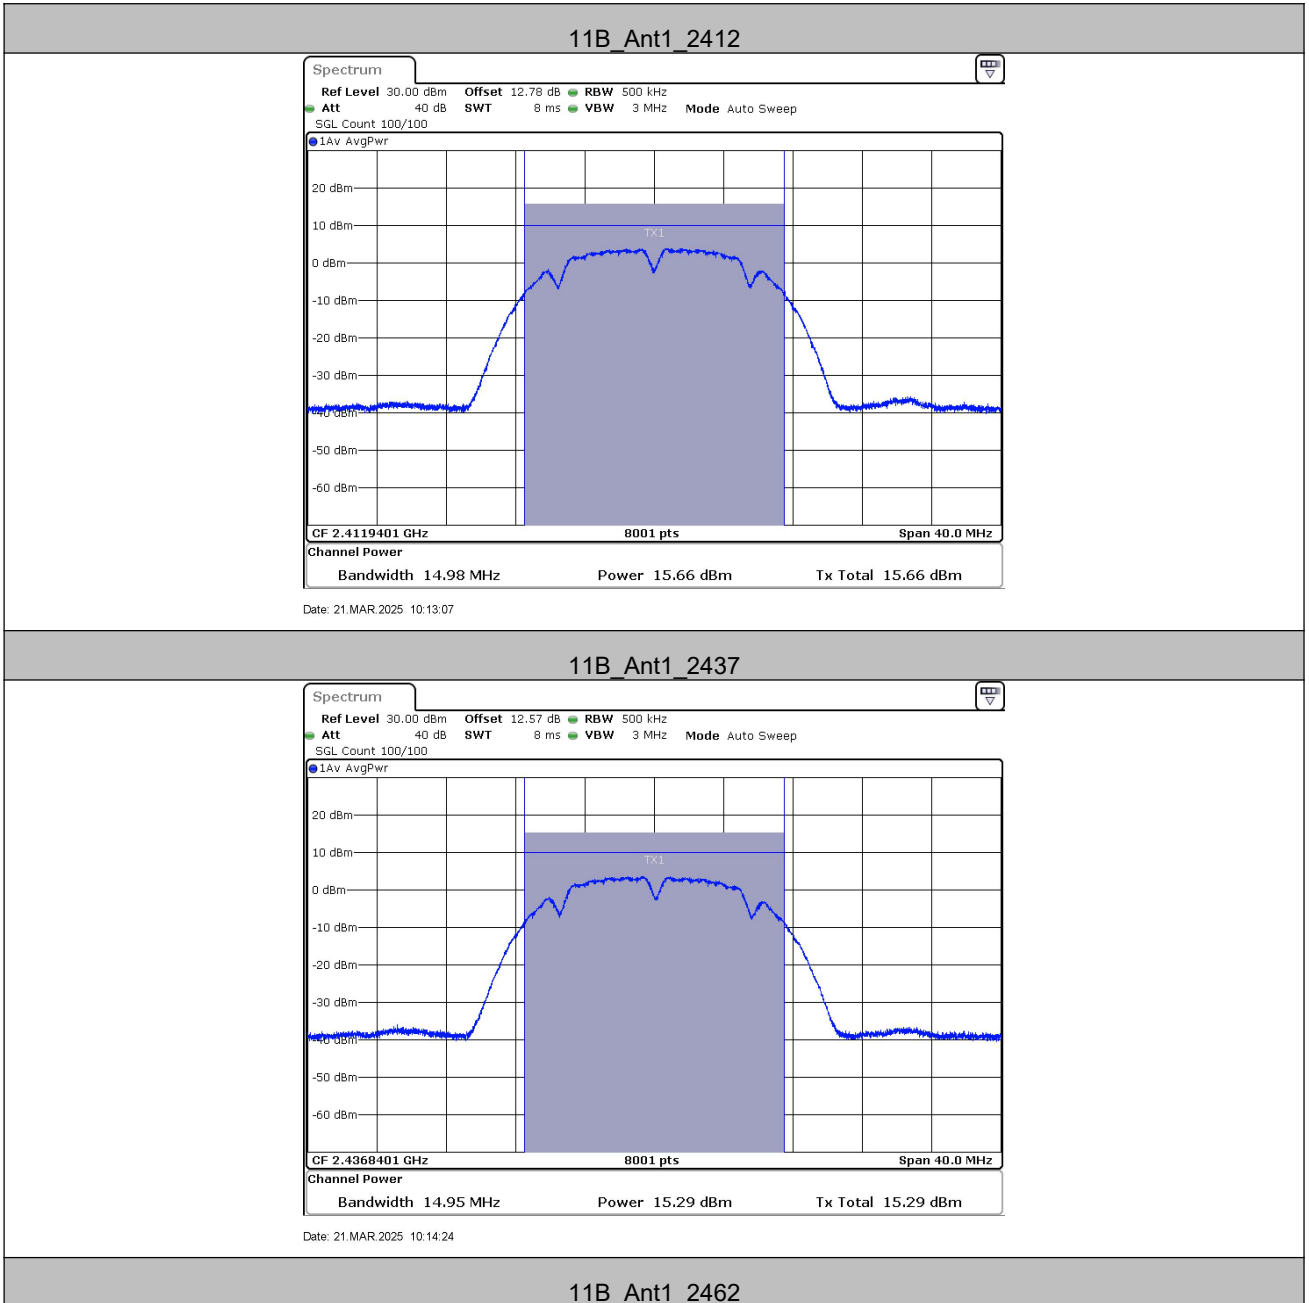

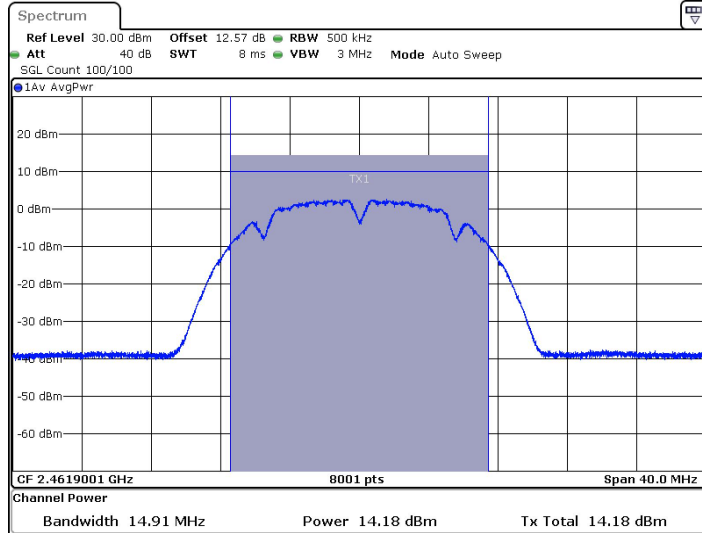


Date: 21.MAR.2025 10:15:41

11G_Ant1_2412

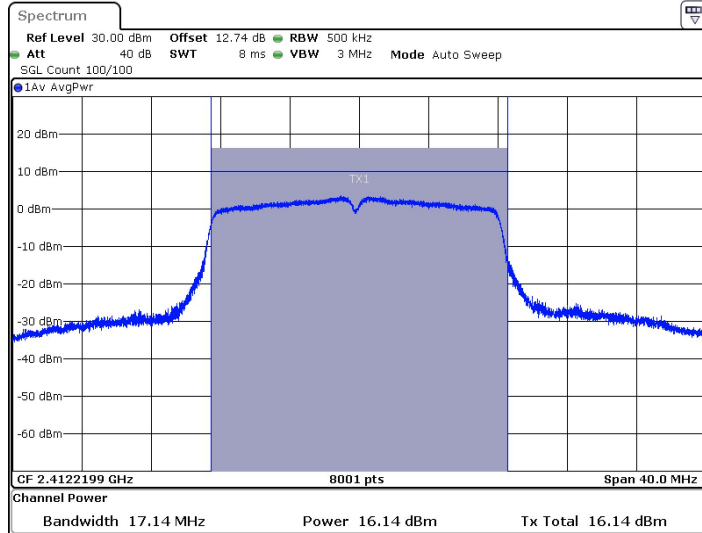


Date: 4.MAR.2025 11:22:10

11G_Ant1_2437

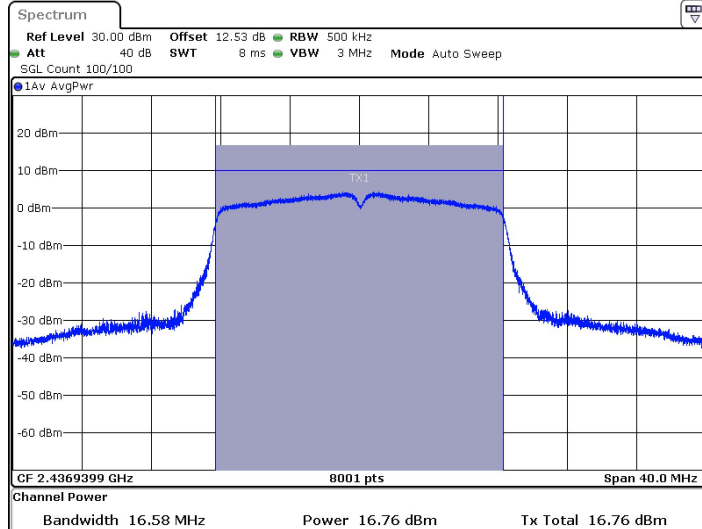


Date: 4.MAR.2025 11:24:44

11G_Ant1_2462

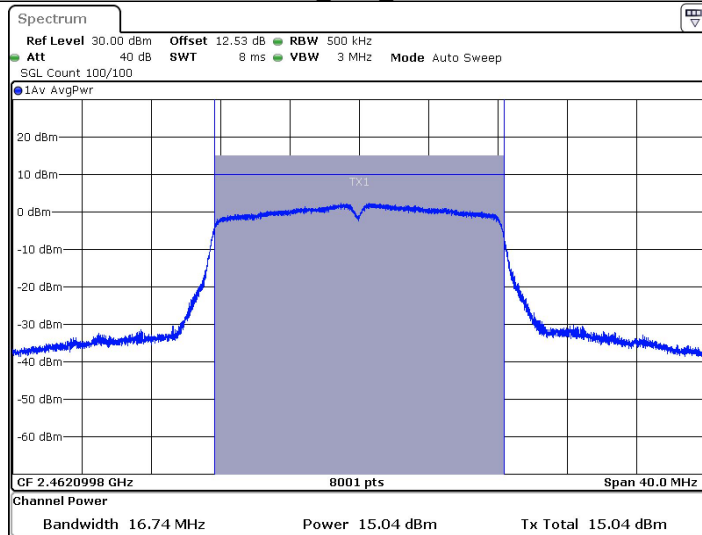


Date: 4.MAR.2025 11:26:13

11N20SISO_Ant1_2412

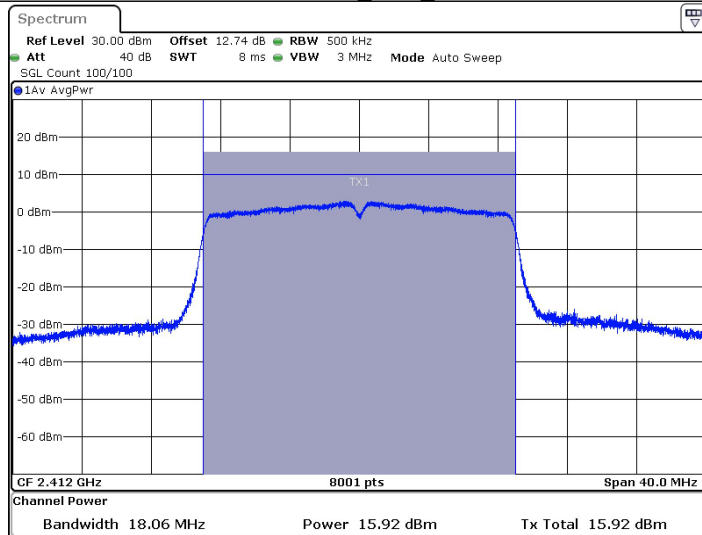


Date: 4.MAR.2025 11:28:38

11N20SISO_Ant1_2437

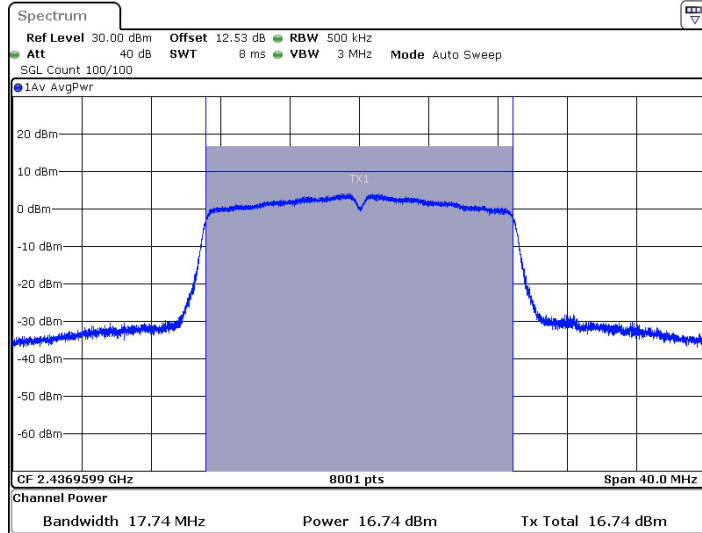


Date: 4.MAR.2025 11:32:41

11N20SISO_Ant1_2462

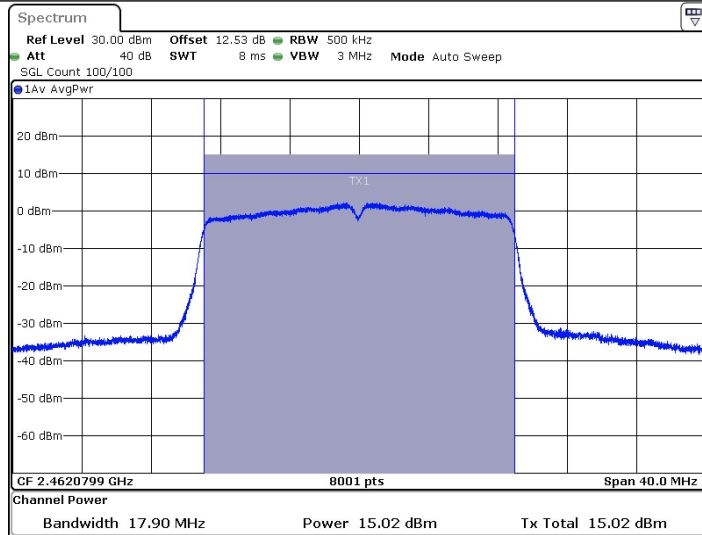


Date: 4.MAR.2025 11:34:29

11N40SISO_Ant1_2422

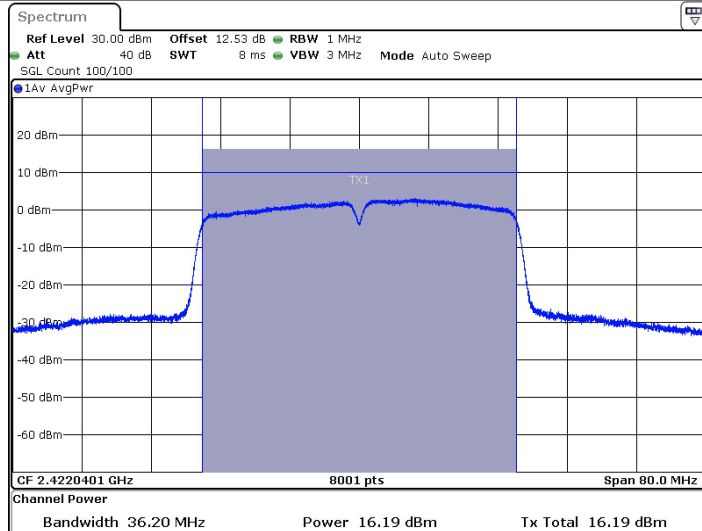


Date: 4.MAR.2025 11:36:31

11N40SISO_Ant1_2437

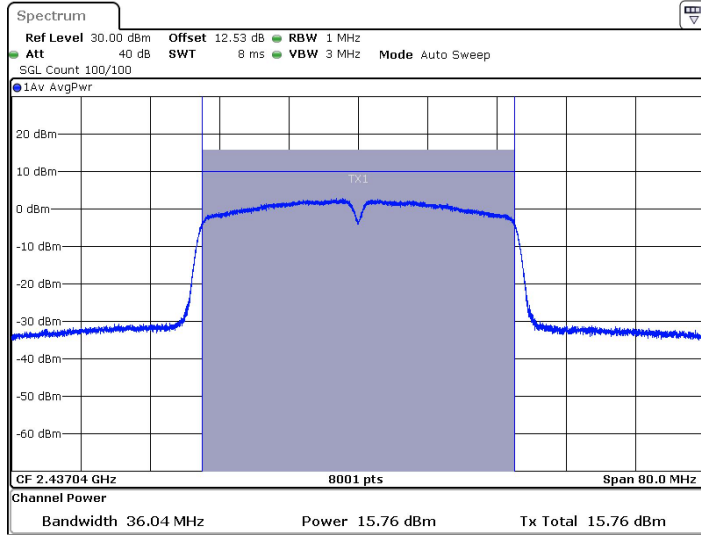


Date: 4.MAR.2025 11:42:13

11N40SISO_Ant1_2452

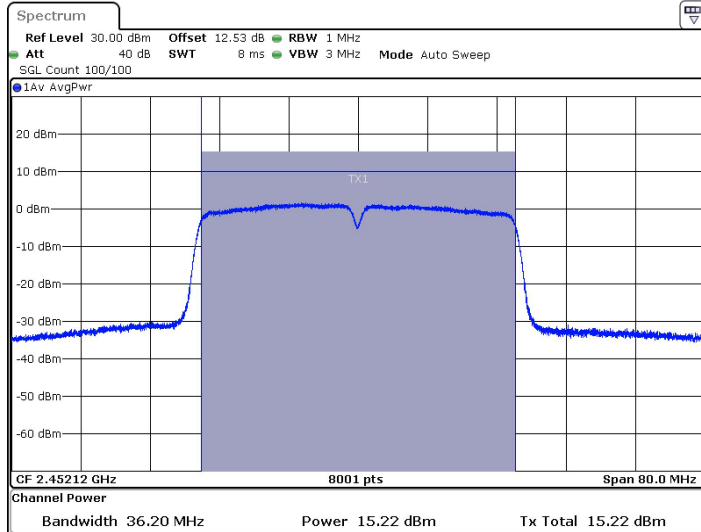

Date: 4.MAR.2025 11:43:40


5.4 99% Occupied Bandwidth


Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Test Result

TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	14.985	2404.4476	2419.4326
	2437	14.945	2429.3676	2444.3127
	2462	14.905	2454.4476	2469.3526
11G	2412	17.143	2403.6484	2420.7912
	2437	16.583	2428.6484	2445.2318
	2462	16.743	2453.7283	2470.4715
11N20SISO	2412	18.062	2402.9690	2421.0310
	2437	17.742	2428.0889	2445.8312
	2462	17.902	2453.1289	2471.0310
11N40SISO	2422	36.204	2403.9381	2440.1419
	2437	36.044	2419.0180	2455.0619
	2452	36.204	2434.0180	2470.2218


Test Graphs

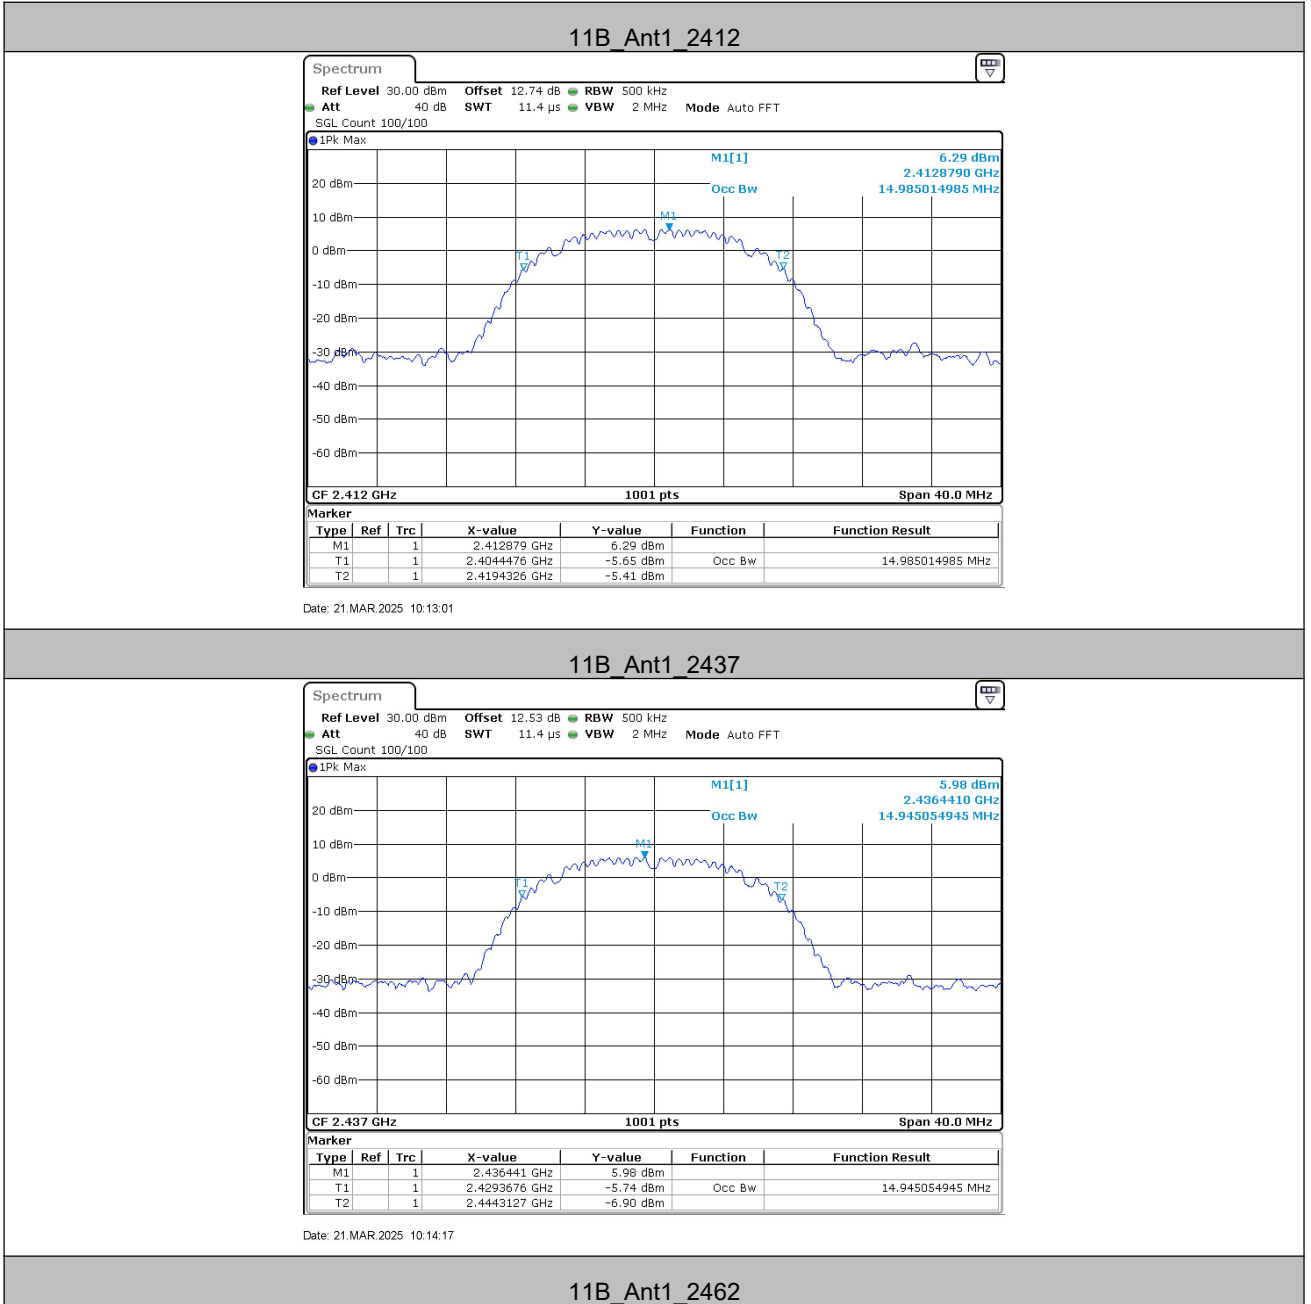

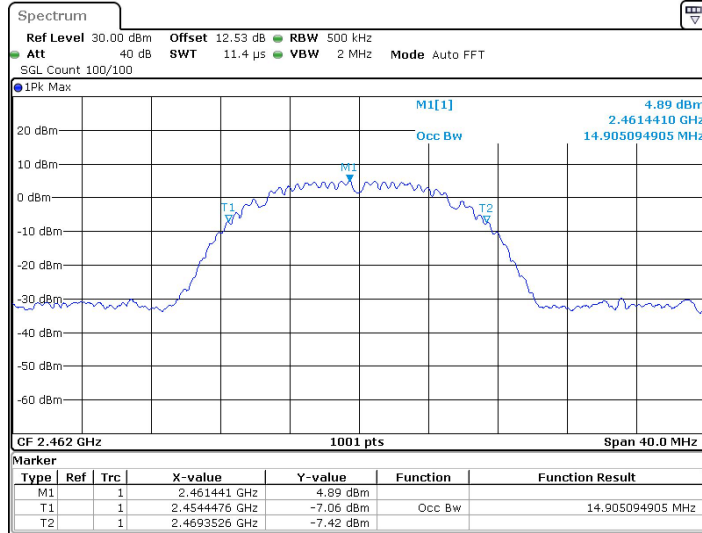


Date: 21.MAR.2025 10:15:35

11G_Ant1_2412

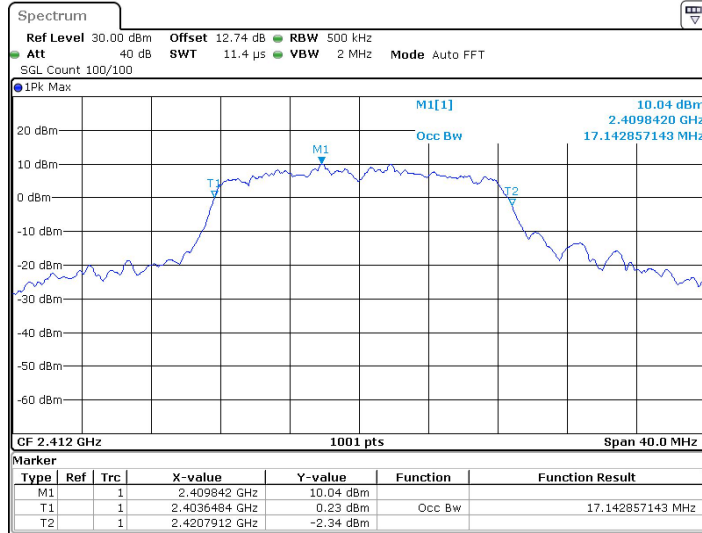


Date: 4.MAR.2025 11:22:04

11G_Ant1_2437

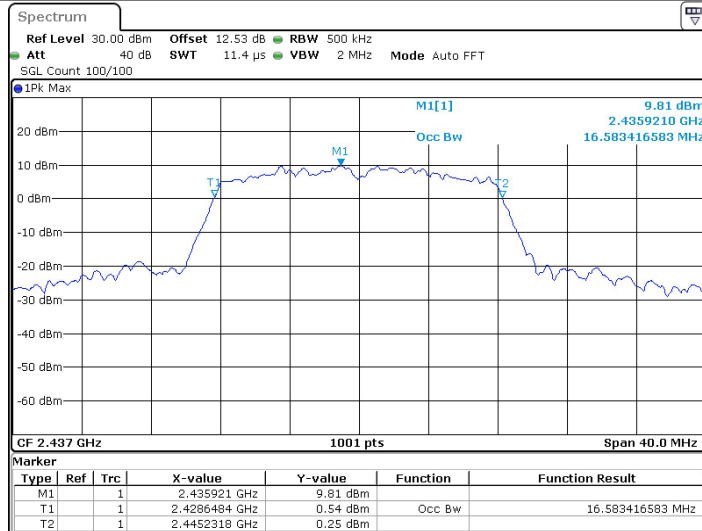


Date: 4.MAR.2025 11:24:38

11G_Ant1_2462

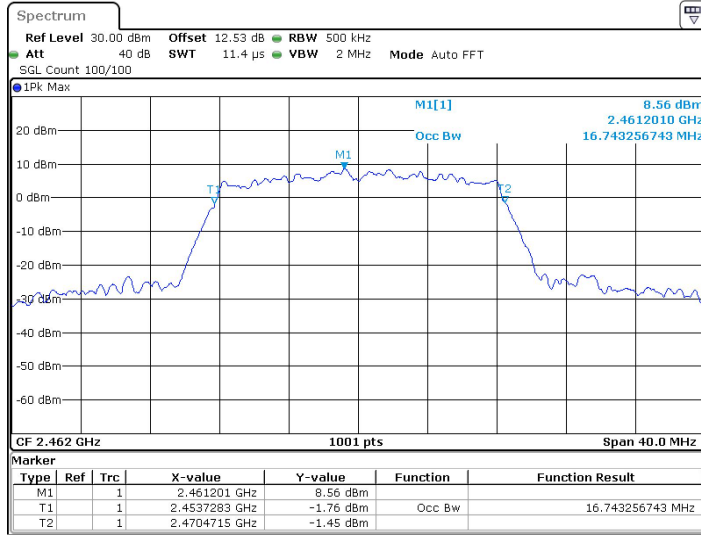


Date: 4.MAR.2025 11:28:07

11N20SISO_Ant1_2412

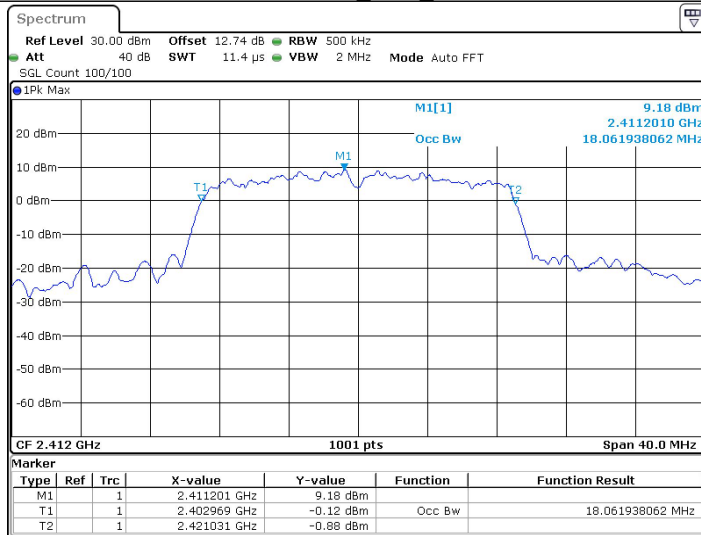


Date: 4.MAR.2025 11:28:32

11N20SISO_Ant1_2437

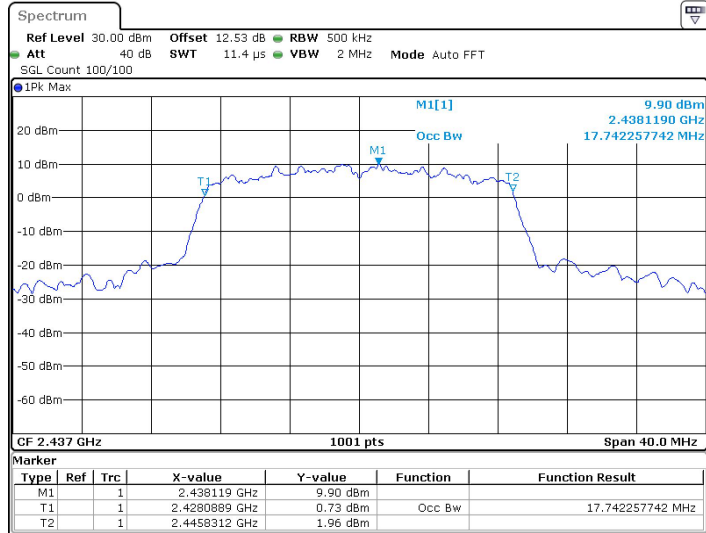


Date: 4.MAR 2025 11:32:35

11N20SISO_Ant1_2462

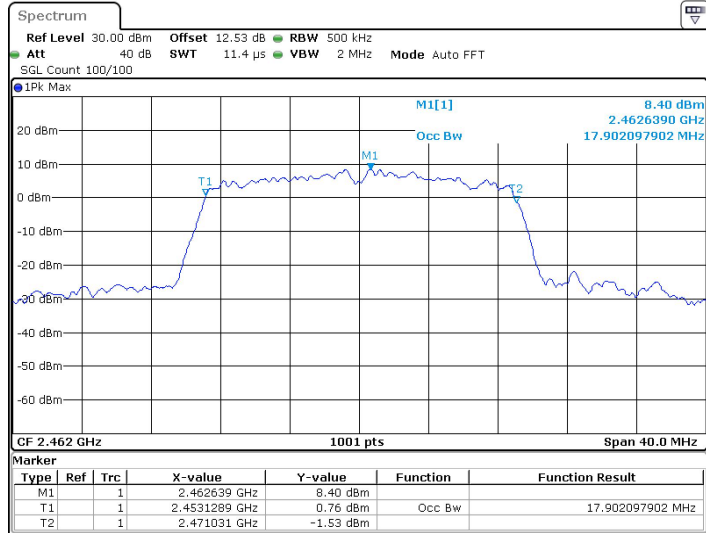


Date: 4.MAR 2025 11:34:23

11N40SISO_Ant1_2422

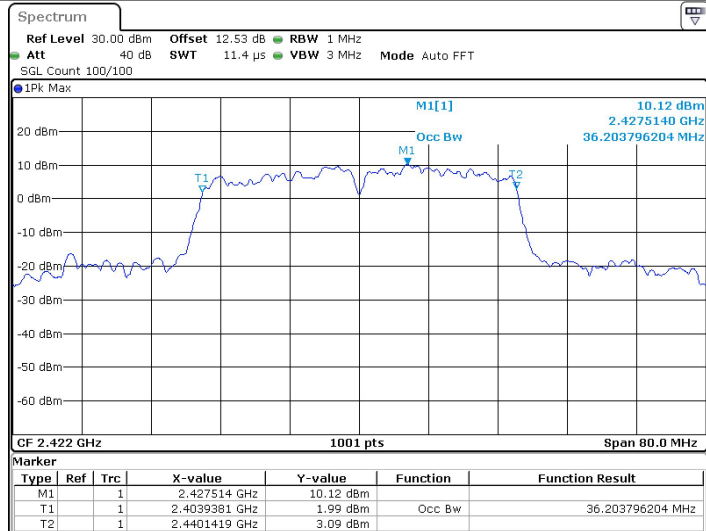


Date: 4.MAR 2025 11:36:25

11N40SISO_Ant1_2437

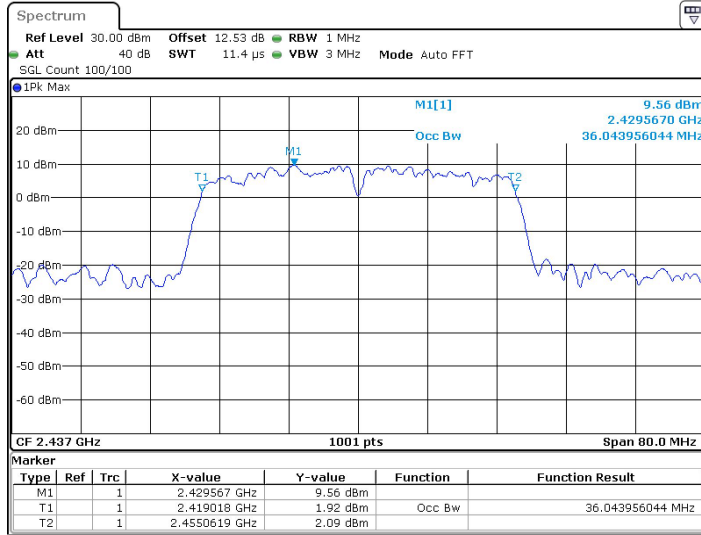


Date: 4.MAR.2025 11:42:08

11N40SISO_Ant1_2452

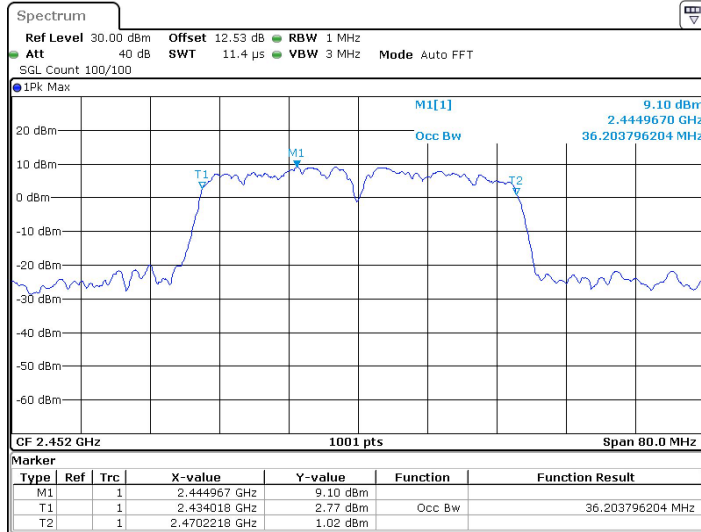

Date: 4.MAR.2025 11:43:34

5.5 6dB Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass