

# TEST REPORT

**Product Name** : BLUETOOTH LED SPEAKER BULB  
**Model Number** : LA19-BTSP-12W-ND-XX-R ( “XX” represents color temperature, can be 22 to 65(e.g. 27 represents 2700K, 65 represents 6500K.), “R” represents color rendering, can be E or G.( e.g. E represents CRI $\geq$ 80 , G represents CRI  $\geq$  90))  
**FCC ID** : 2AWDF-LA19BTSP12WND

Prepared for : Mainhouse ( Xiamen) Electronic Co., Ltd  
Address : No.9, Dongfu Xi Er Road, Haicang, Xiamen, Fujian, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.  
Address : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

Report Number : ES200507004W  
Date(s) of Tests : May 07, 2020 to May 18, 2020  
Date of issue : May 18, 2020

## VERIFICATION OF COMPLIANCE

Applicant:	Mainhouse ( Xiamen) Electronic Co., Ltd No.9, Dongfu Xi Er Road, Haicang, Xiamen, Fujian, China
Manufacturer:	Mainhouse ( Xiamen) Electronic Co., Ltd No.9, Dongfu Xi Er Road, Haicang, Xiamen, Fujian, China
Product Description:	BLUETOOTH LED SPEAKER BULB
Trade Mark:	N/A
Model Number:	LA19-BTSP-12W-ND-XX-R ("XX" represents color temperature, can be 22 to 65(e.g. 27 represents 2700K, 65 represents 6500K.), "R" represents color rendering, can be E or G.( e.g. E represents CRI $\geq$ 80 , G represents CRI $\geq$ 90))

### We hereby certify that:

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2018).

Date of Test : May 07, 2020 to May 18, 2020

Prepared by : Loren Luo  
Loren Luo /Editor

Reviewer : Tim Dong  
Tim Dong /Supervisor

Approved & Authorized Signer : Lisa Wang  
Lisa Wang /Manager



## Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ES200507004W

## Table of Contents

<b>TEST REPORT.....</b>	<b>1</b>
<b>1. GENERAL INFORMATION.....</b>	<b>6</b>
1.1 PRODUCT DESCRIPTION.....	6
1.2 TEST METHODOLOGY.....	7
1.3 TEST FACILITY.....	8
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>9</b>
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE.....	9
2.3 TEST PROCEDURE.....	9
2.4 CONFIGURATION OF TESTED SYSTEM.....	10
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>12</b>
<b>5. TEST SYSTEM UNCERTAINTY.....</b>	<b>13</b>
<b>6. CONDUCTED EMISSIONS TEST.....</b>	<b>14</b>
6.1 MEASUREMENT PROCEDURE.....	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
6.3 MEASUREMENT EQUIPMENT USED:.....	14
6.4 MEASUREMENT RESULT:.....	15
6.5 CONDUCTED MEASUREMENT PHOTOS:.....	18
<b>7. RADIATED EMISSION TEST.....</b>	<b>19</b>
7.1 MEASUREMENT PROCEDURE.....	19
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	21
7.3 MEASUREMENT EQUIPMENT USED:.....	22
7.4 RADIATED EMISSION LIMIT.....	23
7.5 MEASUREMENT RESULT.....	24
7.5 RADIATED MEASUREMENT PHOTOS:.....	29
<b>8. CHANNEL SEPARATION TEST.....</b>	<b>30</b>
8.1 MEASUREMENT PROCEDURE.....	30
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	30
8.3 MEASUREMENT EQUIPMENT USED:.....	30
8.4 MEASUREMENT RESULTS:.....	30
<b>9. 20DB BANDWIDTH TEST.....</b>	<b>35</b>
9.1 MEASUREMENT PROCEDURE.....	35
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	35
9.3 MEASUREMENT EQUIPMENT USED:.....	35
9.4 MEASUREMENT RESULTS:.....	35
<b>10. QUANTITY OF HOPPING CHANNEL TEST.....</b>	<b>40</b>
10.1 MEASUREMENT PROCEDURE.....	40
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	40
10.3 MEASUREMENT EQUIPMENT USED:.....	40

10.4	MEASUREMENT RESULTS.....	40
<b>11.</b>	<b>TIME OF OCCUPANCY (DWELL TIME) TEST.....</b>	<b>41</b>
11.1	TEST DESCRIPTION.....	41
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	41
11.3	MEASUREMENT EQUIPMENT USED:.....	41
11.4	TEST REQUIREMENTS / LIMITS.....	41
11.5	TEST RESULT.....	42
<b>12.</b>	<b>MAXIMUM PEAK OUTPUT POWER TEST.....</b>	<b>44</b>
12.1	MEASUREMENT PROCEDURE.....	44
12.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	44
12.3	MEASUREMENT EQUIPMENT USED:.....	44
12.4	MEASUREMENT RESULTS:.....	45
<b>13.</b>	<b>BAND EDGE TEST.....</b>	<b>49</b>
13.1	MEASUREMENT PROCEDURE.....	49
13.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	50
13.3	MEASUREMENT EQUIPMENT USED:.....	50
13.4	MEASUREMENT RESULTS:.....	51
<b>14.</b>	<b>ANTENNA APPLICATION.....</b>	<b>65</b>
14.1	ANTENNA REQUIREMENT.....	65
14.2	RESULT.....	65
<b>15.</b>	<b>PHOTOS OF EUT.....</b>	<b>66</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description

Characteristics	Description
<b>Product Name</b>	BLUETOOTH LED SPEAKER BULB
<b>Model number</b>	LA19-BTSP-12W-ND-XX-R ( “XX” represents color temperature, can be 22 to 65(e.g. 27 represents 2700K, 65 represents 6500K.), “R” represents color rendering, can be E or G.( e.g. E represents CRI $\geq$ 80 , G represents CRI $\geq$ 90)) (Note: These models are the same except the model name, color temperature and color rendering,Here LA19-BTSP-12W-ND-3000K was selected for full testing)
<b>Test Voltage</b>	AC 120V 60Hz
<b>Kind of Device</b>	Bluetooth Ver.5.0
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK
<b>Operating Frequency Range</b>	2402-2480MHz
<b>Number of Channels</b>	79
<b>Transmit Power Max(PK)</b>	-0.63dBm(0.000865W)
<b>Antenna Type</b>	PCB antenna
<b>Antenna Gain</b>	1.3dBi

## 1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10-2013. Radiated testing was performed at an antenna to EUT distance 3 meters.



### 1.3 Test Facility

#### Site Description

EMC Lab. : Accredited by CNAS, 2016.10.24  
The certificate is valid until 2022.10.28  
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2018.3.30  
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, August 06, 2018  
The certificate is valid until August 07, 2020  
Designation Number: CN1204  
Test Firm Registration Number: 882943

Name of Firm : Accredited by Industry Canada, November 09, 2018  
The Conformity Assessment Body Identifier is CN0008

Site Location : EMTEK(SHENZHEN) CO., LTD.

Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**



**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	BLUETOOTH LED SPEAKER BULB	N/A	LA19-BTSP-12W-ND-3000K	2AWDF-LA19BTSP12WND	<b>EUT</b>

**Note:**

(1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

### 3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d),§15.209	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.203	Antenna Requirement	Compliant



#### 4. Description of test modes

The EUT has been tested under its typical operating condition and fully-charged battery for EUT tested alone. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK,  $\Pi/4$ -DQPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

## 5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Power Density	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	$\pm 0.5 \text{ }^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%

## 6. Conducted Emissions Test

### 6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 6.2 Test SET-UP (Block Diagram of Configuration)

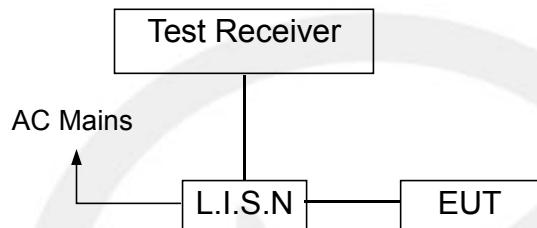

### 6.3 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	9kHz~3GHz	05/23/2019	05/22/2020
L.I.S.N	Rohde & Schwarz	ENV216	100017	9KHz-300MHz	05/23/2019	05/22/2020
RF Switching Unit	CDS	RSU-M2	38401	9KHz-300MHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	9kHz~3GHz	05/23/2019	05/22/2020

#### 6.4 Measurement Result:


Operation Mode:	TX	Test Date :	May 13, 2020
Frequency Range:	0.15MHz~30MHz	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Test By:	Loren		

Pass.

Conducted emission at both AC 120V &AC 240V, and emission at AC 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.



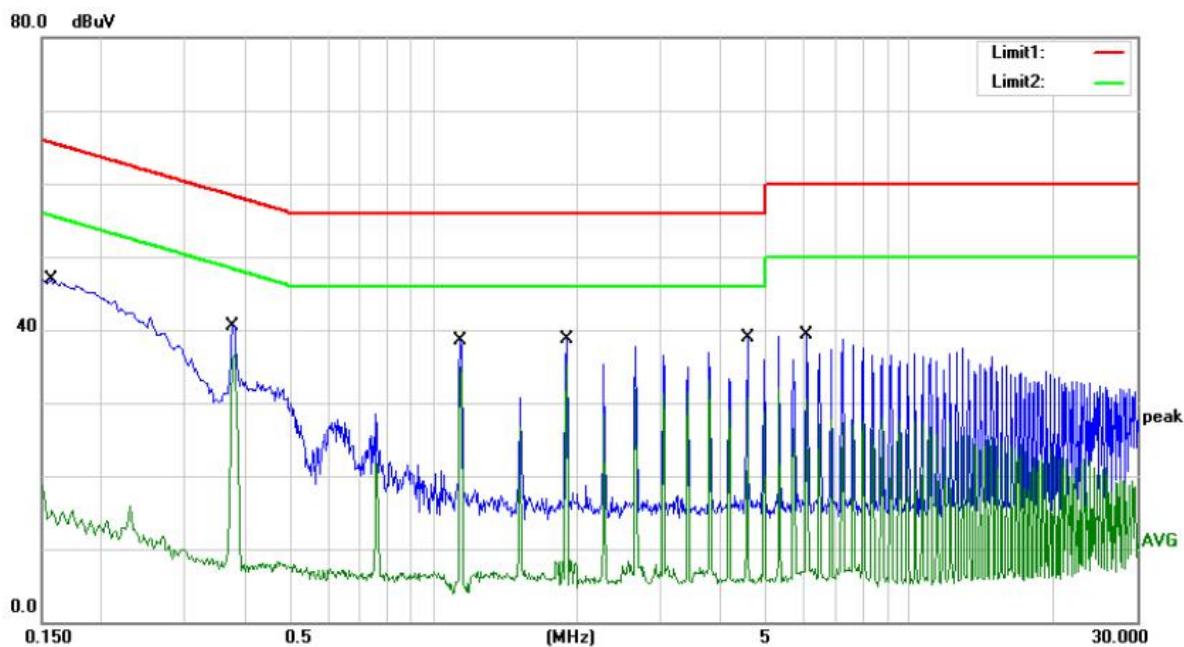

Site site #1

Phase: **L1**

Temperature: 25

Limit: FCC PART 15 C\_QP (CE)

Power: AC 120V/60Hz


Humidity: 55 %

Mode: TX2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1580	36.87	10.01	46.88	65.57	-18.69		QP
2		0.1580	9.78	10.01	19.79	55.57	-35.78		AVG
3		0.3780	30.38	10.12	40.50	58.32	-17.82		QP
4		0.3780	26.56	10.12	36.68	48.32	-11.64		AVG
5		1.1380	28.36	10.18	38.54	56.00	-17.46		QP
6		1.1380	24.80	10.18	34.98	46.00	-11.02		AVG
7		1.8980	28.60	10.18	38.78	56.00	-17.22		QP
8	*	1.8980	25.29	10.18	35.47	46.00	-10.53		AVG
9		4.5580	28.69	10.18	38.87	56.00	-17.13		QP
10		4.5580	20.55	10.18	30.73	46.00	-15.27		AVG
11		6.0780	29.10	10.19	39.29	60.00	-20.71		QP
12		6.0780	20.32	10.19	30.51	50.00	-19.49		AVG

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: Jason

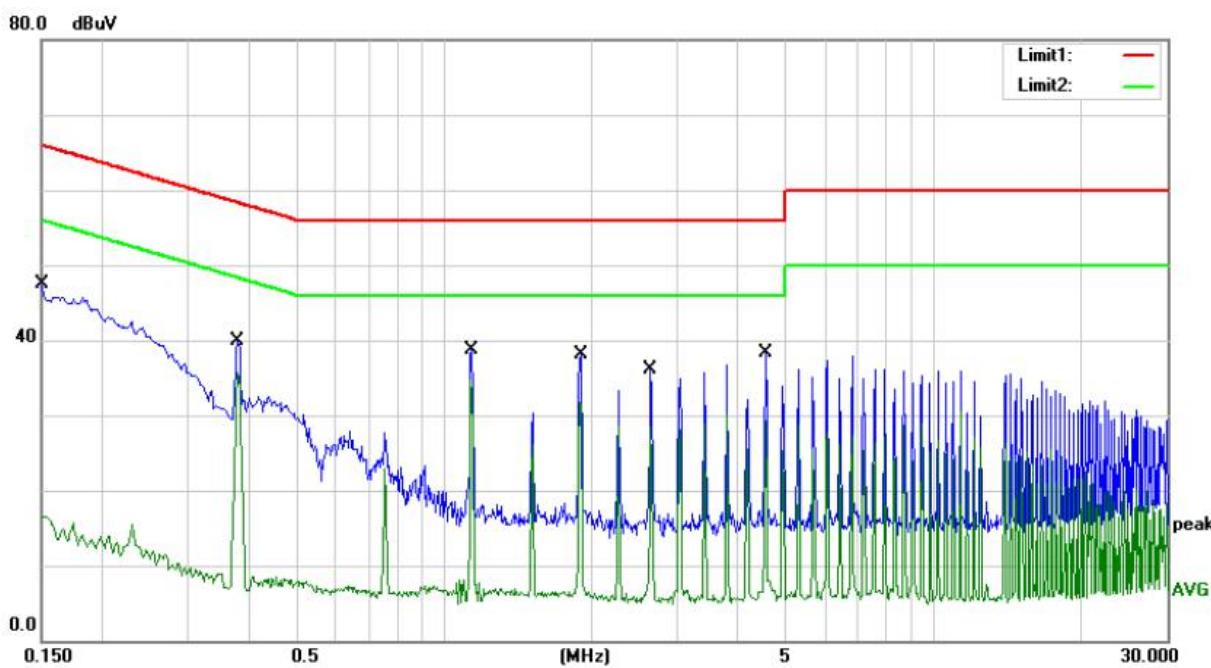

Site site #1

 Phase: **N**

Temperature: 25

Limit: FCC PART 15 C\_QP (CE)

Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1500	37.53	10.01	47.54	66.00	-18.46	QP
2		0.1500	6.54	10.01	16.55	56.00	-39.45	AVG
3		0.3780	29.76	10.12	39.88	58.32	-18.44	QP
4		0.3780	25.51	10.12	35.63	48.32	-12.69	AVG
5		1.1380	28.59	10.18	38.77	56.00	-17.23	QP
6	*	1.1380	24.59	10.18	34.77	46.00	-11.23	AVG
7		1.8980	27.91	10.18	38.09	56.00	-17.91	QP
8		1.8980	21.51	10.18	31.69	46.00	-14.31	AVG
9		2.6460	26.01	10.18	36.19	56.00	-19.81	QP
10		2.6460	18.30	10.18	28.48	46.00	-17.52	AVG
11		4.5420	28.16	10.18	38.34	56.00	-17.66	QP
12		4.5420	19.07	10.18	29.25	46.00	-16.75	AVG

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Jason

## 6.5 Conducted Measurement Photos:



## 7. Radiated Emission Test

### 7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Average
Trace	Max hold

## 7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

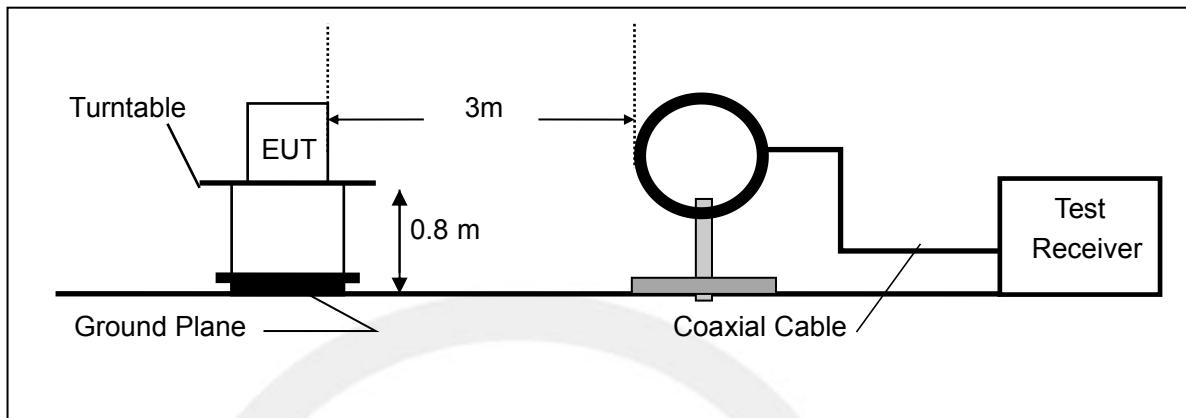

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

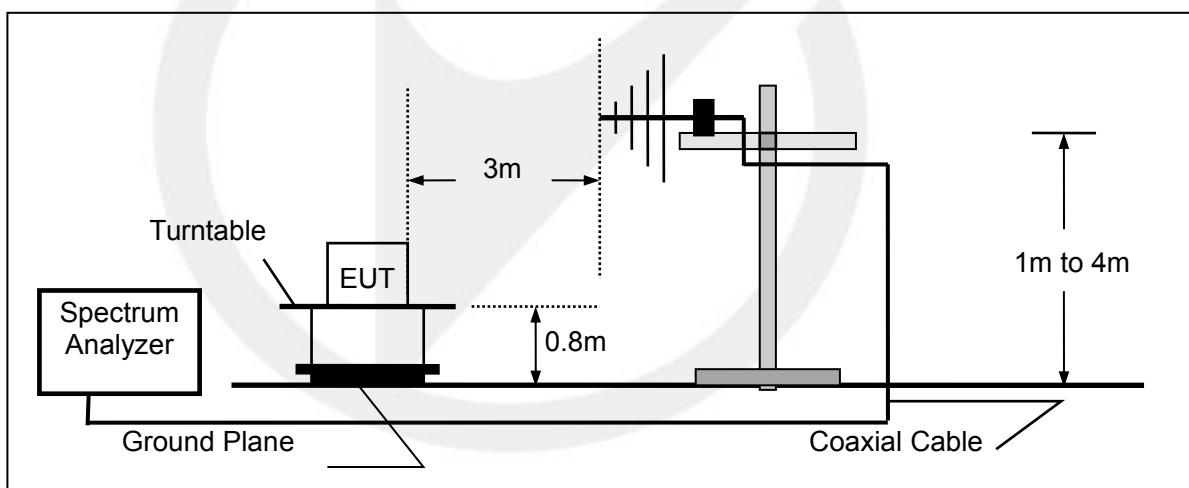

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

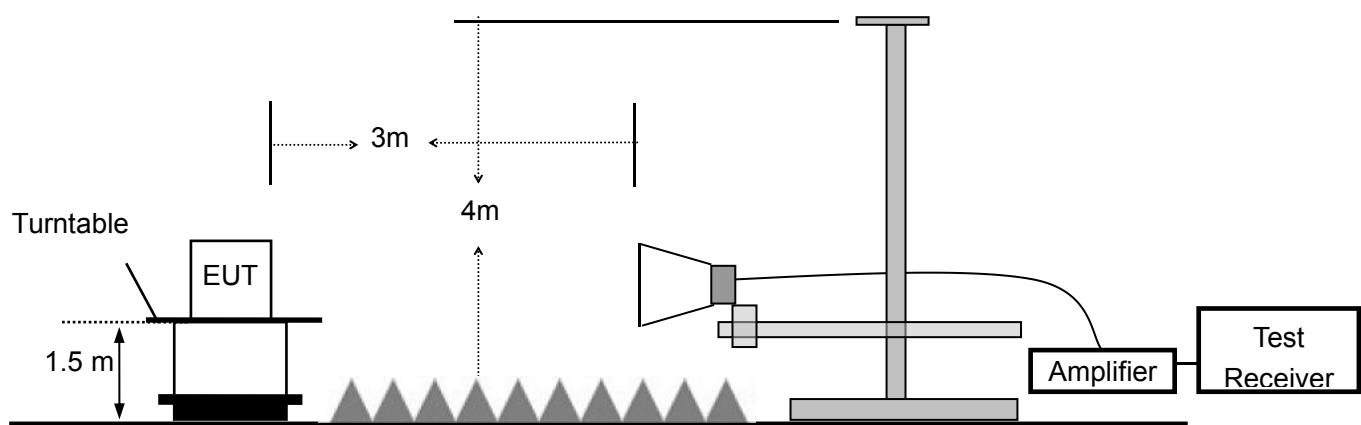

### 7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.0 3	9KHz-3GHz	05/23/2019	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	05/23/2019	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	000141	25MHz-2GHz	05/23/2019	1 Year
4.	Power Amplifier	CDS	RSU-M352	818	1MHz-1GHz	05/23/2019	1 Year
5.	Power Amplifier	HP	8447F	OPT H64	1GHz-26.5GHz	05/23/2019	1 Year
6.	Color Monitor	SUNSPO	SP-140A	N/A	--	05/23/2019	1 Year
7.	Single Line Filter	JIANLI	XL-3	N/A	--	05/23/2019	1 Year
8.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	--	05/23/2019	1 Year
9.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	--	05/23/2019	1 Year
10.	DC Power Filter	JIANLI	DL-2X50B	N/A	--	05/23/2019	1 Year
11.	Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	05/23/2019	1 Year
12.	Cable	Rosenberger	CIL02	A0783566	9KHz-3GHz	05/23/2019	1 Year
13.	Cable	Rosenberger	RG 233/U	525178	9KHz-3GHz	05/23/2019	1 Year
14.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/23/2019	1 Year
15.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/23/2019	1 Year
16.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91703 99	14GHz -26.5GHz	05/23/2019	1 Year
17.	Power Amplifier	LUNAR EM	LNA1G18-4 0	J101000000 81	1GHz-26.5GHz	05/23/2019	1 Year
18.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
19.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
20.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year

## 7.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

## 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

Remark 1. Emission level in dBuV/m=20 log (uV/m)  
: 2. Measurement was performed at an antenna to the closed point of EUT  
distance of meters.  
3. Only spurious frequency is permitted to locate within the Restricted Bands  
specified in provision of  $\xi$  15.205, and the emissions located in restricted  
bands also comply with 15.209 limit.

## 7.5 Measurement Result

Operation Mode:	TX	Test Date :	May 13, 2020
Test By:	Loren	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m		

### Below 30MHz:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--


Note: The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result  
which was 20dB lower than the limit line per 15.31(o) was not reported.

### Below 1000MHz:

Pass.

All modulation modes have been tested, the worst mode is (GFSK TX 2402MHz), the data is  
recorded on the following page, other modulation modes do not exceed this limit.

Please refer to the following data.

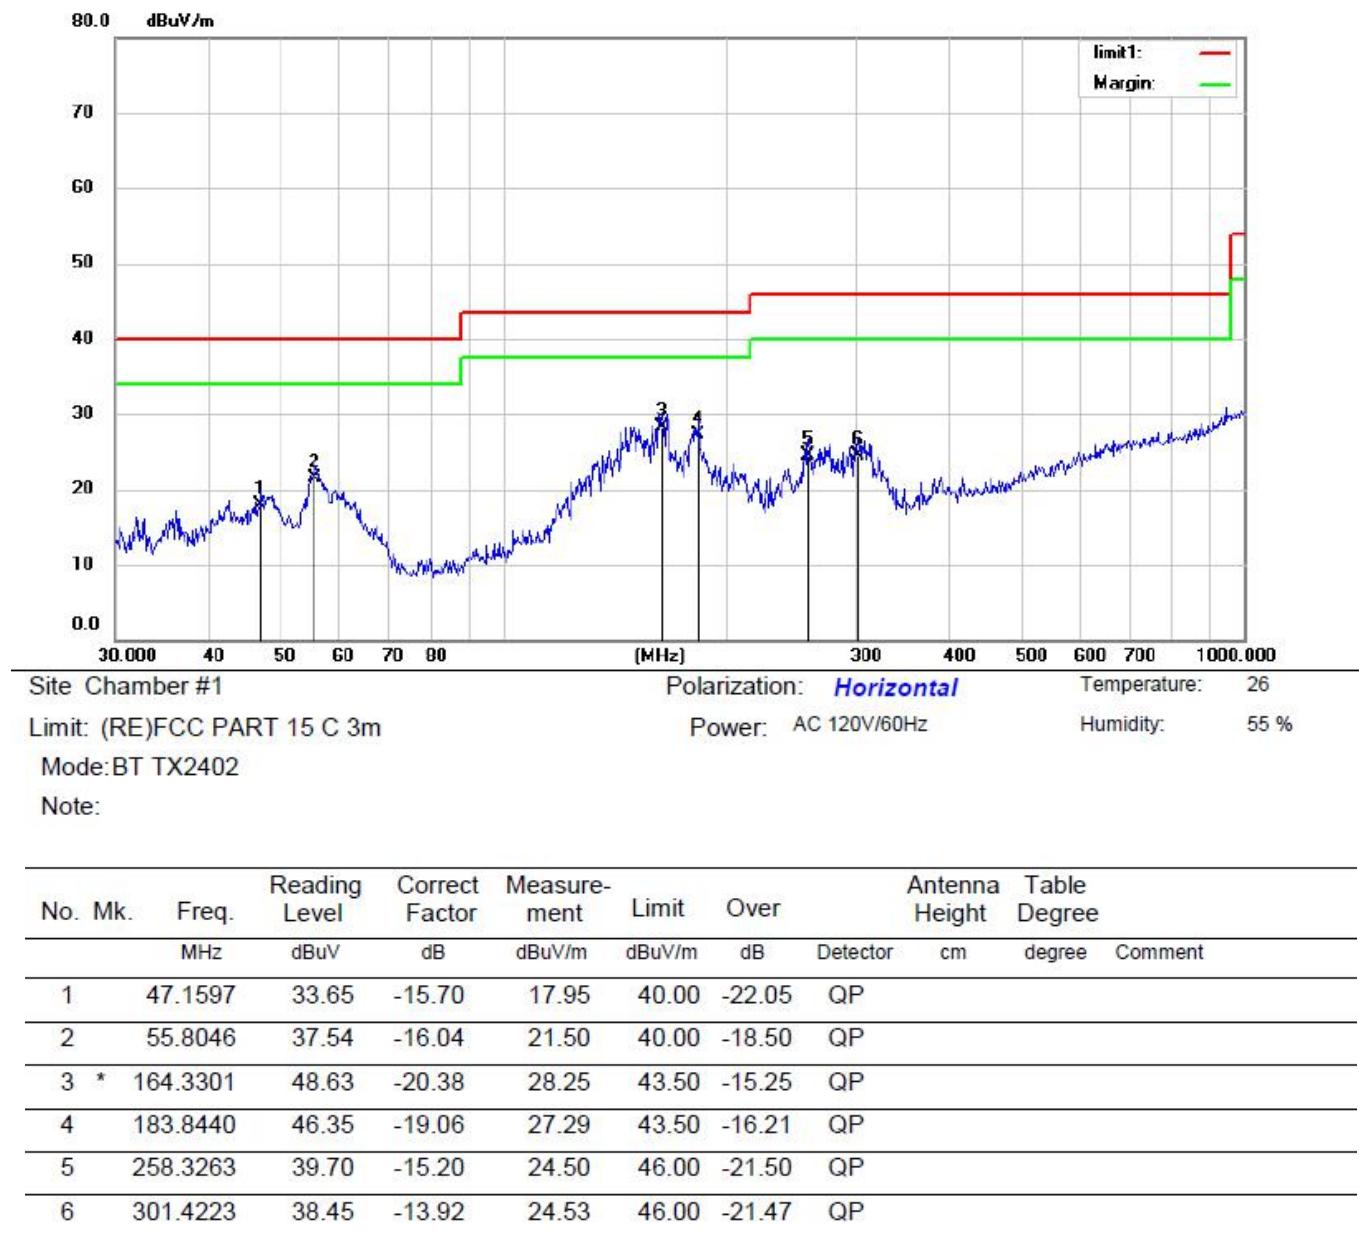

\*:Maximum data   x:Over limit   !:over margin

Operator: Lian



Site Chamber #1

 Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: AC 120V/60Hz

Humidity: 55 %

Mode: BT TX2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	50.7635	44.89	-15.60	29.29	40.00	-10.71	QP		
2		135.5061	49.25	-21.55	27.70	43.50	-15.80	QP		
3		147.9214	52.36	-21.62	30.74	43.50	-12.76	QP		
4		160.3454	52.40	-20.68	31.72	43.50	-11.78	QP		
5		385.2803	35.43	-11.26	24.17	46.00	-21.83	QP		
6		601.4265	30.58	-6.21	24.37	46.00	-21.63	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator: Lian

**Above 1000MHz~10<sup>th</sup> Harmonics:**

All modulation modes have been tested, the worst mode is (GFSK), the data is recorded on the following page, other modulation modes do not exceed this limit. Please refer to the following data.

Operation Mode: GFSK (CH1: 2402MHz)

Test Date : May 13, 2020

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4804	V	94.60	73.90	-32.3	62.30	41.60	74	54	-11.70	-12.40
7206	V	91.10	75.22	-37.2	53.90	38.02	74	54	-20.10	-15.98
9608	V	92.06	76.18	-39.8	52.26	36.38	74	54	-21.74	-17.62
12010	V	97.96	75.87	-40.5	57.46	35.37	74	54	-16.54	-18.63
14412	V	98.80	70.37	-41.7	57.10	28.67	74	54	-16.90	-25.33
16814	V	97.37	70.41	-40.0	57.37	30.41	74	54	-16.63	-23.59
4804	H	91.95	71.99	-31.6	60.35	40.39	74	54	-13.65	-13.61
7206	H	97.19	74.81	-35.5	61.69	39.31	74	54	-12.31	-14.69
9608	H	97.34	72.55	-38.3	59.04	34.25	74	54	-14.96	-19.75
12010	H	96.49	71.12	-39.0	57.49	32.12	74	54	-16.51	-21.88
14412	H	97.98	72.94	-42.0	55.98	30.94	74	54	-18.02	-23.06
16814	H	91.87	76.62	-39.3	52.57	37.32	74	54	-21.43	-16.68

Operation Mode: GFSK (CH40: 2441MHz)

Test Date : May 13, 2020

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4882	V	98.01	72.64	-32.3	65.71	40.34	74	54	-8.29	-13.66
7323	V	91.09	75.48	-37.2	53.89	38.28	74	54	-20.11	-15.72
9764	V	95.69	72.52	-39.8	55.89	32.72	74	54	-18.11	-21.28
12205	V	95.20	70.48	-40.5	54.7	29.98	74	54	-19.30	-24.02
14646	V	91.61	71.54	-41.0	50.61	30.54	74	54	-23.39	-23.46
17087	V	97.94	70.80	-41.1	56.84	29.7	74	54	-17.16	-24.30
4882	H	93.95	70.65	-31.6	62.35	39.05	74	54	-11.65	-14.95
7323	H	95.54	73.59	-35.5	60.04	38.09	74	54	-13.96	-15.91
9764	H	93.41	76.24	-38.3	55.11	37.94	74	54	-18.89	-16.06
12205	H	98.40	71.74	-39.0	59.4	32.74	74	54	-14.60	-21.26
14646	H	95.36	71.13	-42.0	53.36	29.13	74	54	-20.64	-24.87
17087	H	92.40	76.94	-41.5	50.9	35.44	74	54	-23.10	-18.56

Operation Mode: GFSK (CH79: 2480MHz)

Test Date : May 13, 2020



Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4960	V	96.05	72.21	-32.3	63.75	39.91	74	54	-10.25	-14.09
7440	V	94.46	76.68	-37.2	57.26	39.48	74	54	-16.74	-14.52
9920	V	96.29	71.92	-39.8	56.49	32.12	74	54	-17.51	-21.88
12400	V	97.32	76.08	-40.5	56.82	35.58	74	54	-17.18	-18.42
14880	V	93.97	70.93	-41.0	52.97	29.93	74	54	-21.03	-24.07
17360	V	93.28	71.82	-41.1	52.18	30.72	74	54	-21.82	-23.28
4960	H	98.88	74.11	-31.6	67.28	42.51	74	54	-6.72	-11.49
7440	H	95.48	71.99	-35.5	59.98	36.49	74	54	-14.02	-17.51
9920	H	92.34	76.42	-38.3	54.04	38.12	74	54	-19.96	-15.88
12400	H	92.18	76.17	-39.0	53.18	37.17	74	54	-20.82	-16.83
14880	H	97.29	74.11	-42.0	55.29	32.11	74	54	-18.71	-21.89
17360	H	97.49	76.38	-41.5	55.99	34.88	74	54	-18.01	-19.12

Other harmonics emissions are lower than 20dB below the allowable limit.

**Note:**

- (1) All Readings are Peak Value and AV.
- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) Measuring frequencies from 1GHz to 25GHz.

## 7.5 Radiated Measurement Photos:

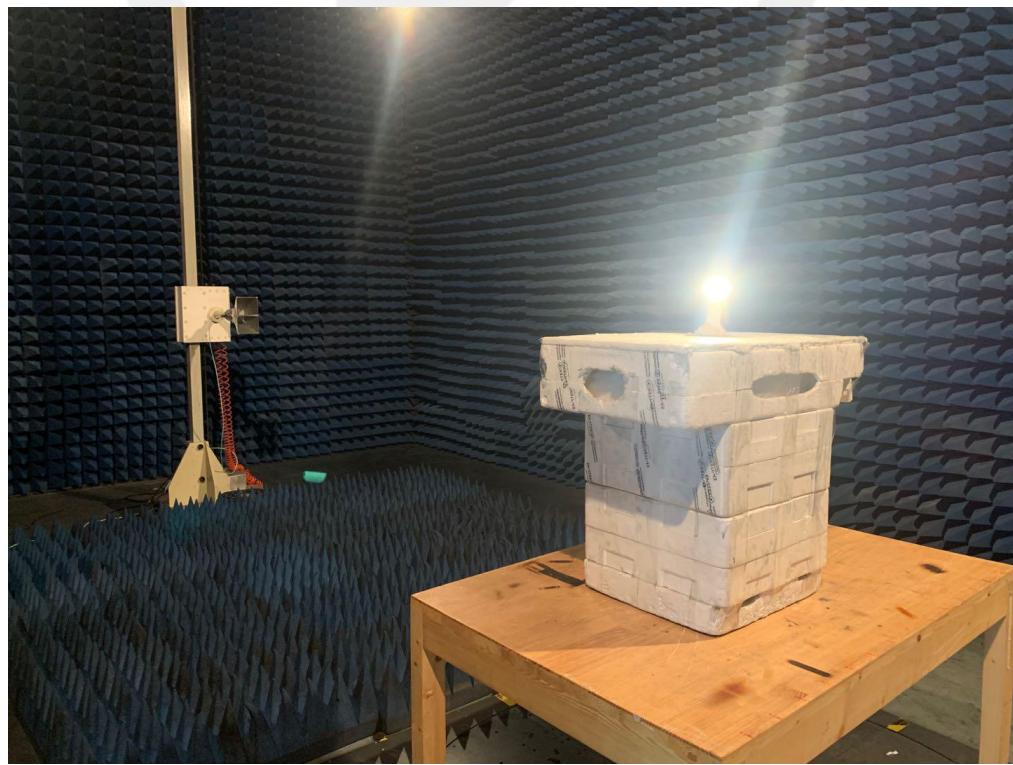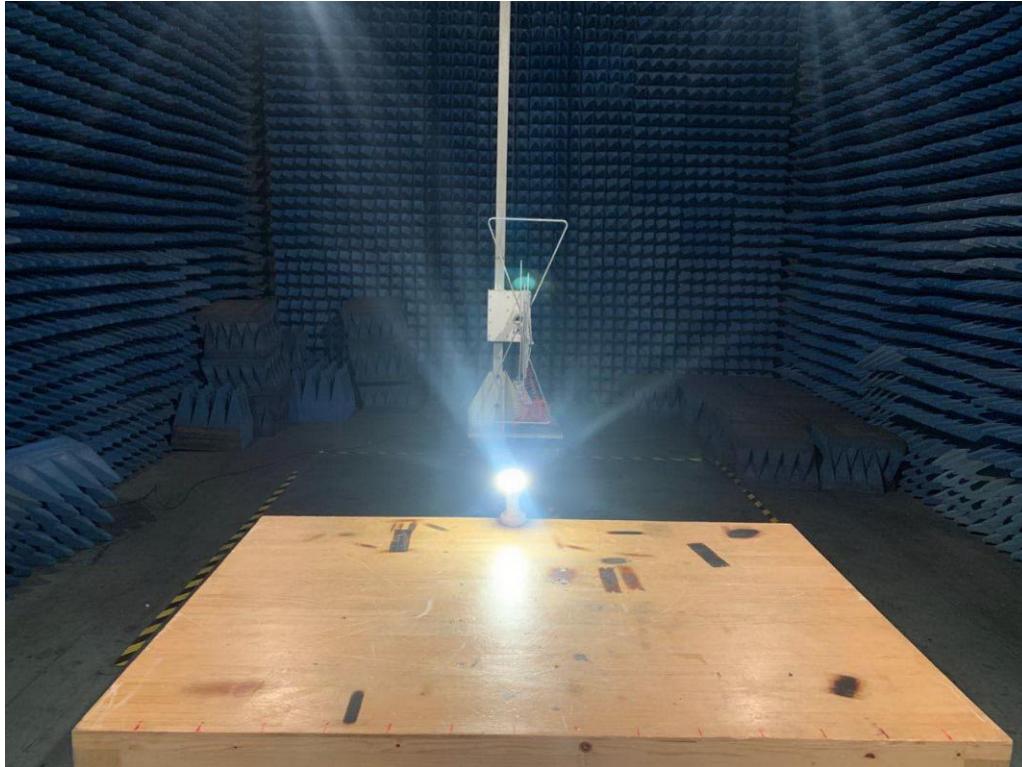


## 8. Channel Separation test

### 8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


### 8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector: PK      Test Date : May 13, 2020  
 Test By: Loren      Temperature : 24°C  
 Test Result: PASS      Humidity : 53 %  
 Modulation: GFSK


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1003	>721
40	2441	1003	>727
79	2480	1003	>735


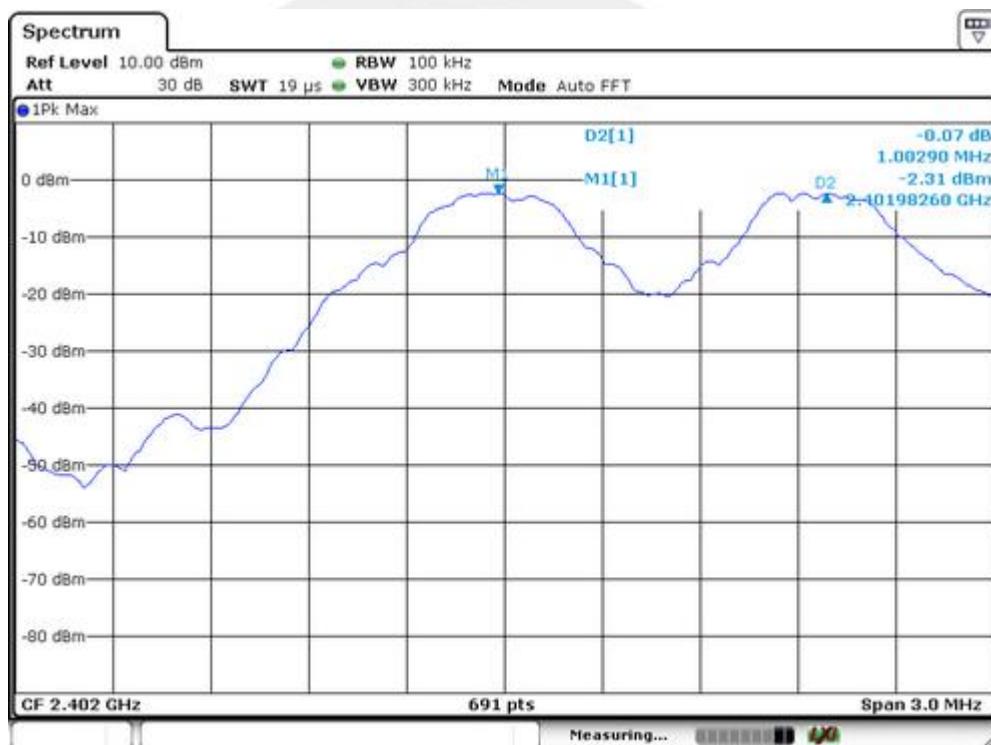


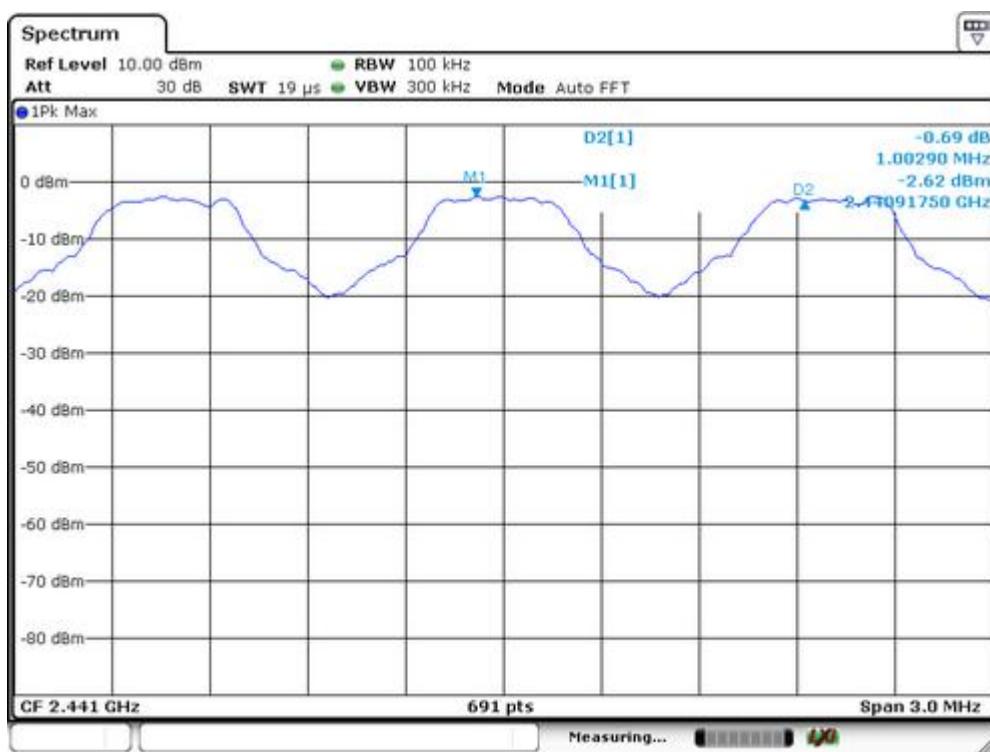

Spectrum Detector: PK      Test Date : May 13, 2020  
 Test By: Loren      Temperature : 24°C  
 Test Result: PASS      Humidity : 53 %  
 Modulation: Π/4-DQPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1003	>912
40	2441	1003	>915
79	2480	1003	>915

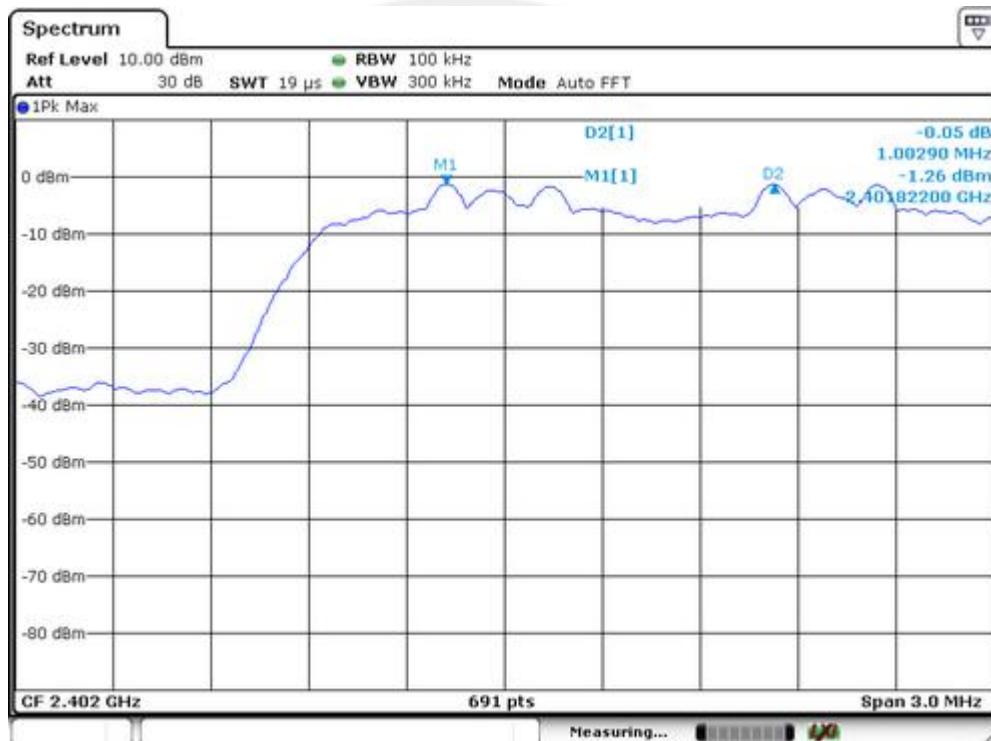

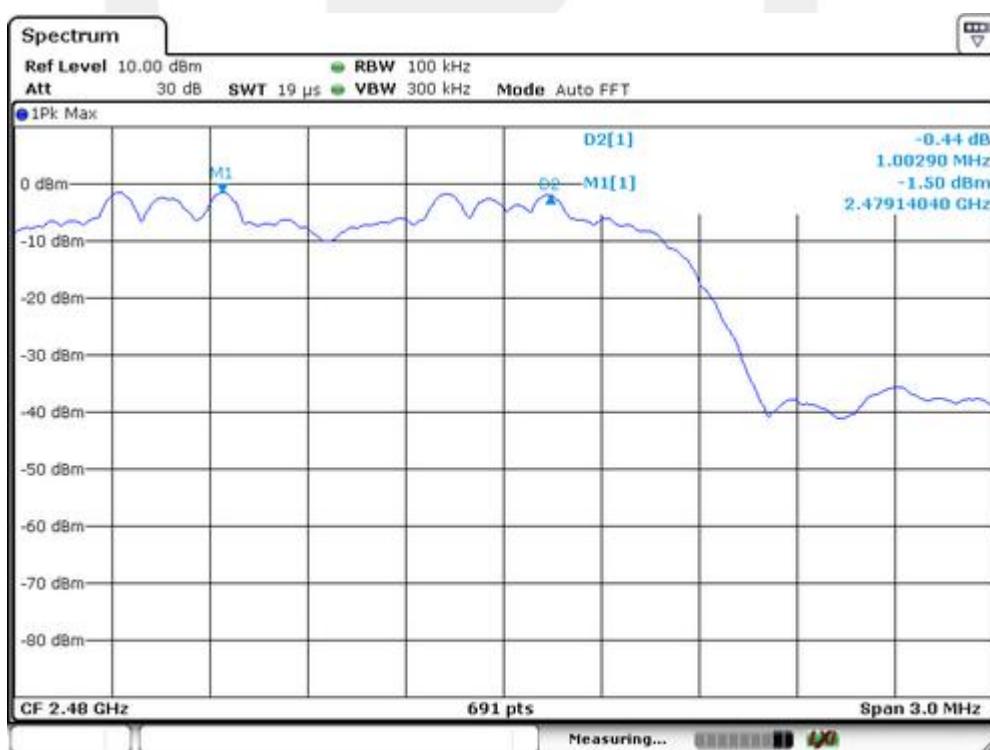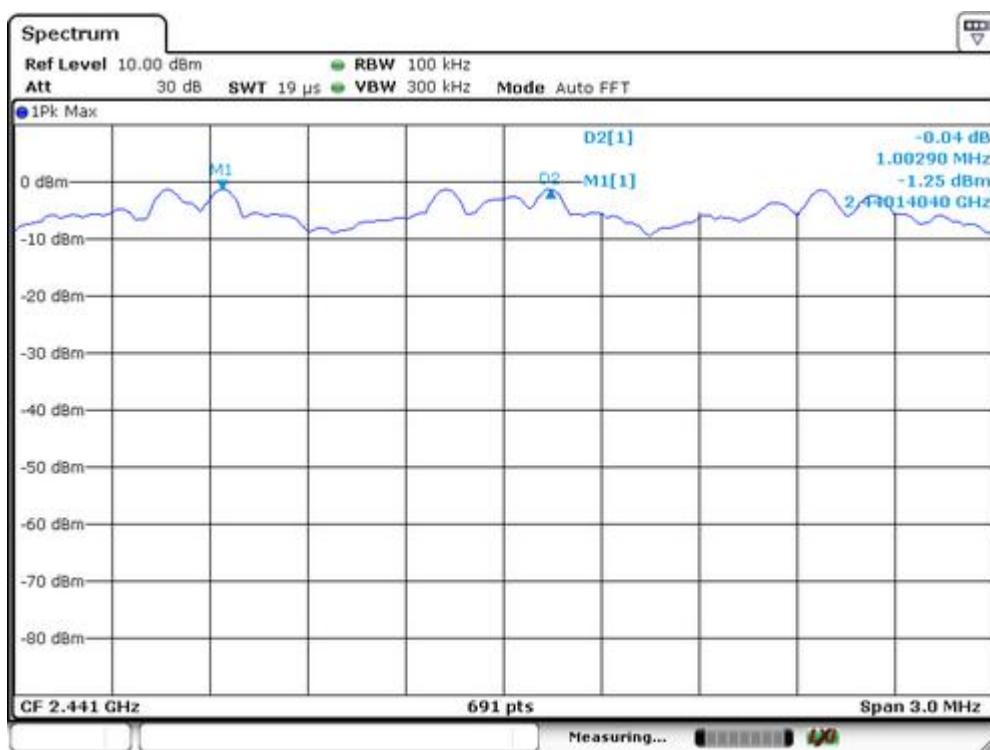


## 9. 20dB Bandwidth test

### 9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 9.2 Test SET-UP (Block Diagram of Configuration)



### 9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


### 9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	May 13, 2020
Test By:	Loren	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1081
40	2441	1090
79	2480	1103

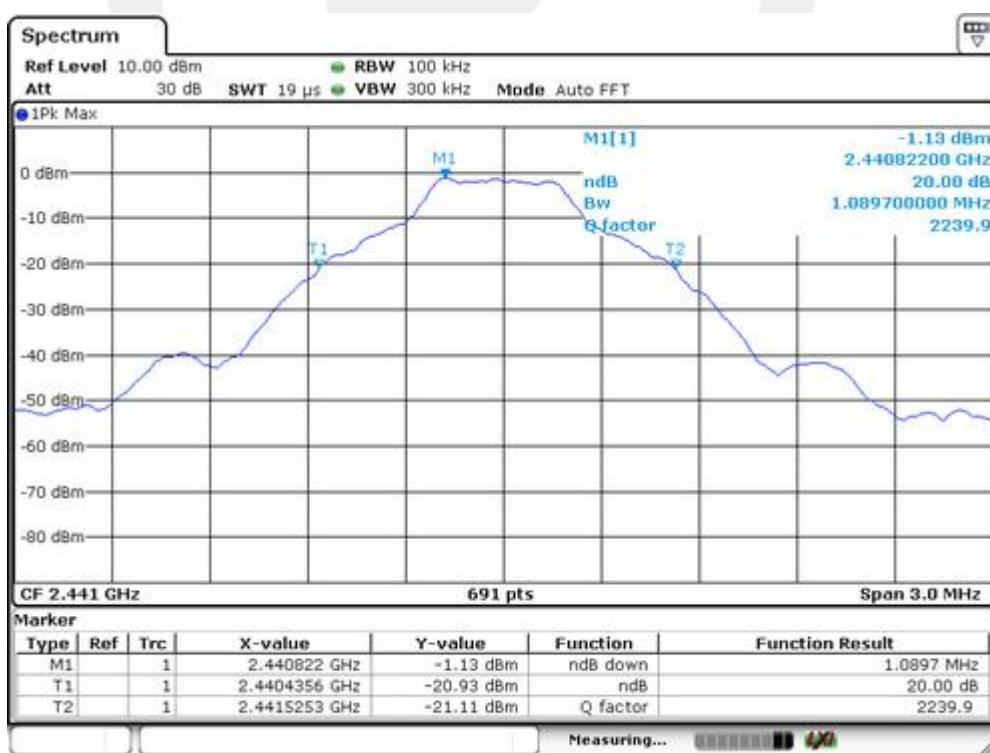
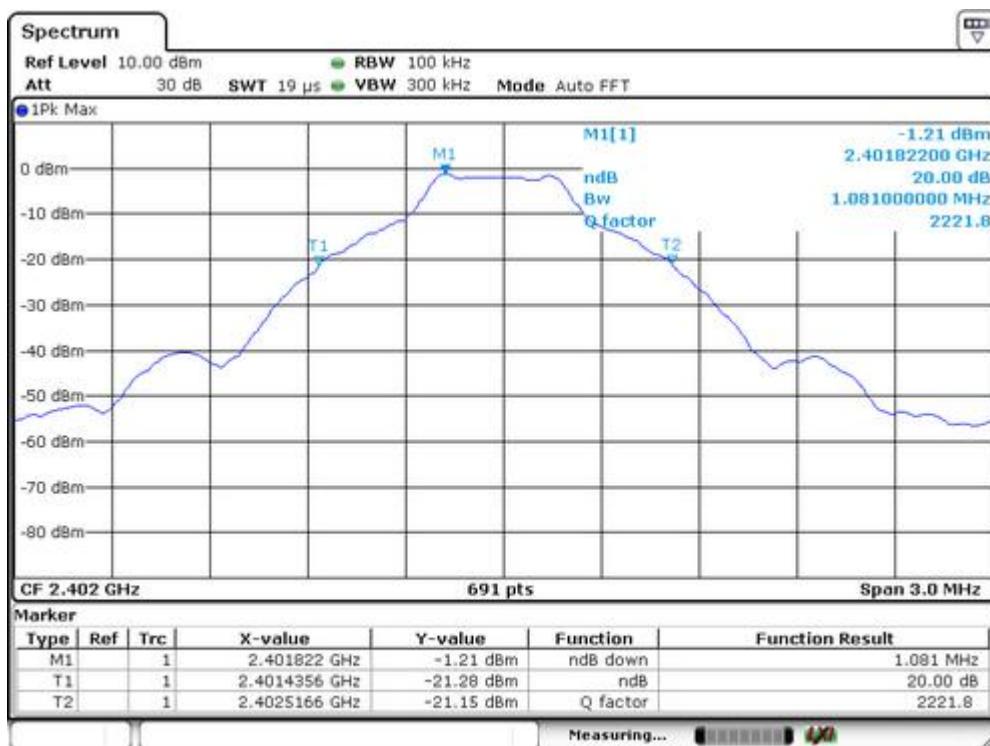


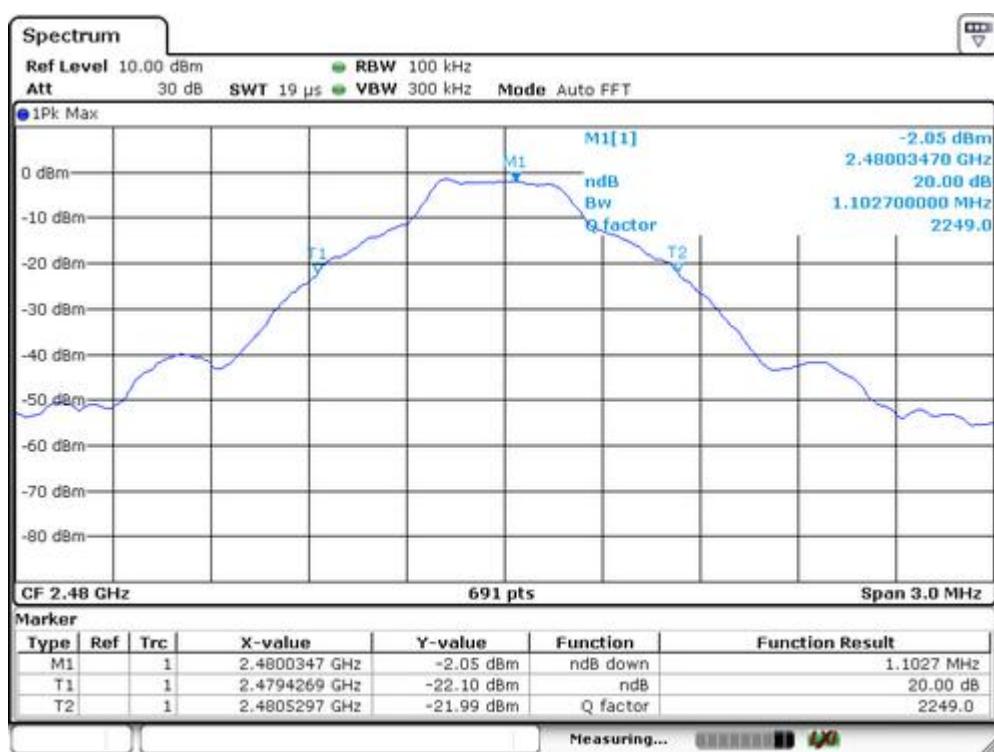

Spectrum Detector: PK      Test Date : May 13, 2020  
 Test By: Loren      Temperature : 24°C  
 Test Result: PASS      Humidity : 53 %  
 Modulation: Π/4-DQPSK

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1368
40	2441	1372
79	2480	1372

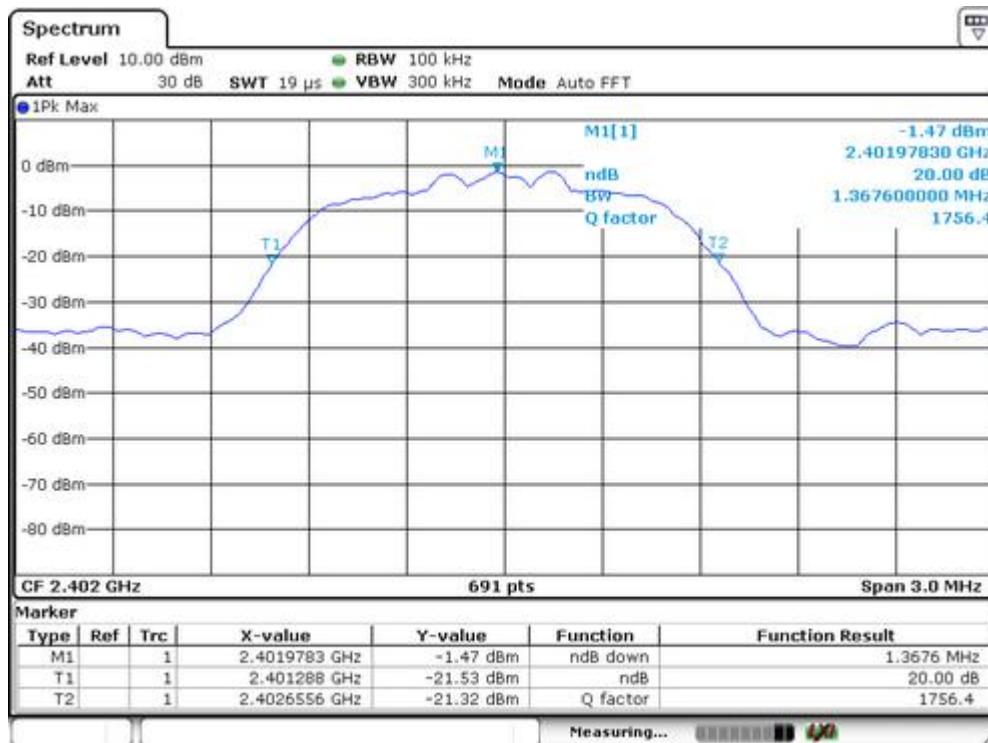

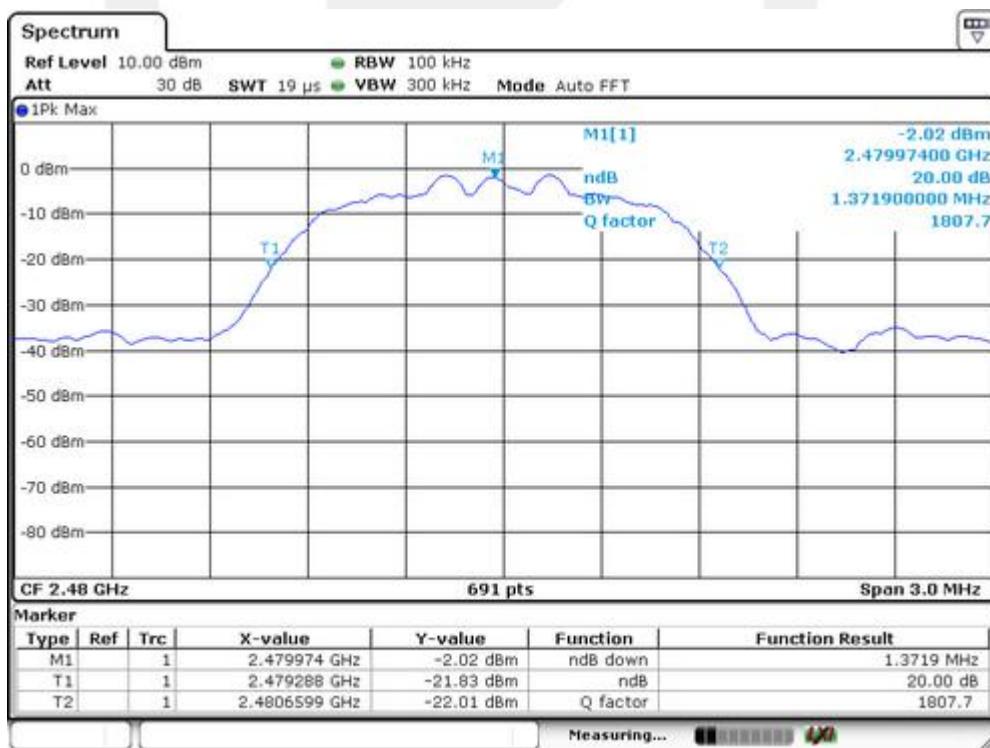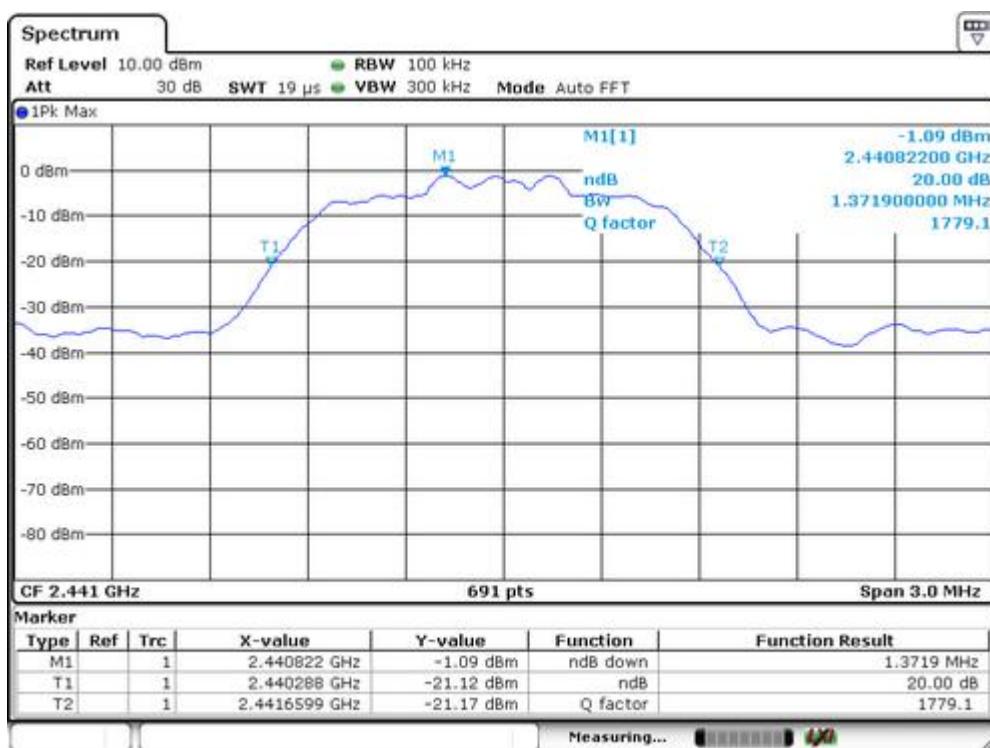


## 10. Quantity of Hopping Channel Test

### 10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 10.2 Test SET-UP (Block Diagram of Configuration)



### 10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 10.4 Measurement Results:

Refer to attached data chart.

Worst Test Mode	GFSK	Test Date :	May 13, 2020
Test By:	Loren	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	>15

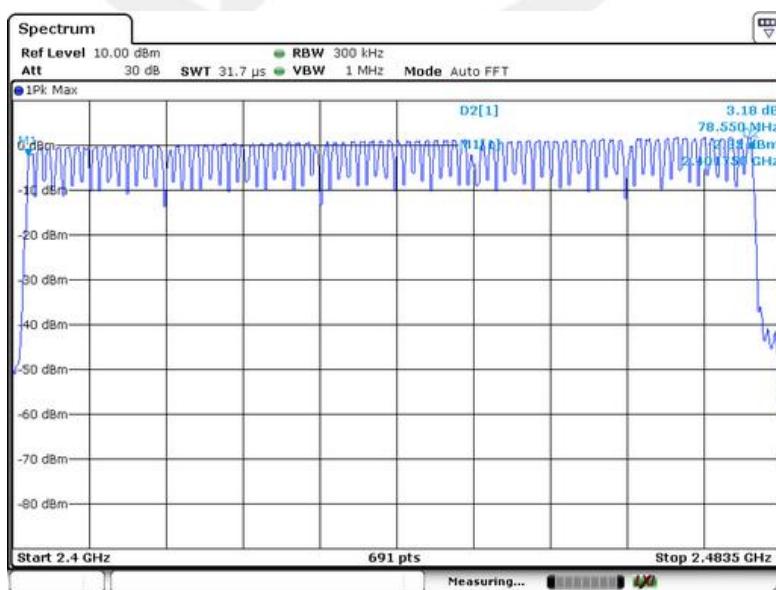

## 11. Time of Occupancy (Dwell Time) test

### 11.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:


$$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 31.6\text{s}$$

with:

- hop rate =  $1600 * 1/\text{s}$  for DH1 packets =  $1600 \text{ s}^{-1}$
- hop rate =  $1600/3 * 1/\text{s}$  for DH3 packets =  $533.33 \text{ s}^{-1}$
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

### 11.2 Test SET-UP (Block Diagram of Configuration)



### 11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 11.4 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.


Modulation: GFSK      Test Date : May 13, 2020  
 Test By: Loren      Temperature : 25 °C  
 Test Result: PASS      Humidity : 50 %

### 11.5 Test result


Mode	Number of transmission in a 31.6( 79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.375	120	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.630	260.80	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.870	306.14	400

Remark: The results of worst cased was recorded.


DH1:

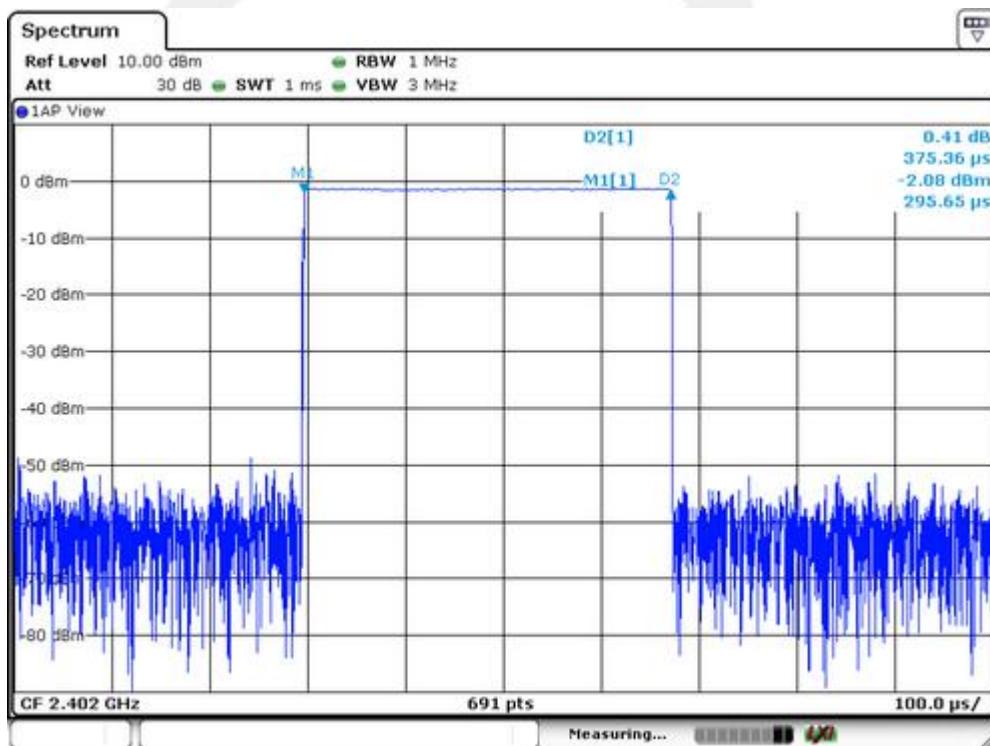

DH3:

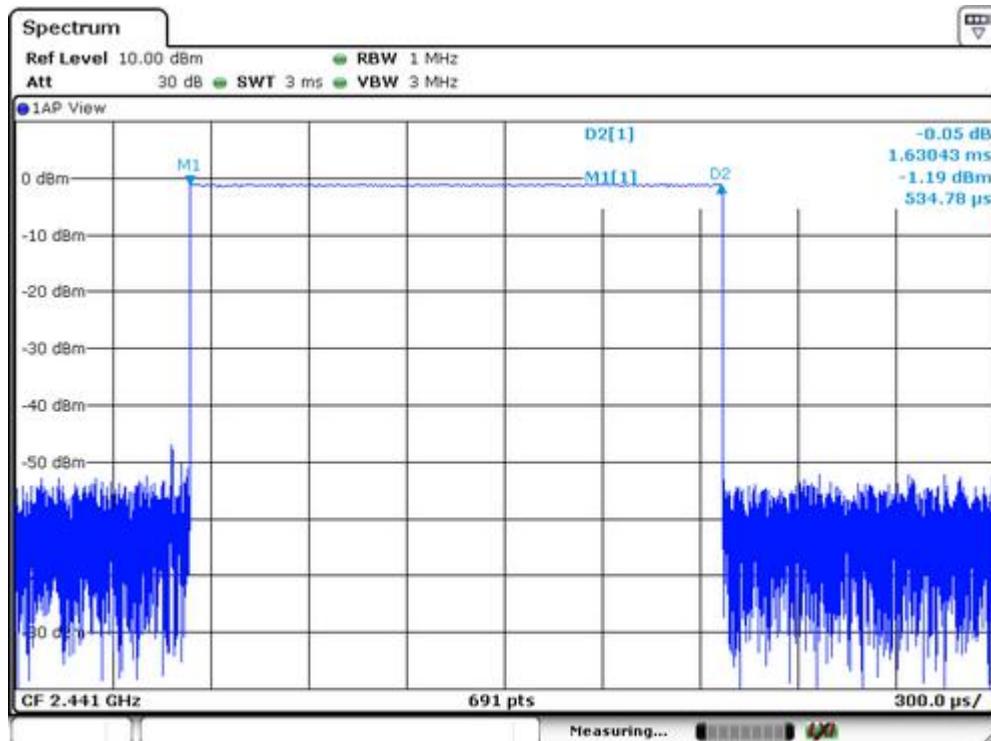

DH5:

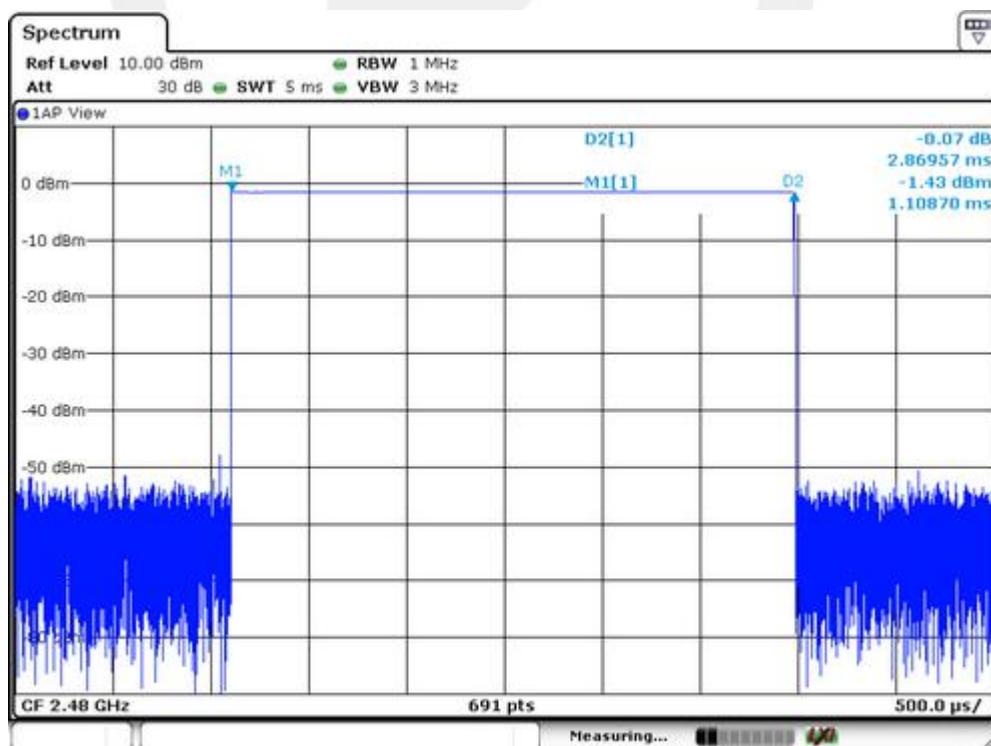

## 12. MAXIMUM PEAK OUTPUT POWER TEST

### 12.1 Measurement Procedure

- a. Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 12.2 Test SET-UP (Block Diagram of Configuration)



### 12.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



## 12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	May 13, 2020
Test By:	Loren	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	-1.18	0.762	1000	PASS
40	2441	-1.42	0.721	1000	PASS
79	2480	-1.14	0.769	1000	PASS

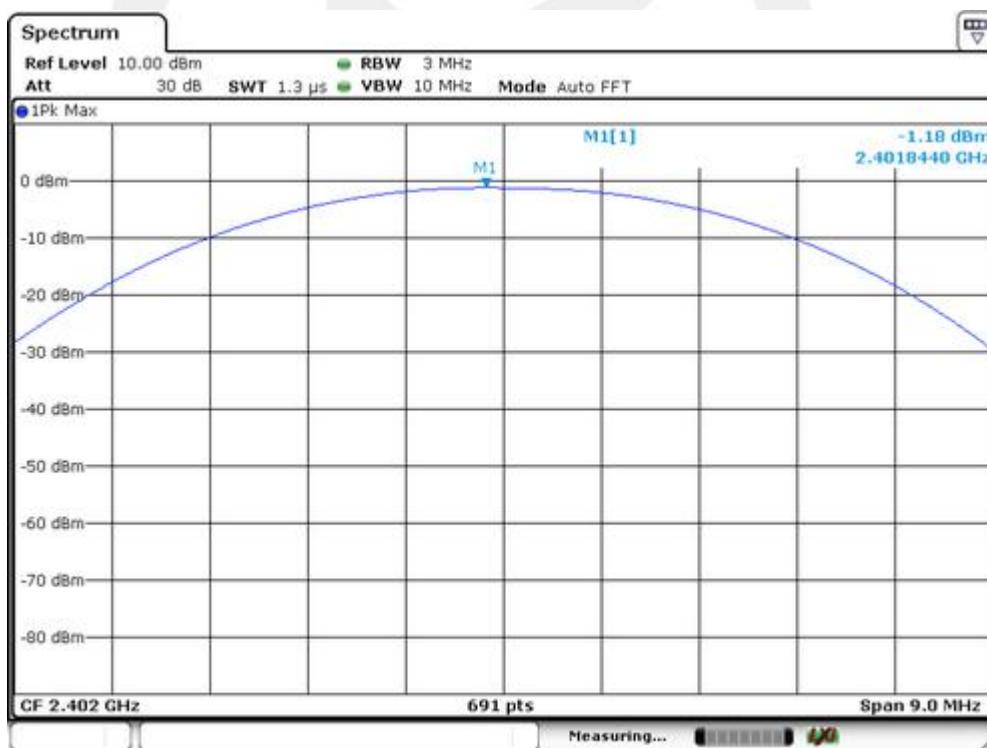


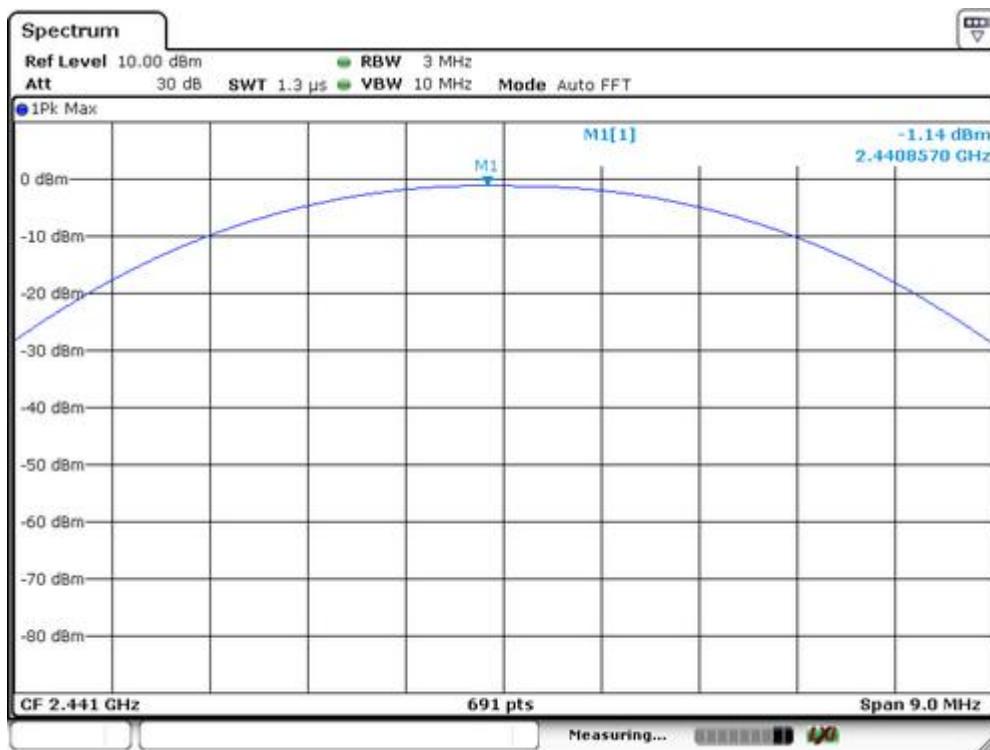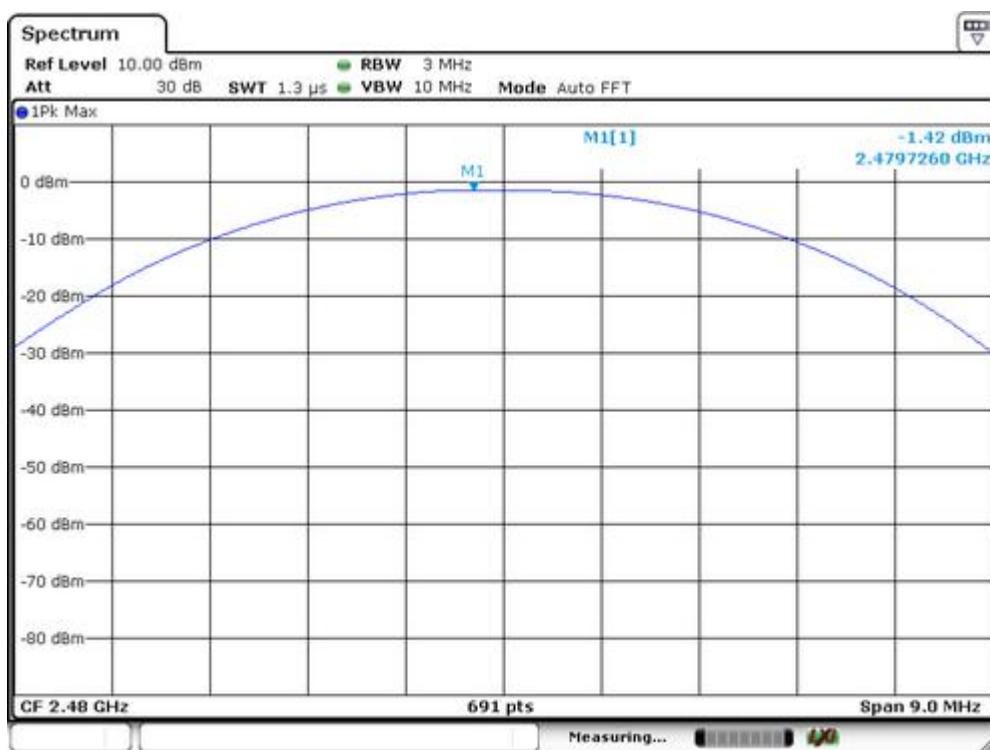

Spectrum Detector: PK      Test Date : May 13, 2020  
 Test By: Loren      Temperature : 25 °C  
 Test Result: PASS      Humidity : 50 %  
 Modulation: Π/4-DQPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	-0.66	0.859	125	PASS
40	2441	<b>-0.63</b>	0.865	125	PASS
79	2480	-0.87	0.818	125	PASS

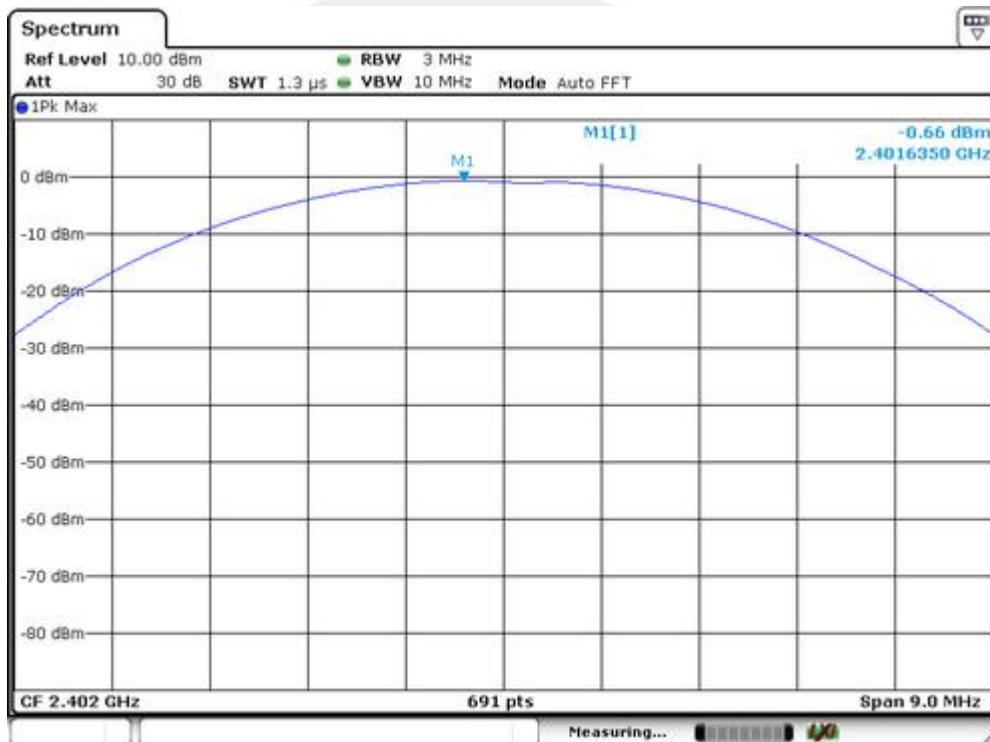

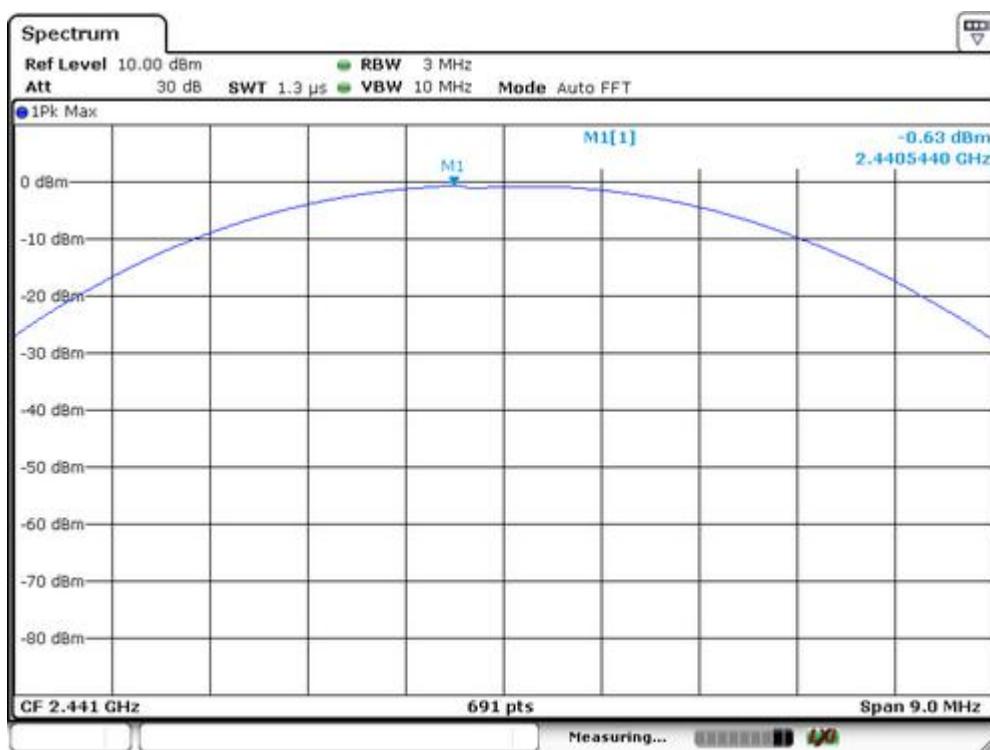

## 13. Band EDGE test

### 13.1 Measurement Procedure

#### For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

#### For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the ban edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:


For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold


For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

### 13.2 Test SET-UP (Block Diagram of Configuration) For Conducted Test



### For Radiated emission Test

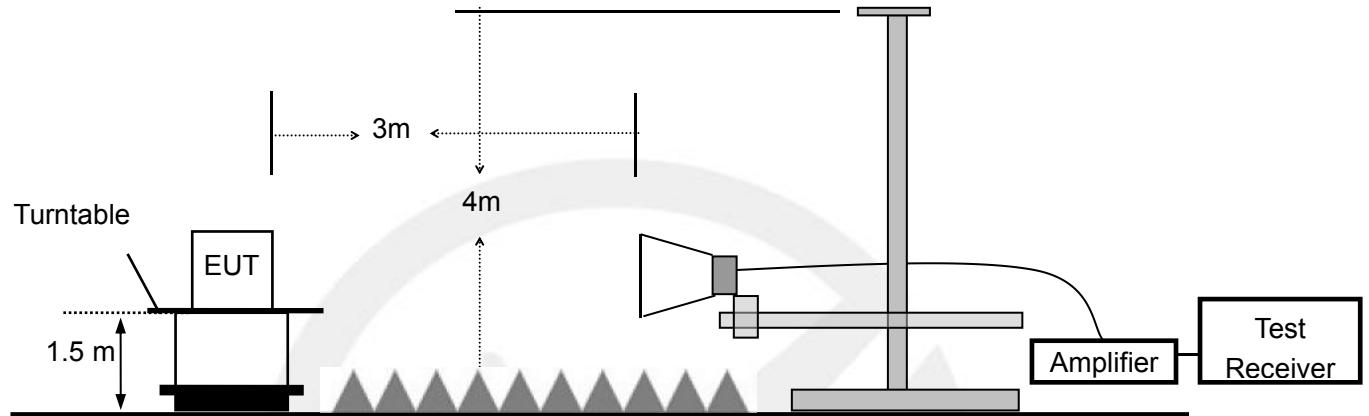

### 13.3 Measurement Equipment Used:

#### For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

#### For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/23/2019	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-12 72	1GHz-18GHz	05/23/2019	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J1010000 0081	1GHz-26.5GHz	05/23/2019	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year

### 13.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	May 13, 2020
Test By:	Loren	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %


#### 1. Conducted Test

For Non-Hopping Mode:


Frequency (MHz)	Modulation	Peak Power Output(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2401.82	GFSK	-1.21	46.44	>20dBc
2401.82	pi/4-DQPSK	-1.16	41.82	>20dBc
2479.82	GFSK	-1.37	55.76	>20dBc
2479.82	pi/4-DQPSK	-1.36	55.21	>20dBc


#### Test plots of GFSK

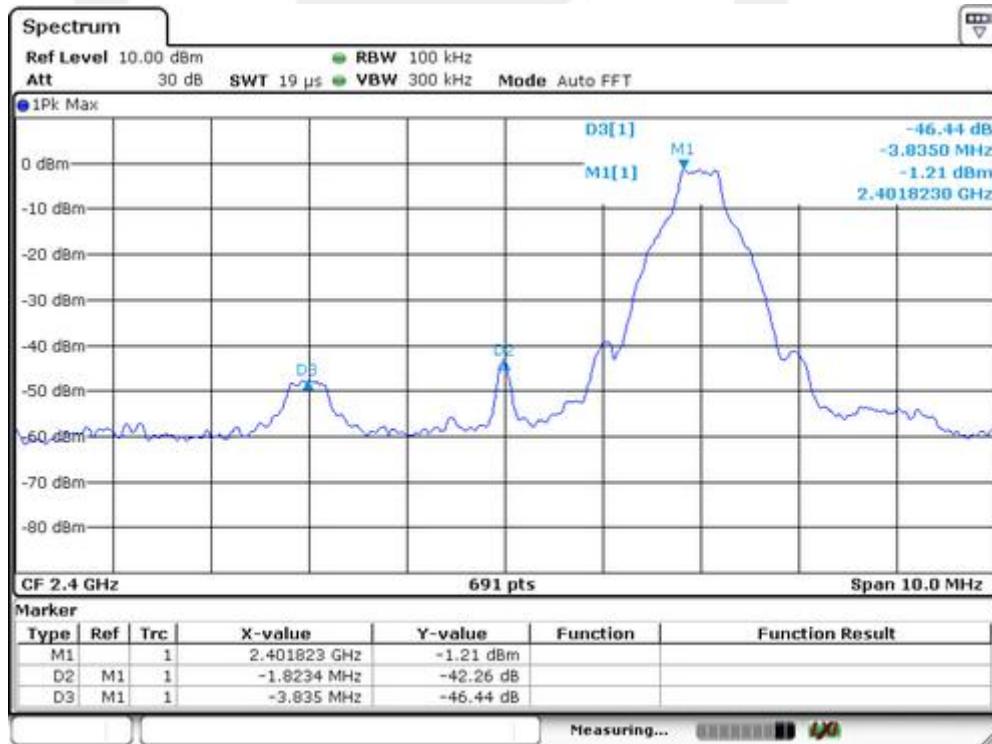

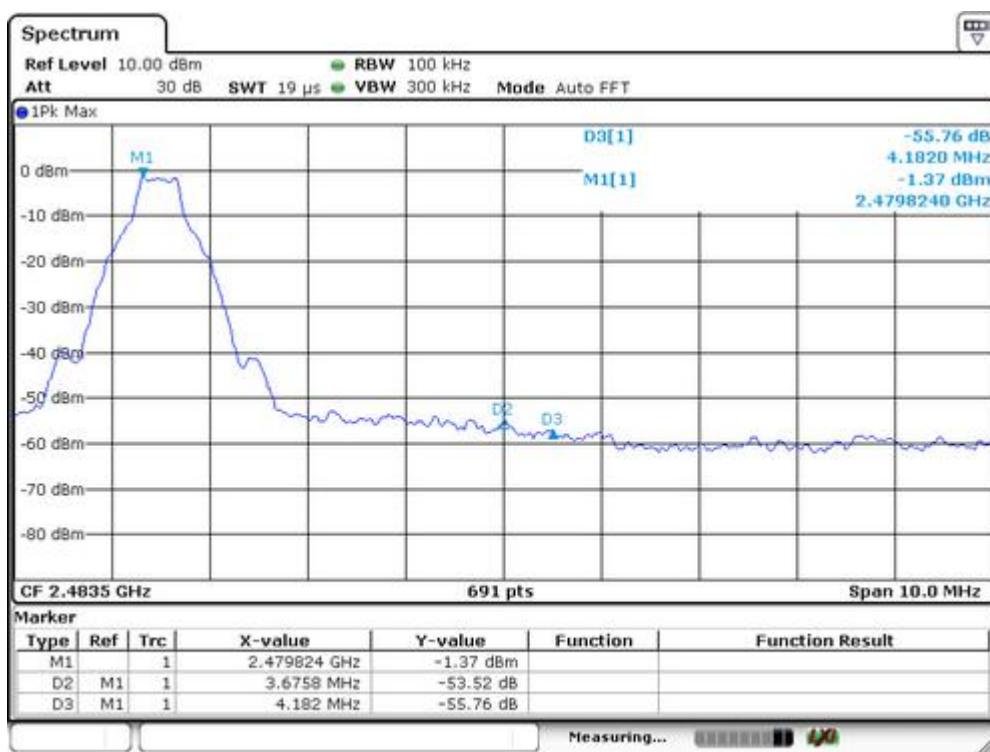

## Test plots of pi/4-DQPSK

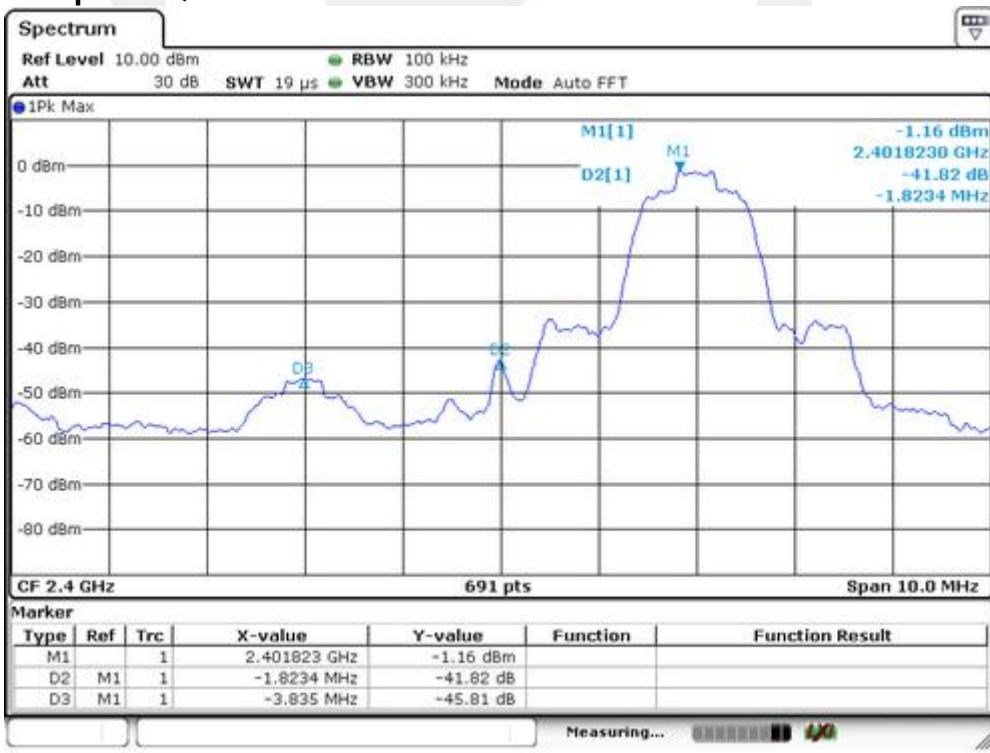


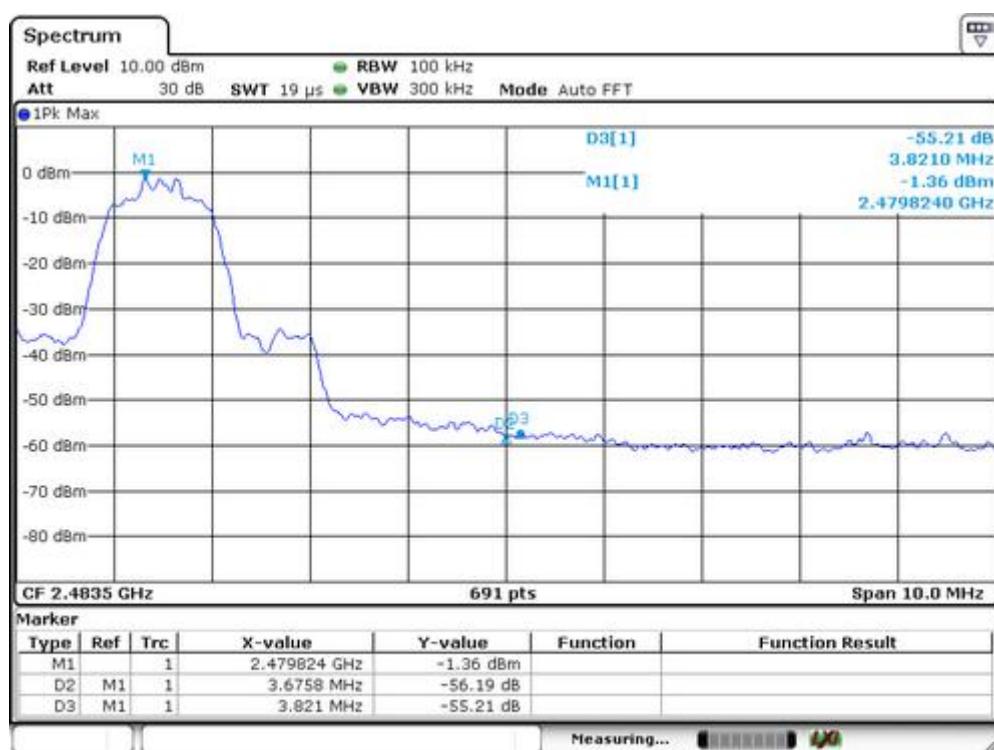


For Hopping Mode:


Frequency (MHz)	Modulation	Peak Power Output(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2403.14	GFSK	-1.70	44.56	>20dBc
2403.98	pi/4-DQPSK	-1.45	42.89	>20dBc
2478.83	GFSK	-2.02	56.66	>20dBc
2480.14	pi/4-DQPSK	-1.47	56.76	>20dBc


### Test plots of GFSK

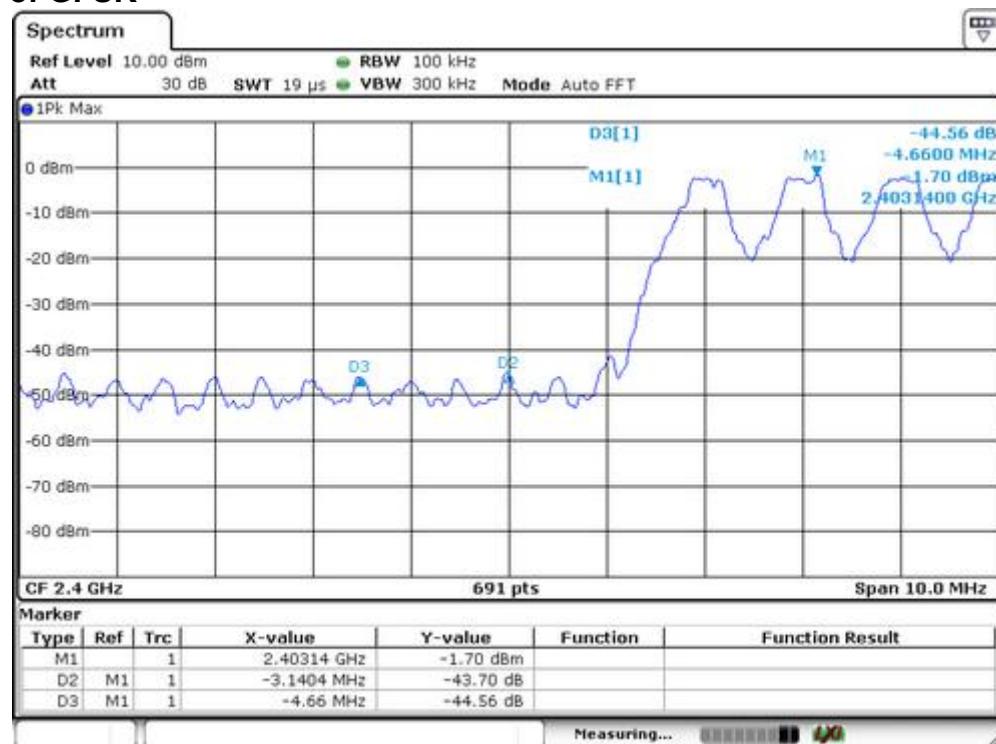

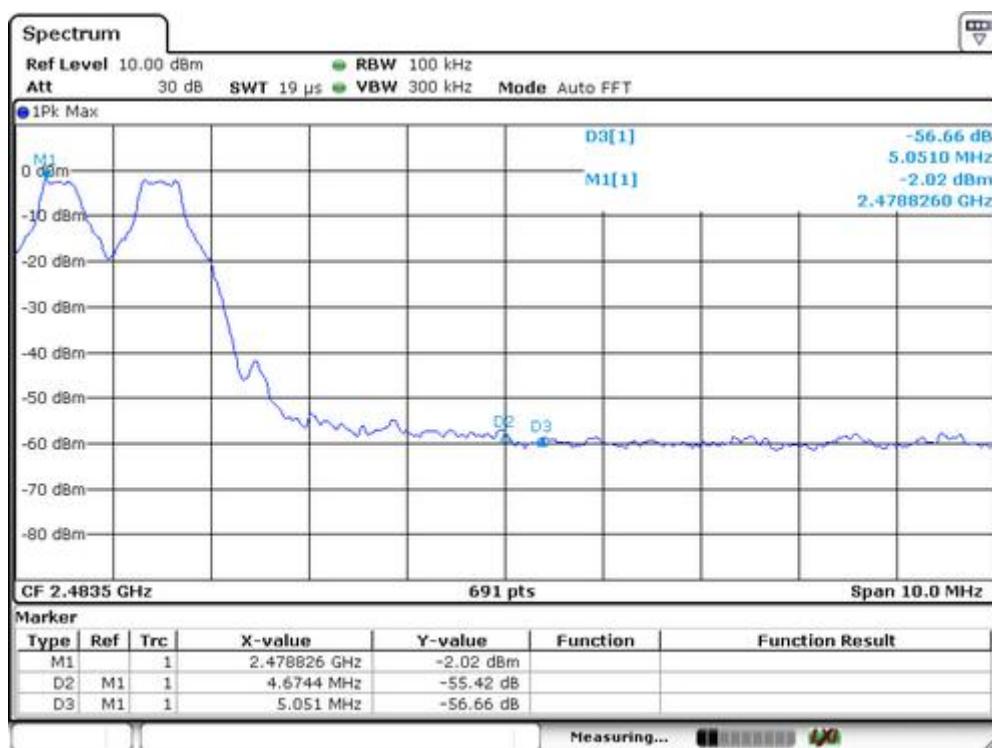


## Test plots of pi/4-DQPSK

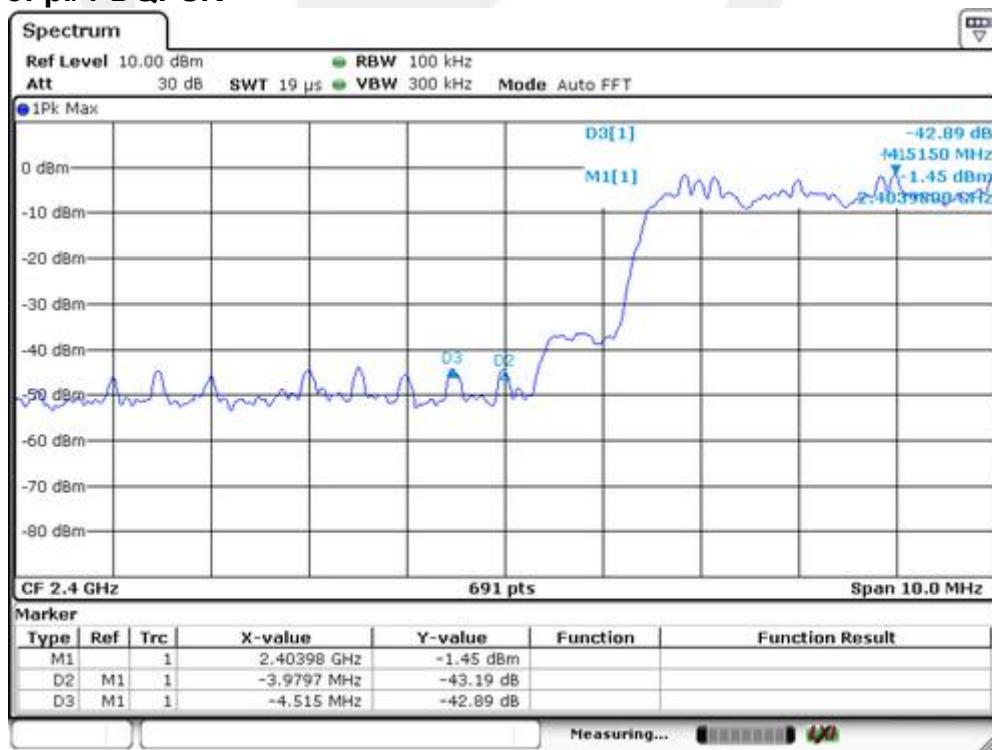

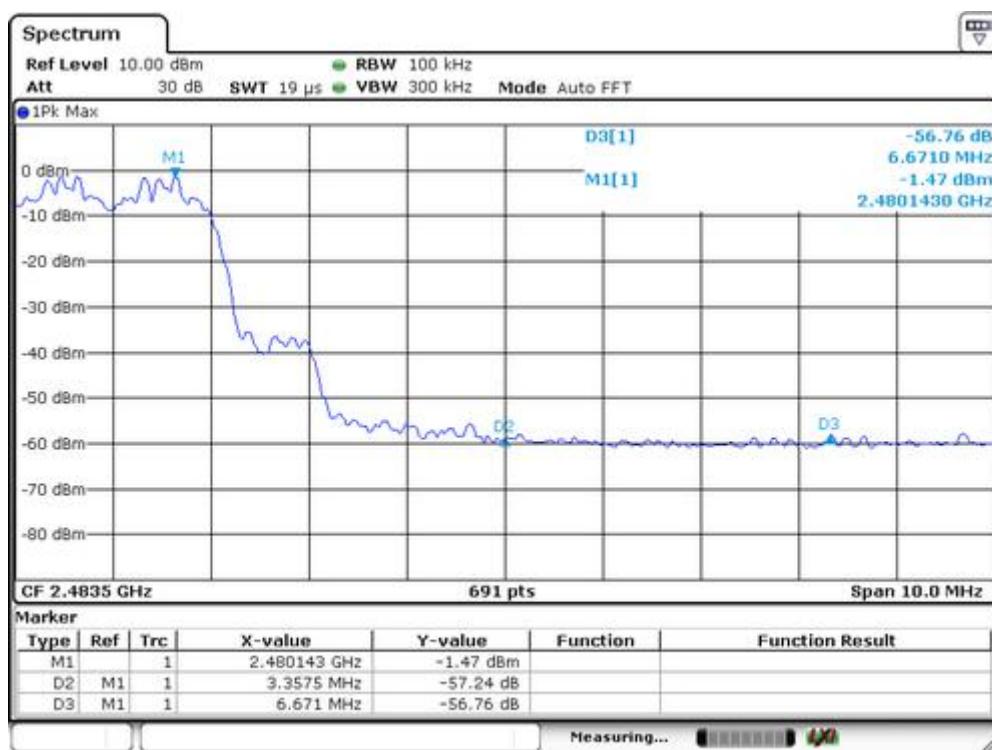

2. Radiated emission Test  
**Worst test modulation GFSK**  
For Non-Hopping Mode:

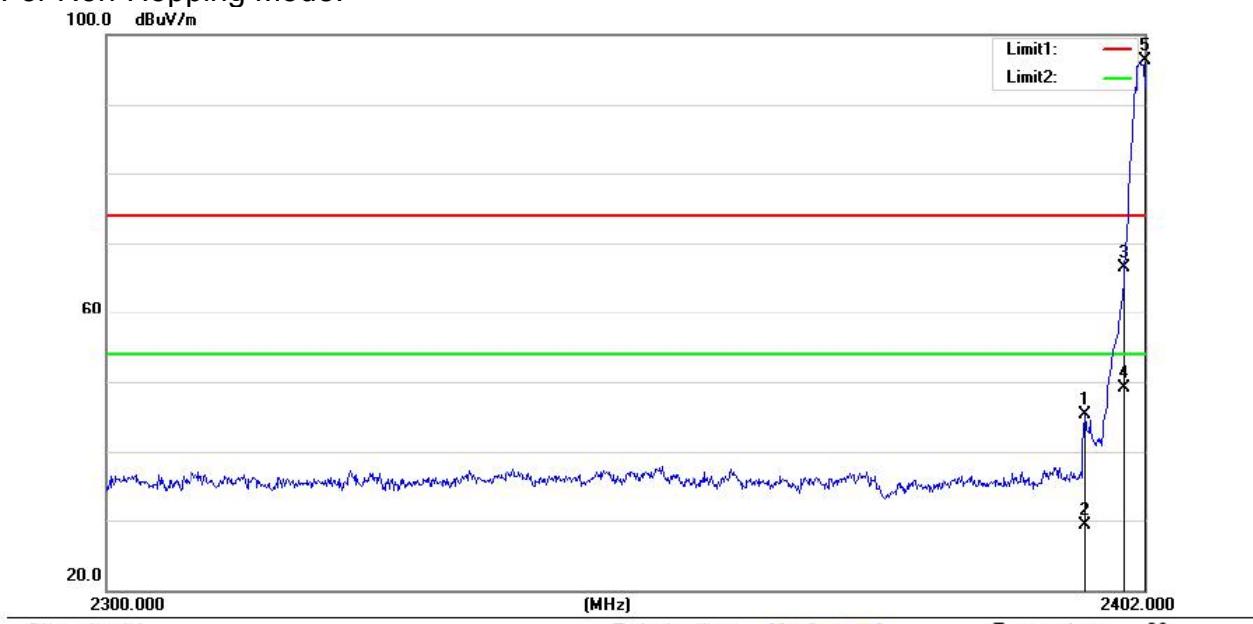

Site site #1

Polarization: *Horizontal*

Temperature: 26

Limit: (RE)FCC PART 15 C 3m\_PEAK

Power: AC 120V/60Hz

Humidity: 55 %


Mode:DSS (TX2402)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2396.084	66.15	-20.95	45.20	74.00	-28.80	peak	0	
2		2396.084	50.25	-20.95	29.30	54.00	-24.70	AVG	0	
3		2400.000	87.37	-20.93	66.44	74.00	-7.56	peak	0	
4		2400.000	70.02	-20.93	49.09	54.00	-4.91	AVG	0	
5	*	2402.000	117.18	-20.93	96.25	74.00	22.25	peak	0	

\*:Maximum data    x:Over limit    !:over margin

Operator: Lian

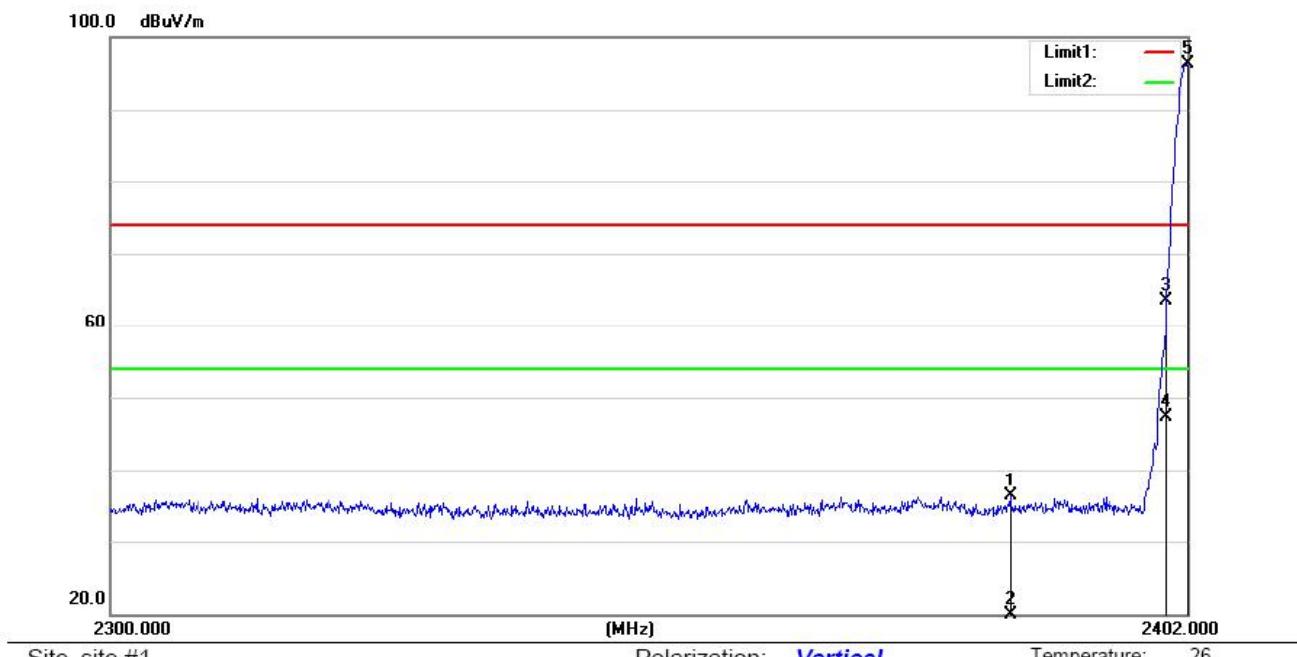

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m\_PEAK

Power: AC 120V/60Hz

Humidity: 55 %


Mode:DSS (TX2402)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2385.068	56.15	-19.85	36.30	74.00	-37.70	peak		0	
2		2385.068	38.25	-19.85	18.40	54.00	-35.60	AVG		0	
3		2400.000	83.22	-19.77	63.45	74.00	-10.55	peak		0	
4		2400.000	67.00	-19.77	47.23	54.00	-6.77	AVG		0	
5	*	2402.000	115.99	-19.76	96.23	74.00	22.23	peak		0	

\*:Maximum data    x:Over limit    !:over margin

Operator: Lian

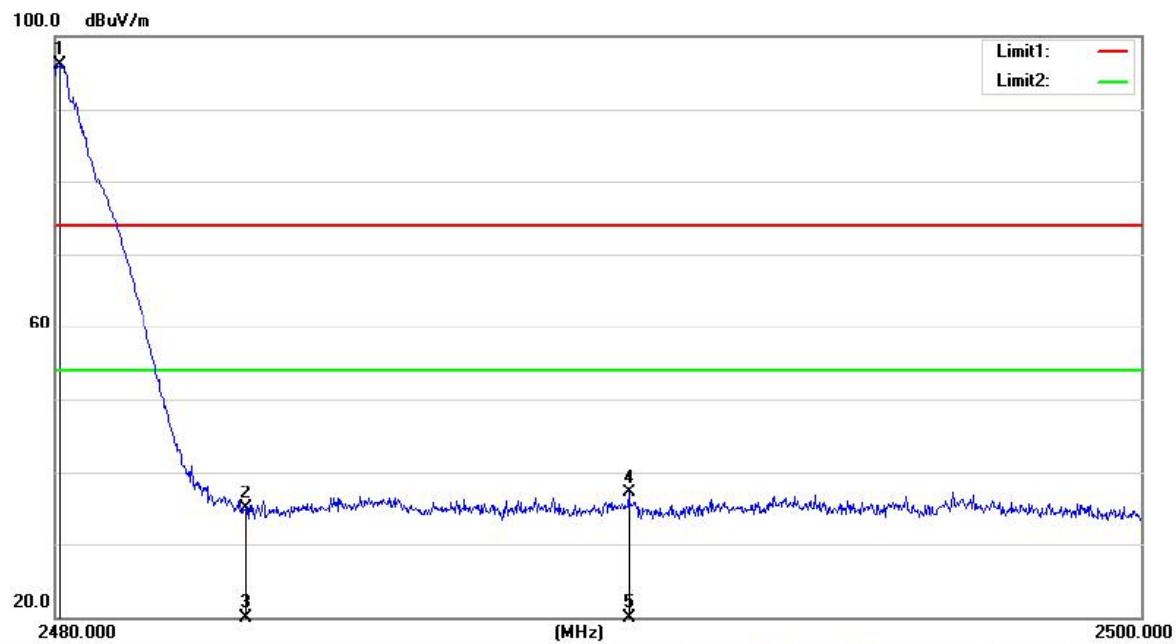

Site site #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m\_PEAK

Power: AC 120V/60Hz

Humidity: 55 %


Mode: DSS (TX2480)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2480.080	116.72	-20.71	96.01	74.00	22.01	peak	0	
2		2483.500	55.55	-20.72	34.83	74.00	-39.17	peak	0	
3		2483.500	37.15	-20.72	16.43	54.00	-37.57	AVG	0	
4		2490.540	57.78	-20.69	37.09	74.00	-36.91	peak	0	
5		2490.540	40.15	-20.69	19.46	54.00	-34.54	AVG	0	

\*:Maximum data    x:Over limit    !:over margin

Operator: Lian

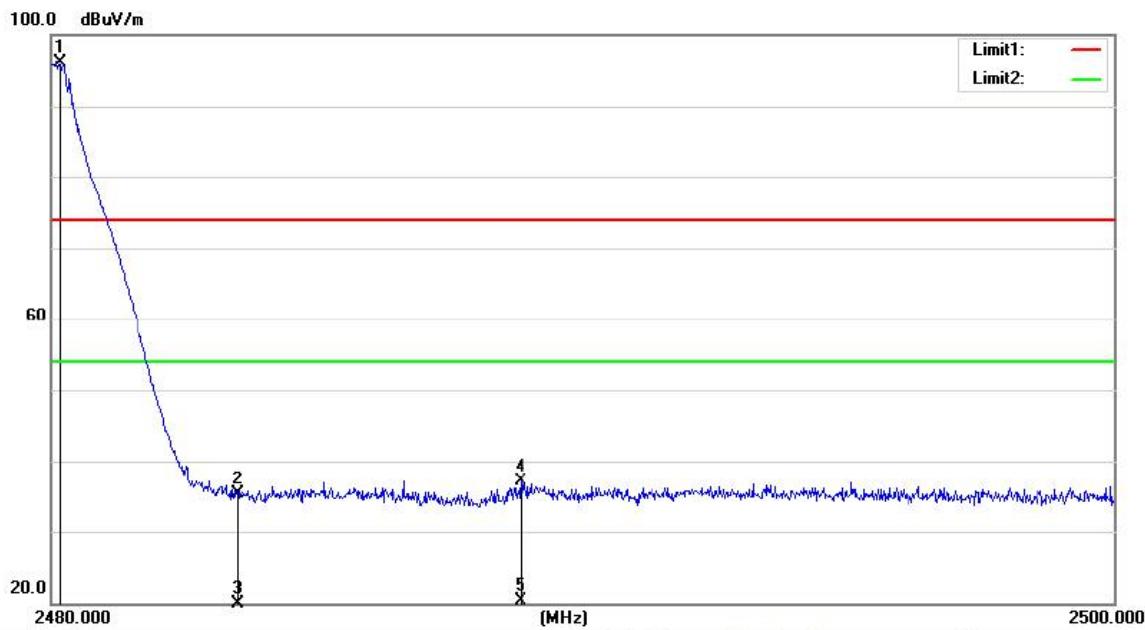

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m\_PEAK

Power: AC 120V/60Hz

Humidity: 55 %

Mode:DSS (TX2480)


Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2480.160	115.29	-19.28	96.01	74.00	22.01	peak		0	
2		2483.500	54.62	-19.27	35.35	74.00	-38.65	peak		0	
3		2483.500	37.15	-19.27	17.88	54.00	-36.12	AVG		0	
4		2488.840	56.28	-19.23	37.05	74.00	-36.95	peak		0	
5		2488.840	39.55	-19.23	20.32	54.00	-33.68	AVG		0	

\*:Maximum data    x:Over limit    !:over margin


Operator: Lian

For Hopping Mode:

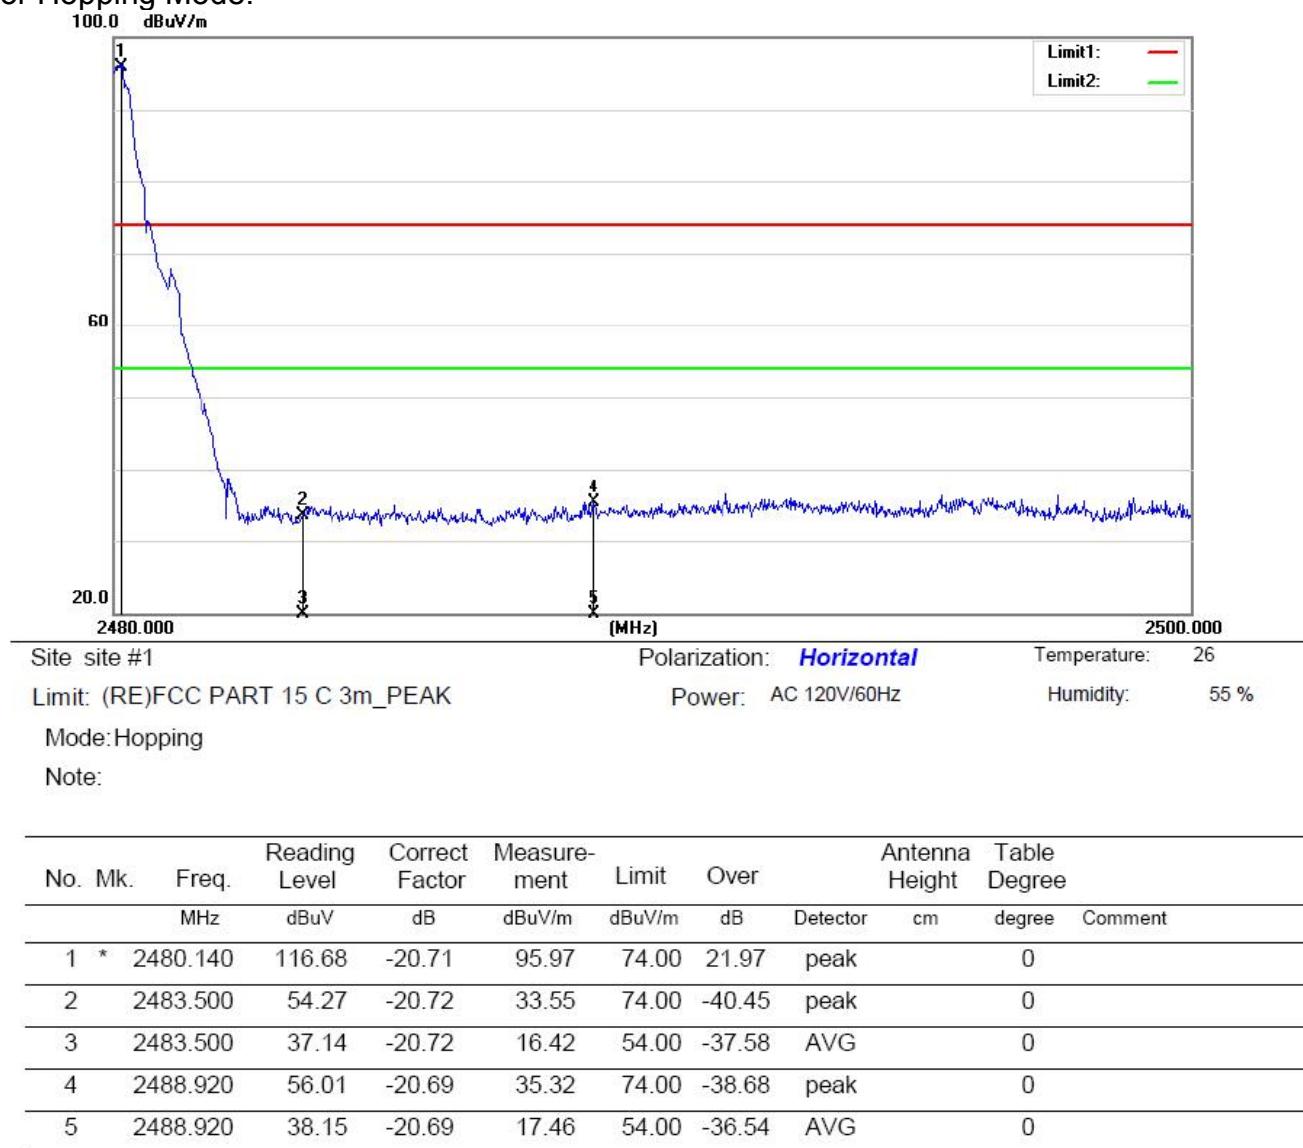


\*:Maximum data x:Over limit !:over margin

Operator: Lian

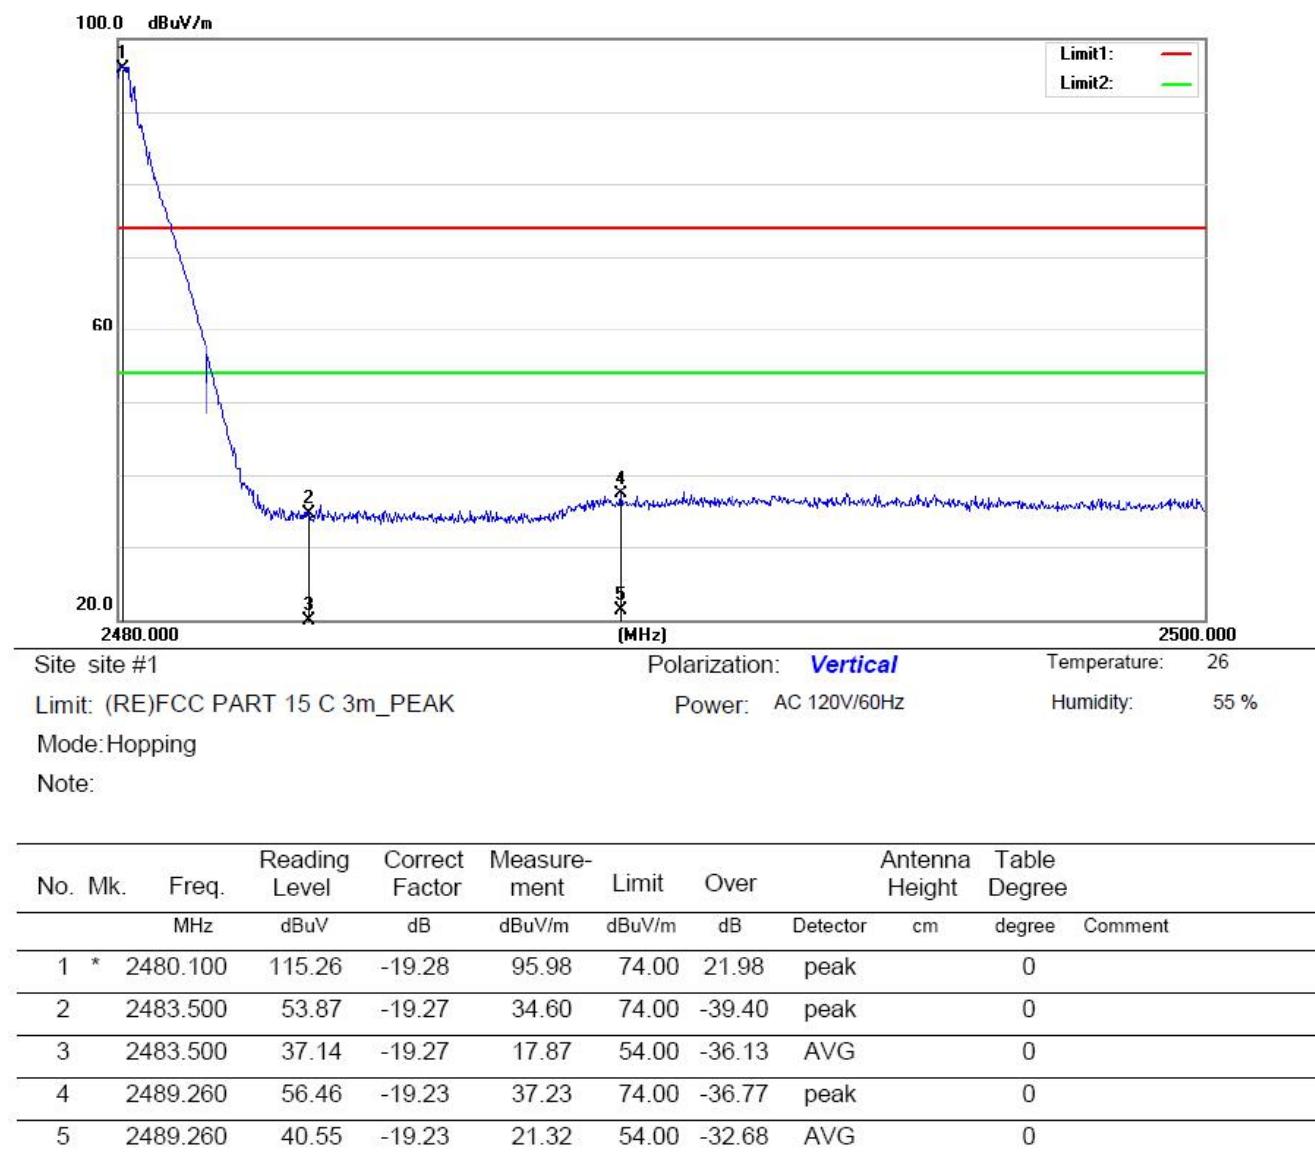

\*:Maximum data    x:Over limit    !:over margin

Operator: Lian

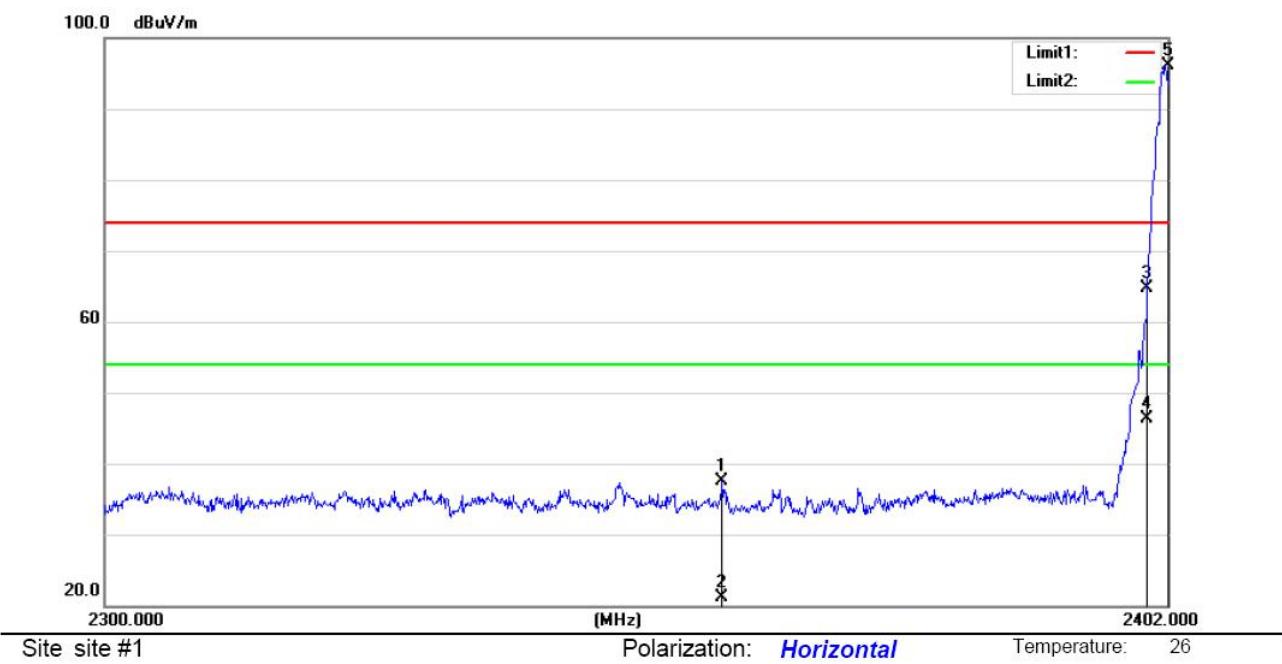

Site site #1

 Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m\_PEAK

Power: AC 120V/60Hz

Humidity: 55 %

Mode:Hopping

Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2358.752	58.51	-21.04	37.47	74.00	-36.53	peak		0
2		2358.752	42.12	-21.04	21.08	54.00	-32.92	AVG		0
3		2400.000	85.57	-20.93	64.64	74.00	-9.36	peak		0
4		2400.000	67.15	-20.93	46.22	54.00	-7.78	AVG		0
5	*	2402.000	117.05	-20.93	96.12	74.00	22.12	peak		0

\*:Maximum data

x:Over limit

!:over margin

Operator: Lian

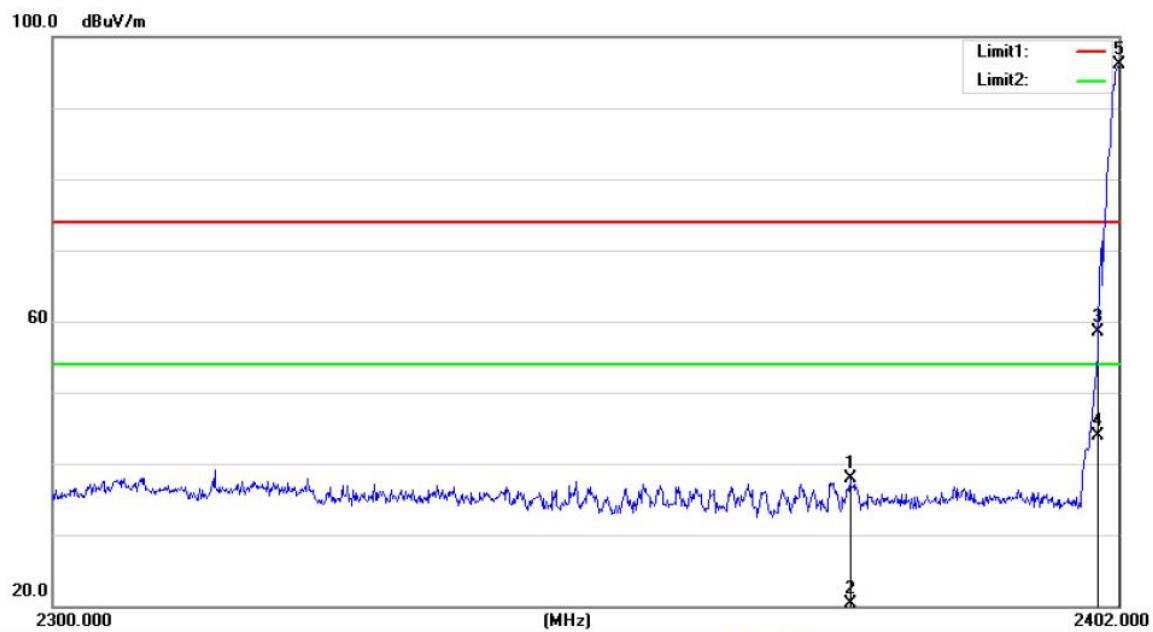

Site site #1

 Polarization: *Vertical*

Temperature: 26

Limit: (RE)FCC PART 15 C 3m\_PEAK

Power: AC 120V/60Hz

Humidity: 55 %

Mode:Hopping

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2375.888	57.78	-19.92	37.86	74.00	-36.14	peak		0	
2		2375.888	40.25	-19.92	20.33	54.00	-33.67	AVG		0	
3		2400.000	78.22	-19.77	58.45	74.00	-15.55	peak		0	
4		2400.000	63.58	-19.77	43.81	54.00	-10.19	AVG		0	
5	*	2402.000	115.91	-19.76	96.15	74.00	22.15	peak		0	

\*:Maximum data

x:Over limit

!:over margin

Operator: Lian

## 14. Antenna Application

### 14.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.


FCC part 15C section 15.247 requirements:



Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.



### 14.2 Result


The EUT's antenna, permanent attached antenna, used a PCB antenna and integrated on PCB, The antenna's gain is 1.3dBi and meets the requirement.

## 15. Photos of EUT

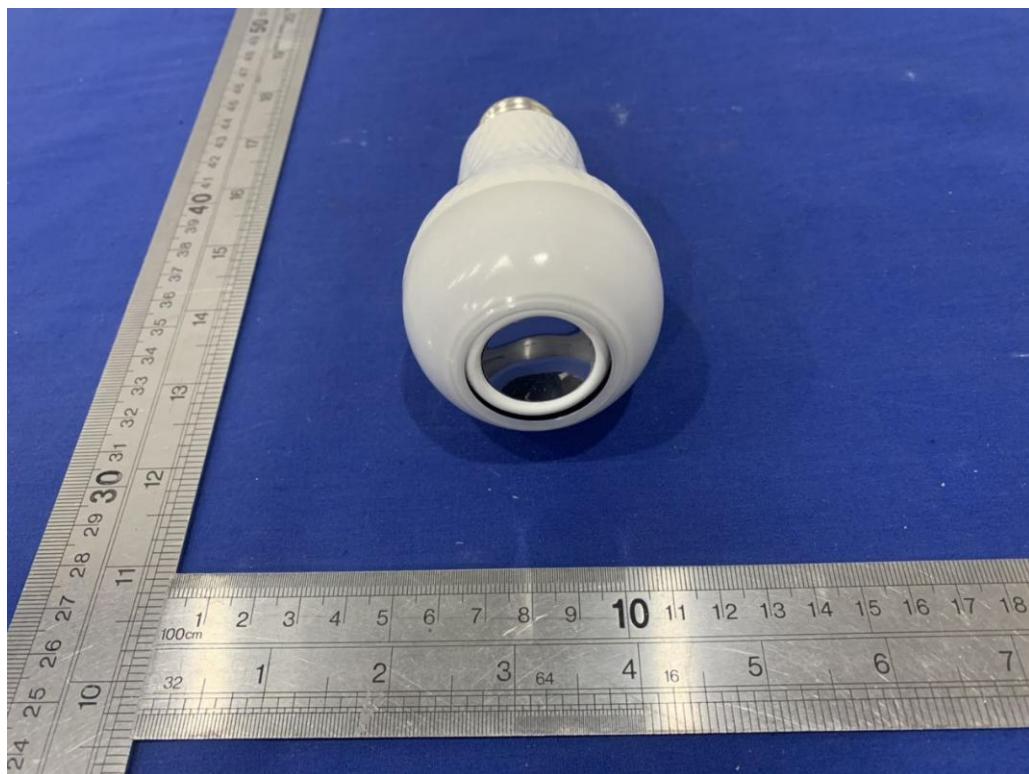

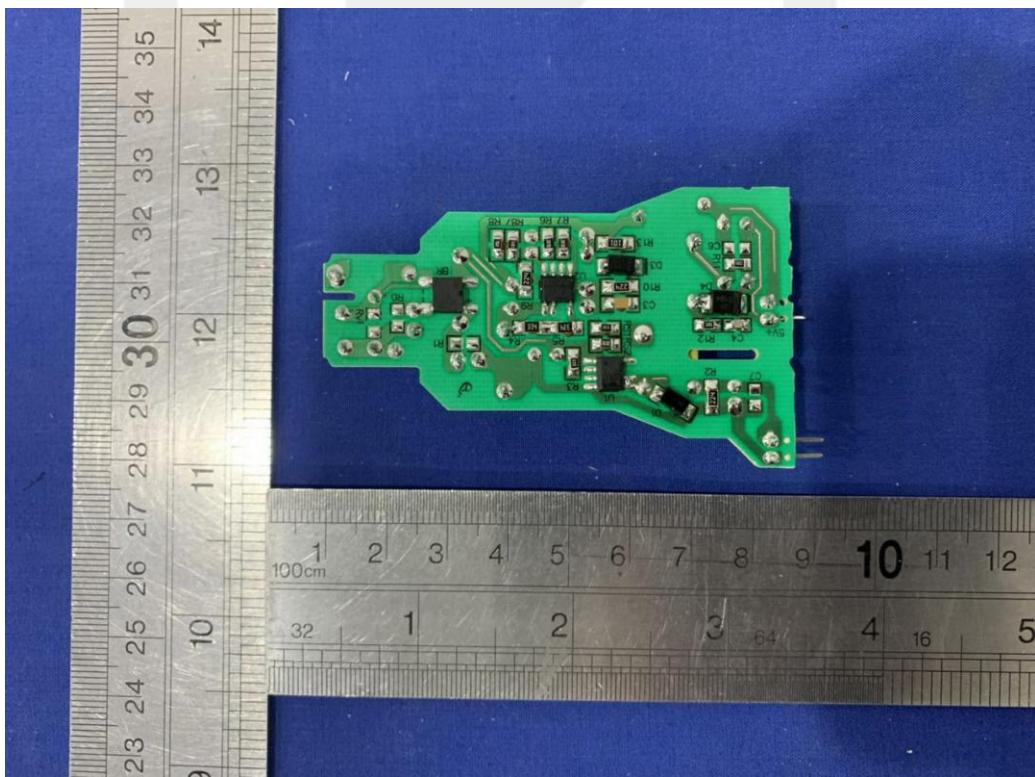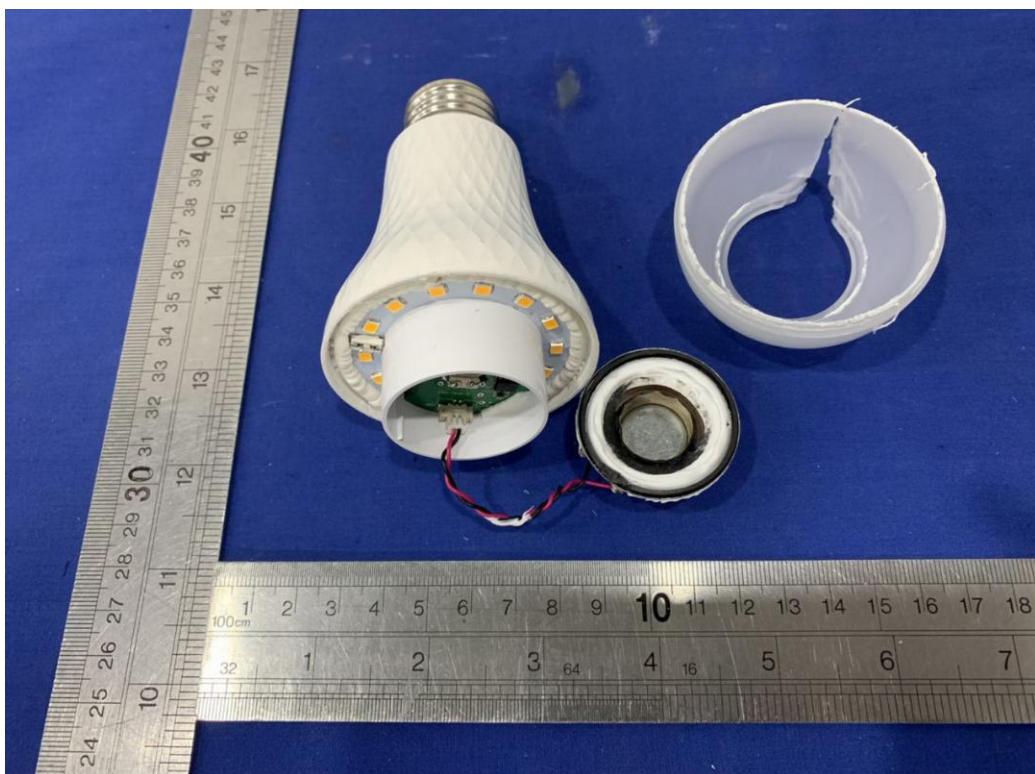

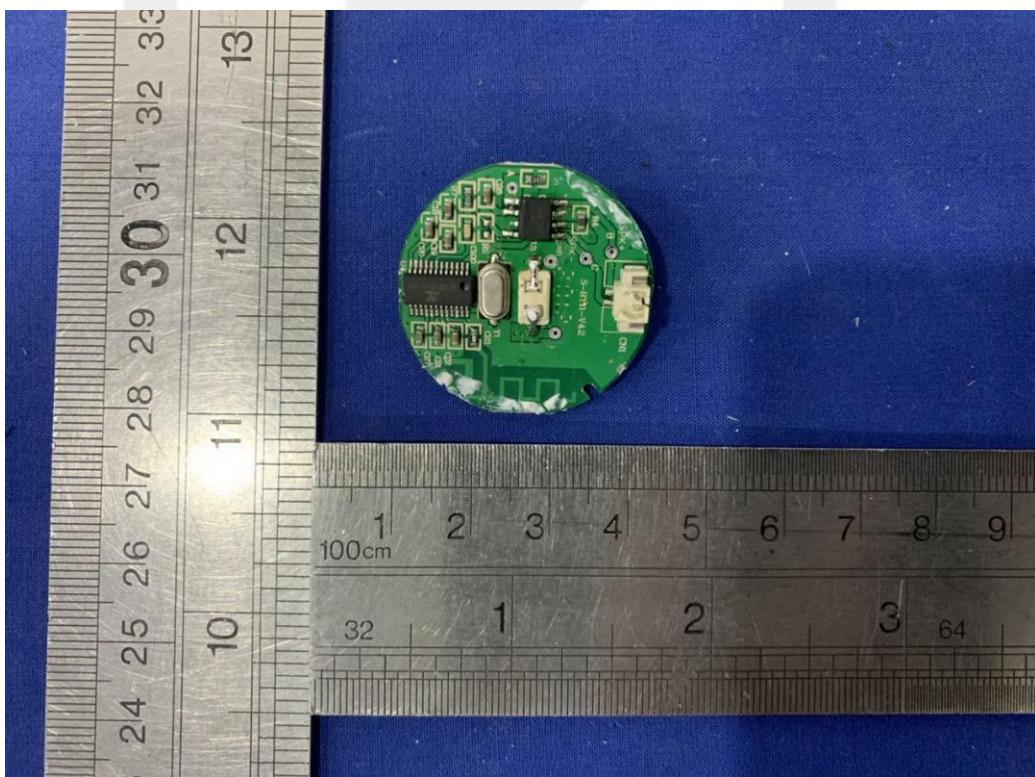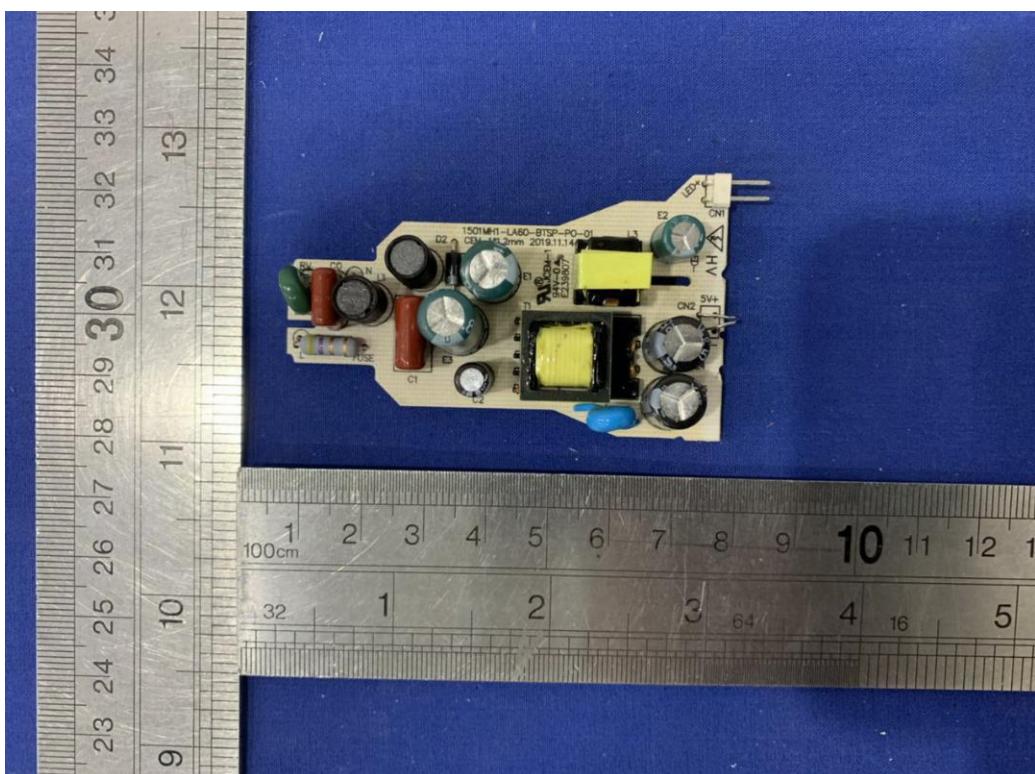

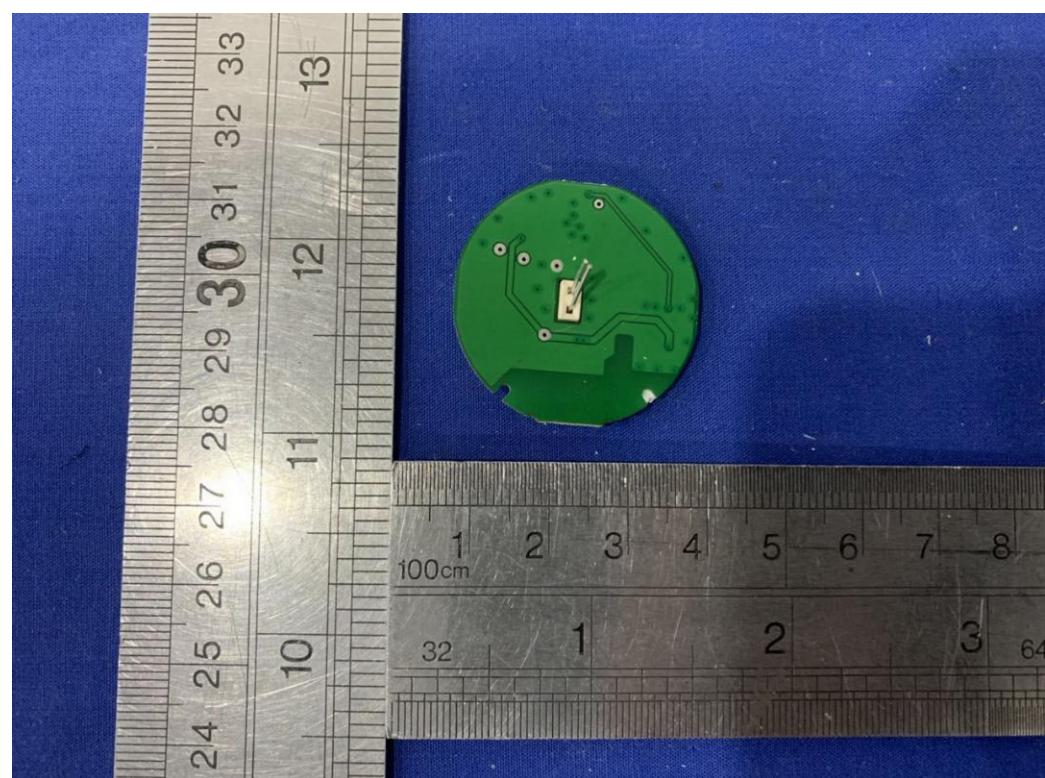

\*\*\* End of Report \*\*\*

## 声 明 Statement

1. 本报告无授权批准人签字及“检验报告专用章”无效；

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制；

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；

Objections shall be raised within 20 days from the date receiving the report.