

## FCC TEST REPORT

### FOR

Shenzhen Lean Kiosk Systems Co., Ltd

In-lane Entry Kiosk

Test Model: REEF-US-LKS8343A

|                                |                                                                                                                        |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Prepared for                   | : Shenzhen Lean Kiosk Systems Co., Ltd                                                                                 |
| Address                        | : 3rd Floor, Building 45, Dayangtian Industrial Zone, Wanfeng Community,<br>Xinqiao Street, Bao' an District, Shenzhen |
| Prepared by                    | : Shenzhen LCS Compliance Testing Laboratory Ltd.                                                                      |
| Address                        | : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan<br>District, Shenzhen, China                |
| Tel                            | : (+86)755-82591330                                                                                                    |
| Fax                            | : (+86)755-82591332                                                                                                    |
| Web                            | : <a href="http://www.LCS-cert.com">www.LCS-cert.com</a>                                                               |
| Mail                           | : <a href="mailto:webmaster@LCS-cert.com">webmaster@LCS-cert.com</a>                                                   |
| Date of receipt of test sample | : May 15, 2020                                                                                                         |
| Number of tested samples       | : 2                                                                                                                    |
| Sample No.                     | : 200508151A-1, 200508151A-2                                                                                           |
| Serial number                  | : Prototype                                                                                                            |
| Date of Test                   | : May 15, 2020 ~ June 30, 2020                                                                                         |
| Date of Report                 | : July 03, 2020                                                                                                        |

**FCC TEST REPORT**  
**FCC CFR 47 PART 15 C (15.225)****Report Reference No.** ..... : **LCS200508106AED**

Date of Issue..... : July 03, 2020

**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,  
Baoan District, Shenzhen, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name**..... : **Shenzhen Lean Kiosk Systems Co., Ltd**Address..... : 3rd Floor, Building 45, Dayangtian Industrial Zone, Wanfeng  
Community, Xinqiao Street, Bao' an District, Shenzhen**Test Specification**

Standard..... : FCC CFR 47 PART 15 C(15.225)

**Test Report Form No**..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


**Test Item Description**..... : **In-lane Entry Kiosk**

Trade Mark..... : N/A

Test Model..... : REEF-US-LKS8343A

Ratings..... : Input: AC 120V, 60Hz  
Output: DC 12V/24V/48V, 2.7AResult ..... : **Positive****Compiled by:**

Jack Liu/ File administrators

**Supervised by:**

Jin Wang/ Technique principal

**Approved by:**

Gavin Liang/ Manager

**FCC -- TEST REPORT**

|                          |                        |                                       |
|--------------------------|------------------------|---------------------------------------|
| <b>Test Report No. :</b> | <b>LCS200508106AED</b> | <u>July 03, 2020</u><br>Date of issue |
|--------------------------|------------------------|---------------------------------------|

Test Model..... : REEF-US-LKS8343A

EUT..... : In-lane Entry Kiosk

**Applicant..... : Shenzhen Lean Kiosk Systems Co., Ltd**Address..... : 3rd Floor, Building 45, Dayangtian Industrial Zone, Wanfeng  
Community, Xinqiao Street, Bao'an District, Shenzhen

Telephone..... : /

Fax..... : /

**Manufacturer..... : Shenzhen Lean Kiosk Systems Co., Ltd**Address..... : 3rd Floor, Building 45, Dayangtian Industrial Zone, Wanfeng  
Community, Xinqiao Street, Bao'an District, Shenzhen

Telephone..... : /

Fax..... : /

**Factory..... : Shenzhen Lean Kiosk Systems Co., Ltd**Address..... : 3rd Floor, Building 45, Dayangtian Industrial Zone, Wanfeng  
Community, Xinqiao Street, Bao'an District, Shenzhen

Telephone..... : /

Fax..... : /

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

| Revision | Issue Date    | Revisions     | Revised By  |
|----------|---------------|---------------|-------------|
| 000      | July 03, 2020 | Initial Issue | Gavin Liang |
|          |               |               |             |
|          |               |               |             |

## TABLE OF CONTENTS

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                                     | <b>6</b>  |
| 1.1 Description of Device (EUT).....                                   | 6         |
| 1.2 Host System Configuration List and Details.....                    | 7         |
| 1.3 External I/O.....                                                  | 7         |
| 1.4 Description of Test Facility.....                                  | 7         |
| 1.5 Statement of The Measurement Uncertainty.....                      | 7         |
| 1.6 Measurement Uncertainty.....                                       | 7         |
| 1.7 Description of Test Modes.....                                     | 8         |
| <b>2. TEST METHODOLOGY.....</b>                                        | <b>9</b>  |
| 2.1. EUT Configuration.....                                            | 9         |
| 2.2. EUT Exercise.....                                                 | 9         |
| 2.3 General Test Procedures.....                                       | 9         |
| <b>3. SYSTEM TEST CONFIGURATION.....</b>                               | <b>10</b> |
| 3.1. Justification.....                                                | 10        |
| 3.2. EUT Exercise Software.....                                        | 10        |
| 3.3. Special Accessories.....                                          | 10        |
| 3.4. Block Diagram/Schematics.....                                     | 10        |
| 3.5. Equipment Modifications.....                                      | 10        |
| 3.6. Test Setup.....                                                   | 10        |
| <b>4. SUMMARY OF TEST RESULTS.....</b>                                 | <b>11</b> |
| <b>5. RADIATED MEASUREMENT.....</b>                                    | <b>12</b> |
| 5.1. Radiated Emission.....                                            | 12        |
| 5.2. Field Strength of Fundamental Emissions and Mask Measurement..... | 20        |
| <b>6. BANDWIDTH OF THE OPERATING FREQUENCY.....</b>                    | <b>23</b> |
| 6.1. Standard Applicable.....                                          | 23        |
| 6.2. Test Result.....                                                  | 23        |
| <b>7. FREQUENCY STABILITY MEASUREMENT.....</b>                         | <b>24</b> |
| 7.1 Standard Applicable.....                                           | 24        |
| 7.2 Test Result.....                                                   | 24        |
| <b>8. LINE CONDUCTED EMISSIONS.....</b>                                | <b>25</b> |
| 8.1. Standard Applicable.....                                          | 25        |
| 8.2. Block Diagram of Test Setup.....                                  | 25        |
| 8.3. Test Results.....                                                 | 25        |
| <b>9. ANTENNA REQUIREMENTS.....</b>                                    | <b>28</b> |
| 9.1 Standard Applicable.....                                           | 28        |
| 9.2 Antenna Connected Construction.....                                | 28        |
| <b>10. LIST OF MEASURING EQUIPMENTS.....</b>                           | <b>29</b> |
| <b>11. TEST SETUP PHOTOGRAPHS OF EUT.....</b>                          | <b>30</b> |
| <b>12. EXTERIOR PHOTOGRAPHS OF THE EUT.....</b>                        | <b>30</b> |
| <b>13. INTERIOR PHOTOGRAPHS OF THE EUT.....</b>                        | <b>30</b> |

## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

|                  |                                                        |
|------------------|--------------------------------------------------------|
| EUT              | : In-lane Entry Kiosk                                  |
| Test Model       | : REEF-US-LKS8343A                                     |
| Power Supply     | : Input: AC 120V, 60Hz<br>Output: DC 12V/24V/48V, 2.7A |
| Hardware Version | : /                                                    |
| Software Version | : /                                                    |

#### Bluetooth

|                     |                                                                                        |
|---------------------|----------------------------------------------------------------------------------------|
| Frequency Range     | : 2402MHz ~ 2480MHz                                                                    |
| Chanel Number       | : 79 channels for Bluetooth V4.1(DSS)<br>40 channels for Bluetooth V4.1(DTS)           |
| Chanel Spacing      | : 1MHz for Bluetooth V4.1 (DSS)<br>2MHz for Bluetooth V4.1 (DTS)                       |
| Modulation Type     | : GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V4.1(DSS)<br>GFSK for Bluetooth V4.1(DTS) |
| Bluetooth Version   | : V4.1                                                                                 |
| Antenna Description | : Internal Antenna, 0dBi(Max.)                                                         |

#### WIFI(2.4G Band)

|                     |                                                                                                                                                         |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range     | : 2412MHz-2462MHz                                                                                                                                       |
| Channel Spacing     | : 5MHz                                                                                                                                                  |
| Channel Number      | : 11 channels for 20MHz bandwidth(2412MHz~2462MHz)<br>7 channels for 40MHz bandwidth(2422MHz~2452MHz)                                                   |
| Modulation Type     | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK);<br>IEEE 802.11g/n: OFDM(64QAM, 16QAM, QPSK, BPSK)                                                                |
| Antenna Description | : Internal Antenna, 0dBi(Max.)                                                                                                                          |
| NFC Function        | : 13.56MHz                                                                                                                                              |
| Extreme vol. Limits | : Extreme 1:10.2VDC to 13.8VDC (nominal: 12.0VDC)<br>Extreme 2:20.4VDC to 27.6VDC (nominal: 24.0VDC)<br>Extreme 3:40.8VDC to 55.2VDC (nominal: 48.0VDC) |

## 1.2 Host System Configuration List and Details

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| ---          | ---         | ---   | ---           | ---         |

## 1.3 External I/O

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| ---                  | ---      | ---   |

## 1.4 Description of Test Facility

FCC Registration Number is 254912.

Industry Canada Registration Number is 9642A.

EMSD Registration Number is ARCB0108.

UL Registration Number is 100571-492.

TUV SUD Registration Number is SCN1081.

TUV RH Registration Number is UA 50296516-001.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier: CN0071

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

| Test Item              | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty  | 9KHz~30MHz      | ±3.10dB     | (1)  |
|                        | 30MHz~200MHz    | ±2.96dB     | (1)  |
|                        | 200MHz~1000MHz  | ±3.10dB     | (1)  |
|                        | 1GHz~26.5GHz    | ±3.80dB     | (1)  |
|                        | 26.5GHz~40GHz   | ±3.90dB     | (1)  |
| Conduction Uncertainty | 150kHz~30MHz    | ±1.63dB     | (1)  |
| Power disturbance      | 30MHz~300MHz    | ±1.60dB     | (1)  |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in Y position.

AC conducted emission pre-test at AC 120V/60Hz modes, recorded worst case.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power.

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.225 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (RF Test Tool V5.4) provided by application.

#### 3.3. Special Accessories

| No. | Equipment | Manufacturer | Model No. | Serial No. | Length | shielded/<br>unshielded | Notes |
|-----|-----------|--------------|-----------|------------|--------|-------------------------|-------|
| /   | /         | /            | /         | /          | /      | /                       | /     |

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

#### 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C |                      |        |
|-----------------------------------------|----------------------|--------|
| Test Items                              | FCC Rules            | Result |
| Line Conducted Emissions                | §15.207(a)           | PASS   |
| Field Strength of Fundamental Emissions | §15.225(a)(b)(c)     | PASS   |
| Radiated Emissions                      | §15.225(d) & §15.209 | PASS   |
| 20dB Bandwidth                          | § 15.215             | PASS   |
| Frequency Stability                     | §15.225(e)           | PASS   |
| Antenna Requirement                     | §15.203              | PASS   |

## 5. RADIATED MEASUREMENT

### 5.1. Radiated Emission

#### 5.1.1. Standard Applicable

According to §15.209/ §15.205

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505   | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (\2\)       |
| 13.36-13.41       |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

#### 5.1.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                           |
|-------------------------------------------|---------------------------------------------------|
| Attenuation                               | Auto                                              |
| Start Frequency                           | 1000 MHz                                          |
| Stop Frequency                            | 10 <sup>th</sup> carrier harmonic                 |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

| Receiver Parameter     | Setting                                    |
|------------------------|--------------------------------------------|
| Attenuation            | Auto                                       |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG  |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP   |

### 5.1.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation of 12mm.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation of 12mm.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation of 12mm.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation of 12mm.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


**Premeasurement:**

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

**Final measurement:**

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 5.1.4. Test Setup Layout

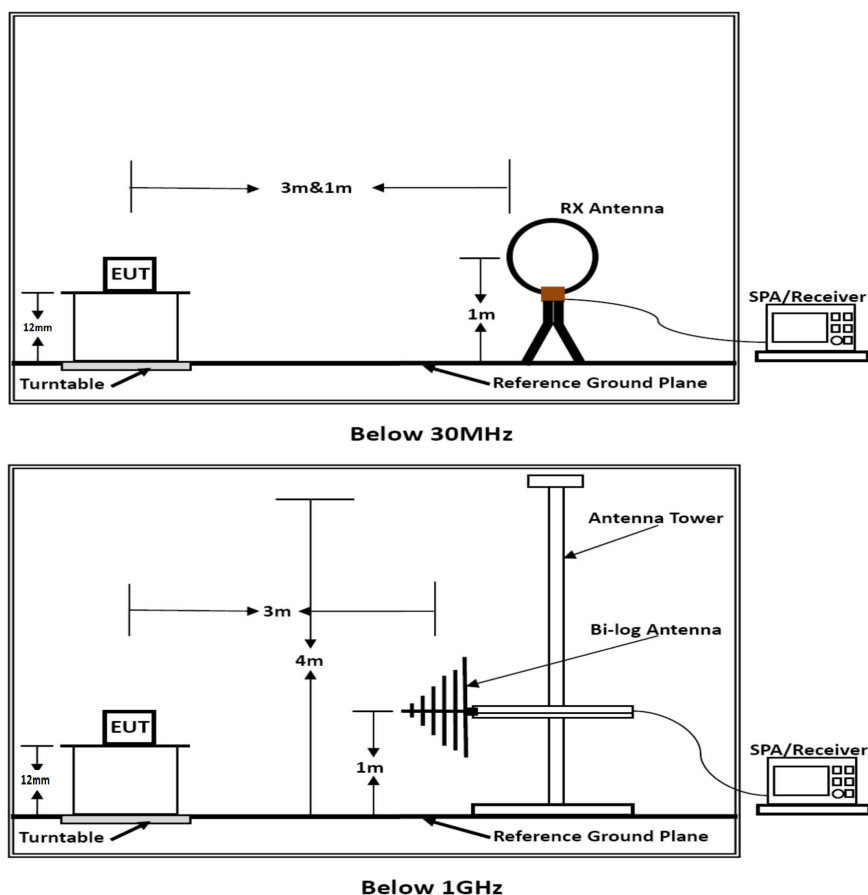

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

## 5.1.5. Test Results

|               |          |                |       |
|---------------|----------|----------------|-------|
| Temperature   | 24.3℃    | Humidity       | 53.0% |
| Test Engineer | Scout Wu | Configurations | NFC   |

PASS.

The test data please refer to following page:

**9 KHz~30MHz**

Note: Only recorded the worst test result.

| Freq. MHz | Reading dBuV | Factor dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark |
|-----------|--------------|-----------|-----------------|--------------|-----------|--------|
| 0.52      | --           | --        | --              | 73.3         | --        | --     |
| 1.62      | --           | --        | --              | 63.4         | --        | --     |
| 2.64      | 25.89        | 20.76     | 46.65           | 69.50        | -22.85    | QP     |
| 6.32      | 29.52        | 20.78     | 50.30           | 69.50        | -19.20    | QP     |
| 13.56     | 60.34        | 20.30     | 80.64           | 124.00       | -72.90    | QP     |
| 21.15     | 28.84        | 20.78     | 49.62           | 69.50        | -43.36    | QP     |
| 20.77     | 27.51        | 20.40     | 47.91           | 69.50        | -21.59    | QP     |
| 25.91     | 30.36        | 20.41     | 50.77           | 69.50        | -18.73    | QP     |


\*Note: Emission Level= Reading Level + Antenna Factor + Cable Loss

Margin = Emission Limit – Emission Values


--" means noise floor.

### 30MHz ~ 1GHz

Horizontal:

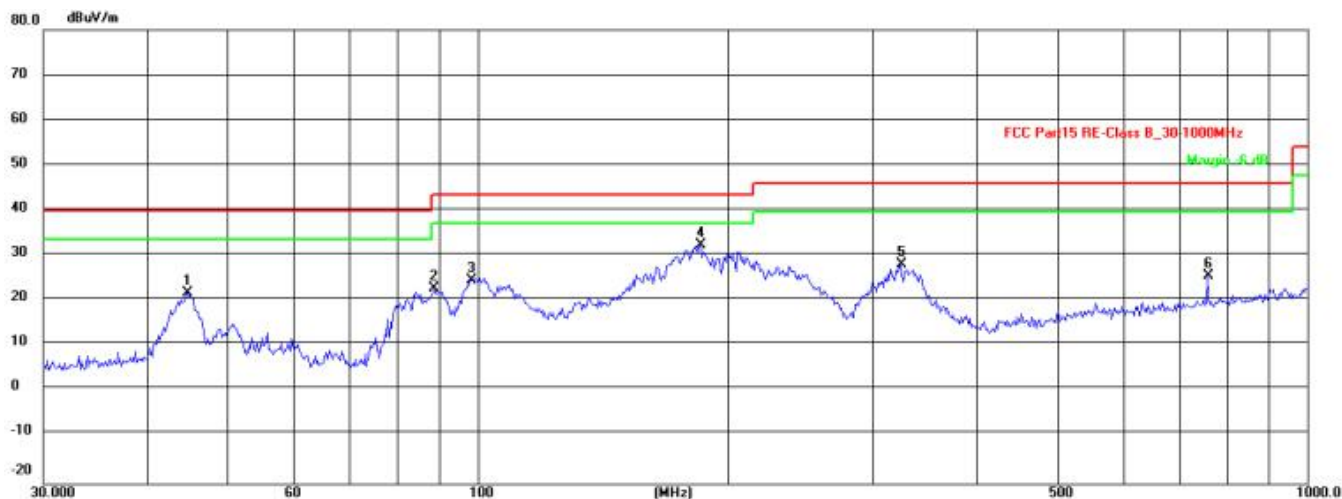

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|
| 1   | 44.7433         | 38.58          | -16.50        | 22.08          | 40.00          | -17.92      | QP   |
| 2   | 88.6524         | 43.31          | -20.27        | 23.04          | 43.50          | -20.46      | QP   |
| 3   | 98.1419         | 43.62          | -18.66        | 24.96          | 43.50          | -18.54      | QP   |
| 4 * | 185.1379        | 52.22          | -19.64        | 32.58          | 43.50          | -10.92      | QP   |
| 5   | 323.3204        | 43.34          | -15.06        | 28.28          | 46.00          | -17.72      | QP   |
| 6   | 758.0408        | 33.54          | -7.65         | 25.89          | 46.00          | -20.11      | QP   |

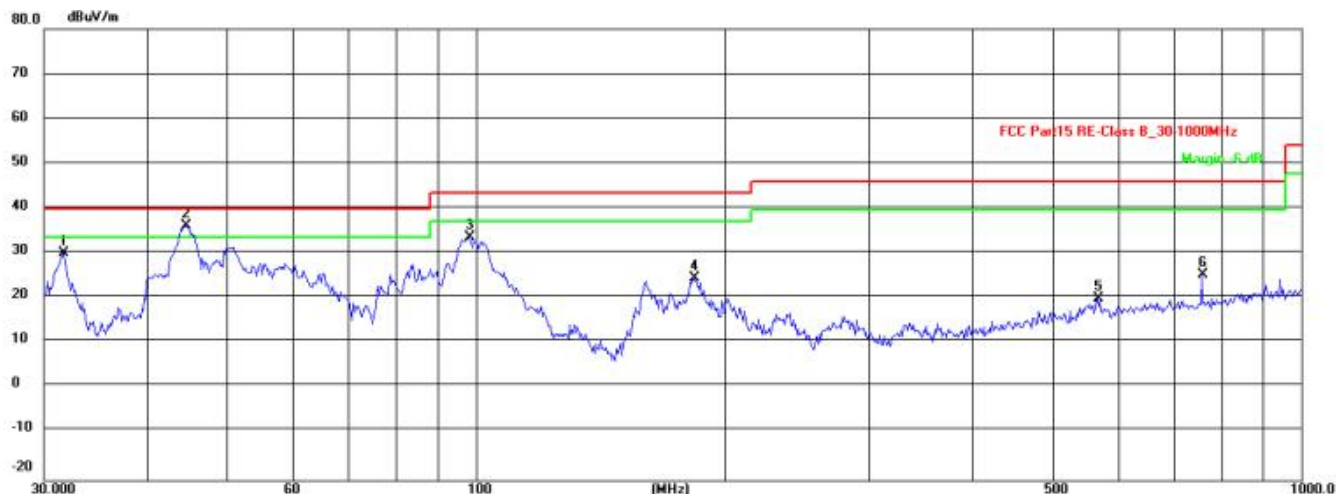**Vertical:**


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|
| 1   | 31.6202         | 49.48          | -19.14        | 30.34          | 40.00          | -9.66       | QP   |
| 2 * | 44.4308         | 52.92          | -16.56        | 36.36          | 40.00          | -3.64       | QP   |
| 3   | 98.1419         | 52.50          | -18.66        | 33.84          | 43.50          | -9.66       | QP   |
| 4   | 184.4898        | 44.62          | -19.71        | 24.91          | 43.50          | -18.59      | QP   |
| 5   | 566.6223        | 30.38          | -9.99         | 20.39          | 46.00          | -25.61      | QP   |
| 6   | 758.0408        | 33.27          | -7.65         | 25.62          | 46.00          | -20.38      | QP   |

**\*\*\*Note:**

- 1). Pre-scan all modes and recorded the worst case results in this report (TX (1Mbps)).
- 2). Emission level (dBuV/m) = 20 log Emission level (uV/m). Margin=Level-Limit
- 3). Reading+Factor=Level .

## 5.2. Field Strength of Fundamental Emissions and Mask Measurement

### 5.2.1. Block Diagram of Test Setup

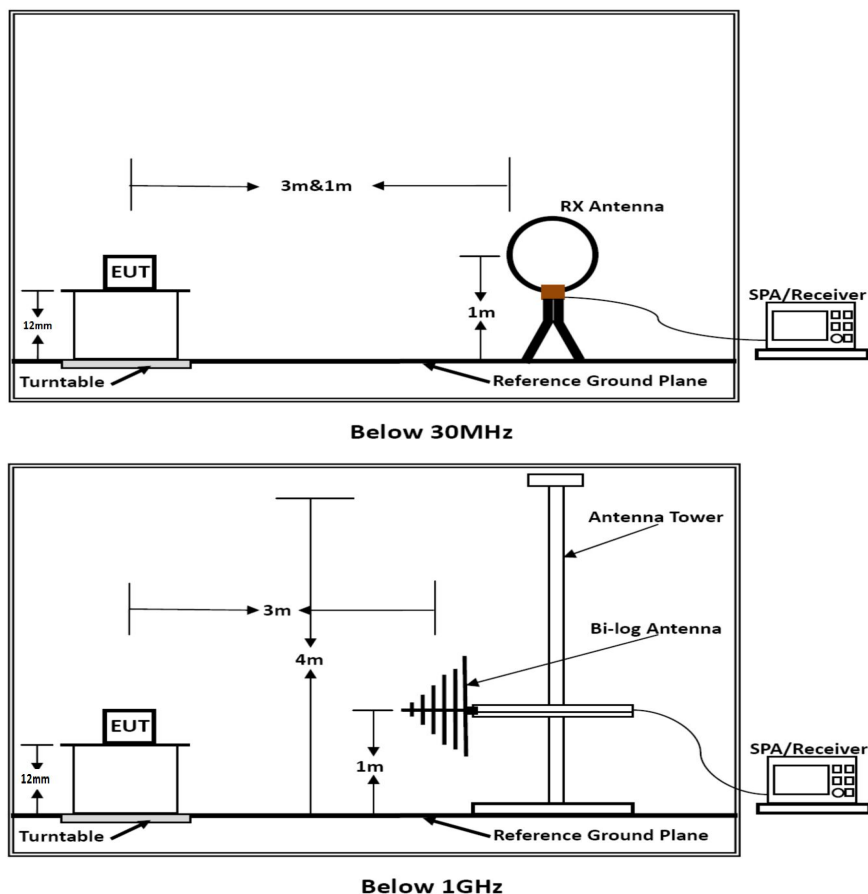

### 5.2.2. Field strength of fundamental emissions limit and Mask limit

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

| Frequencies (MHz)  | Field Strength (microvolts/meter) | Field Strength (dB $\mu$ V/m) at 10m | Field Strength (dB $\mu$ V/m) at 3m |
|--------------------|-----------------------------------|--------------------------------------|-------------------------------------|
| 13.553 ~ 13.567MHz | 15848 at 30m                      | 103.08 (QP)                          | 124 (QP)                            |

Mask Limit:


| Frequency (MHz) | Limit (dB $\mu$ V/m) | Distance (m) |
|-----------------|----------------------|--------------|
| 1.705-13.110    | 69.5                 | 3            |
| 13.110-13.410   | 80.5                 | 3            |
| 13.410-13.553   | 90.5                 | 3            |
| 13.553-13.567   | 124.0                | 3            |
| 13.567-13.710   | 90.5                 | 3            |
| 13.710-14.010   | 80.5                 | 3            |
| 14.010-30.000   | 69.5                 | 3            |

### 5.2.3. Test Results

PASS.

The test data please refer to following page:

## 0 Degree

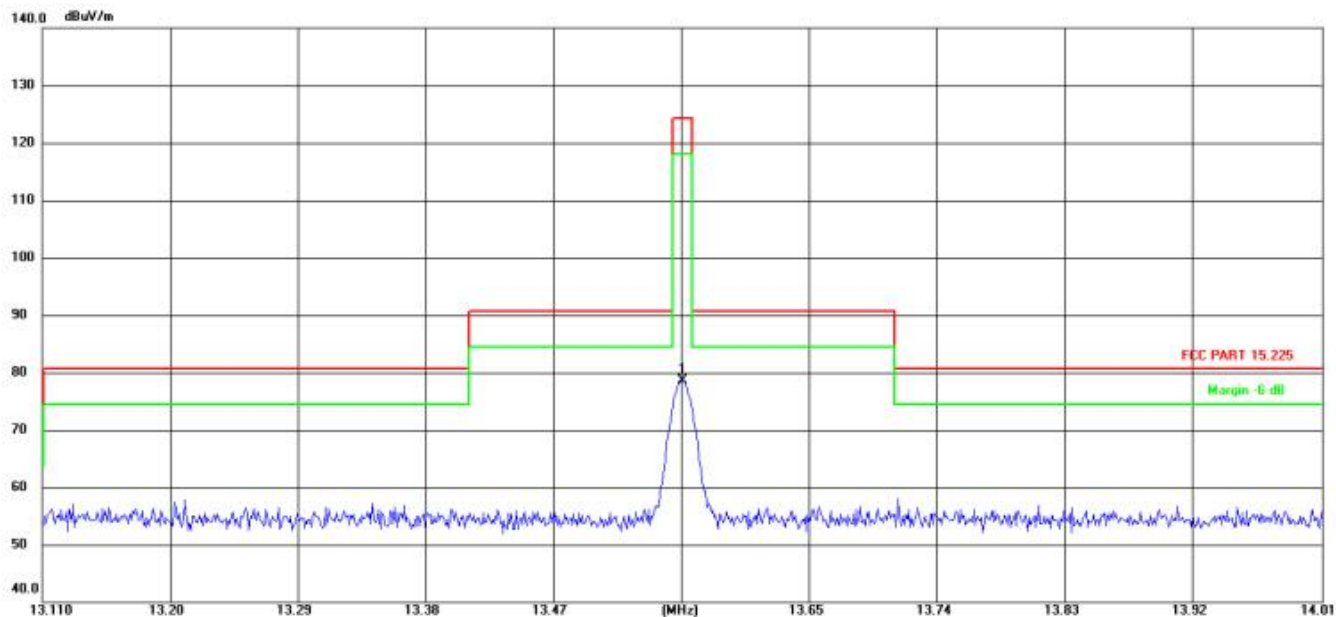

|   | Freq.(MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Remark |
|---|------------|----------------|-------------|-----------------|----------------|--------|
| 1 | 13.56      | 58.36          | 20.30       | 78.66           | 124.00         | QP     |


\*Note: Factor= Antenna Factor + Cable Loss

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

## 90 Degree

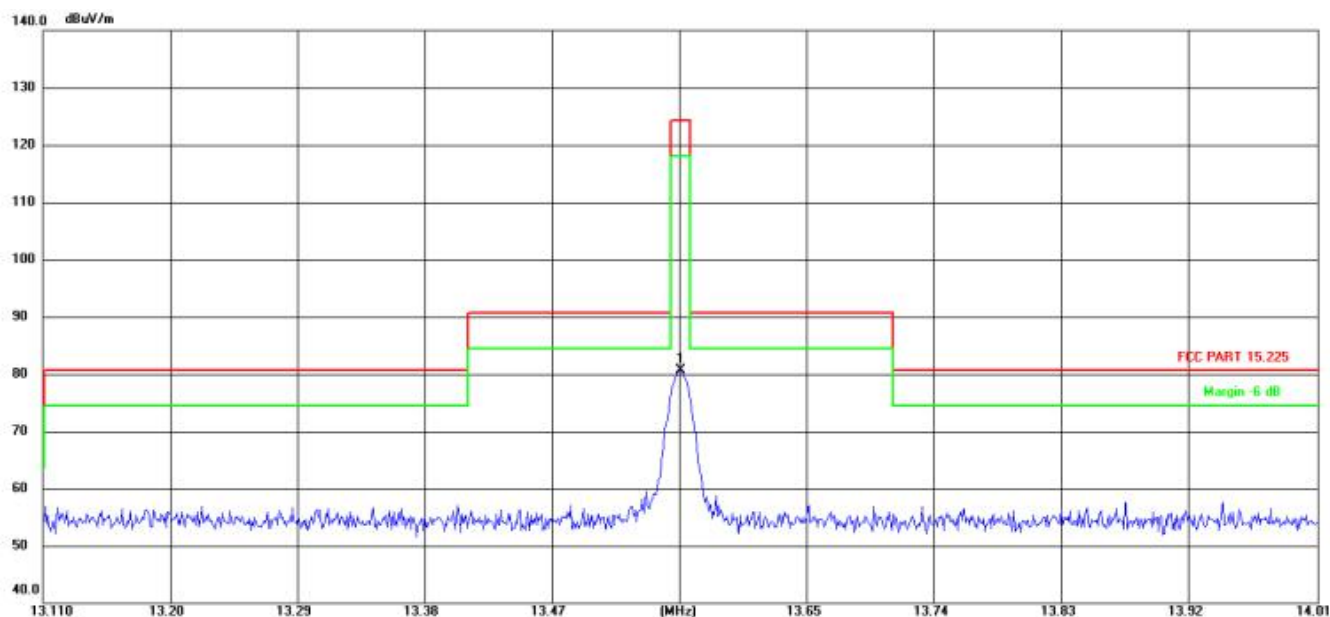

|   | Freq.(MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Remark |
|---|------------|----------------|-------------|-----------------|----------------|--------|
| 1 | 13.5572    | 60.34          | 20.30       | 80.64           | 124.00         | QP     |

\*Note: Factor= Antenna Factor + Cable Loss

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

## 6. BANDWIDTH OF THE OPERATING FREQUENCY


### 6.1. Standard Applicable

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

### 6.2. Test Result

|                         |                      |
|-------------------------|----------------------|
| EUT                     | In-lane Entry Kiosk  |
| RBW                     | 100Hz                |
| VBW                     | 100Hz                |
| SPAN                    | 500Hz                |
| Carrier Frequency (MHz) | 20dB Bandwidth (KHz) |
| 13.56                   | 0.280                |

Please refer to the test plot:

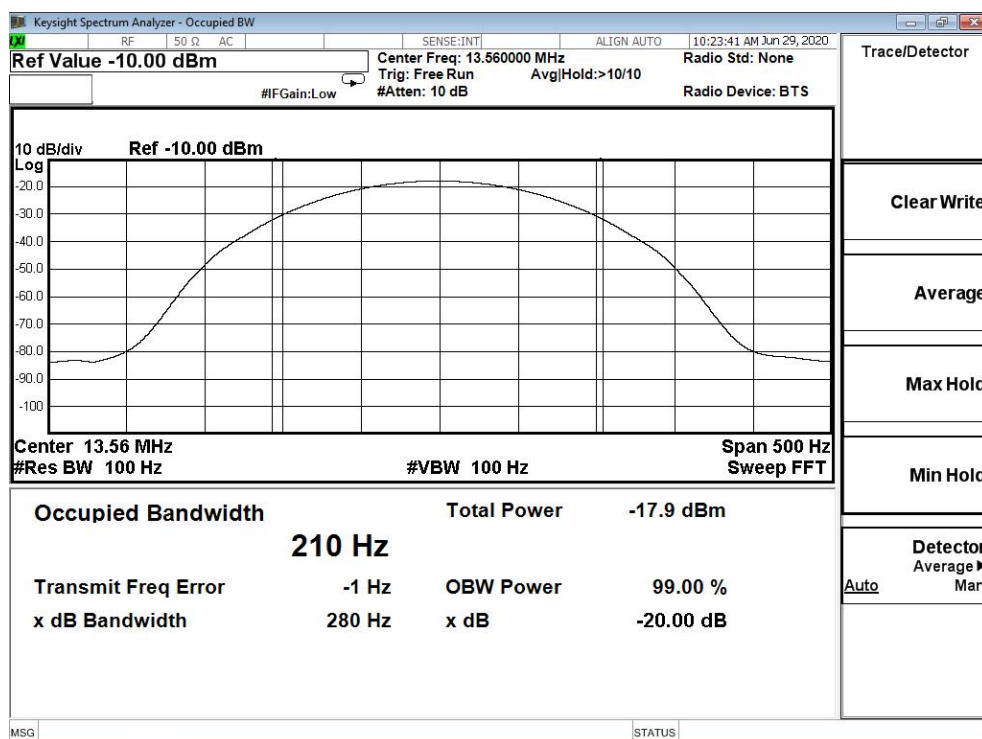

## 7. FREQUENCY STABILITY MEASUREMENT

### 7.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a full charged battery.

### 7.2 Test Result

#### Voltage vs. Frequency Stability

| Voltage(V) | Measurement Frequency (MHz) | Deviation (KHz) | Deviation (ppm) | Limit (ppm) |
|------------|-----------------------------|-----------------|-----------------|-------------|
| DC 10.2V   | 13.56078                    | 0.78            | 57.52           | 100         |
| DC 12.0V   | 13.56042                    | 0.42            | 30.97           | 100         |
| DC 13.8V   | 13.56019                    | 0.19            | 14.01           | 100         |

Extreme 1/Extreme 2/Extreme 3 were tested,the report recorded the worst result of Extreme 1.

#### Temperature vs. Frequency Stability

| Temperature (°C) | Measurement Frequency (MHz) | Deviation (KHz) | Deviation (ppm) | Limit (ppm) |
|------------------|-----------------------------|-----------------|-----------------|-------------|
| -20              | 13.56032                    | 0.32            | 23.60           | 100         |
| -10              | 13.56047                    | 0.47            | 34.66           | 100         |
| 0                | 13.56012                    | 0.12            | 8.85            | 100         |
| 10               | 13.56034                    | 0.34            | 25.07           | 100         |
| 20               | 13.56031                    | 0.31            | 22.86           | 100         |
| 30               | 13.56023                    | 0.23            | 16.96           | 100         |
| 40               | 13.56018                    | 0.18            | 13.27           | 100         |
| 50               | 13.56031                    | 0.31            | 22.86           | 100         |

## 8. LINE CONDUCTED EMISSIONS


### 8.1. Standard Applicable

According to §15.207(a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dB $\mu$ V) |          |
|-----------------------|---------------------|----------|
|                       | Quasi-peak          | Average  |
| 0.15 to 0.50          | 66 to 56            | 56 to 46 |
| 0.50 to 5             | 56                  | 46       |
| 5 to 30               | 60                  | 50       |

\* Decreasing linearly with the logarithm of the frequency

### 8.2. Block Diagram of Test Setup

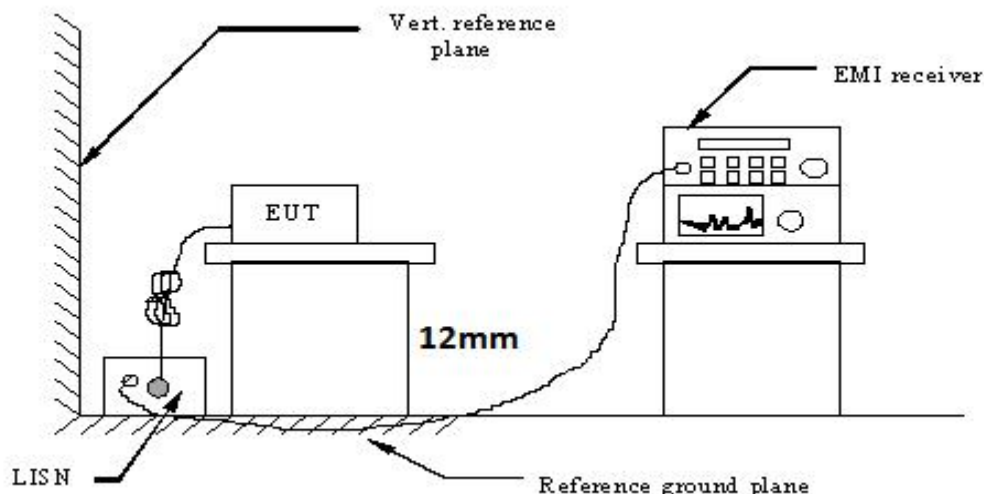


### 8.3. Test Results

**PASS.**

The test data please refer to following page.


**AC Conducted Emission of charge from adapter mode @ AC 120V/60Hz (worst case)**

Line

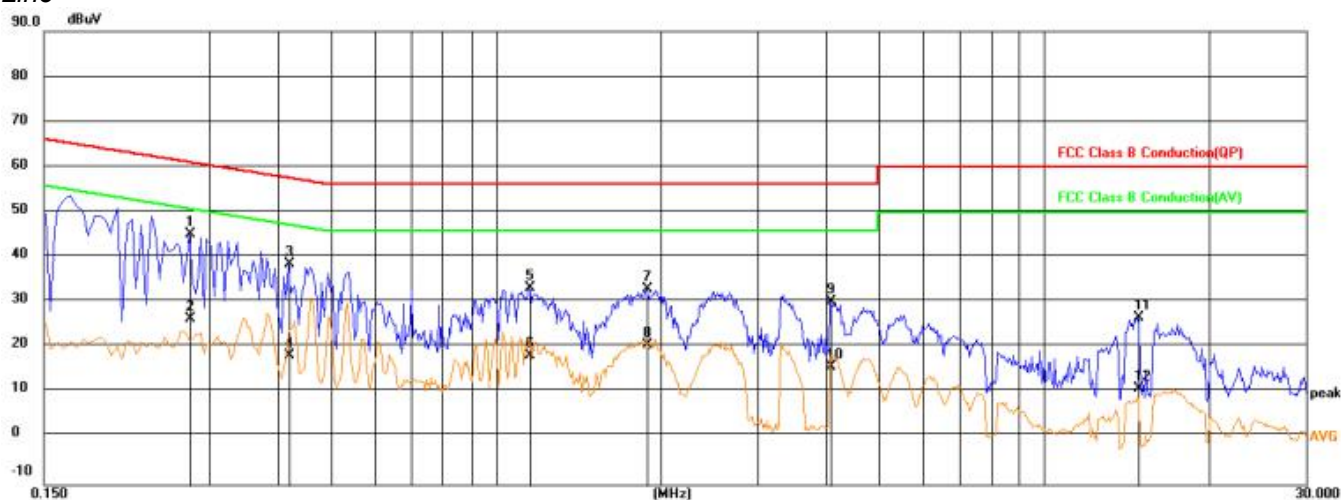

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.2760             | 32.56             | 12.84           | 45.40            | 60.94           | -15.54         | QP     |
| 2   | 0.2760             | 13.93             | 12.84           | 26.77            | 50.94           | -24.17         | AVG    |
| 3   | 0.4200             | 25.28             | 13.37           | 38.65            | 57.45           | -18.80         | QP     |
| 4   | 0.4200             | 5.17              | 13.37           | 18.54            | 47.45           | -28.91         | AVG    |
| 5   | 1.1490             | 21.52             | 11.85           | 33.37            | 56.00           | -22.63         | QP     |
| 6   | 1.1490             | 6.72              | 11.85           | 18.57            | 46.00           | -27.43         | AVG    |
| 7   | 1.8825             | 20.61             | 12.67           | 33.28            | 56.00           | -22.72         | QP     |
| 8   | 1.8825             | 8.19              | 12.67           | 20.86            | 46.00           | -25.14         | AVG    |
| 9   | 4.0875             | 16.81             | 13.55           | 30.36            | 56.00           | -25.64         | QP     |
| 10  | 4.0875             | 2.44              | 13.55           | 15.99            | 46.00           | -30.01         | AVG    |
| 11  | 14.8740            | 13.99             | 12.94           | 26.93            | 60.00           | -33.07         | QP     |
| 12  | 14.8740            | -1.69             | 12.94           | 11.25            | 50.00           | -38.75         | AVG    |

## Neutral

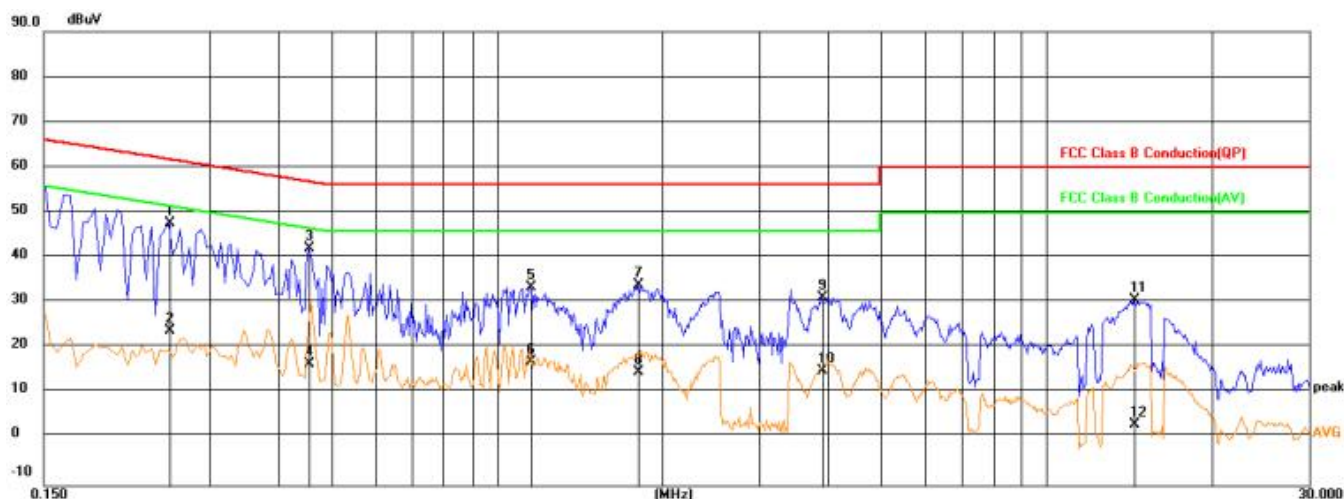

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.2535             | 34.93             | 12.76           | 47.69            | 61.64           | -13.95         | QP     |
| 2   | 0.2535             | 11.38             | 12.76           | 24.14            | 51.64           | -27.50         | AVG    |
| 3   | 0.4560             | 28.73             | 13.45           | 42.18            | 56.77           | -14.59         | QP     |
| 4   | 0.4560             | 3.47              | 13.45           | 16.92            | 46.77           | -29.85         | AVG    |
| 5   | 1.1490             | 21.94             | 11.85           | 33.79            | 56.00           | -22.21         | QP     |
| 6   | 1.1490             | 5.45              | 11.85           | 17.30            | 46.00           | -28.70         | AVG    |
| 7   | 1.8015             | 21.59             | 12.58           | 34.17            | 56.00           | -21.83         | QP     |
| 8   | 1.8015             | 2.38              | 12.58           | 14.96            | 46.00           | -31.04         | AVG    |
| 9   | 3.9030             | 17.82             | 13.59           | 31.41            | 56.00           | -24.59         | QP     |
| 10  | 3.9030             | 1.77              | 13.59           | 15.36            | 46.00           | -30.64         | AVG    |
| 11  | 14.4330            | 18.03             | 12.89           | 30.92            | 60.00           | -29.08         | QP     |
| 12  | 14.4330            | -9.31             | 12.89           | 3.58             | 50.00           | -46.42         | AVG    |

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report.

Result=Reading + Correct

Margin=Measured Level- Limit

## 9. ANTENNA REQUIREMENTS

### 9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 9.2 Antenna Connected Construction

#### 9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 9.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 0dBi(Max), and the antenna is an Internal Antenna and no consideration of replacement. Please see EUT photo for details.

#### 9.2.3. Results: Compliance.

## 10. LIST OF MEASURING EQUIPMENTS

| Item                                                                                                                 | Equipment                | Manufacturer   | Model No.    | Serial No.      | Cal Date   | Due Date   |
|----------------------------------------------------------------------------------------------------------------------|--------------------------|----------------|--------------|-----------------|------------|------------|
| 1                                                                                                                    | Power Meter              | R&S            | NRVS         | 100444          | 2020-06-10 | 2021-06-09 |
| 2                                                                                                                    | Power Sensor             | R&S            | NRV-Z81      | 100458          | 2020-06-10 | 2021-06-09 |
| 3                                                                                                                    | Power Sensor             | R&S            | NRV-Z32      | 10057           | 2020-06-10 | 2021-06-09 |
| 4                                                                                                                    | Test Software            | Tonscend       | JS1120-2     | /               | N/A        | N/A        |
| 5                                                                                                                    | RF Control Unit          | Tonscend       | JS0806-2     | N/A             | 2020-06-10 | 2021-06-09 |
| 6                                                                                                                    | MXA Signal Analyzer      | Agilent        | N9020A       | MY50510140      | 2020-06-10 | 2021-06-09 |
| 7                                                                                                                    | DC Power Supply          | Agilent        | E3642A       | N/A             | 2019-11-14 | 2020-11-13 |
| 8                                                                                                                    | EMI Test Software        | AUDIX          | E3           | /               | N/A        | N/A        |
| 9                                                                                                                    | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M       | 03CH03-HY       | 2020-06-11 | 2021-06-10 |
| 10                                                                                                                   | Positioning Controller   | MF             | MF-7082      | N/A             | 2020-06-11 | 2021-06-10 |
| 11                                                                                                                   | Active Loop Antenna      | SCHWARZBECK    | FMZB 1519B   | 00005           | 2019-07-27 | 2020-07-26 |
| 12                                                                                                                   | By-log Antenna           | SCHWARZBECK    | VULB9163     | 9163-470        | 2019-07-27 | 2020-07-26 |
| 13                                                                                                                   | Horn Antenna             | SCHWARZBECK    | BBHA 9120D   | 9120D-1925      | 2019-07-03 | 2020-07-02 |
| 14                                                                                                                   | Broadband Horn Antenna   | SCHWARZBECK    | BBHA 9170    | 791             | 2019-09-19 | 2020-09-18 |
| 15                                                                                                                   | Broadband Preamplifier   | SCHWARZBECK    | BBV 9719     | 9719-025        | 2019-09-19 | 2020-09-18 |
| 16                                                                                                                   | EMI Test Receiver        | R&S            | ESR 7        | 101181          | 2020-06-11 | 2021-06-10 |
| 17                                                                                                                   | RS SPECTRUM ANALYZER     | R&S            | FSP40        | 100503          | 2019-11-14 | 2020-11-13 |
| 18                                                                                                                   | Broadband Preamplifier   | /              | BP-01M18G    | P190501         | 2020-06-30 | 2021-06-29 |
| 19                                                                                                                   | RF Cable-R03m            | Jye Bao        | RG142        | CB021           | 2020-06-11 | 2021-06-10 |
| 20                                                                                                                   | RF Cable-HIGH            | SUHNER         | SUCOFLEX 106 | 03CH03-HY       | 2020-06-11 | 2021-06-10 |
| 21                                                                                                                   | 6dB Attenuator           | /              | 100W/6dB     | 1172040         | 2020-06-10 | 2021-06-09 |
| 22                                                                                                                   | 3dB Attenuator           | /              | 2N-3dB       | /               | 2020-06-10 | 2021-06-09 |
| 23                                                                                                                   | EMI Test Receiver        | R&S            | ESPI         | 101840          | 2020-06-10 | 2021-06-09 |
| 24                                                                                                                   | Artificial Mains         | R&S            | ENV216       | 101288          | 2020-06-11 | 2021-06-10 |
| 25                                                                                                                   | 10dB Attenuator          | SCHWARZBECK    | MTS-IMP-136  | 261115-001-0032 | 2020-06-10 | 2021-06-09 |
| Note: All equipment is calibrated through CHINA CEPREI LABORATORY and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD. |                          |                |              |                 |            |            |

## **11. Test Setup Photographs of EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **12. Exterior Photographs of the EUT**

Please refer to separated files for Exterior Photos of the EUT.

## **13. Interior Photographs of the EUT**

Please refer to separated files for Interior Photos of the EUT.

-----THE END OF REPORT-----