

FCC MPE TEST REPORT

FCC ID: 2AWF9-GBD01A

Product: 3 IN 1 WIRELESS CHARGER STAND

Trade Name: N/A

Model Name: D01

Serial Model: D03,D04,D05

Report No.: UNIA21081626ER-62

Prepared for

ShenZhenshi GYBB Technology Co., Ltd.

11F, Building 11#, E-commerce Intl. Centre, China South City, Pinghu,
LongGang, Shenzhen, Guangdong, China

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name: ShenZhensi GYBB Technology Co., Ltd.

Address: 11F, Building 11#, E-commerce Intl. Centre, China South City, Pinghu, LongGang, Shenzhen, Guangdong, China

Manufacture's Name: ShenZhensi GYBB Technology Co., Ltd.

Address: 11F, Building 11#, E-commerce Intl. Centre, China South City, Pinghu, LongGang, Shenzhen, Guangdong, China

Product description

Product name: 3 IN 1 WIRELESS CHARGER STAND

Trade Mark: N/A

Model and/or type reference : D01, D03, D04, D05

Standards: FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Date (s) of performance of tests: Aug. 17, 2021 ~ Sep. 16, 2021


Date of Issue: Sep. 16, 2021

Test Result: Pass

Prepared by:



Kahn yang/Editor



Sky dong/Supervisor



Liuze/Manager

Reviewer:

Approved & Authorized Signer:

Note:For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Channel List			
Channel	Frequency(KHz)	Channel	Frequency(MHz)
01	127.2		

The EUT antenna is Coil Antenna. No antenna other than that furnish edby the responsible party shall be used with the device.

1. SUMMARY OF TESTRESULTS

1.1 Test procedures according to the technical standards:

FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03

FCC CFR 47			
Standard Section	Test Item	Judgment	Remark
FCC CFR 47 part1, 1.1310 KDB680106 D01v03(3)(c)	Electric Field Strength (E) (V/m)	PASS	
	Magnetic Field Strength (H) (A/m)	PASS	

Note:

1: Power transfer frequency is less than 1 MHz;

Yes,The working frequency of the prototype is 115-220KHz.

2: Output power from each primary coil is less than or equal to 15 watts.

Yes, The maximum output power of the prototype is 15 watts.

3: The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

Yes, the transfer system includes three primary coils. the coil pairs can powered on at the same time.

4:Client device is placed directly in contact with the transmitter.

Yes.

5:Mobile exposure conditions only (mobile exposure conditions are not covered by this exclusion).

Yes, the EUT is for mobile exposure conditions only.

6:The aggregate H-field strengths at 15cm surrounding the device and 20cm above the top surface form all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT h-field strengths levels are less than 50% of the MPE limit.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%。

No.	Item	Uncertainty
1	All emissions, radiated(<30M)(9KHz-30MHz)	±2.45dB
2	Temperature	±0.5°C
3	Humidity	±2%

1.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Until
Broadband Field Meter	NARDA	NBM-550	—	Sep. 01, 2022
Magnetic Field Meter	NARDA	ELT-400	1–400kHz	Sep. 01, 2022
Magnetic Probe	NARDA	HF-3061	300kHz–30MHz	Sep. 01, 2022
Magnetic Probe	NARDA	HF-0191	27–1000MHz	Sep. 01, 2022
Broadband Field Meter	NARDA	NBM-550	—	Sep. 01, 2022
Electric Field Meter	COMBINOVA	EFM 200	5Hz–400kHz	Sep. 01, 2022
E-Field Probe	NARDA	EF-0391	100kHz–3GHz	Sep. 01, 2022
E-Field Probe	NARDA	EF-6091	100MHz–60GHz	Sep. 01, 2022

NOTE:

The calibration interval of the above test instruments is 12 months.

2 MAXIMUM PERMISSIBLE EXPOSURE

2.1 MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range(MHz)	Electric Field Strength (E)(V/m)	Magnetic Field Strength (H)(A/m)	Power Density(S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range(MHz)	Electric Field Strength (E)(V/m)	Magnetic Field Strength (H)(A/m)	Power Density(S)(mW/cm ²)	Averaging Time E ² , H ² or S(minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; *Plane-wave equivalent power density.


2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03r01.

3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

3. TESTPROCEDURE

a. For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair at the 15 cm surrounding the device and 20 cm above the top surface.

4.1 TEST SETUP

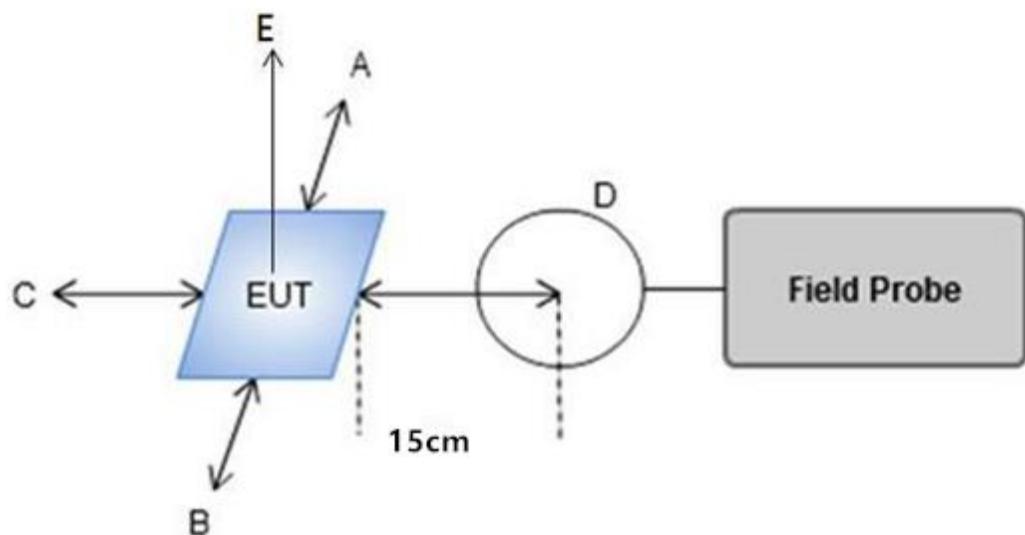

4. TESTPHOTO





4.3 RESULT OF MAXIMUM PERMISSIBLE EXPOSURE

For Full load mode:

E-Filed Strength at 15 cm surrounding the device and 20 cm above the top surface (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
0.1272	1.08	1.04	1.02	1.16	1.64	307	614

H-Filed Strength at 15 cm surrounding the device and 20 cm above the top surface (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
0.1272	0.24	0.22	0.12	0.18	0.44	0.815	1.63

For Half Load mode:

E-Filed Strength at 15 cm surrounding the device and 20 cm above the top surface (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
0.1254	1.14	1.13	1.03	1.18	1.57	307	614

H-Filed Strength at 15 cm surrounding the device and 20 cm above the top surface (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
0.1254	0.23	0.09	0.22	0.04	0.43	0.815	1.63

For No load mode:

E-Filed Strength at 15 cm surrounding the device and 20 cm above the top surface (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
0.1396	1.22	1.12	1.21	1.18	1.43	307	614

H-Filed Strength at 15 cm surrounding the device and 20 cm above the top surface (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
0.1396	0.26	0.25	0.26	0.29	0.39	0.815	1.63

End of Report