



TEST REPORT

FCC PART 15 B

Test report

On Behalf of

Guangzhou Eagle Electronic Technology Co.,Ltd

For

Vehicle-mounted camera system

Model No.: EA2008-5-W, EA2008-5, EA2008-7, EA2008-7-H, EA2008-7-T4F,
EA2008-7-T4FH, EA2008-9, EA2008-9-H, EA2008-9-T4F,
EA2008-9-T4FH, EA2008-10-H, EA2008-10-T4FH, EA2008-5-W,
EA2008-7-T2F-W, EA2008-7-T4F-W, EA2008-9-T2F-W,
EA2008-9-T4F-W, EA2008-7-P, EA2008-7-HP, EA2008-7-T4FP

FCC ID: 2AWGA-EA2008X

Prepared for : Guangzhou Eagle Electronic Technology Co.,Ltd
4th Floor, No.6, Longnan Road, Huashan Second Industrial Zone, Huadu
District, Guangzhou, China

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: Apr. 07, 2020 -- Apr. 21, 2020

Date of Report: Apr. 21, 2020

Report Number: HK2004100595-E



TEST RESULT CERTIFICATION

Applicant's name.....: Guangzhou Eagle Electronic Technology Co.,Ltd
Address.....: 4th Floor, No.6, Longnan Road, Huashan Second Industrial Zone,
Huadu District, Guangzhou, China

Manufacture's Name: Guangzhou Eagle Electronic Technology Co.,Ltd
Address.....: 4th Floor, No.6, Longnan Road, Huashan Second Industrial Zone,
Huadu District, Guangzhou, China

Product description

Trade Mark.....: FLY EAGLE

Product name: Vehicle-mounted camera system

Model and/or type reference ...: EA2008-5-W, EA2008-5, EA2008-7, EA2008-7-H, EA2008-7-T4F,
EA2008-7-T4FH, EA2008-9, EA2008-9-H, EA2008-9-T4F,
EA2008-9-T4FH, EA2008-10-H, EA2008-10-T4FH, EA2008-5-W,
EA2008-7-T2F-W, EA2008-7-T4F-W, EA2008-9-T2F-W,
EA2008-9-T4F-W, EA2008-7-P, EA2008-7-HP, EA2008-7-T4FP

Standards: **FCC Part 15 Subpart B**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:

Date (s) of performance of tests: Apr. 07, 2020 -- Apr. 21, 2020

Date of Issue.....: Apr. 21, 2020

Test Result.....: **Pass**

Prepared by:

Project Engineer

Reviewed by:

Project Supervisor

Approved by:

Technical Director



Table of Contents

1	TEST SUMMARY	4
1.1	TEST DESCRIPTION	4
1.2	TEST FACILITY	4
1.3	MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
2.1	ENVIRONMENTAL CONDITIONS.....	6
2.2	GENERAL DESCRIPTION OF EUT	6
2.3	EQUIPMENTS USED DURING THE TEST.....	7
2.4	DESCRIPTION OF TEST SETUP	7
2.5	DESCRIPTION OF SUPPORT UNITS.....	8
3	TEST CONDITIONS AND RESULTS.....	9
3.1	CONDUCTION EMISSIONS MEASUREMENT	9
3.2	RADIATED EMISSIONS MEASUREMENT.....	11
4	TEST SETUP PHOTOS OF THE EUT	16
5	PHOTOS OF THE EUT	17



1 Test Summary

1.1 Test Description

Test Item	Test Requirement	Result
Conducted Emission	FCC Part 15.107	N/A
Radiated Emissions	FCC Part 15.109	PASS

1.2 Test Facility

1.2.1 Address of the test laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.2.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 21210

The 3m alternate test site of Shenzhen HUAK Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 21210 on May 24, 2016.



1.3 Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen HUAK Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for HUAK laboratory is reported:

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



2 General Information

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 General Description of EUT

Product Name:	Vehicle-mounted camera system
Model/Type reference:	EA2008-5-W
Serial Model:	EA2008-5-W, EA2008-5, EA2008-7, EA2008-7-H, EA2008-7-T4F, EA2008-7-T4FH, EA2008-9, EA2008-9-H, EA2008-9-T4F, EA2008-9-T4FH, EA2008-10-H, EA2008-10-T4FH, EA2008-5-W, EA2008-7-T2F-W, EA2008-7-T4F-W, EA2008-9-T2F-W, EA2008-9-T4F-W, EA2008-7-P, EA2008-7-HP, EA2008-7-T4FP
Trade Mark:	FLY EAGLE
FCC ID	2AWGA-EA2008X
Hardware Version:	V1.3
Software Version:	V1.0
Operation frequency:	RX: 2405MHz to 2472MHz
Antenna Type:	Glue stick antenna
Antenna Gain:	2dBi
Power Supply:	DC12V battery/others

Note: 1. For more detailed features description, please refer to the Manual.

2. There are multiple models, please refer to Differences declaration for specific differences



Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 26, 2019	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 26, 2019	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 26, 2019	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 26, 2019	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2019	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 26, 2019	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 26, 2019	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 26, 2019	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019	1 Year
11.	Pre-amplifier	EMCI	EMC05184 5SE	HKE-015	Dec. 26, 2019	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 26, 2019	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	/	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 26, 2019	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2019	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 26, 2019	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 26, 2019	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 26, 2019	3 Year
19.	Power Meter	R&S	NRVD	SEL0069	Dec. 26, 2019	1 Year
20.	High Gain Antenna	Schwarzbeck	LB-180400 KF	HKE-054	Dec. 26, 2019	1 Year

2.3 DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing:

N/A

Operation of EUT during Radiation testing:



2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Description	Information	Manufacturer	Remark	Certificate
/	/	/	/	/
/	/	/	/	/



3 TEST CONDITIONS AND RESULTS

3.1 Conduction Emissions Measurement

Limit

According to FCC CFR Title 47 Part 15 Subpart B Section 15.107, Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4:2014.
2. Support equipment, if needed, was placed as per ANSI C63.4:2014. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4:2014.
3. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
4. All support equipments received AC power from a second LISN, if any.
5. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
6. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
7. During the above scans, the emissions were maximized by cable manipulation.

Test setup

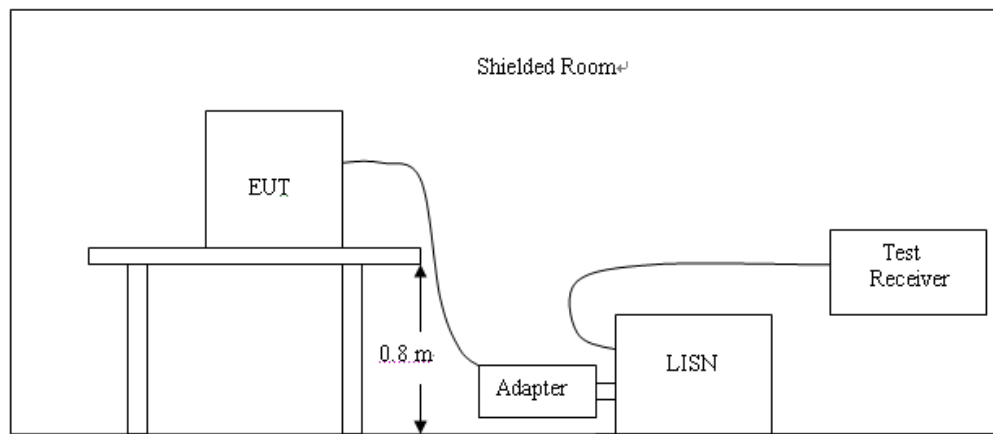

Test results

N/A

3.2 Radiated Emissions Measurement

Limit


For intentional device, according to § 15.109(a), Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Test setup

30 MHz to 1 GHz emissions:

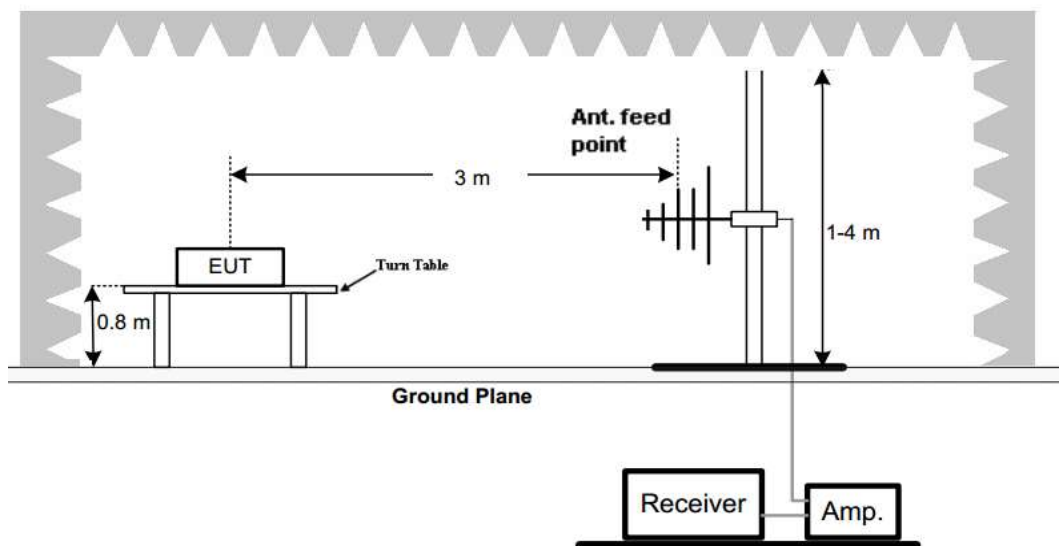

1 GHz to 25 GHz emissions:

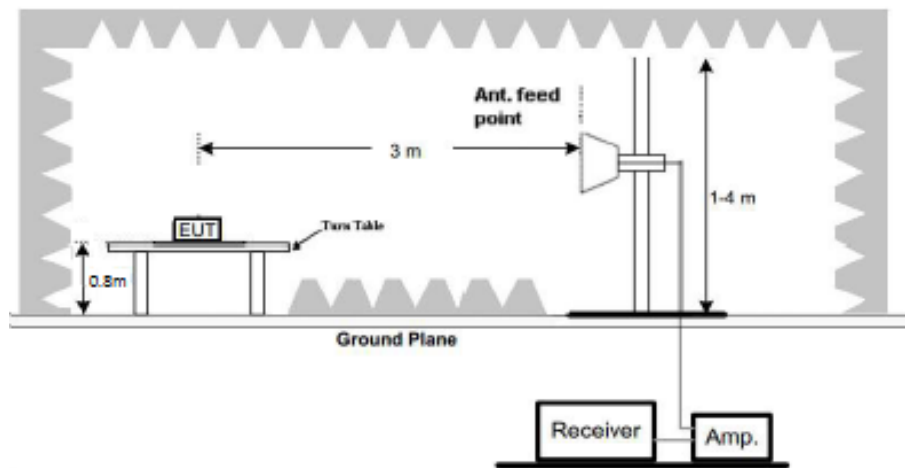

Test Procedure

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) Above 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test the EUT in the lowest channel, the middle channel, the Highest channel

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. Repeat above procedures until all frequencies measured was complete.




Test Result

Below 1GHz Test Results:

Antenna polarity: H

Test Graph

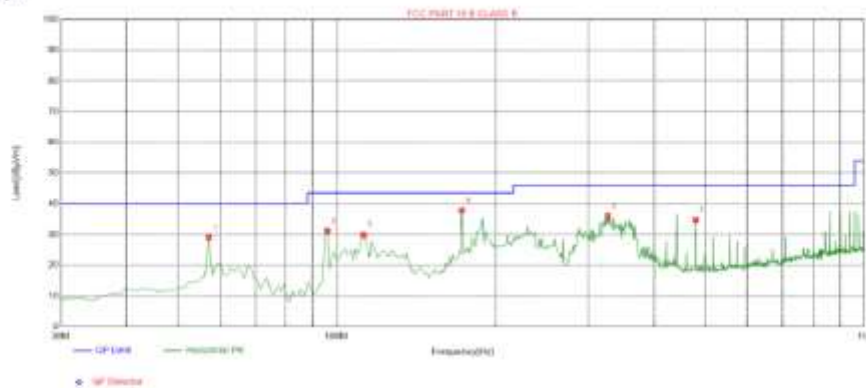

Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	57.1872	-14.74	43.77	29.03	40.00	10.97	100	227	Horizontal
2	96.0260	-16.06	47.23	31.17	43.50	12.33	100	6	Horizontal
3	112.5325	-15.85	45.77	29.92	43.50	13.58	100	205	Horizontal
4	172.7327	-17.18	55.07	37.89	43.50	5.61	100	262	Horizontal
5	327.1171	-11.74	47.80	36.06	46.00	9.94	100	313	Horizontal
6	479.5596	-8.44	43.25	34.81	46.00	11.19	100	211	Horizontal

Remark: Margin = Limit – Level


Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Level=Test receiver reading + correction factor



Antenna polarity: V

Test Graph

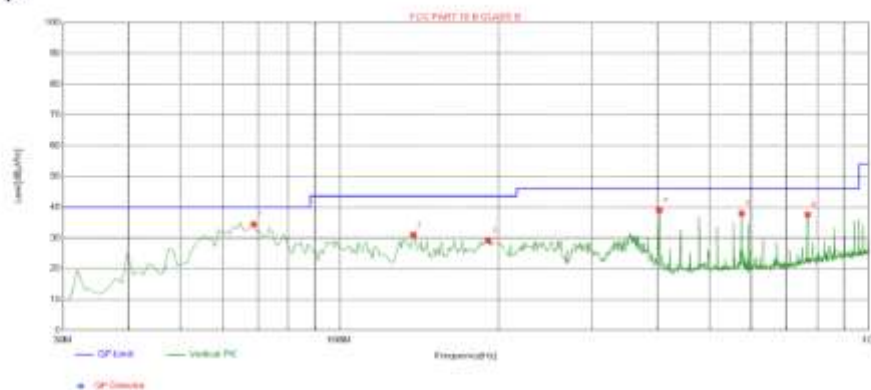

Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	68.8388	-17.38	51.85	34.47	40.00	5.53	100	226	Vertical
2	137.7778	-19.04	50.04	31.00	43.50	12.50	100	109	Vertical
3	191.1812	-15.90	45.05	29.15	43.50	14.35	100	341	Vertical
4	402.8529	-10.35	49.43	39.08	46.00	6.92	100	216	Vertical
5	575.6857	-6.51	44.46	37.95	46.00	8.05	100	309	Vertical
6	767.9379	-3.30	40.93	37.63	46.00	8.37	100	335	Vertical

Remark: Margin = Limit – Level

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Level=Test receiver reading + correction factor



Above 1GHz

Horizontal



Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4714	53.64	-3.59	50.05	74	-23.95	Peak	H
4714	33.49	-3.59	29.90	54	-24.10	AVG	H
7388	45.70	-0.84	44.86	74	-29.14	Peak	H
7388	32.82	-0.84	31.98	54	-22.02	AVG	H

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4714	53.27	-3.59	49.68	74	-24.32	Peak	V
4714	31.69	-3.59	28.10	54	-25.90	AVG	V
7388	45.65	-0.84	44.81	74	-29.19	Peak	V
7388	33.11	-0.84	32.27	54	-21.73	AVG	V

4 Test Setup Photos of the EUT

Radiated Emissions: 30MHz-1000MHz

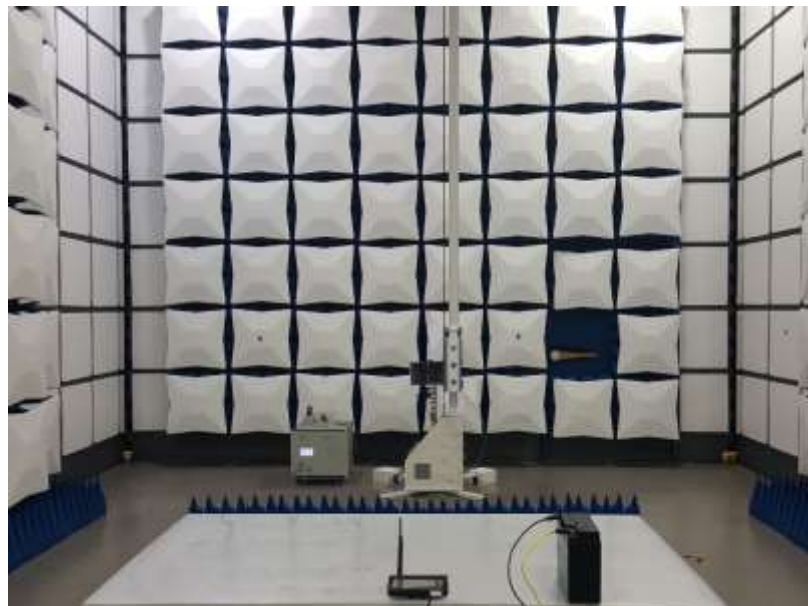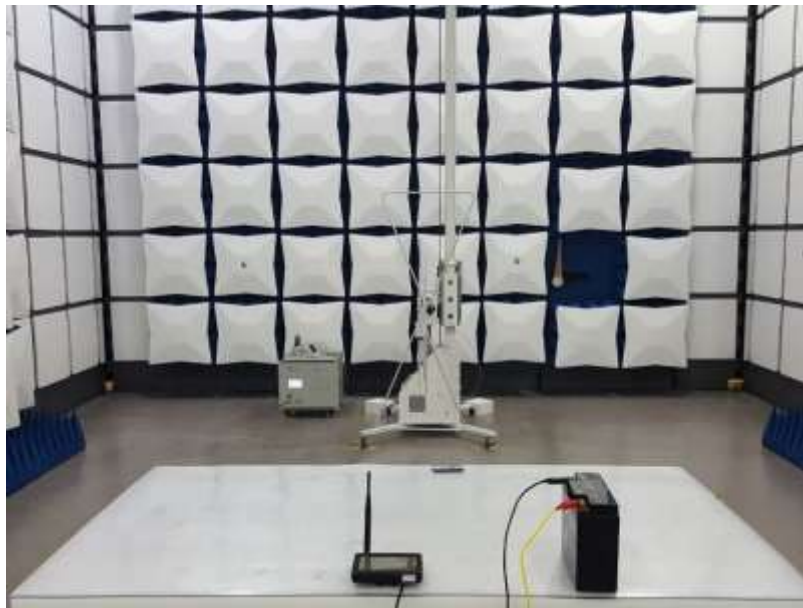





5 PHOTOS OF THE EUT



External Photos






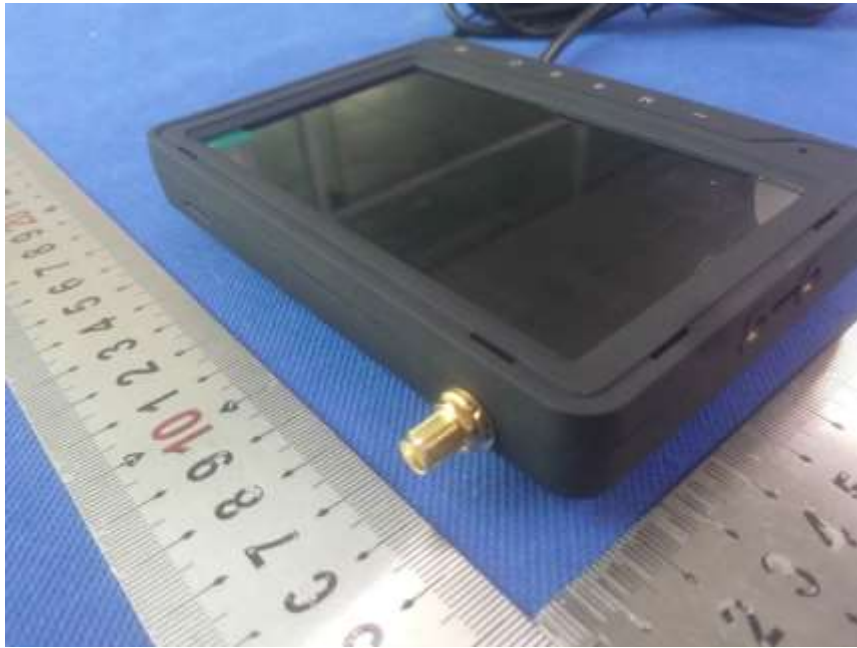

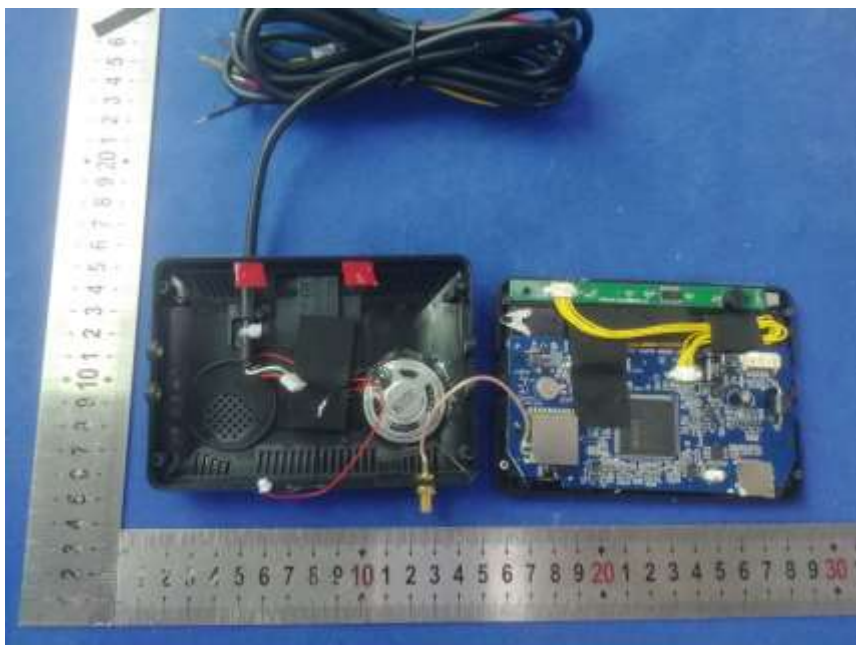Internal Photos

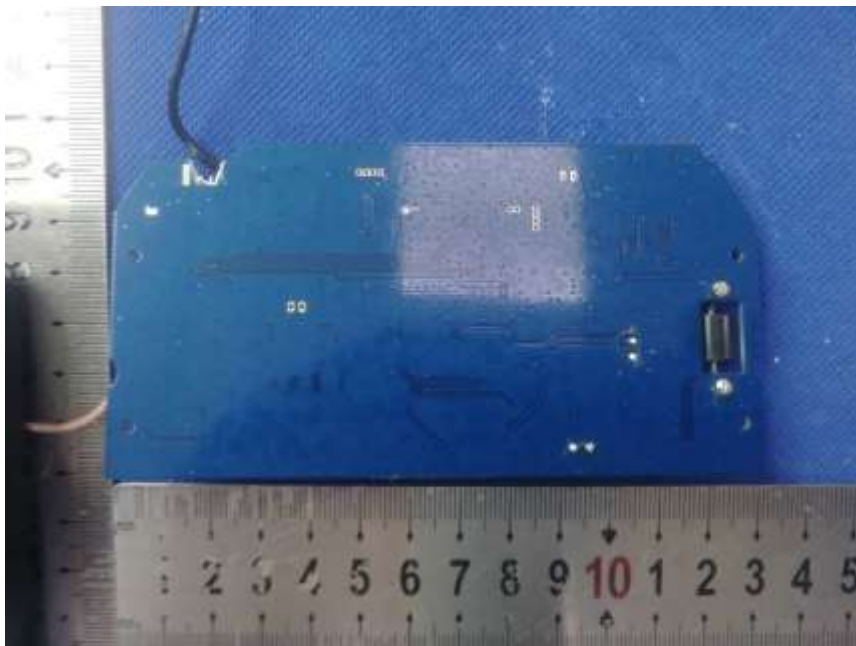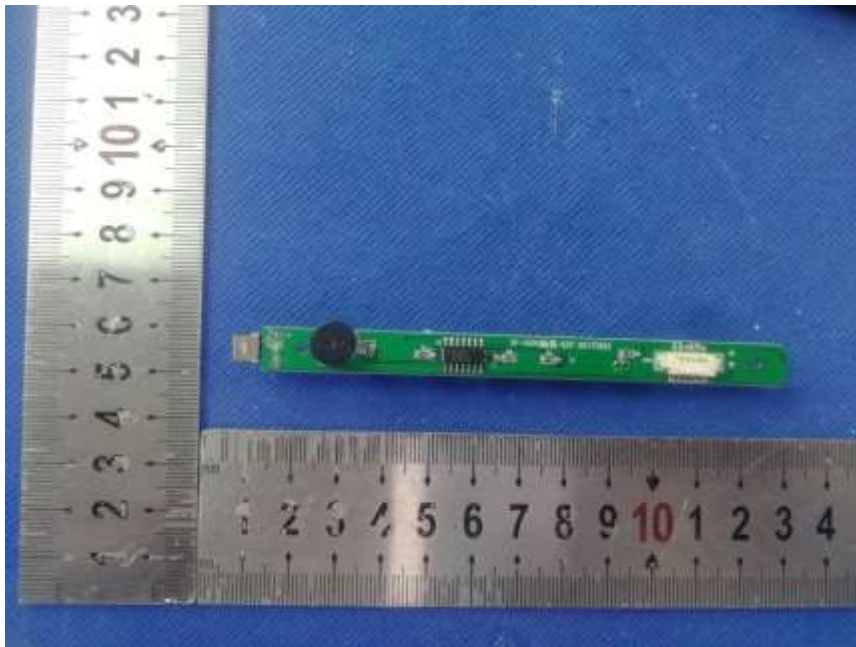

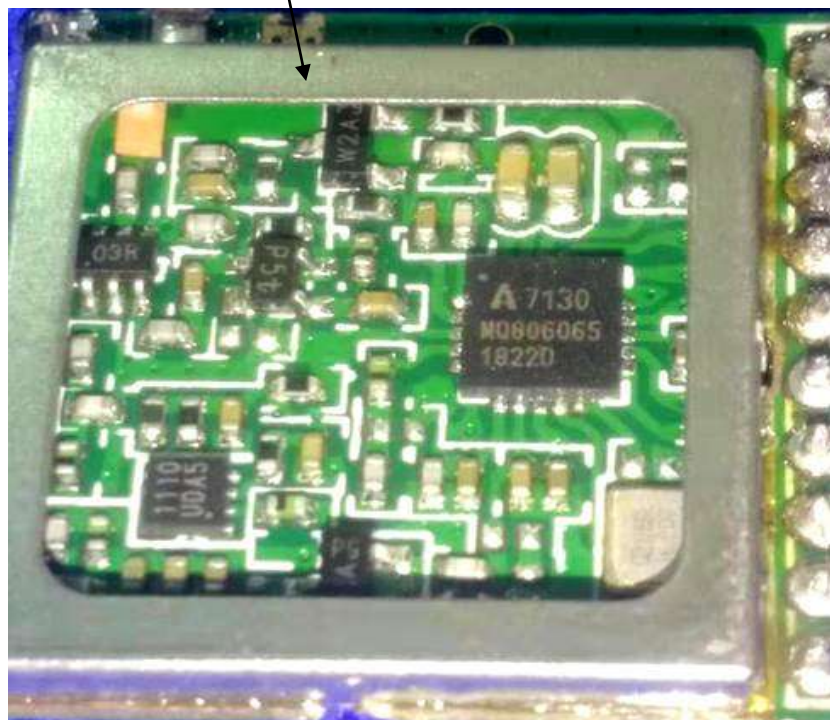

END