

TEST REPORT

Reference No..... : WTX20X04019586W-1
FCC ID : 2AWGB-EUS400D
Applicant : Zhejiang Zhier Information Technology Co., Ltd.
Address : Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town, Xihu District,
Hangzhou City, Zhejiang Province
Manufacturer : Zhejiang Zhier Information Technology Co., Ltd.
Address : Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town, Xihu District,
Hangzhou City, Zhejiang Province
Product Name : Dual Frequency Module
Test Model. : E-US400D
Additional Model(s) No. : /
Brand Name..... : /
Standards : FCC Part 15.207&15.209
Date of Receipt sample : Apr.16, 2020
Date of Test..... : Apr. 28, 2020 to May.27, 2020
Date of Issue : May.28, 2020
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China



Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. ANTENNA REQUIREMENT	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. CONDUCTED EMISSIONS	10
4.1 TEST PROCEDURE.....	10
4.2 BASIC TEST SETUP BLOCK DIAGRAM.....	10
4.3 ENVIRONMENTAL CONDITIONS	10
4.4 SUMMARY OF TEST RESULTS/PLOTS	10
5. RADIATED EMISSION	13
5.1 STANDARD APPLICABLE.....	13
5.2 TEST PROCEDURE.....	13
5.3 TEST RECEIVER SETUP	14
5.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
5.5 ENVIRONMENTAL CONDITIONS	15
5.6 SUMMARY OF TEST RESULTS/PLOTS	15

Report version

Version No.	Date of issue	Description
Rev.00	May.28, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Zhejiang Zhier Information Technology Co., Ltd.
Address of applicant: Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town, Xihu District, Hangzhou City, Zhejiang Province

Manufacturer: Zhejiang Zhier Information Technology Co., Ltd.
Address of manufacturer: Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town, Xihu District, Hangzhou City, Zhejiang Province

General Description of EUT	
Product Name:	Dual Frequency Module
Trade Name:	/
Model No.:	E-US400D
Adding Model(s):	/
Rated Voltage:	USB DC5V
Power Adapter Model:	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	125kHz(Transmitting)
Antenna Type:	Integral Antenna
Radio Technology:	Acoustic Magnetic

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.207: Conducted limits.

FCC Rules Part 15.209: Radiated emission limits; general requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Working	125KHz Transmitting	USB DC5V,1

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.8	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	N480	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Radiated Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
Anechoic chamber	SAEMC	FSAC318	/	2020-04-28	2021-04-27

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.203Antenna Requirement	Compliant
§15.207 (a) Conducted Emission	Compliant
§15.209 Radiated Emission	Compliant

N/A: not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.


4. Conducted Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Basic Test Setup Block Diagram

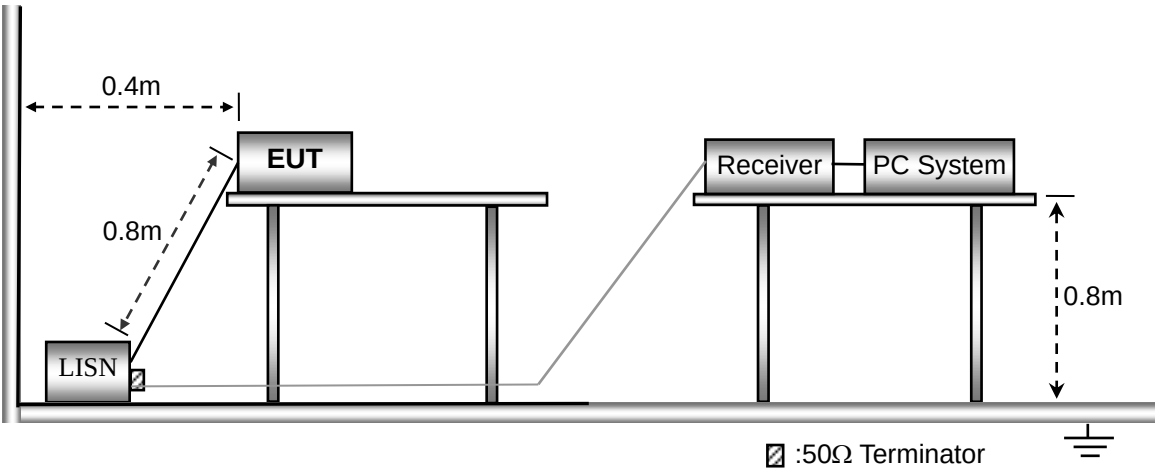


4.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	1011 mbar


4.4 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

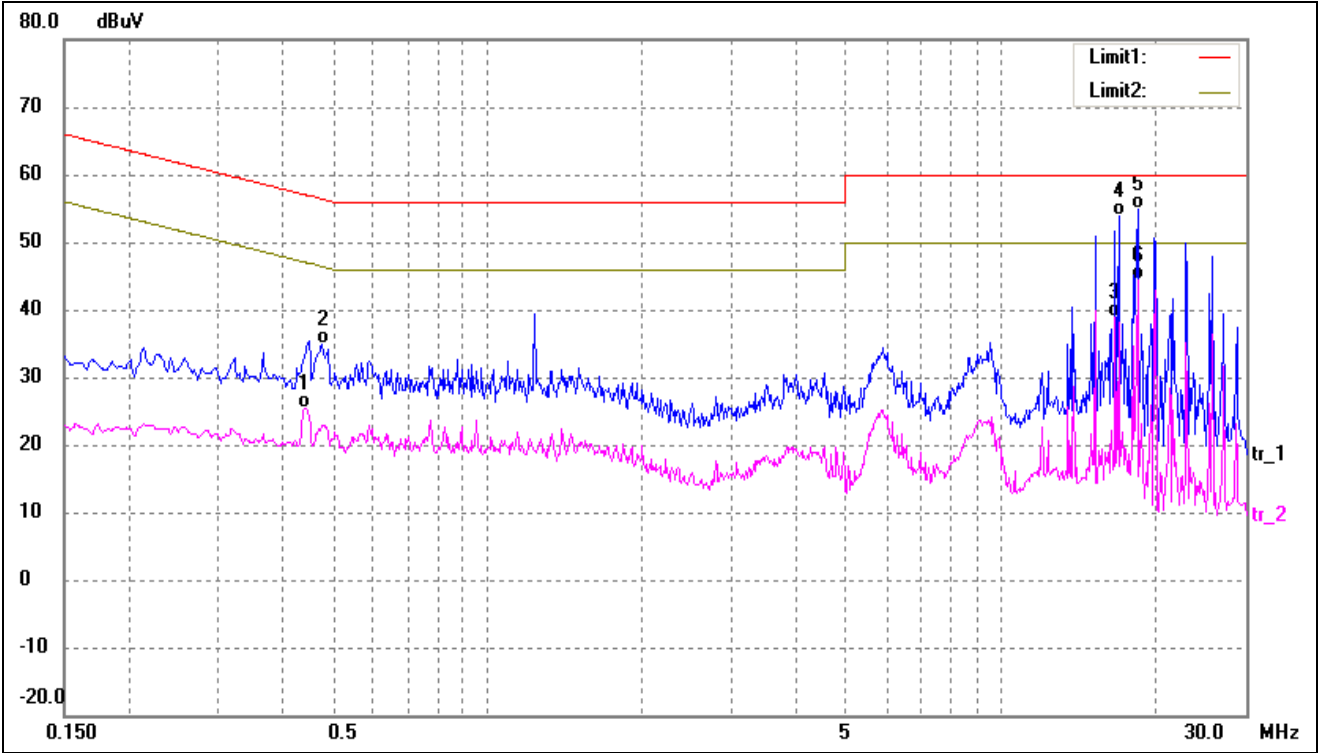

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.4420	15.45	10.01	25.46	47.02	-21.56	AVG
2	0.4780	24.81	10.02	34.83	56.37	-21.54	QP
3	16.7460	28.21	10.69	38.90	50.00	-11.10	AVG
4	17.0020	43.08	10.70	53.78	60.00	-6.22	QP
5*	18.4980	44.10	10.73	54.83	60.00	-5.17	QP
6	18.4980	33.56	10.73	44.29	50.00	-5.71	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

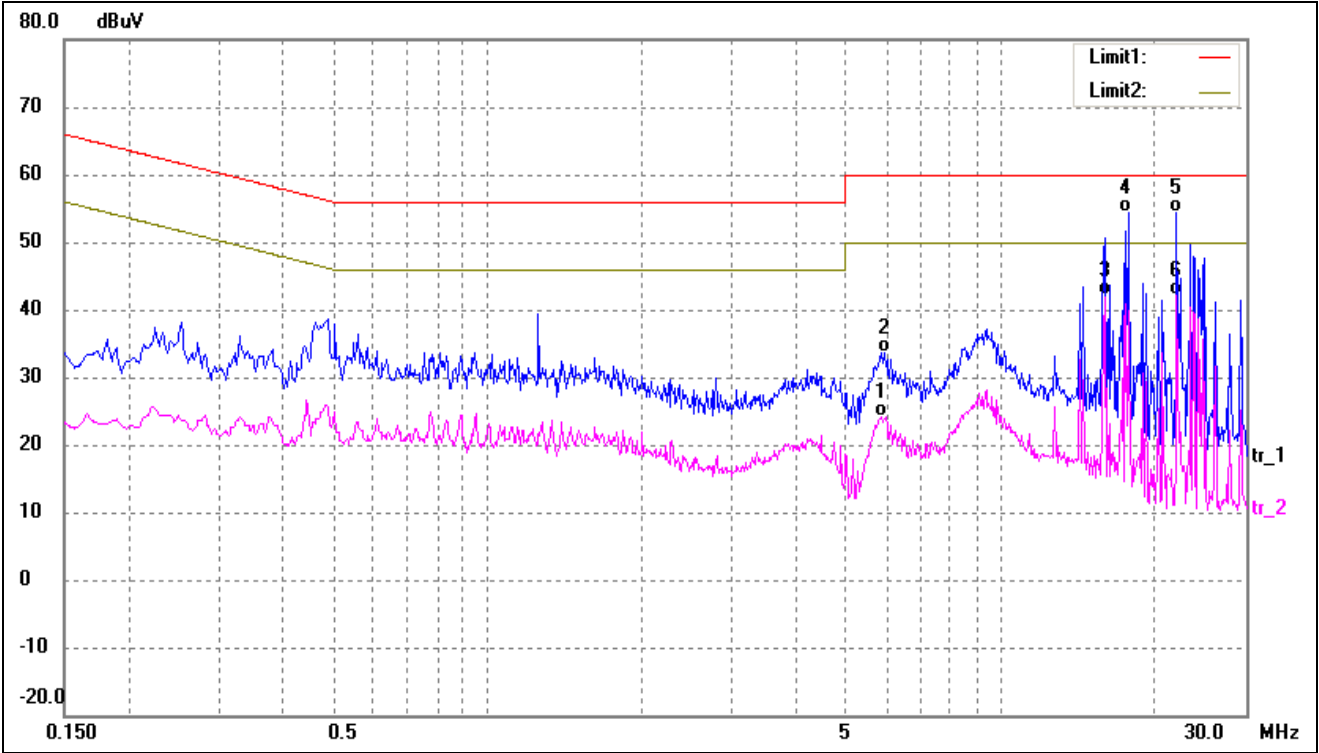

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	5.8580	13.60	10.44	24.04	50.00	-25.96	AVG
2	5.9340	23.25	10.45	33.70	60.00	-26.30	QP
3	16.0020	31.53	10.68	42.21	50.00	-7.79	AVG
4	17.7540	43.62	10.72	54.34	60.00	-5.66	QP
5*	21.9980	43.65	10.82	54.47	60.00	-5.53	QP
6	21.9980	31.39	10.82	42.21	50.00	-7.79	AVG

5. RADIATED EMISSION

5.1 Standard Applicable

According to 15.209(a), radiated emission limits; general requirements.

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$


5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

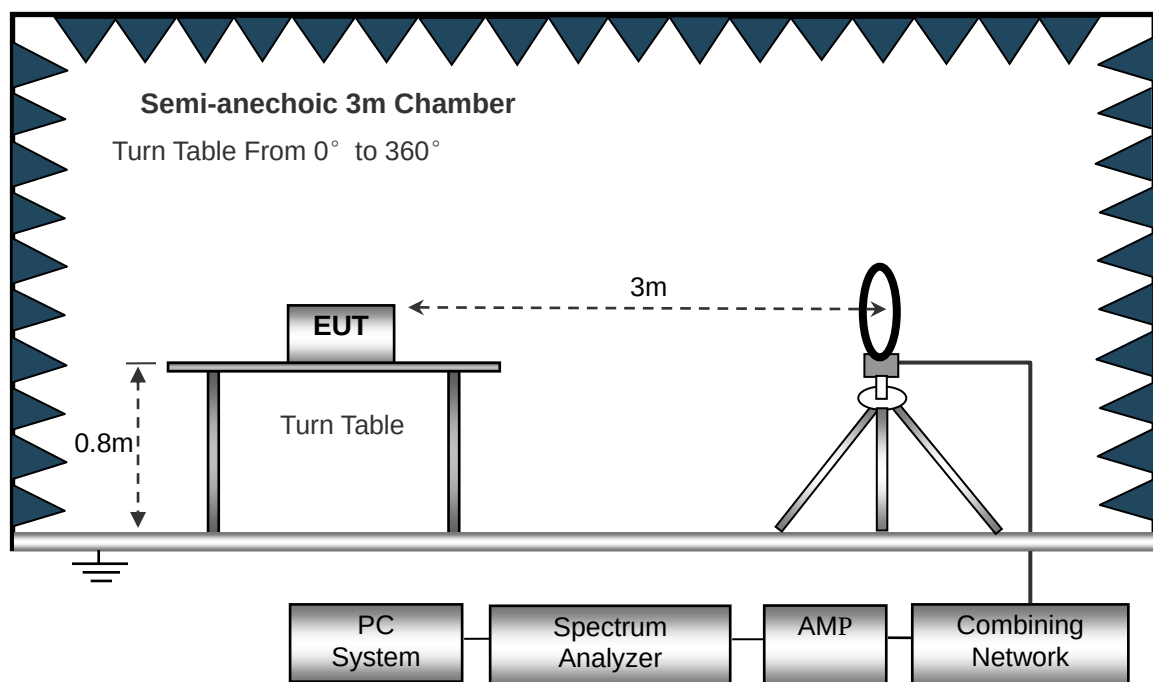

The test setup for emission measurement from 30 MHz to 1 GHz..

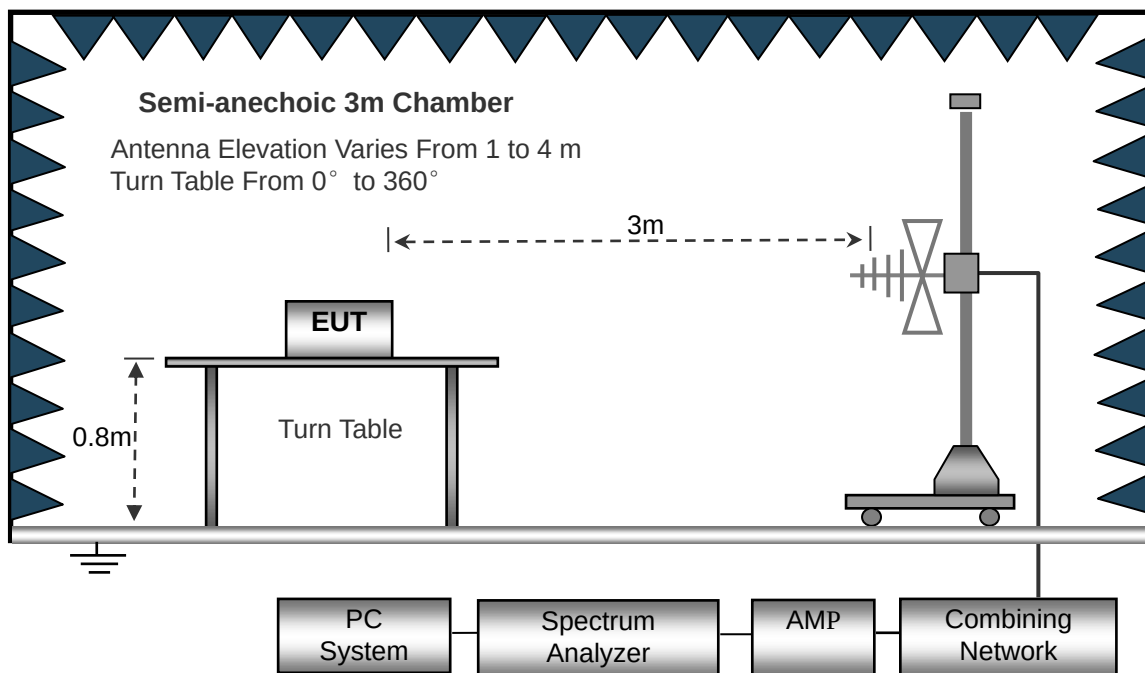

5.3 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10kHz,

VBW =30kHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120kHz,

VBW=300kHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.209(a) Limit}$$

5.5 Environmental Conditions


Temperature:	22 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

5.6 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ Below 30MHz


Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

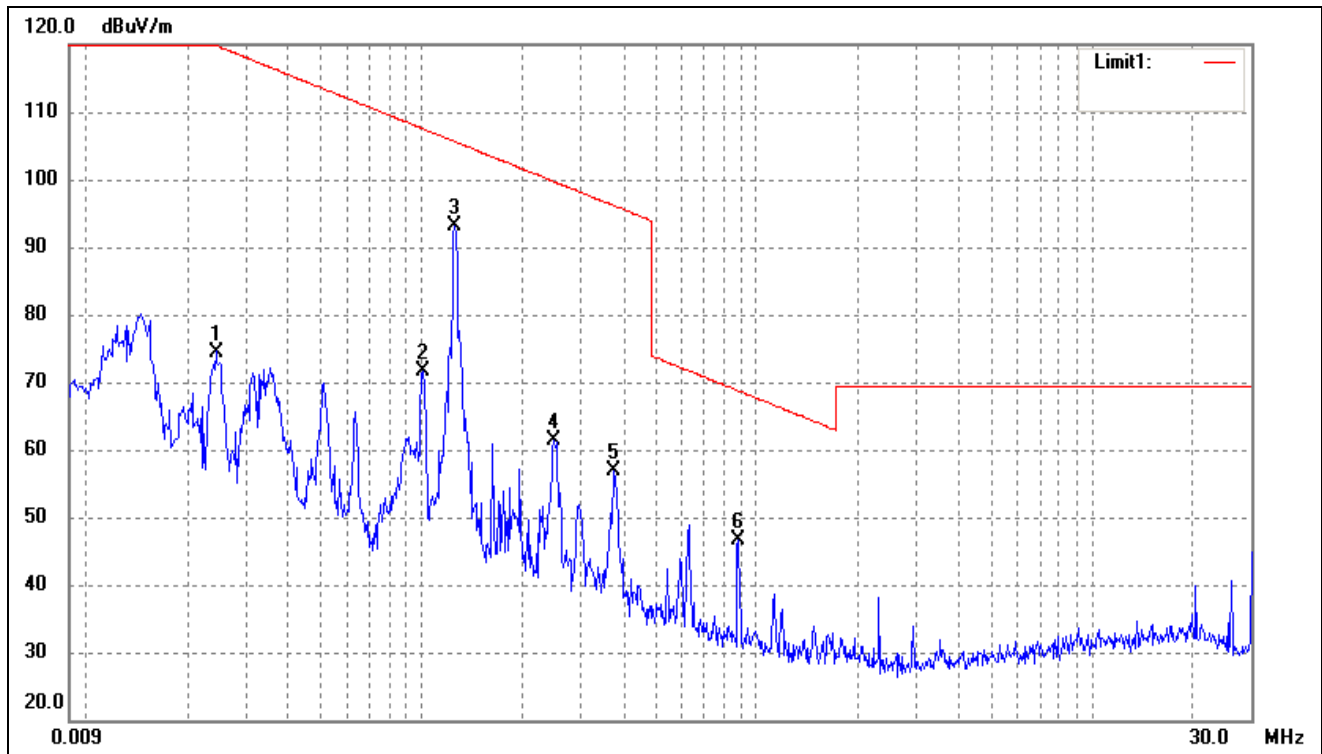

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	0.0244	79.95	-5.45	74.50	119.84	-45.34	-	-	peak
2	0.1003	76.62	-5.06	71.56	107.57	-36.01	-	-	peak
3	0.1253	98.09	-4.85	93.24	105.64	-12.40	-	-	peak
4	0.2481	67.16	-5.70	61.46	99.71	-38.25	-	-	peak
5	0.3731	62.90	-6.13	56.77	96.17	-39.40	-	-	peak
6	0.8803	54.64	-8.04	46.60	68.73	-22.13	-	-	peak


➤ 30MHz-1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

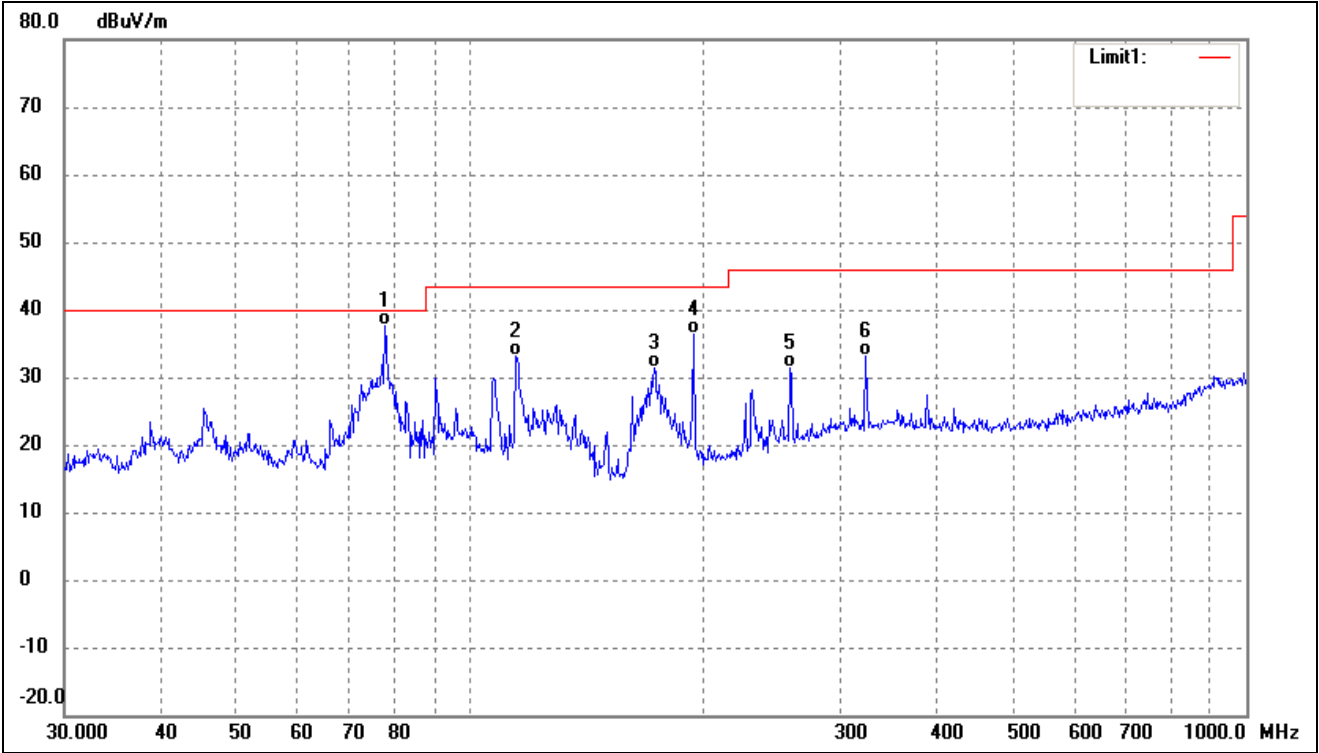

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	77.5928	56.32	-18.72	37.60	40.00	-2.40	-	-	QP
2	114.5146	48.37	-15.16	33.21	43.50	-10.29	-	-	QP
3	172.5988	46.84	-15.46	31.38	43.50	-12.12	-	-	QP
4	193.7728	49.60	-13.18	36.42	43.50	-7.08	-	-	QP
5	258.3264	41.80	-10.31	31.49	46.00	-14.51	-	-	QP
6	323.3204	41.47	-8.44	33.03	46.00	-12.97	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

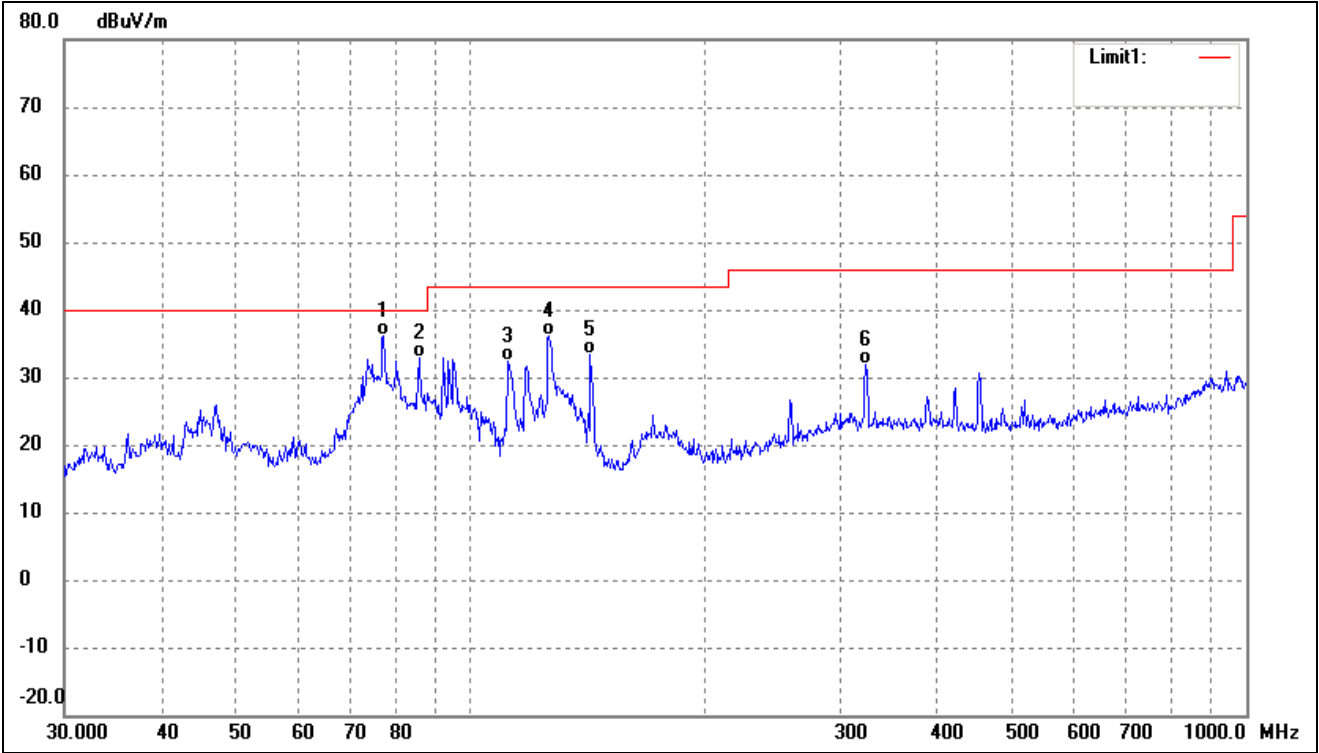

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	77.3212	54.68	-18.67	36.01	40.00	-3.99	-	-	QP
2	85.8984	50.79	-17.93	32.86	40.00	-7.14	-	-	QP
3	111.7380	47.30	-14.93	32.37	43.50	-11.13	-	-	QP
4	126.3286	53.28	-17.23	36.05	43.50	-7.45	-	-	QP
5	142.8244	50.32	-17.03	33.29	43.50	-10.21	-	-	QP
6	323.3204	40.37	-8.44	31.93	46.00	-14.07	-	-	QP

Remark: ‘-’ Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

***** END OF REPORT *****