


GTI-ATMBT2202 -X Module天线参数


Gain&Efficiency 增益和效率						
frequency 频率(MHz)	gain 增益(dBi)	最小增益 (dBi)	主极化最 大增益	交叉极化 最大增益	efficiency 效率(dB)	efficiency 效率
2400	-2.09	-25.85	-2.97	-4.7	-7.41	18.15%
2410	-2.23	-25.61	-3.02	-4.83	-7.46	17.94%
2420	-1.95	-24.02	-2.75	-4.59	-7.14	19.33%
2430	-2.26	-22.82	-3.05	-4.93	-7.39	18.24%
2440	-2.76	-22.36	-3.53	-5.46	-7.85	16.41%
2450	-3.2	-22.16	-3.93	-6	-8.24	14.99%
2460	-3.97	-22.78	-4.7	-6.87	-8.95	12.72%
2470	-4.8	-23.34	-5.46	-7.77	-9.71	10.70%
2480	-5.56	-24.01	-6.17	-8.58	-10.4	9.12%

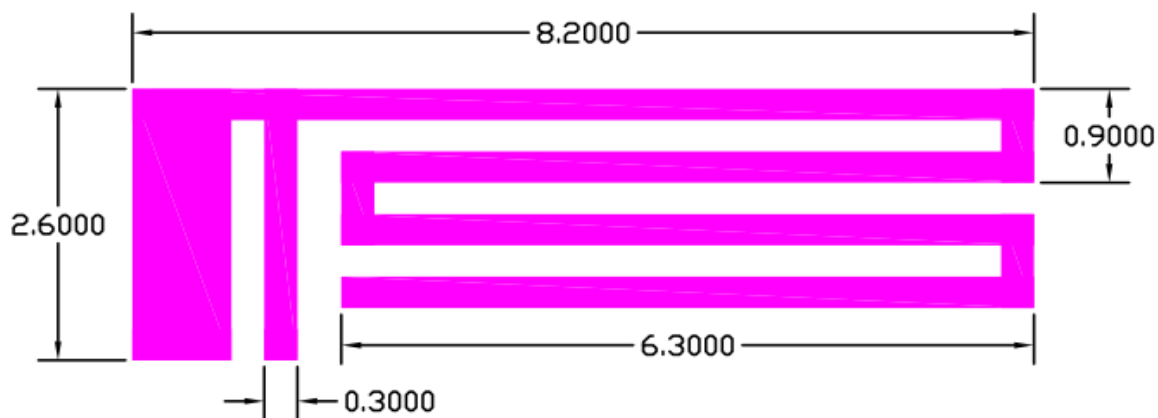


Manufacturer: GLOBALSCALETECHNOLOGIES, INC.

Address: Building 41A, Industrial Zone 5, Huaidecuigang, Fuyong St. Baoan Dist, Shenzhen


H Theta=90 freq=2400MHz

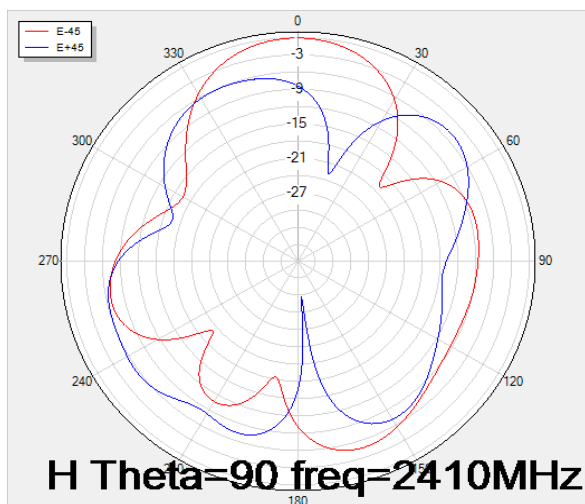


H Theta=0 freq=2400MHz

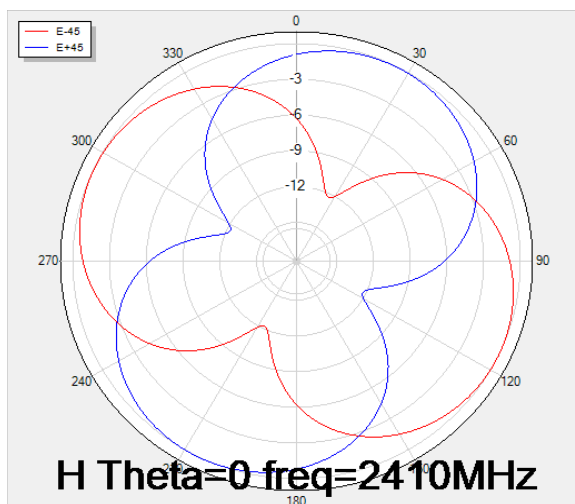


H Theta=90 freq=2410MHz

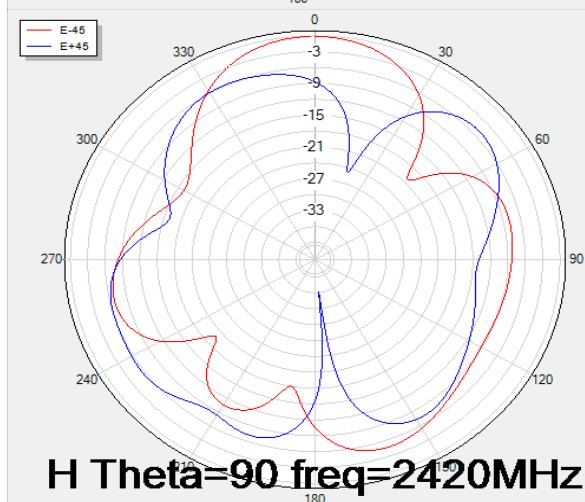


H Theta=0 freq=2410MHz

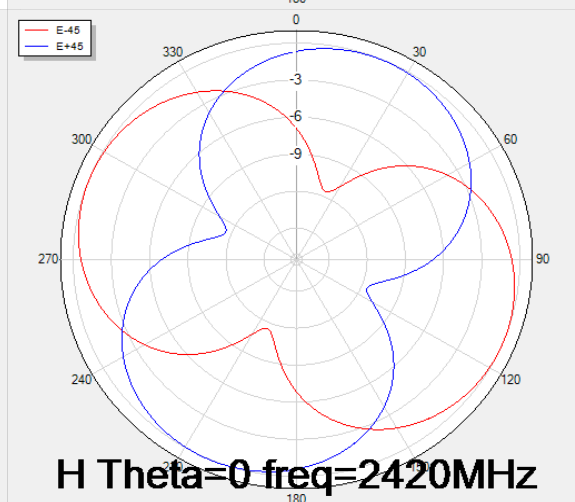

H Theta=90 freq=2420MHz

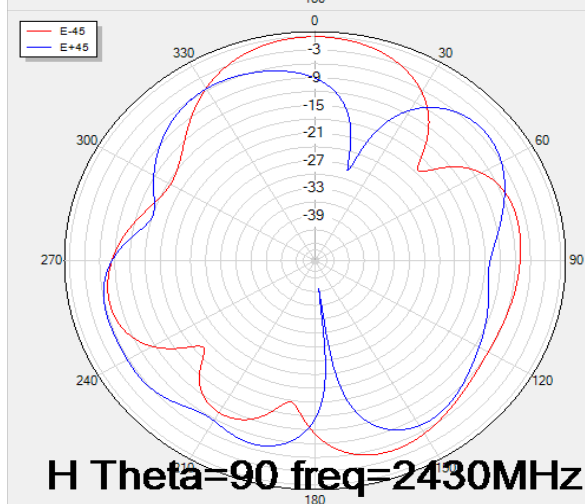

H Theta=0 freq=2420MHz

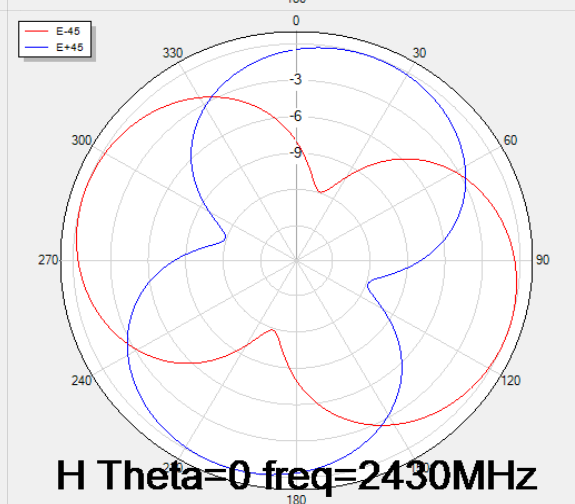

H Theta=90 freq=2430MHz

H Theta=0 freq=2430MHz

