

Prüfbericht-Nr.: <i>Test report no.:</i>	60383511 001	Auftrags-Nr.: <i>Order no.:</i>	238486981	Seite 1 von 26 Page 1 of 26
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	28-May-2020	
Auftraggeber: <i>Client:</i>	Memsor Corporation 3F., No. 169-12, Sec. 2, Chang'an E. Rd., Zhongshan Dist., Taipei City 104, Taiwan (R.O.C.)			
Prüfgegenstand: <i>Test item:</i>	LifeTemp Thermometer			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	MEM-BIO-01-1			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (BLE)			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	28-May-2020			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A002835649-011 A002835649-012			
Prüfzeitraum: <i>Testing period:</i>	29-May-2020–12-Jun-2020			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
überprüft von: <i>reviewed by:</i>	genehmigt von <i>authorized by:</i>			
Datum: 07-Sep-2020 <i>Date:</i>	Mars Y.J. Lin	Datum: 07-Sep-2020 <i>Date:</i>	Ryan W.T. Chen	
Stellung / Position:	Project Engineer	Stellung / Position:	Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
6.1	FCC KDB 447498 D01 v06	RF Exposure Compliance	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	14
4.6 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1 Antenna Requirement	15
5.1.2 Peak Output Power	16
5.1.3 6dB Bandwidth	18
5.1.4 Power Spectral Density.....	19
5.1.5 Conducted Spurious Emissions and Frequency Band Edges measured in 100kHz Bandwidth.....	20
5.1.6 Radiated Spurious Emissions and Band Edges	21
6. SAFETY HUMAN EXPOSURE.....	26
6.1 RF EXPOSURE COMPLIANCE	26
6.1.1 SAR Test Exclusion Thresholds.....	26

Prüfbericht - Nr.: 60383511 001
Test Report No.

Seite 4 von 26
Page 4 of 26

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED SPURIOUS EMISSIONS

APPENDIX SP - PHOTO DOCUMENTATION_TEST SETUP PHOTO

APPENDIX EP - PHOTO DOCUMENTATION_EUT PHOTO

Prüfbericht - Nr.: 60383511 001
Test Report No.**Seite 5 von 26**
Page 5 of 26**HISTORY OF THIS TEST REPORT**

Report No.	Description	Date Issued
60383511 001	Original Release	07-Sep-2020

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Spurious Emissions

Appendix SP - Photo Documentation_Test Setup Photo

Appendix EP - Photo Documentation_EUT Photo

Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247
ANSI C63.10:2013
KDB558074 D01 DTS Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
(Conducted Test & Radiated Spurious Emissions)
FCC Registration No.: 226631
ISED Registration No.: 25563



2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are:

Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	± 0.1 ppm
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Radiated emission of transmitter, valid up to 26 GHz	± 6 dB
Radiated emission of receiver, valid up to 26 GHz	± 6 dB
Temperature	± 2 °C
Humidity	± 10 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a LifeTemp Thermometer. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	LifeTemp Thermometer
Type Identification	MEM-BIO-01-1
FCC ID	2AWHM-B2860

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel number	40
Data Rate	1Mbps
Operation Voltage	3Vdc
Modulation	GFSK
Maximum Output Power (mW)	2.09
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	3
2440	3
2480	3

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	BK RF Test_V1.8
---------------	-----------------

The samples were used as follows:

A002835649-011 for Conducted

A002835649-012 for Radiated

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Above 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Below 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2440	1

Prüfbericht - Nr.: 60383511 001

Test Report No.

Seite 13 von 26

Page 13 of 26

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22-26 °C	50-65 %	Nick Hsu
Radiated Spurious Emissions above 1 GHz	22-26 °C	50-65 %	Simon Tsai
Radiated Spurious Emissions below 1 GHz	22-26 °C	50-65 %	Simon Tsai

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT

Item No.	Description	Model Name	Spec.
-	Battery	CR1620	Power Rating: 3 Vdc, 70 mAh

Support Unit


Item No.	Description	Brand Name	Model No.	Serial No.	FCC ID	Length
1	UART	N/A	YP05	N/A	N/A	-
2	Notebook	Lenovo	81BL	MP1DCD6Y	PD93165NGU	-
3	Adapter	Lenovo	ADLX65NCC3A	N/A	N/A	-
A	Mini USB	N/A	N/A	N/A	N/A	0.3 m
B	Adapter Cable	N/A	N/A	N/A	N/A	1.5 m

4.5 Countermeasures to Achieve EMC Compliance


The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.6 Test Setup Diagram

<Radiated Spurious Emissions>

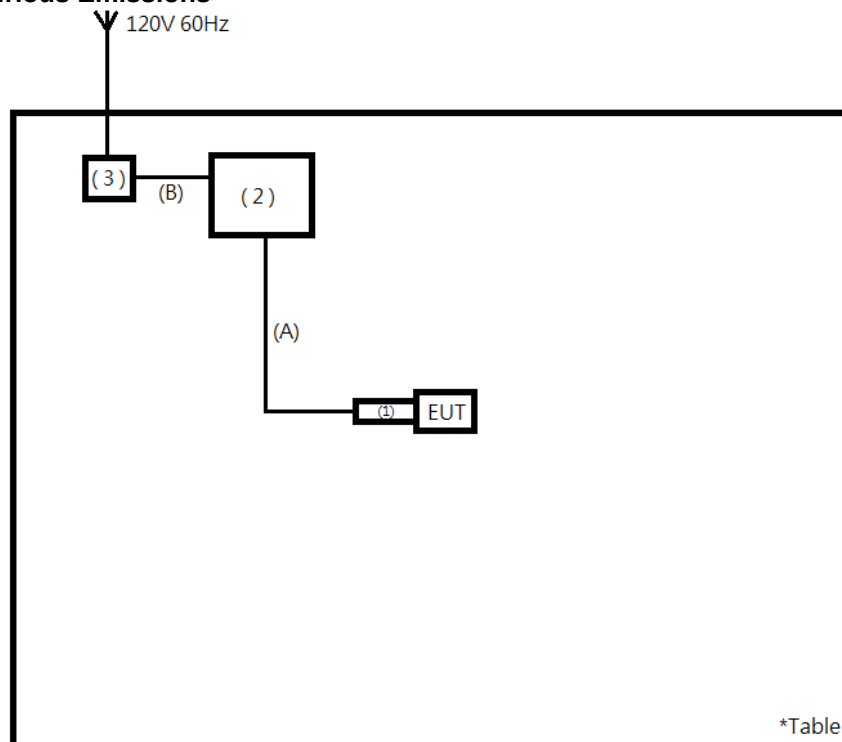

<Mains Conducted Emission mode >



5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement

Use of approved antennas only with directional gains that do not exceed 6 dBi.


According to the manufacturer declaration, the EUT has an antenna with a directional gain of -5 dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision. Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Power Meter	Anritsu	ML2495A	1901008	2020/4/6	2021/4/6
Power Sensor	Anritsu	MA2411B	1725269	2020/4/7	2021/4/7

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result**Peak Output Power**

<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (mW)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	3.20	2.09	1000
Middle Channel	2440	3.05	2.02	1000
High Channel	2480	3.17	2.07	1000

Average Power

<1Mbps>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	3.17	2.07
Middle Channel	2440	3.01	2.00
High Channel	2480	3.15	2.07

5.1.3 6dB Bandwidth

Limit The minimum 6dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101513	2020/5/28	2021/5/28

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101513	2020/5/28	2021/5/28

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.

5.1.5 Conducted Spurious Emissions and Frequency Band Edges measured in 100kHz Bandwidth


Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site

Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101513	2020/5/28	2021/5/28

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

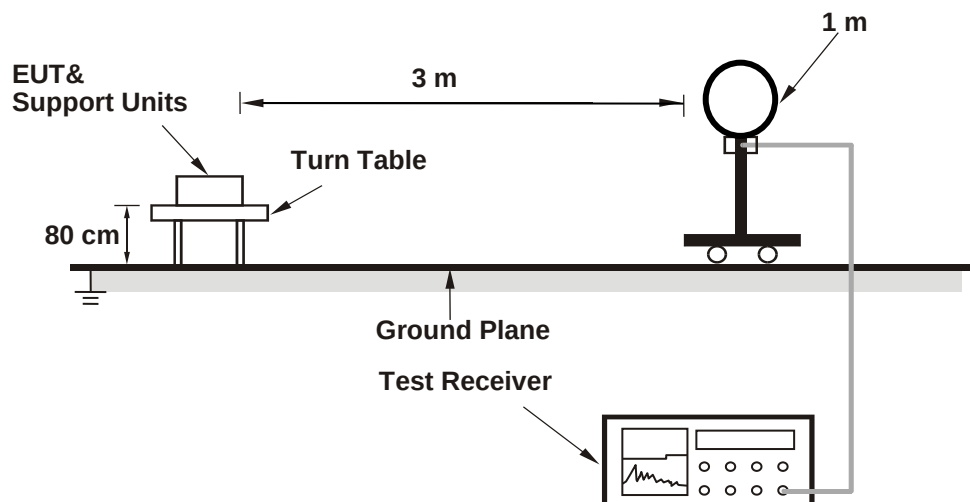

<Radiated Emissions 30 MHz to 1 GHz>

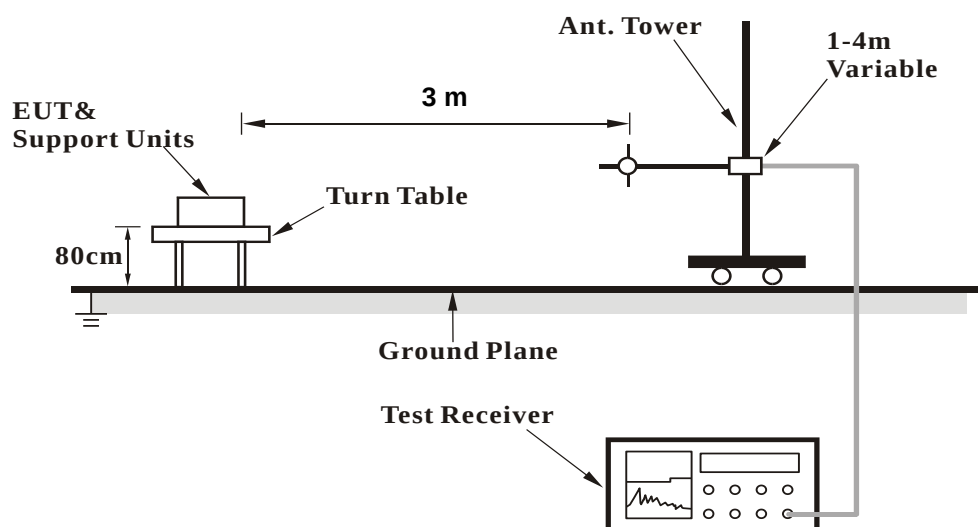

<Radiated Emissions above 1 GHz>

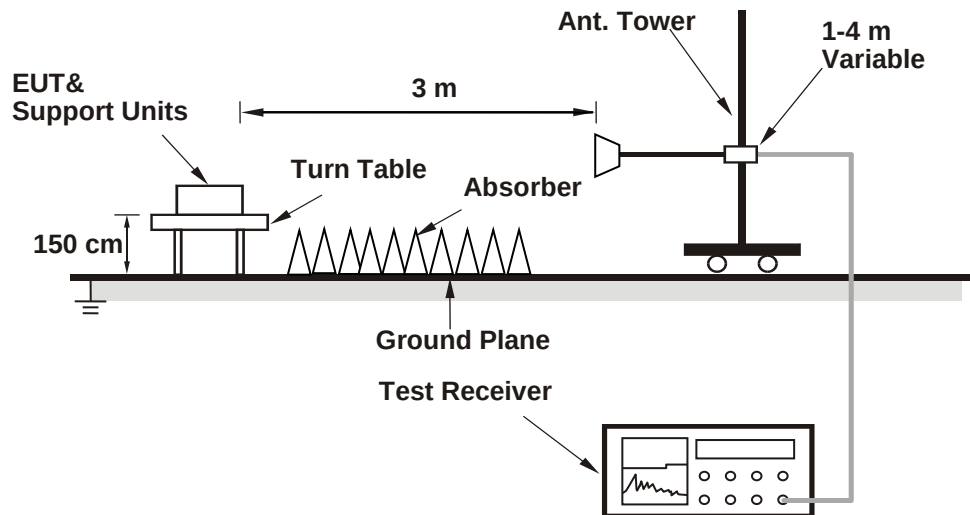

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	102109	2020/3/30	2021/3/29
Spectrum Analyzer	R&S	FSV40	101508	2020/3/16	2021/3/15
Pre-Amplifier	Agilent	8447D	2727A05146	2020/2/17	2021/2/16
Pre-Amplifier	EMCI	EMC051845SE	980635	2020/2/11	2021/2/10
Pre-Amplifier	EMCI	EMC184045SE	980656	2020/2/11	2021/2/10
Bilog Antenna	SCHWARZBECK	VULB-9168	00950	2020/1/20	2021/1/19
Horn Antenna	ETS-Lindgren	3117	00218929	2019/11/27	2020/11/26
Horn Antenna	SCHWARZBECK	BBHA 9170	00896	2020/1/17	2021/1/16
Loop Antenna	EMCI	LPA600	287	2019/12/20	2020/12/19
Test Software	Audix	e3	Ver. 9	N/A	N/A
Test Cable	HUBER+SUHNER	SUCOFLEX 104EA	800057/4EA	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 104	802244/4	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 104	MY37203/4	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 102EA	800897/2EA	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 102EA	800902/2EA	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 102EA	801026/2EA	2020/3/25	2021/3/24

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: 60383511 001
Test Report No.

Seite 25 von 26
Page 25 of 26

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

6. Safety Human Exposure

6.1 RF Exposure Compliance

6.1.1 SAR Test Exclusion Thresholds

Results

Since the maximum output power of the transmitter is $2.09 \text{ mW} < 10 \text{ mW}$ (Distance: 5 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.


Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	584.420	> 500	Pass
Middle Channel	2440	587.410	> 500	Pass
High Channel	2480	584.420	> 500	Pass


Low Channel

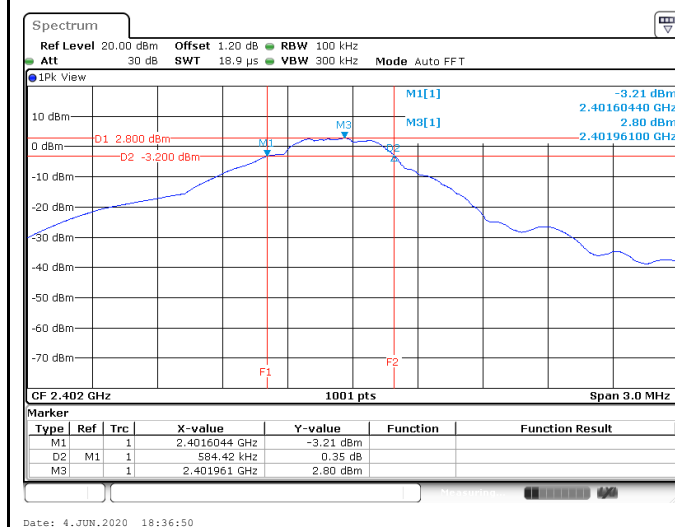

Middle Channel

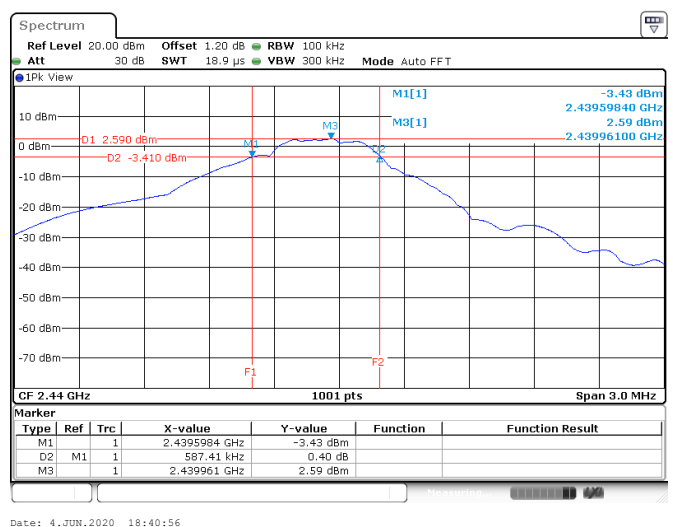


High Channel

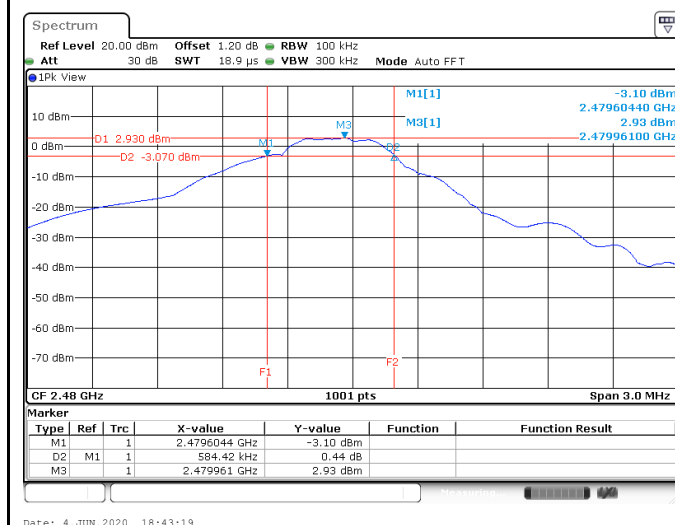

Test Result of Power Spectral Density

BLE_1M


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-8.92	8	Pass
Middle Channel	2440	-9.06	8	Pass
High Channel	2480	-8.63	8	Pass

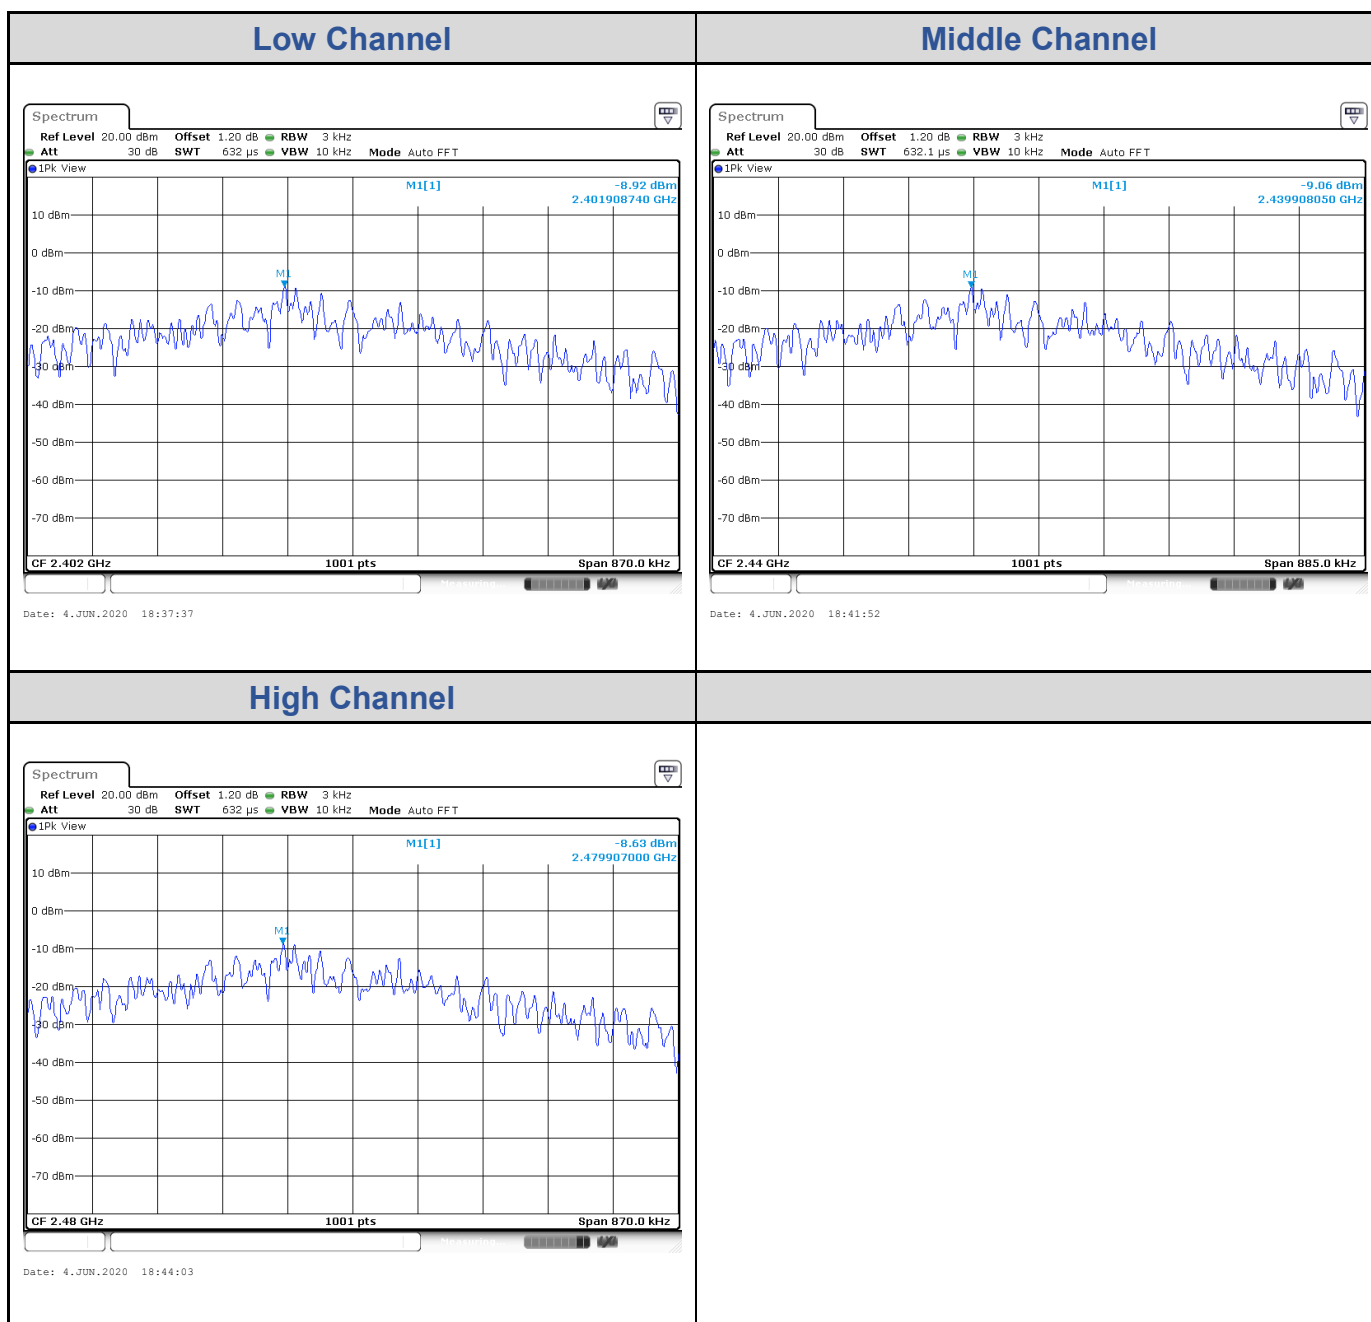


Test Result of Conducted Spurious Emissions, Tx Mode

BLE_1M


Low Channel

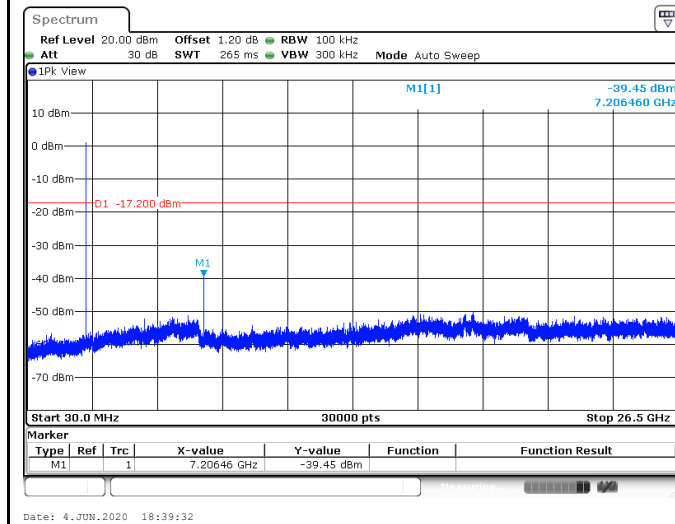


Middle Channel

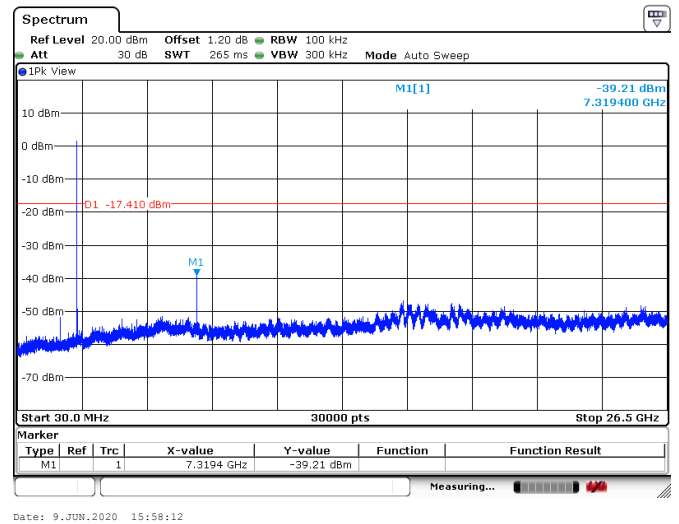

High Channel

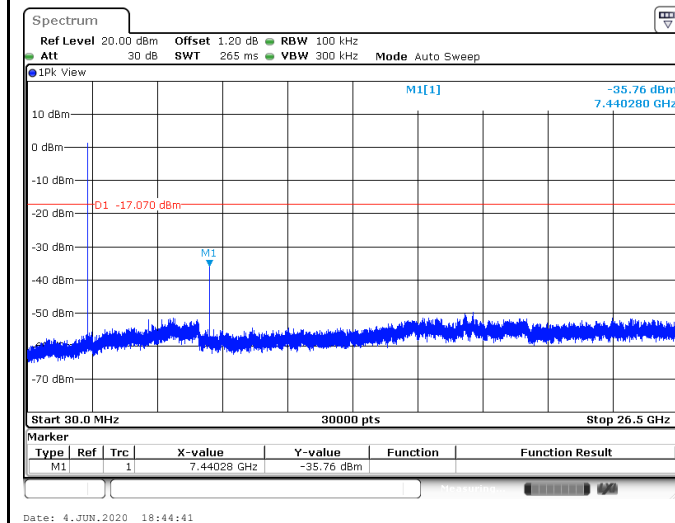

Test Result of Conducted Band Edge, Tx Mode

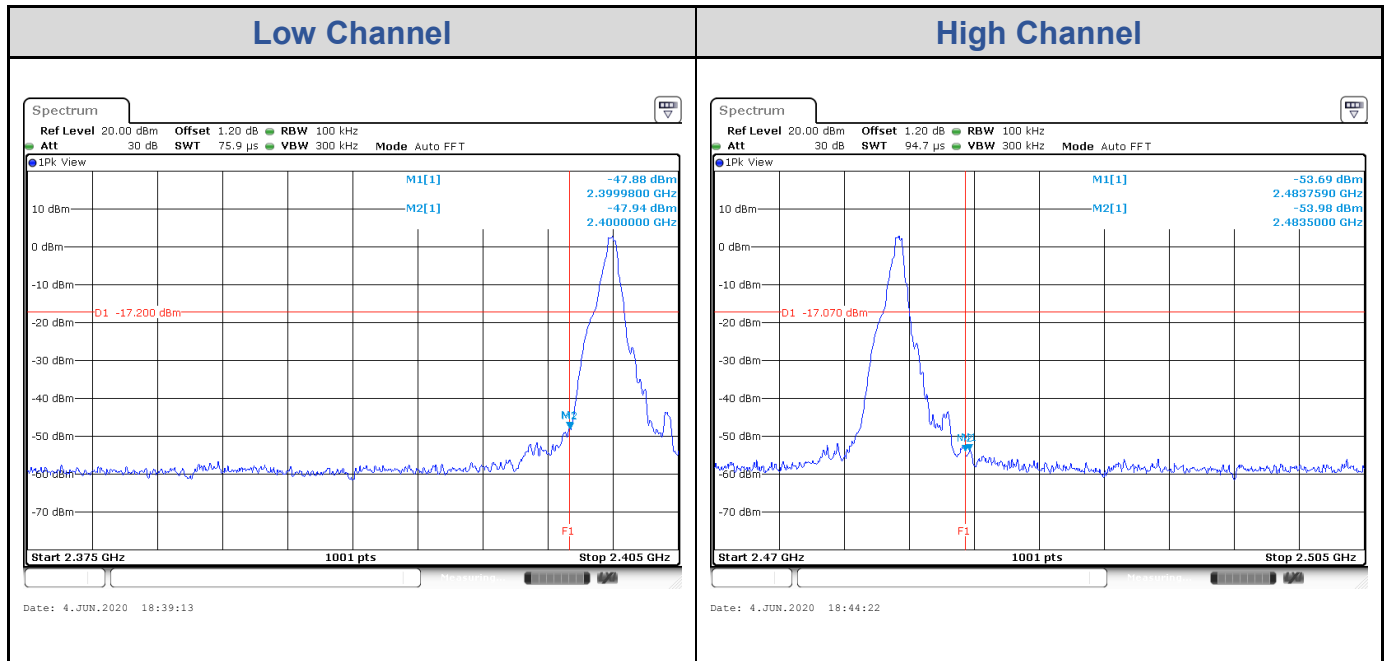
BLE_1M


Appendix B: Test Results of Radiated Spurious Emissions Test

Band Edges, 2.31GHz ~ 2.9GHz


BLE_1M

Low Channel (Horizontal) Peak

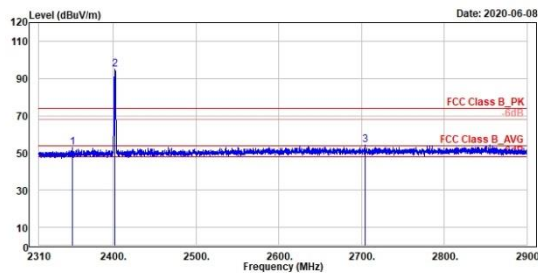

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2359.71	52.73	15.52	37.21	74.00	-21.27	300	239	Peak	Horizontal	
2 *	2402.00	94.93	57.56	37.37	74.00	20.93	300	239	Peak	Horizontal	
3	2704.12	54.49	16.69	37.80	74.00	-19.51	300	239	Peak	Horizontal	

Low Channel (Vertical) Peak

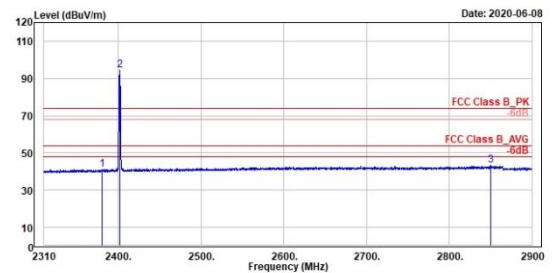


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2309.68	41.15	3.05	37.30	54.00	-12.85	300	239	Average	Horizontal	
2 *	2402.00	94.52	57.15	37.37	54.00	40.52	300	239	Average	Horizontal	
3	2859.56	43.24	5.17	38.07	54.00	-10.76	300	239	Average	Horizontal	

BLE_1M


Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

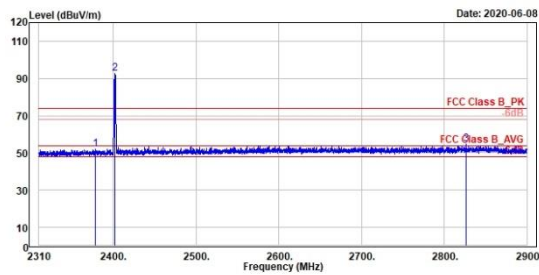

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

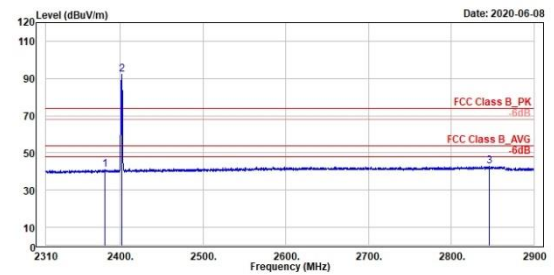


BLE_1M

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

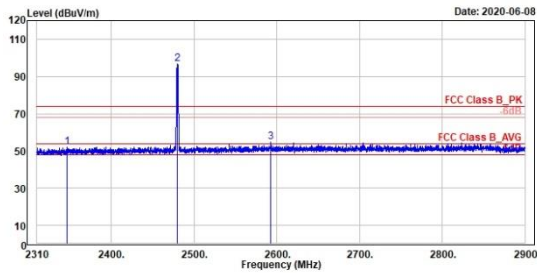

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2346.58	51.83	14.64	37.19	74.00	-22.17	326	238 Peak	Horizontal		
2 *	2480.00	96.95	59.39	37.56	74.00	22.95	326	238 Peak	Horizontal		
3	2593.08	54.56	16.59	37.97	74.00	-19.44	326	238 Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

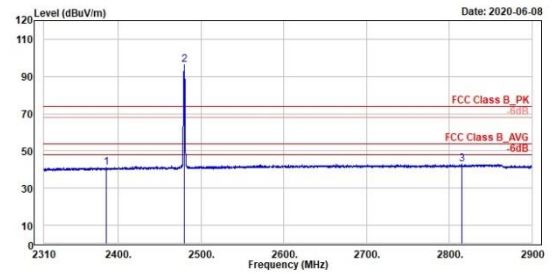


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2385.17	41.11	3.79	37.32	54.00	-12.89	326	238 Average	Horizontal		
2 *	2480.00	96.48	58.92	37.56	54.00	42.48	326	238 Average	Horizontal		
3	2815.16	42.94	4.98	37.96	54.00	-11.06	326	238 Average	Horizontal		

BLE_1M

High Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

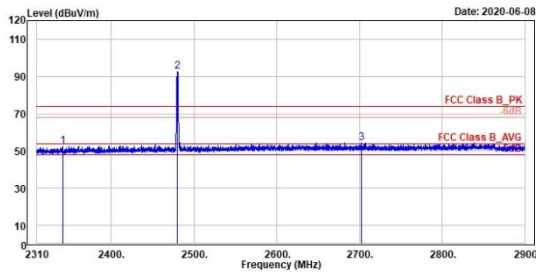

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2341.27	52.68	15.50	37.18	74.00	-21.32	296	243	Peak	Vertical	
2 *	2480.00	92.73	55.17	37.56	74.00	18.73	296	243	Peak	Vertical	
3	2782.70	54.51	16.71	37.80	74.00	-19.49	296	243	Peak	Vertical	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

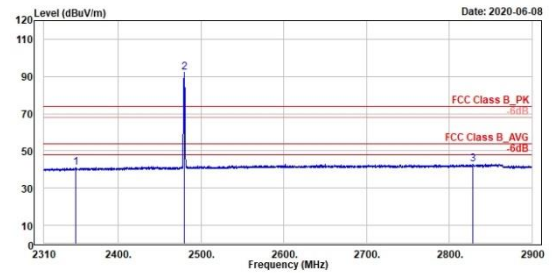

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2348.94	41.11	3.91	37.20	54.00	-12.89	296	243	Average	Vertical	
2 *	2480.00	92.30	54.74	37.56	54.00	38.30	296	243	Average	Vertical	
3	2828.85	42.88	4.88	38.00	54.00	-11.12	296	243	Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE_1M

Low Channel 9kHz~150kHz

Low Channel 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

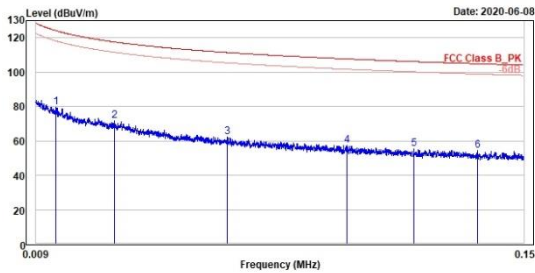

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	79.42	3.65	75.77	124.14	-44.72	100	237	QP	horizontal	
2	0.03	71.84	1.61	70.23	117.59	-45.75	100	186	QP	horizontal	
3	0.06	62.16	-0.93	63.09	111.43	-49.27	100	56	QP	horizontal	
4	0.10	57.26	-2.14	59.40	107.70	-50.44	100	41	QP	horizontal	
5	0.12	55.29	-2.90	58.19	106.14	-50.85	100	150	QP	horizontal	
6	0.14	54.41	-2.72	57.13	104.89	-50.48	100	244	QP	horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

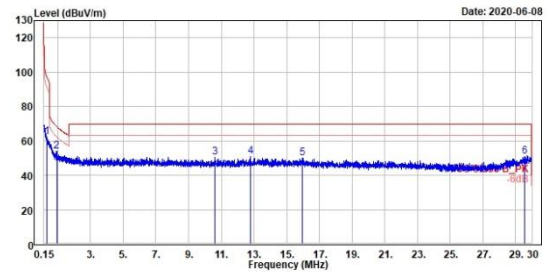

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.31	62.31	12.15	50.16	97.66	-35.35	100	222	QP	horizontal	
2	0.93	54.06	13.43	40.63	68.24	-14.18	100	236	QP	horizontal	
3	10.61	50.42	13.07	37.35	69.50	-19.08	100	245	QP	horizontal	
4	12.80	50.75	13.36	37.39	69.50	-18.75	100	336	QP	horizontal	
5	15.98	49.69	12.16	37.53	69.50	-19.81	100	24	QP	horizontal	
6	29.55	50.94	12.30	38.64	69.50	-18.56	100	288	QP	horizontal	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

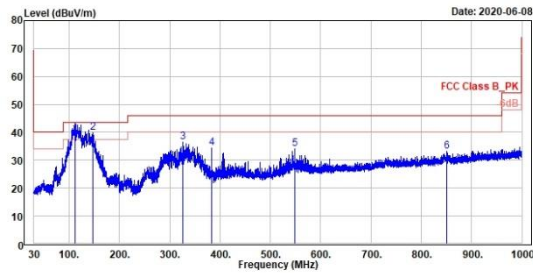

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	111.55	39.27	50.19	-10.92	43.50	-4.23	300	385	QP	horizontal		
2	147.56	39.91	47.57	-7.66	43.50	-3.59	200	169	QP	horizontal		
3	325.66	36.59	42.54	-5.95	46.00	-9.41	100	211	QP	horizontal		
4	383.95	34.39	39.35	-4.96	46.00	-11.61	100	99	QP	horizontal		
5	548.56	33.92	36.36	-2.44	46.00	-12.08	200	150	QP	horizontal		
6	851.28	33.16	38.77	2.39	46.00	-12.84	100	246	QP	horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

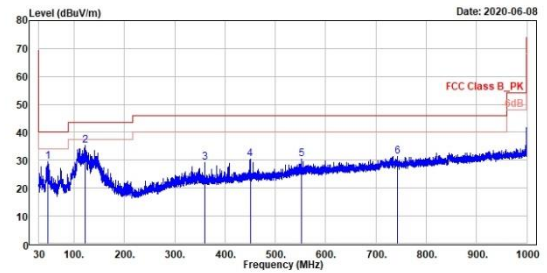

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	47.07	29.41	36.95	-7.54	40.00	-10.59	100	238	QP	vertical		
2	122.64	35.25	45.20	-9.95	43.50	-8.25	300	242	QP	vertical		
3	359.80	29.23	34.77	-5.54	46.00	-16.77	224	0	QP	vertical		
4	450.11	30.48	34.22	-3.74	46.00	-15.52	344	360	QP	vertical		
5	551.96	30.41	32.78	-2.37	46.00	-15.59	100	313	QP	vertical		
6	742.47	31.41	30.45	0.96	46.00	-14.59	300	357	QP	vertical		

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


BLE_1M

Low Channel (Horizontal)


Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

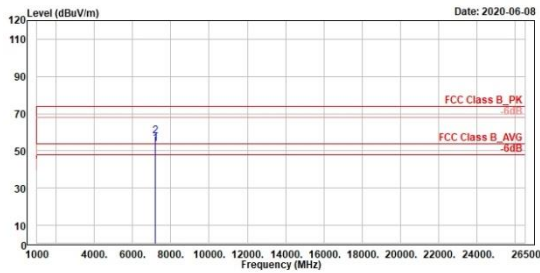

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

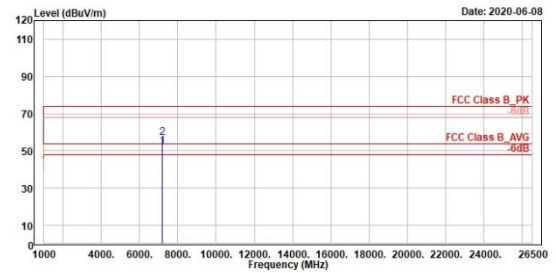


BLE_1M


Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

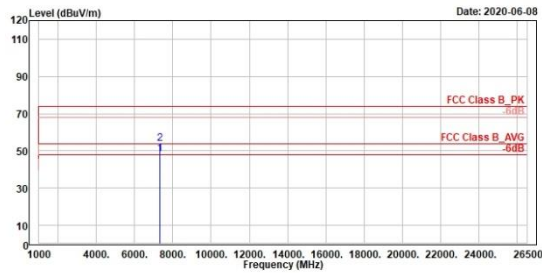

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

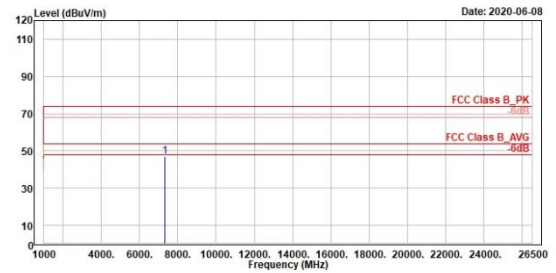


BLE_1M

High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

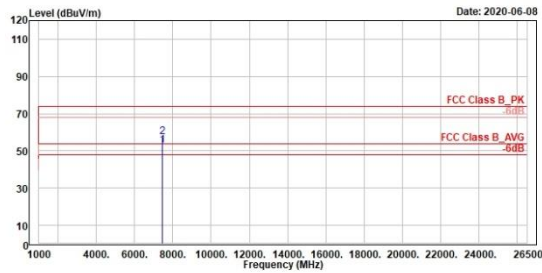

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

