

Case No. : <u>GTS20250715010-1-01</u>
Ambient Condition: <u>23</u> °C, <u>54</u> %RH
According Standard: ■Part15C
Test Date: <u>2025.8.12-2025.8.27</u> Test Engineer: <u>Evan ouyang</u>


AppendixA.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.768	2401.604	2402.372	0.5	PASS
		2440	0.752	2439.616	2440.368	0.5	PASS
		2480	0.804	2479.576	2480.380	0.5	PASS

Test Graphs



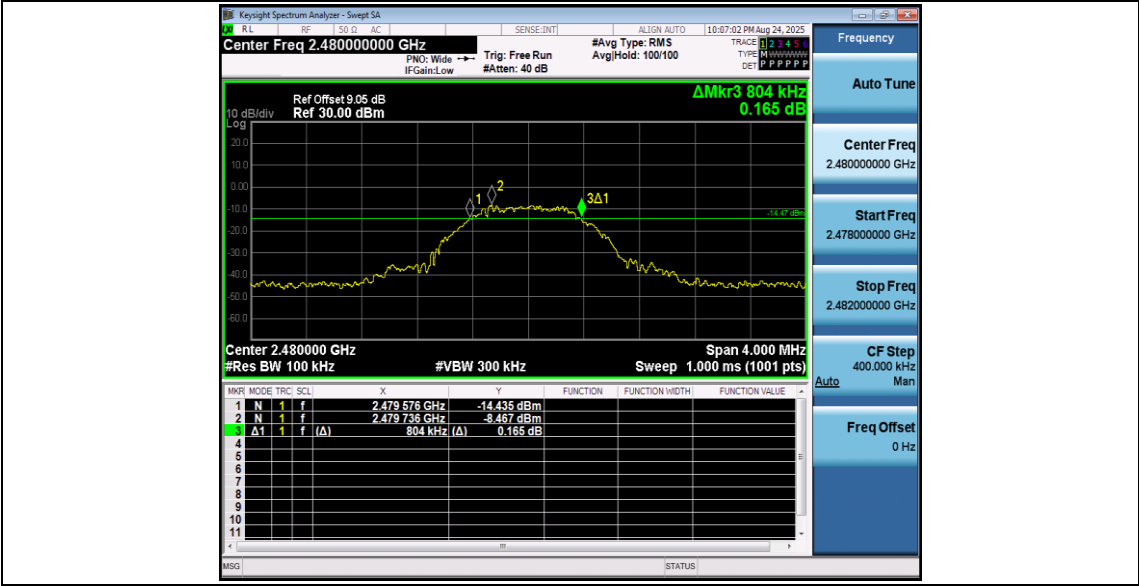

AppendixA.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	1.0864	2401.4522	2402.5386	---	---
		2440	1.1011	2439.4400	2440.5411	---	---
		2480	1.0979	2479.4400	2480.5379	---	---

Test Graphs





AppendixA.3: Maximum conducted output power

Test Result Peak


TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant1	2402	-7.10	≤30	PASS
		2440	-5.54	≤30	PASS
		2480	-5.05	≤30	PASS


AppendixA.4: Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-25.08	≤8.00	PASS
		2440	-23.45	≤8.00	PASS
		2480	-22.65	≤8.00	PASS

Test Graphs

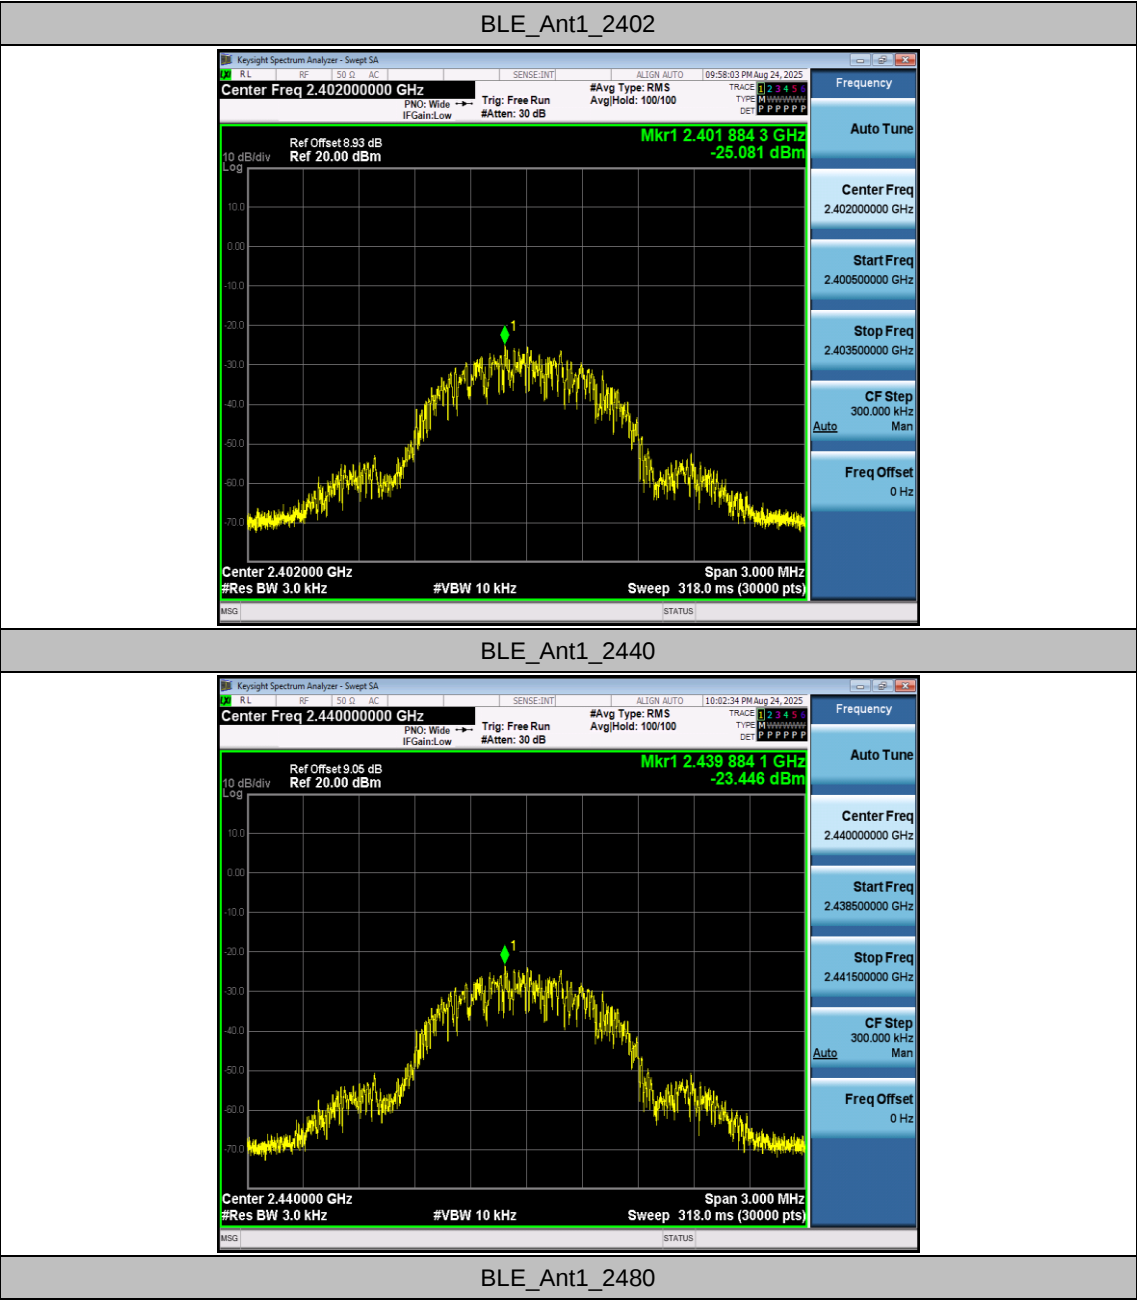

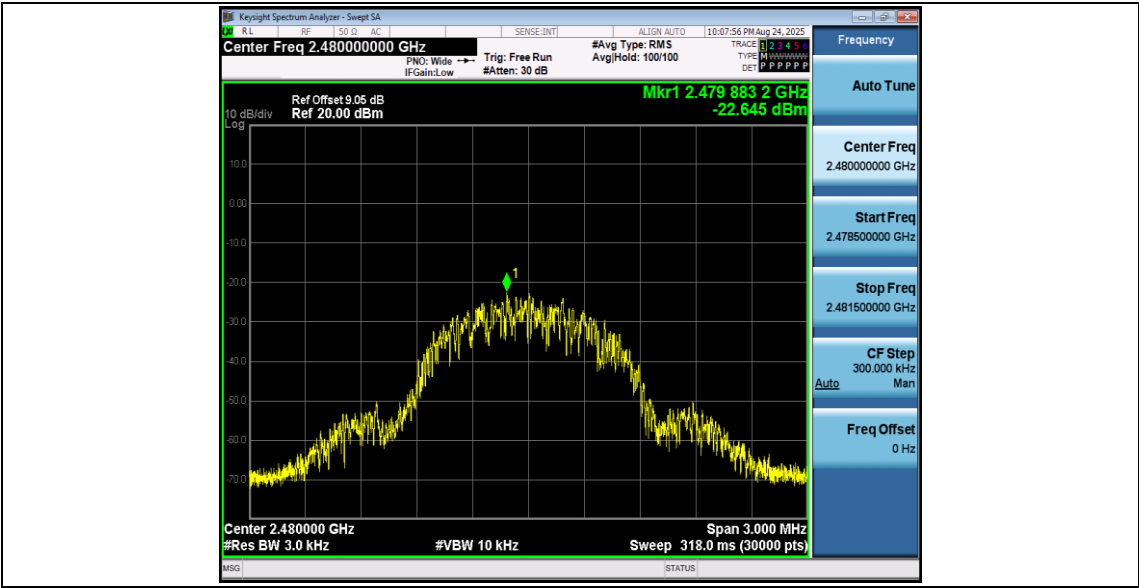


Appendix A.5: Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	-9.99	-50.04	≤ -29.99	PASS
		High	2480	-7.66	-49.57	≤ -27.66	PASS

Test Graphs

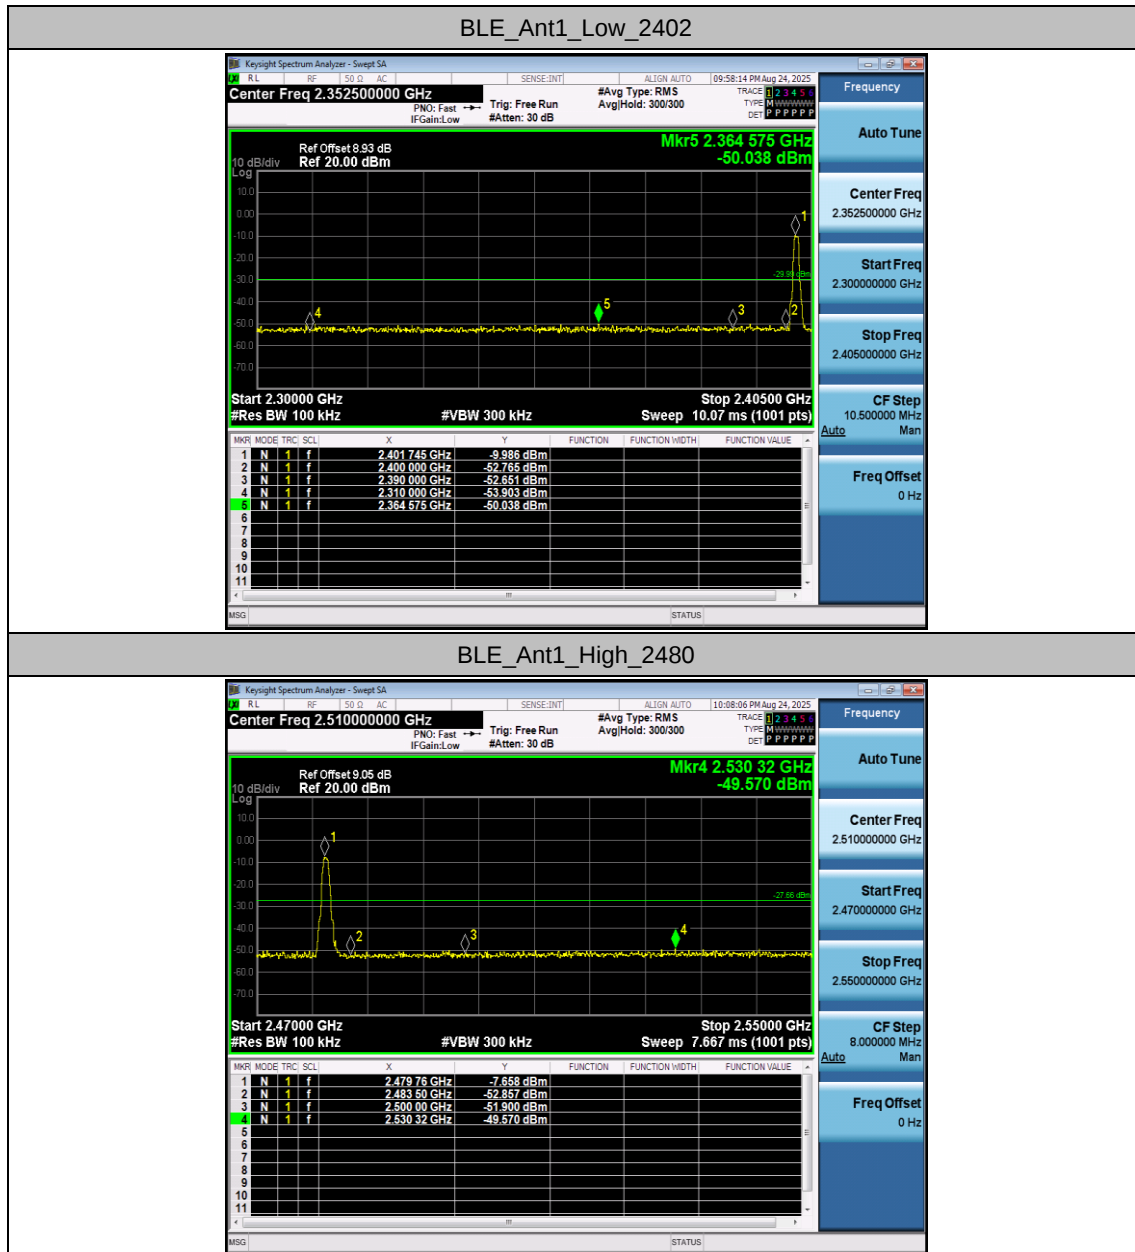



Appendix A.6: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	-10.81	-10.81	---	PASS
			30~1000	-10.81	-60.61	≤ -30.81	PASS
			1000~26500	-10.81	-33.09	≤ -30.81	PASS
		2440	Reference	-8.90	-8.90	---	PASS
			30~1000	-8.90	-60.13	≤ -28.9	PASS
			1000~26500	-8.90	-47.61	≤ -28.9	PASS
		2480	Reference	-8.52	-8.52	---	PASS
			30~1000	-8.52	-59.43	≤ -28.52	PASS
			1000~26500	-8.52	-47.27	≤ -28.52	PASS

Test Graphs

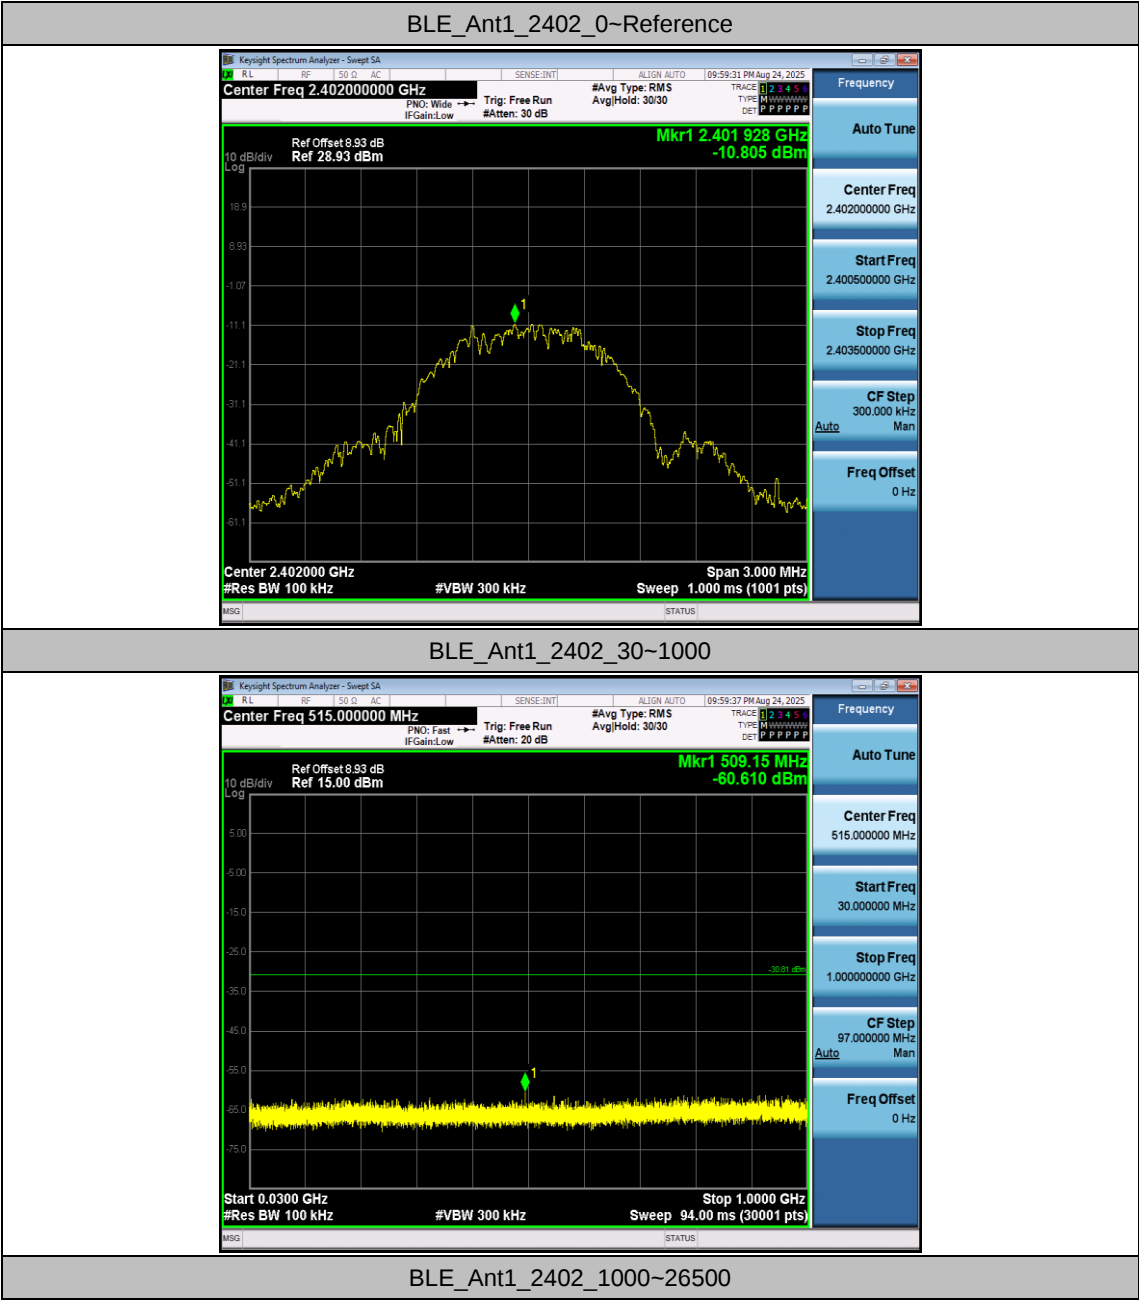


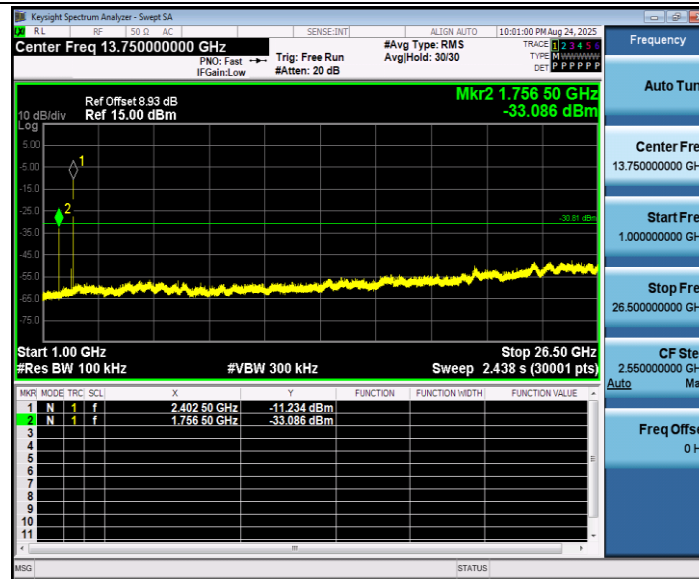



BLE_Ant1_2440_0~Reference



BLE_Ant1_2440_30~1000

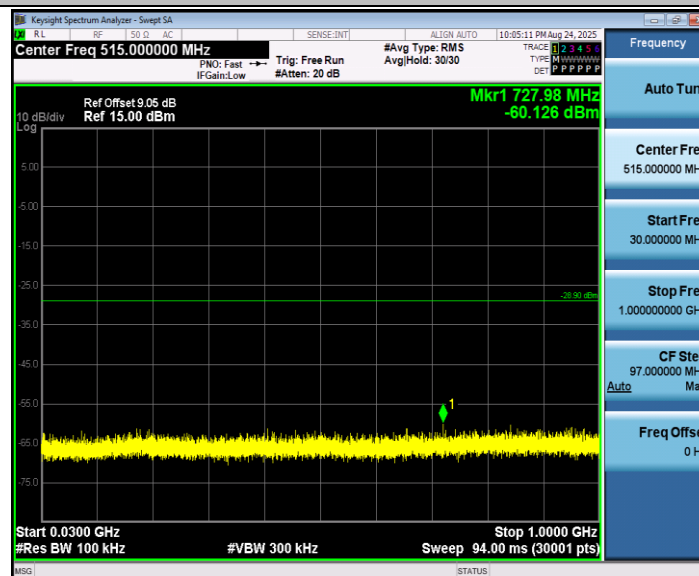

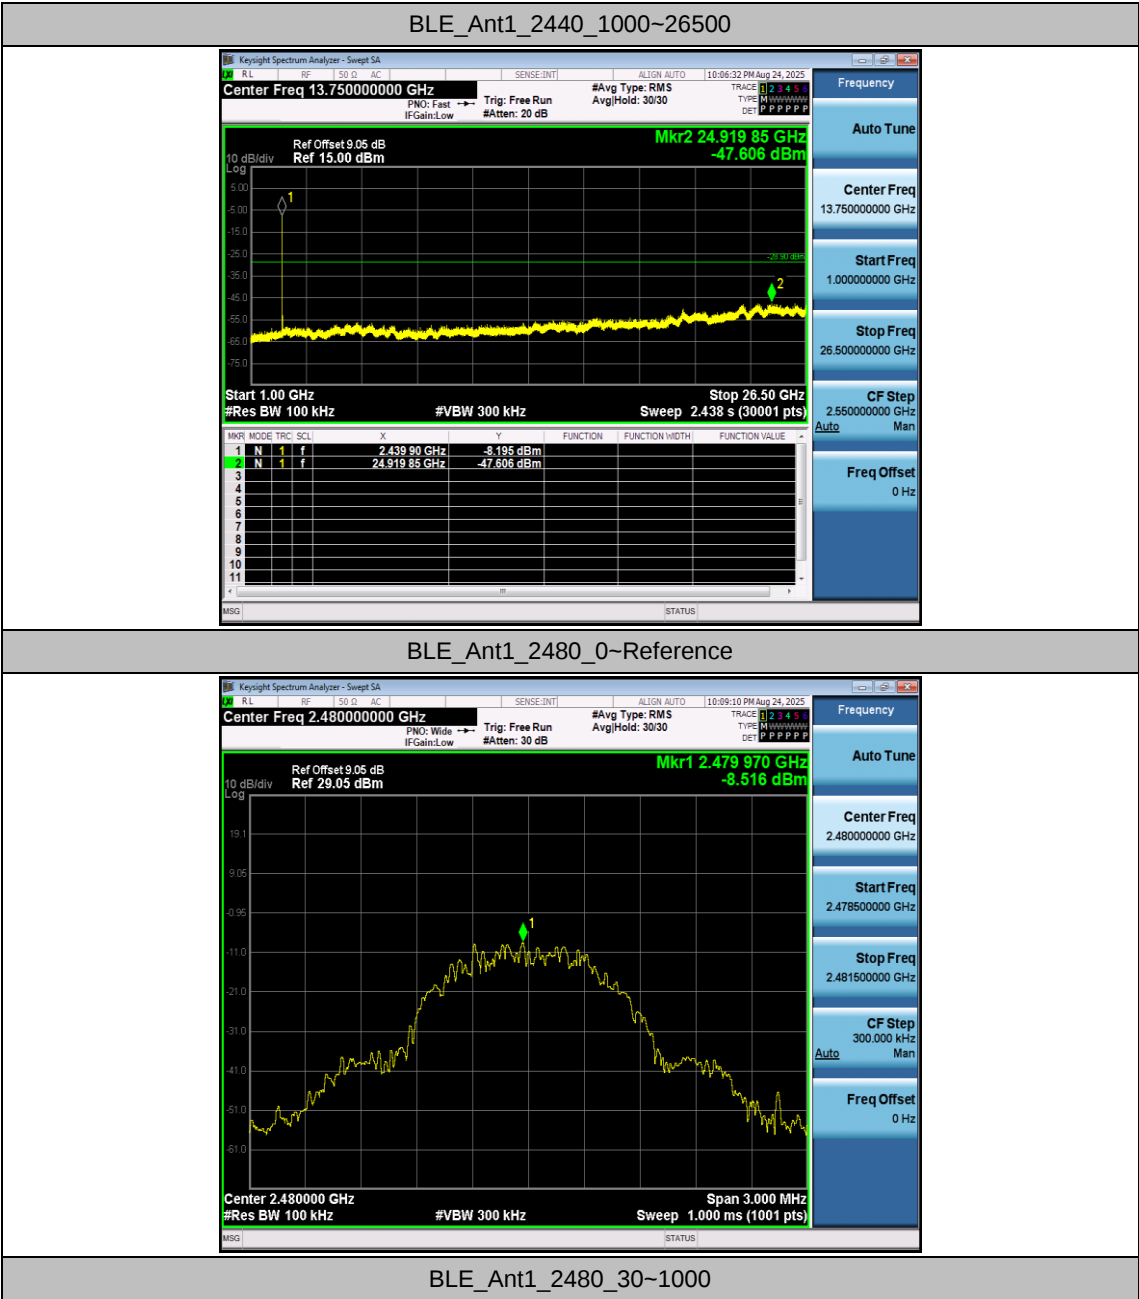

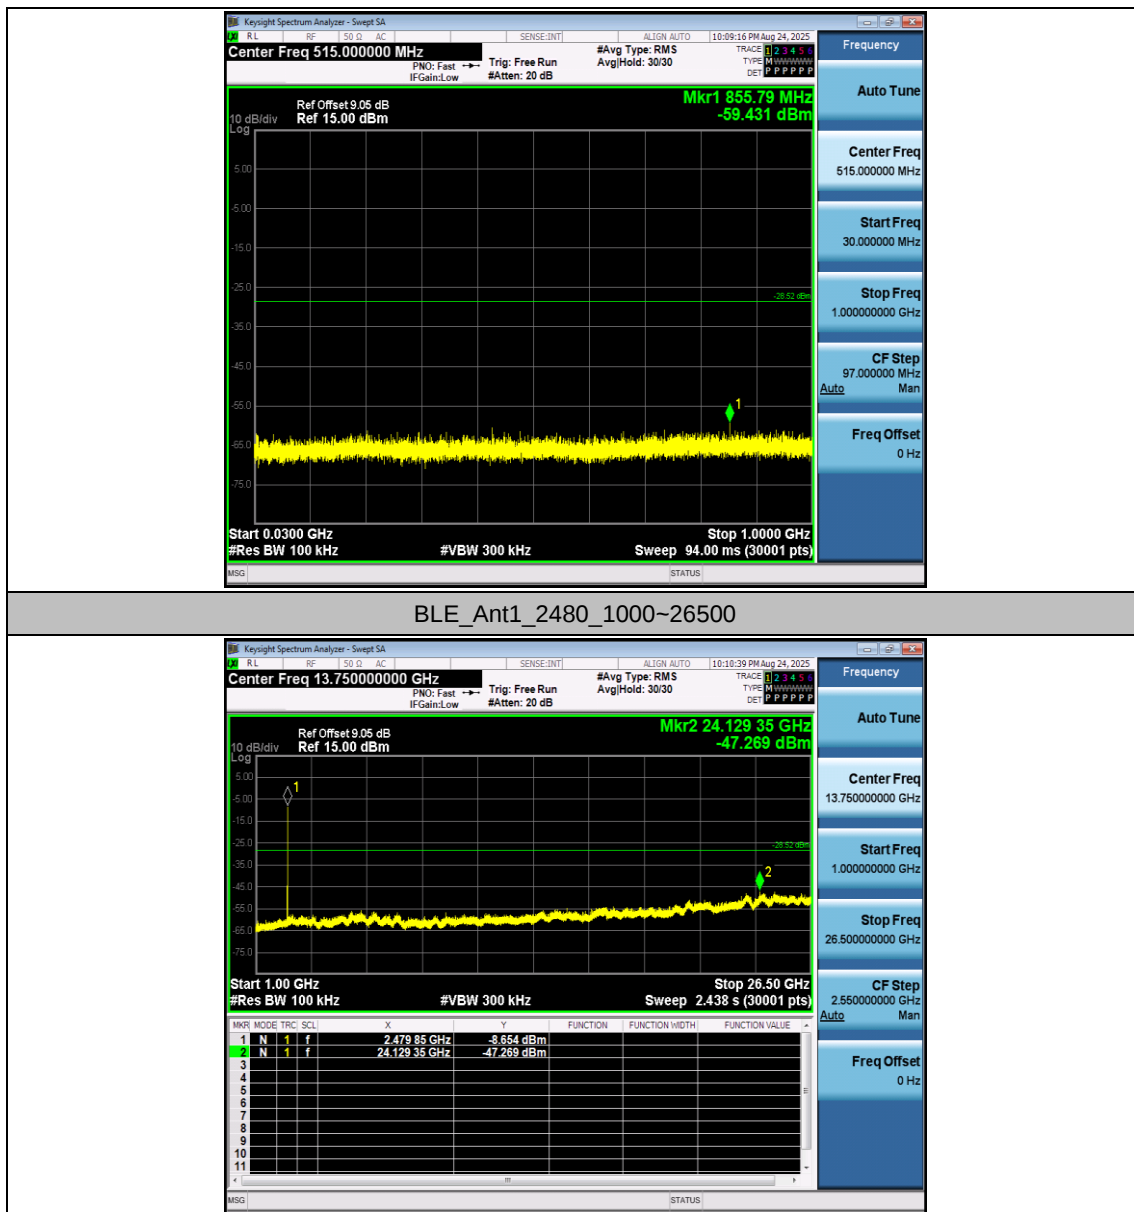



AppendixA.7: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
BLE	Ant1	2402	0.28	1.05	0.2667	26.67	5.74	3.57
		2440	0.29	1.05	0.2762	27.62	5.59	3.45
		2480	0.29	1.06	0.2736	27.36	5.63	3.45

Test Graphs

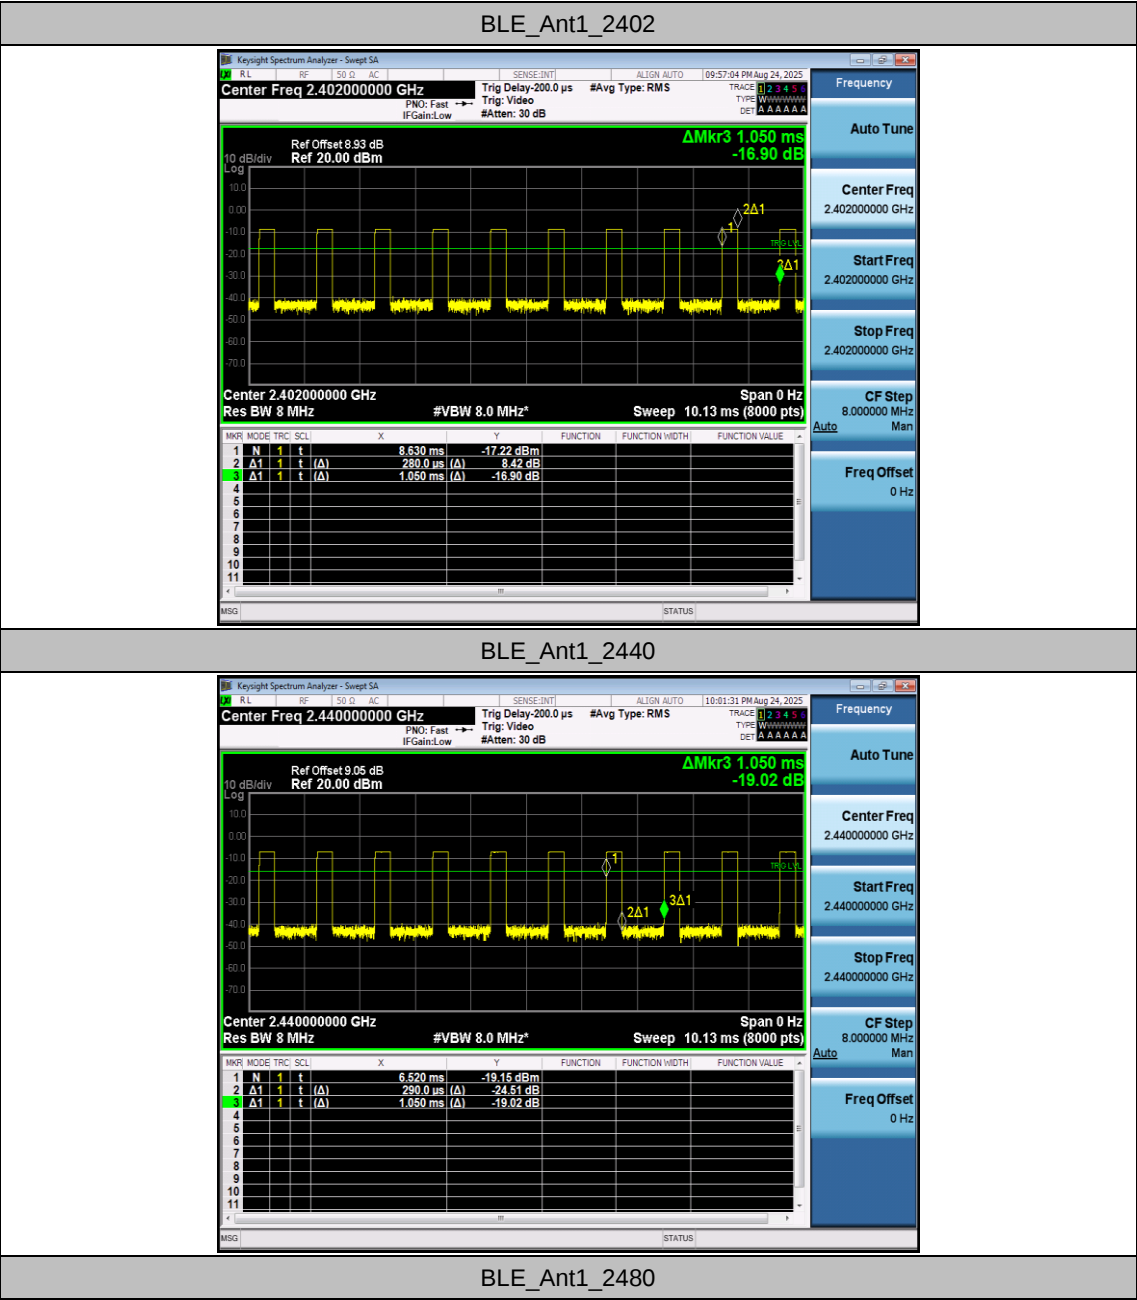

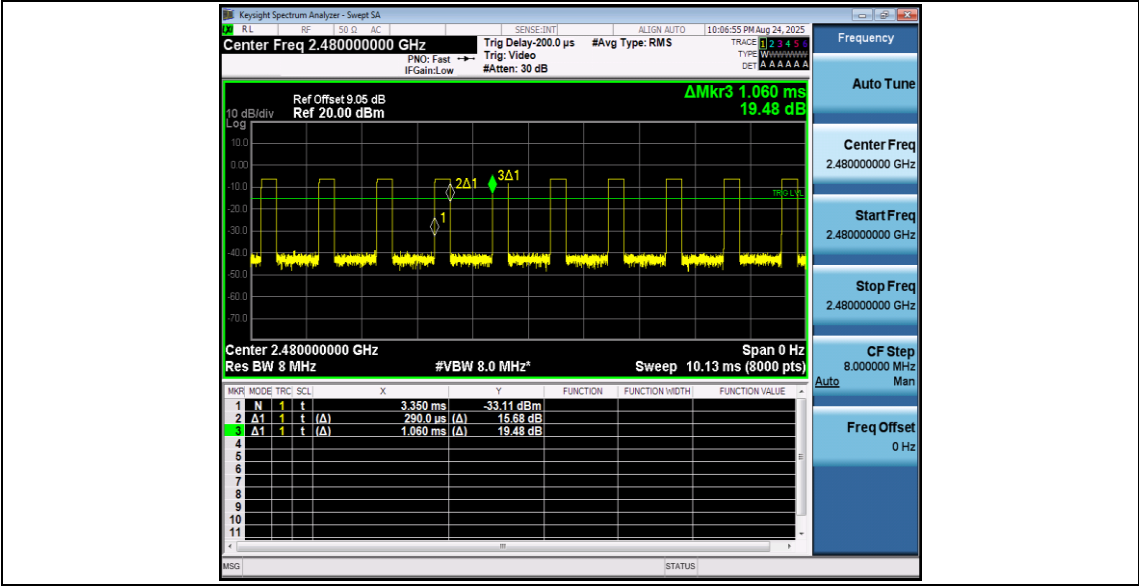

Appendix A.8: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant1	Low	2402	AV	2310.000	-49.23	≤-41.20	45.97	≤54	PASS
				AV	2389.565	-48.8	≤-41.20	46.40	≤54	PASS
				AV	2390.000	-48.89	≤-41.20	46.31	≤54	PASS
				Peak	2310.000	-41.05	≤-21.20	54.15	≤74	PASS
				Peak	2372.345	-39.02	≤-21.20	56.18	≤74	PASS
				Peak	2390.000	-41.69	≤-21.20	53.51	≤74	PASS
		High	2480	AV	2483.500	-48.74	≤-41.20	46.46	≤54	PASS
				AV	2493.680	-48.48	≤-41.20	46.72	≤54	PASS
				AV	2500.000	-48.58	≤-41.20	46.62	≤54	PASS
				Peak	2483.500	-41.65	≤-21.20	53.55	≤74	PASS
				Peak	2491.920	-38.71	≤-21.20	56.49	≤74	PASS
				Peak	2500.000	-41.31	≤-21.20	53.89	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

