


EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

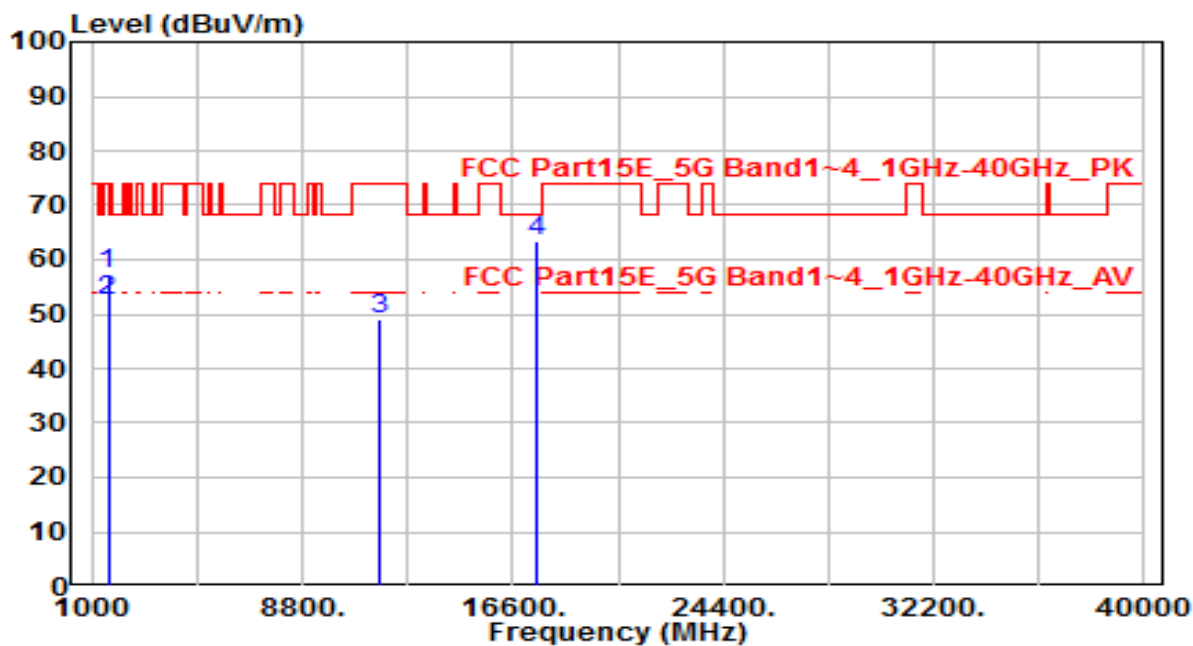


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.920	62.68	-5.49	57.19	-16.81	74.00	100	250	Peak
2	*	1599.920	57.76	-5.49	52.27	-1.73	54.00	100	250	Average
3		11650.000	31.03	17.98	49.01	-24.99	74.00	150	400	Peak
4		17475.000	33.24	30.00	63.25	-4.95	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

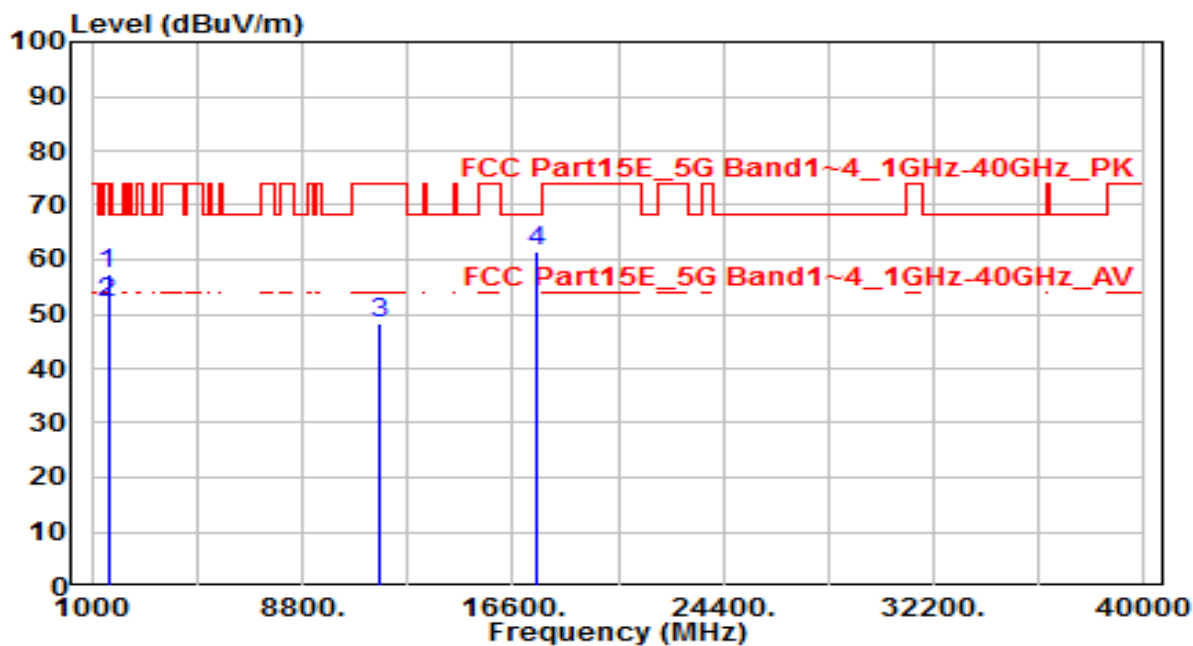


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.950	62.87	-5.49	57.38	-16.62	74.00	185	200	Peak
2	*	1599.950	57.66	-5.49	52.17	-1.83	54.00	185	200	Average
3		11650.000	30.47	17.98	48.45	-25.55	74.00	150	400	Peak
4		17475.000	31.38	30.00	61.38	-6.82	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

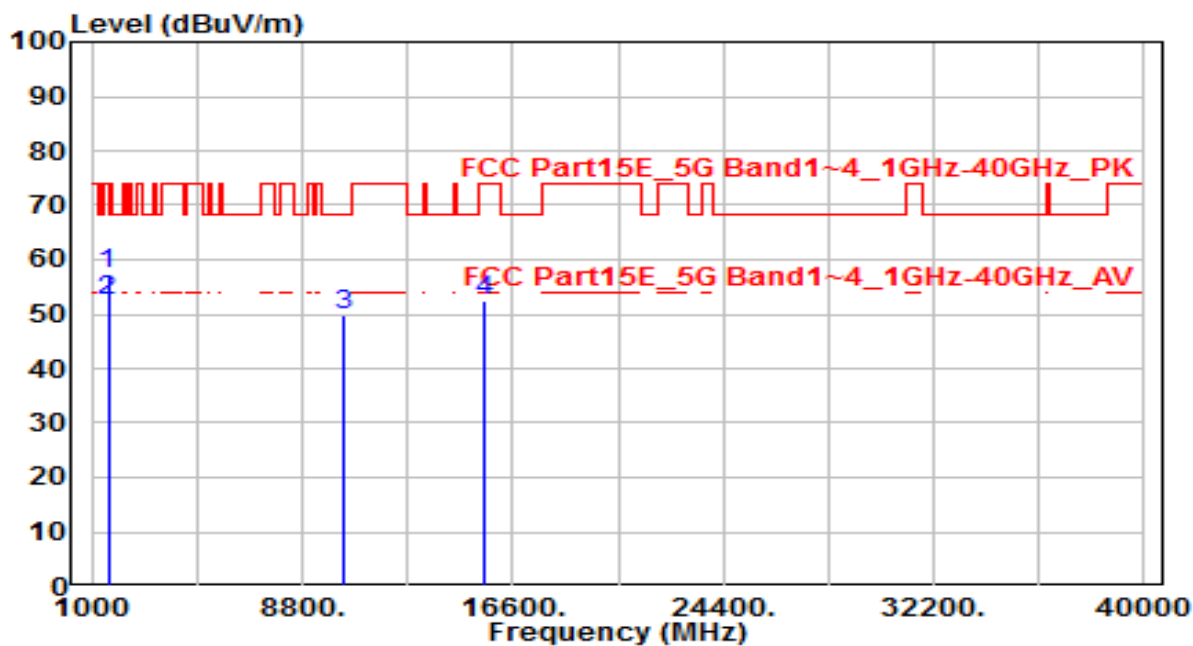


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.990	62.75	-5.49	57.26	-16.74	74.00	100	250	Peak
2	*	1599.990	57.86	-5.49	52.37	-1.63	54.00	100	250	Average
3		10360.000	33.56	16.42	49.98	-18.22	68.20	150	400	Peak
4		15540.000	31.41	20.91	52.33	-21.67	74.00	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

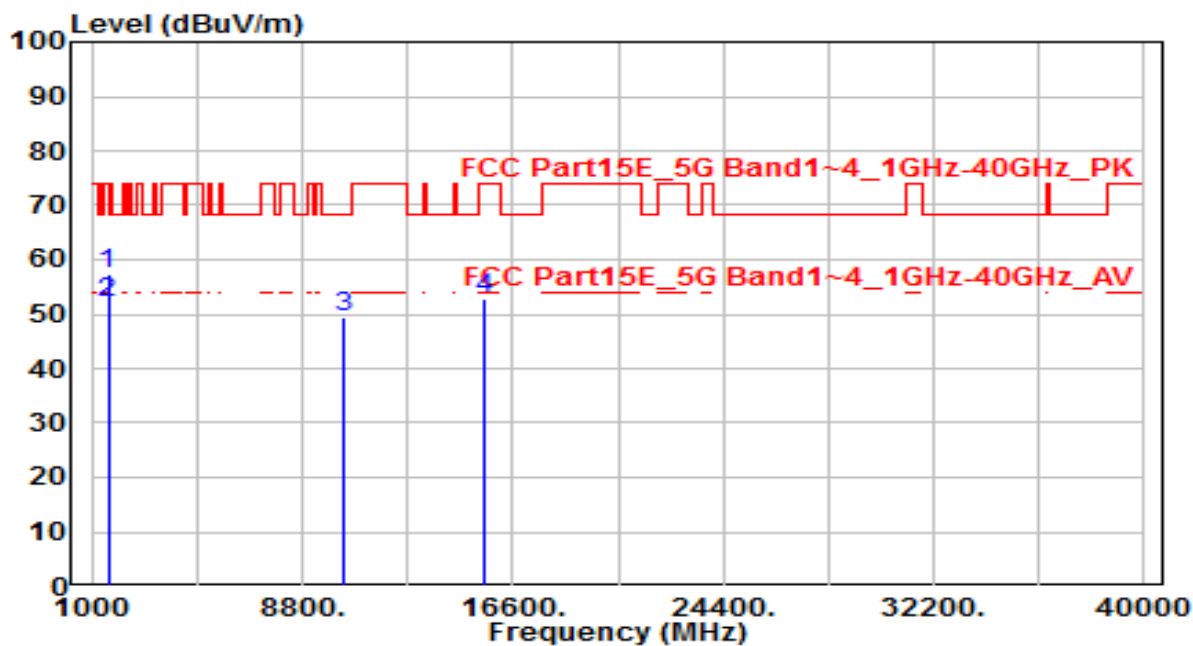


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.930	62.85	-5.49	57.36	-16.64	74.00	185	200	Peak
2	*	1599.930	57.68	-5.49	52.19	-1.81	54.00	185	200	Average
3		10360.000	33.19	16.42	49.61	-18.59	68.20	150	400	Peak
4		15540.000	31.75	20.91	52.67	-21.33	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

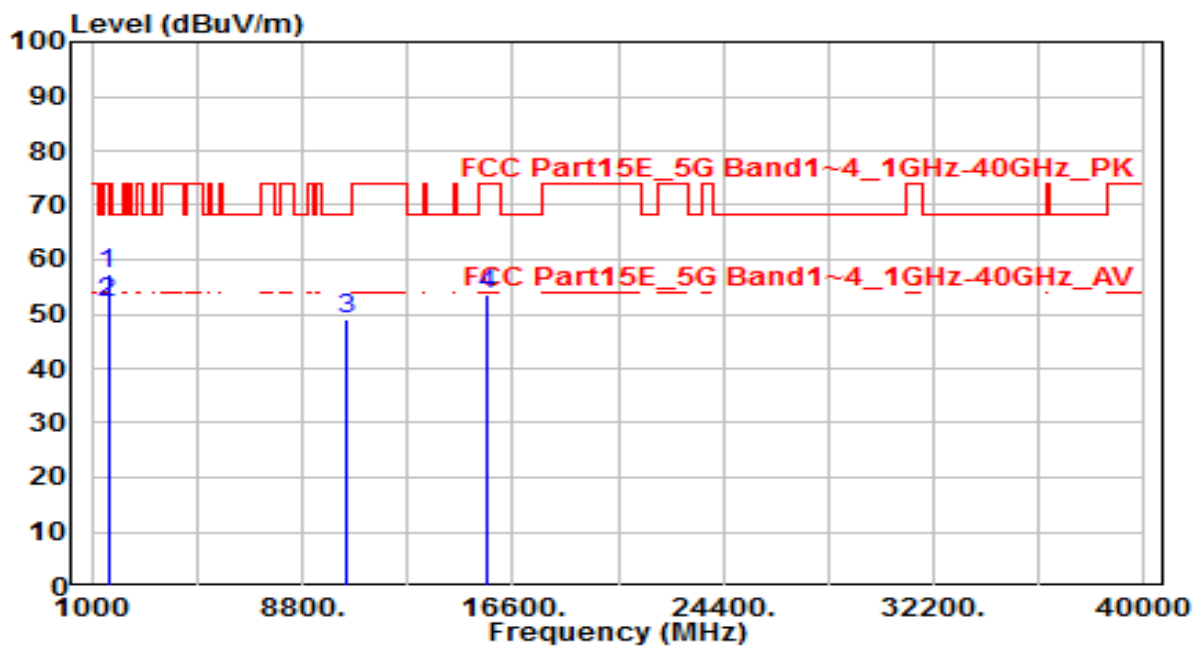


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.890	62.66	-5.49	57.17	-16.83	74.00	100	250	Peak
2	*	1599.890	57.62	-5.49	52.13	-1.87	54.00	100	250	Average
3		10440.000	32.56	16.68	49.23	-18.97	68.20	150	400	Peak
4		15660.000	32.96	20.81	53.77	-20.23	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

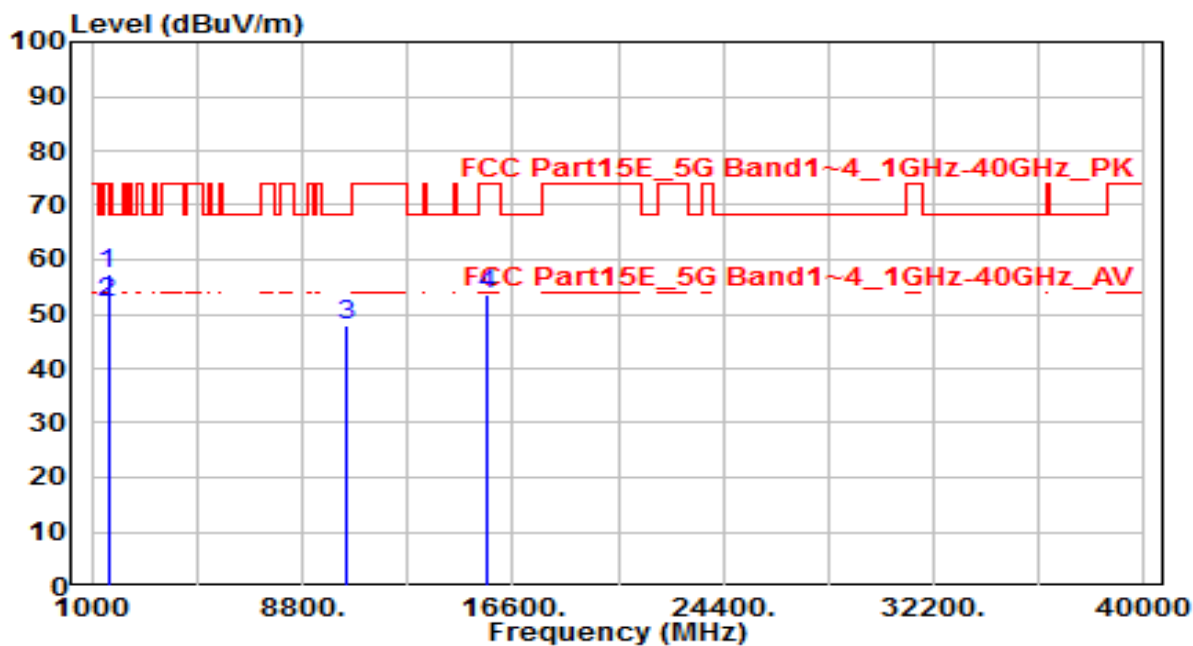


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.010	62.85	-5.49	57.36	-16.64	74.00	185	200	Peak
2	*	1600.010	57.72	-5.49	52.23	-1.77	54.00	185	200	Average
3		10440.000	31.34	16.68	48.01	-20.19	68.20	150	400	Peak
4		15660.000	32.90	20.81	53.71	-20.29	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

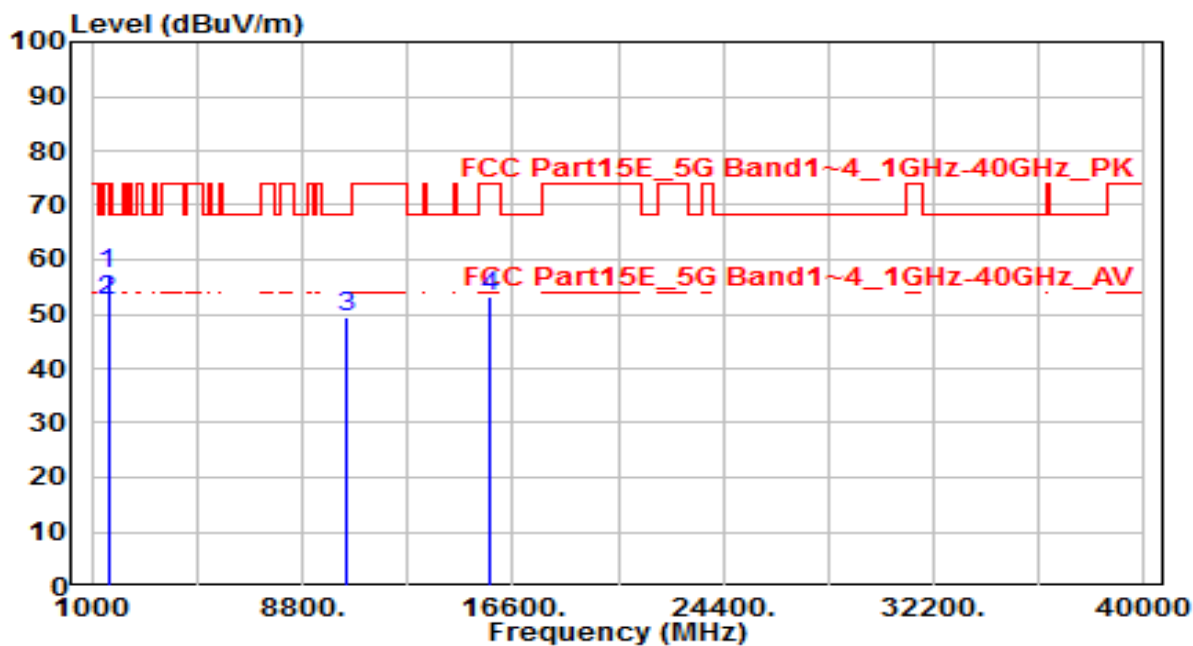


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.230	62.66	-5.49	57.17	-16.83	74.00	100	250	Peak
2	*	1600.230	57.86	-5.49	52.37	-1.63	54.00	100	250	Average
3		10480.000	32.48	16.81	49.28	-18.92	68.20	150	400	Peak
4		15720.000	32.36	20.76	53.11	-20.89	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

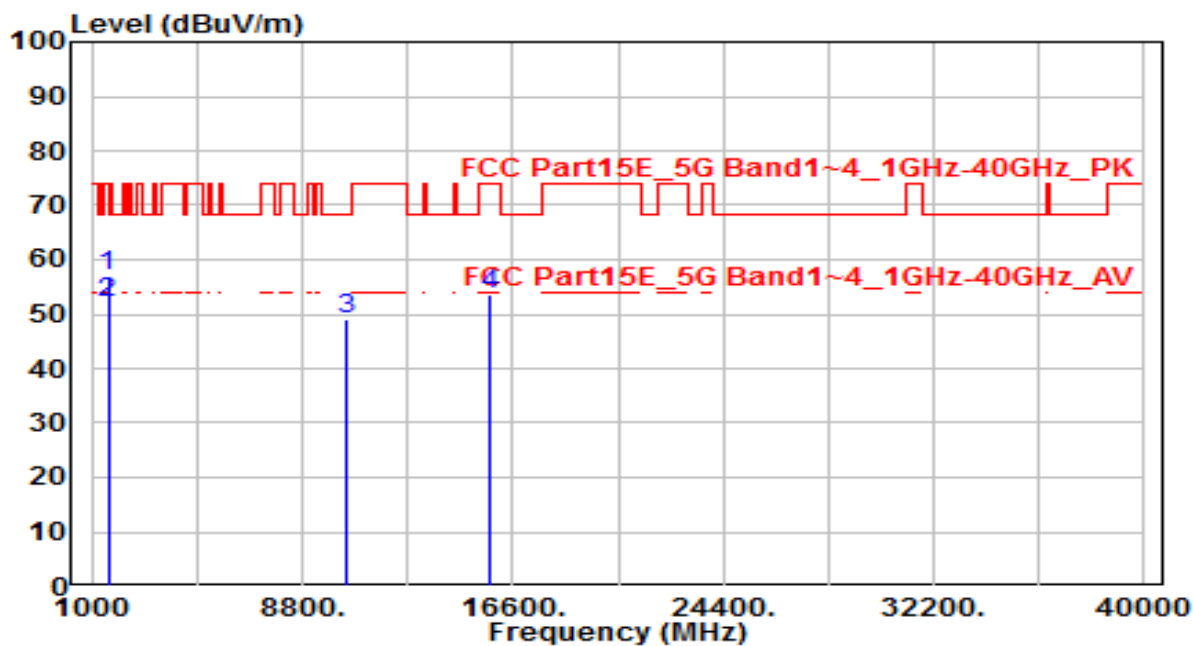


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.110	62.56	-5.49	57.07	-16.93	74.00	185	200	Peak
2	*	1600.110	57.62	-5.49	52.13	-1.87	54.00	185	200	Average
3		10480.000	32.29	16.81	49.10	-19.10	68.20	150	400	Peak
4		15720.000	32.93	20.76	53.69	-20.31	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

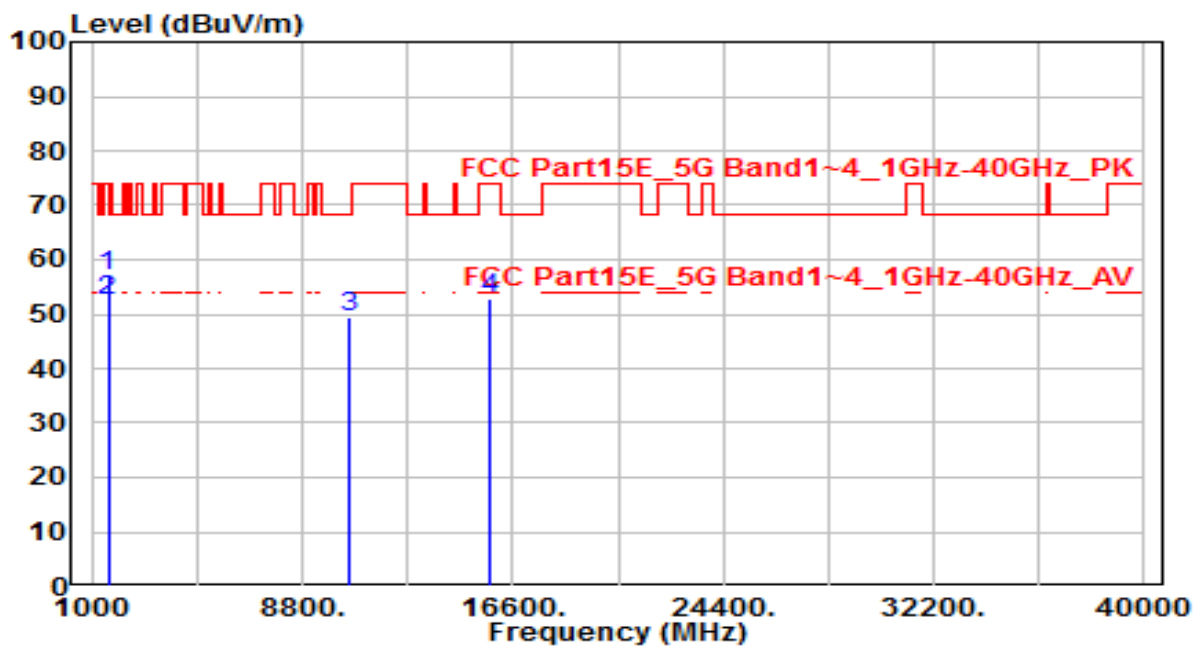


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.320	62.65	-5.49	57.16	-16.84	74.00	100	250	Peak
2	*	1599.320	57.88	-5.49	52.39	-1.61	54.00	100	250	Average
3		10520.000	32.47	16.90	49.36	-18.84	68.20	150	400	Peak
4		15780.000	32.20	20.70	52.90	-21.10	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

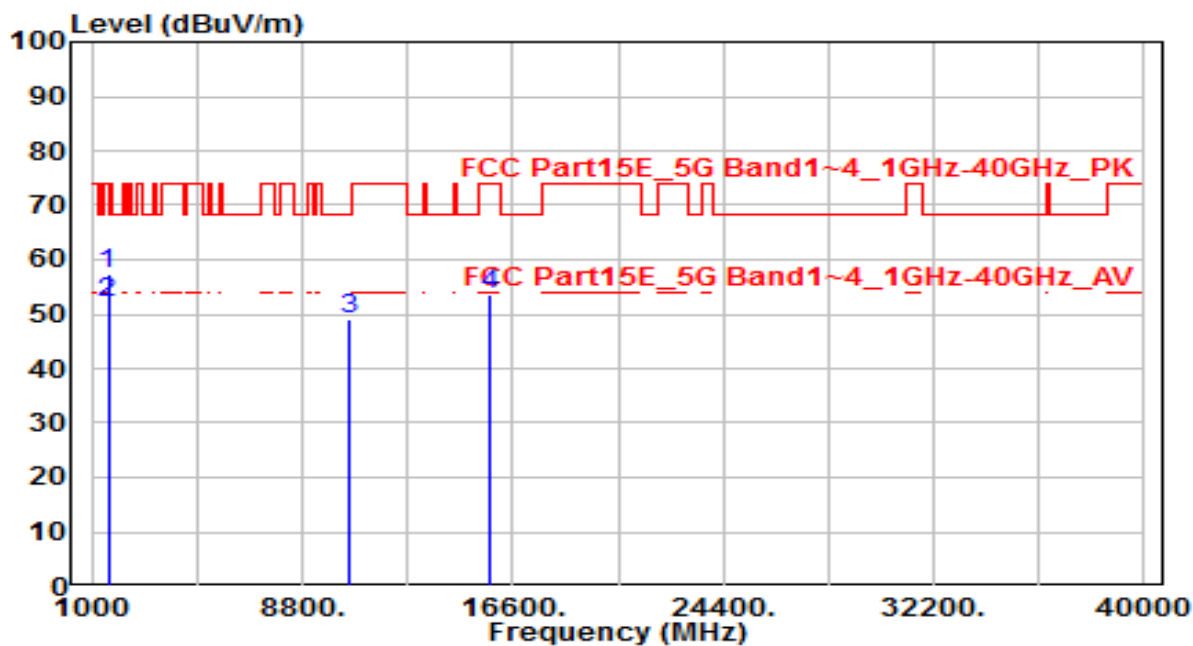


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.850	62.68	-5.49	57.19	-16.81	74.00	185	200	Peak
2	*	1599.850	57.56	-5.49	52.07	-1.93	54.00	185	200	Average
3		10520.000	32.34	16.90	49.23	-18.97	68.20	150	400	Peak
4		15780.000	32.90	20.70	53.60	-20.40	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

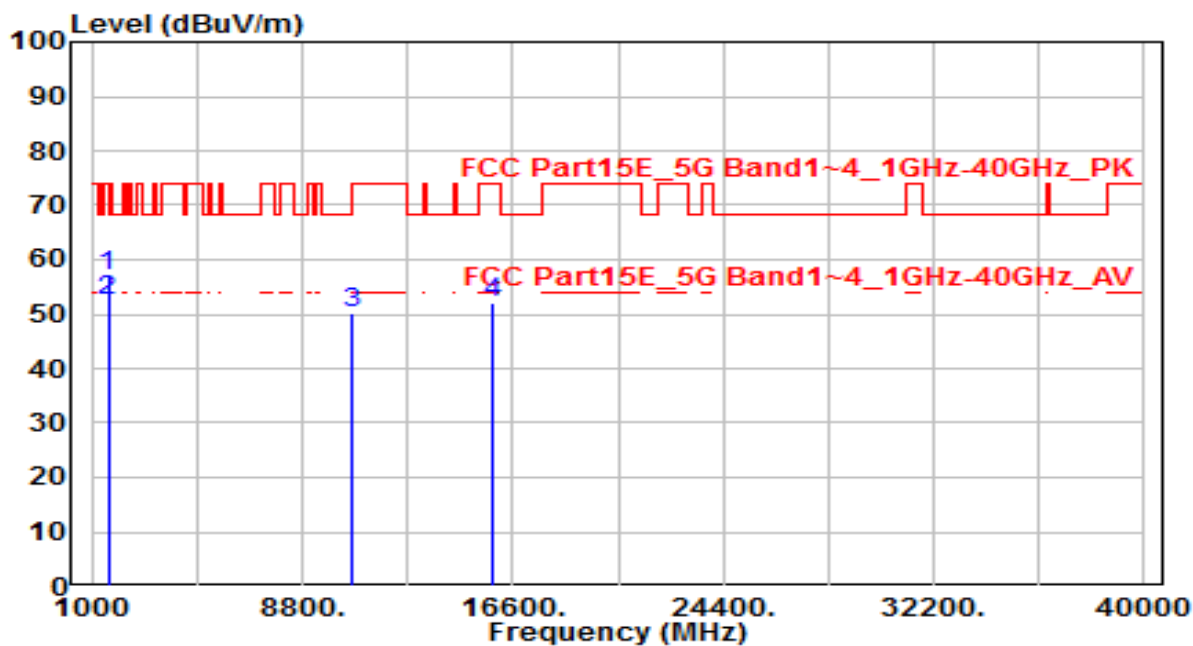


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.260	62.65	-5.49	57.16	-16.84	74.00	100	250	Peak
2	*	1600.260	57.95	-5.49	52.46	-1.54	54.00	100	250	Average
3		10600.000	33.27	17.01	50.28	-17.92	68.20	150	400	Peak
4		15900.000	31.53	20.60	52.13	-21.87	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

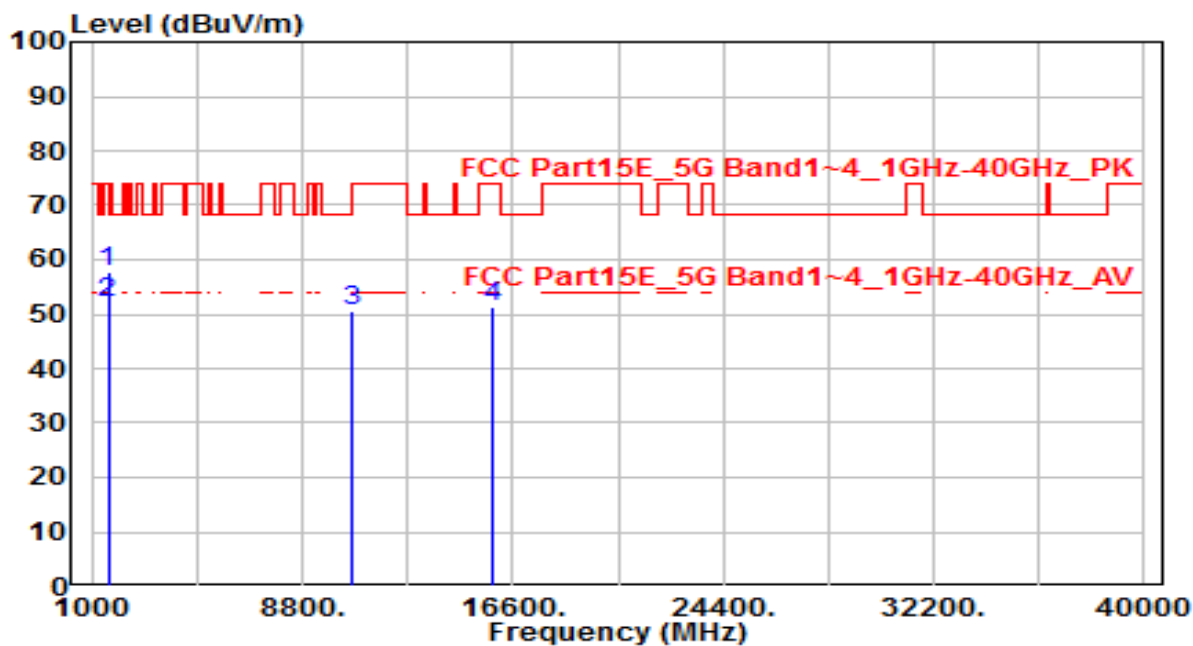


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.050	63.26	-5.49	57.77	-16.23	74.00	185	200	Peak
2	*	1600.050	57.65	-5.49	52.16	-1.84	54.00	185	200	Average
3		10600.000	33.55	17.01	50.56	-17.64	68.20	150	400	Peak
4		15900.000	30.69	20.60	51.29	-22.71	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

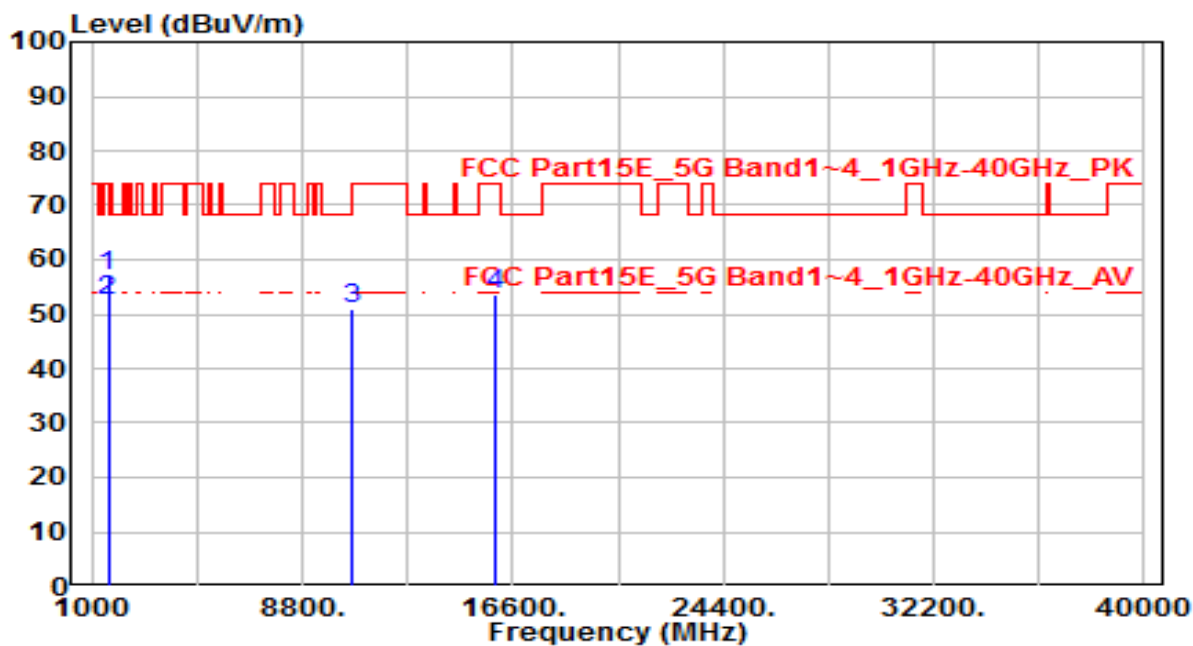


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.265	62.56	-5.49	57.07	-16.93	74.00	100	250	Peak
2	*	1600.265	57.78	-5.49	52.29	-1.71	54.00	100	250	Average
3		10640.000	33.72	17.07	50.79	-23.21	74.00	150	400	Peak
4		15960.000	33.11	20.55	53.66	-20.34	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

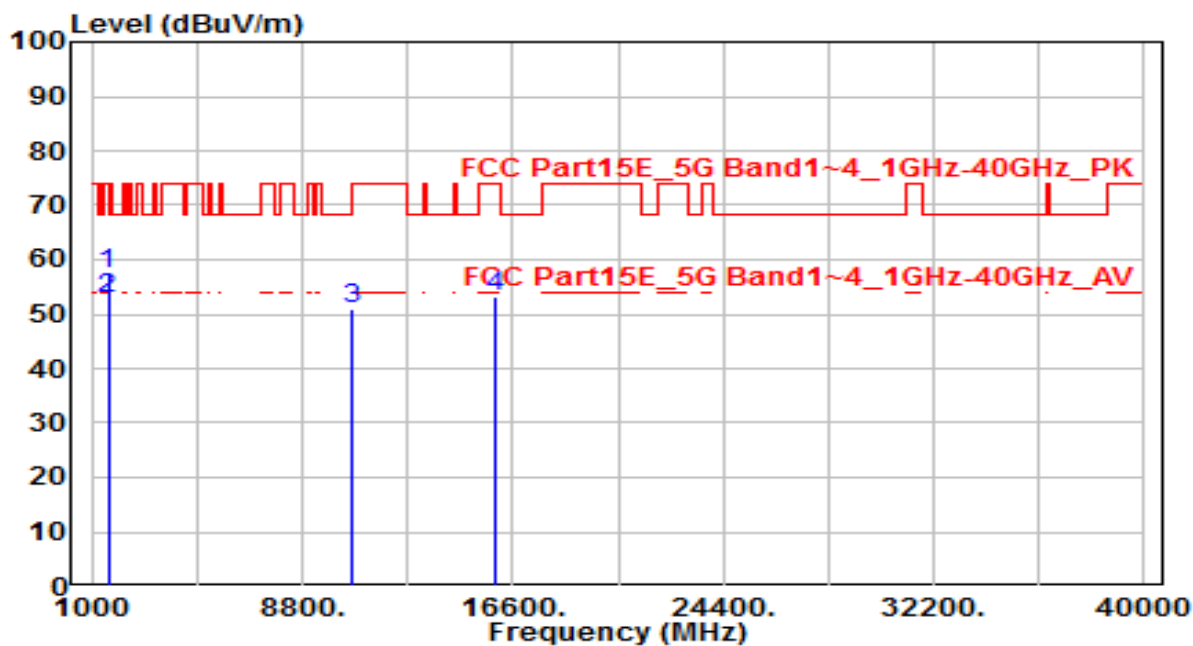


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.115	62.68	-5.49	57.19	-16.81	74.00	185	200	Peak
2	*	1600.115	58.26	-5.49	52.77	-1.23	54.00	185	200	Average
3		10640.000	33.80	17.07	50.87	-23.13	74.00	150	400	Peak
4		15960.000	32.62	20.55	53.17	-20.83	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

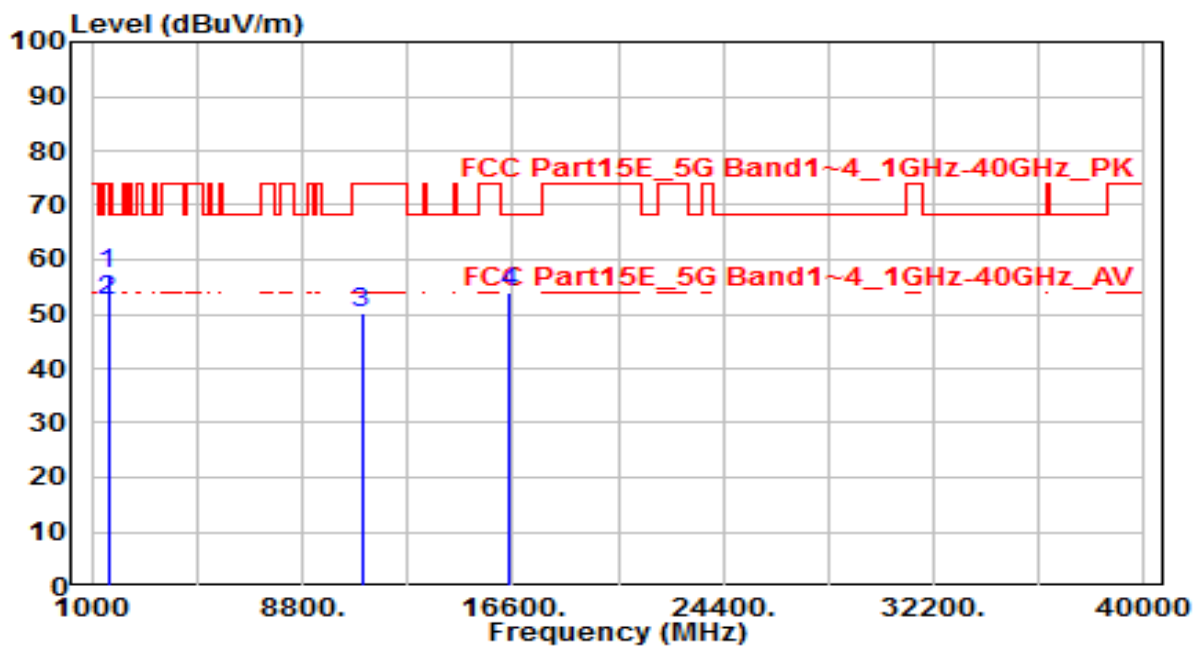


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.260	62.66	-5.49	57.17	-16.83	74.00	100	250	Peak
2	*	1600.260	57.84	-5.49	52.35	-1.65	54.00	100	250	Average
3		11000.000	32.73	17.58	50.31	-23.69	74.00	150	400	Peak
4		16500.000	31.96	21.96	53.92	-14.28	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

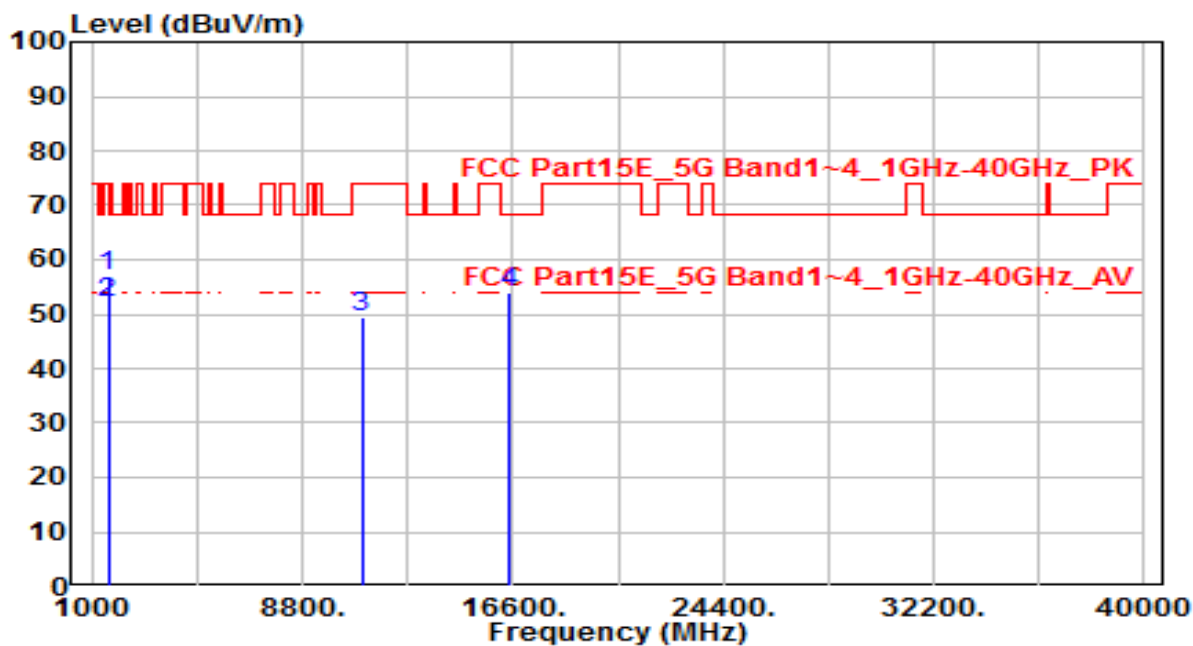


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.215	62.65	-5.49	57.16	-16.84	74.00	185	200	Peak
2	*	1600.215	57.75	-5.49	52.26	-1.74	54.00	185	200	Average
3		11000.000	31.85	17.58	49.43	-24.57	74.00	150	400	Peak
4		16500.000	32.10	21.96	54.06	-14.14	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 120_ANT 0+1	Test Voltage	AC 120V/60Hz

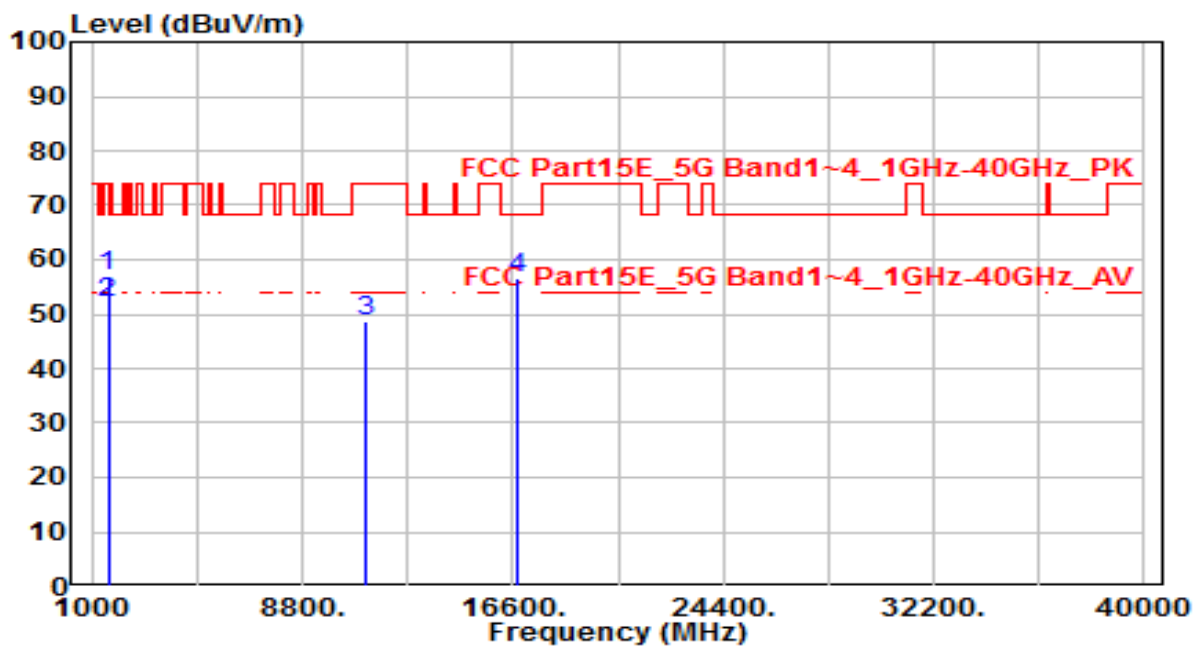


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.000	62.56	-5.49	57.07	-16.93	74.00	100	250	Peak
2	*	1600.000	57.74	-5.49	52.25	-1.75	54.00	100	250	Average
3		11120.000	30.90	17.69	48.59	-25.41	74.00	150	400	Peak
4		16800.000	32.42	24.09	56.51	-11.69	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 120_ANT 0+1	Test Voltage	AC 120V/60Hz

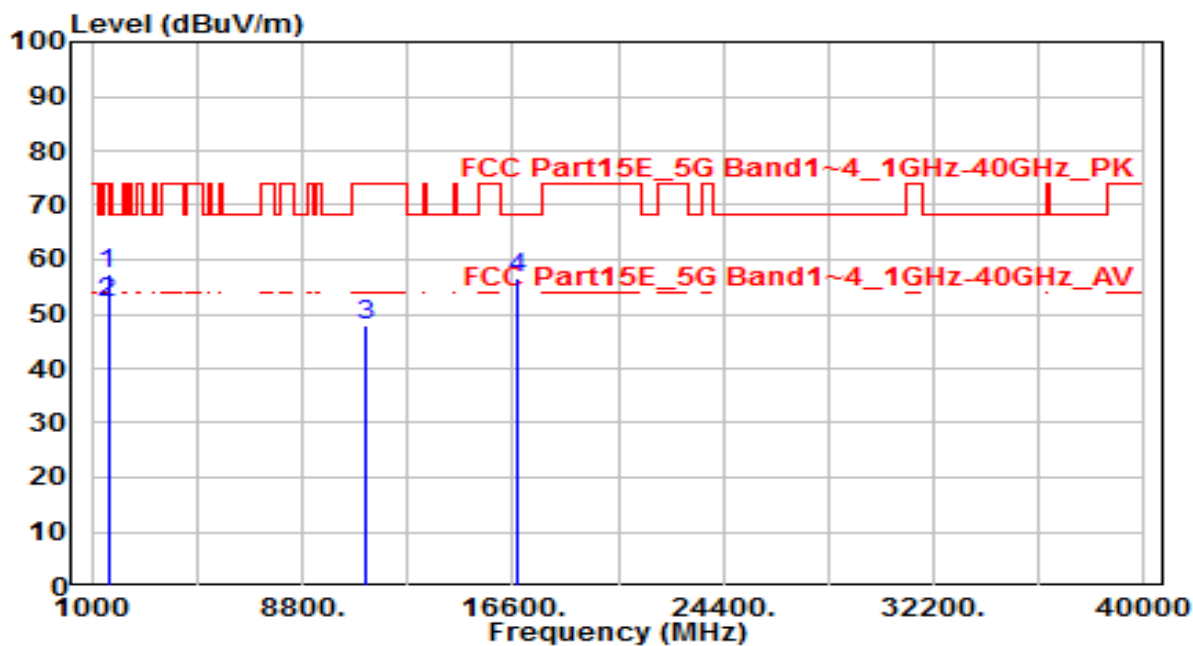


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.115	62.68	-5.49	57.19	-16.81	74.00	185	200	Peak
2	*	1600.115	57.64	-5.49	52.15	-1.85	54.00	185	200	Average
3		11120.000	30.28	17.69	47.98	-26.02	74.00	150	400	Peak
4		16800.000	32.58	24.09	56.67	-11.53	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

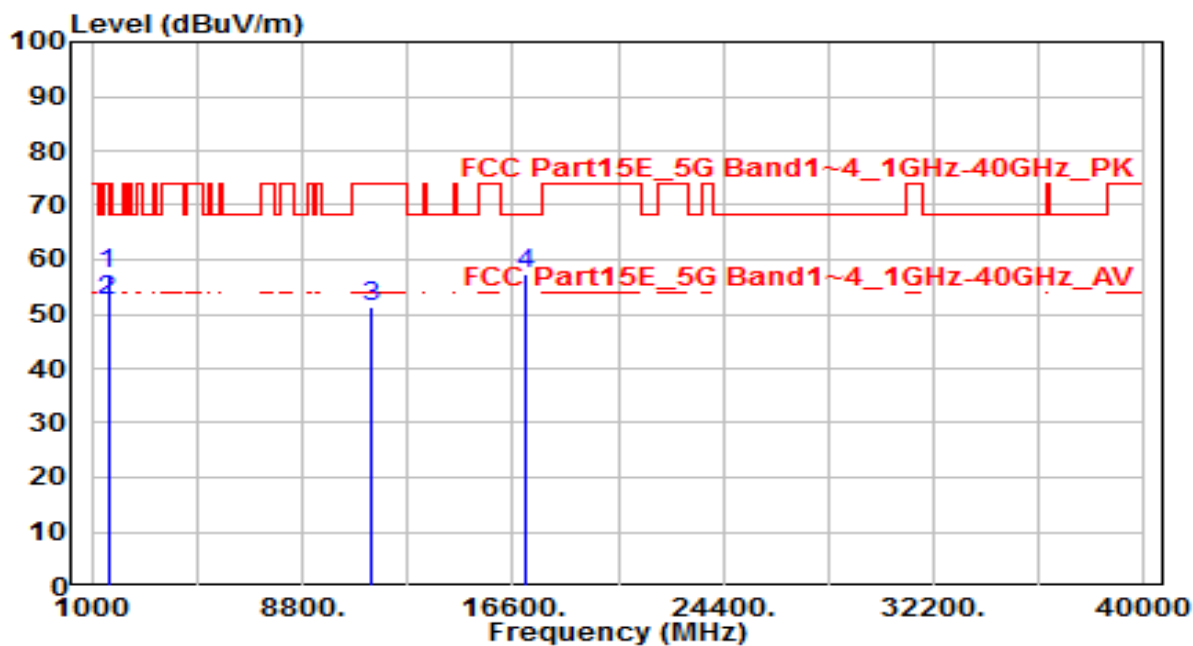


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.118	62.68	-5.49	57.19	-16.81	74.00	100	250	Peak
2	*	1600.118	57.88	-5.49	52.39	-1.61	54.00	100	250	Average
3		11400.000	33.32	17.96	51.27	-22.73	74.00	150	400	Peak
4		17100.000	30.97	26.46	57.43	-10.77	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

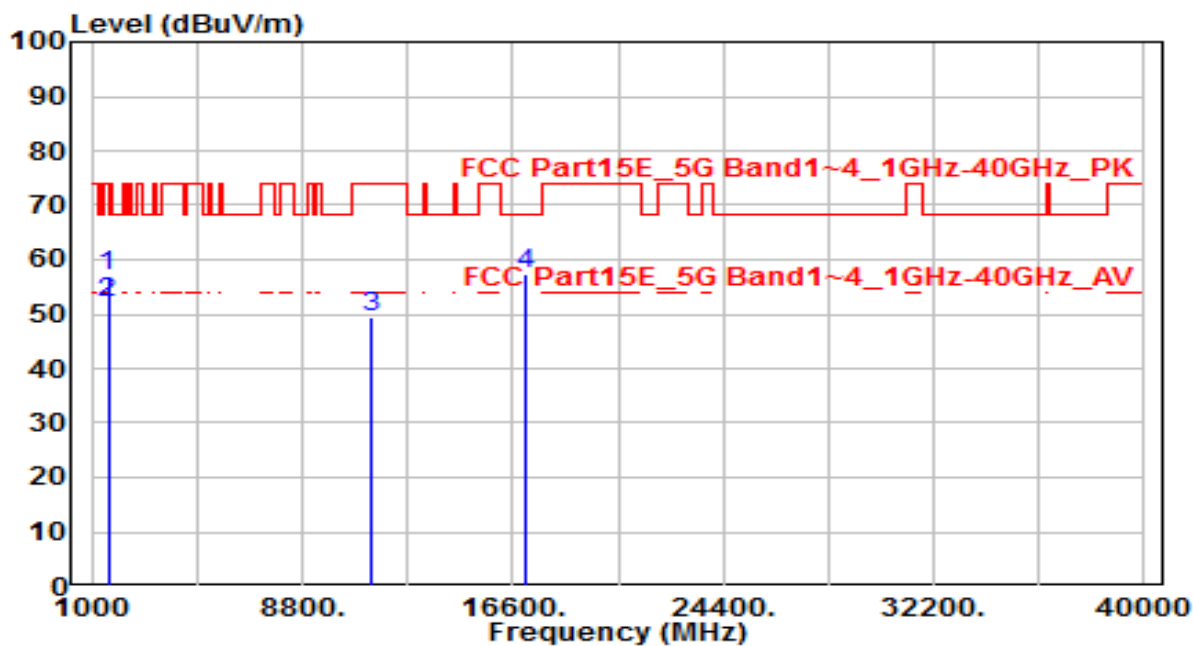


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.221	62.35	-5.49	56.86	-17.14	74.00	185	200	Peak
2	*	1600.221	57.49	-5.49	52.00	-2.00	54.00	185	200	Average
3		11400.000	31.43	17.96	49.38	-24.62	74.00	150	400	Peak
4		17100.000	30.87	26.46	57.32	-10.88	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

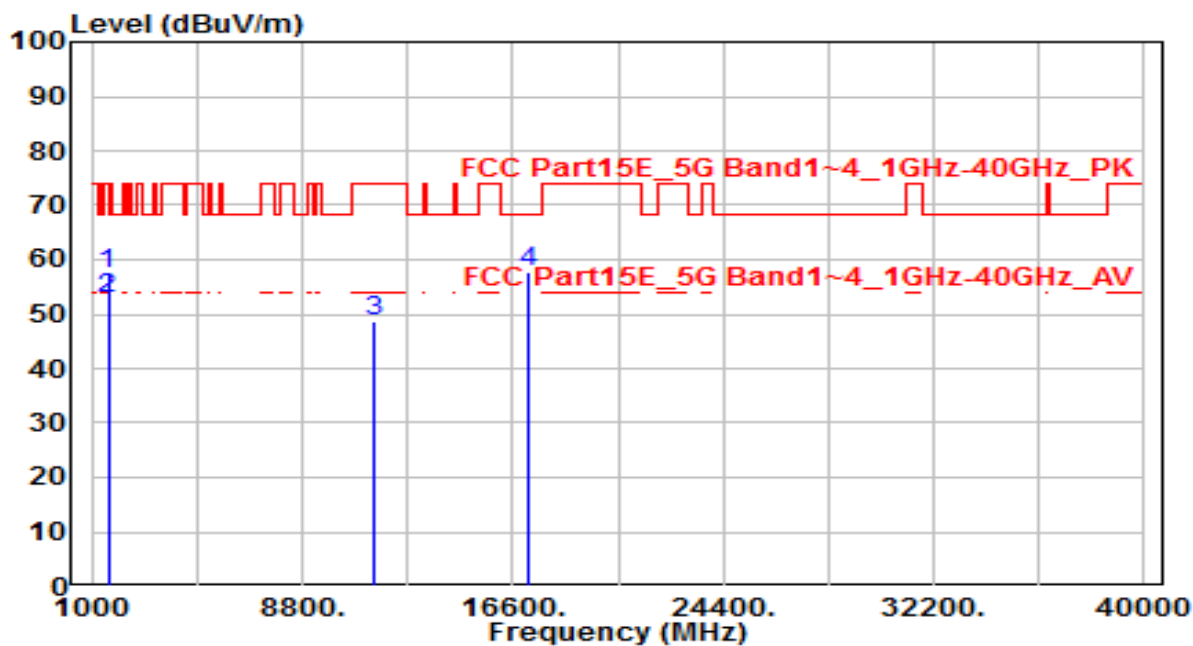


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.253	62.68	-5.49	57.19	-16.81	74.00	100	250	Peak
2	*	1600.253	58.26	-5.49	52.77	-1.23	54.00	100	250	Average
3		11440.000	30.76	17.99	48.75	-25.25	74.00	150	400	Peak
4		17160.000	30.61	27.02	57.64	-10.56	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

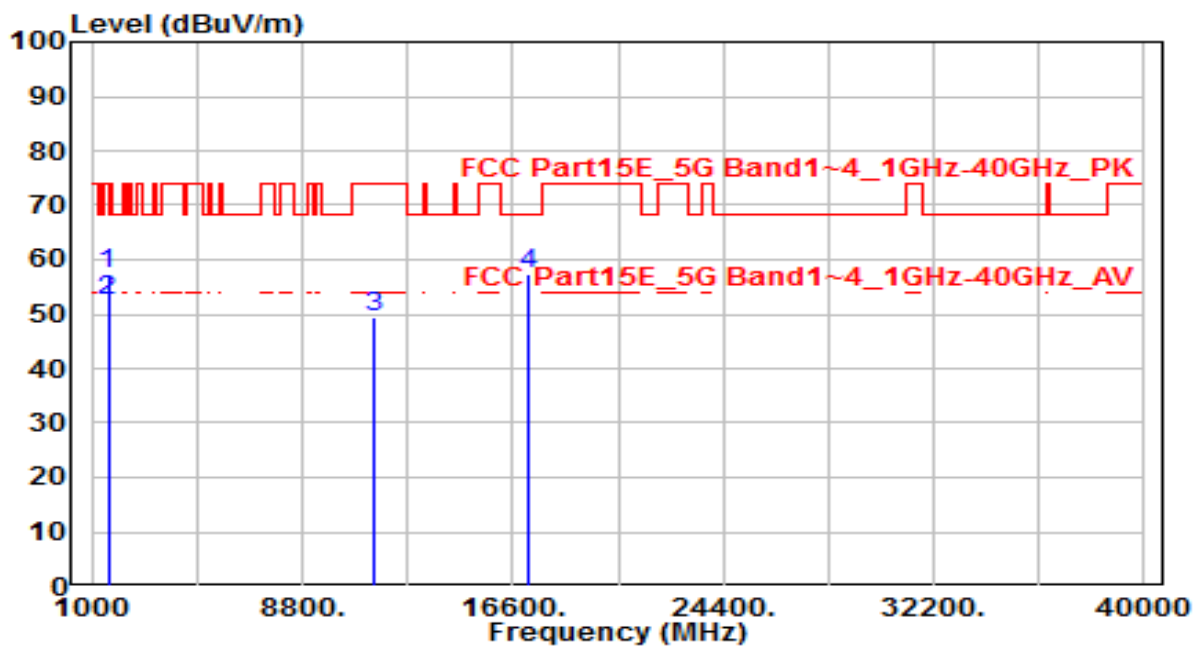


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.620	62.68	-5.49	57.19	-16.81	74.00	185	200	Peak
2	*	1599.620	57.95	-5.49	52.46	-1.54	54.00	185	200	Average
3		11440.000	31.42	17.99	49.41	-24.59	74.00	150	400	Peak
4		17160.000	30.39	27.02	57.41	-10.79	68.20	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

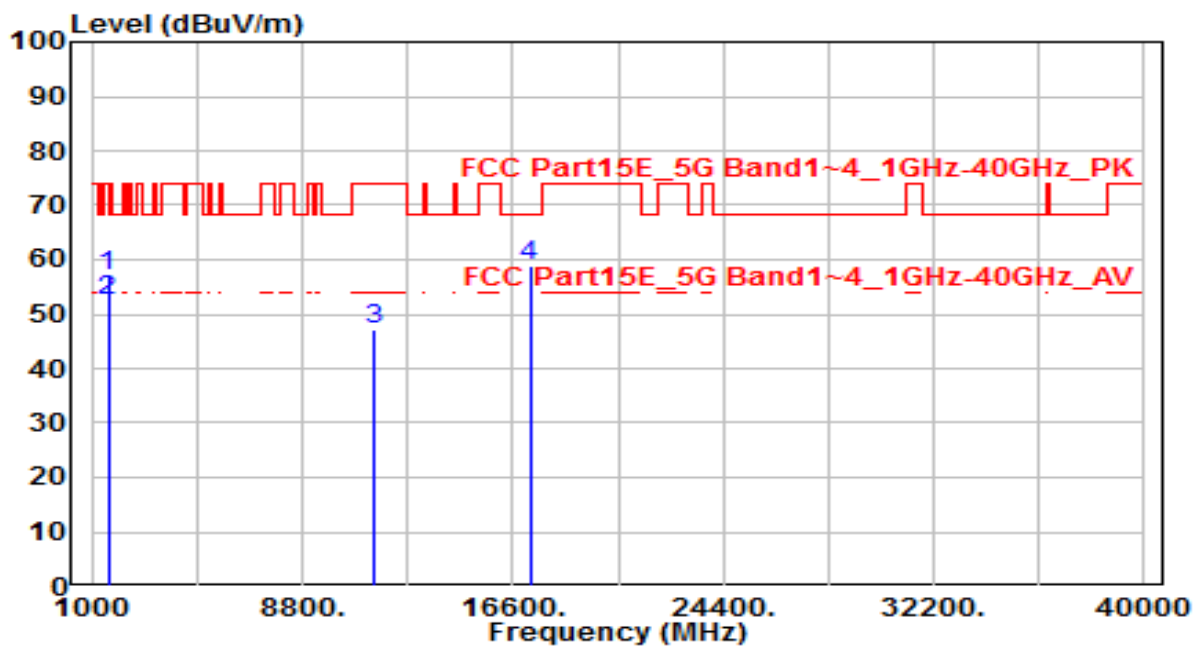


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.115	62.35	-5.49	56.86	-17.14	74.00	100	250	Peak
2	*	1600.115	57.95	-5.49	52.46	-1.54	54.00	100	250	Average
3		11490.000	29.16	18.04	47.20	-26.80	74.00	150	400	Peak
4		17235.000	31.21	27.73	58.94	-9.26	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

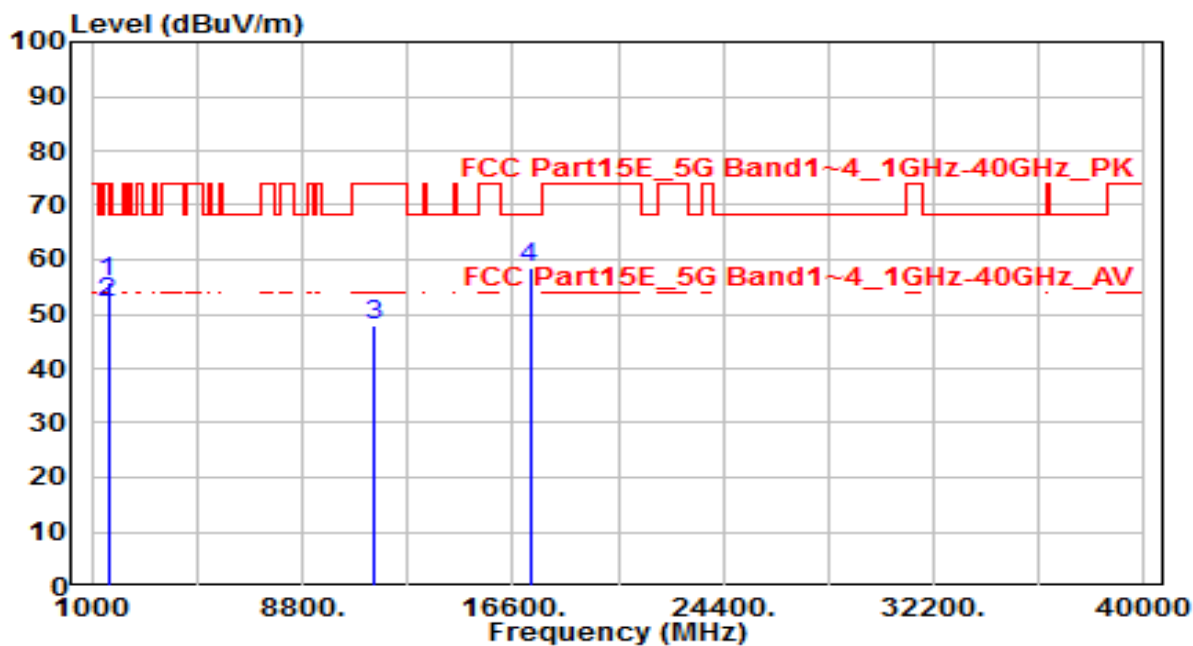


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.662	61.33	-5.49	55.84	-18.16	74.00	185	200	Peak
2	*	1599.662	57.48	-5.49	51.99	-2.01	54.00	185	200	Average
3		11490.000	29.88	18.04	47.92	-26.08	74.00	150	400	Peak
4		17235.000	30.71	27.73	58.45	-9.75	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

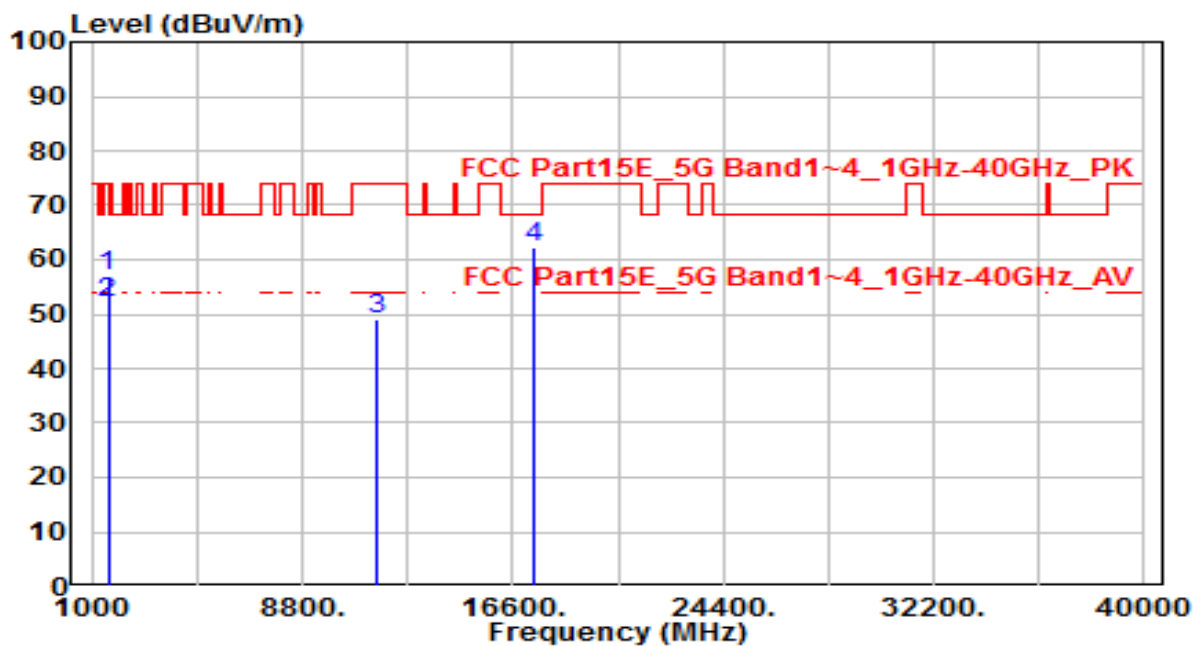


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.118	62.35	-5.49	56.86	-17.14	74.00	100	250	Peak
2	*	1600.118	57.68	-5.49	52.19	-1.81	54.00	100	250	Average
3		11570.000	31.05	18.02	49.07	-24.93	74.00	150	400	Peak
4		17355.000	33.41	28.87	62.28	-5.92	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

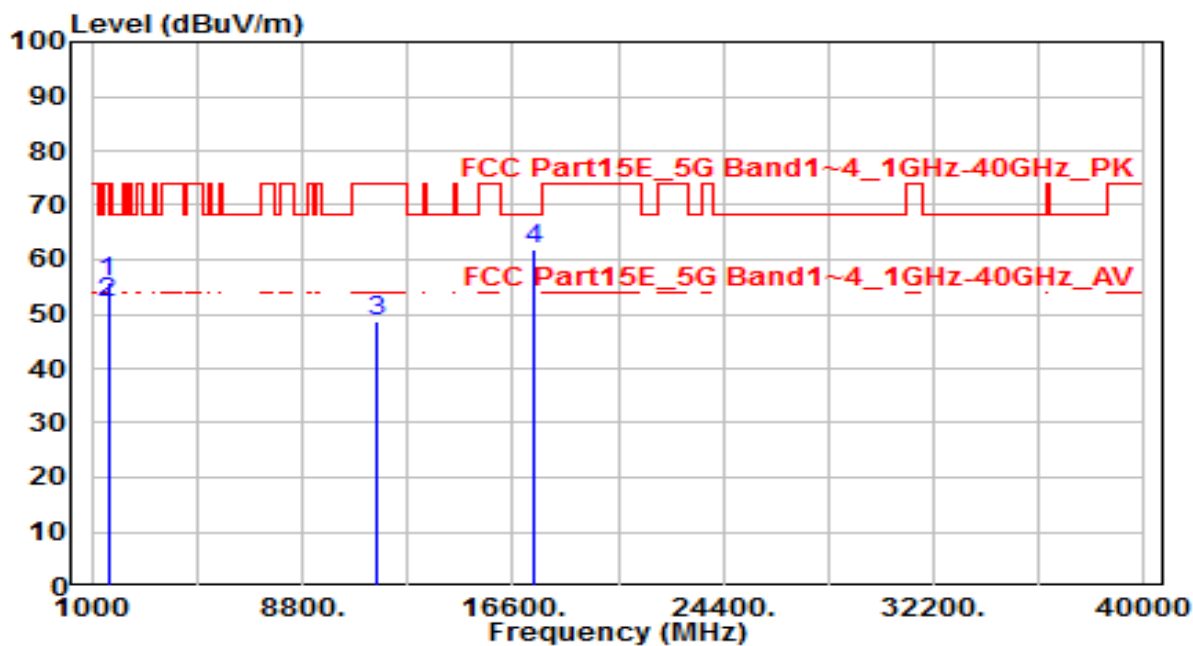


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.215	61.35	-5.49	55.86	-18.14	74.00	185	200	Peak
2	*	1600.215	57.48	-5.49	51.99	-2.01	54.00	185	200	Average
3		11570.000	30.65	18.02	48.67	-25.33	74.00	150	400	Peak
4		17355.000	32.97	28.87	61.83	-6.37	68.20	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

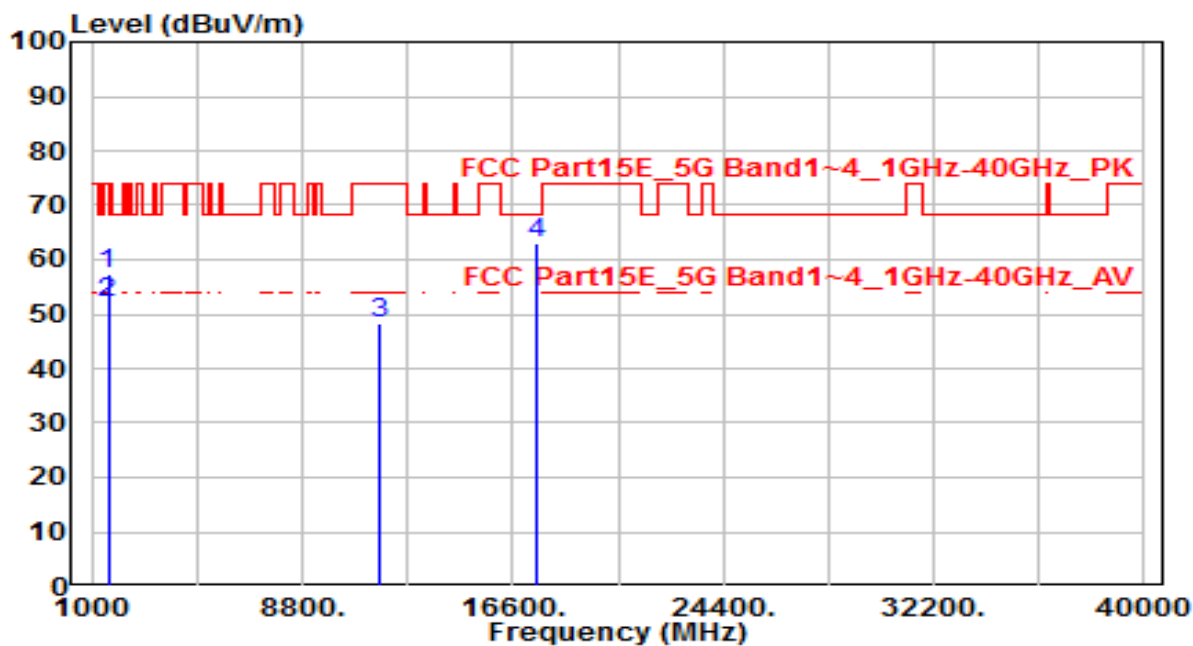


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.225	62.68	-5.49	57.19	-16.81	74.00	100	250	Peak
2	*	1600.225	57.51	-5.49	52.02	-1.98	54.00	100	250	Average
3		11650.000	30.33	17.98	48.31	-25.69	74.00	150	400	Peak
4		17475.000	33.04	30.00	63.04	-5.16	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

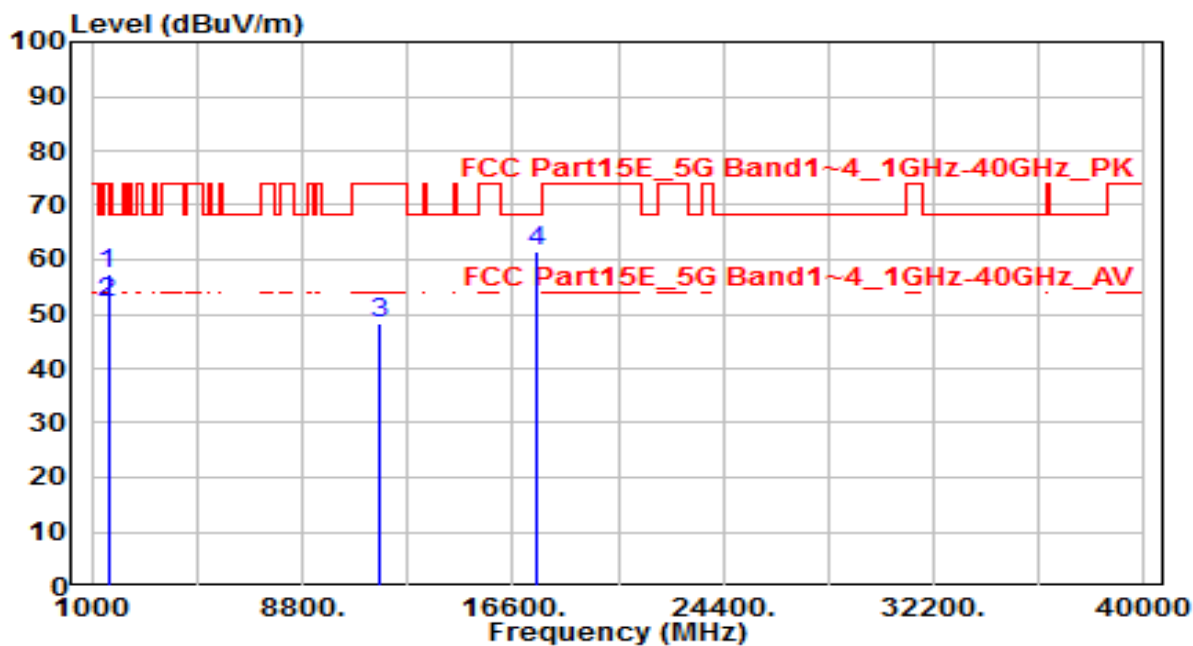


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.995	62.85	-5.49	57.36	-16.64	74.00	185	200	Peak
2	*	1599.995	57.65	-5.49	52.16	-1.84	54.00	185	200	Average
3		11650.000	30.28	17.98	48.26	-25.74	74.00	150	400	Peak
4		17475.000	31.52	30.00	61.52	-6.68	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

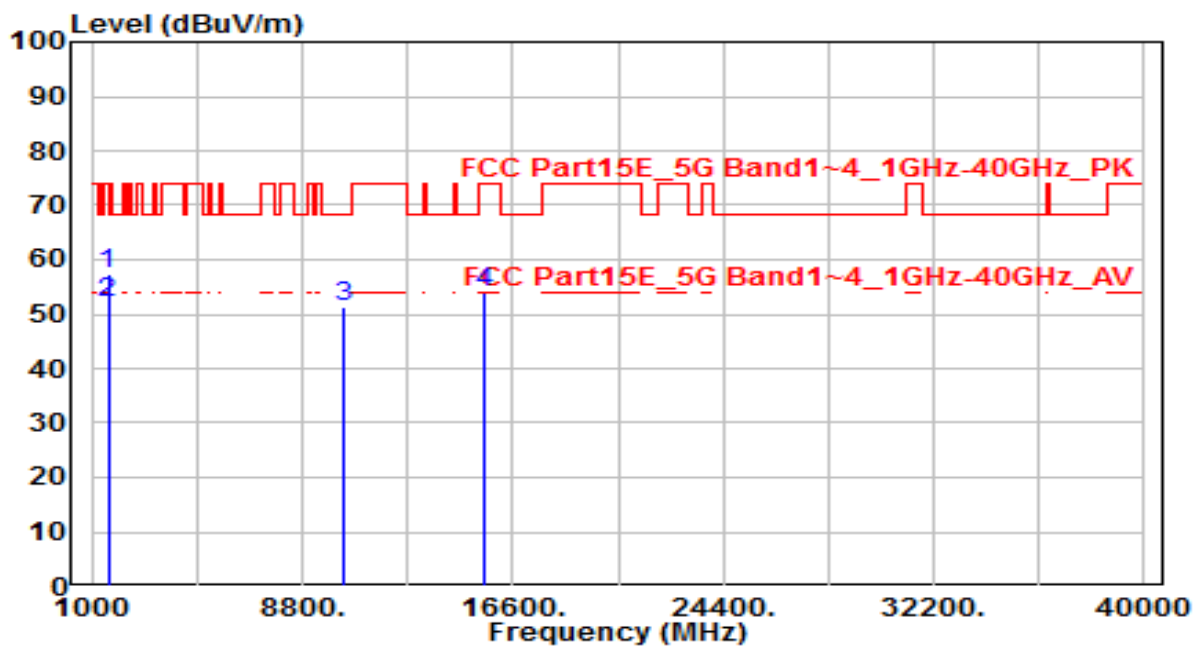


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.665	62.85	-5.47	57.38	-16.62	74.00	100	250	Peak
2	*	1599.665	57.68	-5.47	52.21	-1.79	54.00	100	250	Average
3		10380.000	34.72	16.66	51.38	-16.82	68.20	150	400	Peak
4		15570.000	32.51	21.33	53.84	-20.16	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

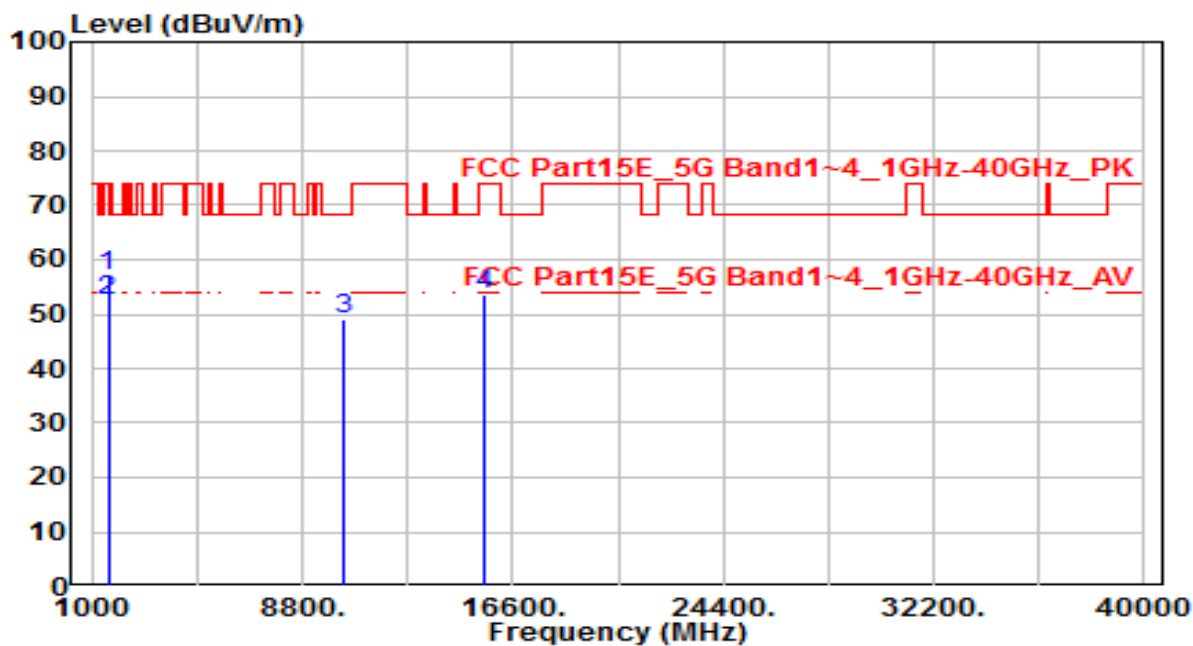


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.856	62.59	-5.47	57.12	-16.88	74.00	185	200	Peak
2	*	1599.856	57.76	-5.47	52.29	-1.71	54.00	185	200	Average
3		10380.000	32.32	16.66	48.98	-19.22	68.20	150	400	Peak
4		15570.000	32.35	21.33	53.69	-20.31	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

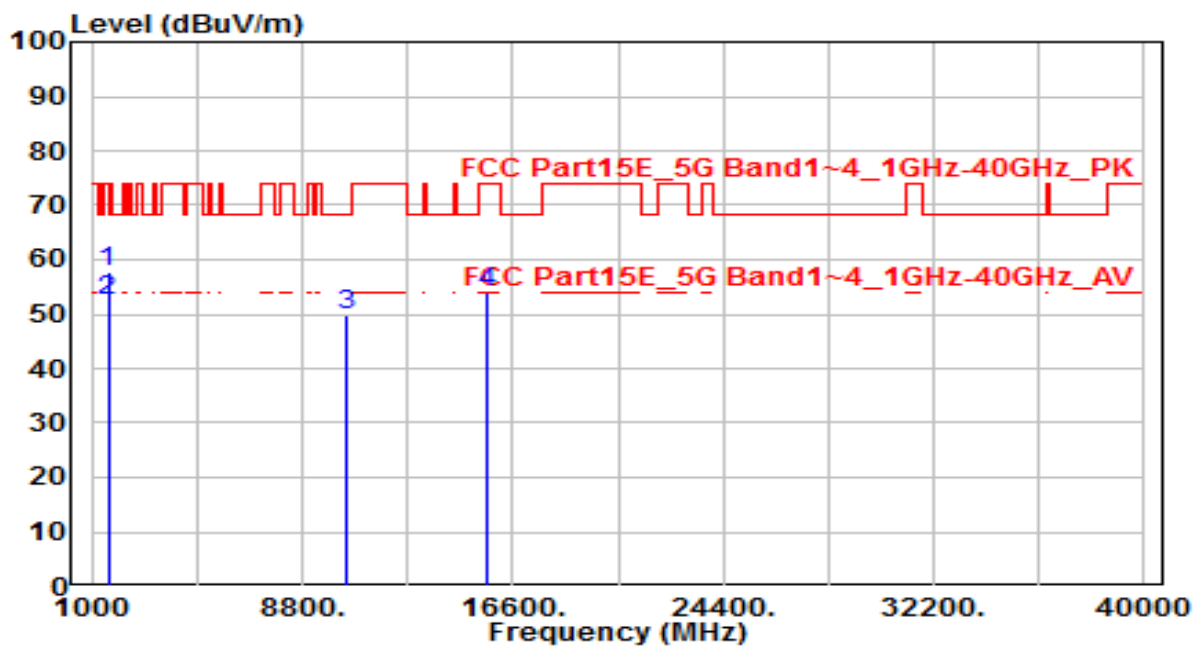


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.260	63.26	-5.47	57.79	-16.21	74.00	100	250	Peak
2	*	1600.260	57.95	-5.47	52.48	-1.52	54.00	100	250	Average
3		10460.000	32.89	16.93	49.82	-18.38	68.20	150	400	Peak
4		15690.000	32.73	21.13	53.86	-20.14	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

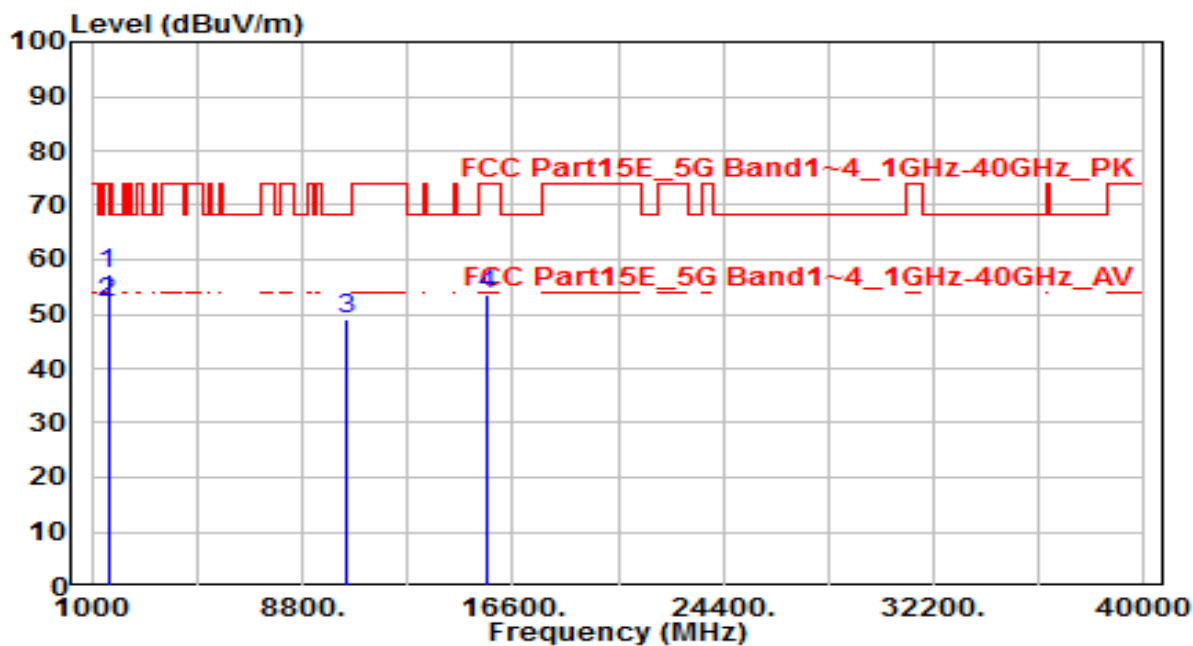


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.954	62.66	-5.47	57.19	-16.81	74.00	185	200	Peak
2	*	1599.954	57.55	-5.47	52.08	-1.92	54.00	185	200	Average
3		10460.000	32.22	16.93	49.15	-19.05	68.20	150	400	Peak
4		15690.000	32.47	21.13	53.60	-20.40	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

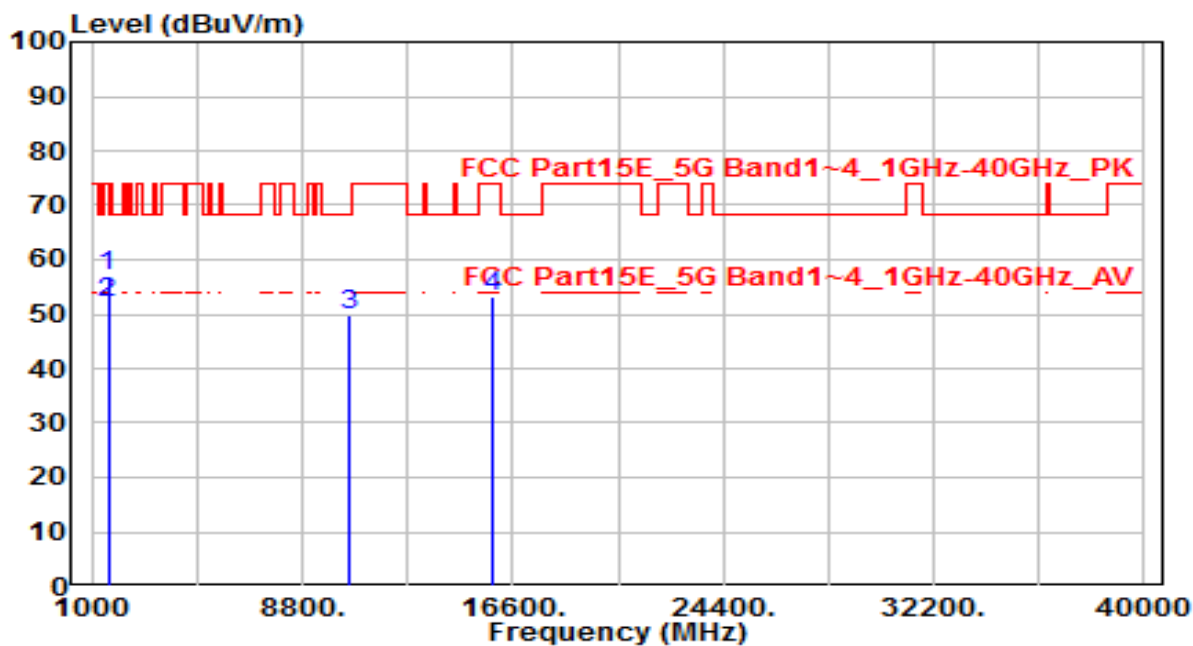


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 1599.925	62.35	-5.47	56.88	-17.12	74.00	100	250	Peak
2	* 1599.925	57.62	-5.47	52.15	-1.85	54.00	100	250	Average
3	10540.000	32.56	17.13	49.68	-18.52	68.20	150	400	Peak
4	15810.000	32.24	20.93	53.17	-20.83	74.00	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

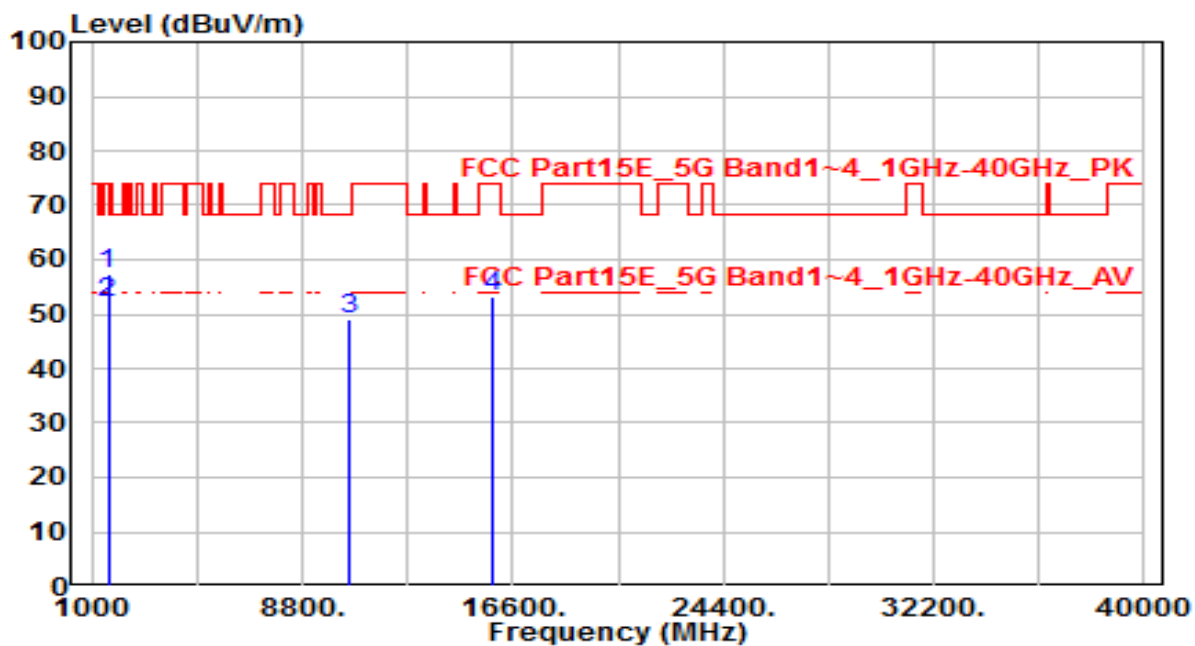


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.228	62.87	-5.47	57.40	-16.60	74.00	185	200	Peak
2	*	1600.228	57.65	-5.47	52.18	-1.82	54.00	185	200	Average
3		10540.000	32.07	17.13	49.19	-19.01	68.20	150	400	Peak
4		15810.000	32.15	20.93	53.08	-20.92	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

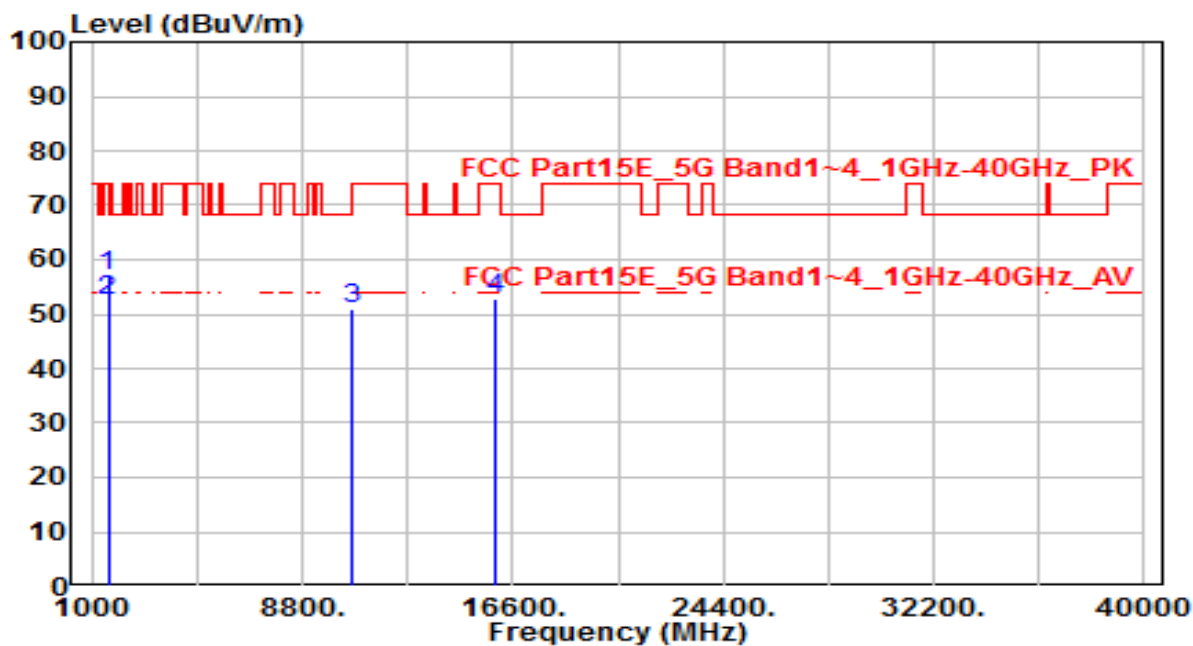


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.235	62.35	-5.47	56.88	-17.12	74.00	100	250	Peak
2	*	1600.235	57.76	-5.47	52.29	-1.71	54.00	100	250	Average
3		10620.000	33.79	17.24	51.03	-22.97	74.00	150	400	Peak
4		15930.000	32.13	20.73	52.86	-21.14	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

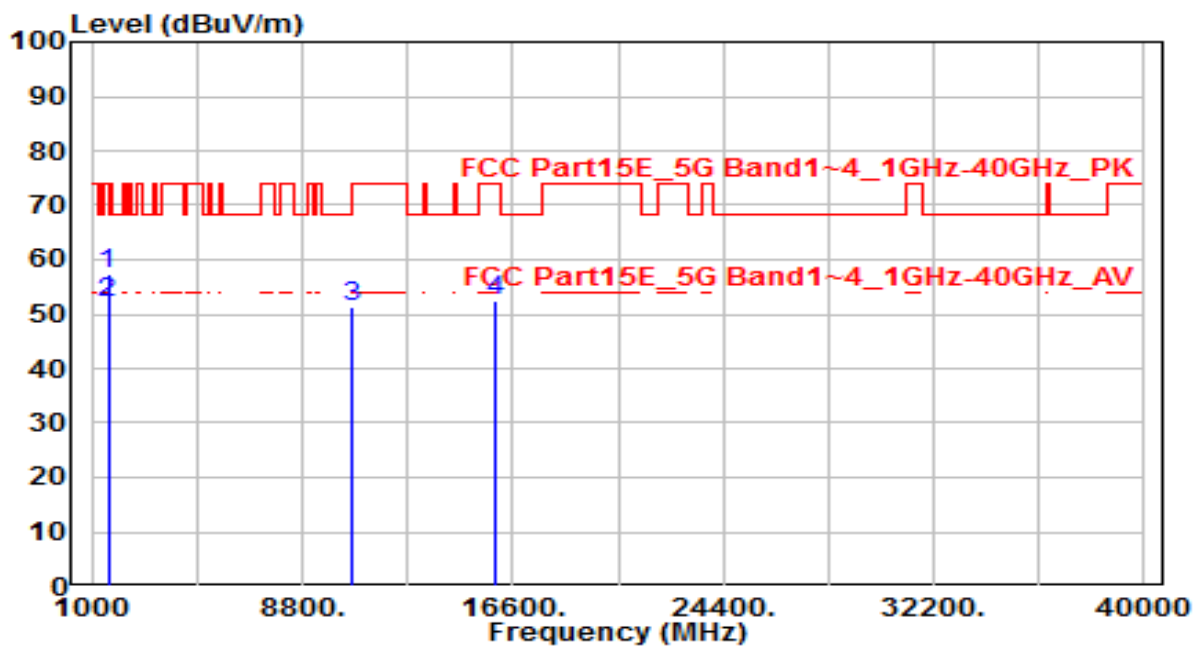


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.865	62.65	-5.47	57.18	-16.82	74.00	185	200	Peak
2	*	1599.865	57.65	-5.47	52.18	-1.82	54.00	185	200	Average
3		10620.000	33.98	17.24	51.22	-22.78	74.00	150	400	Peak
4		15930.000	31.68	20.73	52.41	-21.59	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

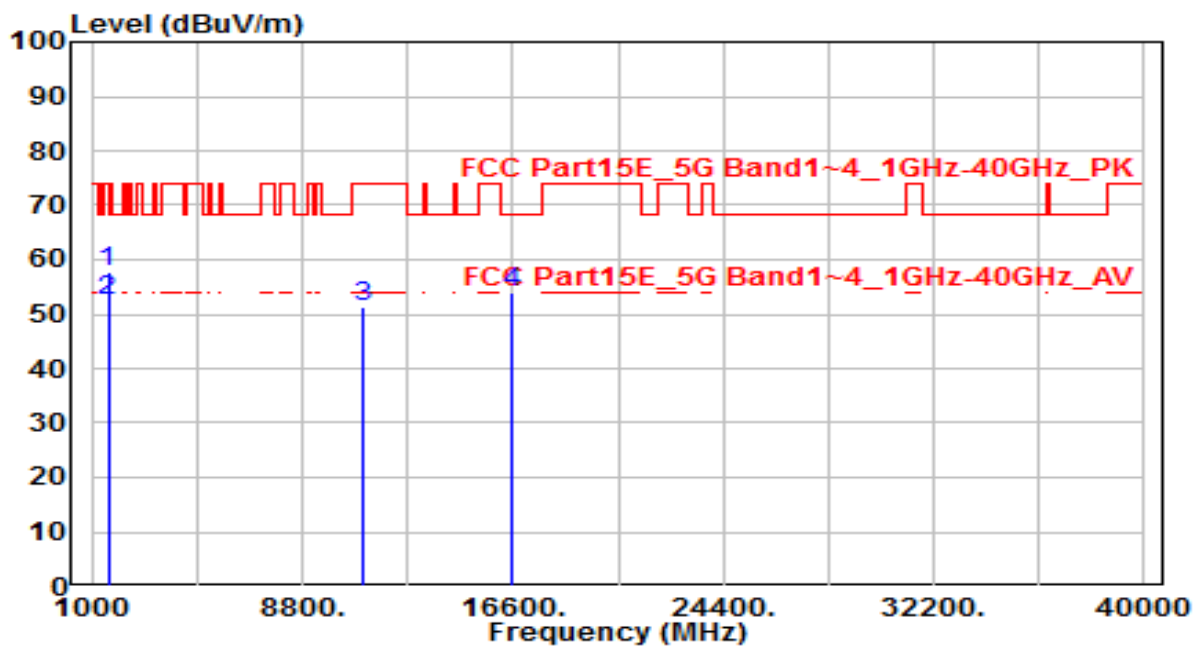


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.956	63.06	-5.47	57.59	-16.41	74.00	100	250	Peak
2	*	1599.956	57.86	-5.47	52.39	-1.61	54.00	100	250	Average
3		11020.000	33.37	17.81	51.18	-22.82	74.00	150	400	Peak
4		16530.000	31.68	22.18	53.86	-14.34	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

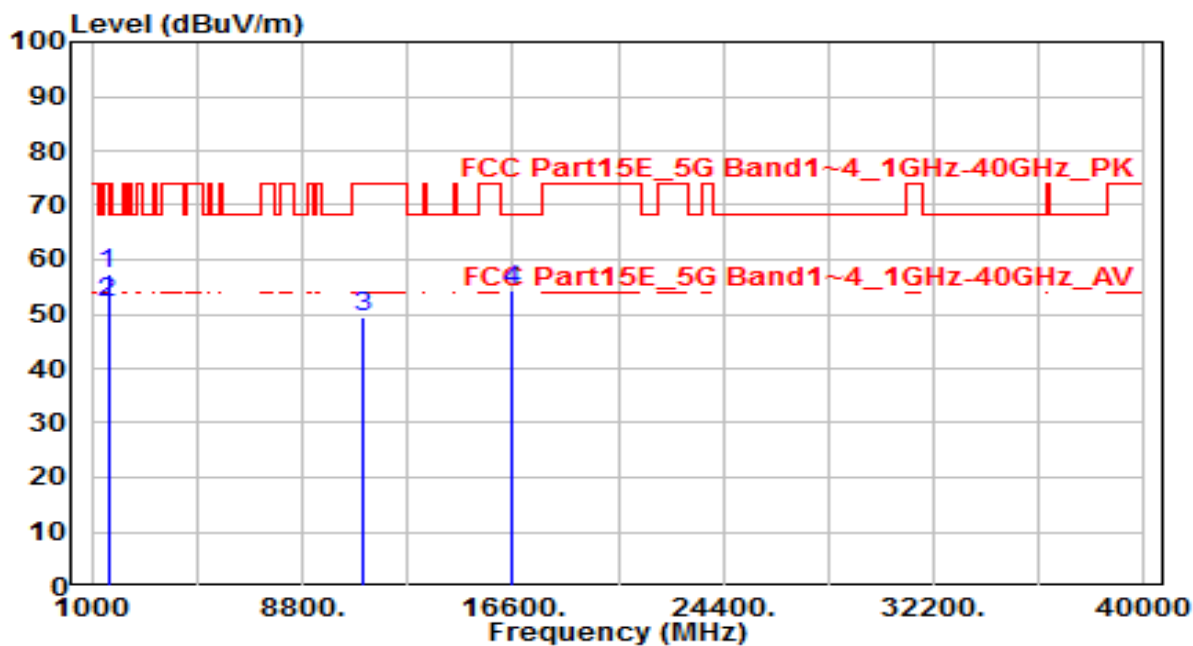


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.980	62.88	-5.47	57.41	-16.59	74.00	185	200	Peak
2	*	1599.980	57.63	-5.47	52.16	-1.84	54.00	185	200	Average
3		11020.000	31.72	17.81	49.53	-24.47	74.00	150	400	Peak
4		16530.000	32.06	22.18	54.24	-13.96	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

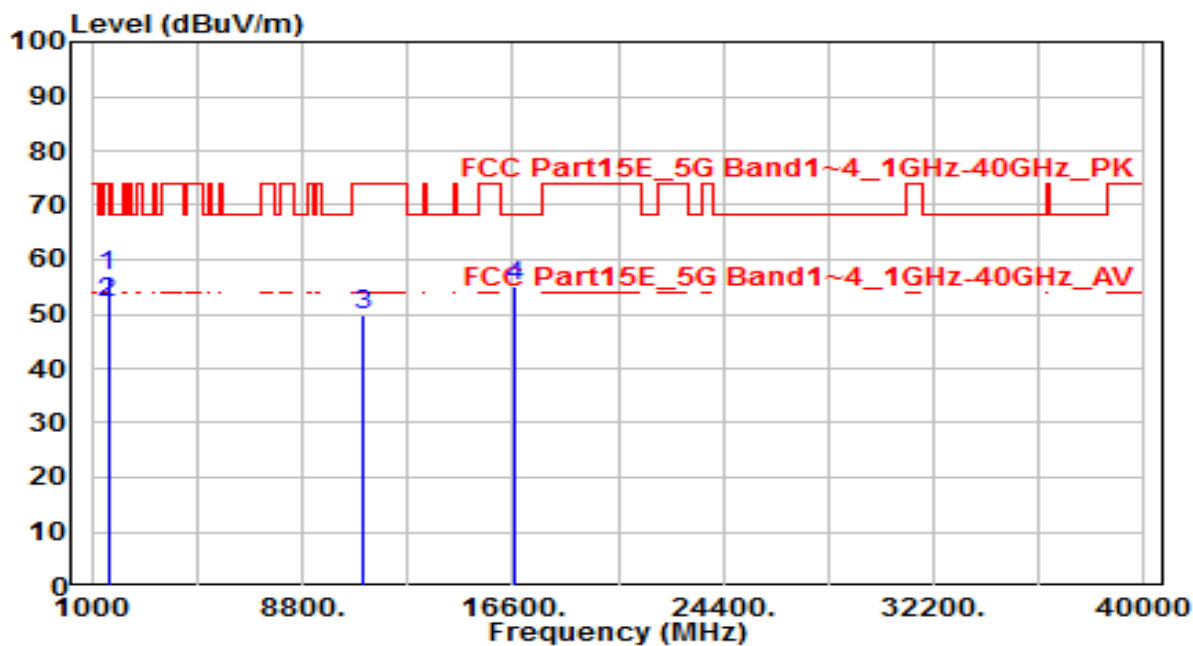


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.235	62.56	-5.47	57.09	-16.91	74.00	100	250	Peak
2	*	1600.235	57.68	-5.47	52.21	-1.79	54.00	100	250	Average
3		11100.000	32.05	17.91	49.96	-24.04	74.00	150	400	Peak
4		16650.000	32.21	23.06	55.26	-12.94	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

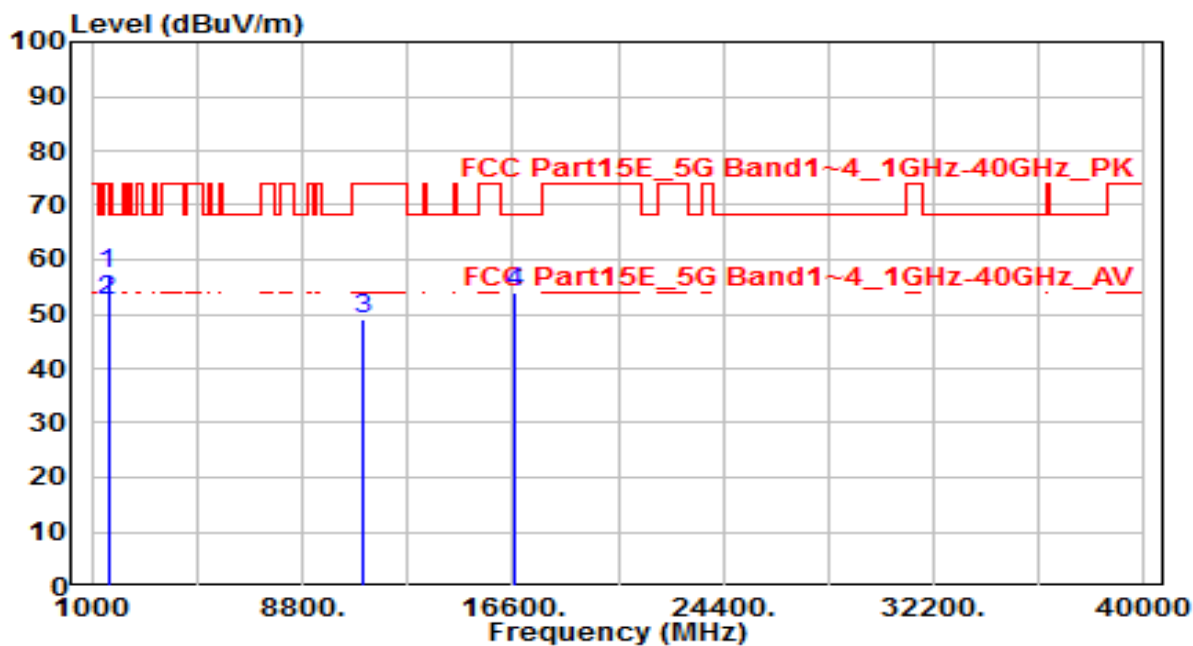


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.956	62.68	-5.47	57.21	-16.79	74.00	185	200	Peak
2	*	1599.956	57.95	-5.47	52.48	-1.52	54.00	185	200	Average
3		11100.000	31.09	17.91	49.01	-24.99	74.00	150	400	Peak
4		16650.000	30.88	23.06	53.94	-14.26	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

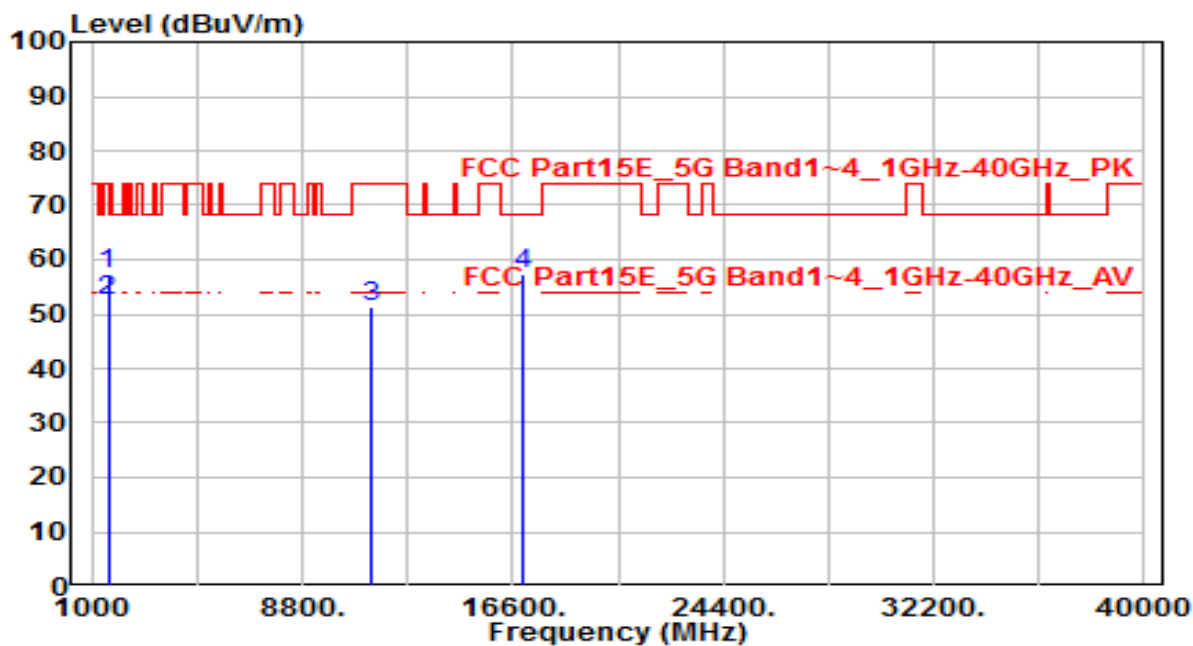


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.984	62.76	-5.47	57.29	-16.71	74.00	100	250	Peak
2	*	1599.984	57.79	-5.47	52.32	-1.68	54.00	100	250	Average
3		11340.000	33.12	18.24	51.36	-22.64	74.00	150	400	Peak
4		17010.000	31.50	25.71	57.21	-10.99	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

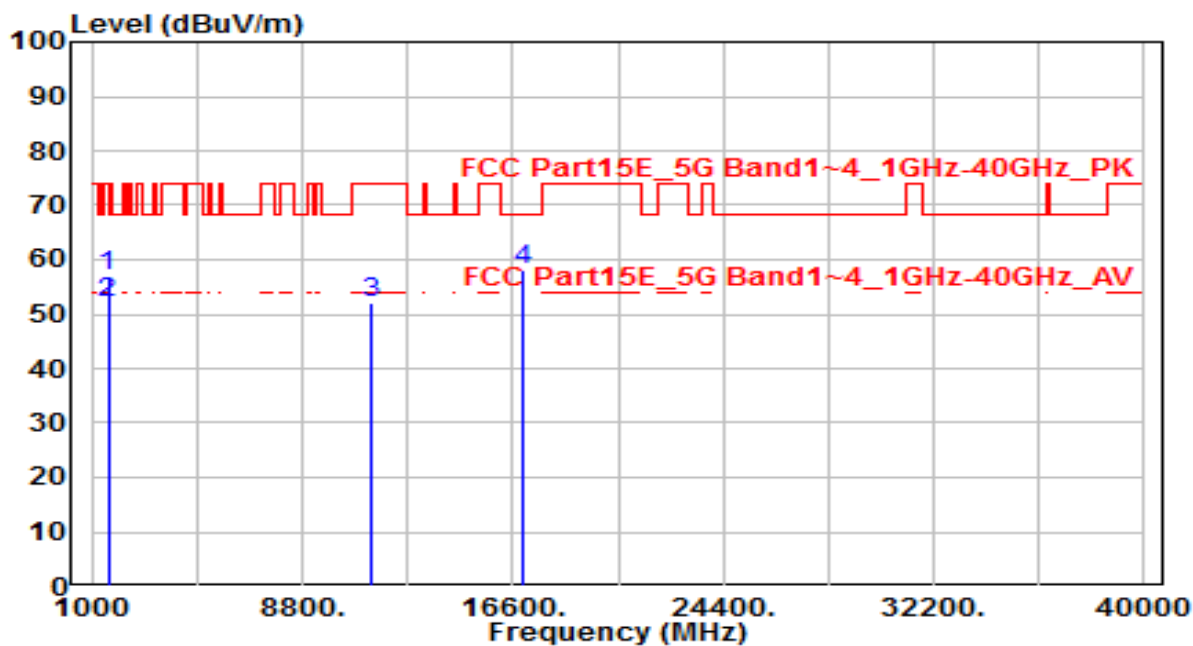


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.351	62.59	-5.47	57.12	-16.88	74.00	185	200	Peak
2	*	1600.351	57.62	-5.47	52.15	-1.85	54.00	185	200	Average
3		11340.000	33.79	18.24	52.02	-21.98	74.00	150	400	Peak
4		17010.000	32.57	25.71	58.28	-9.92	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

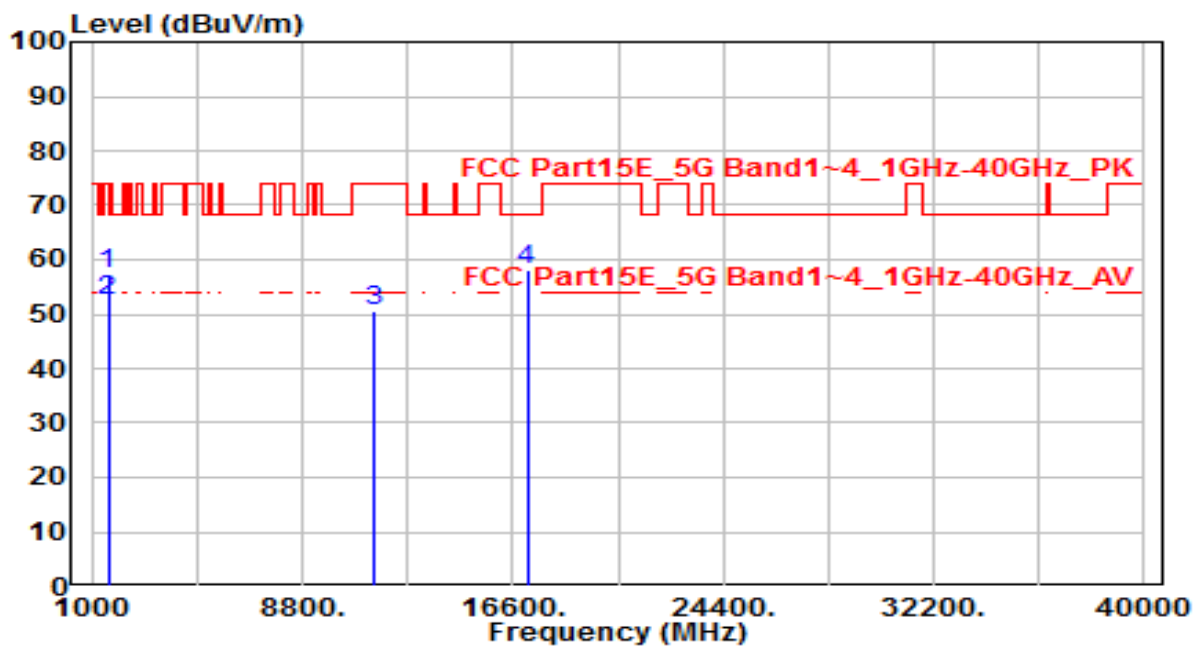


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.845	62.68	-5.47	57.21	-16.79	74.00	100	250	Peak
2	*	1599.845	57.98	-5.47	52.51	-1.49	54.00	100	250	Average
3		11420.000	32.13	18.34	50.47	-23.53	74.00	150	400	Peak
4		17130.000	31.15	26.92	58.07	-10.13	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

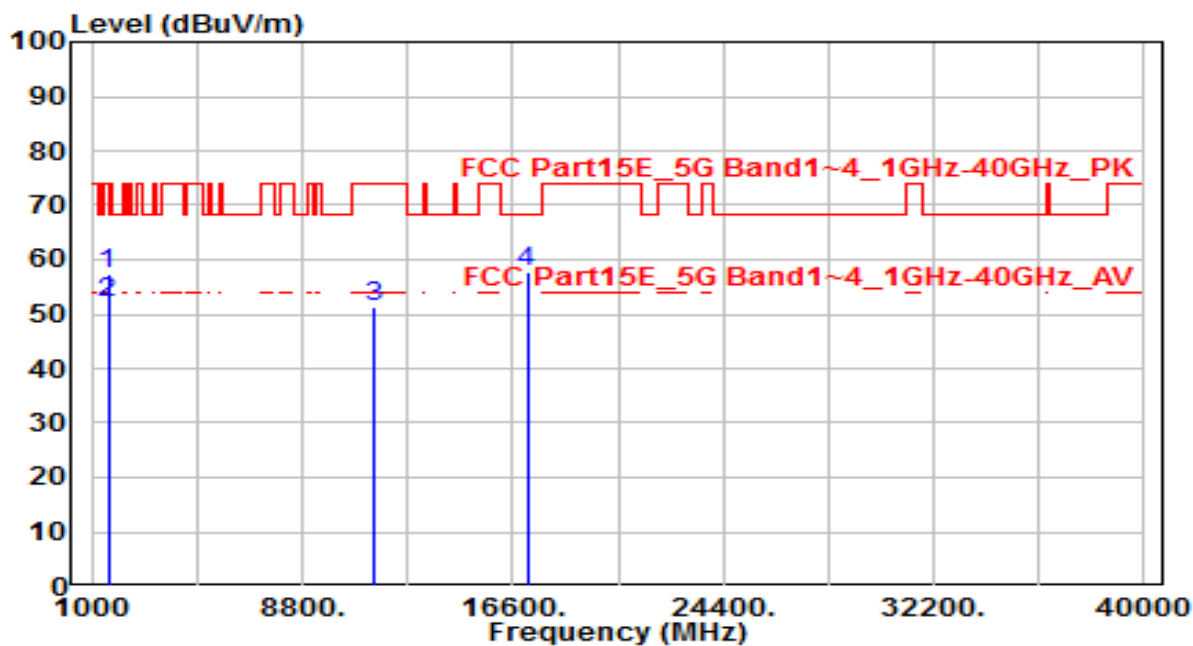


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.986	62.84	-5.47	57.37	-16.63	74.00	185	200	Peak
2	*	1599.986	57.68	-5.47	52.21	-1.79	54.00	185	200	Average
3		11420.000	33.00	18.34	51.34	-22.66	74.00	150	400	Peak
4		17130.000	30.70	26.92	57.62	-10.58	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

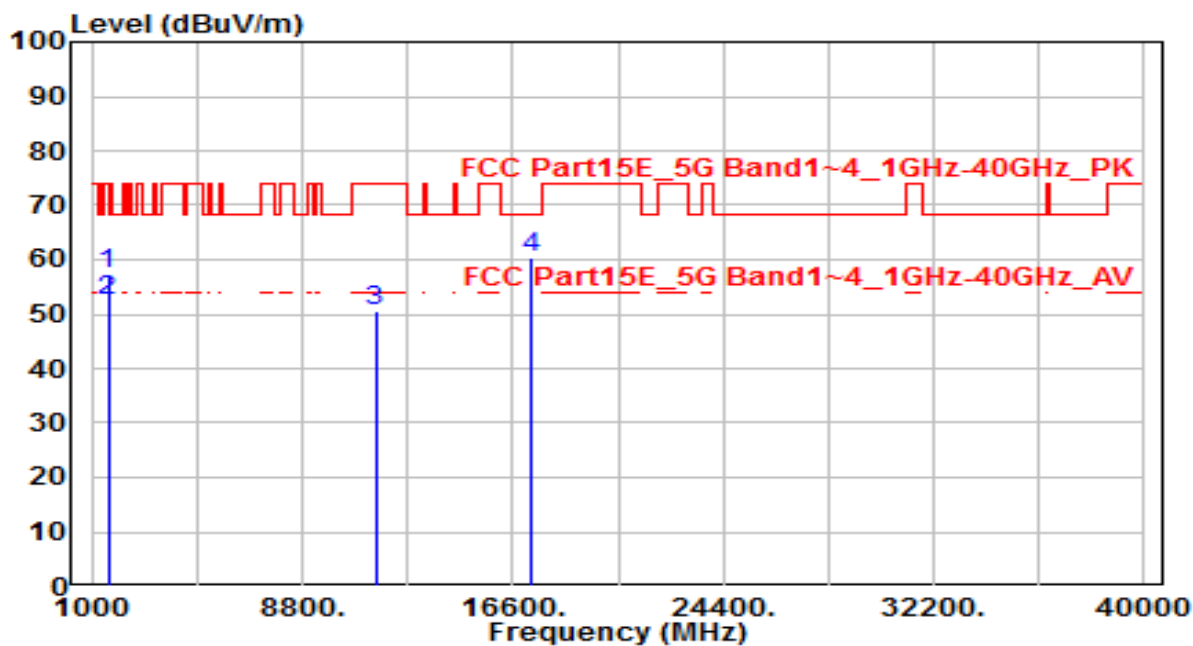


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.260	62.68	-5.47	57.21	-16.79	74.00	100	250	Peak
2	*	1600.260	57.86	-5.47	52.39	-1.61	54.00	100	250	Average
3		11510.000	32.20	18.44	50.64	-23.36	74.00	150	400	Peak
4		17265.000	32.18	28.28	60.45	-7.75	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

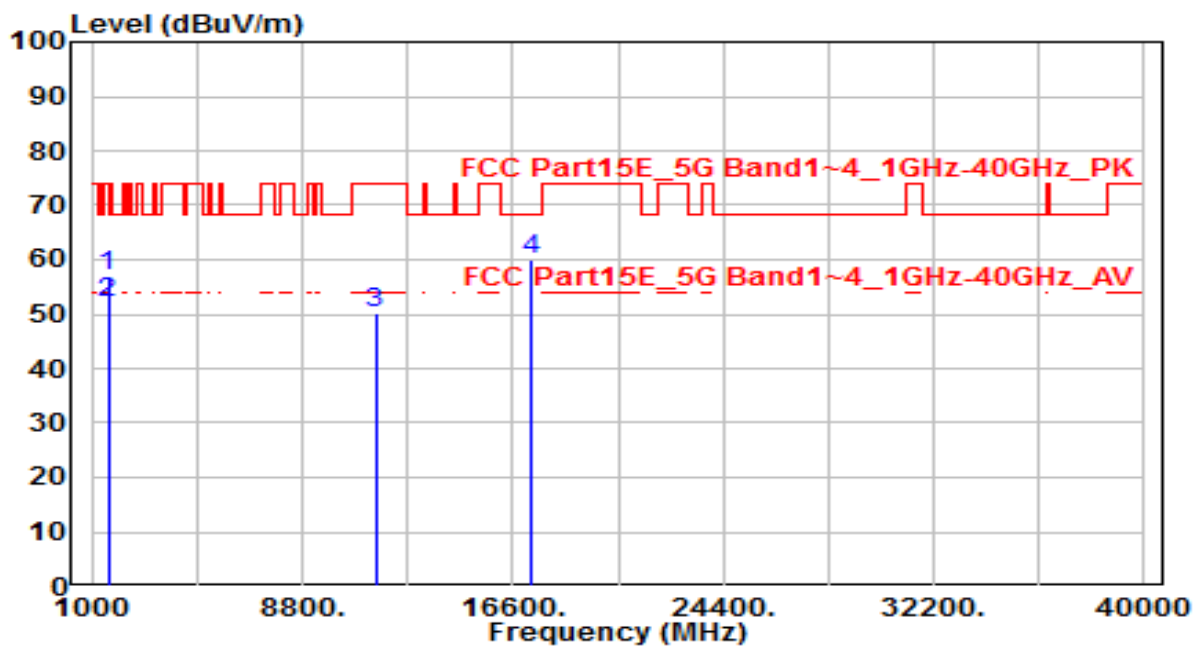


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.680	62.49	-5.47	57.02	-16.98	74.00	185	200	Peak
2	*	1599.680	57.70	-5.47	52.23	-1.77	54.00	185	200	Average
3		11510.000	31.91	18.44	50.35	-23.65	74.00	150	400	Peak
4		17265.000	31.62	28.28	59.90	-8.30	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

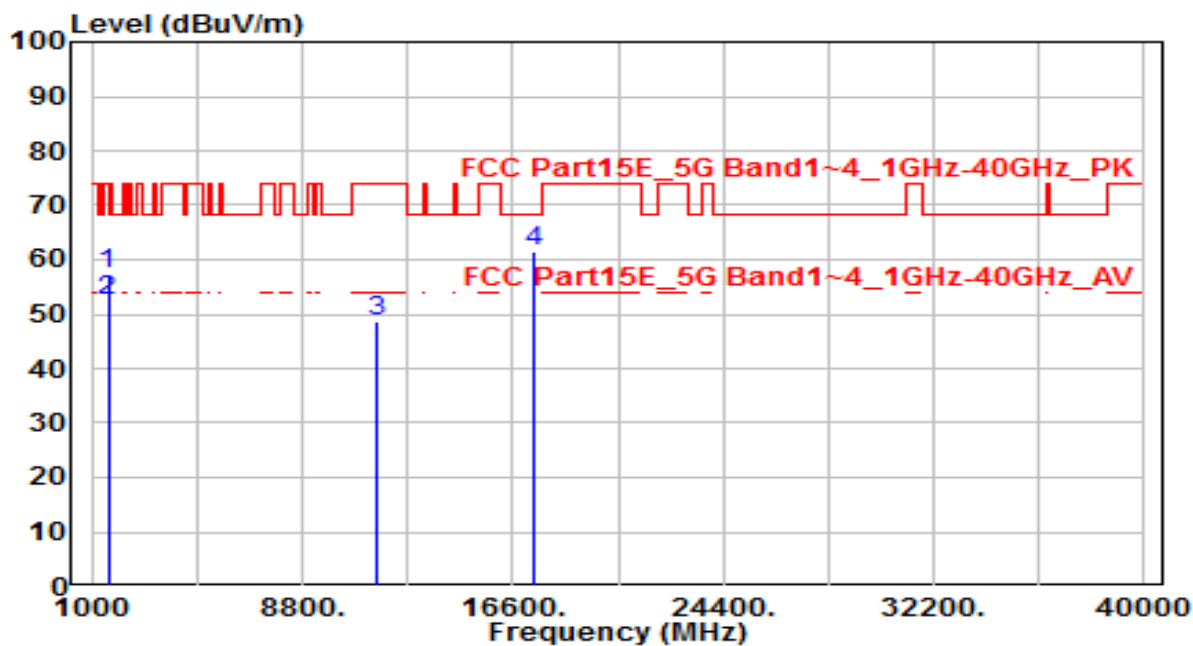


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.225	62.86	-5.47	57.39	-16.61	74.00	100	250	Peak
2	*	1600.225	57.79	-5.47	52.32	-1.68	54.00	100	250	Average
3		11590.000	30.52	18.34	48.86	-25.14	74.00	150	400	Peak
4		17385.000	31.95	29.48	61.43	-6.77	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

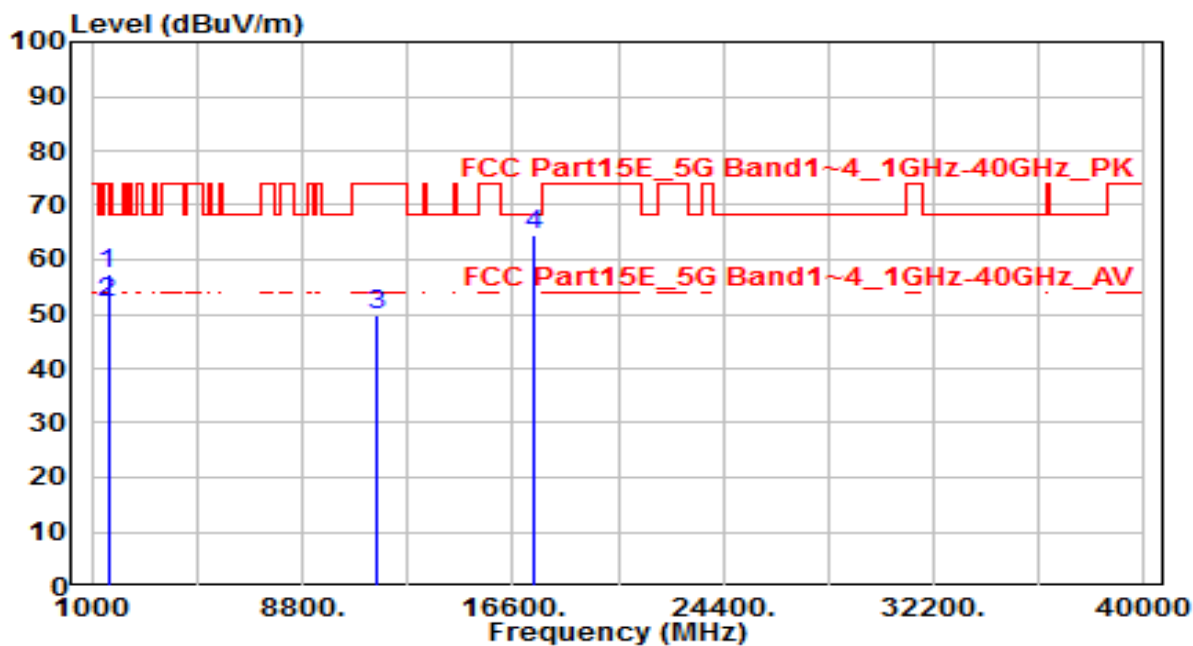


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.992	62.79	-5.47	57.32	-16.68	74.00	185	200	Peak
2	*	1599.992	57.65	-5.47	52.18	-1.82	54.00	185	200	Average
3		11590.000	31.41	18.34	49.75	-24.25	74.00	150	400	Peak
4		17385.000	35.14	29.48	64.62	-3.58	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

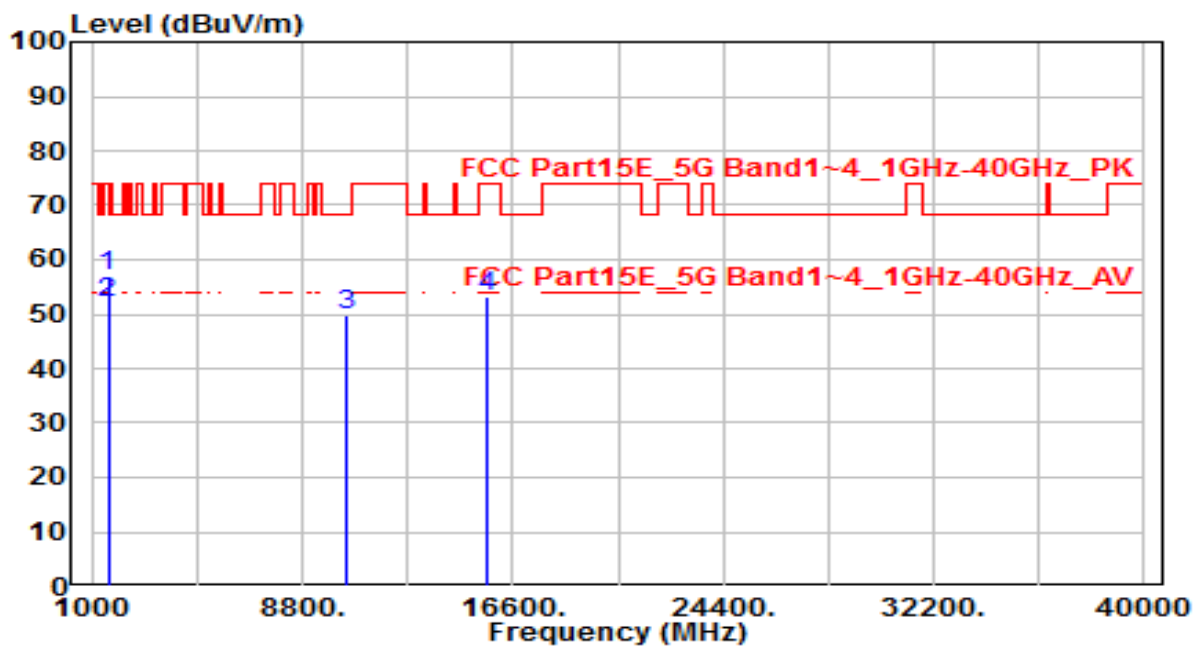


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.210	62.63	-5.47	57.16	-16.84	74.00	100	250	Peak
2	*	1600.210	57.64	-5.47	52.17	-1.83	54.00	100	250	Average
3		10420.000	32.91	16.80	49.71	-18.49	68.20	150	400	Peak
4		15630.000	32.16	21.23	53.39	-20.61	74.00	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

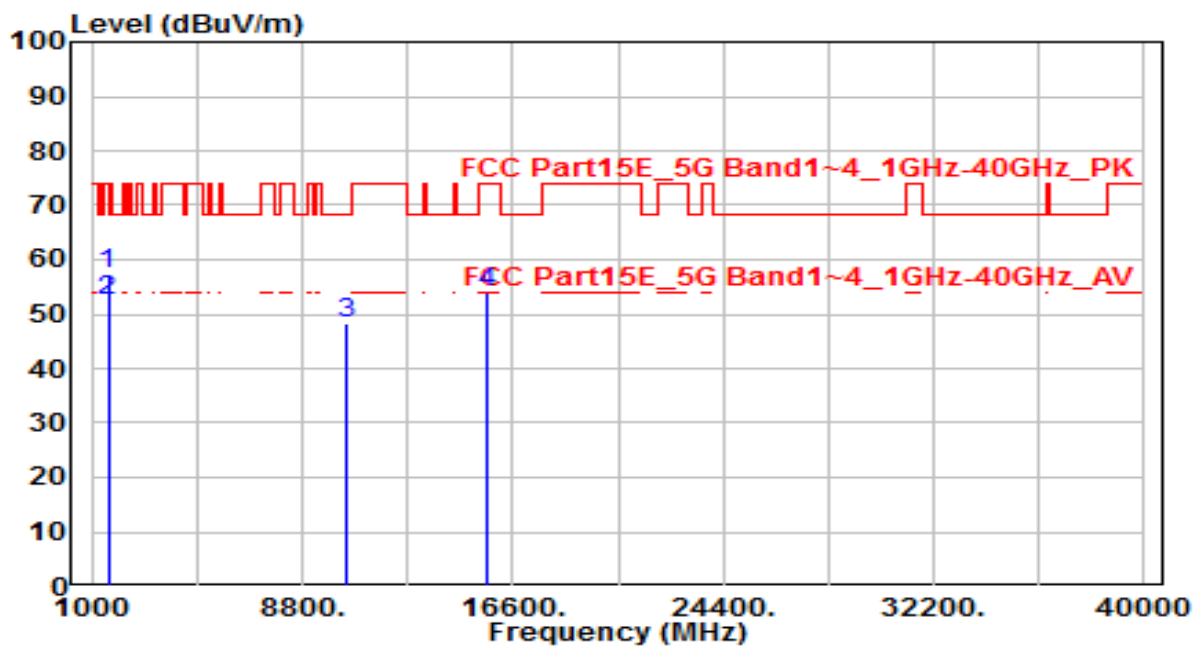


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.118	62.76	-5.47	57.29	-16.71	74.00	185	200	Peak
2	*	1600.118	57.99	-5.47	52.52	-1.48	54.00	185	200	Average
3		10420.000	31.66	16.80	48.46	-19.74	68.20	150	400	Peak
4		15630.000	32.70	21.23	53.93	-20.07	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

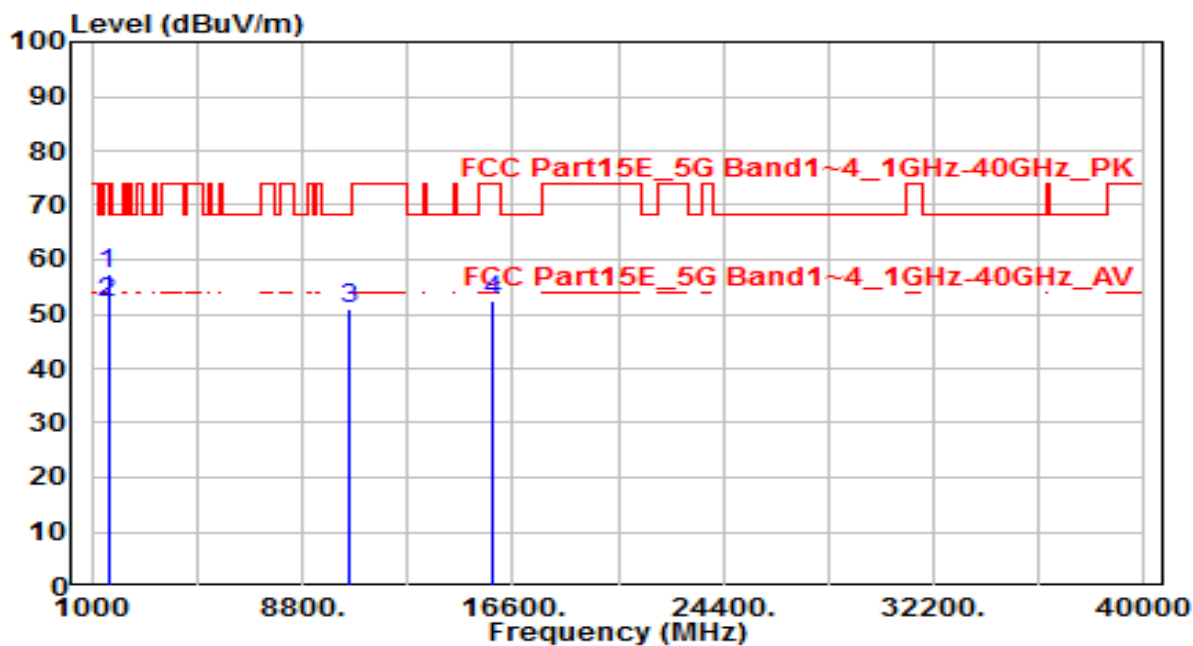


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.993	62.86	-5.47	57.39	-16.61	74.00	100	250	Peak
2	*	1599.993	57.49	-5.47	52.02	-1.98	54.00	100	250	Average
3		10580.000	33.81	17.18	50.99	-17.21	68.20	150	400	Peak
4		15870.000	31.53	20.83	52.36	-21.64	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

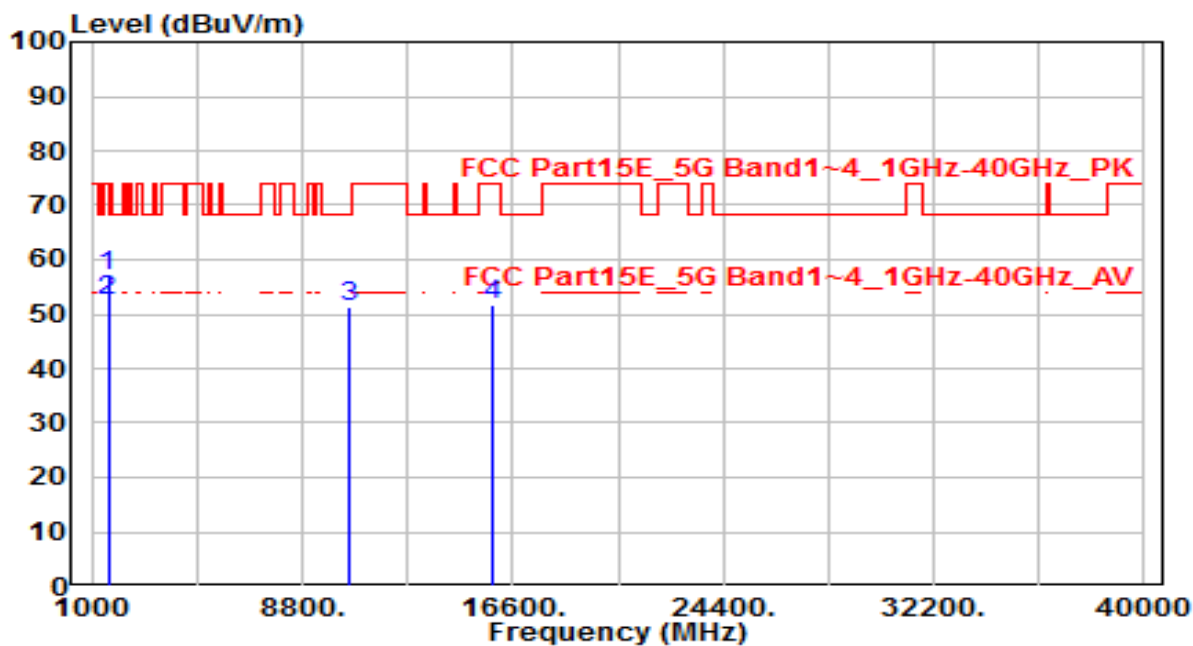


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.080	62.55	-5.47	57.08	-16.92	74.00	185	200	Peak
2	*	1600.080	57.96	-5.47	52.49	-1.51	54.00	185	200	Average
3		10580.000	33.97	17.18	51.15	-17.05	68.20	150	400	Peak
4		15870.000	31.05	20.83	51.88	-22.12	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

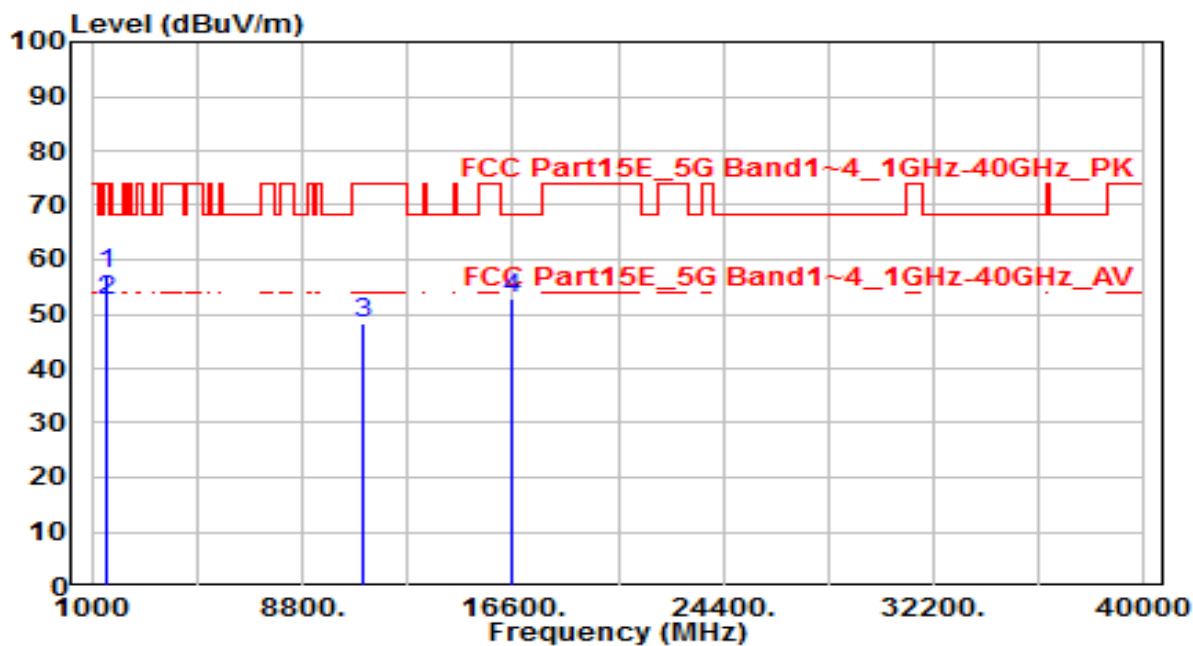


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1598.650	62.68	-5.47	57.21	-16.79	74.00	100	250	Peak
2	*	1598.650	57.99	-5.47	52.52	-1.48	54.00	100	250	Average
3		11060.000	30.27	17.86	48.13	-25.87	74.00	150	400	Peak
4		16590.000	30.40	22.62	53.01	-15.19	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

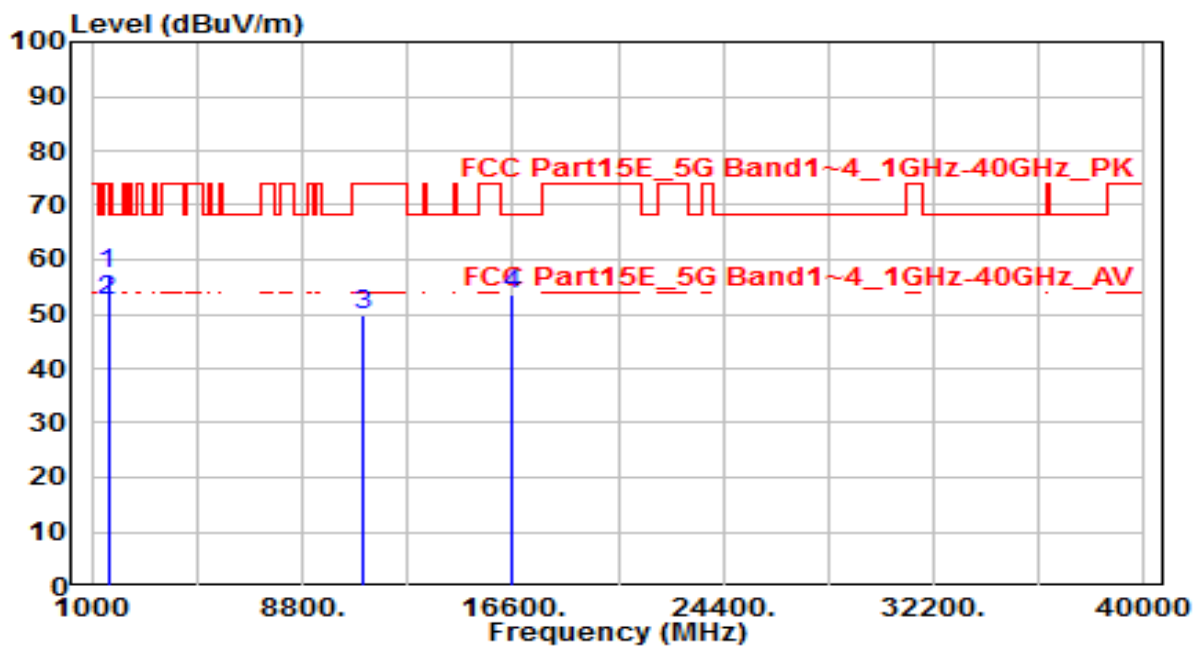


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.989	62.95	-5.47	57.48	-16.52	74.00	185	200	Peak
2	*	1599.989	57.76	-5.47	52.29	-1.71	54.00	185	200	Average
3		11060.000	31.89	17.86	49.75	-24.25	74.00	150	400	Peak
4		16590.000	30.81	22.62	53.42	-14.78	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

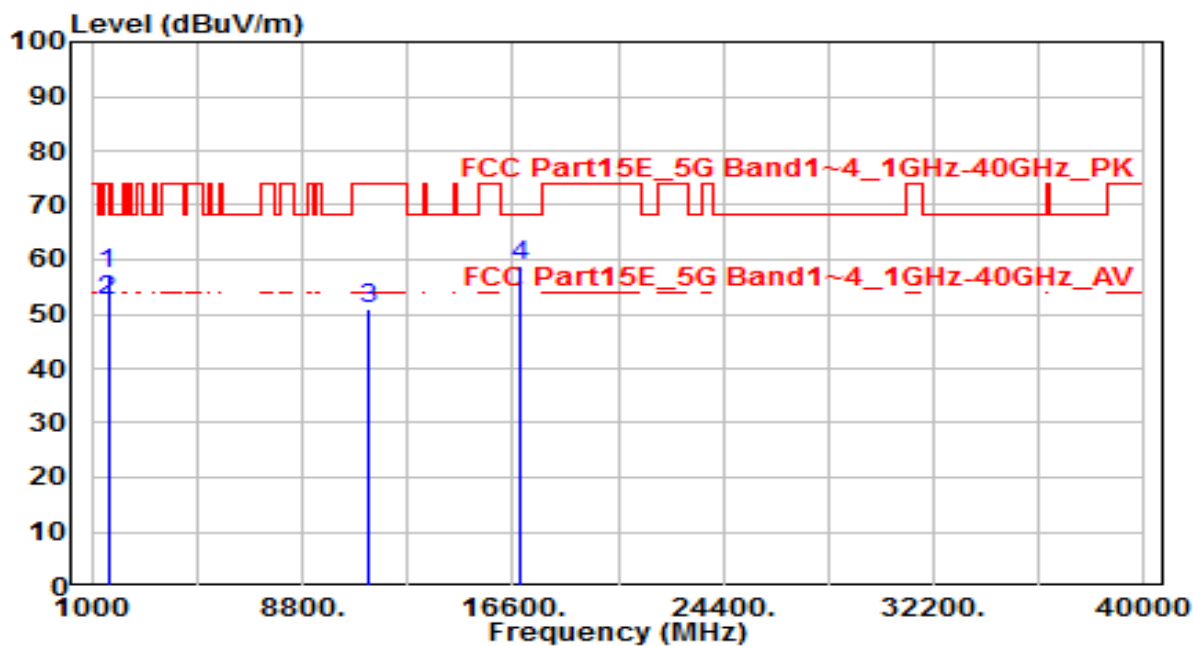


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.050	62.68	-5.47	57.21	-16.79	74.00	100	250	Peak
2	*	1600.050	57.86	-5.47	52.39	-1.61	54.00	100	250	Average
3		11220.000	32.91	18.07	50.99	-23.01	74.00	150	400	Peak
4		16830.000	34.31	24.37	58.68	-9.52	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

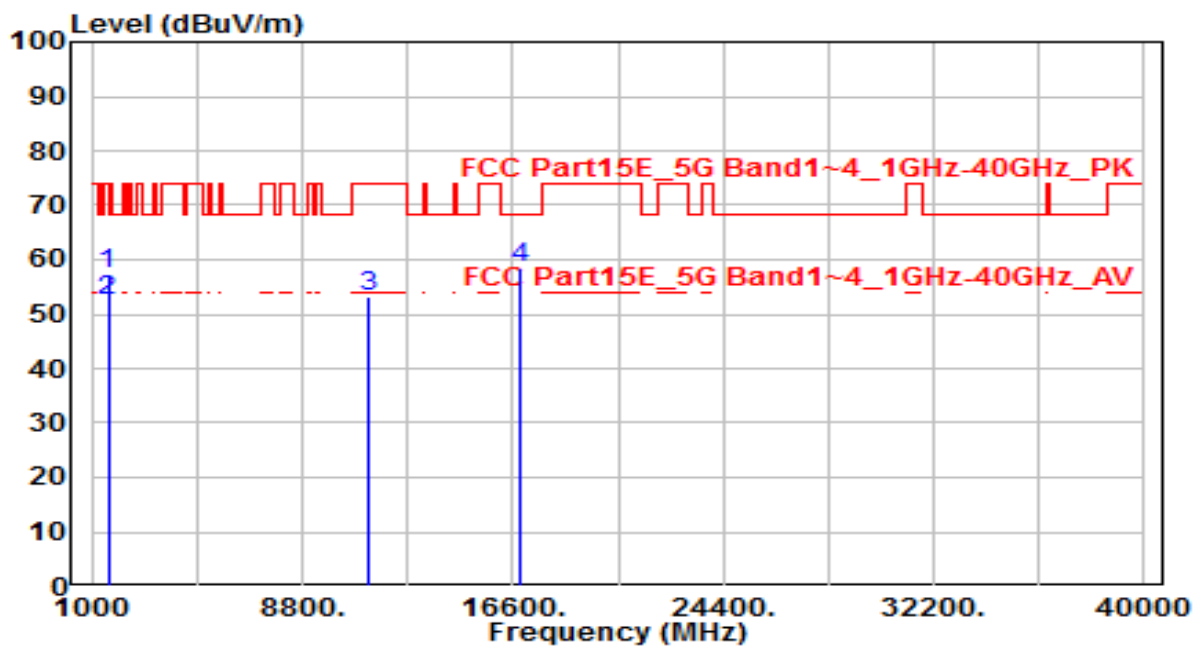


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.350	62.99	-5.47	57.52	-16.48	74.00	185	200	Peak
2	*	1600.350	57.79	-5.47	52.32	-1.68	54.00	185	200	Average
3		11220.000	35.04	18.07	53.12	-20.88	74.00	150	400	Peak
4		16830.000	33.99	24.37	58.36	-9.84	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

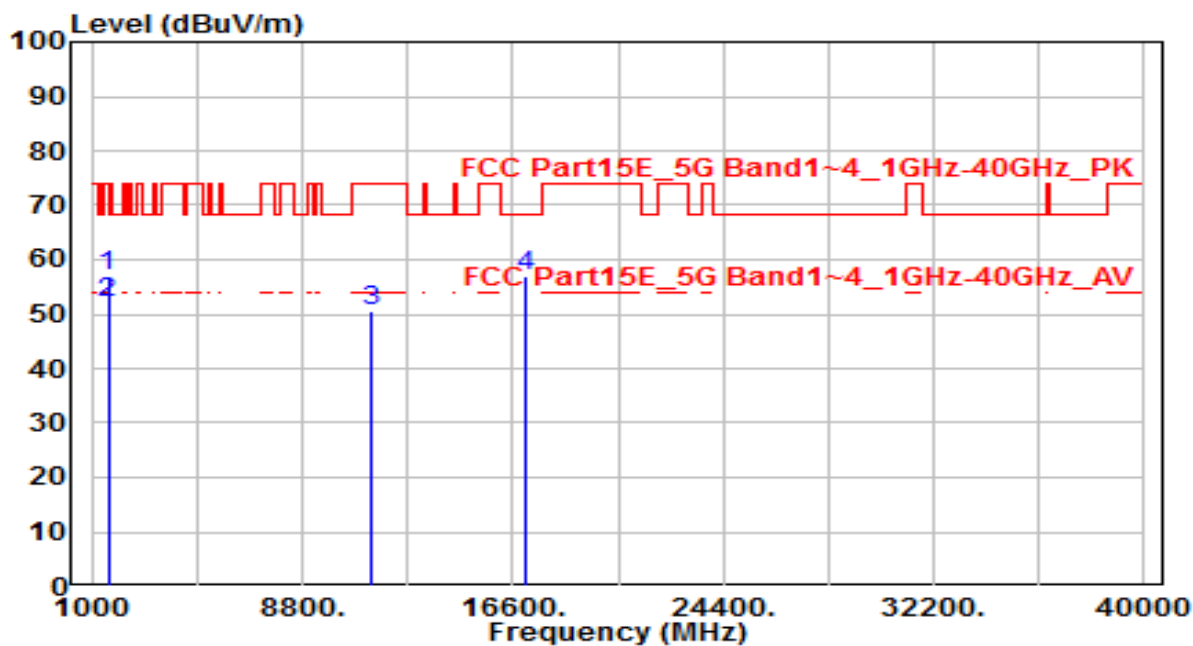


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.118	62.56	-5.47	57.09	-16.91	74.00	100	250	Peak
2	*	1600.118	57.70	-5.47	52.23	-1.77	54.00	100	250	Average
3		11380.000	32.27	18.29	50.56	-23.44	74.00	150	400	Peak
4		17070.000	30.78	26.31	57.09	-11.11	68.20	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

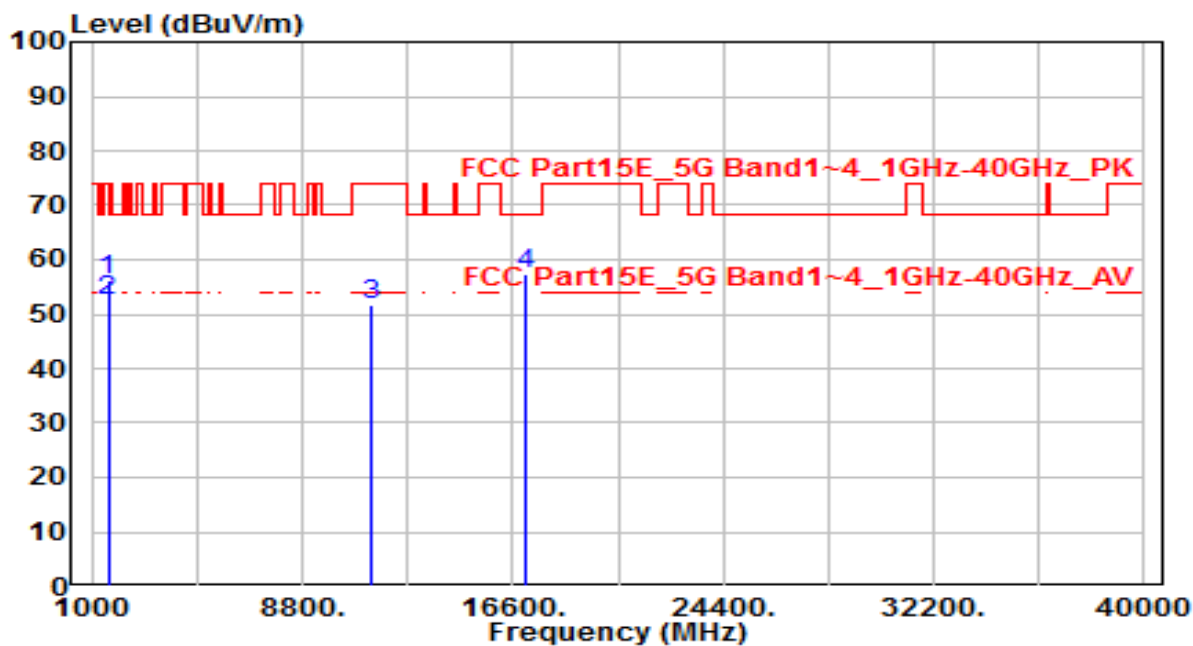


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.228	61.86	-5.47	56.39	-17.61	74.00	185	200	Peak
2	*	1600.228	57.76	-5.47	52.29	-1.71	54.00	185	200	Average
3		11380.000	33.58	18.29	51.86	-22.14	74.00	150	400	Peak
4		17070.000	30.95	26.31	57.26	-10.94	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

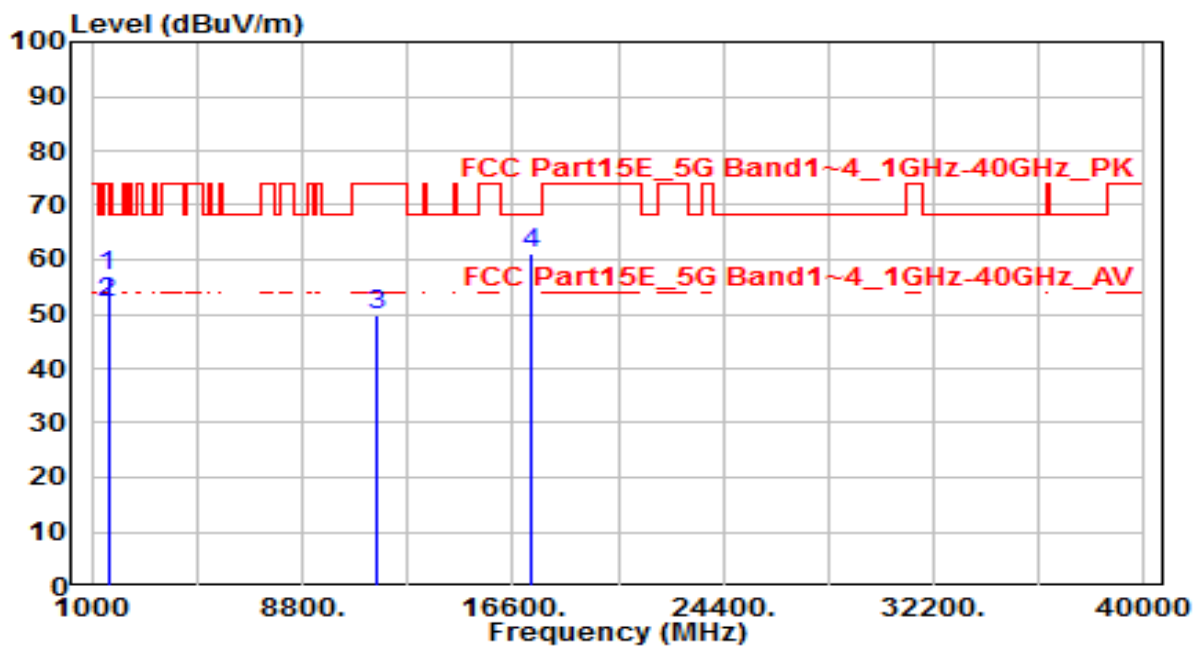


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.795	62.38	-5.47	56.91	-17.09	74.00	100	250	Peak
2	*	1599.795	57.49	-5.47	52.02	-1.98	54.00	100	250	Average
3		11550.000	31.55	18.39	49.93	-24.07	74.00	150	400	Peak
4		17325.000	32.09	28.88	60.97	-7.23	68.20	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

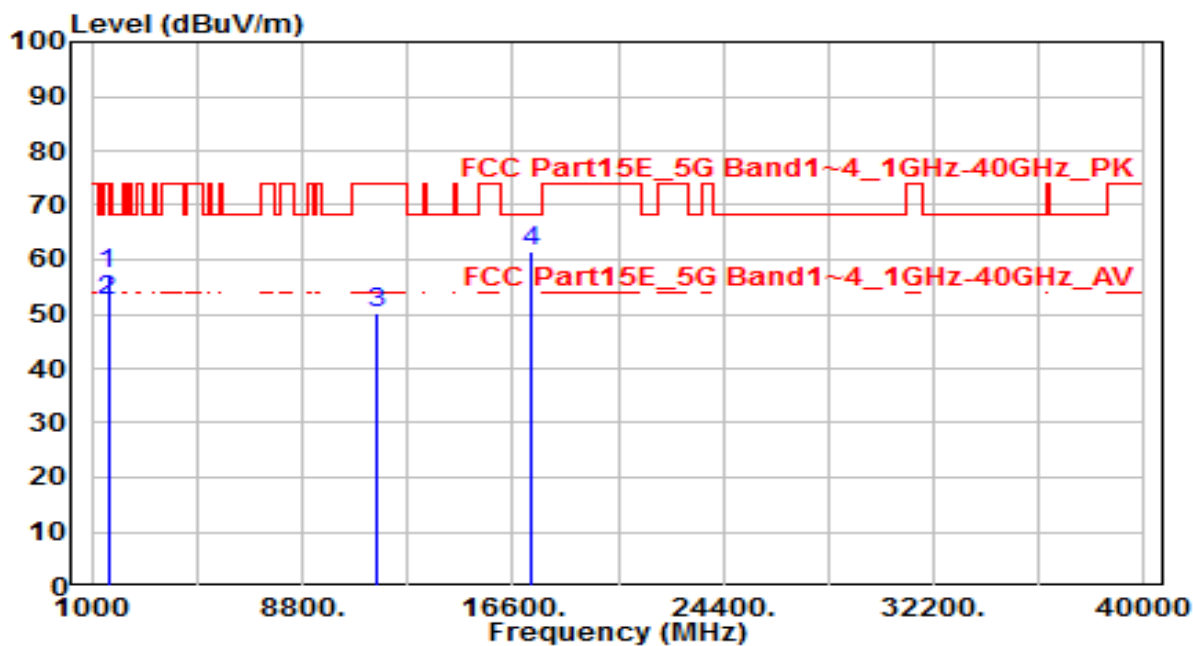


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.899	62.78	-5.47	57.31	-16.69	74.00	185	200	Peak
2	*	1599.899	57.91	-5.47	52.44	-1.56	54.00	185	200	Average
3		11550.000	31.94	18.39	50.33	-23.67	74.00	150	400	Peak
4		17325.000	32.72	28.88	61.60	-6.60	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20_RX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

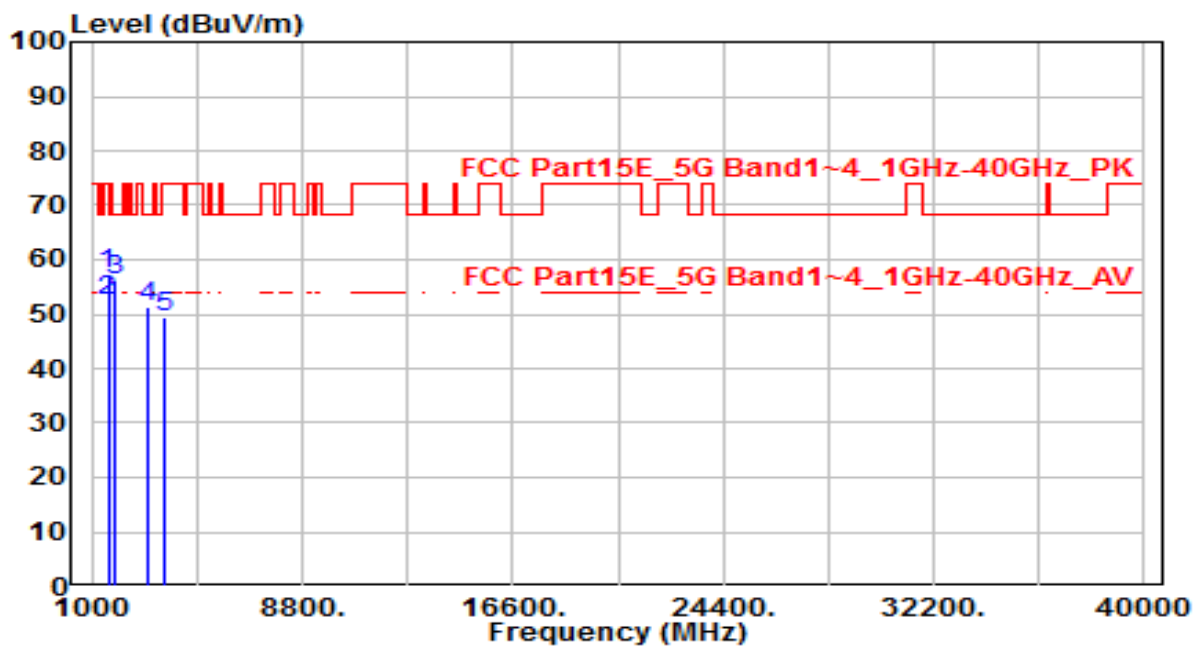


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1600.313	62.85	-5.47	57.39	-16.61	74.00	100	250	Peak
2	*	1600.313	57.85	-5.47	52.39	-1.61	54.00	100	250	Average
3		1863.281	61.16	-4.78	56.38	-11.82	68.20	150	400	Peak
4		3113.844	53.60	-2.15	51.46	-16.74	68.20	150	400	Peak
5		3726.906	49.48	-0.06	49.42	-24.58	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20_RX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

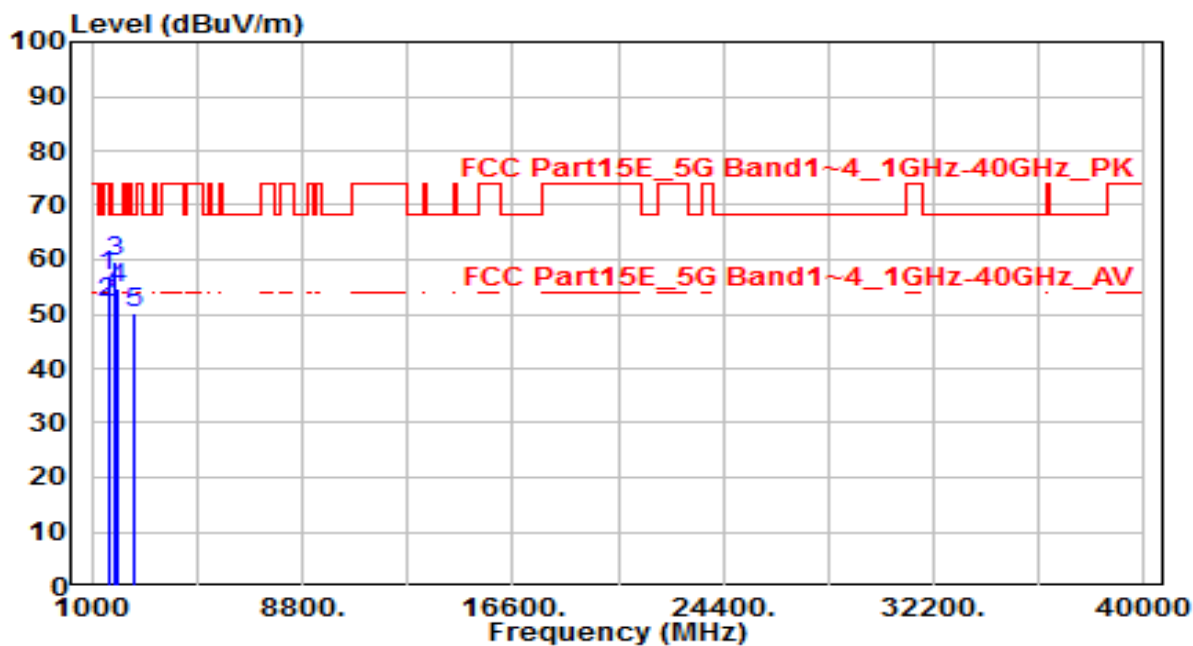

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	1599.781	62.31	-5.47	56.84	-17.16	74.00	185	200	Peak
2	*	1599.781	57.65	-5.47	52.18	-1.82	54.00	185	200	Average
3		1809.625	64.69	-4.92	59.77	-8.43	68.20	150	400	Peak
4		2000.344	59.23	-4.42	54.81	-13.39	68.20	150	400	Peak
5		2587.906	52.33	-2.27	50.05	-18.15	68.20	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.8.2. Test Result

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C / 65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

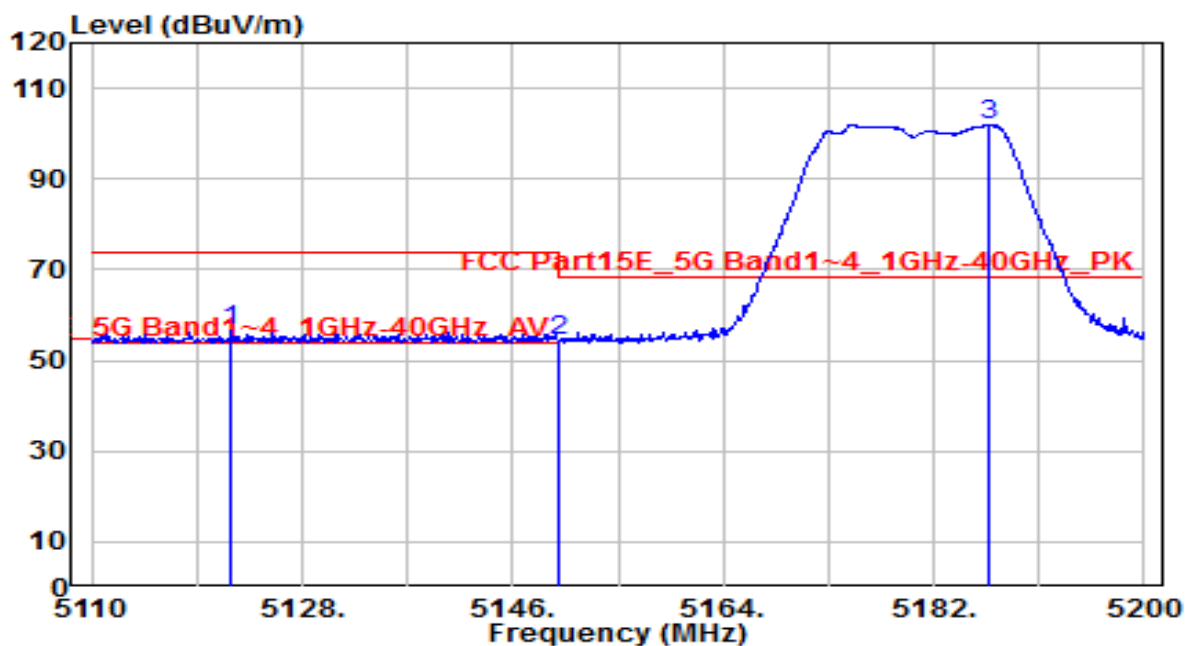


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5121.970	53.00	3.63	56.63	-17.37	74.00	185	275	Peak
2	* 5150.000	50.66	3.65	54.30	-13.90	68.20	185	275	Peak
3	5186.770	98.24	3.67	101.91	N/A	N/A	185	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

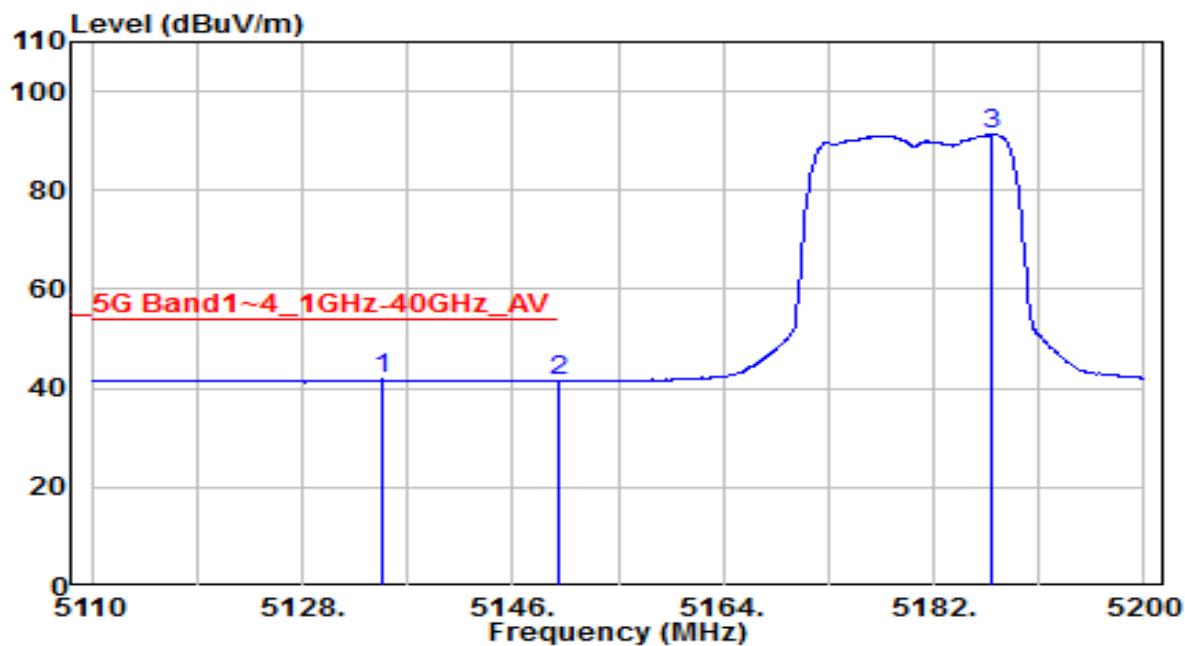


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.750	38.19	3.64	41.82	-12.18	54.00	185	275	Average
2		5150.000	37.81	3.65	41.46	-12.54	54.00	185	275	Average
3		5187.040	87.52	3.67	91.19	N/A	N/A	185	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

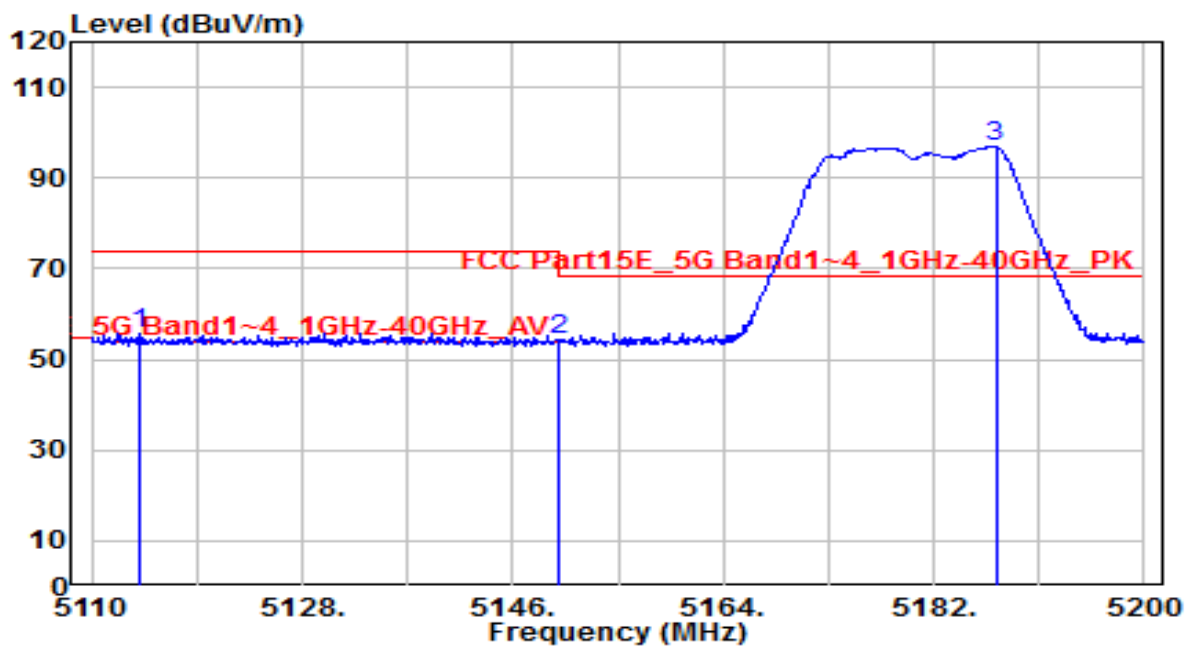


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5114.050	52.04	3.62	55.67	-18.33	74.00	210	300	Peak
2	* 5150.000	50.82	3.65	54.47	-13.73	68.20	210	300	Peak
3	5187.310	93.33	3.67	97.00	N/A	N/A	210	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

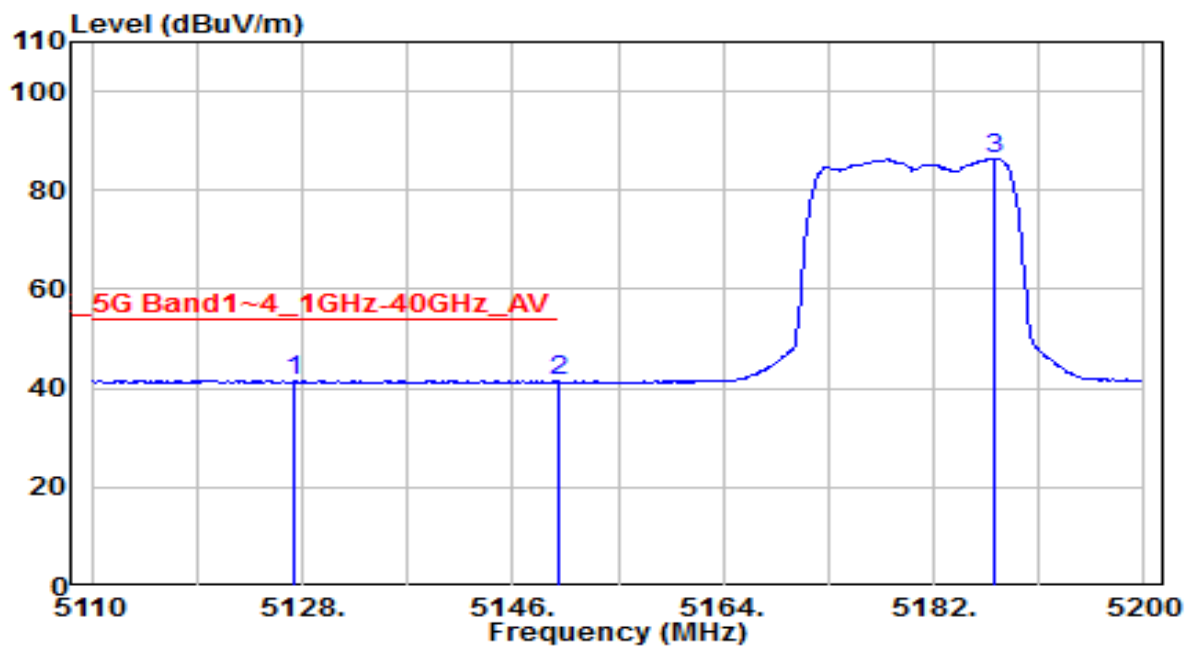


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5127.370	37.97	3.63	41.60	-12.40	54.00	210	300	Average
2		5150.000	37.70	3.65	41.35	-12.65	54.00	210	300	Average
3		5187.130	82.68	3.67	86.34	N/A	N/A	210	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

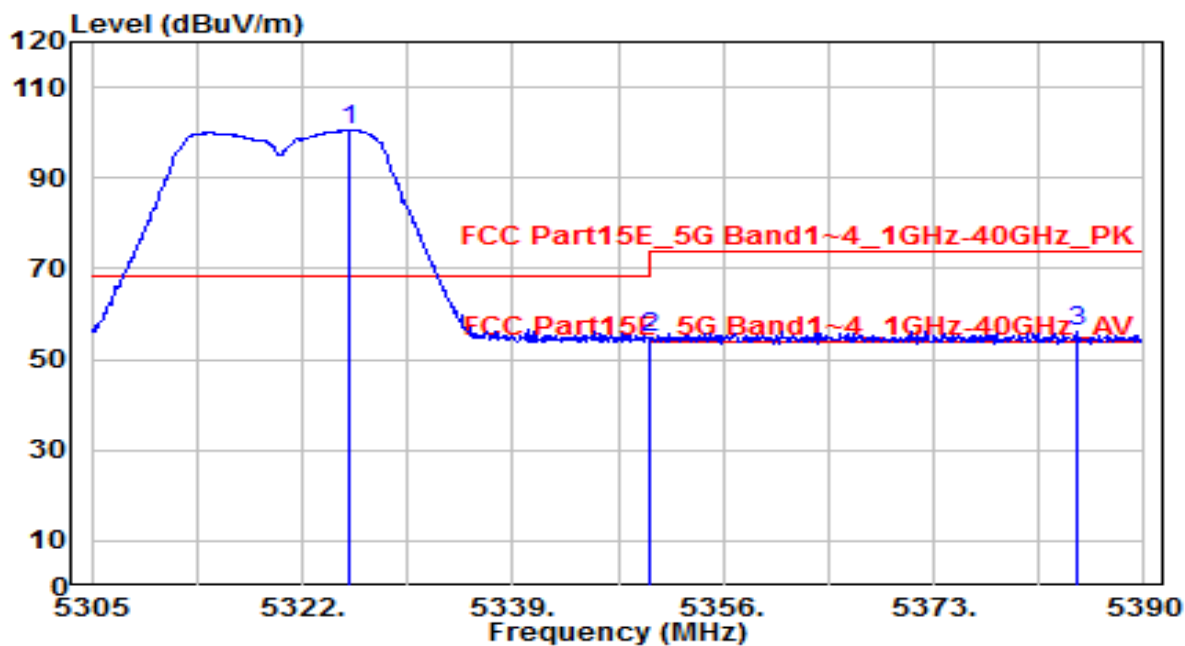


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.825	96.66	3.76	100.42	N/A	N/A	205	195	Peak
2	* 5350.000	51.23	3.77	55.00	-13.20	68.20	205	195	Peak
3	5384.475	52.27	3.80	56.06	-17.94	74.00	205	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

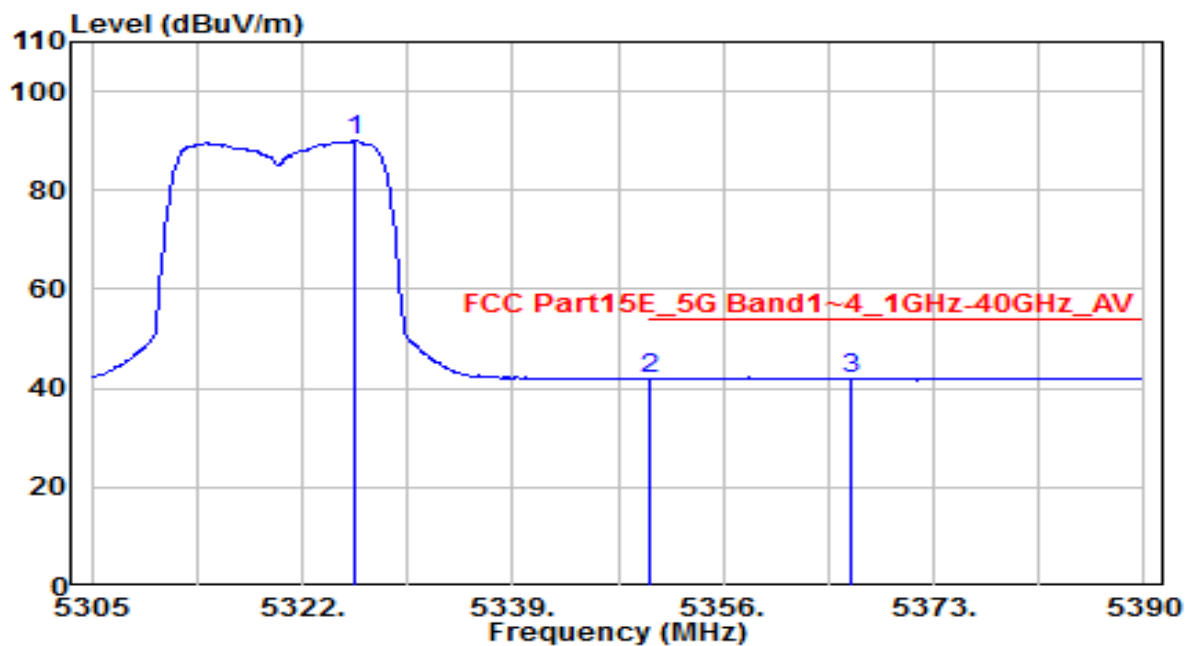


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.335	86.26	3.76	90.02	N/A	N/A	205	195	Average
2	5350.000	38.22	3.77	41.99	-12.01	54.00	205	195	Average
3	* 5366.285	38.31	3.78	42.09	-11.91	54.00	205	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

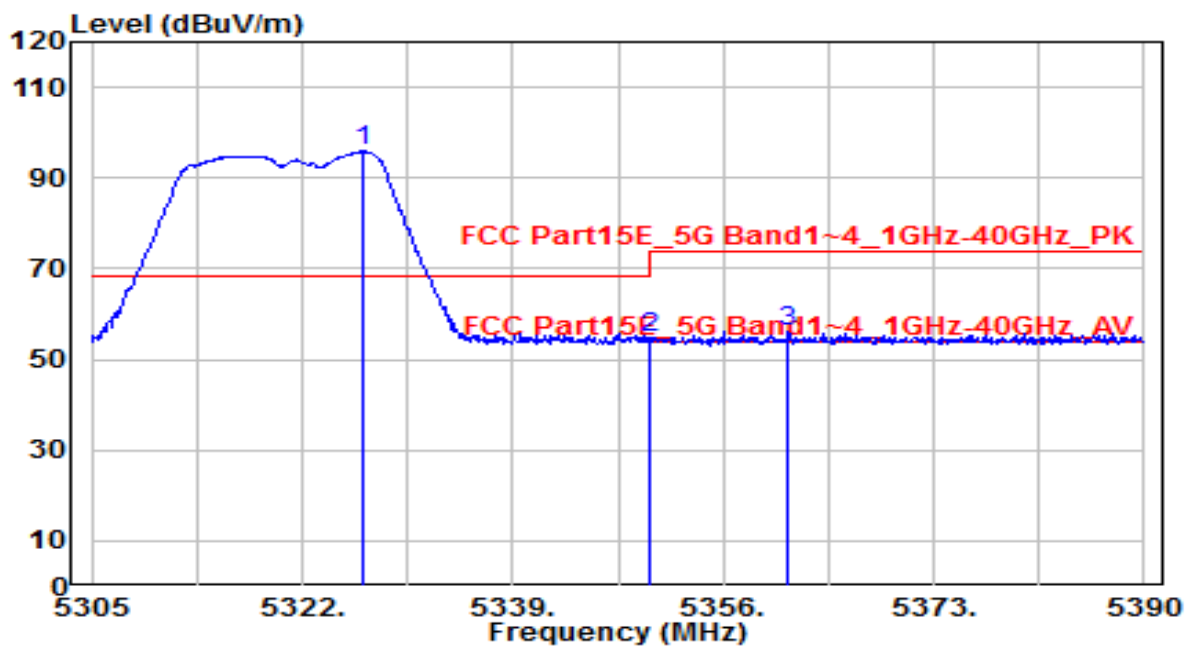


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.845	92.07	3.76	95.83	N/A	N/A	220	305	Peak
2	* 5350.000	51.17	3.77	54.94	-13.26	68.20	220	305	Peak
3	5361.270	52.30	3.78	56.08	-17.92	74.00	220	305	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

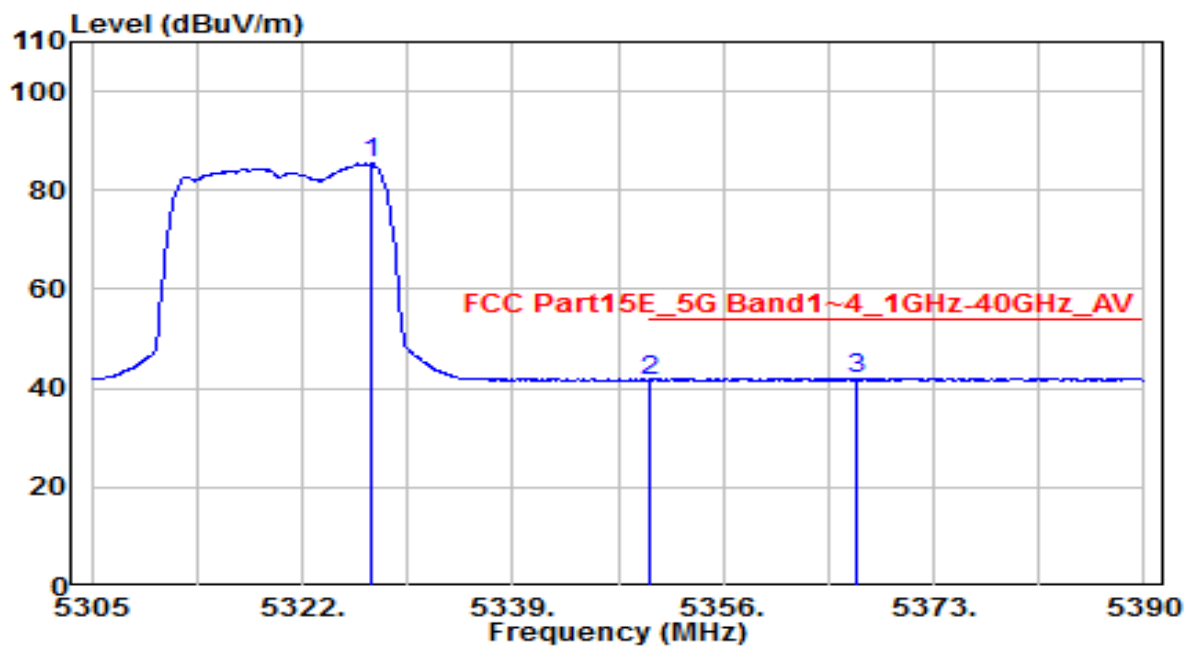


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.610	81.60	3.76	85.36	N/A	N/A	220	305	Average
2	5350.000	37.82	3.77	41.59	-12.41	54.00	220	305	Average
3	* 5366.710	38.17	3.78	41.95	-12.05	54.00	220	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

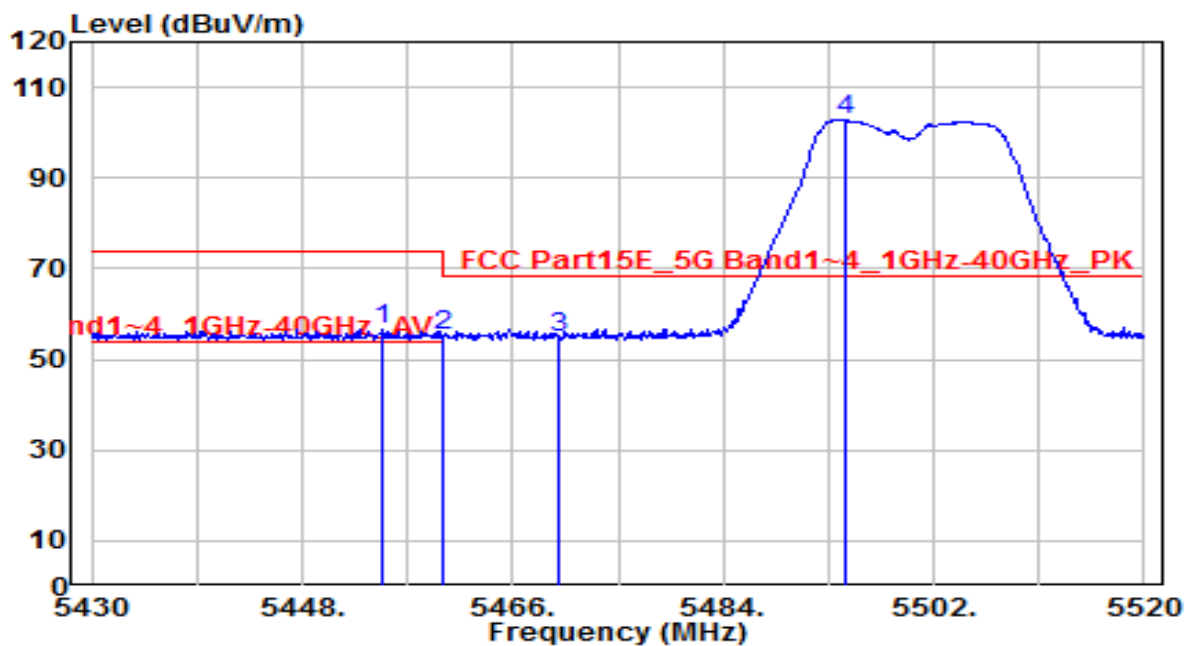


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.930	52.94	3.84	56.78	-17.22	74.00	215	195	Peak
2	* 5460.000	51.23	3.84	55.07	-13.13	68.20	215	195	Peak
3	5470.000	51.11	3.85	54.96	-13.24	68.20	215	195	Peak
4	5494.350	98.92	3.87	102.79	N/A	N/A	215	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

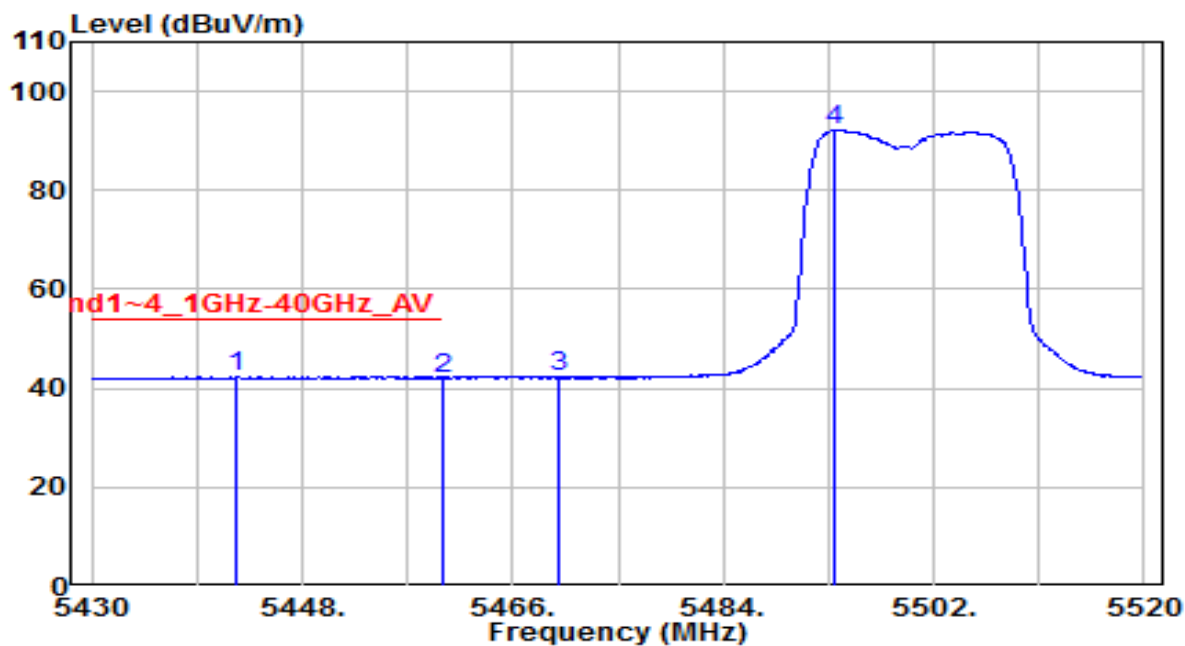


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.420	38.50	3.83	42.33	-11.67	54.00	215	195	Average
2		5460.000	38.23	3.84	42.08	-11.92	54.00	215	195	Average
3		5470.000	38.36	3.85	42.21	-457.79	500.00	215	195	Average
4		5493.450	88.44	3.87	92.30	N/A	N/A	215	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

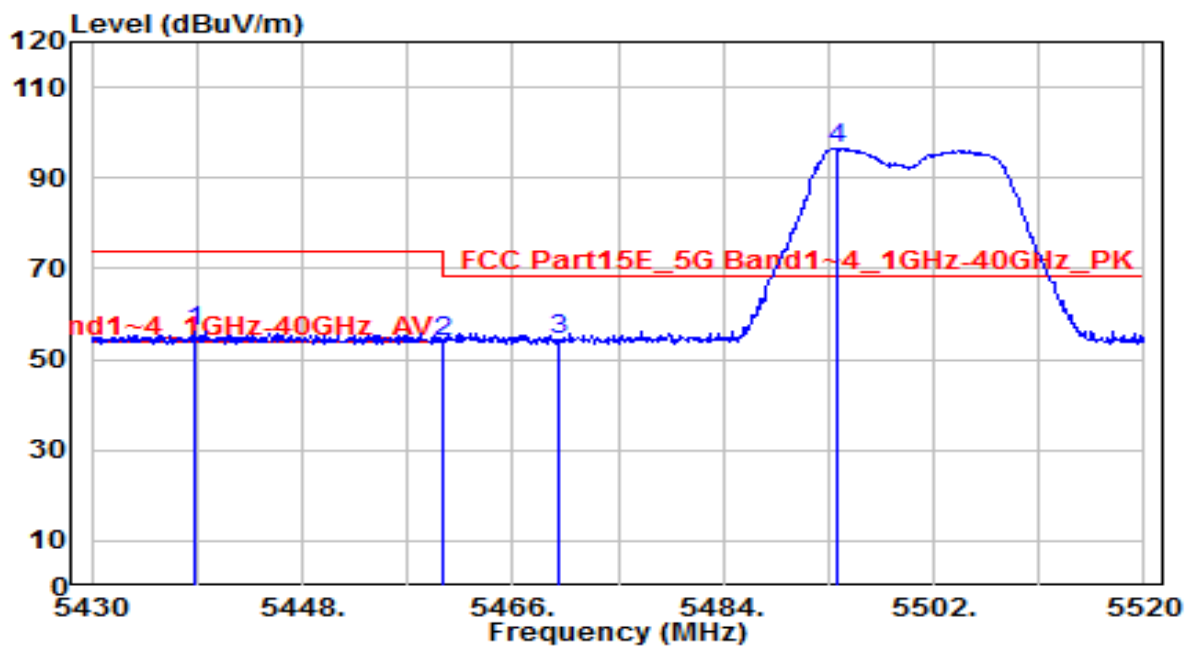


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5438.730	52.38	3.83	56.21	-17.79	74.00	175	275	Peak
2	5460.000	50.22	3.84	54.07	-14.13	68.20	175	275	Peak
3	* 5470.000	50.32	3.85	54.17	-14.03	68.20	175	275	Peak
4	5493.720	92.64	3.87	96.51	N/A	N/A	175	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

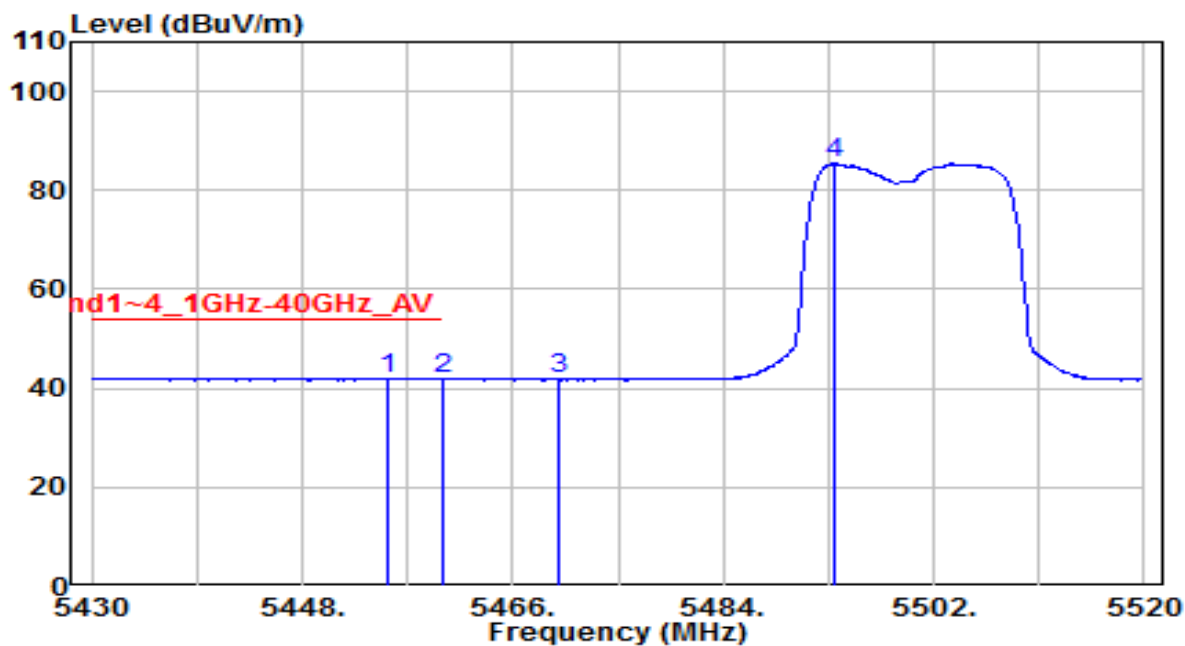


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.380	38.25	3.84	42.09	-11.91	54.00	175	275	Average
2		5460.000	37.90	3.84	41.74	-12.26	54.00	175	275	Average
3		5470.000	37.88	3.85	41.73	N/A	N/A	175	275	Average
4		5493.450	81.58	3.87	85.44	N/A	N/A	175	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

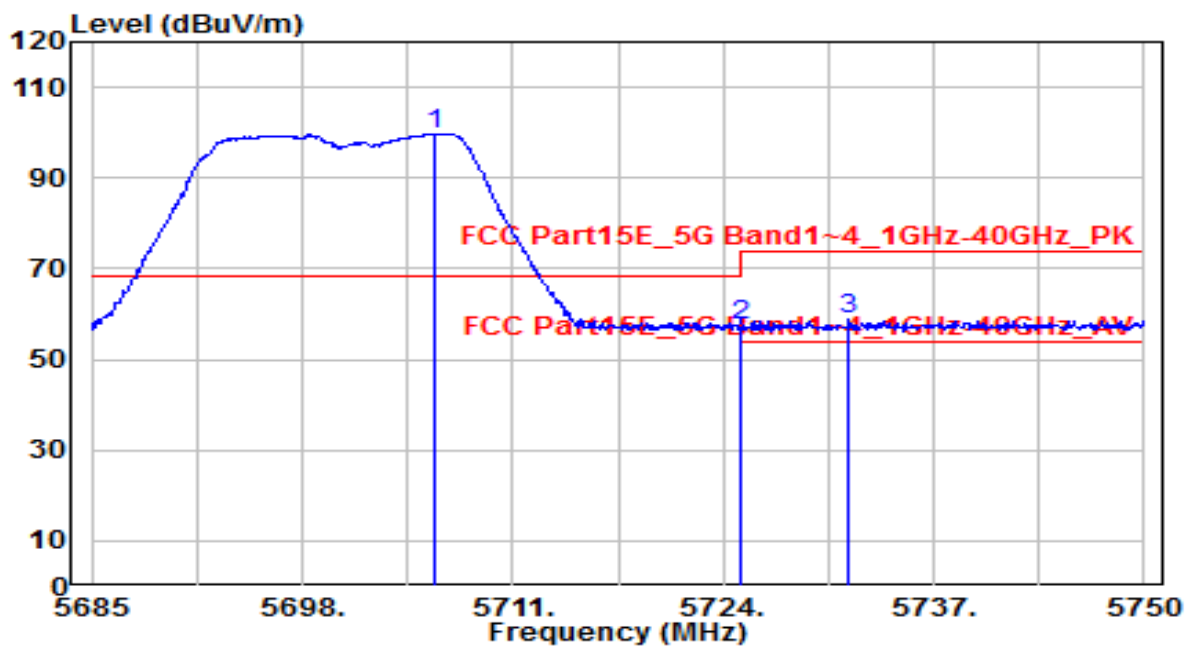


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.255	95.04	4.66	99.70	N/A	N/A	210	260	Peak
2	* 5725.000	52.62	4.73	57.36	-10.84	68.20	210	260	Peak
3	5731.735	54.06	4.76	58.82	-15.18	74.00	210	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

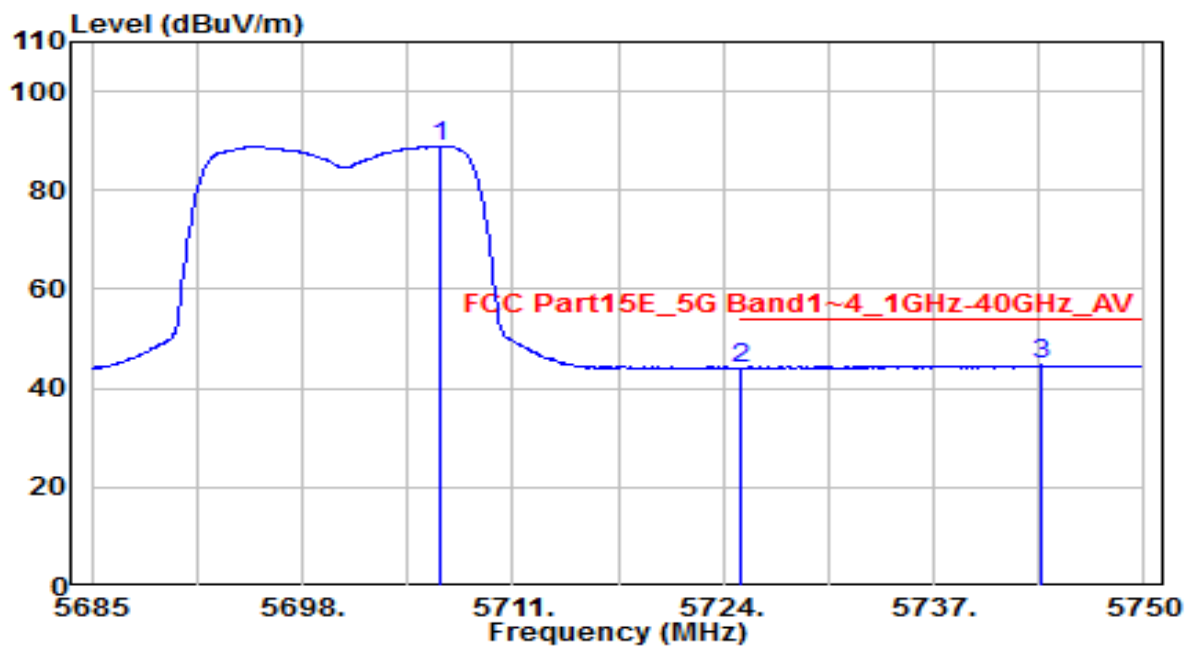


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.450	84.33	4.66	89.00	N/A	N/A	210	260	Average
2	5725.000	39.47	4.73	44.21	-9.79	54.00	210	260	Average
3	* 5743.695	39.84	4.81	44.64	-9.36	54.00	210	260	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

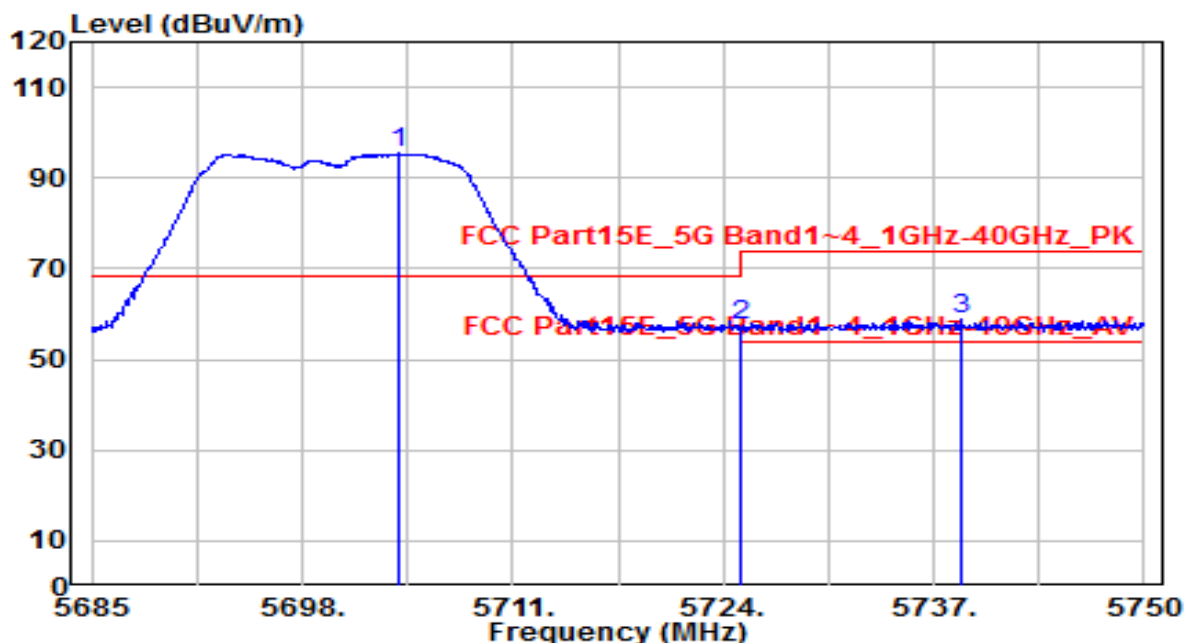


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.915	90.71	4.65	95.37	N/A	N/A	195	215	Peak
2	* 5725.000	52.96	4.73	57.70	-10.50	68.20	195	215	Peak
3	5738.755	53.90	4.79	58.69	-15.31	74.00	195	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

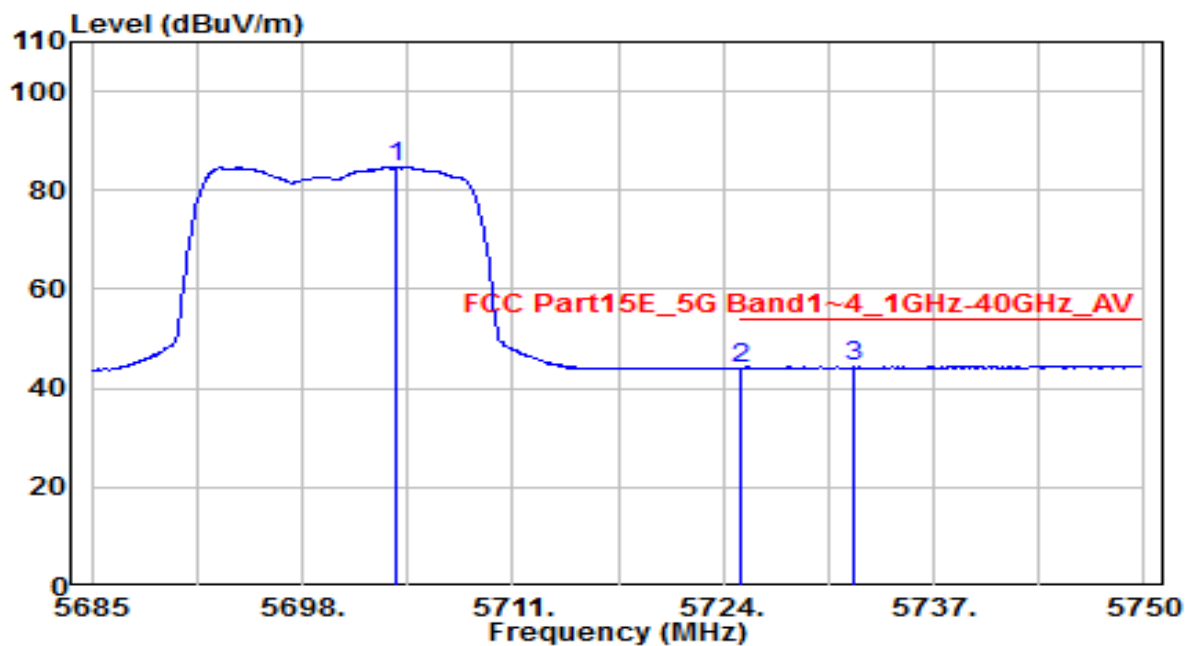


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.785	79.95	4.65	84.60	N/A	N/A	195	215	Average
2	5725.000	39.38	4.73	44.11	-9.89	54.00	195	215	Average
3	* 5732.125	39.70	4.76	44.46	-9.54	54.00	195	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

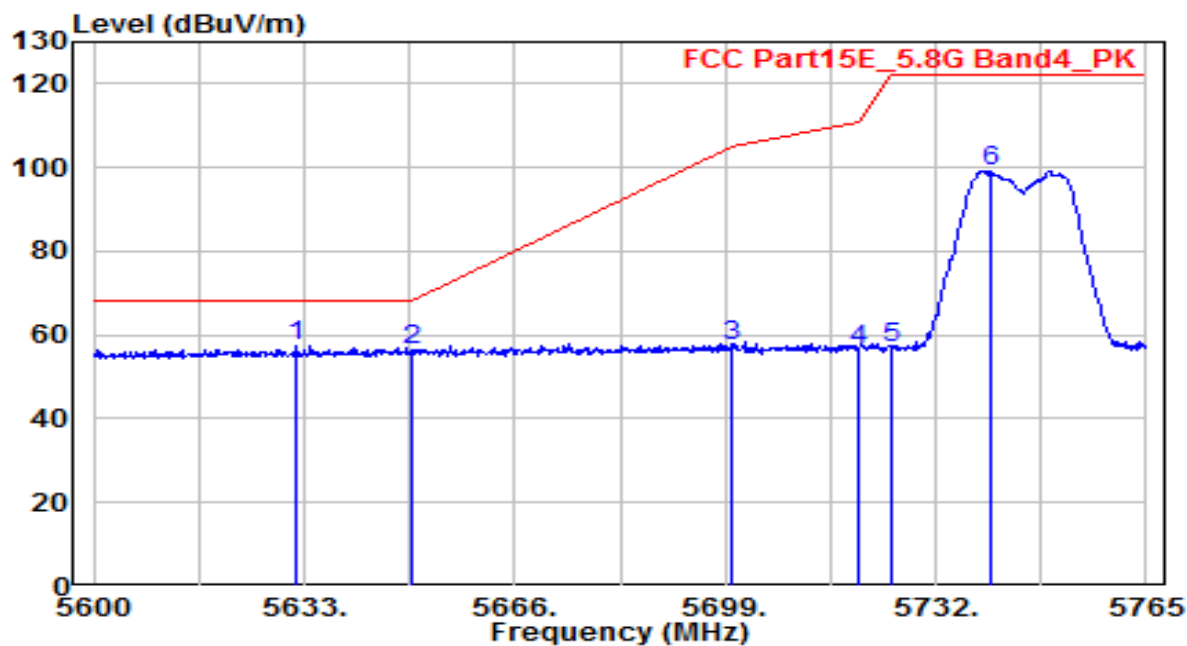


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5631.515	52.90	4.38	57.27	-10.93	68.20	205	220	Peak
2		5650.000	51.90	4.45	56.34	-11.86	68.20	205	220	Peak
3		5700.000	52.61	4.64	57.25	-47.95	105.20	205	220	Peak
4		5720.000	51.72	4.71	56.43	-54.37	110.80	205	220	Peak
5		5725.000	52.04	4.73	56.77	-65.43	122.20	205	220	Peak
6		5740.580	94.54	4.79	99.33	-22.87	122.20	205	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

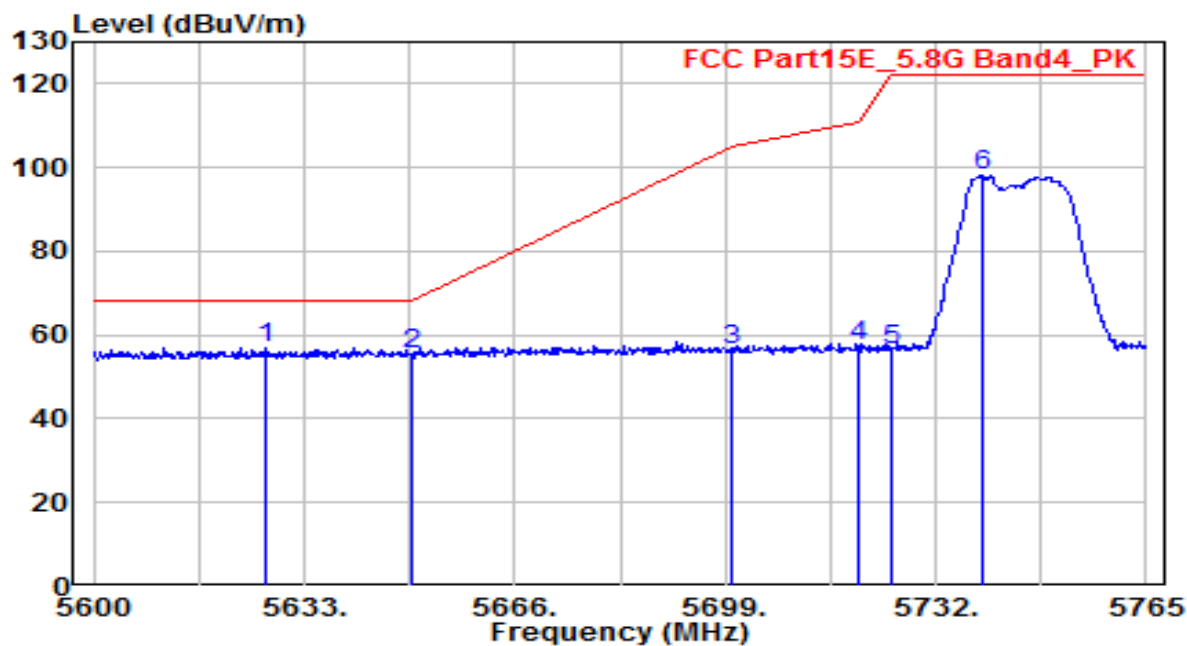


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5626.895	52.66	4.36	57.02	-11.18	68.20	195	210	Peak
2	5650.000	51.03	4.45	55.47	-12.73	68.20	195	210	Peak
3	5700.000	51.94	4.64	56.58	-48.62	105.20	195	210	Peak
4	5720.000	52.55	4.71	57.26	-53.54	110.80	195	210	Peak
5	5725.000	51.84	4.73	56.58	-65.62	122.20	195	210	Peak
6	5739.260	93.40	4.79	98.19	-24.01	122.20	195	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

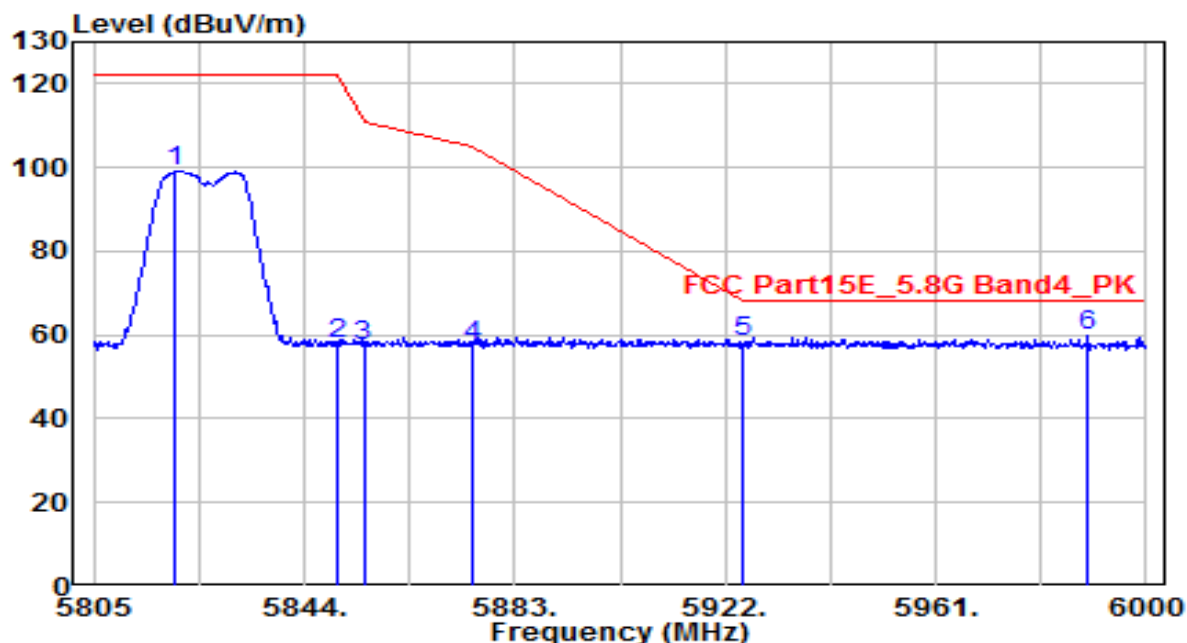


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.210	94.13	5.10	99.23	-22.97	122.20	175	220	Peak
2	5850.000	52.83	5.21	58.05	-64.15	122.20	175	220	Peak
3	5855.000	52.34	5.23	57.57	-53.23	110.80	175	220	Peak
4	5875.000	52.26	5.31	57.57	-47.63	105.20	175	220	Peak
5	5925.000	52.66	5.50	58.16	-10.04	68.20	175	220	Peak
6	* 5989.275	54.15	5.75	59.89	-8.31	68.20	175	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

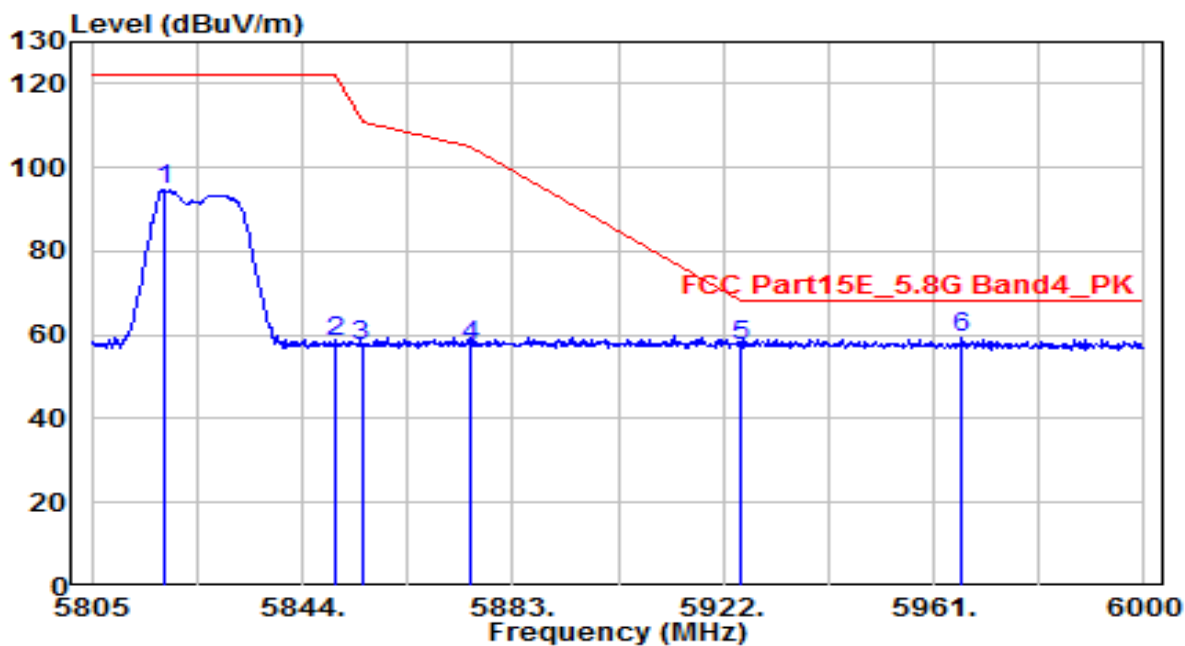


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.260	89.51	5.09	94.60	-27.60	122.20	195	195	Peak
2	5850.000	52.94	5.21	58.16	-64.04	122.20	195	195	Peak
3	5855.000	52.21	5.23	57.44	-53.36	110.80	195	195	Peak
4	5875.000	52.05	5.31	57.36	-47.84	105.20	195	195	Peak
5	5925.000	51.76	5.50	57.26	-10.94	68.20	195	195	Peak
6	* 5966.265	53.64	5.66	59.31	-8.89	68.20	195	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

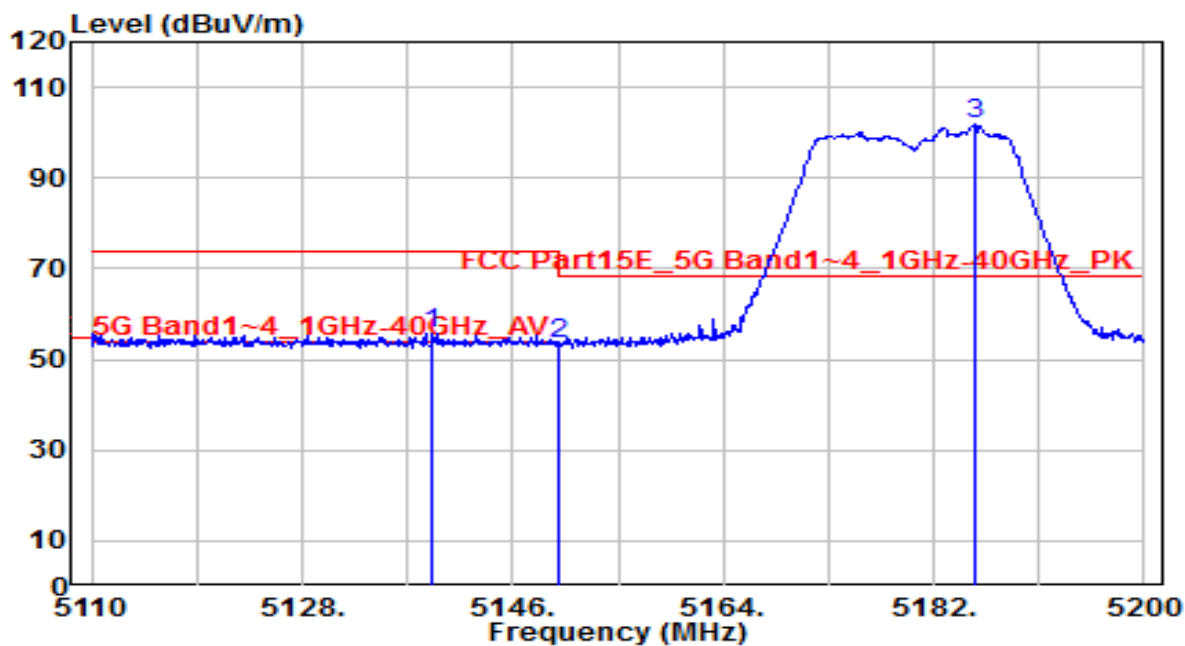


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5139.070	52.19	3.64	55.83	-18.17	74.00	190	260	Peak
2	5150.000	49.87	3.65	53.52	-14.68	68.20	190	260	Peak
3	5185.600	98.04	3.67	101.71	N/A	N/A	190	260	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

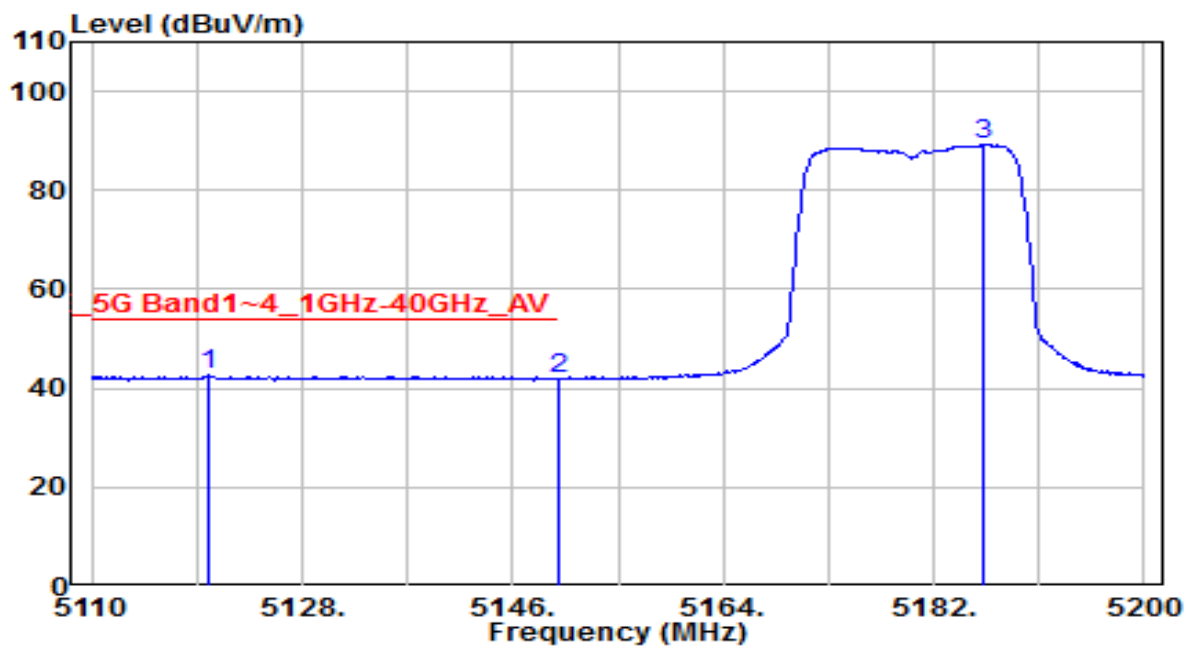


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5119.900	38.96	3.63	42.58	-11.42	54.00	190	260	Average
2		5150.000	38.08	3.65	41.72	-12.28	54.00	190	260	Average
3		5186.320	85.66	3.67	89.33	N/A	N/A	190	260	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

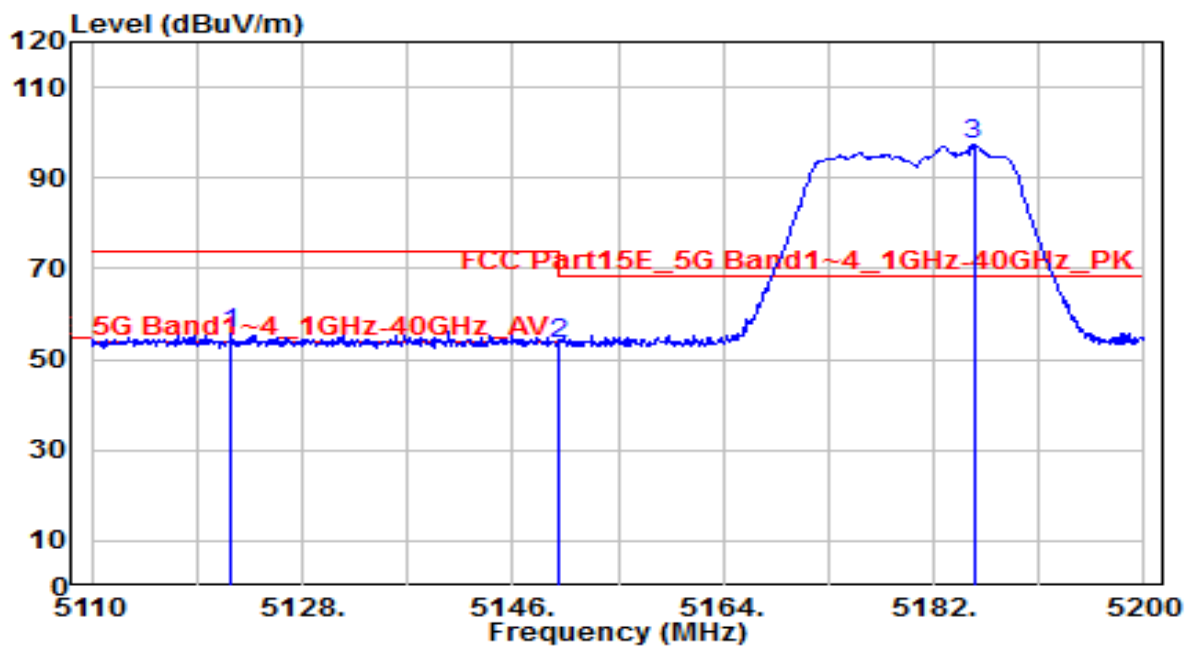


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5121.970	52.18	3.63	55.81	-18.19	74.00	150	305	Peak
2	* 5150.000	49.99	3.65	53.64	-14.56	68.20	150	305	Peak
3	5185.420	93.61	3.67	97.28	N/A	N/A	150	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

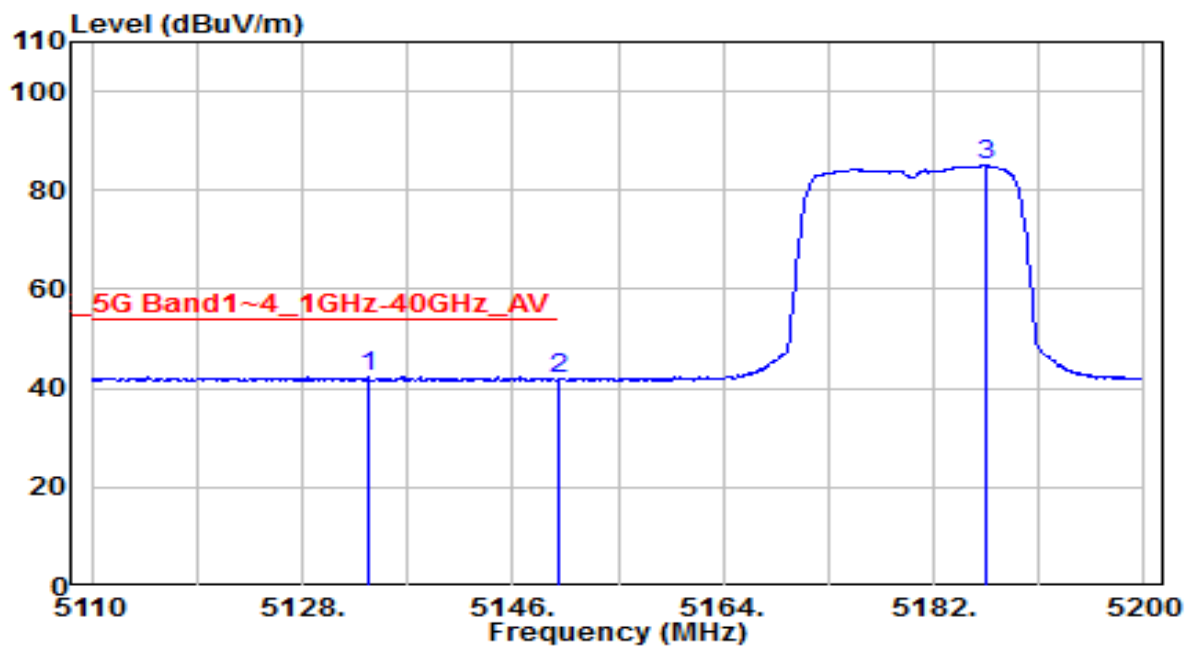


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5133.580	38.57	3.64	42.21	-11.79	54.00	150	305	Average
2		5150.000	38.10	3.65	41.74	-12.26	54.00	150	305	Average
3		5186.500	81.43	3.67	85.10	N/A	N/A	150	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

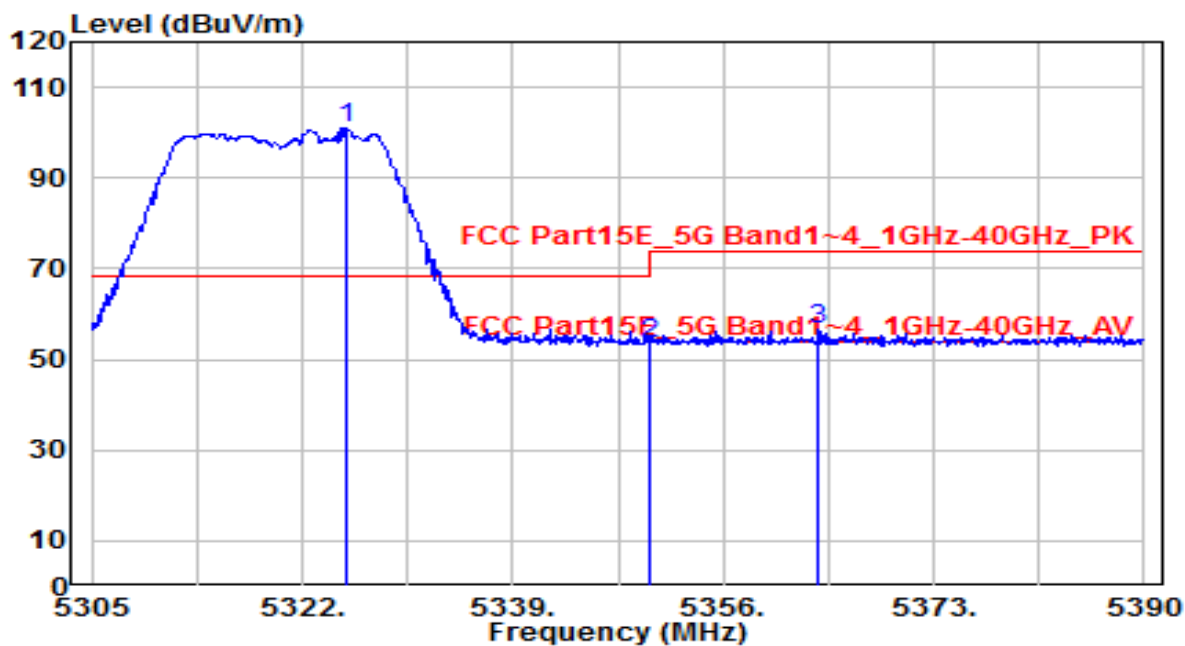


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5325.485	97.15	3.76	100.90	N/A	N/A	195	255	Peak
2	5350.000	49.76	3.77	53.54	-14.66	68.20	195	255	Peak
3	5363.650	52.78	3.78	56.57	-17.43	74.00	195	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

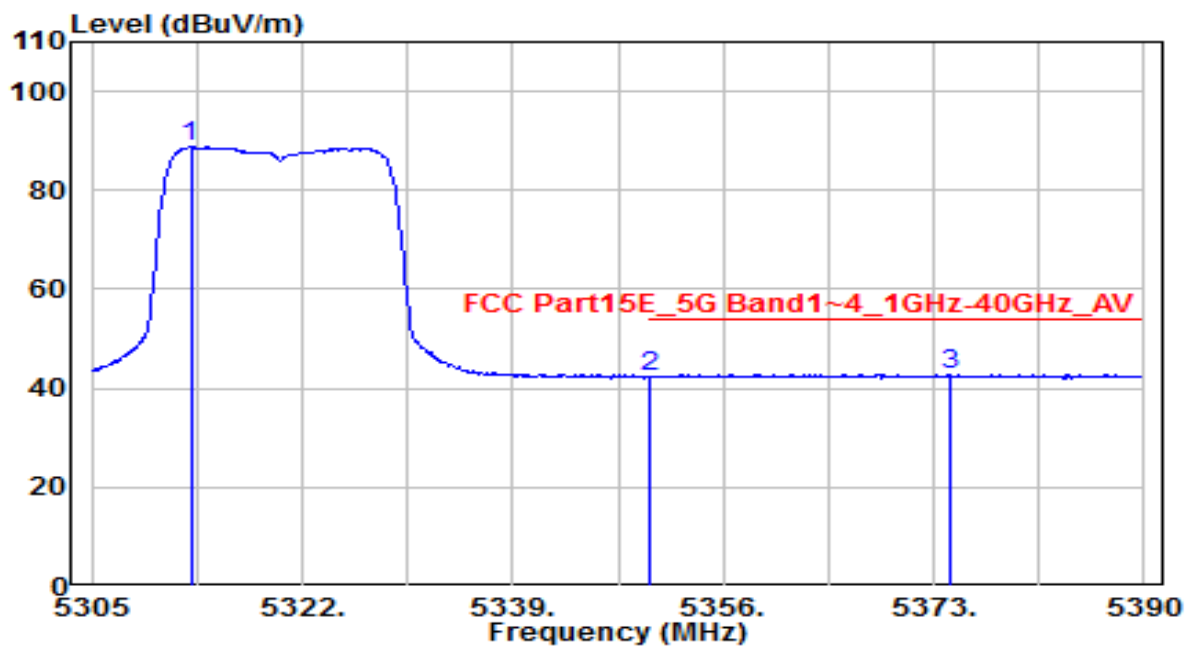


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.990	84.99	3.75	88.74	N/A	N/A	195	255	Average
2	5350.000	38.72	3.77	42.49	-11.51	54.00	195	255	Average
3	* 5374.360	39.08	3.79	42.87	-11.13	54.00	195	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

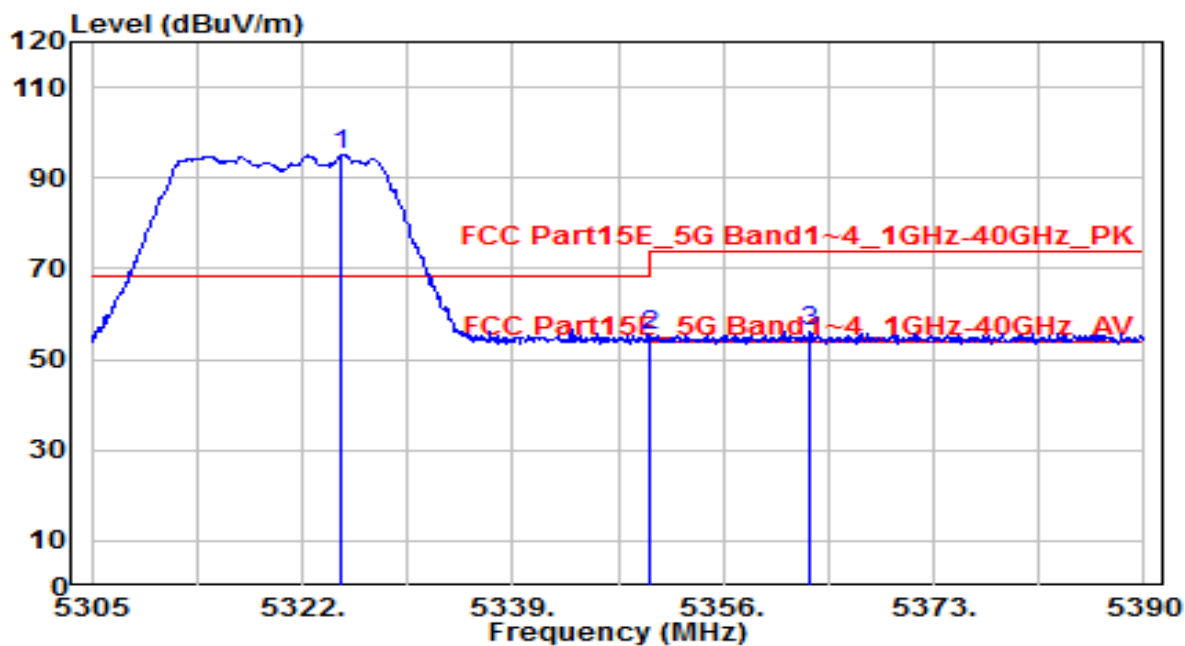


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.230	91.56	3.76	95.32	N/A	N/A	205	305	Peak
2	* 5350.000	51.68	3.77	55.45	-12.75	68.20	205	305	Peak
3	5363.055	52.33	3.78	56.12	-17.88	74.00	205	305	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

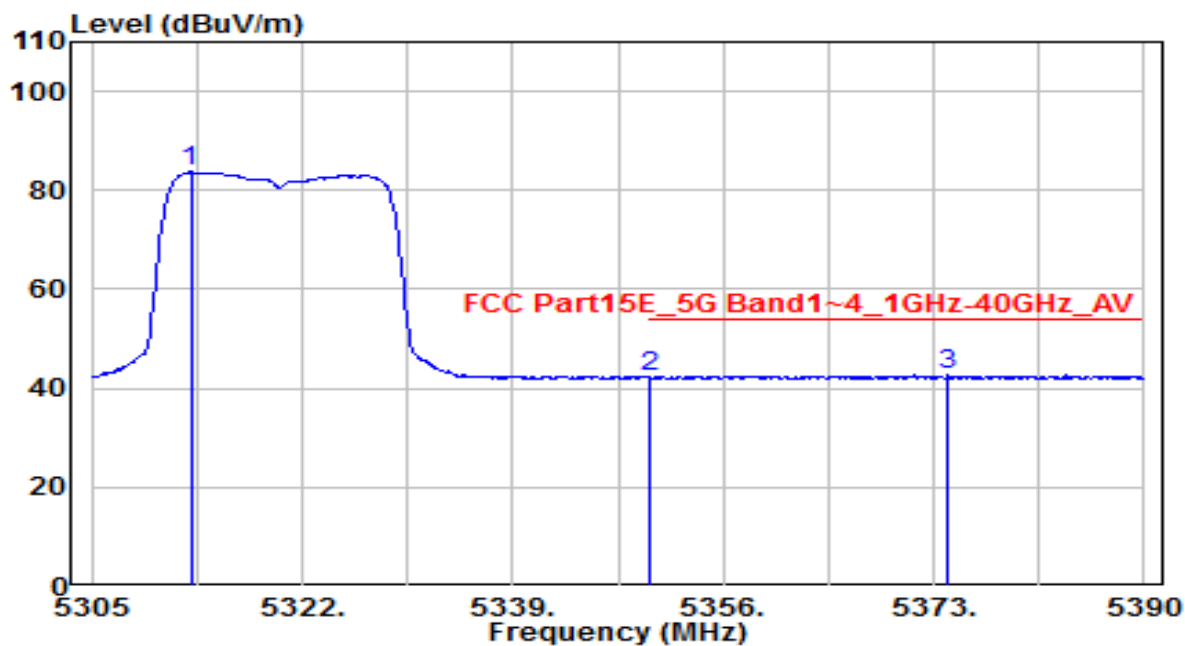


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.990	80.03	3.75	83.78	N/A	N/A	205	305	Average
2	5350.000	38.38	3.77	42.16	-11.84	54.00	205	305	Average
3	* 5374.190	38.96	3.79	42.75	-11.25	54.00	205	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

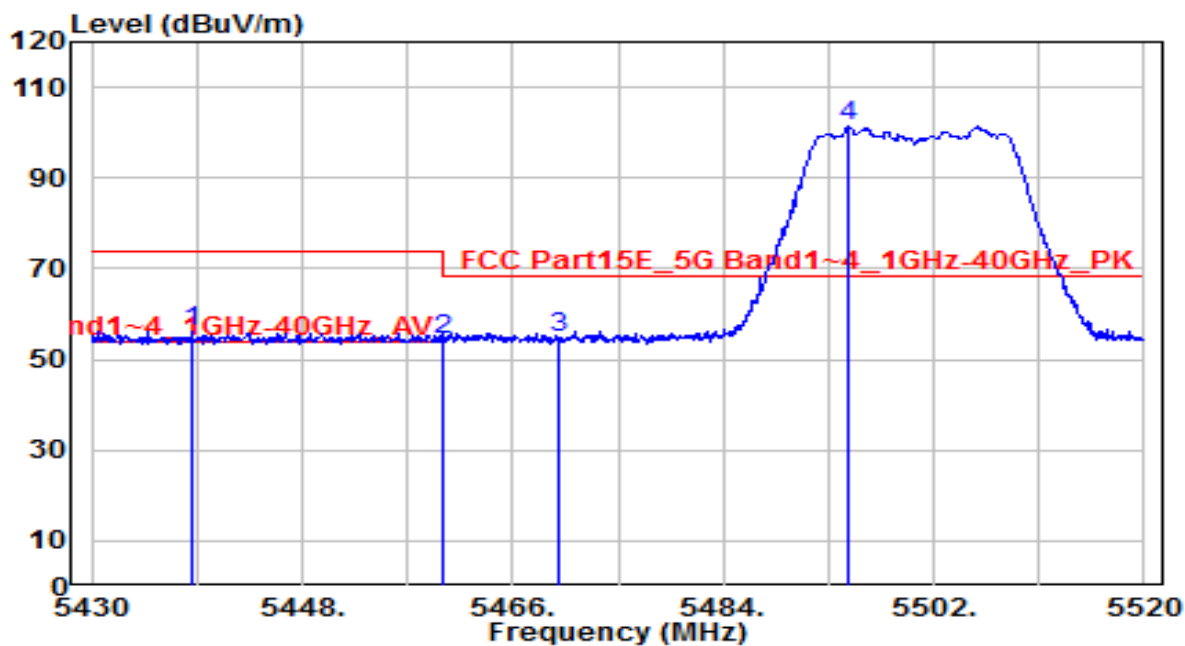


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5438.550	52.20	3.83	56.03	-17.97	74.00	230	195	Peak
2	5460.000	50.52	3.84	54.36	-13.84	68.20	230	195	Peak
3	* 5470.000	51.09	3.85	54.94	-13.26	68.20	230	195	Peak
4	5494.800	97.45	3.87	101.32	N/A	N/A	230	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

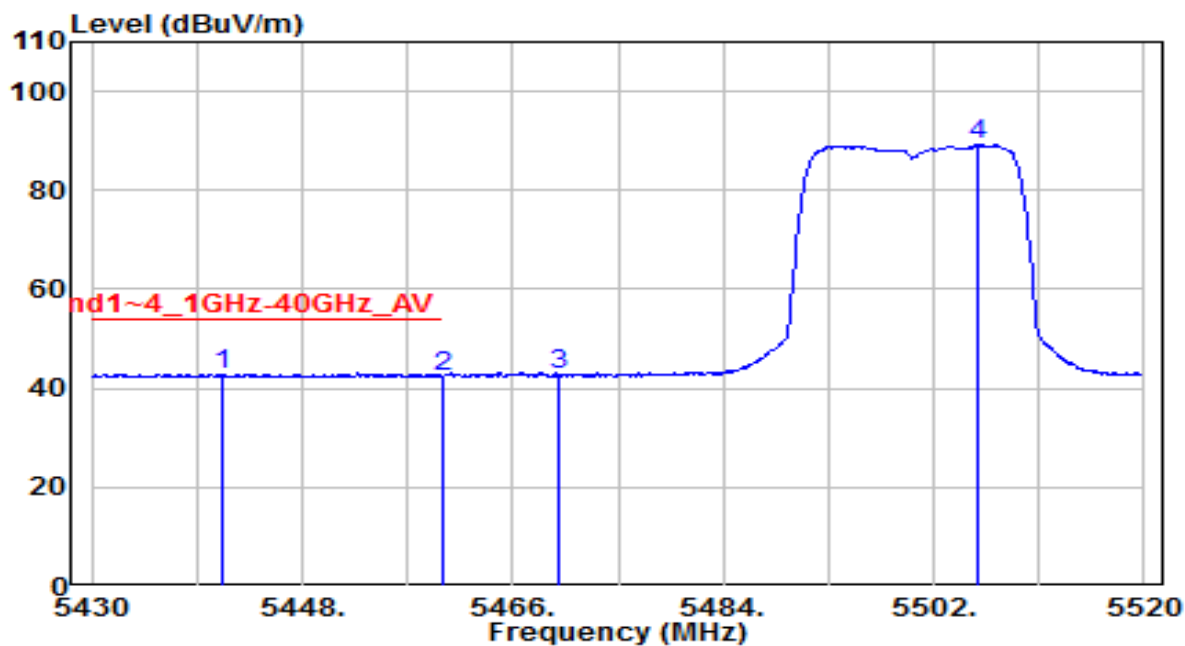


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5441.250	39.08	3.83	42.91	-11.09	54.00	230	195	Average
2		5460.000	38.64	3.84	42.49	-11.51	54.00	230	195	Average
3		5470.000	38.74	3.85	42.59	N/A	N/A	230	195	Average
4		5505.780	85.24	3.89	89.13	N/A	N/A	230	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

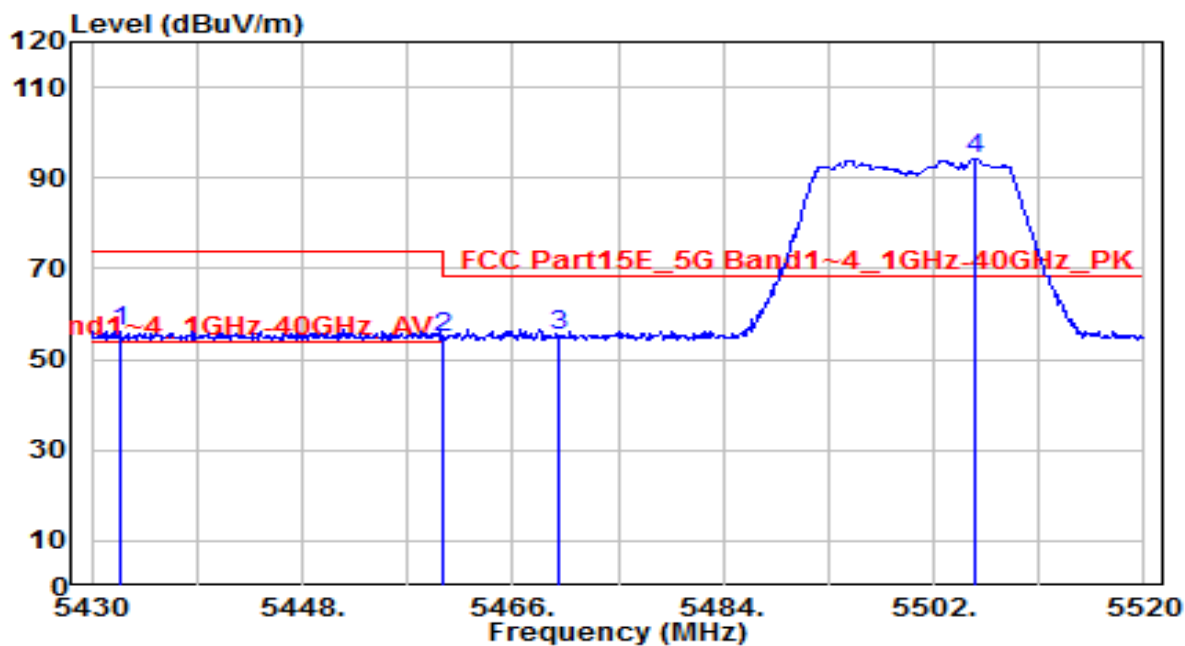


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5432.340	52.36	3.83	56.18	-17.82	74.00	150	250	Peak
2	5460.000	51.02	3.84	54.86	-13.34	68.20	150	250	Peak
3	* 5470.000	51.50	3.85	55.35	-12.85	68.20	150	250	Peak
4	5505.510	90.40	3.89	94.29	N/A	N/A	150	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

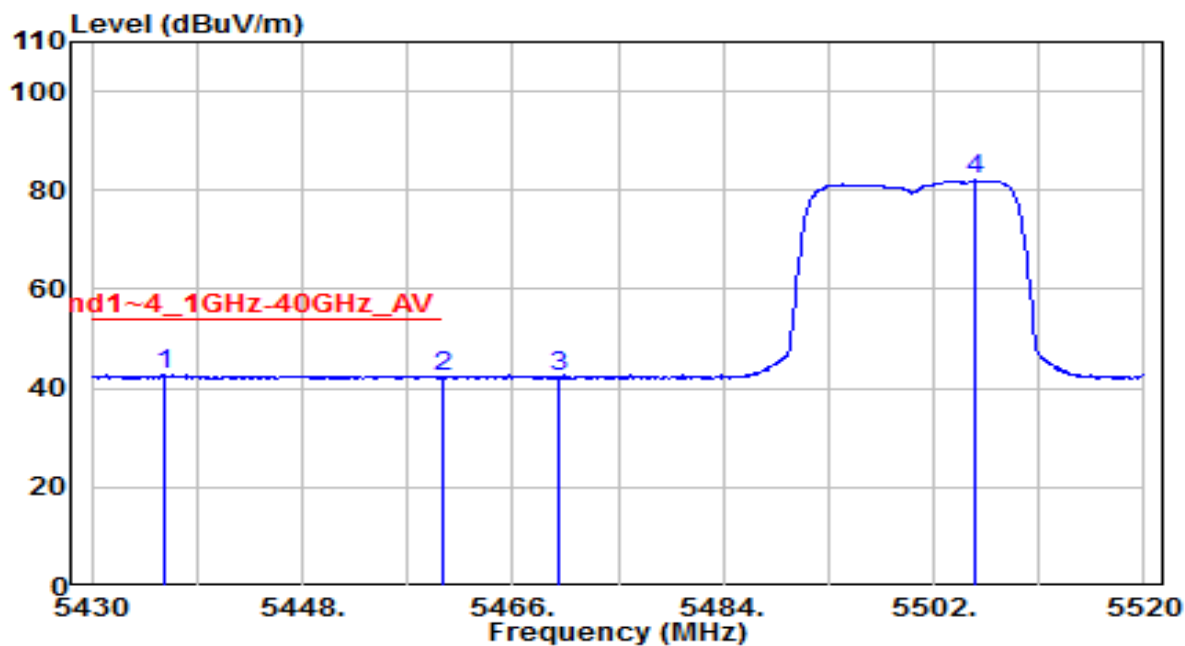


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5436.300	38.80	3.83	42.62	-11.38	54.00	150	250	Average
2		5460.000	38.39	3.84	42.23	-11.77	54.00	150	250	Average
3		5470.000	38.55	3.85	42.40	N/A	N/A	150	250	Average
4		5505.600	78.12	3.89	82.02	N/A	N/A	150	250	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

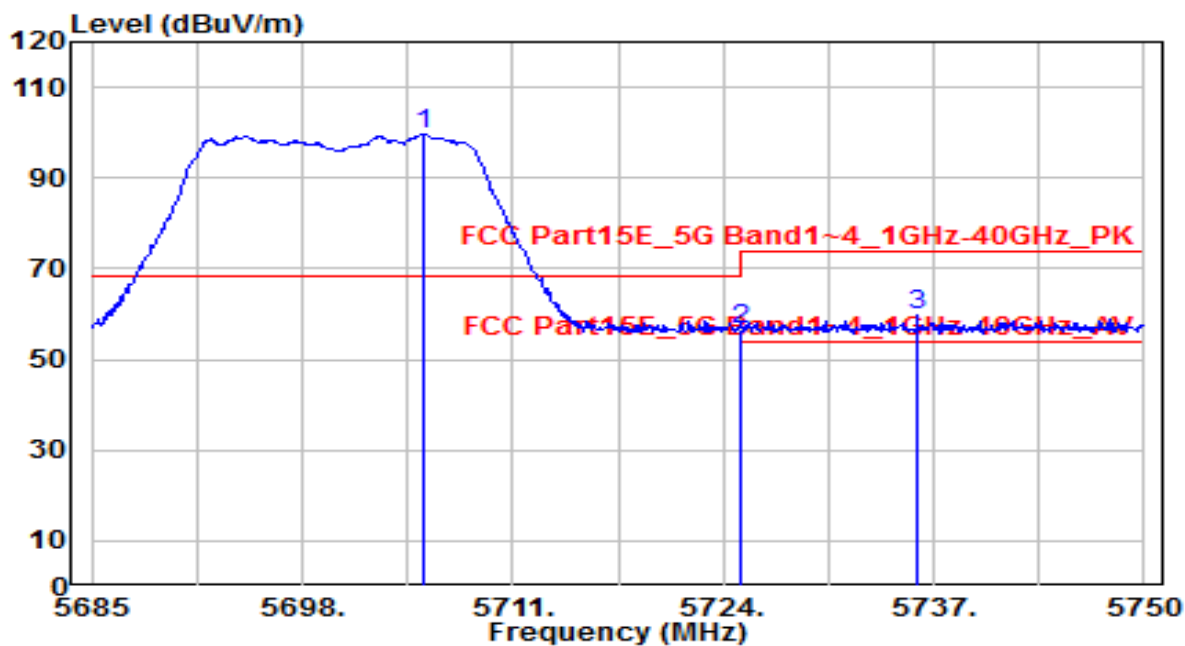


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.475	94.99	4.66	99.65	N/A	N/A	200	200	Peak
2	* 5725.000	51.70	4.73	56.44	-11.76	68.20	200	200	Peak
3	5735.960	55.17	4.78	59.95	-14.05	74.00	200	200	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

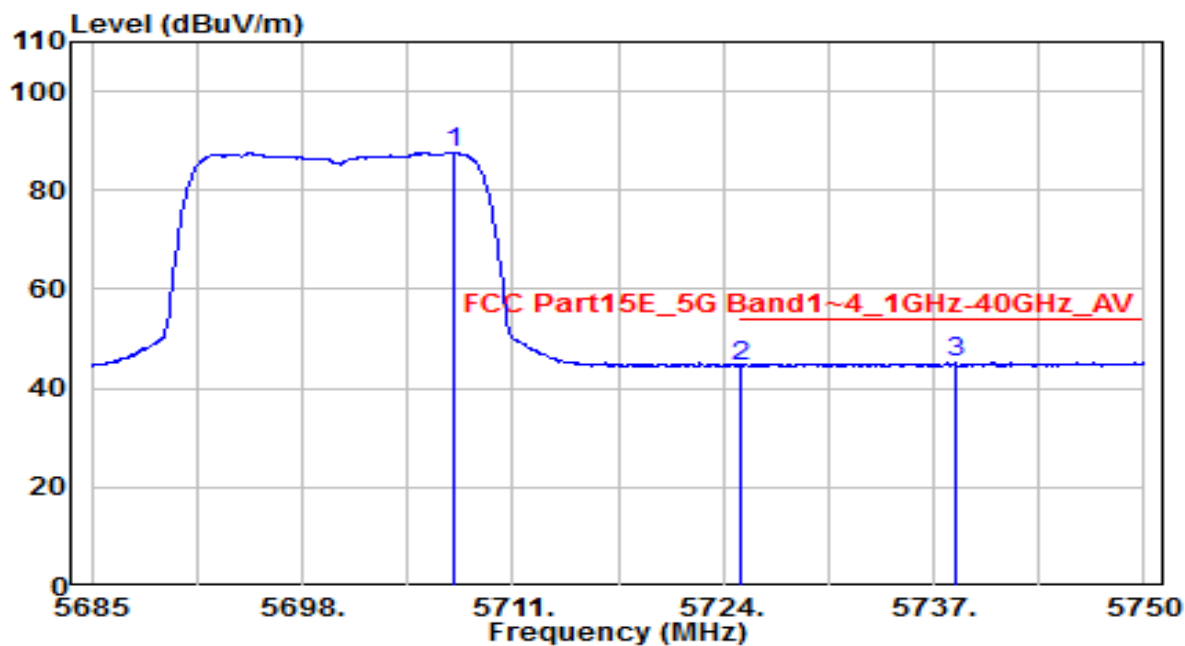


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.360	82.94	4.67	87.60	N/A	N/A	200	200	Average
2	5725.000	39.86	4.73	44.59	-9.41	54.00	200	200	Average
3	* 5738.300	40.27	4.79	45.05	-8.95	54.00	200	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

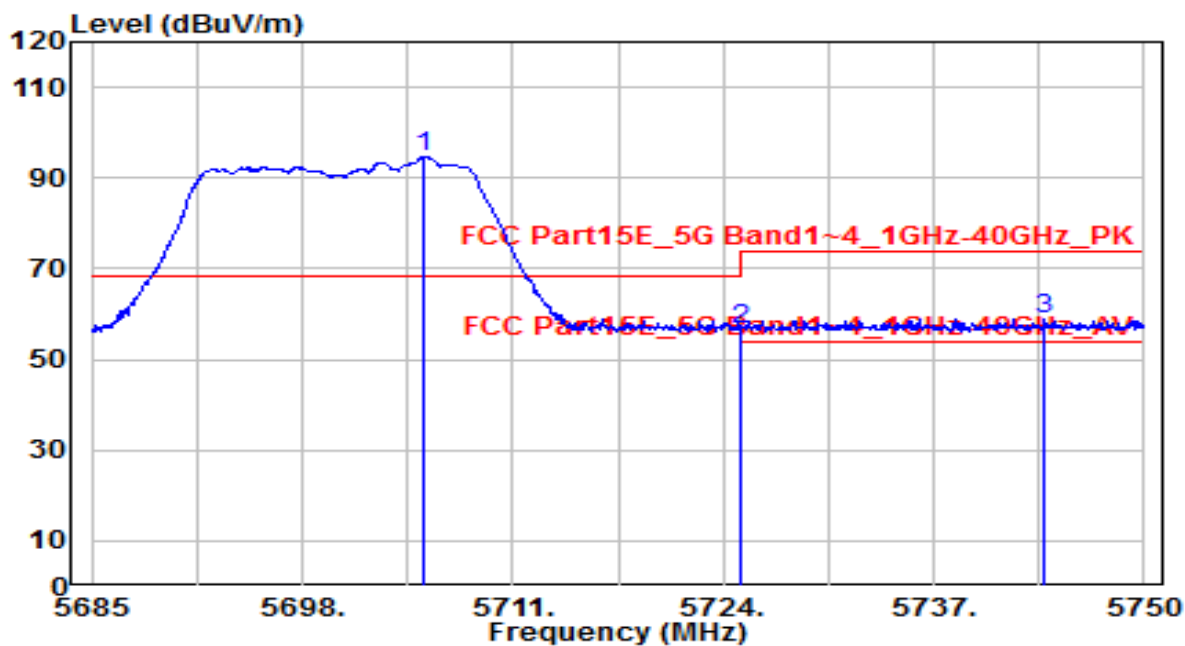


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.540	89.95	4.66	94.61	N/A	N/A	195	215	Peak
2	* 5725.000	51.65	4.73	56.38	-11.82	68.20	195	215	Peak
3	5743.890	54.26	4.81	59.07	-14.93	74.00	195	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

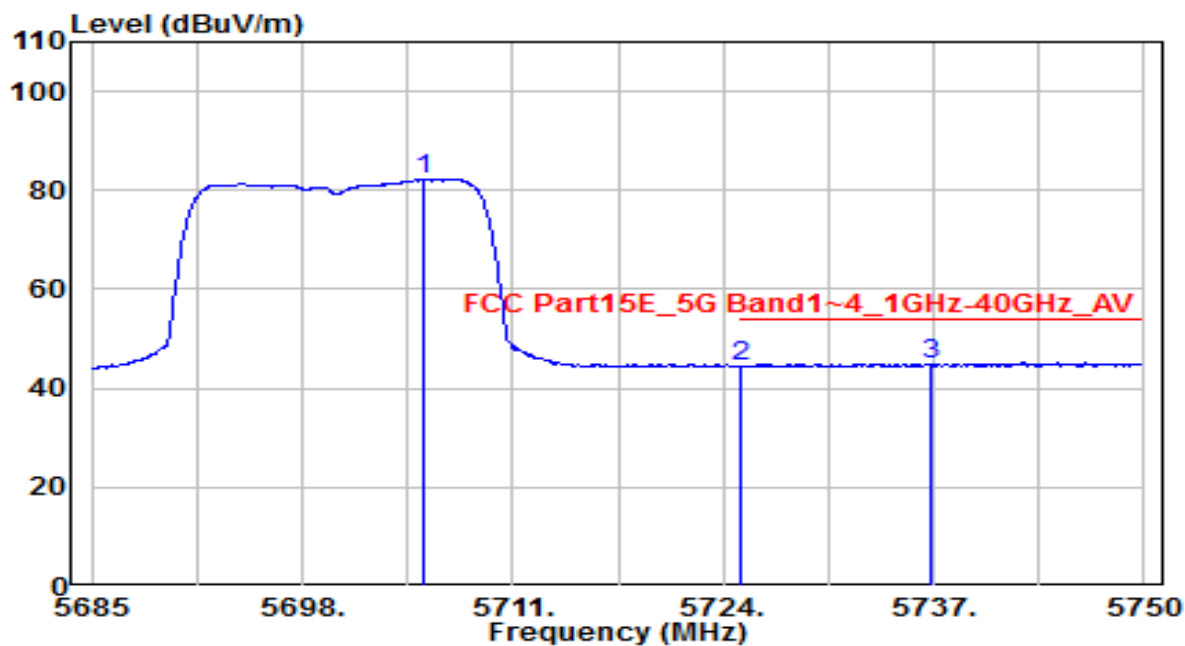


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.475	77.61	4.66	82.27	N/A	N/A	195	215	Average
2	5725.000	39.69	4.73	44.43	-9.57	54.00	195	215	Average
3	* 5736.805	40.14	4.78	44.92	-9.08	54.00	195	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

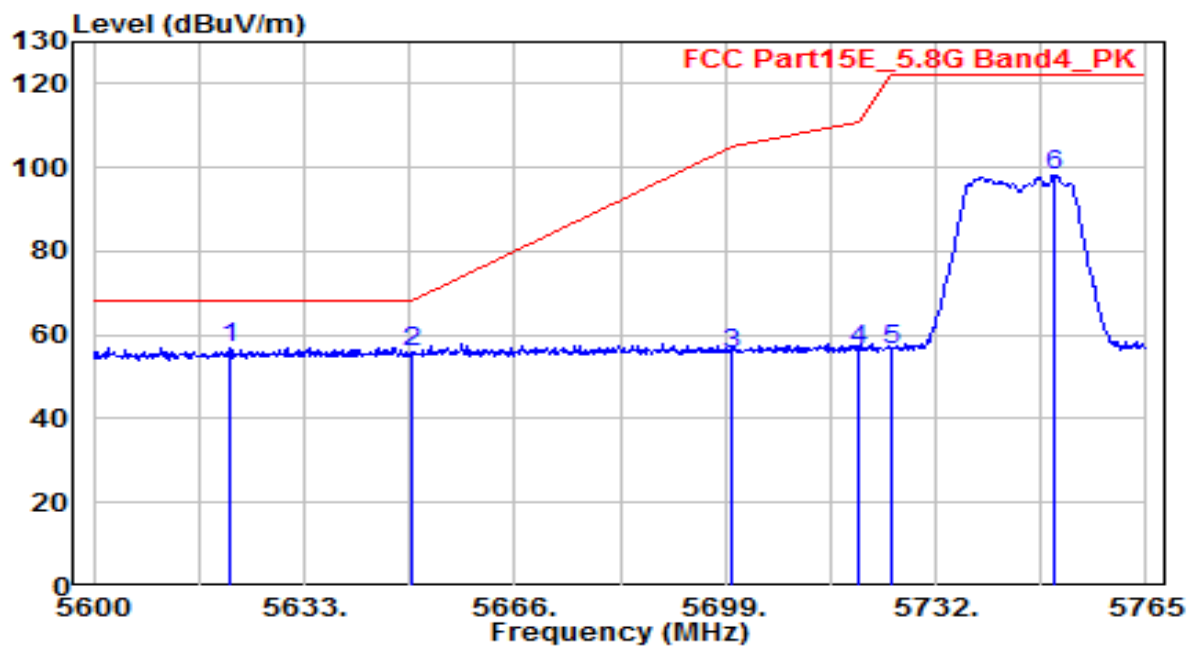


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5621.450	52.77	4.34	57.11	-11.09	68.20	220	200	Peak
2	5650.000	51.63	4.45	56.08	-12.12	68.20	220	200	Peak
3	5700.000	50.94	4.64	55.58	-49.62	105.20	220	200	Peak
4	5720.000	51.70	4.71	56.42	-54.38	110.80	220	200	Peak
5	5725.000	51.67	4.73	56.41	-65.79	122.20	220	200	Peak
6	5750.480	93.52	4.83	98.36	-23.84	122.20	220	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

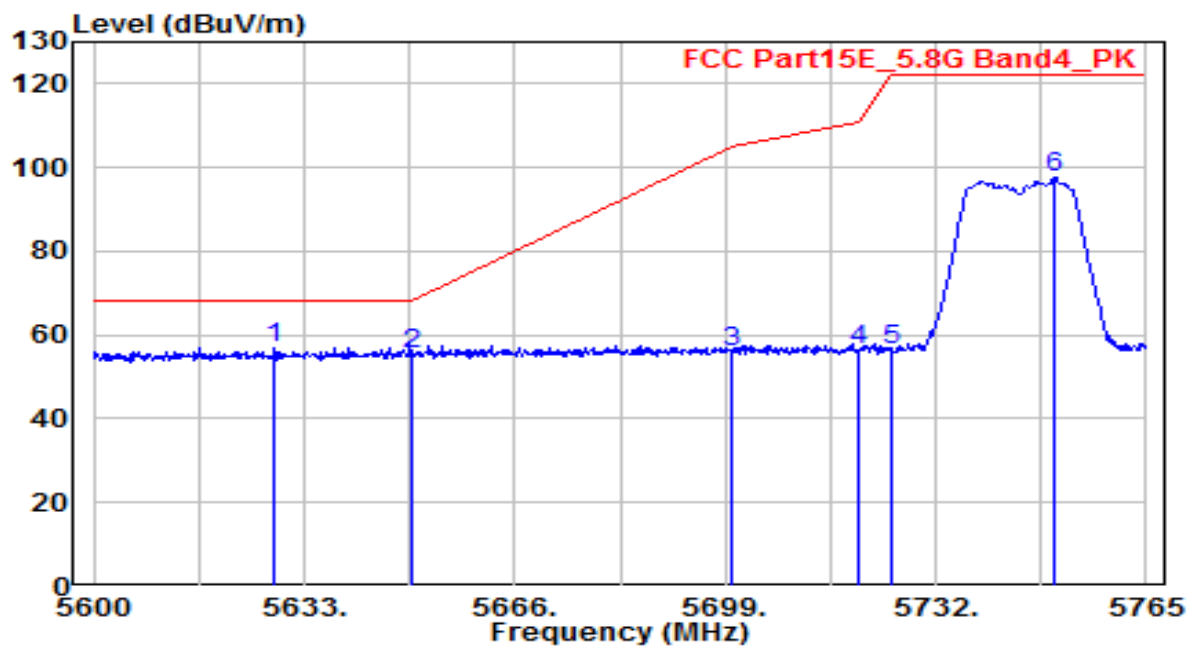


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.215	52.42	4.36	56.78	-11.42	68.20	215	210	Peak
2		5650.000	50.81	4.45	55.25	-12.95	68.20	215	210	Peak
3		5700.000	51.36	4.64	56.00	-49.20	105.20	215	210	Peak
4		5720.000	51.94	4.71	56.66	-54.14	110.80	215	210	Peak
5		5725.000	51.88	4.73	56.61	-65.59	122.20	215	210	Peak
6		5750.645	92.66	4.83	97.49	-24.71	122.20	215	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

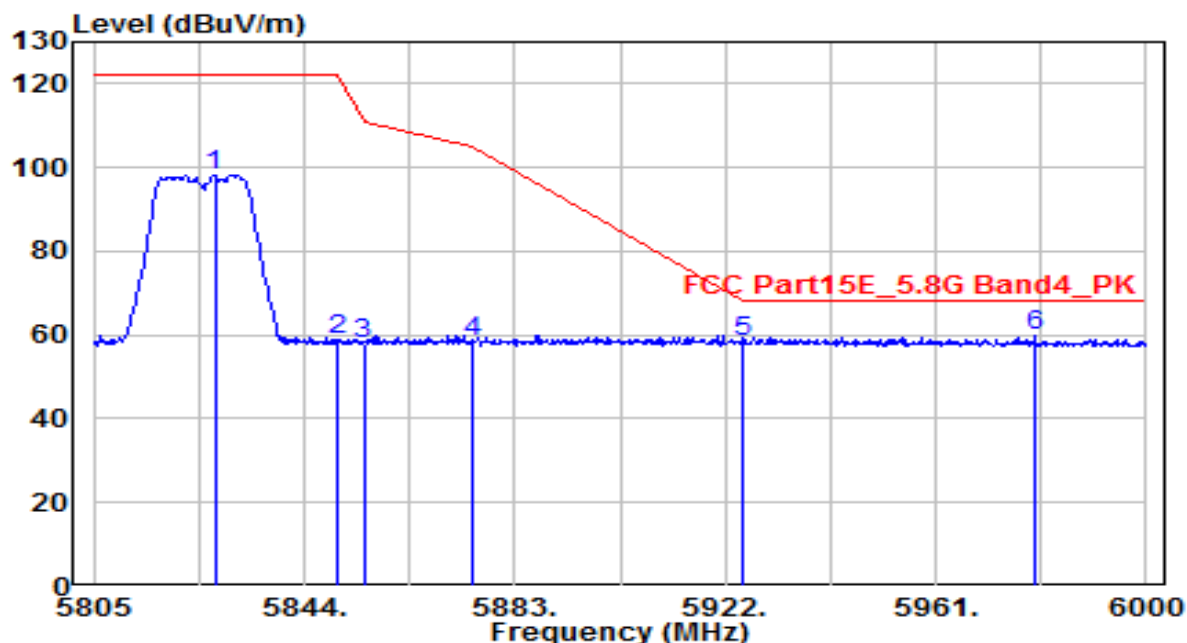


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.425	93.12	5.13	98.25	-23.95	122.20	160	220	Peak
2	5850.000	53.55	5.21	58.76	-63.44	122.20	160	220	Peak
3	5855.000	52.87	5.23	58.11	-52.69	110.80	160	220	Peak
4	5875.000	52.86	5.31	58.17	-47.03	105.20	160	220	Peak
5	5925.000	52.63	5.50	58.13	-10.07	68.20	160	220	Peak
6	* 5979.330	53.93	5.71	59.64	-8.56	68.20	160	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

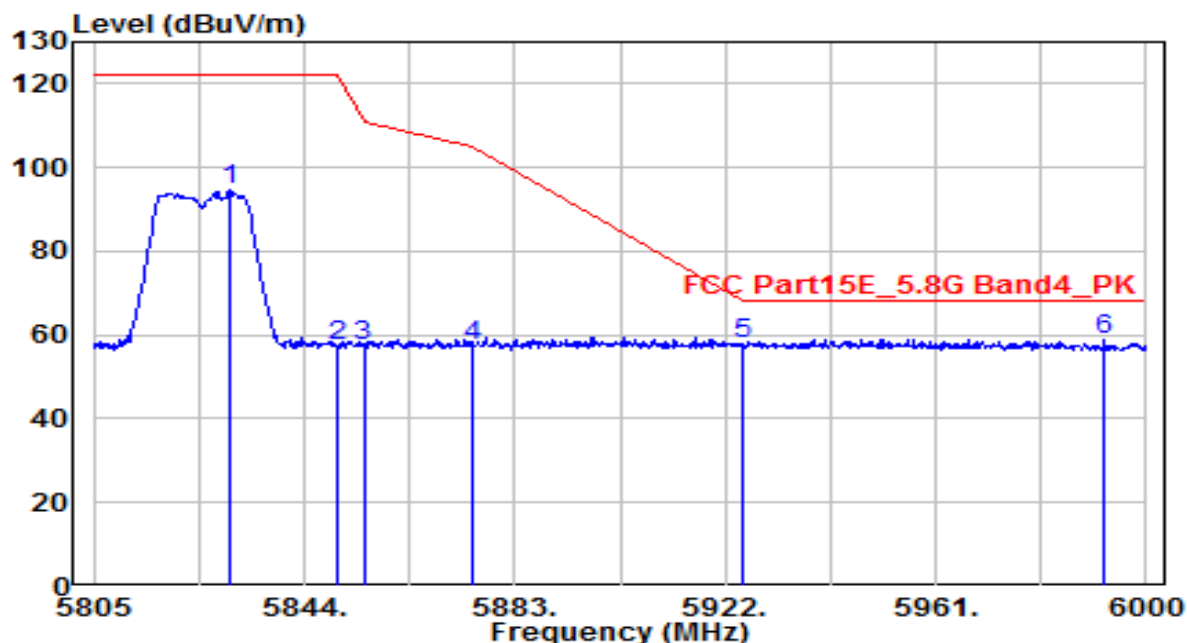


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.350	89.40	5.14	94.53	-27.67	122.20	180	190	Peak
2	5850.000	51.94	5.21	57.15	-65.05	122.20	180	190	Peak
3	5855.000	51.98	5.23	57.21	-53.59	110.80	180	190	Peak
4	5875.000	51.89	5.31	57.20	-48.00	105.20	180	190	Peak
5	5925.000	52.47	5.50	57.97	-10.23	68.20	180	190	Peak
6	* 5992.200	53.18	5.76	58.94	-9.26	68.20	180	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

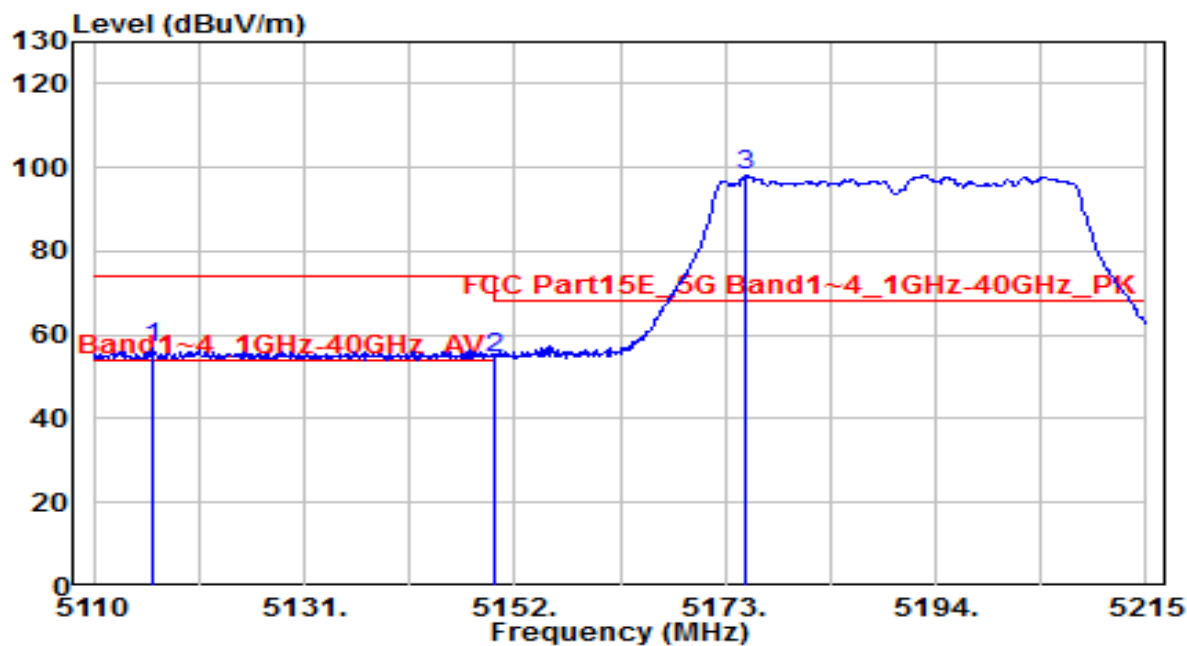


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5115.775	52.97	3.87	56.84	-17.16	74.00	180	260	Peak
2	* 5150.000	50.63	3.91	54.54	-13.66	68.20	180	260	Peak
3	5175.100	94.17	3.93	98.10	N/A	N/A	180	260	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

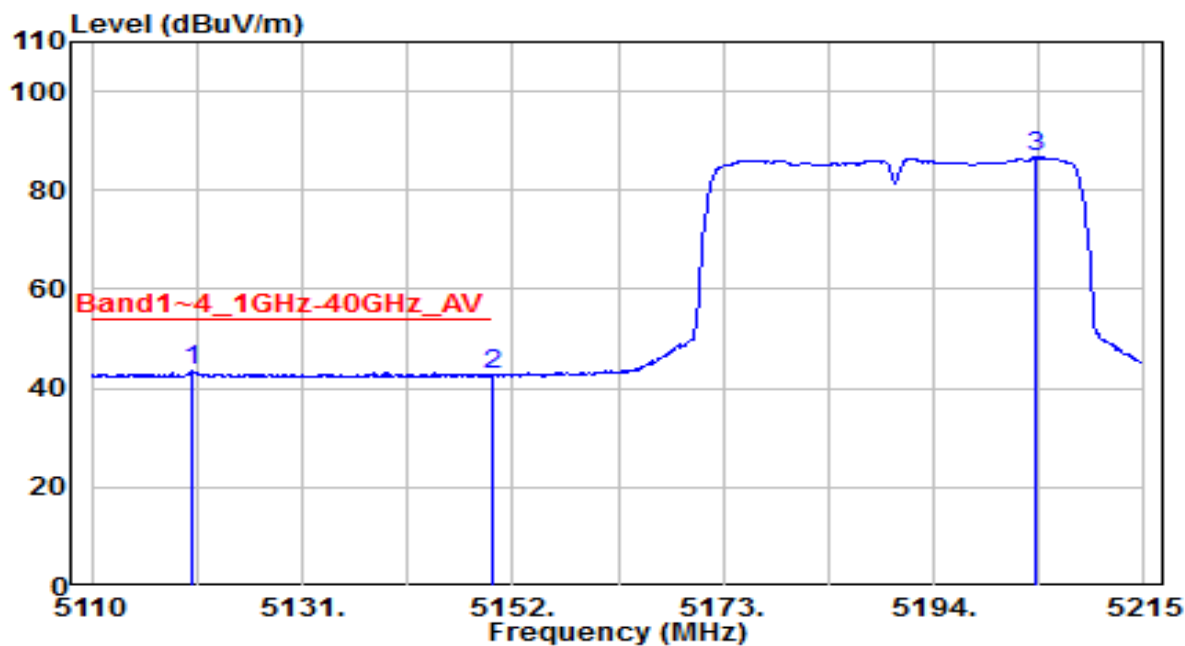


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5120.080	39.63	3.87	43.51	-10.49	54.00	180	260	Average
2		5150.000	38.90	3.91	42.81	-11.19	54.00	180	260	Average
3		5204.080	82.73	3.96	86.69	N/A	N/A	160	260	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

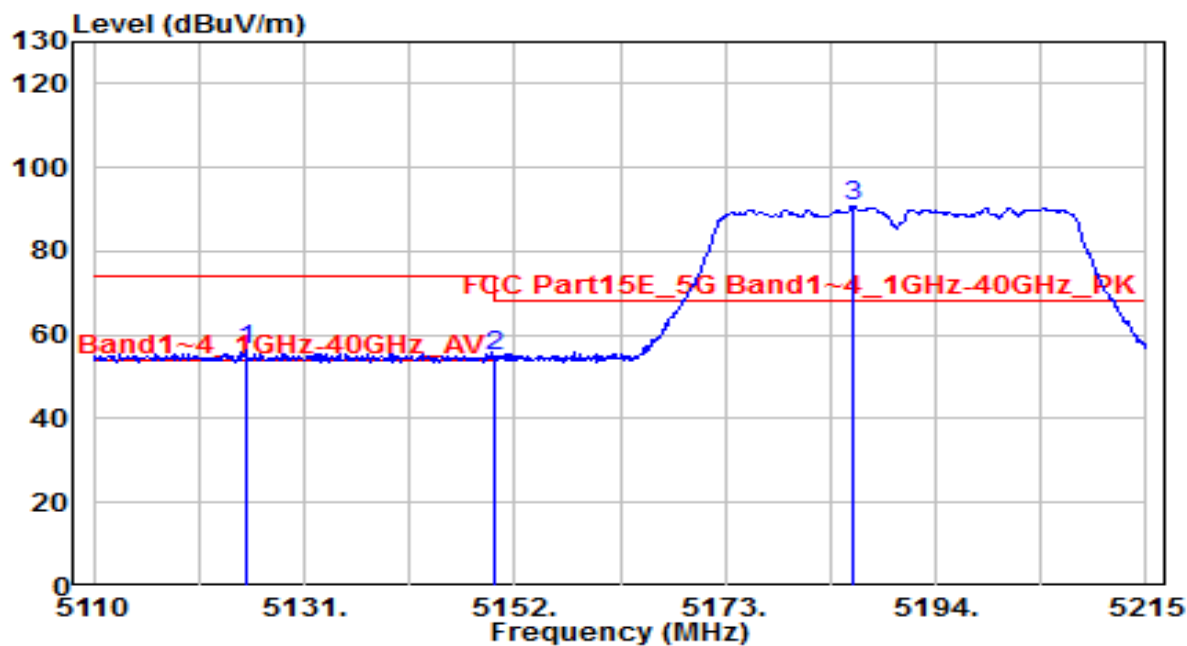


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5125.120	52.34	3.88	56.22	-17.78	74.00	220	275	Peak
2	* 5150.000	50.89	3.91	54.79	-13.41	68.20	220	275	Peak
3	5185.810	86.97	3.94	90.91	N/A	N/A	220	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

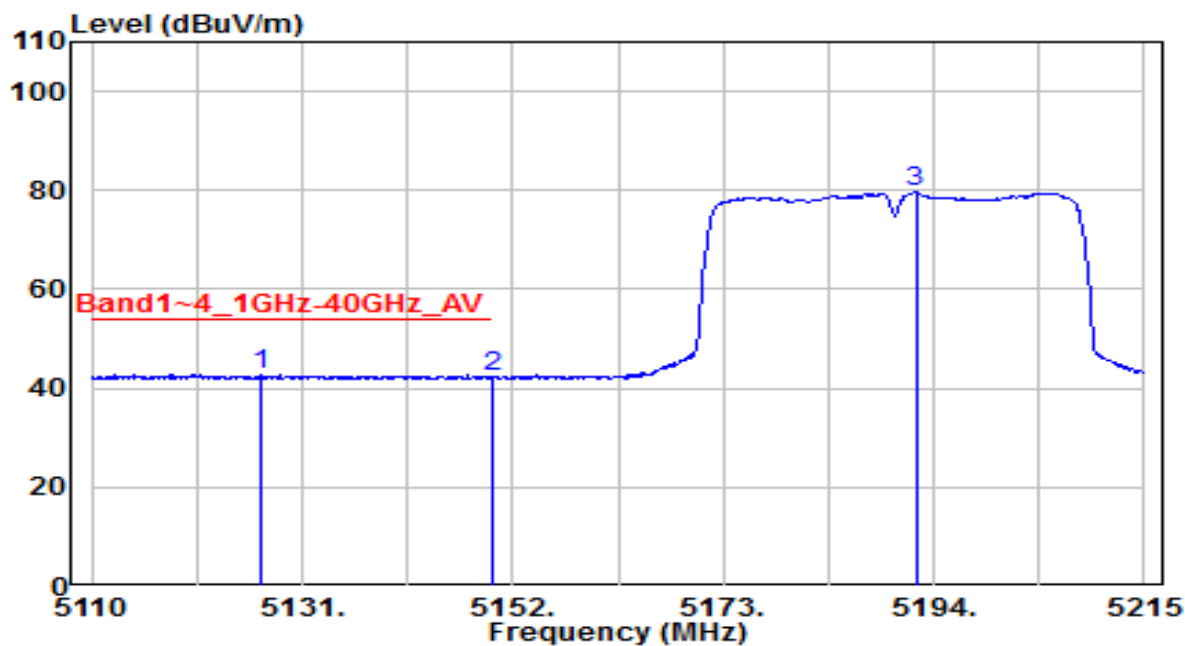


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5126.800	38.82	3.88	42.70	-11.30	54.00	220	275	Average
2	5150.000	38.25	3.91	42.16	-11.84	54.00	220	275	Average
3	5192.215	75.77	3.95	79.72	N/A	N/A	220	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

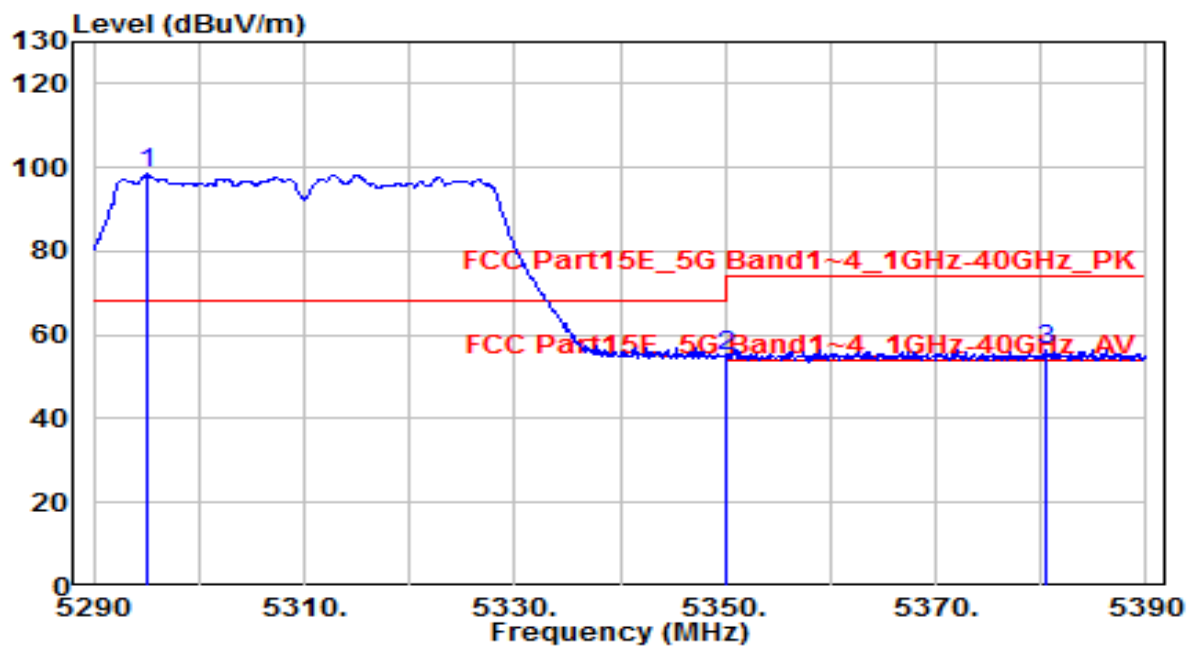


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.100	94.32	4.06	98.37	N/A	N/A	190	260	Peak
2	* 5350.000	50.64	4.11	54.76	-13.44	68.20	190	260	Peak
3	5380.600	52.23	4.15	56.37	-17.63	74.00	190	260	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

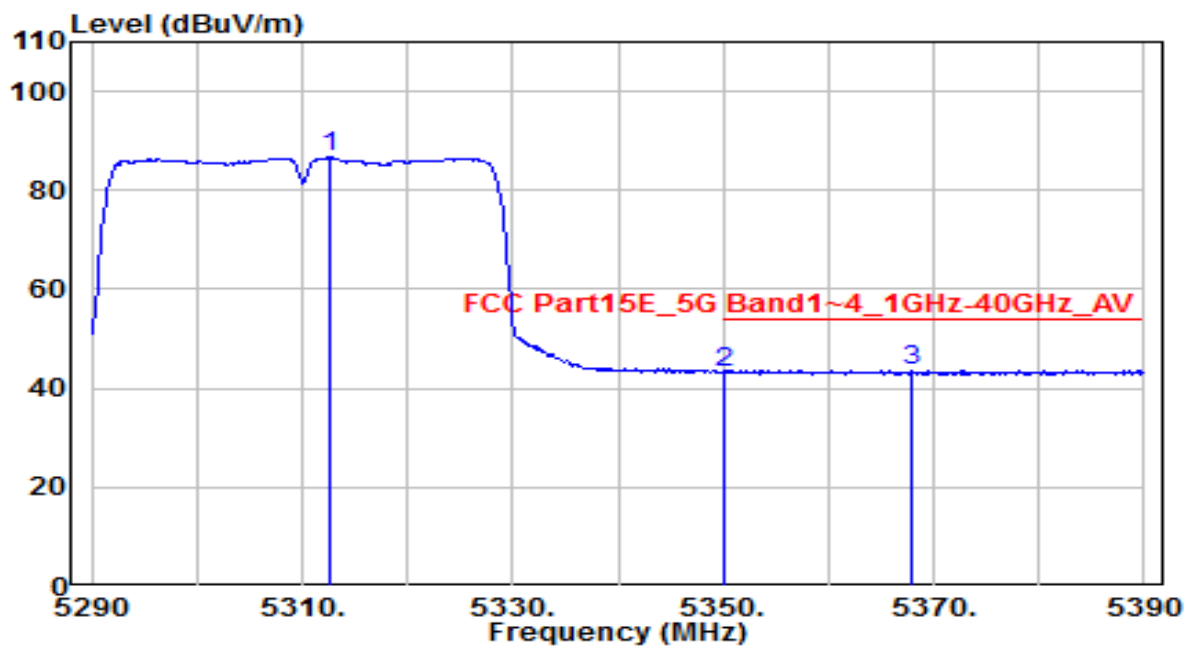


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.600	82.72	4.08	86.80	N/A	N/A	190	260	Average
2	5350.000	39.09	4.11	43.20	-10.80	54.00	190	260	Average
3	* 5367.900	39.49	4.13	43.62	-10.38	54.00	190	260	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

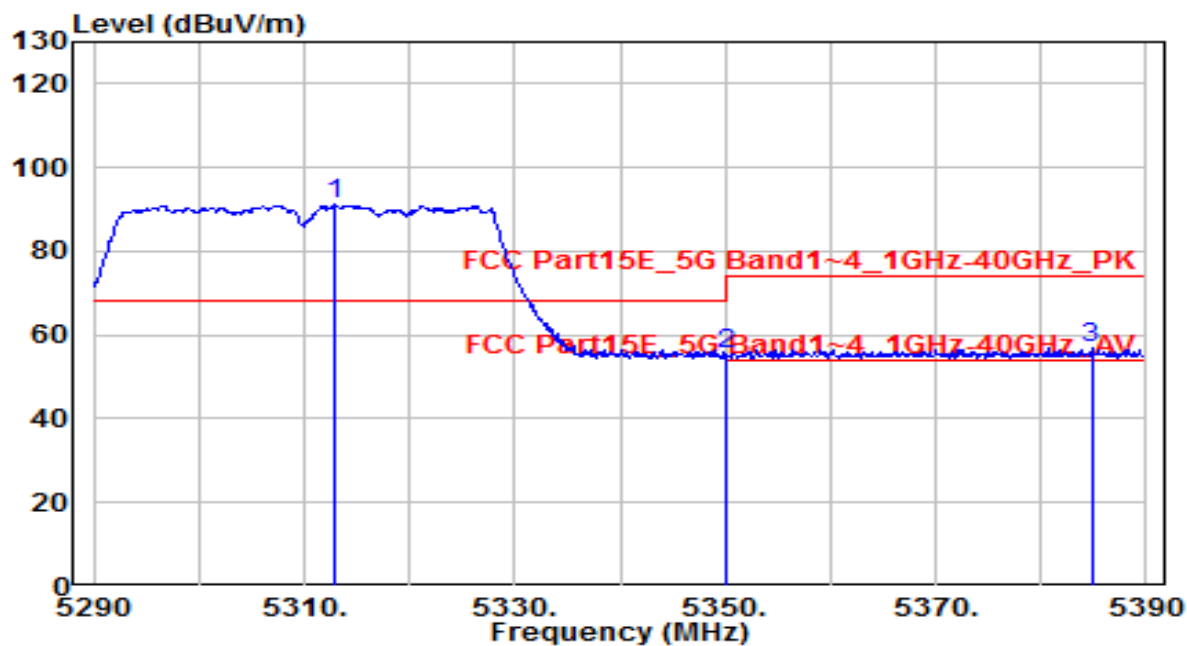


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.900	87.00	4.08	91.07	N/A	N/A	145	250	Peak
2	* 5350.000	51.52	4.11	55.63	-12.57	68.20	145	250	Peak
3	5384.800	52.80	4.15	56.95	-17.05	74.00	145	250	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

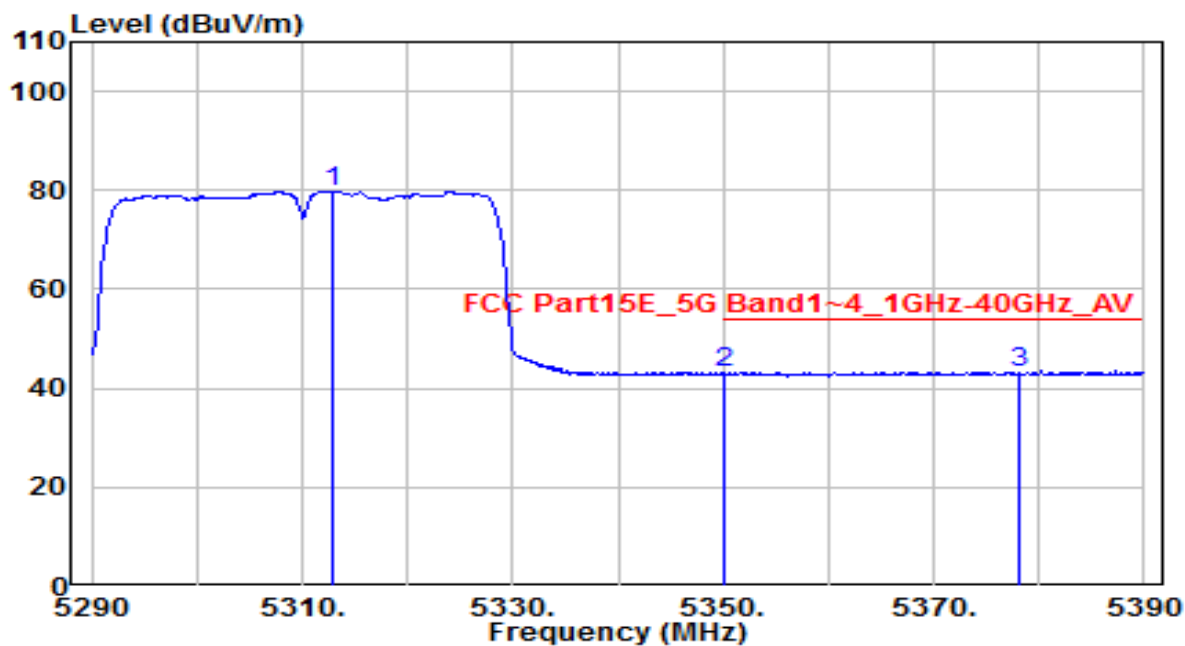


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.800	75.79	4.08	79.86	N/A	N/A	145	250	Average
2	5350.000	38.93	4.11	43.05	-10.95	54.00	145	250	Average
3	* 5378.200	39.17	4.14	43.31	-10.69	54.00	145	250	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

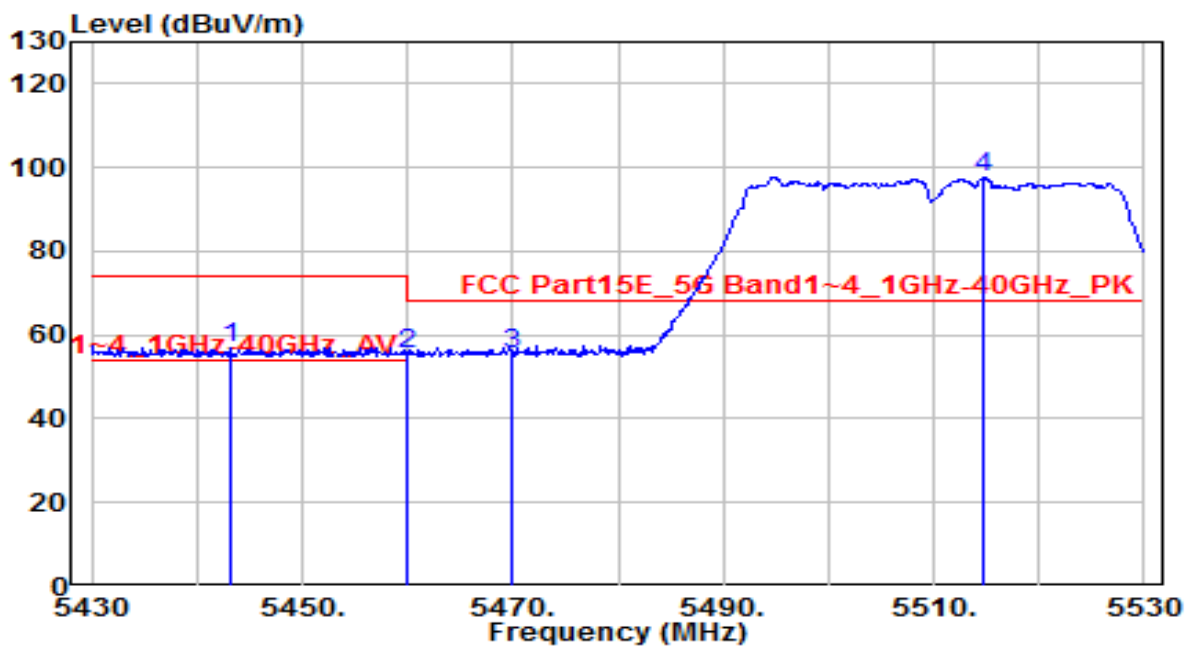


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5443.200	52.45	4.21	56.66	-17.34	74.00	175	265	Peak
2	* 5460.000	51.31	4.23	55.53	-12.67	68.20	175	265	Peak
3	5470.000	51.26	4.24	55.50	-12.70	68.20	175	265	Peak
4	5514.800	93.35	4.32	97.66	N/A	N/A	175	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

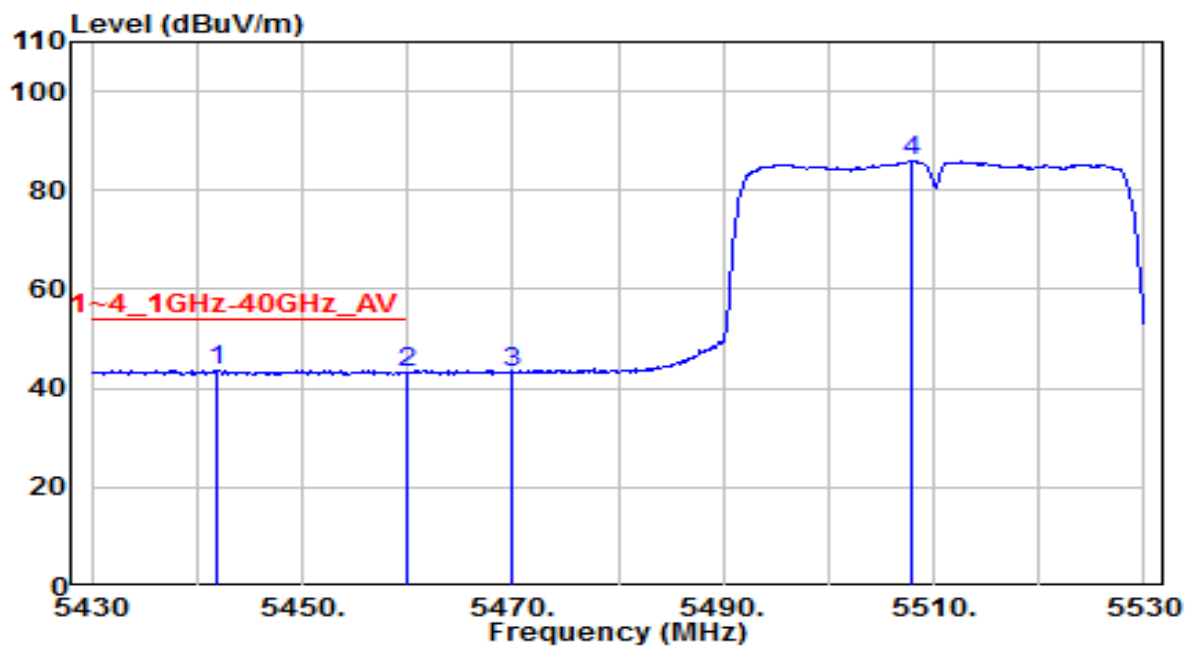


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5441.800	39.36	4.21	43.57	-10.43	54.00	175	265	Average
2		5460.000	39.02	4.23	43.25	-10.75	54.00	175	265	Average
3		5470.000	38.93	4.24	43.16	N/A	N/A	175	265	Average
4		5508.000	81.79	4.30	86.08	N/A	N/A	175	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

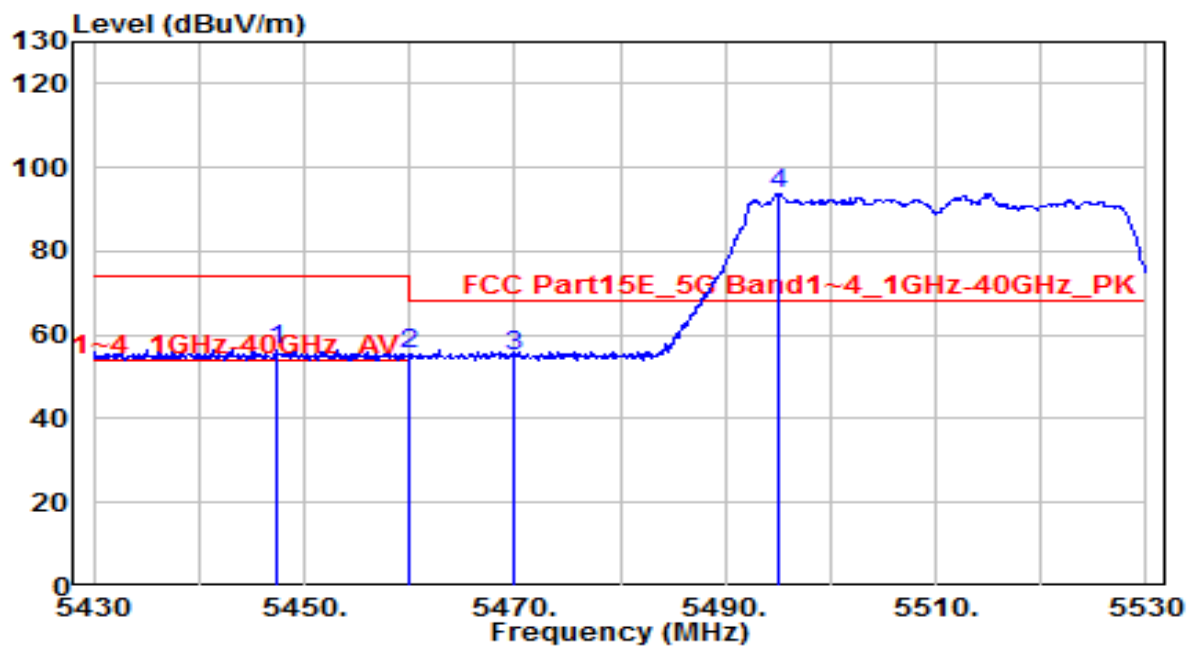


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.300	52.27	4.22	56.49	-17.51	74.00	155	255	Peak
2	* 5460.000	51.07	4.23	55.30	-12.90	68.20	155	255	Peak
3	5470.000	50.76	4.24	55.00	-13.20	68.20	155	255	Peak
4	5495.100	89.56	4.26	93.82	N/A	N/A	155	255	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

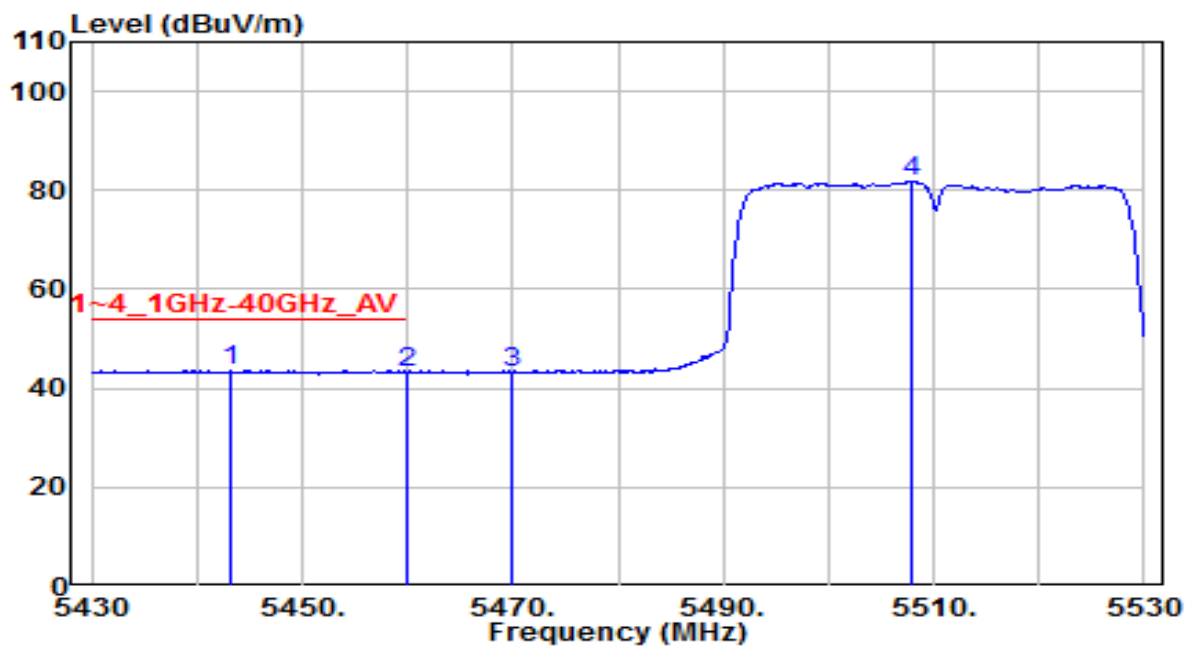


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5443.100	39.47	4.21	43.68	-10.32	54.00	155	255	Average
2		5460.000	39.11	4.23	43.34	-10.66	54.00	155	255	Average
3		5470.000	39.11	4.24	43.35	N/A	N/A	155	255	Average
4		5507.800	77.57	4.30	81.86	N/A	N/A	155	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

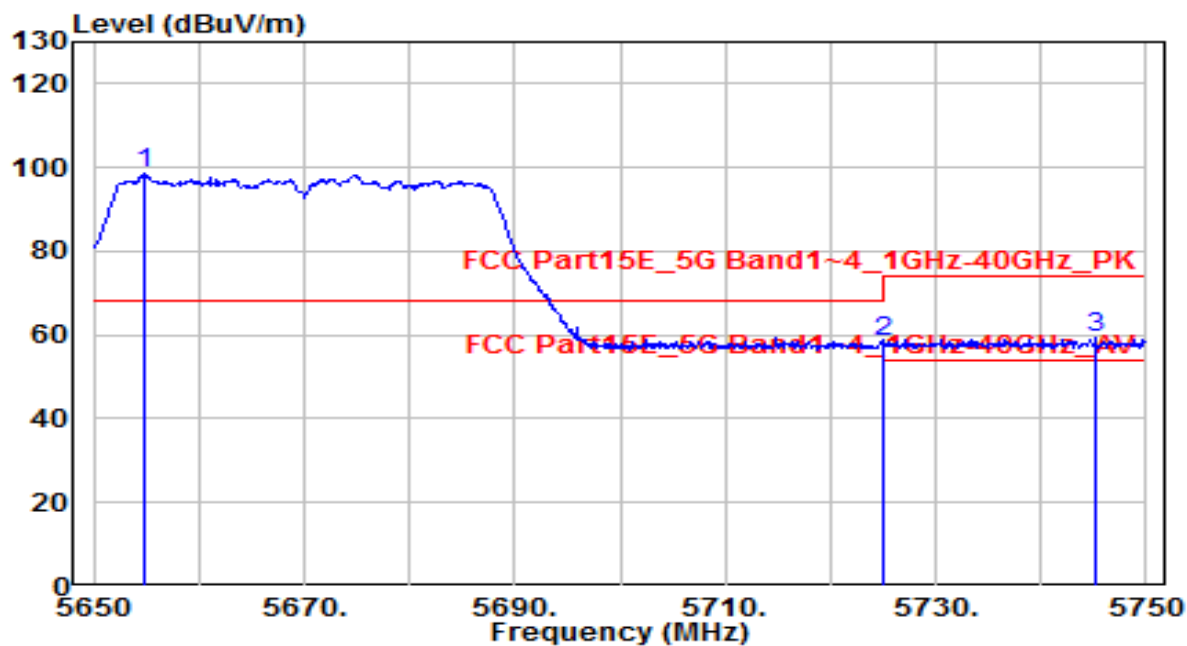


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5654.700	93.60	4.77	98.37	N/A	N/A	160	265	Peak
2	* 5725.000	53.22	5.00	58.22	-9.98	68.20	160	265	Peak
3	5745.200	54.21	5.06	59.28	-14.72	74.00	160	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

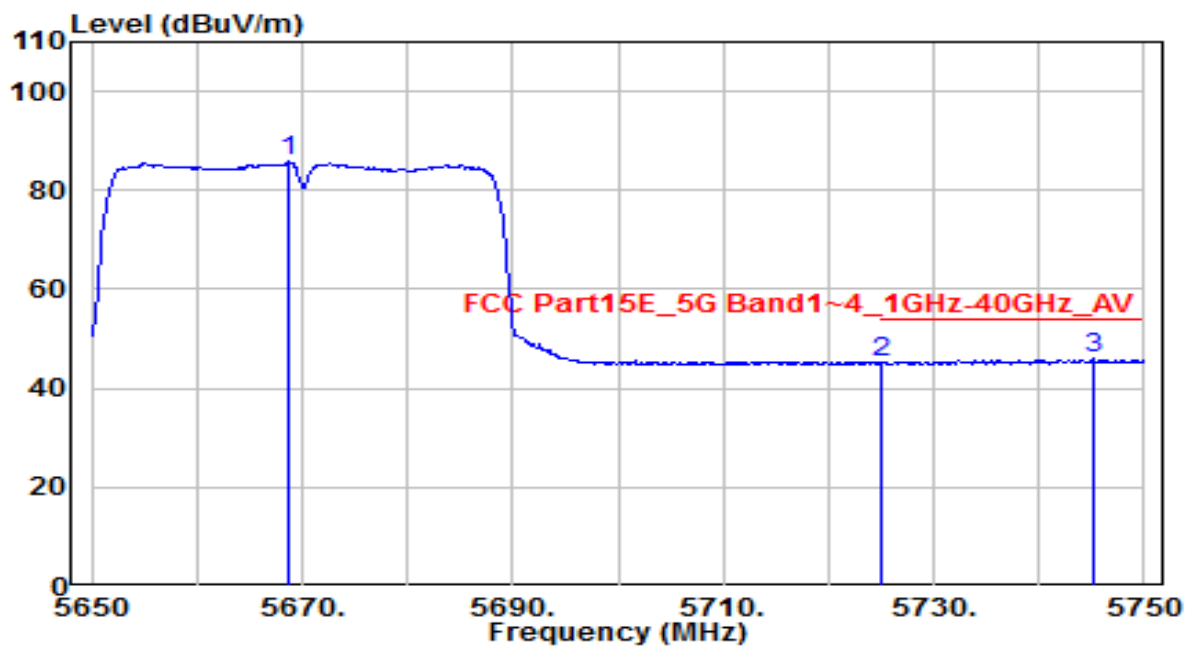


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.800	81.01	4.82	85.82	N/A	N/A	160	265	Average
2	5725.000	40.04	5.00	45.04	-8.96	54.00	160	265	Average
3	* 5745.100	40.88	5.06	45.95	-8.05	54.00	160	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

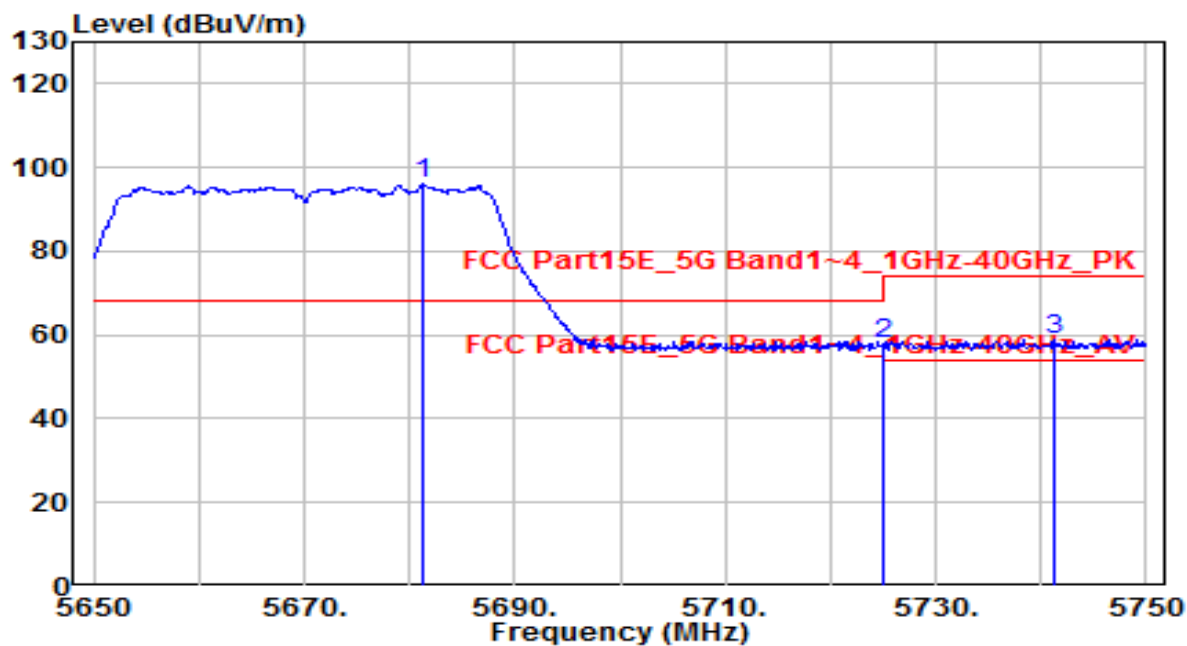


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5681.300	91.12	4.86	95.97	N/A	N/A	270	335	Peak
2	* 5725.000	52.83	5.00	57.83	-10.37	68.20	270	335	Peak
3	5741.300	53.67	5.05	58.72	-15.28	74.00	270	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

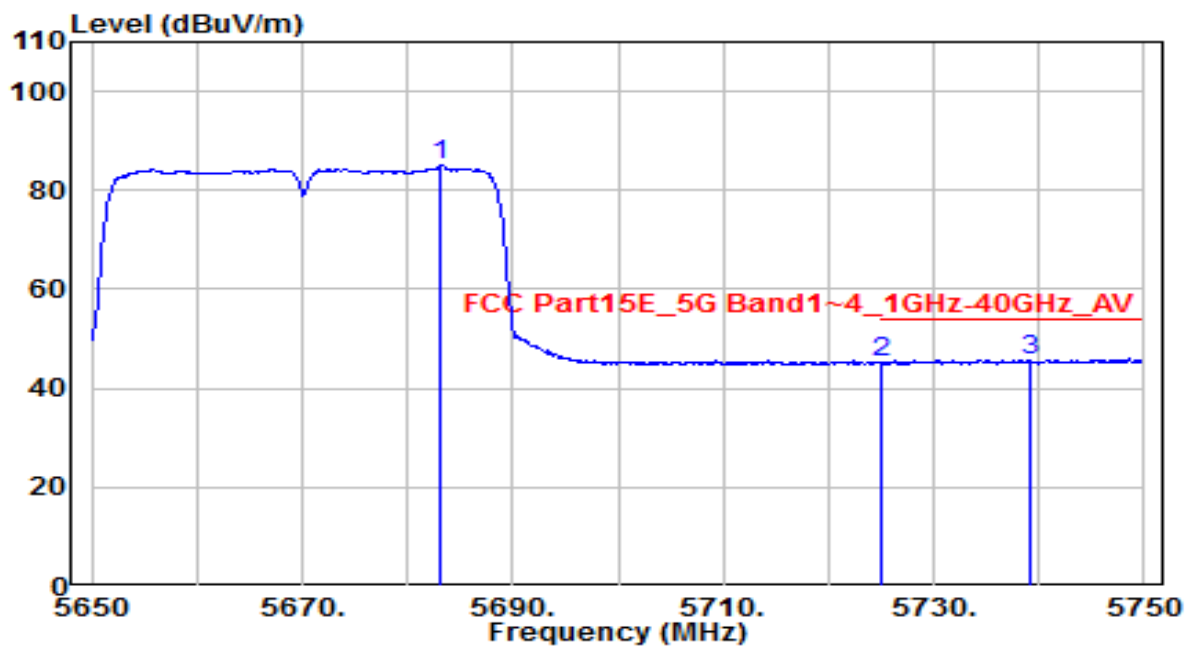


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5683.100	80.11	4.86	84.97	N/A	N/A	270	335	Average
2	5725.000	40.22	5.00	45.22	-8.78	54.00	270	335	Average
3	* 5739.200	40.79	5.05	45.83	-8.17	54.00	270	335	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

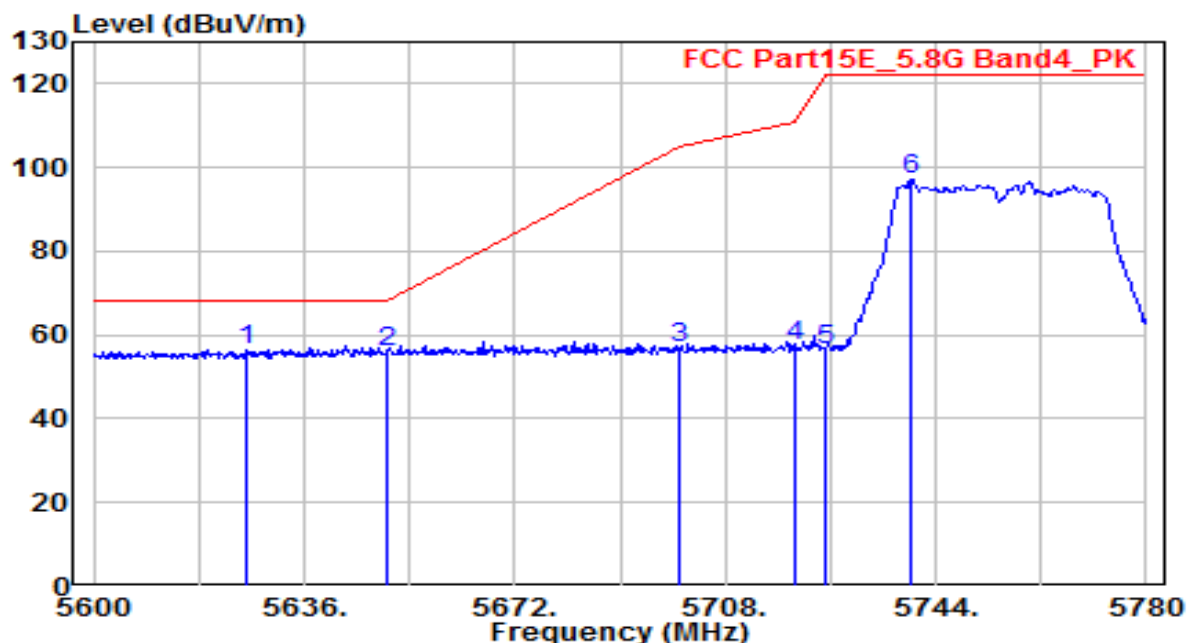


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5625.920	51.61	4.68	56.29	-11.91	68.20	160	265	Peak
2	5650.000	51.23	4.76	55.99	-12.21	68.20	160	265	Peak
3	5700.000	52.04	4.92	56.96	-48.24	105.20	160	265	Peak
4	5720.000	52.46	4.98	57.44	-53.36	110.80	160	265	Peak
5	5725.000	51.39	5.00	56.39	-65.81	122.20	160	265	Peak
6	5739.860	91.89	5.05	96.94	-25.26	122.20	160	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

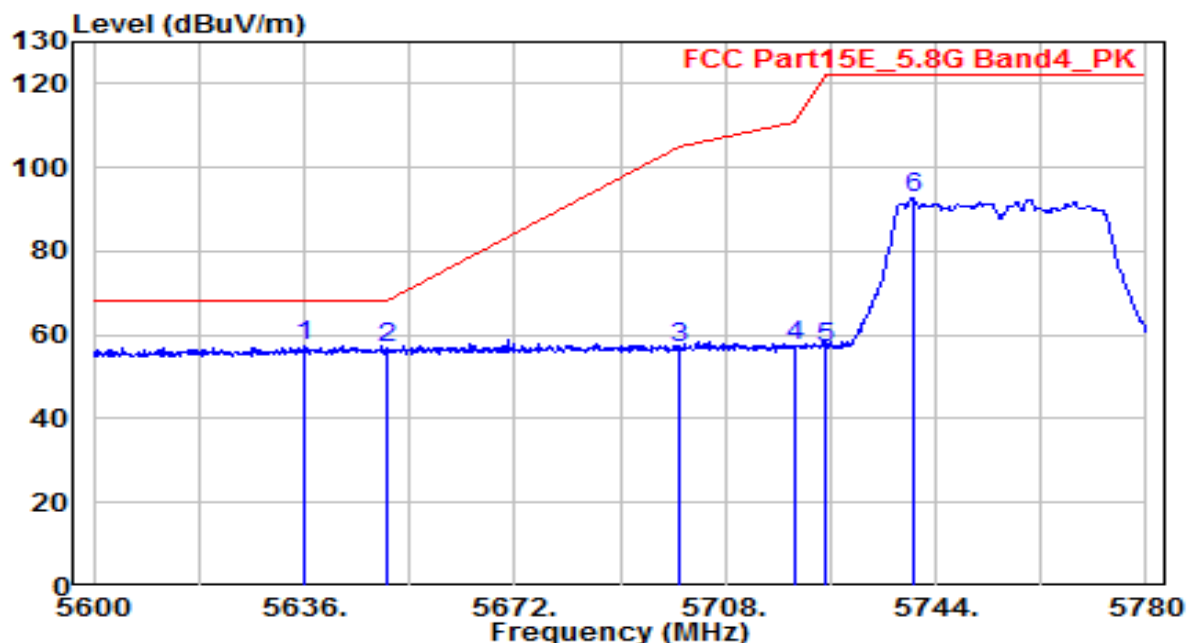


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5636.000	52.55	4.71	57.26	-10.94	68.20	170	200	Peak
2	5650.000	52.19	4.76	56.95	-11.25	68.20	170	200	Peak
3	5700.000	52.01	4.92	56.92	-48.28	105.20	170	200	Peak
4	5720.000	52.50	4.98	57.48	-53.32	110.80	170	200	Peak
5	5725.000	52.12	5.00	57.11	-65.09	122.20	170	200	Peak
6	5740.220	87.61	5.05	92.65	-29.55	122.20	170	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

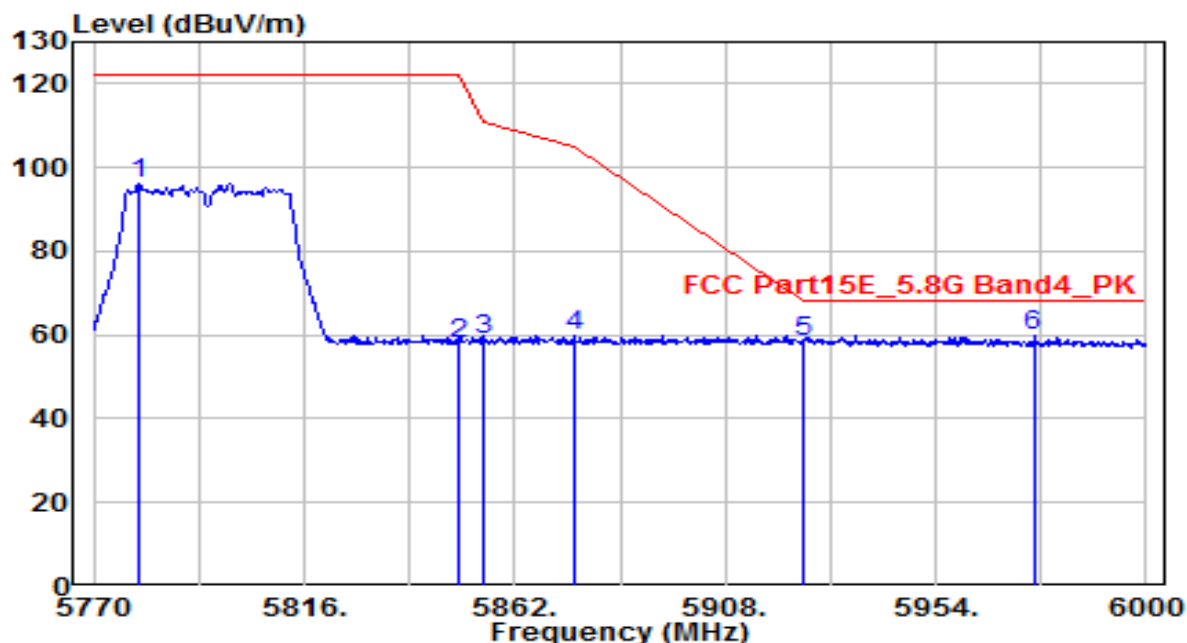


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5779.890	91.11	5.18	96.28	-25.92	122.20	150	265	Peak
2	5850.000	52.60	5.40	58.00	-64.20	122.20	150	265	Peak
3	5855.000	53.59	5.42	59.01	-51.79	110.80	150	265	Peak
4	5875.000	54.35	5.49	59.83	-45.37	105.20	150	265	Peak
5	5925.000	52.93	5.65	58.58	-9.62	68.20	150	265	Peak
6	* 5975.390	53.81	5.81	59.62	-8.58	68.20	150	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

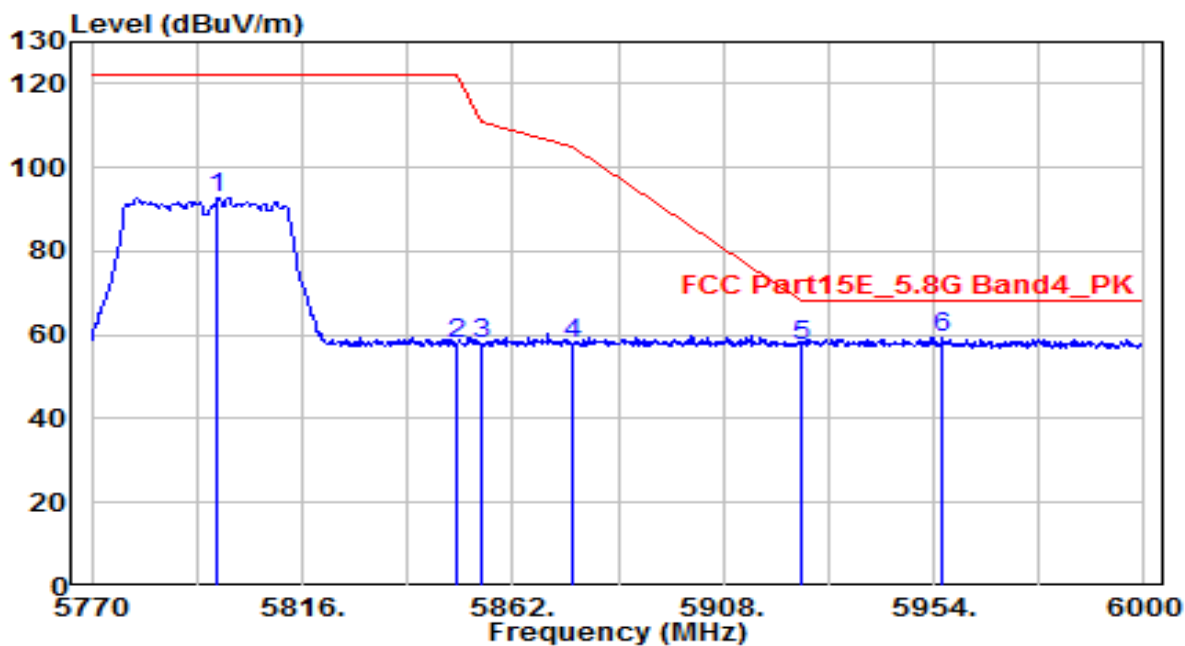


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5797.600	87.72	5.23	92.96	-29.24	122.20	175	200	Peak
2	5850.000	52.26	5.40	57.66	-64.54	122.20	175	200	Peak
3	5855.000	52.47	5.42	57.89	-52.91	110.80	175	200	Peak
4	5875.000	52.61	5.49	58.09	-47.11	105.20	175	200	Peak
5	5925.000	51.80	5.65	57.44	-10.76	68.20	175	200	Peak
6	* 5956.070	53.81	5.75	59.56	-8.64	68.20	175	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

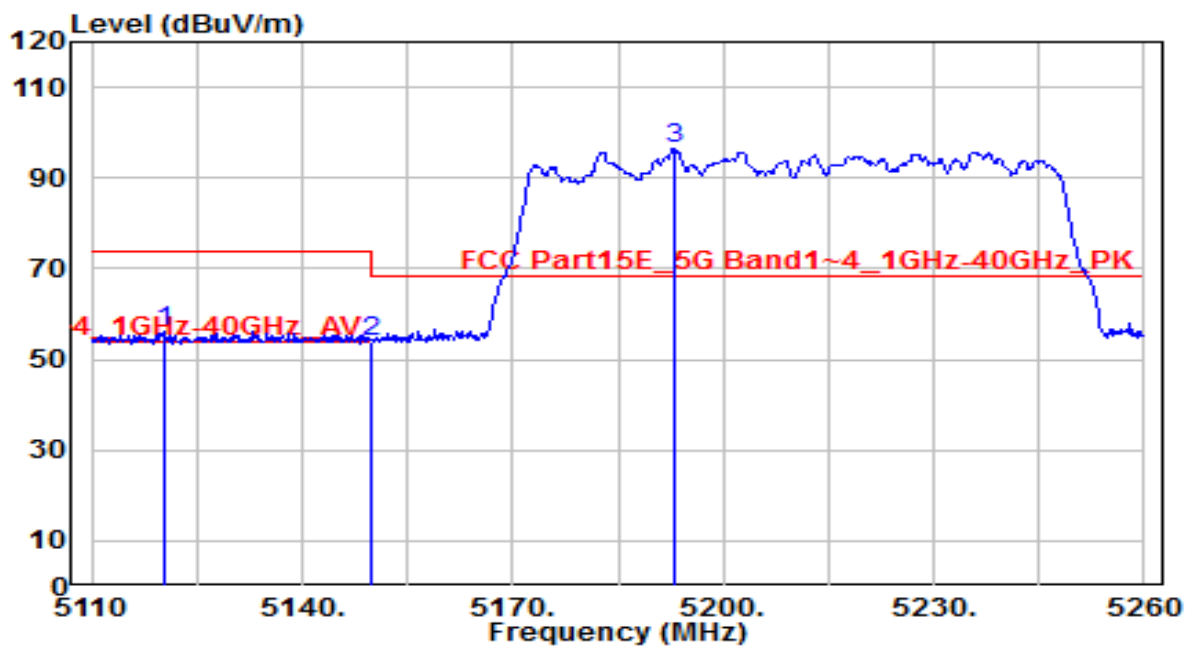


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5120.350	52.25	3.88	56.13	-17.87	74.00	185	260	Peak
2	* 5150.000	49.93	3.91	53.84	-14.36	68.20	185	260	Peak
3	5192.950	92.39	3.95	96.34	N/A	N/A	185	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

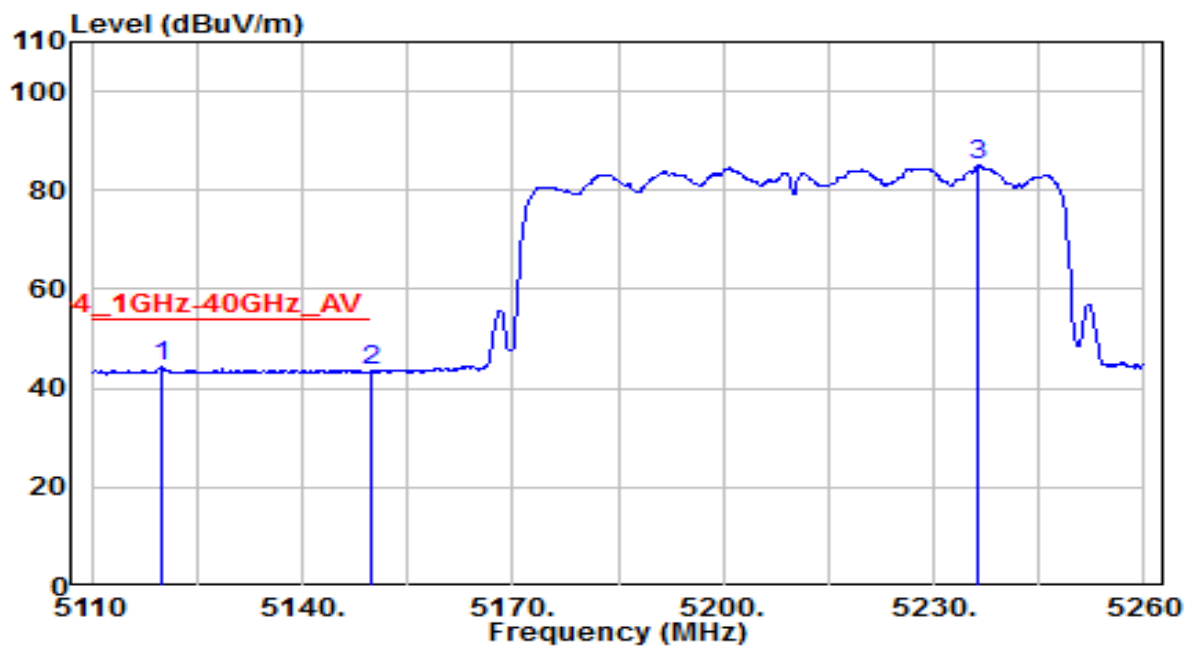


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5119.900	40.74	3.87	44.61	-9.39	54.00	185	260	Average
2		5150.000	39.74	3.91	43.65	-10.35	54.00	185	260	Average
3		5236.450	81.23	4.00	85.23	N/A	N/A	185	260	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

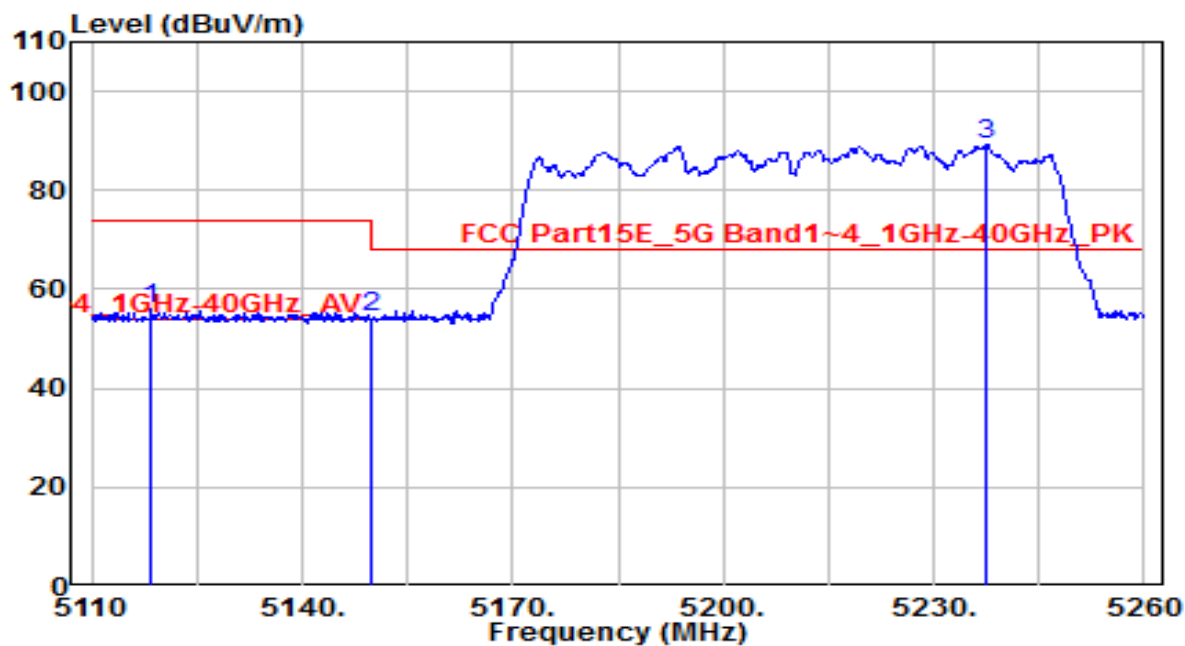


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5118.400	52.16	3.87	56.03	-17.97	74.00	215	280	Peak
2	* 5150.000	50.54	3.91	54.45	-13.75	68.20	215	280	Peak
3	5237.650	85.39	4.00	89.39	N/A	N/A	215	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

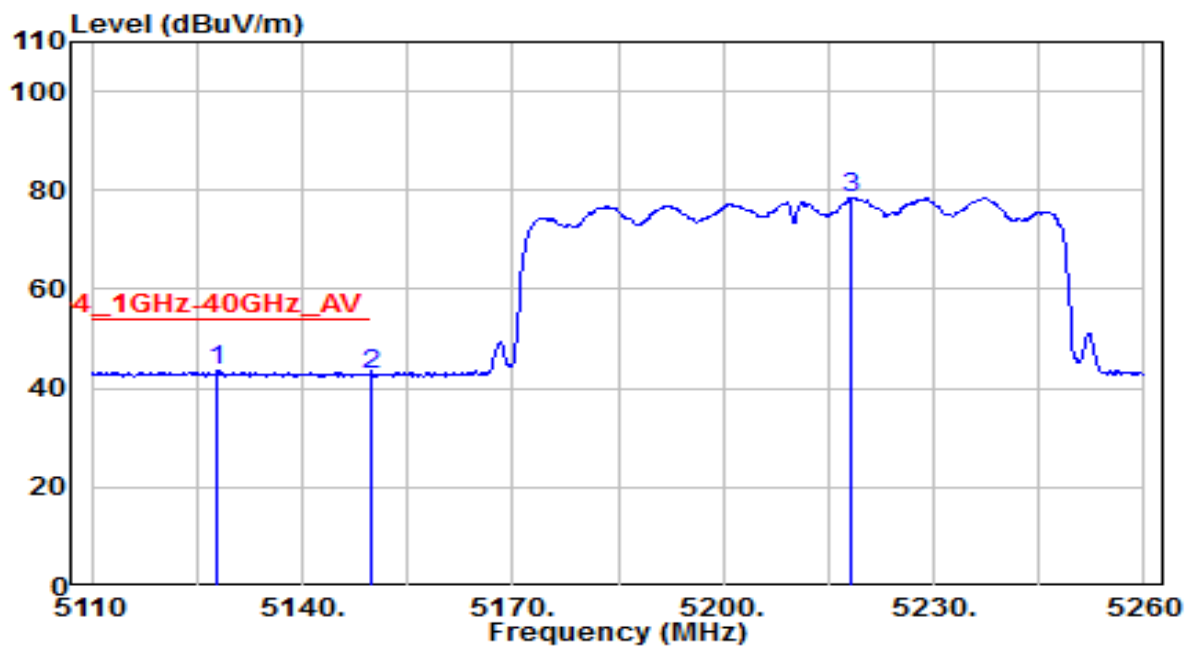


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5128.000	39.50	3.88	43.39	-10.61	54.00	215	280	Average
2		5150.000	38.70	3.91	42.60	-11.40	54.00	215	280	Average
3		5218.150	74.59	3.98	78.56	N/A	N/A	215	280	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

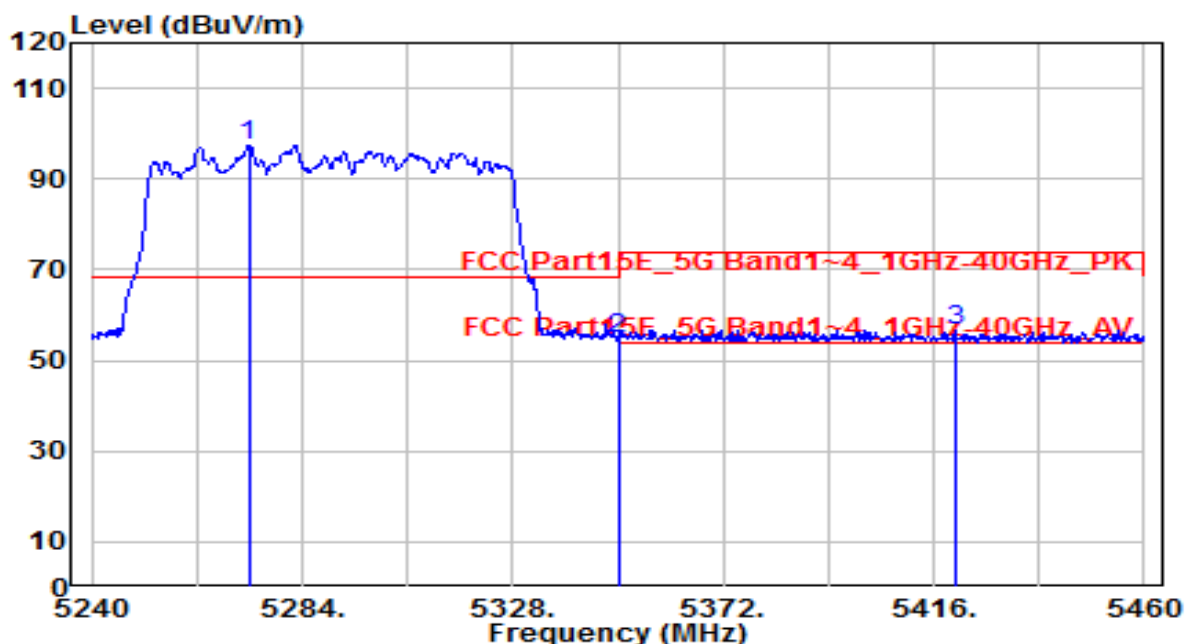


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5272.780	93.54	4.03	97.57	N/A	N/A	175	260	Peak
2	* 5350.000	50.90	4.11	55.01	-13.19	68.20	175	260	Peak
3	5420.400	52.49	4.19	56.68	-17.32	74.00	175	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

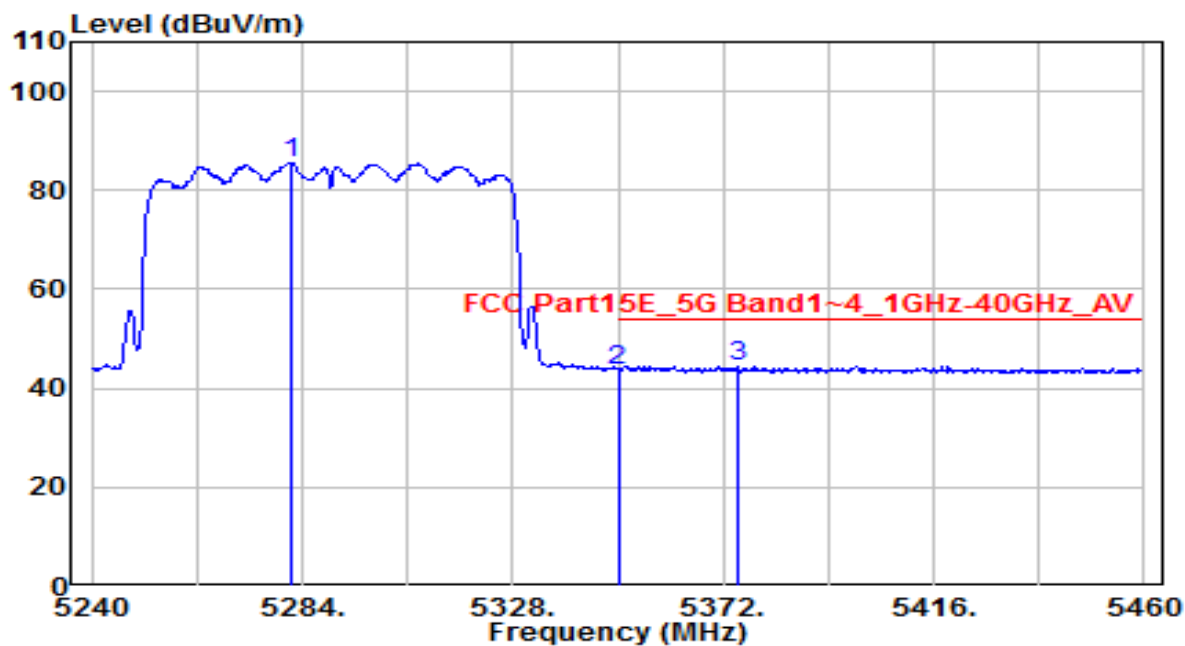


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5281.580	81.63	4.04	85.68	N/A	N/A	175	260	Average
2	5350.000	39.64	4.11	43.76	-10.24	54.00	175	260	Average
3	* 5375.300	40.32	4.14	44.46	-9.54	54.00	175	260	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

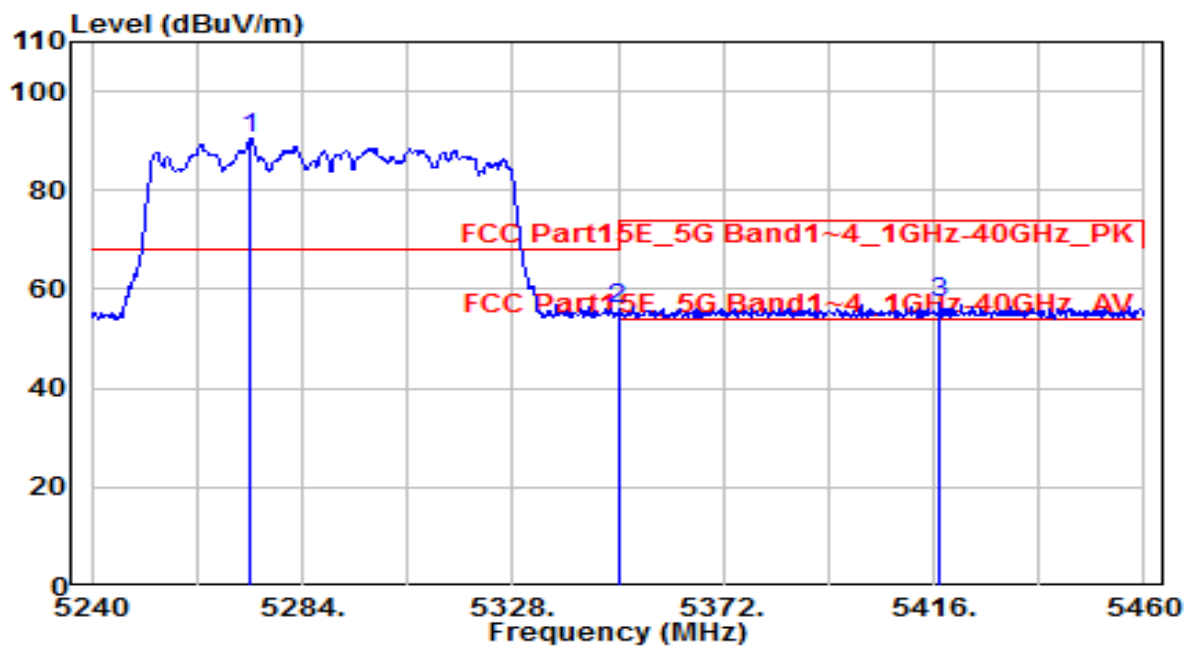


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5273.220	86.31	4.03	90.34	N/A	N/A	185	280	Peak
2	* 5350.000	51.80	4.11	55.91	-12.29	68.20	185	280	Peak
3	5417.100	52.93	4.18	57.11	-16.89	74.00	185	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

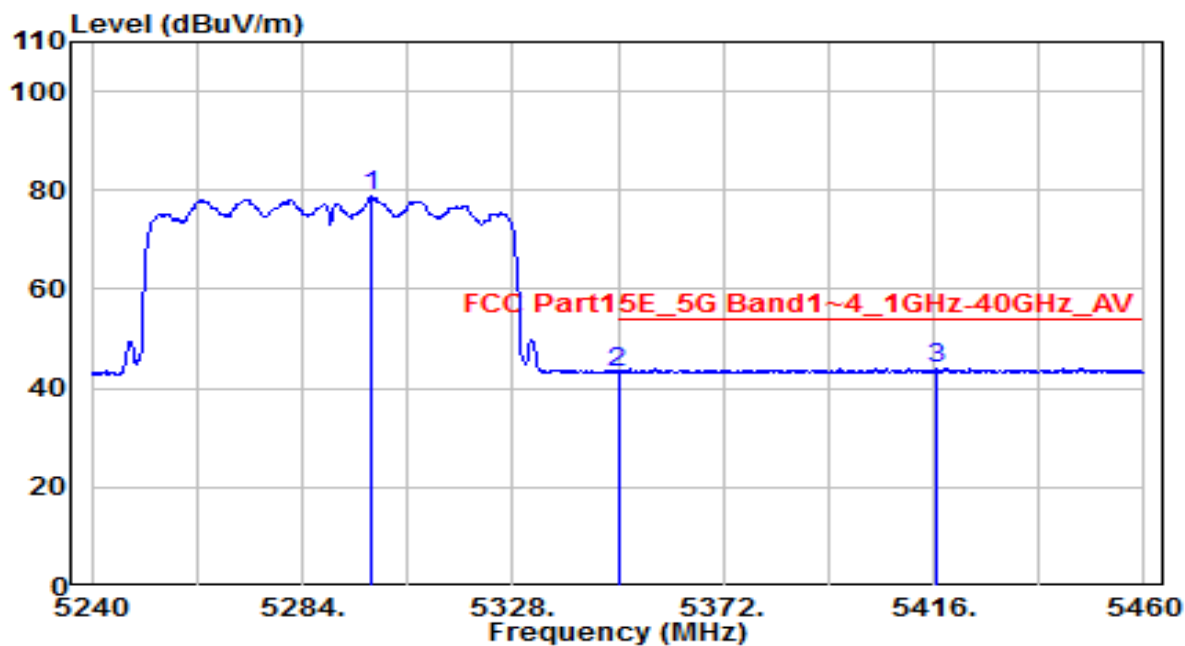


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.520	74.66	4.06	78.72	N/A	N/A	185	280	Average
2	5350.000	39.18	4.11	43.30	-10.70	54.00	185	280	Average
3	* 5416.440	39.98	4.18	44.16	-9.84	54.00	185	280	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

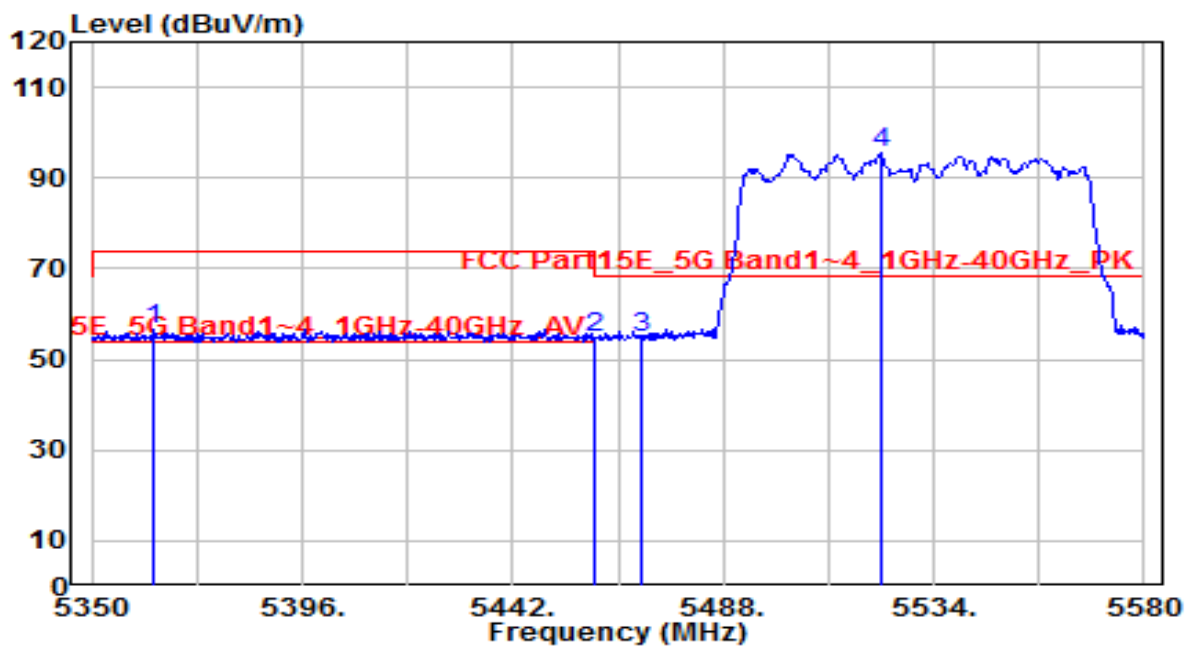


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5363.340	52.51	4.13	56.64	-17.36	74.00	175	265	Peak
2	* 5460.000	50.79	4.23	55.02	-13.18	68.20	175	265	Peak
3	5470.000	50.42	4.24	54.66	-13.54	68.20	175	265	Peak
4	5522.270	91.03	4.34	95.37	N/A	N/A	175	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

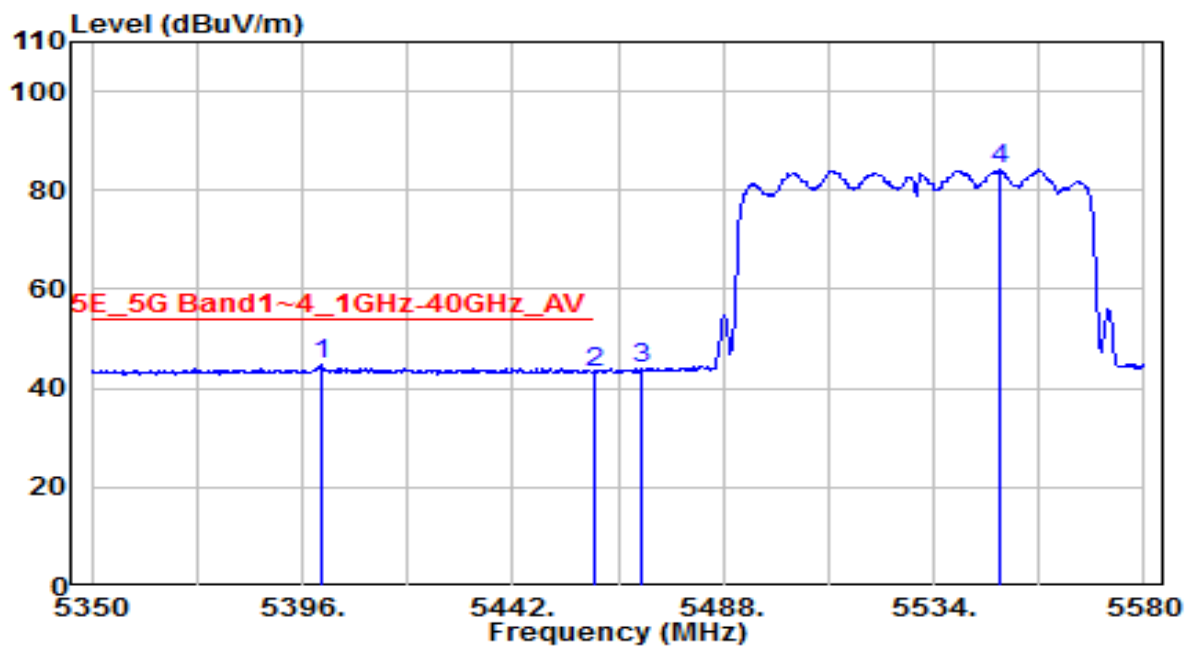


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5400.140	40.54	4.17	44.70	-9.30	54.00	175	265	Average
2		5460.000	39.08	4.23	43.31	-10.69	54.00	175	265	Average
3		5470.000	39.59	4.24	43.82	N/A	N/A	175	265	Average
4		5548.490	79.78	4.43	84.20	N/A	N/A	175	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

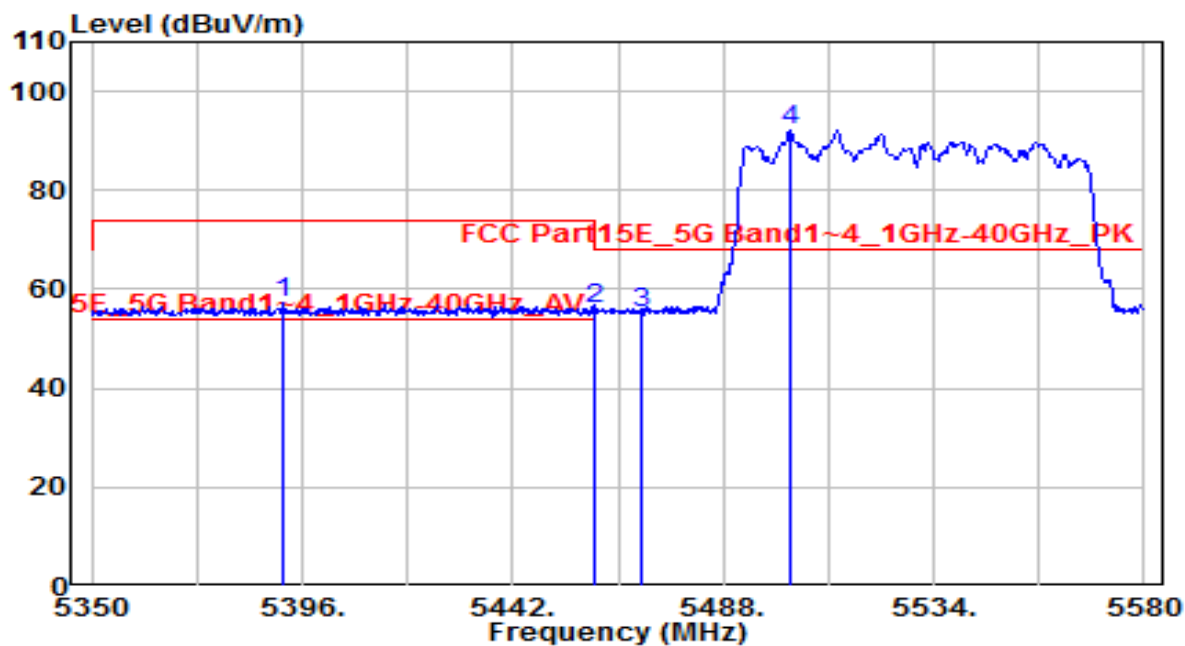


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5392.090	52.95	4.16	57.11	-16.89	74.00	155	250	Peak
2	5460.000	51.95	4.23	56.18	-12.02	68.20	155	250	Peak
3	5470.000	51.15	4.24	55.39	-12.81	68.20	155	250	Peak
4	* 5502.490	87.82	4.28	92.10	N/A	N/A	155	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

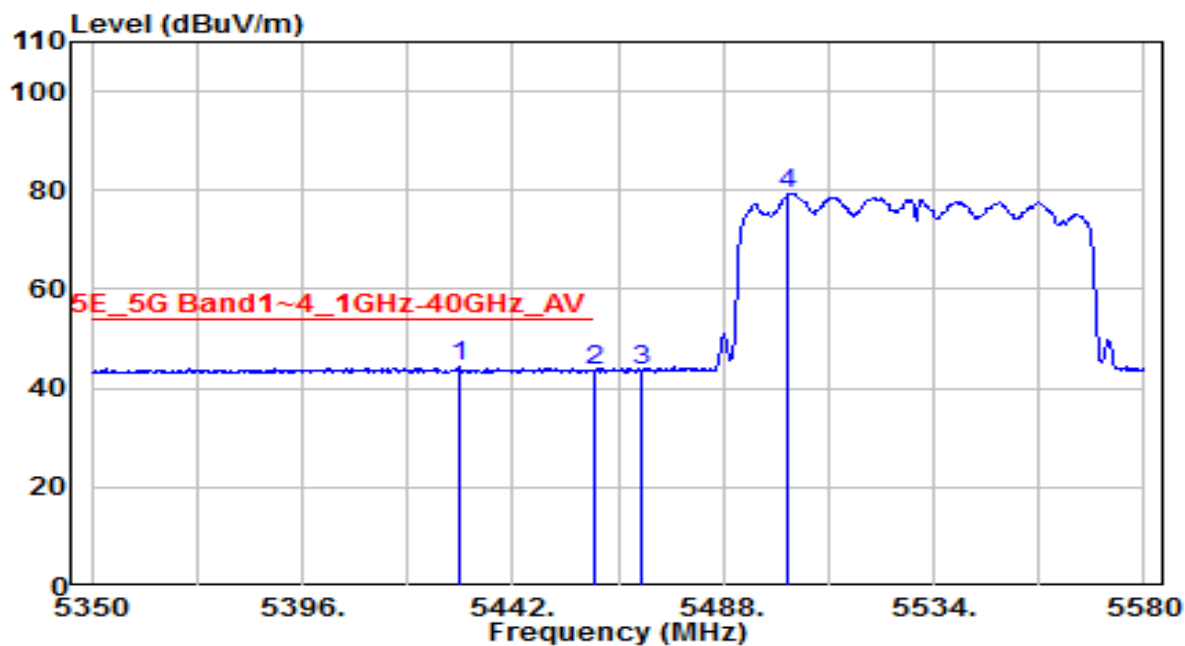


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5430.270	40.02	4.20	44.22	-9.78	54.00	155	250	Average
2		5460.000	39.23	4.23	43.46	-10.54	54.00	155	250	Average
3		5470.000	39.52	4.24	43.76	N/A	N/A	155	250	Average
4		5502.260	75.00	4.28	79.28	N/A	N/A	155	250	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

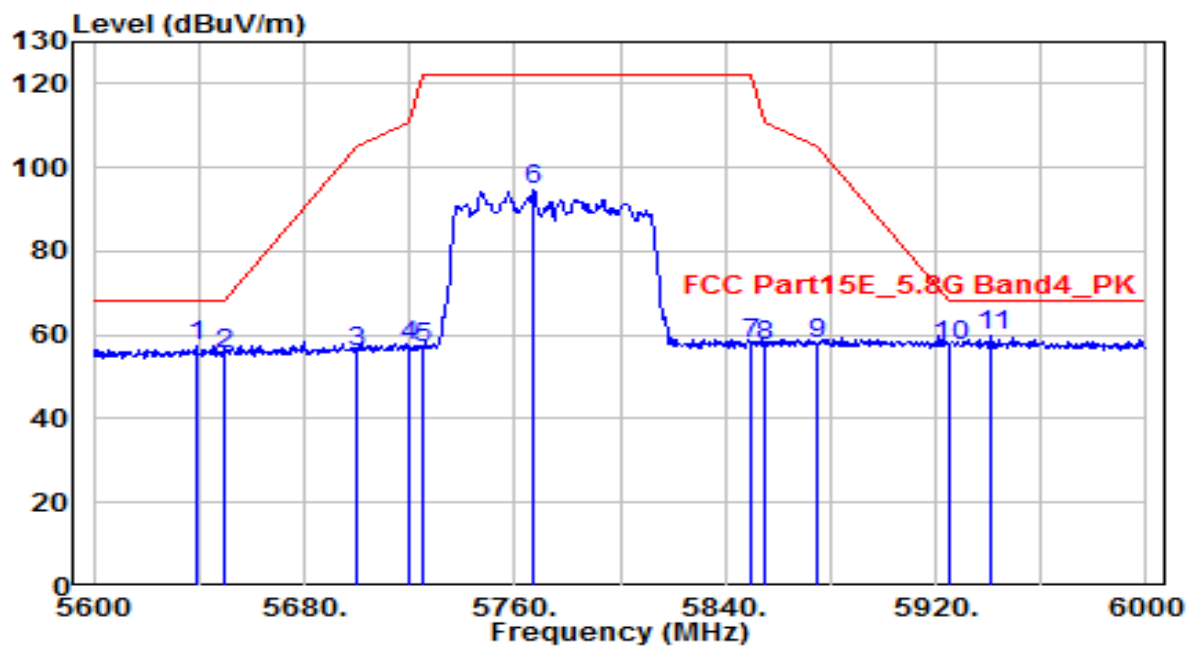


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5638.800	52.62	4.72	57.34	-10.86	68.20	160	265	Peak
2	5650.000	50.62	4.76	55.37	-12.83	68.20	160	265	Peak
3	5700.000	51.23	4.92	56.15	-49.05	105.20	160	265	Peak
4	5720.000	52.38	4.98	57.36	-53.44	110.80	160	265	Peak
5	5725.000	52.01	5.00	57.01	-65.19	122.20	160	265	Peak
6	5767.200	89.33	5.14	94.46	-27.74	122.20	160	265	Peak
7	5850.000	52.53	5.40	57.94	-64.26	122.20	160	265	Peak
8	5855.000	52.00	5.42	57.42	-53.38	110.80	160	265	Peak
9	5875.000	52.29	5.49	57.77	-47.43	105.20	160	265	Peak
10	5925.000	51.87	5.65	57.52	-10.68	68.20	160	265	Peak
11	* 5941.200	54.00	5.70	59.70	-8.50	68.20	160	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-05-13
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

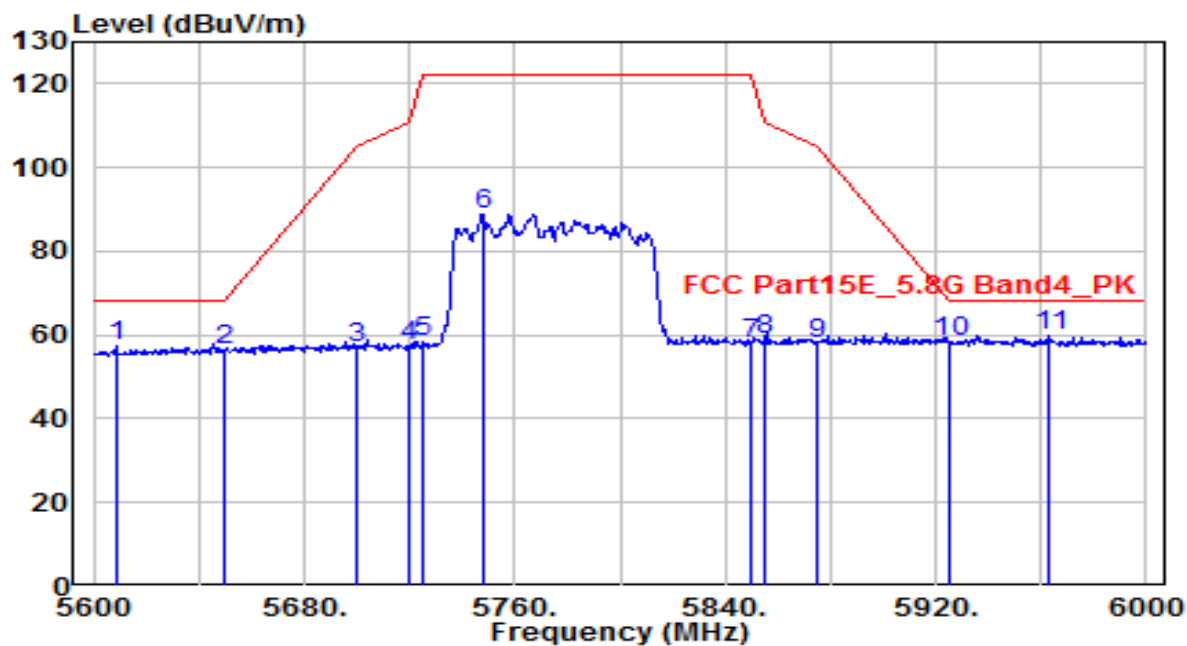

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5608.400	52.69	4.62	57.31	-10.89	68.20	165	205	Peak
2	5650.000	51.55	4.76	56.31	-11.89	68.20	165	205	Peak
3	5700.000	51.75	4.92	56.67	-48.53	105.20	165	205	Peak
4	5720.000	52.52	4.98	57.50	-53.30	110.80	165	205	Peak
5	5725.000	53.19	5.00	58.19	-64.01	122.20	165	205	Peak
6	5748.000	83.61	5.07	88.68	-33.52	122.20	165	205	Peak
7	5850.000	52.44	5.40	57.84	-64.36	122.20	165	205	Peak
8	5855.000	53.26	5.42	58.68	-52.12	110.80	165	205	Peak
9	5875.000	52.62	5.49	58.10	-47.10	105.20	165	205	Peak
10	5925.000	52.64	5.65	58.29	-9.91	68.20	165	205	Peak
11	* 5963.200	54.11	5.77	59.88	-8.32	68.20	165	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

