

47 CFR PART 15 SUBPART C TEST REPORT
for
Smart Padlock
Model No.: C210
FCC ID: 2AWL8-C00001

of

Applicant: WAFERLOCK Corp.
Address: 16 Ke-Yuan 2nd Rd. Central Taiwan Science Park
Taichung City 407, Taiwan

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22206-21889-C-5

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com




TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS	3
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS.....	4
2	TECHNICAL TEST	5
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT LIST	6
2.4	GENERAL TEST PROCEDURE	9
3	TEST RESULTS (ENCLOSURE)	11
3.1	OUTPUT POWER (FIELD STRENGTH)	12
3.2	OUT OF BAND RADIATED EMISSIONS.....	13
3.3	OCCUPIED BANDWIDTH	15
3.4	FREQUENCY TOLERANCE	16
3.5	POWER LINE CONDUCTED EMISSION	17
	APPENDIX	



Registration number: W6M22206-21889-C-5
FCC ID: 2AWL8-C00001

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

June 21, 2022

Kent Lin

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

June 21, 2022


Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M22206-21889-C-5
FCC ID: 2AWL8-C00001

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.
Telephone:	./.
Fax:	./.

1.3 Details of approval holder

Name:	WAFERLOCK Corp.
Street:	16 Ke-Yuan 2nd Rd. Central Taiwan Science Park
City:	Taichung City 407,
Country:	Taiwan

1.4 Application details

Date of receipt of test item:	June 02, 2022
Date of test:	from June 03, 2022 to June 20, 2022



Registration number: W6M22206-21889-C-5
FCC ID: 2AWL8-C00001

1.5 General information of Test item


Description of test item:	Smart Padlock
Type identification:	C210
Multi-listing model number:	./.
Transmitting frequency:	13.56 MHz
Operation mode:	Half-duplex
Voltage supply:	Battery 3Vd.c. (CR15H270)
Antenna type:	Loop antenna
Sample no.:	#01

Manufacturer: (if applicable)

Name:	./.
Street:	./.
Town:	./.
Country:	./.

1.6 Test standards

47 CFR PART 15 SUBPART C § 15.225 (2020-10)



Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed. ☒

or

The deviations were ascertained in the course of the tests performed. ☐

2.2 Test environment

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Details of power supply: Battery 3Vd.c. (CR15H270)

Extreme conditions parameters: ./.

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 1.03 dB Voltage probe : 1.05 dB
Estimation Result of Uncertainty of Radiated Emission(3M) (Output Power (Field Strength), Out of Band Radiated Emissions, Band Edge)	Expanded Uncertainty : 0.009-30 MHz : 3.48 dB 30-1000 MHz : 4.48 dB 1-18 GHz : 4.15 dB 18-40 GHz : 3.78 dB
Estimation Result of Uncertainty of Bandwidth Measurement (Occupied Bandwidth)	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement (Frequency tolerance)	Expanded Uncertainty : 6.11 Hz

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2022/6/15	2023/6/14
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2021/11/9	2022/11/8
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2021/9/22	2022/9/21
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2021/7/29	2022/7/28
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2021/11/8	2022/11/7
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2021/7/28	2022/7/27
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2022/6/15	2023/6/14
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2021/9/28	2022/9/27
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2021/8/4	2022/8/3
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2022/5/20	2023/5/19
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2022/6/15	2023/6/14
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2022/5/23	2023/5/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2022/3/4	2023/3/3
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2022/5/20	2023/5/19
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2021/7/14	2022/7/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2022/3/28	2023/3/27
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2022/2/18	2023/2/17
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2022/5/13	2023/5/12
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2021/10/27	2022/10/26
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2021/9/17	2022/9/16
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2022/6/9	2023/6/8
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2022/1/5	2023/1/4




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2021/10/29	2022/10/28
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2022/6/3	2023/6/2
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2022/2/18	2023/2/17
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2022/5/13	2023/5/12
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2022/5/27	2023/5/26
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2021/10/5	2022/10/4
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2021/10/6	2022/10/5
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2021/12/06	2022/12/05
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2022/6/15	2023/6/14
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2022/6/10	2023/6/9
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2022/3/28	2023/3/27
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2022/5/9	2023/5/8
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2021/10/29	2022/10/28
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2022/1/5	2023/1/4
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2022/1/5	2023/1/4
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2022/1/5	2023/1/4
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2022/1/5	2023/1/4
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2021/9/7	2022/9/6
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2022/5/3	2023/5/2
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2021/8/6	2022/8/5
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2022/6/15	2023/6/14
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2022/5/6	2023/5/5
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2022/2/18	2023/2/17
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2022/5/13	2023/5/12
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2021/7/2	2022/7/1



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2022/5/27	2023/5/26
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2022/5/13	2023/5/12
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2022/5/27	2023/5/26
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2022/5/13	2023/5/12
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2022/5/13	2023/5/12
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2021/10/18	2022/10/17
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2021/10/18	2022/10/17



2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 Section 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

$T = 100\text{ms}$ when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M22206-21889-C-5
FCC ID: 2AWL8-C00001

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Output Power Field Strength	15.225 (a) (b) (c)	☒	☒	☐
Out of Band Radiated Emissions	15.225 (d)	☒	☒	☐
Band Edge	15.225 (d)	☒	☒	☐
Occupied Bandwidth	2.1049	☒	☒	☐
Frequency Stability	15.225 (e)	☒	☒	☐
Power Line Conducted Emission	15.207 (a)	☐	☐	☐

The following is intentionally left blank.



Registration number: W6M22206-21889-C-5
FCC ID: 2AWL8-C00001

3.1 Output Power (Field Strength)

FCC Rules: 15.225 (a) (b) (c), 15.205, 15.209, 15.35

Operation within the band 13.110 - 14.010 MHz

Limit


(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Measurement Results:

The field strength at 3 meter distance as 43.92 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 3.92 dB μ V/m.

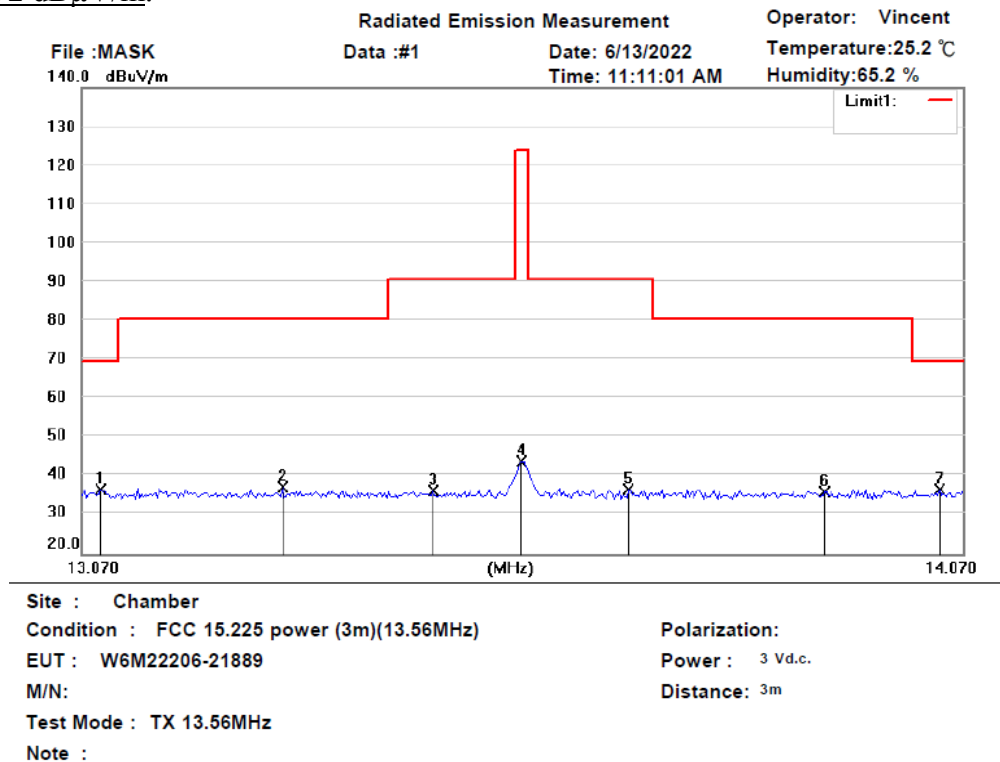

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.0913	2.80	peak	33.80	36.60	69.50	100	0	-32.90	
	13.2920	3.43	peak	33.78	37.21	80.50	100	0	-43.29	
	13.4600	2.48	peak	33.77	36.25	90.50	100	0	-54.25	
	13.5596	10.16	peak	33.76	43.92	124.00	100	0	-80.08	RF Power
	13.6825	2.87	peak	33.74	36.61	90.50	100	0	-53.89	
	13.9088	2.34	peak	33.72	36.06	80.50	100	0	-44.44	
	14.0430	2.84	peak	33.71	36.55	69.50	100	0	-32.95	

Test equipment used: ETSTW-RE 027, ETSTW-RE 055



Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

3.2 Out of Band Radiated Emissions

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequency of Emission (MHz)	Limit	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

Summary table with radiated data of the test plots

Model: C210 Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See attached diagrams in appendix.

All other not noted test plots do not contain significant test results in relation to the limits

Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 142, ETSTW-RE 147,
ETSTW-RE 062




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

Test result of Band Edge

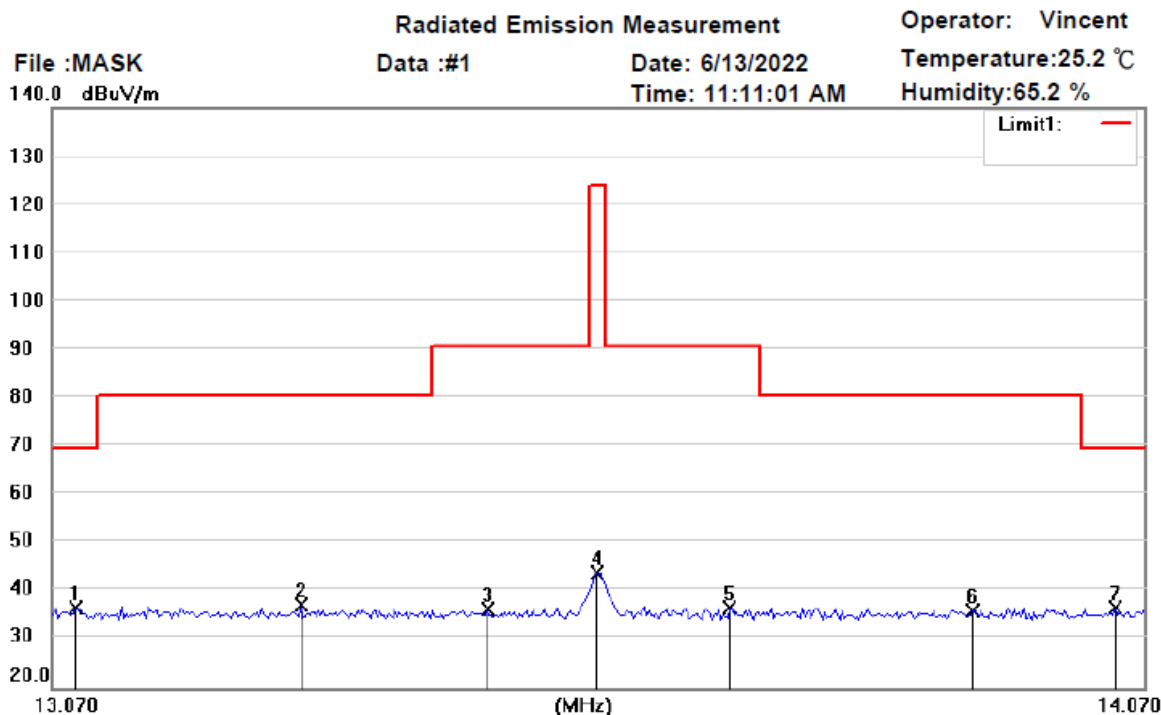

Site : Chamber

Condition : FCC 15.225 Bandedge (3m)(13.56MHz)

EUT : W6M22206-21889

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 3 Vd.c.

Distance: 3m


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.0913	2.80	peak	33.80	36.60	69.50	100	0	-32.90	
	13.2920	3.43	peak	33.78	37.21	80.50	100	0	-43.29	
	13.4600	2.48	peak	33.77	36.25	90.50	100	0	-54.25	
	13.5596	10.16	peak	33.76	43.92	124.00	100	0	-80.08	RF Power
	13.6825	2.87	peak	33.74	36.61	90.50	100	0	-53.89	
	13.9088	2.34	peak	33.72	36.06	80.50	100	0	-44.44	
	14.0430	2.84	peak	33.71	36.55	69.50	100	0	-32.95	

Test equipment used: ETSTW-RE 055


Registration number: W6M22206-21889-C-5
FCC ID: 2AWL8-C00001

3.3 Occupied Bandwidth

Test date: June 13, 2022
Temperature: 28.7°C
Humidity: 57.0 %
Tester: Ken

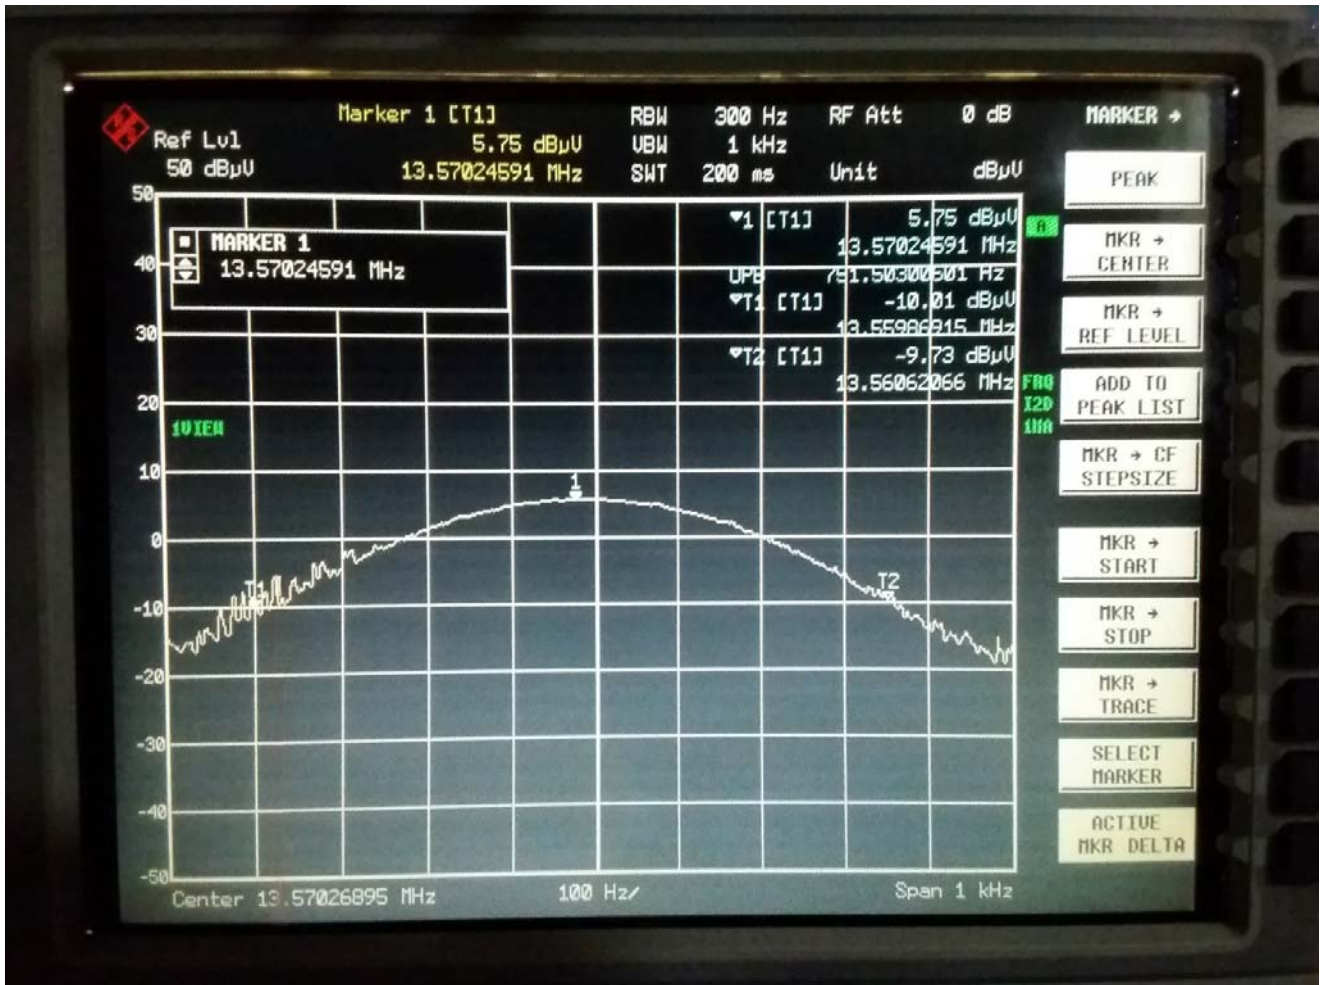

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22206-21889-C-5
FCC ID: 2AWL8-C00001

3.4 Frequency tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test date: June 07, 2022

Temperature: 21.9°C

Humidity: 55.0 %

Tester: Ken

Measurement Results:

Temperature Degrees	Voltage (Vd.c.)	Frequency (MHz)	Frequency deviation (kHz)	Limit KHz (0.01%)
20°C	2.55	13.560272	0.016	1.356
20°C	3.45	13.560304	-0.016	1.356
50°C	3	13.560151	0.138	1.356
40°C	3	13.560196	0.093	1.356
30°C	3	13.560250	0.038	1.356
*20°C	3	13.560288	0.000	1.356
10°C	3	13.560317	-0.029	1.356
0°C	3	13.560346	-0.058	1.356
-10°C	3	13.560346	-0.058	1.356
-20°C	3	13.560327	-0.038	1.356

*Represent test standard frequency

Test equipment used: ETSTW-RE 055, ETSTW-CE 009



Registration number: W6M22206-21889-C-5

FCC ID: 2AWL8-C00001

3.5 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Model: C210 Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: N Humidity: -- %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: L1


Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

- Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.
6. This test is not required because the EUT uses battery.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045



Appendix

A. Photos

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission

B. Measurement diagrams

Radiated Emissions



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#1


Date: 6/13/2022

Temperature: 25.2 °C

152.0 dBuV/m

Time: 11:23:15 AM

Humidity: 65.2 %

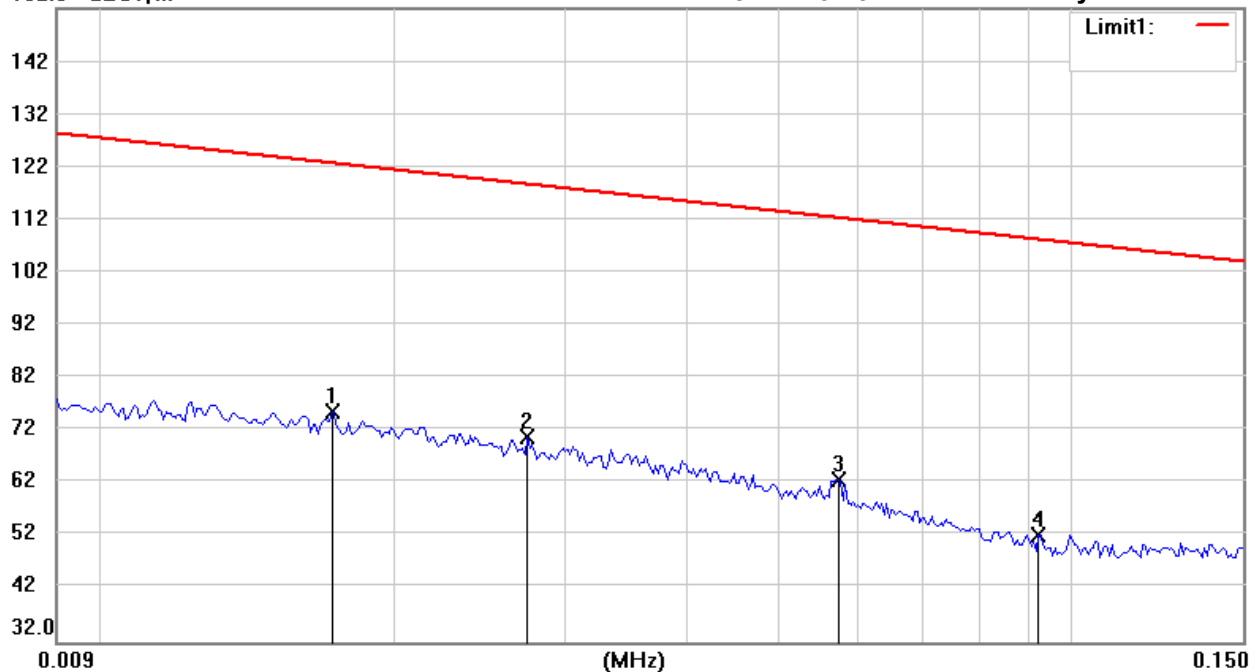

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22206-21889

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.0173	-5.39	peak	81.15	75.76	122.84	100	258	-47.08	
	0.0275	-6.39	peak	77.27	70.88	118.81	100	199	-47.93	
	0.0575	-7.83	peak	70.71	62.88	112.41	100	62	-49.53	
	0.0924	-13.67	peak	65.96	52.29	108.29	100	347	-56.00	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 2

Data : #1


Date: 6/13/2022

Temperature: 25.2 °C

132.0 dBuV/m

Time: 11:27:12 AM

Humidity: 65.2 %

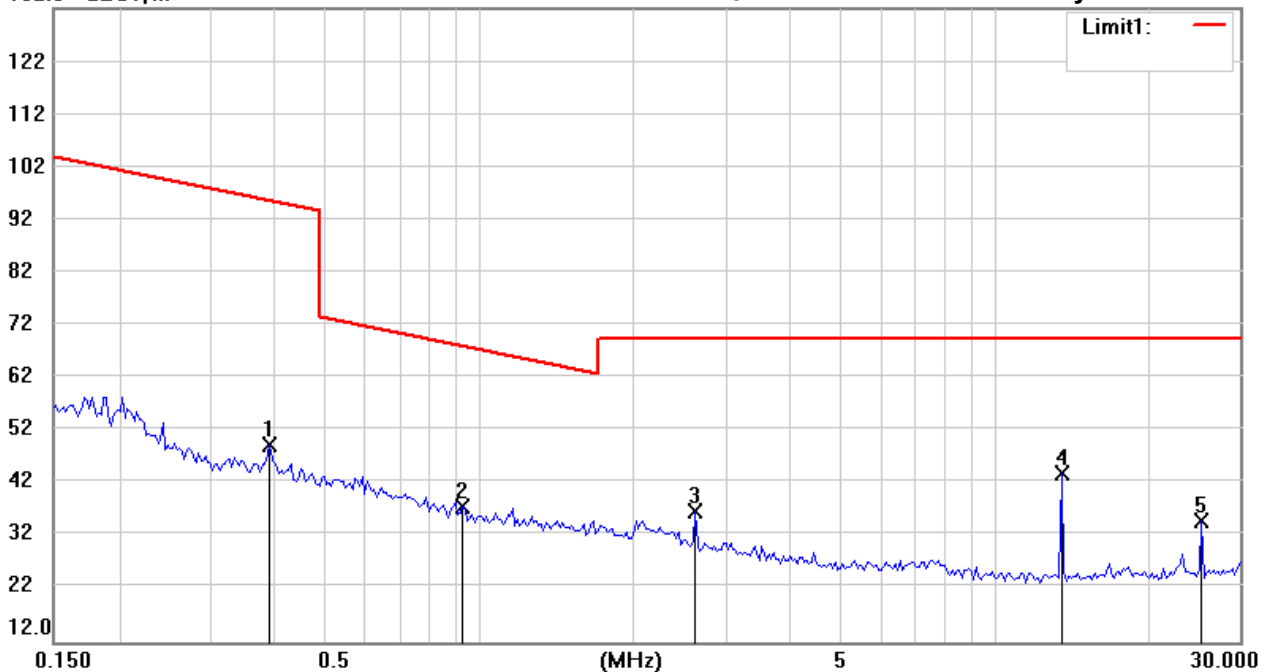

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22206-21889

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.3941	-4.84	peak	54.08	49.24	95.69	100	258	-46.45	
	0.9315	-9.55	peak	47.08	37.53	68.22	100	116	-30.69	
	2.6371	-2.84	peak	39.71	36.87	69.54	100	322	-32.67	
*	13.5291	10.14	peak	33.76	43.90	69.54			-25.64	RF Power
	25.3127	2.18	peak	32.77	34.95	69.54	100	190	-34.59	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#1


Date: 6/13/2022

Temperature: 25.2 °C

80.0 dBuV/m

Time: 3:29:43 PM

Humidity: 65.2 %

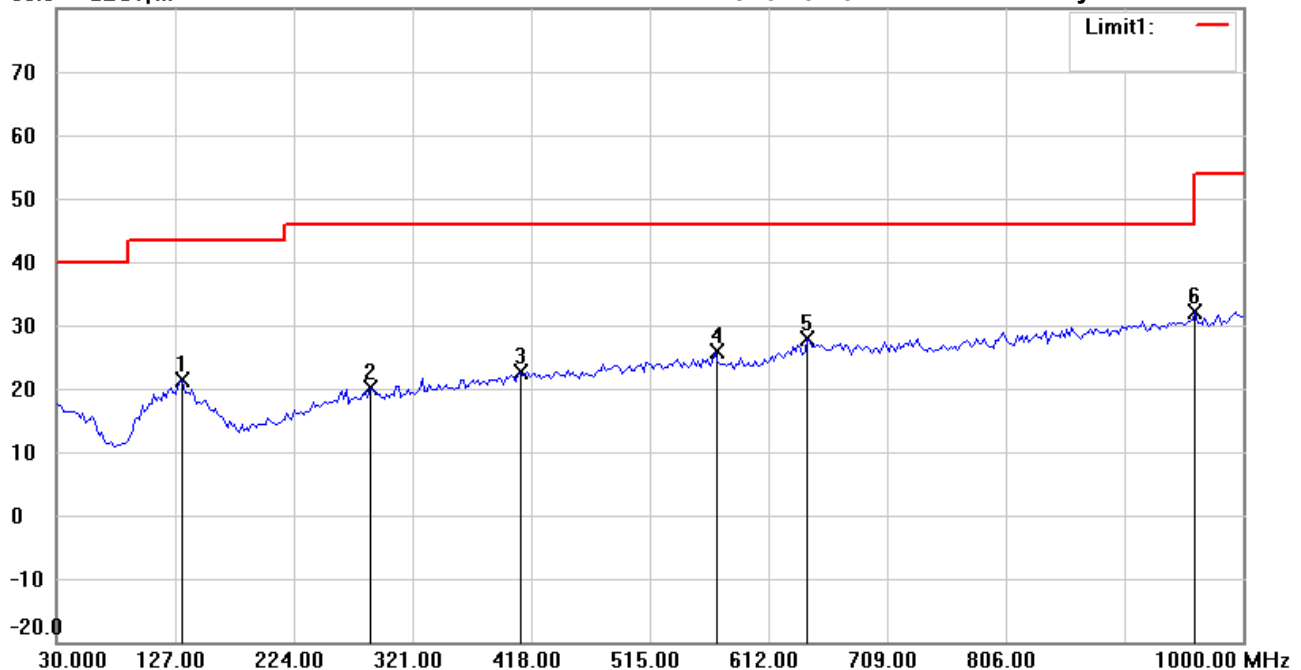

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22206-21889

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	133.0261	27.72	peak	-6.30	21.42	43.50	110	36	-22.08	
	286.5932	26.24	peak	-6.05	20.19	46.00	100	112	-25.81	
	409.0581	26.36	peak	-3.73	22.63	46.00	100	175	-23.37	
	568.4570	27.92	peak	-2.02	25.90	46.00	100	80	-20.10	
*	644.2685	27.39	peak	0.43	27.82	46.00	100	306	-18.18	
	961.1222	26.99	peak	5.15	32.14	54.00	100	335	-21.86	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#2


Date: 6/13/2022

Temperature: 25.2 °C

80.0 dBuV/m

Time: 3:33:00 PM

Humidity: 65.2 %

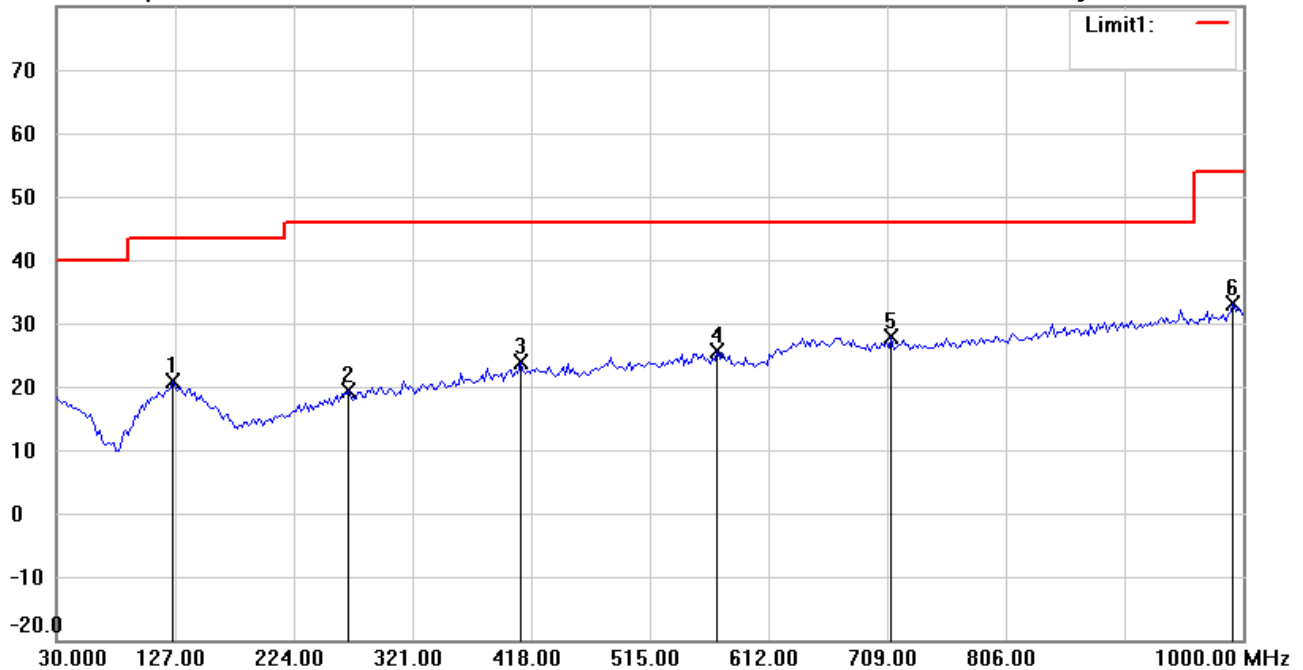

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22206-21889

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	125.2505	27.10	peak	-6.29	20.81	43.50	100	314	-22.69	
	269.0982	26.08	peak	-6.67	19.41	46.00	100	192	-26.59	
	409.0581	27.59	peak	-3.73	23.86	46.00	100	54	-22.14	
	570.4008	27.72	peak	-2.04	25.68	46.00	100	17	-20.32	
*	712.3046	27.65	peak	0.28	27.93	46.00	100	337	-18.07	
	992.2243	27.20	peak	5.83	33.03	54.00	100	106	-20.97	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :1

Data :#1


Date: 6/13/2022

Temperature: 25.2 °C

152.0 dBuV/m

Time: 11:25:04 AM

Humidity: 65.2 %

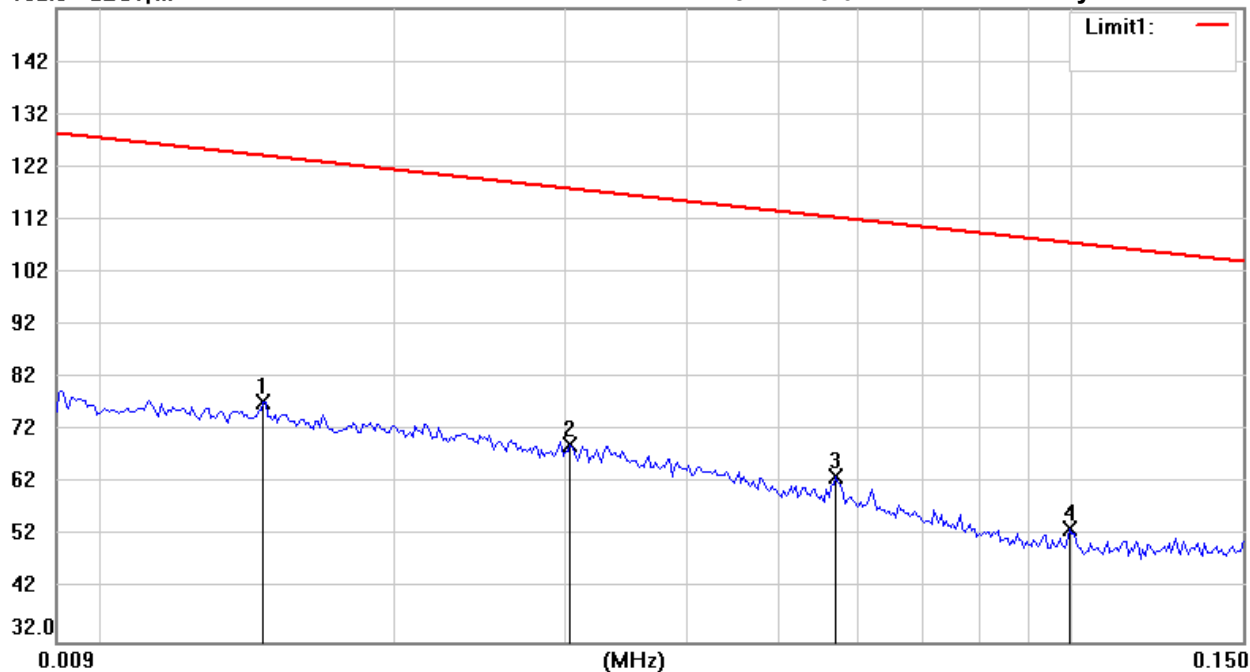

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22206-21889

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.0147	-4.72	peak	82.14	77.42	124.25	100	258	-46.83	
	0.0304	-6.80	peak	76.23	69.43	117.94	100	113	-48.51	
	0.0572	-7.30	peak	70.75	63.45	112.45	100	60	-49.00	
	0.0994	-11.49	peak	65.00	53.51	107.65	100	297	-54.14	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :2

Data :#1


Date: 6/13/2022

Temperature:25.2 °C

132.0 dBuV/m

Time: 11:35:56 AM

Humidity:65.2 %

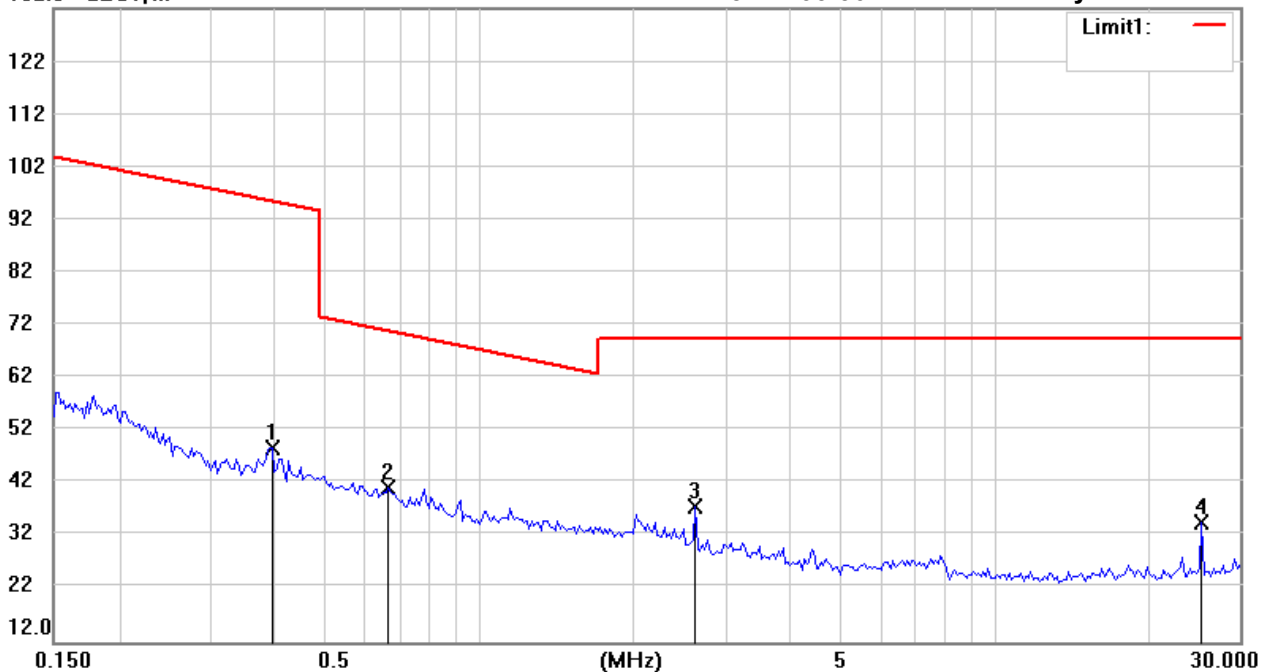

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22206-21889

M/N:

Test Mode : RX 13.56MHz

Polarization:

Power : 3 Vd.c.

Distance: 3m

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.3984	-5.27	peak	53.99	48.72	95.60	100	158	-46.88	
*	0.6703	-8.74	peak	50.00	41.26	71.08	100	90	-29.82	
	2.6371	-2.13	peak	39.71	37.58	69.54	100	326	-31.96	
	25.3128	1.76	peak	32.77	34.53	69.54	100	255	-35.01	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#1


Date: 6/13/2022

Temperature: 25.2 °C

80.0 dBuV/m

Time: 3:10:38 PM

Humidity: 65.2 %

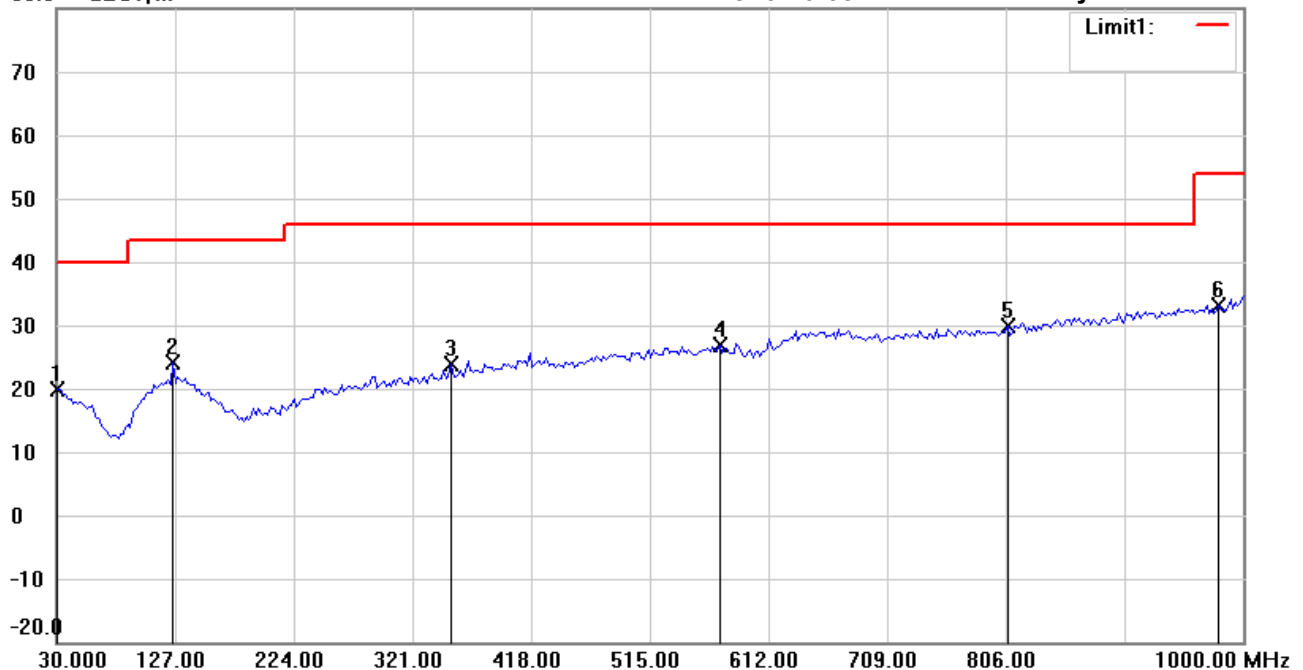

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M22206-21889

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.0000	27.79	peak	-7.85	19.94	40.00	100	23	-20.06	
	125.2505	30.36	peak	-6.29	24.07	43.50	100	167	-19.43	
	352.6854	28.92	peak	-4.95	23.97	46.00	100	95	-22.03	
	572.3446	29.02	peak	-2.06	26.96	46.00	100	114	-19.04	
*	807.5551	28.34	peak	1.56	29.90	46.00	100	87	-16.10	
	980.5611	27.62	peak	5.58	33.20	54.00	100	102	-20.80	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#2


Date: 6/13/2022

Temperature: 25.2 °C

80.0 dBuV/m

Time: 3:14:46 PM

Humidity: 65.2 %

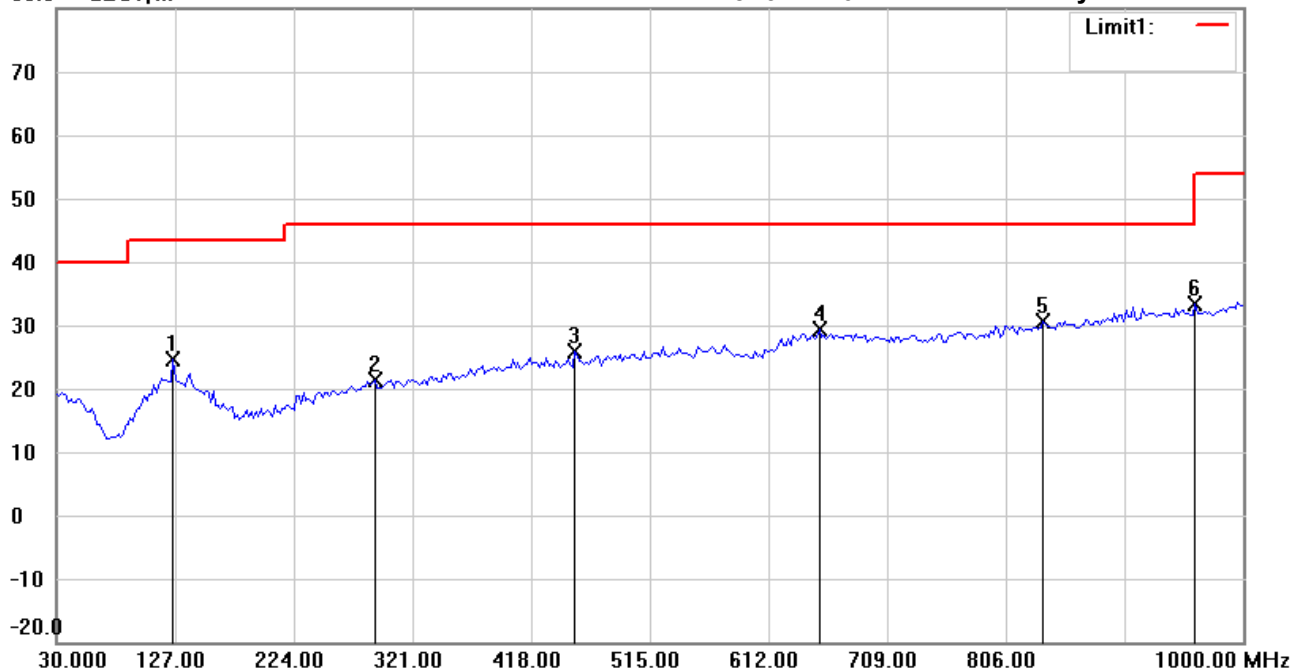

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M22206-21889

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	125.2505	30.90	peak	-6.29	24.61	43.50	100	85	-18.89	
	290.4810	27.29	peak	-5.91	21.38	46.00	100	117	-24.62	
	453.7674	29.15	peak	-3.34	25.81	46.00	100	204	-20.19	
	653.9880	28.58	peak	0.72	29.30	46.00	100	312	-16.70	
*	836.7133	28.19	peak	2.45	30.64	46.00	100	356	-15.36	
	961.1222	28.12	peak	5.15	33.27	54.00	100	109	-20.73	

*:Maximum data x:Over limit !:over margin