



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Evolve 3 Holdings Pty Ltd

Address: PO BOX 6222, NARRAWEENA, NSW, Australia

FCC ID: 2AWLG-T3P1165GV1

Product Name: Laptop

Standard(s): 47 CFR Part 15, Subpart C(15.247)

ANSI C63.10-2013

KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231061458-00C

Date Of Issue: 2024/1/12

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By : Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	9
1.3 Measurement Uncertainty	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	16
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	17
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 MINIMUM 6 dB BANDWIDTH:	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 99% OCCUPIED BANDWIDTH:	20
3.4.1 EUT Setup.....	20
3.4.2 Test Procedure	20
3.5 MAXIMUM CONDUCTED OUTPUT POWER:	21
3.5.1 Applicable Standard.....	21
3.5.2 EUT Setup.....	21
3.5.3 Test Procedure	21
3.6 MAXIMUM POWER SPECTRAL DENSITY:	22
3.6.1 Applicable Standard.....	22
3.6.2 EUT Setup.....	22
3.6.3 Test Procedure	22
3.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:	23
3.7.1 Applicable Standard.....	23
3.7.2 EUT Setup.....	23
3.7.3 Test Procedure	23

3.8 DUTY CYCLE:	24
3.8.1 EUT Setup.....	24
3.8.2 Test Procedure	24
3.9 ANTENNA REQUIREMENT	24
3.9.1 Applicable Standard.....	24
3.9.2 Judgment.....	24
4. Test DATA AND RESULTS	25
4.1 AC LINE CONDUCTED EMISSIONS	25
4.2 RADIATION SPURIOUS EMISSIONS	28
4.3 MINIMUM 6 dB EMISSION BANDWIDTH	50
4.4 99% OCCUPIED BANDWIDTH	57
4.5 MAXIMUM CONDUCTED OUTPUT POWER	64
4.6 MAXIMUM POWER SPECTRAL DENSITY	67
4.7 100 KHz BANDWIDTH OF FREQUENCY BAND EDGE	75
4.8 DUTY CYCLE	82
5. EUT PHOTOGRAPHS	85
6. TEST SETUP PHOTOGRAPHS	86

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231061458-00C	Original Report	2024/1/12

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Laptop
Trade Name:	evolve 
EUT Model:	T3P1165GV1
Operation Frequency:	2412-2462 MHz (802.11b/g/n ht20/ax hew20) 2422-2452 MHz (802.11n ht40/ax hew40)
Maximum Peak Output Power (Conducted):	26.10 dBm
Modulation Type:	802.11b: DSSS-DBPSK, DQPSK, CCK 802.11g/n: OFDM-BPSK, QPSK, 16QAM, 64QAM 802.11ax: OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Rated Input Voltage:	DC 5-20V from type-c adapter or DC 19V from DC adapter or DC 7.6V from battery
Serial Number:	2CHZ-1(For Emission Test) 2CHZ-2(For RF Conducted Test)
EUT Received Date:	2023/10/23
EUT Received Status:	Good
Note: Conducted Emissions Test and Radiated Emissions Test only performed at DC Adapter since the worst is mode: DC Adapter per test for DSS report.	

Operation Frequency Detail:

For 802.11b/g/n ht20/ax hew20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/
Per section 15.31(m), the below frequencies were performed to test:			
Test Channel		Frequency (MHz)	
Lowest		2412	
Middle		2437	
Highest		2462	

For 802.11n ht40/ax hew40:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437	/	/

Per section 15.31(m), the below frequencies were performed to test:

Test Channel	Frequency (MHz)
Lowest	2422
Middle	2437
Highest	2452

Antenna Information Detail▲:

Antenna	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Main Antenna (Support WLAN)(Chain 1)	PIFA Antenna	50	2.4~2.5GHz	2.51dBi
AUX Antenna (Support BT+WLAN) (Chain 0)	PIFA Antenna	50	2.4~2.5GHz	2.57dBi

The Method of §15.203 Compliance:

- ☒ Antenna was permanently attached to the unit.
☐ Antenna use a unique type of connector to attach to the EUT.
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model
USB Type-C Adapter	Shenzhen Jihongda Power Co.,Ltd.	JHD-AP045U-PD-BF502

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:		The system was configured for testing in Engineering Mode, which was provided by the manufacturer.			
Equipment Modifications:		No			
EUT Exercise Software:		DRTU.exe			
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:					
Mode	Channel	Frequency (MHz)	Data Rate	Power Level Setting	
				Chain 0	Chain 1
802.11b	Lowest	2412	1Mbps	14	14
	Middle	2437	1Mbps	14	14
	Highest	2462	1Mbps	14	14
802.11g	Lowest	2412	6Mbps	14	14
	Middle	2437	6Mbps	14	14
	Highest	2462	6Mbps	14	14
802.11n ht20	Lowest	2412	HT8	14	14
	Middle	2437	HT8	14	14
	Highest	2462	HT8	14	14
802.11n ht40	Lowest	2422	HT8	14	14
	Middle	2437	HT8	14	14
	Highest	2452	HT8	14	14
802.11ax hew20	Lowest	2412	MCS8	14	14
	Middle	2437	MCS8	14	14
	Highest	2462	MCS8	14	14
802.11ax hew40	Lowest	2422	MCS8	14	14
	Middle	2437	MCS8	14	14
	Highest	2452	MCS8	14	14

Note:

1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the power and PSD across all data rates, bandwidths, and modulations.

2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ax modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ax modes.

3. For 802.11 ax mode, the device only supports full-RU.

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
PHILIPS	Monitor	24PFF5595/T3	XM2A2124000343
SanDisk	TF Card	16 GB	1183DRECV11N
Xinspower	DC Adapter	A361-1203000D	Unknown
CLC	Earphone	Whiteview5.0	EP21107125
DongFeng	Phone	P3	UP3_BSGF187E000165


1.2.3 Support Cable List and Details



Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	1.2	Type-C Adapter	EUT
Power Cable	No	No	1.2	DC Adapter	LISN1
Power Cable	No	No	1	DC Adapter	EUT
Power Cable	No	No	1.5	Monitor	LISN2
Earphone Cable	No	No	1	EUT	Earphone
HDMI Cable	No	No	0.8	EUT	Monitor
USB Cable	No	No	1.2	EUT	Phone
Keyboard Cable	No	No	1.2	EUT	Keyboard
Mouse Cable	No	No	1.2	EUT	Mouse

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:

DC Adapter:

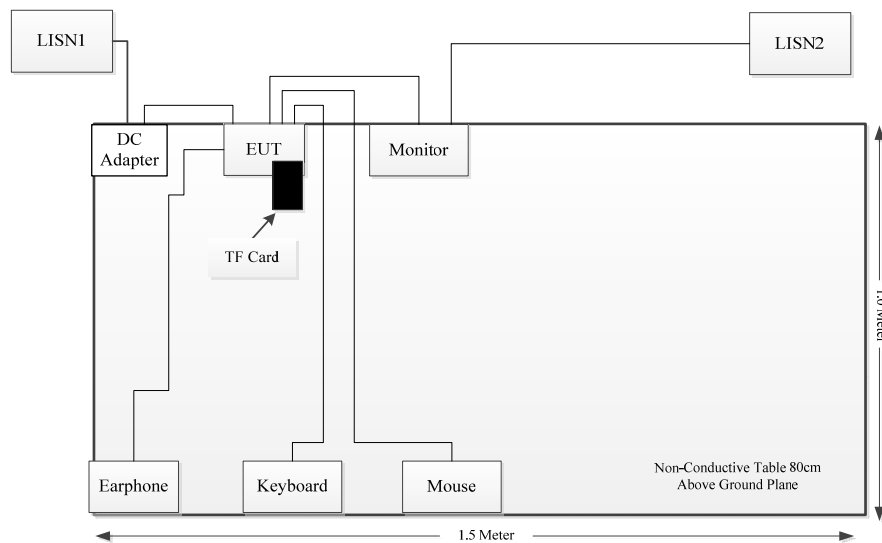

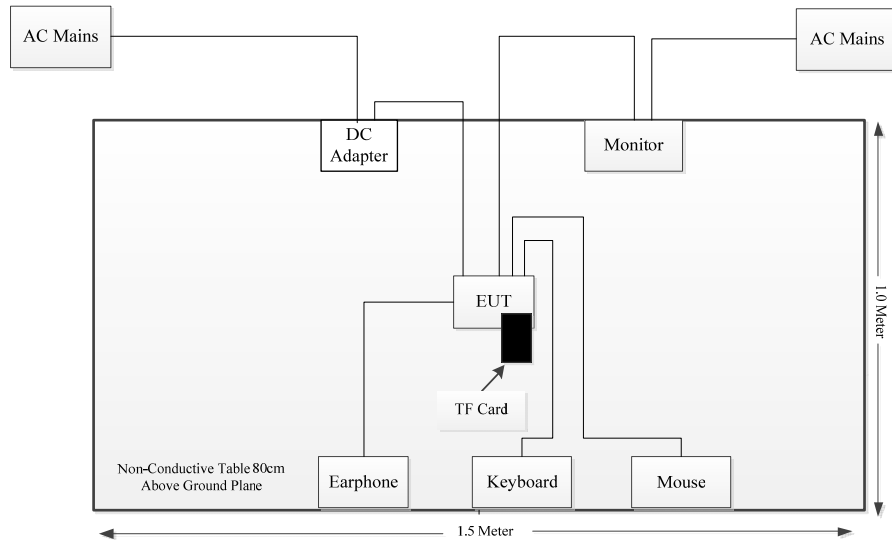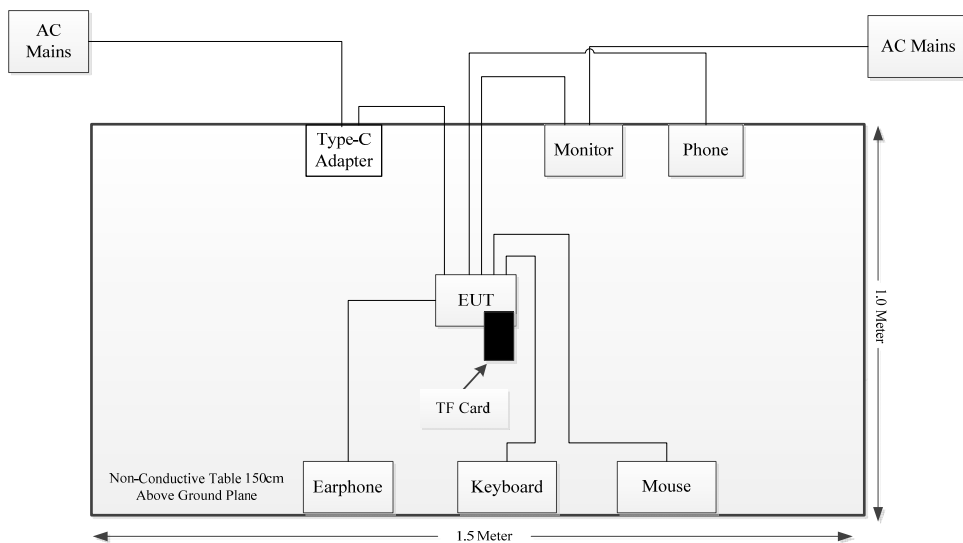Radiation Spurious Emissions:**DC Adapter:****Type-C Adapter:**

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.247 (a)(2)	Minimum 6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.203	Antenna Requirement	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


3.2.2 EUT Setup

9kHz~30MHz:

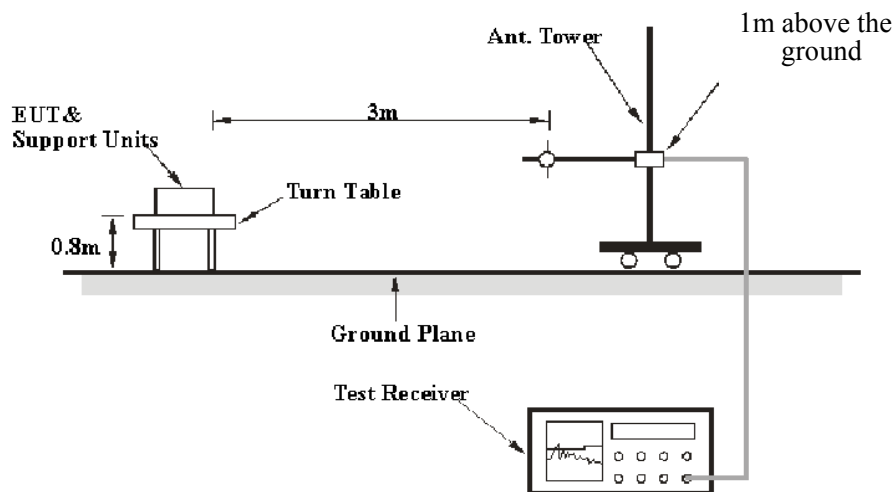

30MHz~1GHz:

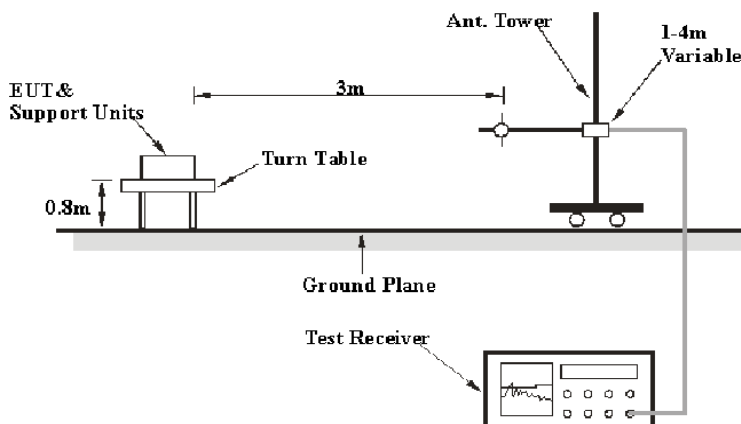

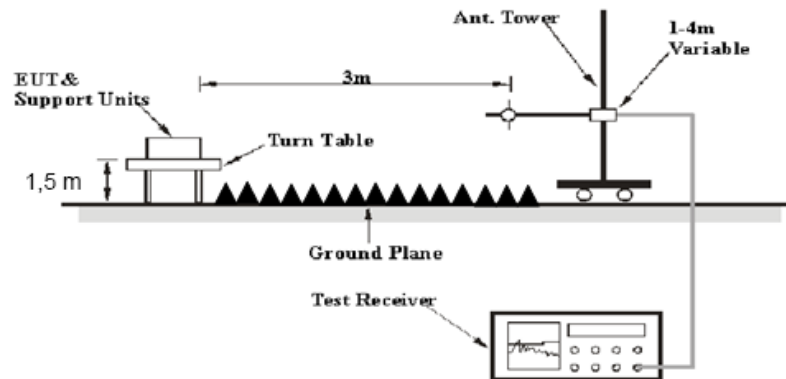Above 1GHz:

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	/	PK
	/	/	200 Hz	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	/	PK
	/	/	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120 kHz	QP

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz, average detection modes for the frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 Minimum 6 dB Bandwidth:

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup

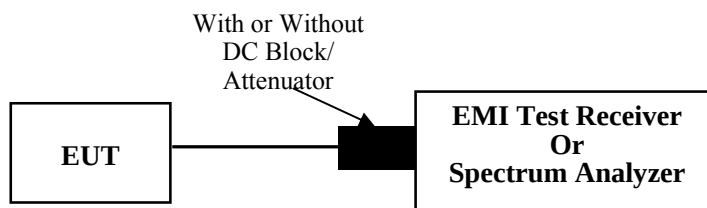


3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.4 99% Occupied Bandwidth:

3.4.1 EUT Setup

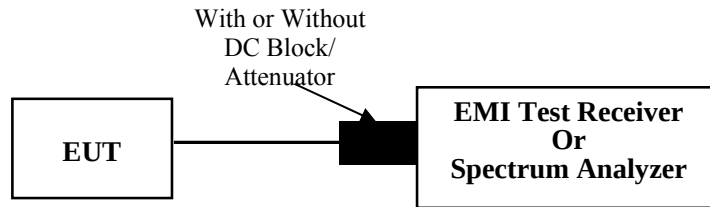

3.4.2 Test Procedure

According to ANSI C63.10-2013 Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.5 Maximum Conducted Output Power:

3.5.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.5.2 EUT Setup

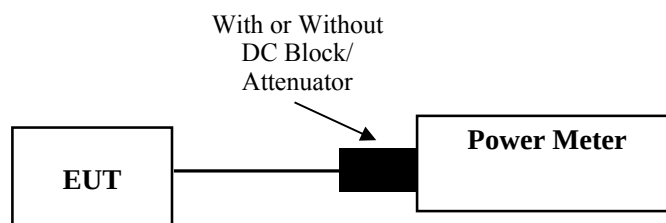

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

According to ANSI C63.10-2013 Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

- a) Set the EUT in transmitting mode.
- b) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- c) Add a correction factor to the display.
- d) Set the power meter to test peak output power, record the result.


3.6 Maximum Power Spectral Density:

3.6.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2 EUT Setup

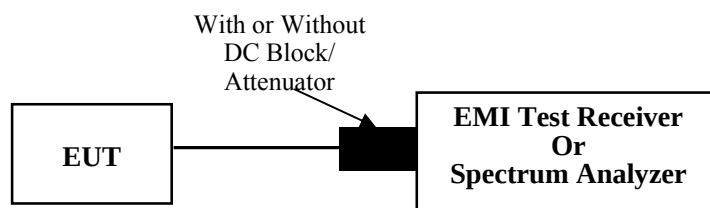

3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \cdot \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


3.7 100 kHz Bandwidth of Frequency Band Edge:

3.7.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.7.2 EUT Setup

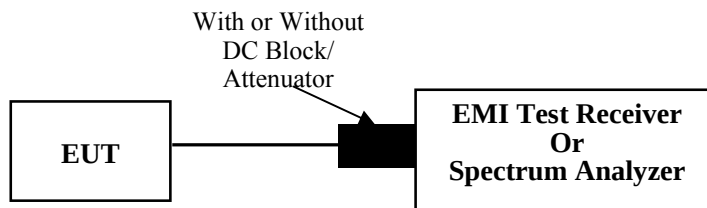

3.7.3 Test Procedure


According to ANSI C63.10-2013 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.8 Duty Cycle:

3.8.1 EUT Setup

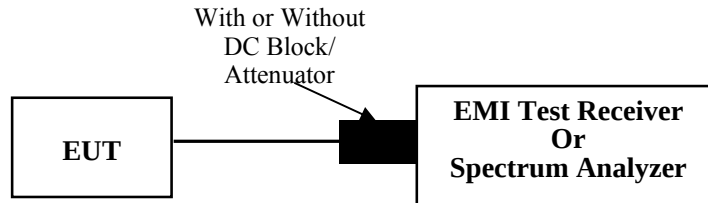

3.8.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2CHZ-1	Test Date:	2023/11/15
Test Site:	CE	Test Mode:	Transmitting (Tested at Maximum output power mode: 802.11ax hew20, Middle channel.)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	LISN	ENV216	101132	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


DC Adapter:

Project No.: CR231061458-RF
Tester: David Huang
Port: Line
Note: Transmitting(2.4G WIFI)

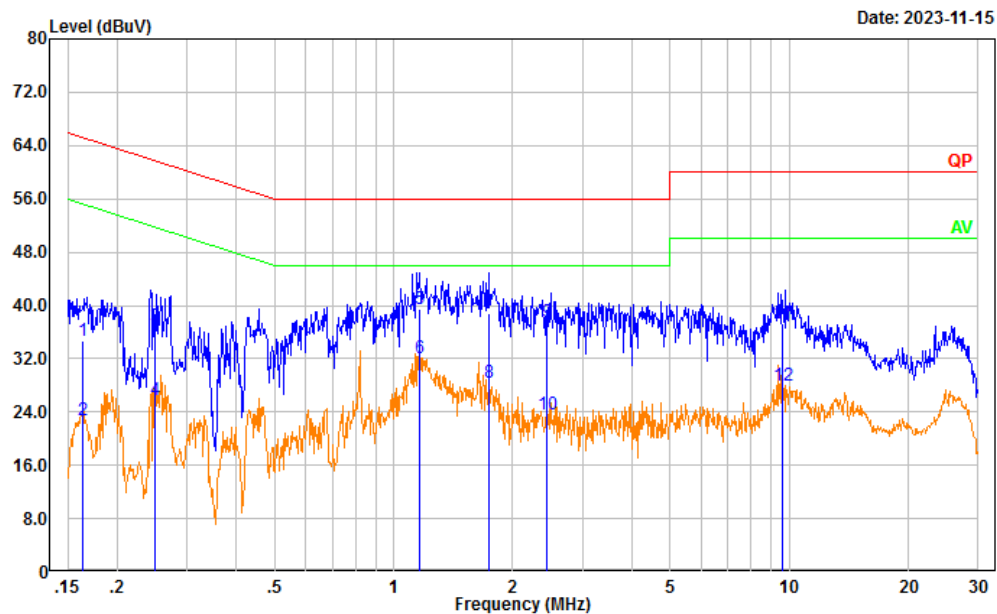

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.164	25.17	9.61	34.78	65.25	30.47	QP
2	0.164	13.08	9.61	22.69	55.25	32.56	Average
3	0.250	27.25	9.61	36.86	61.77	24.91	QP
4	0.250	16.27	9.61	25.88	51.77	25.89	Average
5	1.165	29.79	9.62	39.41	56.00	16.59	QP
6	1.165	22.37	9.62	31.99	46.00	14.01	Average
7	1.746	29.16	9.63	38.79	56.00	17.21	QP
8	1.746	18.79	9.63	28.42	46.00	17.58	Average
9	2.445	27.78	9.64	37.42	56.00	18.58	QP
10	2.445	14.10	9.64	23.74	46.00	22.26	Average
11	9.609	27.61	9.67	37.28	60.00	22.72	QP
12	9.609	18.38	9.67	28.05	50.00	21.95	Average

Project No.: CR231061458-RF
 Tester: David Huang
 Port: neutral
 Note: Transmitting(2.4G WIFI)

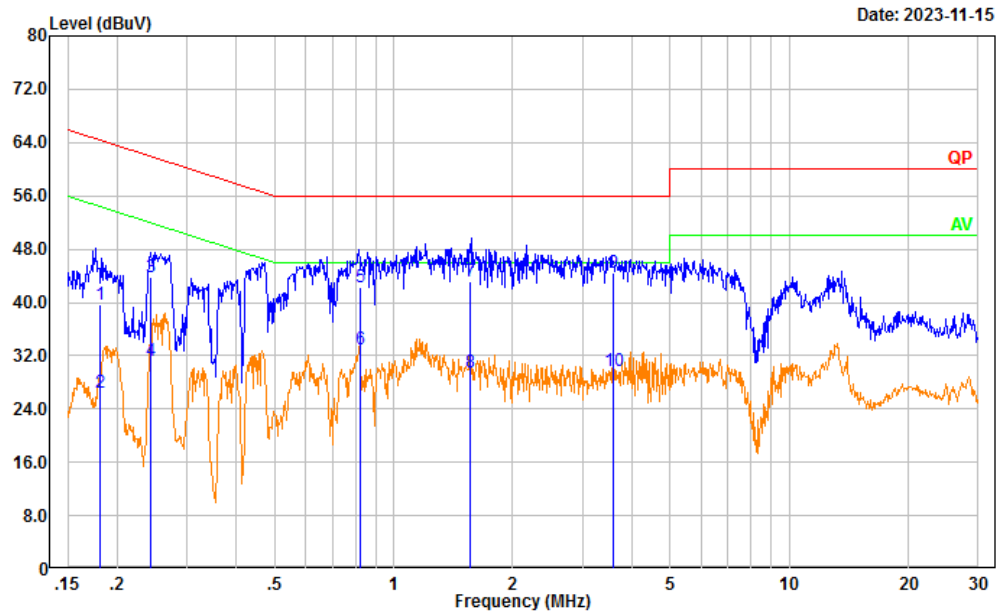

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.180	30.09	9.61	39.70	64.47	24.77	QP
2	0.180	16.88	9.61	26.49	54.47	27.98	Average
3	0.243	34.16	9.61	43.77	62.00	18.23	QP
4	0.243	21.58	9.61	31.19	52.00	20.81	Average
5	0.822	32.55	9.62	42.17	56.00	13.83	QP
6	0.822	23.39	9.62	33.01	46.00	12.99	Average
7	1.562	33.58	9.63	43.21	56.00	12.79	QP
8	1.562	19.86	9.63	29.49	46.00	16.51	Average
9	3.577	34.86	9.65	44.51	56.00	11.49	QP
10	3.577	20.14	9.65	29.79	46.00	16.21	Average
11	5.460	-13.36	9.66	-3.70	60.00	63.70	QP
12	5.460	-18.54	9.66	-8.88	50.00	58.88	Average

4.2 Radiation Spurious Emissions

Serial Number:	2CHZ-1	Test Date:	2023/11/16~2023/11/20
Test Site:	966-2,966-1	Test Mode:	Transmitting
Tester:	Jeff Luo, coco Tian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1~25.7	Relative Humidity: (%)	52~56	ATM Pressure: (kPa)	101.3~101.8
-------------------	-----------	------------------------	-------	---------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Spurious Emissions Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
BACL	Loop Antenna	1313-1P	3092721	2023/10/20	2026/10/19
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
Radiation Spurious Emissions Above 1GHz					
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst-case Y axes is below:

Please refer to the below table and plots.

1) 9kHz~30MHz

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

2) 30MHz-1GHz

Note:

- 1. Powered from DC IN port was the worst.*
- 2. Tested at Maximum output power mode: 802.11ax hew20.*


Please refer to the below plots.

DC Adapter:

Low Channel

Project No.: CR231061458-RF
Tester: Jeff Luo
Polarization: horizontal
Note:


Date: 2023-11-16

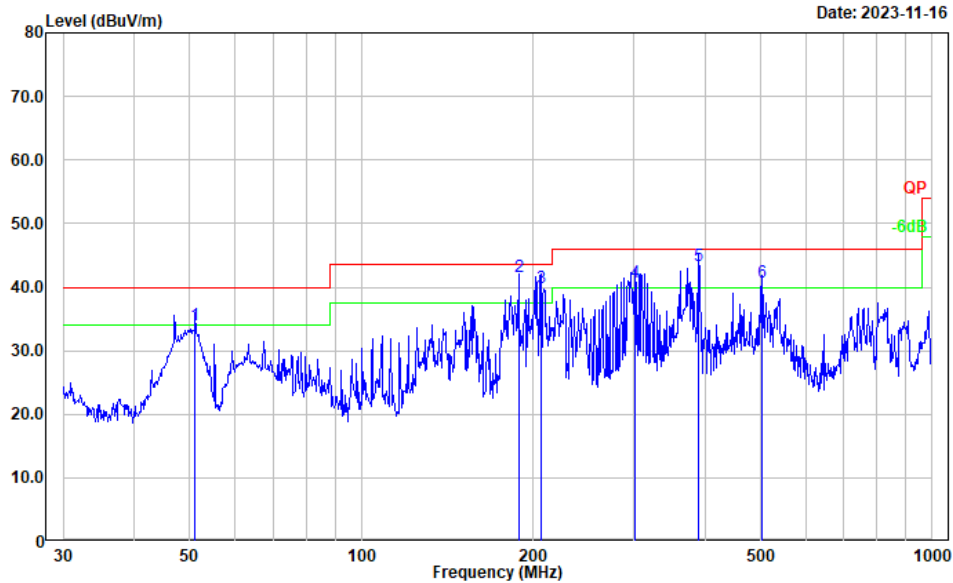

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	51.121	51.20	-17.11	34.09	40.00	5.91	QP
2	188.413	55.07	-13.49	41.58	43.50	1.92	QP
3	206.398	52.38	-12.40	39.98	43.50	3.52	QP
4	301.422	51.27	-10.61	40.66	46.00	5.34	QP
5	389.355	52.22	-8.91	43.31	46.00	2.69	QP
6	502.940	46.75	-5.95	40.80	46.00	5.20	QP

Low Channel

Project No.: CR231061458-RF
Tester: Jeff Luo
Polarization: vertical
Note:

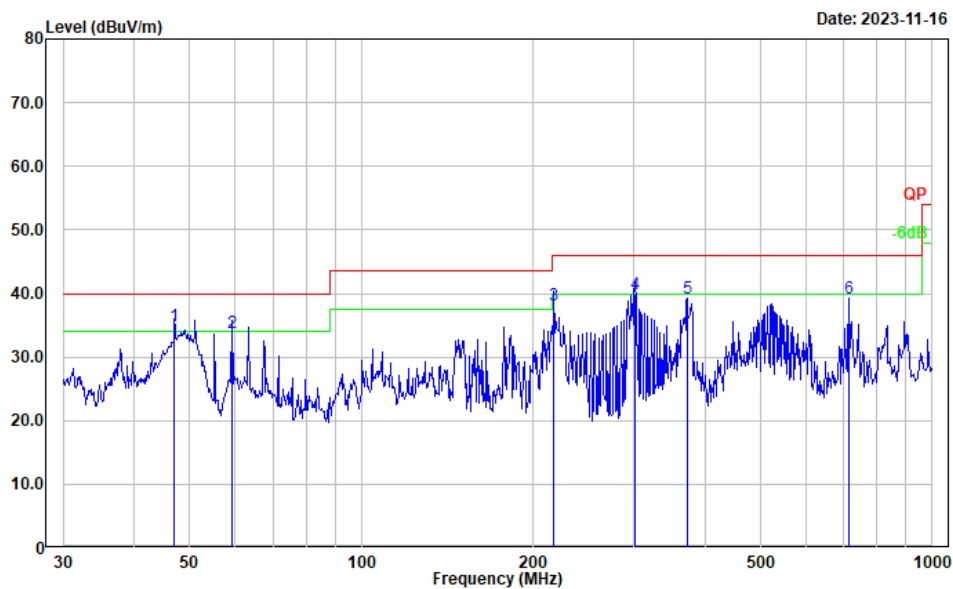


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	46.995	50.38	-15.39	34.99	40.00	5.01	QP
2	59.232	51.17	-17.32	33.85	40.00	6.15	QP
3	217.544	50.98	-12.76	38.22	46.00	7.78	QP
4	301.422	50.45	-10.61	39.84	46.00	6.16	QP
5	372.005	48.77	-9.45	39.32	46.00	6.68	Peak
6	714.173	42.83	-3.49	39.34	46.00	6.66	Peak

Middle Channel

Project No.: CR231061458-RF
Tester: Jeff Luo
Polarization: horizontal
Note:


Date: 2023-11-16

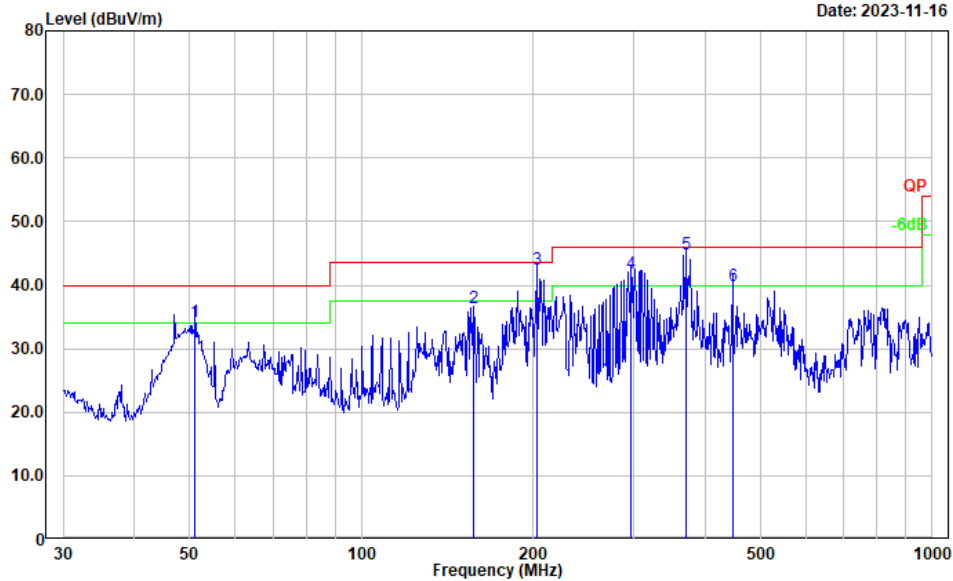

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	51.121	51.46	-17.11	34.35	40.00	5.65	QP
2	157.007	48.47	-11.94	36.53	43.50	6.97	Peak
3	202.810	54.72	-12.30	42.42	43.50	1.08	QP
4	297.224	52.57	-10.71	41.86	46.00	4.14	QP
5	370.702	54.28	-9.49	44.79	46.00	1.21	QP
6	446.414	46.87	-7.08	39.79	46.00	6.21	QP

Middle Channel

Project No.: CR231061458-RF
Tester: Jeff Luo
Polarization: vertical
Note:

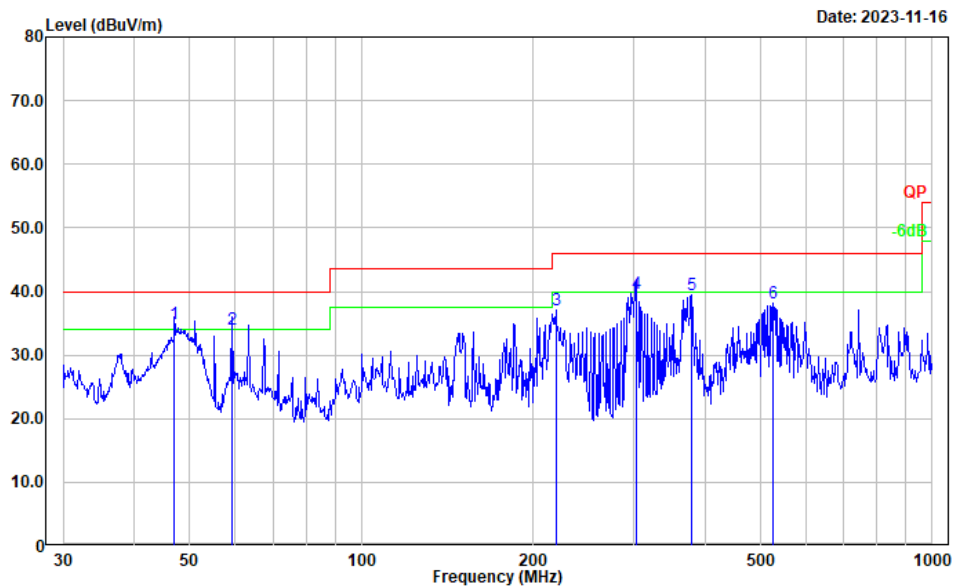


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	46.995	50.34	-15.39	34.95	40.00	5.05	QP
2	59.441	51.28	-17.31	33.97	40.00	6.03	QP
3	219.075	49.91	-12.82	37.09	46.00	8.91	Peak
4	302.481	50.35	-10.61	39.74	46.00	6.26	QP
5	378.584	48.73	-9.17	39.56	46.00	6.44	Peak
6	526.397	44.13	-5.91	38.22	46.00	7.78	Peak

High Channel

Project No.: CR231061458-RF
Tester: Jeff Luo
Polarization: horizontal
Note:


Date: 2023-11-16

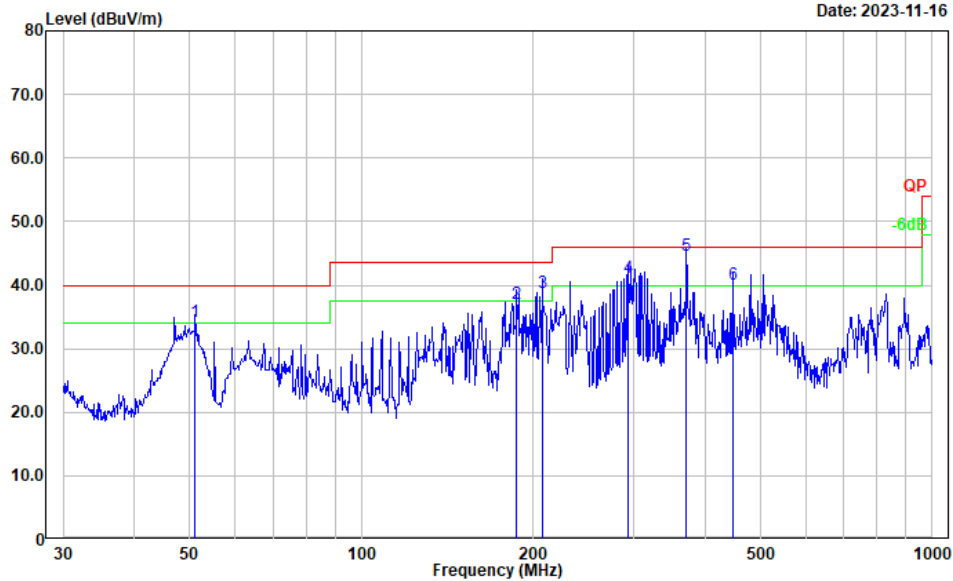

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	51.121	51.47	-17.11	34.36	40.00	5.64	QP
2	187.096	50.69	-13.54	37.15	43.50	6.35	QP
3	207.123	51.30	-12.41	38.89	43.50	4.61	QP
4	293.084	51.98	-10.88	41.10	46.00	4.90	QP
5	370.702	54.20	-9.49	44.71	46.00	1.29	QP
6	446.414	47.14	-7.08	40.06	46.00	5.94	QP

High Channel

Project No.: CR231061458-RF
Tester: Jeff Luo
Polarization: vertical
Note:

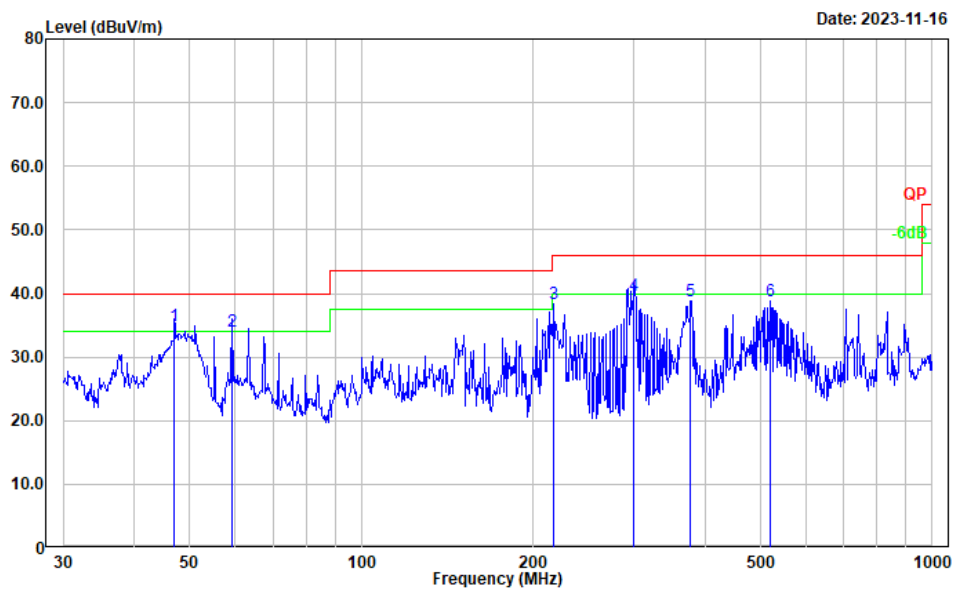

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	46.995	50.39	-15.39	35.00	40.00	5.00	QP
2	59.441	51.32	-17.31	34.01	40.00	5.99	QP
3	217.544	51.11	-12.76	38.35	46.00	7.65	Peak
4	300.367	50.24	-10.63	39.61	46.00	6.39	QP
5	377.259	47.98	-9.22	38.76	46.00	7.24	Peak
6	519.065	44.71	-5.84	38.87	46.00	7.13	Peak

3) 1-25GHz (Type-C Adapter):**802.11b Mode Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2390.000	26.73	PK	H	31.71	58.44	74.00	15.56
2390.000	13.49	AV	H	31.71	45.20	54.00	8.80
2390.000	26.39	PK	V	31.71	58.10	74.00	15.90
2390.000	13.54	AV	V	31.71	45.25	54.00	8.75
4824.000	35.67	PK	H	11.26	46.93	74.00	27.07
4824.000	22.15	AV	H	11.26	33.41	54.00	20.59
4824.000	35.69	PK	V	11.26	46.95	74.00	27.05
4824.000	22.47	AV	V	11.26	33.73	54.00	20.27
7236.000	33.43	PK	H	15.24	48.67	74.00	25.33
7236.000	20.15	AV	H	15.24	35.39	54.00	18.61
7236.000	33.40	PK	V	15.24	48.64	74.00	25.36
7236.000	20.33	AV	V	15.24	35.57	54.00	18.43
Middle Channel: 2437 MHz							
4874.000	35.63	PK	H	11.45	47.08	74.00	26.92
4874.000	22.38	AV	H	11.45	33.83	54.00	20.17
4874.000	35.37	PK	V	11.45	46.82	74.00	27.18
4874.000	22.51	AV	V	11.45	33.96	54.00	20.04
7311.000	33.34	PK	H	15.58	48.92	74.00	25.08
7311.000	20.67	AV	H	15.58	36.25	54.00	17.75
7311.000	33.39	PK	V	15.58	48.97	74.00	25.03
7311.000	20.25	AV	V	15.58	35.83	54.00	18.17
High Channel: 2462 MHz							
2483.500	27.12	PK	H	32.19	59.31	74.00	14.69
2483.500	13.98	AV	H	32.19	46.17	54.00	7.83
2483.500	27.09	PK	V	32.19	59.28	74.00	14.72
2483.500	14.01	AV	V	32.19	46.20	54.00	7.80
4924.000	37.65	PK	H	11.67	49.32	74.00	24.68
4924.000	24.59	AV	H	11.67	36.26	54.00	17.74
4924.000	37.84	PK	V	11.67	49.51	74.00	24.49
4924.000	24.39	AV	V	11.67	36.06	54.00	17.94
7386.000	33.49	PK	H	15.63	49.12	74.00	24.88
7386.000	20.97	AV	H	15.63	36.60	54.00	17.40
7386.000	33.81	PK	V	15.63	49.44	74.00	24.56
7386.000	20.96	AV	V	15.63	36.59	54.00	17.41

802.11b Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2390.000	26.75	PK	H	31.71	58.46	74.00	15.54
2390.000	13.64	AV	H	31.71	45.35	54.00	8.65
2390.000	26.83	PK	V	31.71	58.54	74.00	15.46
2390.000	13.49	AV	V	31.71	45.20	54.00	8.80
4824.000	35.36	PK	H	11.26	46.62	74.00	27.38
4824.000	22.67	AV	H	11.26	33.93	54.00	20.07
4824.000	26.05	PK	V	11.26	37.31	74.00	36.69
4824.000	23.09	AV	V	11.26	34.35	54.00	19.65
7236.000	33.49	PK	H	15.24	48.73	74.00	25.27
7236.000	20.37	AV	H	15.24	35.61	54.00	18.39
7236.000	33.57	PK	V	15.24	48.81	74.00	25.19
7236.000	20.81	AV	V	15.24	36.05	54.00	17.95
Middle Channel: 2437 MHz							
4874.000	35.79	PK	H	11.45	47.24	74.00	26.76
4874.000	22.97	AV	H	11.45	34.42	54.00	19.58
4874.000	36.13	PK	V	11.45	47.58	74.00	26.42
4874.000	23.07	AV	V	11.45	34.52	54.00	19.48
7311.000	33.65	PK	H	15.58	49.23	74.00	24.77
7311.000	20.38	AV	H	15.58	35.96	54.00	18.04
7311.000	33.49	PK	V	15.58	49.07	74.00	24.93
7311.000	20.41	AV	V	15.58	35.99	54.00	18.01
High Channel: 2462 MHz							
2483.500	27.05	PK	H	32.19	59.24	74.00	14.76
2483.500	13.96	AV	H	32.19	46.15	54.00	7.85
2483.500	26.79	PK	V	32.19	58.98	74.00	15.02
2483.500	13.97	AV	V	32.19	46.16	54.00	7.84
4924.000	37.57	PK	H	11.67	49.24	74.00	24.76
4924.000	24.82	AV	H	11.67	36.49	54.00	17.51
4924.000	37.27	PK	V	11.67	48.94	74.00	25.06
4924.000	24.92	AV	V	11.67	36.59	54.00	17.41
7386.000	34.19	PK	H	15.63	49.82	74.00	24.18
7386.000	21.13	AV	H	15.63	36.76	54.00	17.24
7386.000	34.23	PK	V	15.63	49.86	74.00	24.14
7386.000	21.08	AV	V	15.63	36.71	54.00	17.29

802.11g Mode Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2390.000	26.73	PK	H	31.71	58.44	74.00	15.56
2390.000	13.84	AV	H	31.71	45.55	54.00	8.45
2390.000	26.64	PK	V	31.71	58.35	74.00	15.65
2390.000	13.59	AV	V	31.71	45.30	54.00	8.70
4824.000	35.64	PK	H	11.26	46.90	74.00	27.10
4824.000	22.27	AV	H	11.26	33.53	54.00	20.47
4824.000	35.63	PK	V	11.26	46.89	74.00	27.11
4824.000	22.45	AV	V	11.26	33.71	54.00	20.29
7236.000	33.69	PK	H	15.24	48.93	74.00	25.07
7236.000	20.37	AV	H	15.24	35.61	54.00	18.39
7236.000	33.50	PK	V	15.24	48.74	74.00	25.26
7236.000	20.37	AV	V	15.24	35.61	54.00	18.39
Middle Channel: 2437 MHz							
4874.000	35.29	PK	H	11.45	46.74	74.00	27.26
4874.000	22.18	AV	H	11.45	33.63	54.00	20.37
4874.000	35.43	PK	V	11.45	46.88	74.00	27.12
4874.000	22.20	AV	V	11.45	33.65	54.00	20.35
7311.000	33.43	PK	H	15.58	49.01	74.00	24.99
7311.000	20.35	AV	H	15.58	35.93	54.00	18.07
7311.000	33.45	PK	V	15.58	49.03	74.00	24.97
7311.000	20.34	AV	V	15.58	35.92	54.00	18.08
High Channel: 2462 MHz							
2483.500	27.13	PK	H	32.19	59.32	74.00	14.68
2483.500	14.03	AV	H	32.19	46.22	54.00	7.78
2483.500	27.13	PK	V	32.19	59.32	74.00	14.68
2483.500	14.21	AV	V	32.19	46.40	54.00	7.60
4924.000	35.63	PK	H	11.67	47.30	74.00	26.70
4924.000	22.34	AV	H	11.67	34.01	54.00	19.99
4924.000	35.39	PK	V	11.67	47.06	74.00	26.94
4924.000	22.62	AV	V	11.67	34.29	54.00	19.71
7386.000	33.47	PK	H	15.63	49.10	74.00	24.90
7386.000	20.39	AV	H	15.63	36.02	54.00	17.98
7386.000	33.62	PK	V	15.63	49.25	74.00	24.75
7386.000	20.52	AV	V	15.63	36.15	54.00	17.85

802.11g Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2390.000	26.93	PK	H	31.71	58.64	74.00	15.36
2390.000	13.94	AV	H	31.71	45.65	54.00	8.36
2390.000	26.58	PK	V	31.71	58.29	74.00	15.71
2390.000	13.85	AV	V	31.71	45.56	54.00	8.44
4824.000	35.64	PK	H	11.26	46.90	74.00	27.11
4824.000	22.31	AV	H	11.26	33.57	54.00	20.44
4824.000	35.51	PK	V	11.26	46.77	74.00	27.23
4824.000	22.54	AV	V	11.26	33.80	54.00	20.21
7236.000	33.58	PK	H	15.24	48.82	74.00	25.18
7236.000	20.38	AV	H	15.24	35.62	54.00	18.38
7236.000	33.56	PK	V	15.24	48.80	74.00	25.20
7236.000	20.45	AV	V	15.24	35.69	54.00	18.32
Middle Channel: 2437 MHz							
4874.000	35.62	PK	H	11.45	47.07	74.00	26.93
4874.000	22.37	AV	H	11.45	33.82	54.00	20.18
4874.000	35.64	PK	V	11.45	47.09	74.00	26.91
4874.000	22.56	AV	V	11.45	34.01	54.00	19.99
7311.000	33.26	PK	H	15.58	48.84	74.00	25.16
7311.000	20.37	AV	H	15.58	35.95	54.00	18.05
7311.000	33.46	PK	V	15.58	49.04	74.00	24.96
7311.000	20.28	AV	V	15.58	35.86	54.00	18.14
High Channel: 2462 MHz							
2483.500	27.24	PK	H	32.19	59.43	74.00	14.57
2483.500	14.00	AV	H	32.19	46.19	54.00	7.82
2483.500	27.09	PK	V	32.19	59.28	74.00	14.72
2483.500	14.04	AV	V	32.19	46.23	54.00	7.77
4924.000	36.01	PK	H	11.67	47.68	74.00	26.32
4924.000	22.76	AV	H	11.67	34.43	54.00	19.57
4924.000	35.34	PK	V	11.67	47.01	74.00	27.00
4924.000	22.78	AV	V	11.67	34.45	54.00	19.56
7386.000	33.47	PK	H	15.63	49.10	74.00	24.90
7386.000	20.46	AV	H	15.63	36.09	54.00	17.91
7386.000	33.66	PK	V	15.63	49.29	74.00	24.72
7386.000	20.59	AV	V	15.63	36.22	54.00	17.79

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2390.000	26.88	PK	H	31.71	58.59	74.00	15.41
2390.000	13.76	AV	H	31.71	45.47	54.00	8.53
2390.000	26.79	PK	V	31.71	58.50	74.00	15.50
2390.000	13.83	AV	V	31.71	45.54	54.00	8.47
4824.000	35.65	PK	H	11.26	46.91	74.00	27.09
4824.000	22.25	AV	H	11.26	33.51	54.00	20.50
4824.000	35.54	PK	V	11.26	46.80	74.00	27.20
4824.000	22.55	AV	V	11.26	33.81	54.00	20.20
7236.000	33.45	PK	H	15.24	48.69	74.00	25.31
7236.000	20.27	AV	H	15.24	35.51	54.00	18.49
7236.000	33.51	PK	V	15.24	48.75	74.00	25.25
7236.000	20.43	AV	V	15.24	35.67	54.00	18.34
Middle Channel: 2437 MHz							
4874.000	35.32	PK	H	11.45	46.77	74.00	27.23
4874.000	22.13	AV	H	11.45	33.58	54.00	20.42
4874.000	35.50	PK	V	11.45	46.95	74.00	27.05
4874.000	22.41	AV	V	11.45	33.86	54.00	20.14
7311.000	33.37	PK	H	15.58	48.95	74.00	25.05
7311.000	20.16	AV	H	15.58	35.74	54.00	18.26
7311.000	33.45	PK	V	15.58	49.03	74.00	24.97
7311.000	20.38	AV	V	15.58	35.96	54.00	18.04
High Channel: 2462 MHz							
2483.500	27.01	PK	H	32.19	59.20	74.00	14.81
2483.500	13.90	AV	H	32.19	46.09	54.00	7.92
2483.500	27.35	PK	V	32.19	59.54	74.00	14.46
2483.500	13.97	AV	V	32.19	46.16	54.00	7.84
4924.000	35.64	PK	H	11.67	47.31	74.00	26.69
4924.000	22.29	AV	H	11.67	33.96	54.00	20.04
4924.000	35.47	PK	V	11.67	47.14	74.00	26.87
4924.000	22.58	AV	V	11.67	34.25	54.00	19.75
7386.000	33.46	PK	H	15.63	49.09	74.00	24.91
7386.000	20.33	AV	H	15.63	35.96	54.00	18.04
7386.000	33.57	PK	V	15.63	49.20	74.00	24.81
7386.000	20.47	AV	V	15.63	36.10	54.00	17.90

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2422 MHz							
2390.000	27.65	PK	H	31.71	59.36	74.00	14.64
2390.000	14.35	AV	H	31.71	46.06	54.00	7.94
2390.000	27.53	PK	V	31.71	59.24	74.00	14.76
2390.000	14.65	AV	V	31.71	46.36	54.00	7.64
4844.000	34.62	PK	H	11.31	45.93	74.00	28.07
4844.000	21.58	AV	H	11.31	32.89	54.00	21.11
4844.000	34.43	PK	V	11.31	45.74	74.00	28.26
4844.000	21.50	AV	V	11.31	32.81	54.00	21.19
7266.000	33.23	PK	H	15.43	48.66	74.00	25.34
7266.000	20.47	AV	H	15.43	35.90	54.00	18.10
7266.000	33.39	PK	V	15.43	48.82	74.00	25.18
7266.000	20.28	AV	V	15.43	35.71	54.00	18.29
Middle Channel: 2437 MHz							
4874.000	34.37	PK	H	11.45	45.82	74.00	28.18
4874.000	21.59	AV	H	11.45	33.04	54.00	20.96
4874.000	34.39	PK	V	11.45	45.84	74.00	28.16
4874.000	21.58	AV	V	11.45	33.03	54.00	20.97
7311.000	33.67	PK	H	15.58	49.25	74.00	24.75
7311.000	20.39	AV	H	15.58	35.97	54.00	18.03
7311.000	33.29	PK	V	15.58	48.87	74.00	25.13
7311.000	20.17	AV	V	15.58	35.75	54.00	18.25
High Channel: 2452 MHz							
2483.500	28.75	PK	H	32.19	60.94	74.00	13.06
2483.500	14.61	AV	H	32.19	46.80	54.00	7.20
2483.500	28.81	PK	V	32.19	61.00	74.00	13.00
2483.500	14.79	AV	V	32.19	46.98	54.00	7.02
4904.000	34.21	PK	H	11.58	45.79	74.00	28.21
4904.000	21.46	AV	H	11.58	33.04	54.00	20.96
4904.000	34.26	PK	V	11.58	45.84	74.00	28.16
4904.000	21.49	AV	V	11.58	33.07	54.00	20.93
7356.000	33.61	PK	H	15.55	49.16	74.00	24.84
7356.000	20.75	AV	H	15.55	36.30	54.00	17.70
7356.000	33.67	PK	V	15.55	49.22	74.00	24.78
7356.000	20.32	AV	V	15.55	35.87	54.00	18.13


802.11ax hew20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2390.000	26.33	PK	H	31.71	58.04	74.00	15.96
2390.000	13.65	AV	H	31.71	45.36	54.00	8.64
2390.000	26.89	PK	V	31.71	58.60	74.00	15.40
2390.000	13.57	AV	V	31.71	45.28	54.00	8.72
4824.000	34.64	PK	H	11.26	45.90	74.00	28.10
4824.000	22.01	AV	H	11.26	33.27	54.00	20.73
4824.000	34.69	PK	V	11.26	45.95	74.00	28.05
4824.000	22.41	AV	V	11.26	33.67	54.00	20.33
7236.000	33.65	PK	H	15.24	48.89	74.00	25.11
7236.000	20.23	AV	H	15.24	35.47	54.00	18.53
7236.000	33.58	PK	V	15.24	48.82	74.00	25.18
7236.000	20.36	AV	V	15.24	35.60	54.00	18.40
Middle Channel: 2437 MHz							
4874.000	35.46	PK	H	11.45	46.91	74.00	27.09
4874.000	23.77	AV	H	11.45	35.22	54.00	18.78
4874.000	35.16	PK	V	11.45	46.61	74.00	27.39
4874.000	23.05	AV	V	11.45	34.50	54.00	19.50
7311.000	34.10	PK	H	15.58	49.68	74.00	24.32
7311.000	21.07	AV	H	15.58	36.65	54.00	17.35
7311.000	33.69	PK	V	15.58	49.27	74.00	24.73
7311.000	20.77	AV	V	15.58	36.35	54.00	17.65
High Channel: 2462 MHz							
2483.500	26.87	PK	H	32.19	59.06	74.00	14.94
2483.500	13.58	AV	H	32.19	45.77	54.00	8.23
2483.500	26.34	PK	V	32.19	58.53	74.00	15.47
2483.500	13.55	AV	V	32.19	45.74	54.00	8.26
4924.000	35.10	PK	H	11.67	46.77	74.00	27.23
4924.000	23.32	AV	H	11.67	34.99	54.00	19.01
4924.000	35.98	PK	V	11.67	47.65	74.00	26.35
4924.000	23.57	AV	V	11.67	35.24	54.00	18.76
7386.000	33.63	PK	H	15.63	49.26	74.00	24.74
7386.000	20.51	AV	H	15.63	36.14	54.00	17.86
7386.000	33.37	PK	V	15.63	49.00	74.00	25.00
7386.000	20.67	AV	V	15.63	36.30	54.00	17.70

802.11ax hew40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2422 MHz							
2390.000	26.34	PK	H	31.71	58.05	74.00	15.95
2390.000	13.57	AV	H	31.71	45.28	54.00	8.72
2390.000	26.89	PK	V	31.71	58.60	74.00	15.40
2390.000	14.02	AV	V	31.71	45.73	54.00	8.27
4844.000	35.10	PK	H	11.31	46.41	74.00	27.59
4844.000	23.33	AV	H	11.31	34.64	54.00	19.36
4844.000	35.78	PK	V	11.31	47.09	74.00	26.91
4844.000	23.20	AV	V	11.31	34.51	54.00	19.49
7266.000	33.64	PK	H	15.43	49.07	74.00	24.93
7266.000	20.11	AV	H	15.43	35.54	54.00	18.46
7266.000	33.74	PK	V	15.43	49.17	74.00	24.83
7266.000	20.54	AV	V	15.43	35.97	54.00	18.03
Middle Channel: 2437 MHz							
4874.000	34.68	PK	H	11.45	46.13	74.00	27.87
4874.000	22.51	AV	H	11.45	33.96	54.00	20.04
4874.000	35.12	PK	V	11.45	46.57	74.00	27.43
4874.000	23.30	AV	V	11.45	34.75	54.00	19.25
7311.000	34.11	PK	H	15.58	49.69	74.00	24.31
7311.000	21.01	AV	H	15.58	36.59	54.00	17.41
7311.000	34.36	PK	V	15.58	49.94	74.00	24.06
7311.000	21.13	AV	V	15.58	36.71	54.00	17.29
High Channel: 2452 MHz							
2483.500	26.58	PK	H	32.19	58.77	74.00	15.23
2483.500	13.23	AV	H	32.19	45.42	54.00	8.58
2483.500	26.88	PK	V	32.19	59.07	74.00	14.93
2483.500	13.69	AV	V	32.19	45.88	54.00	8.12
4904.000	35.21	PK	H	11.58	46.79	74.00	27.21
4904.000	23.32	AV	H	11.58	34.90	54.00	19.10
4904.000	35.44	PK	V	11.58	47.02	74.00	26.98
4904.000	23.61	AV	V	11.58	35.19	54.00	18.81
7356.000	33.85	PK	H	15.55	49.40	74.00	24.60
7356.000	20.03	AV	H	15.55	35.58	54.00	18.42
7356.000	33.99	PK	V	15.55	49.54	74.00	24.46
7356.000	20.79	AV	V	15.55	36.34	54.00	17.66


Worst radiation spurious emissions margin test plots (802.11b Chain 1 High Channel):

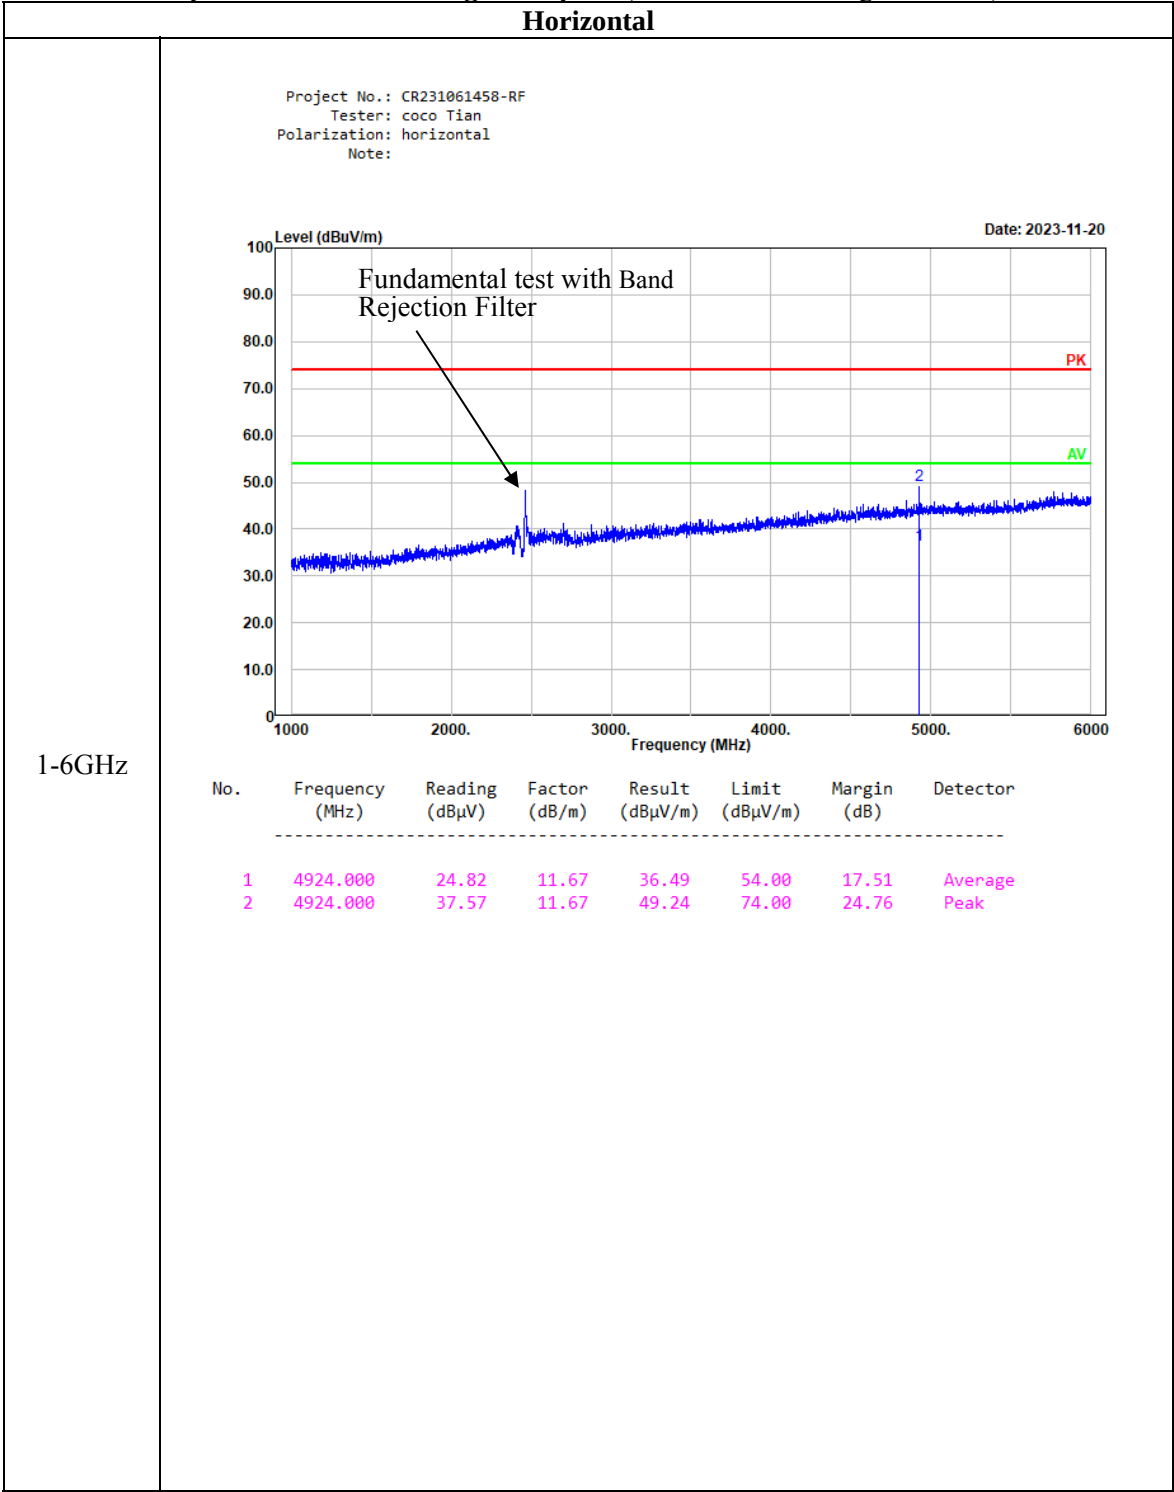

Horizontal

Project No.: CR231061458-RF
Tester: coco Tian
Polarization: horizontal
Note:

Date: 2023-11-20

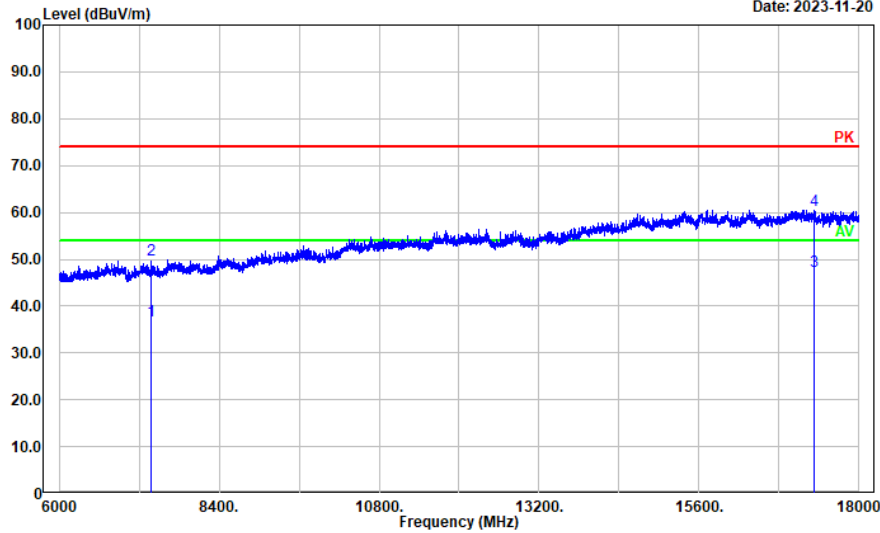


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7386.000	21.13	15.63	36.76	54.00	17.24	Average
2	7386.000	34.19	15.63	49.82	74.00	24.18	Peak
3	17332.670	18.25	29.16	47.41	54.00	6.59	Average
4	17332.670	31.26	29.16	60.42	74.00	13.58	Peak

Horizontal

Project No.: CR231061458-RF
Tester: coco Tian
Polarization: Horizontal
Note:

Date: 2023-11-20

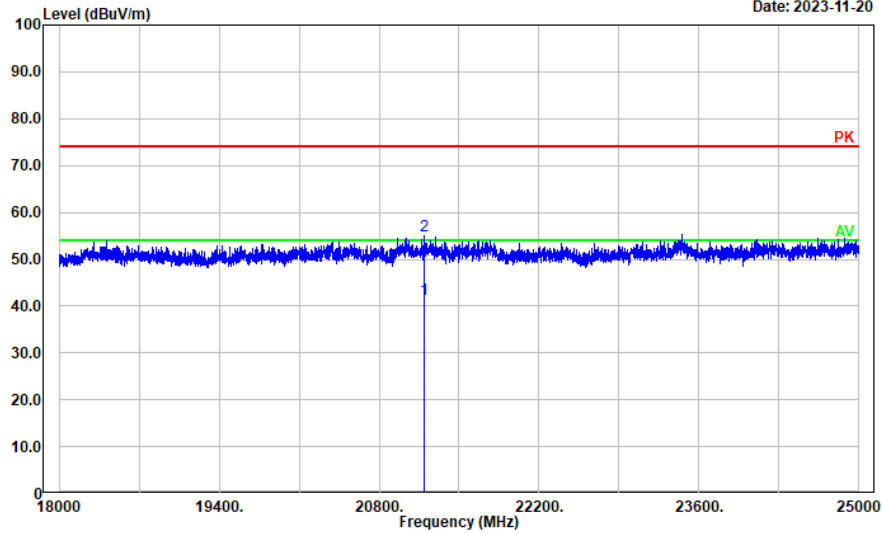


18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21199.640	36.74	4.81	41.55	54.00	12.45	Average
2	21199.640	50.16	4.81	54.97	74.00	19.03	Peak

Vertical

Project No.: CR231061458-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-11-20

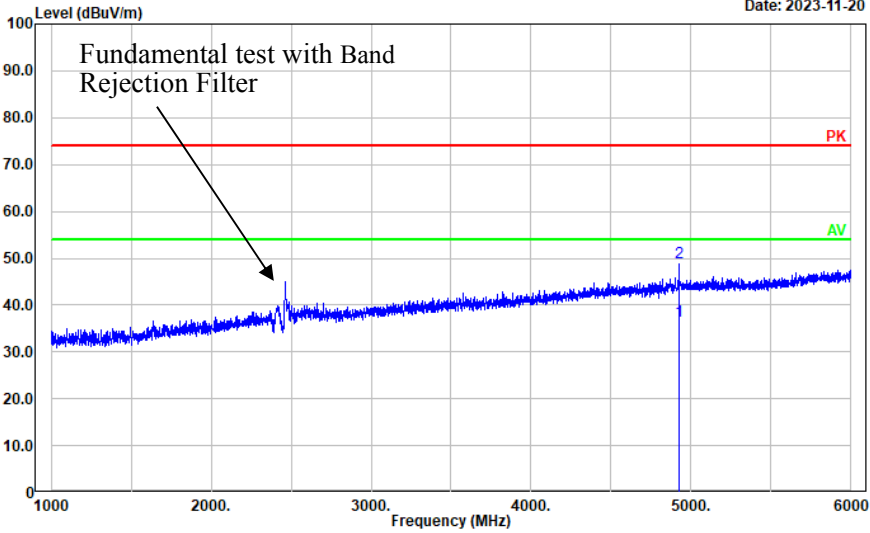


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4924.000	24.92	11.67	36.59	54.00	17.41	Average
2	4924.000	37.27	11.67	48.94	74.00	25.06	Peak

Vertical

Project No.: CR231061458-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-11-20

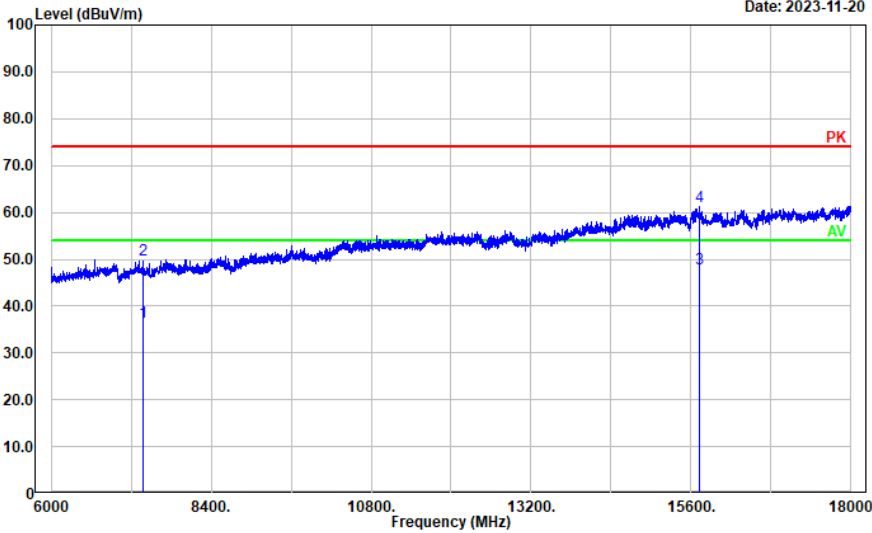


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7386.000	21.08	15.63	36.71	54.00	17.29	Average
2	7386.000	34.23	15.63	49.86	74.00	24.14	Peak
3	15717.140	23.05	24.81	47.86	54.00	6.14	Average
4	15717.140	36.31	24.81	61.12	74.00	12.88	Peak

Vertical

Project No.: CR231061458-RF
Tester: coco Tian
Polarization: Vertical
Note:

Date: 2023-11-20

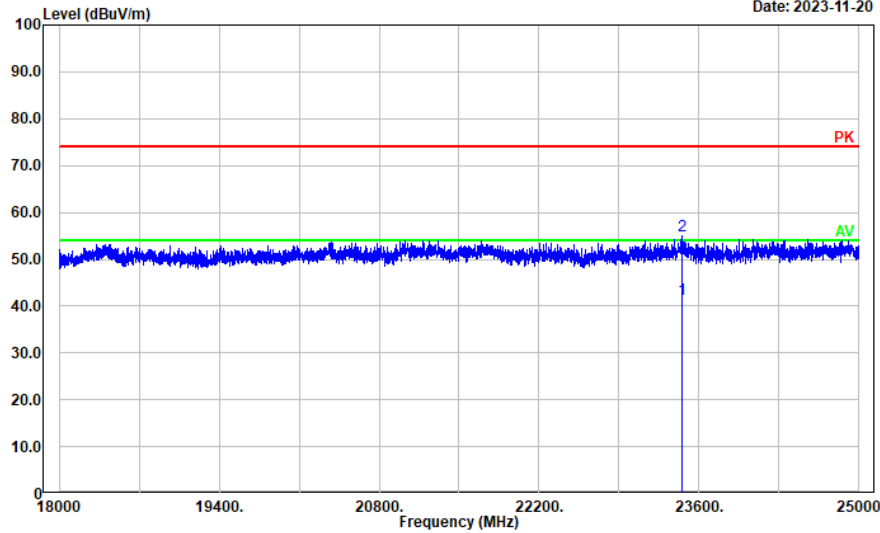

18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	23455.490	35.98	5.39	41.37	54.00	12.63	Average
2	23455.490	49.52	5.39	54.91	74.00	19.09	Peak

4.3 Minimum 6 dB Emission Bandwidth

Serial Number:	2CHV-2	Test Date:	2023/11/10-2024/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/Ling Ling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.1	Relative Humidity: (%)	45-55	ATM Pressure: (kPa)	101.3-101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:




Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023-03-31	2024-03-30
R&S	Spectrum Analyzer	FSU26	100147	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).




Test Data:


Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	2412	10.160	0.5
	2437	10.160	0.5
	2462	10.160	0.5
802.11g	2412	15.200	0.5
	2437	15.200	0.5
	2462	15.200	0.5
802.11n ht20	2412	15.256	0.5
	2437	15.256	0.5
	2462	15.256	0.5
802.11n ht40	2422	35.256	0.5
	2437	35.385	0.5
	2452	35.385	0.5
802.11ax hew20	2412	19.120	0.5
	2437	19.120	0.5
	2462	19.040	0.5
802.11ax hew40	2422	38.080	0.5
	2437	38.240	0.5
	2452	37.920	0.5

Note: Test only was performed at Chain 0.

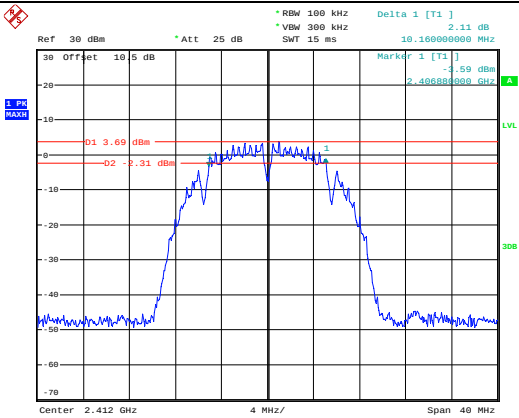
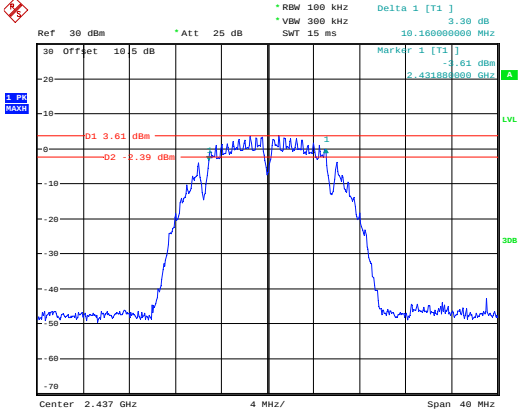
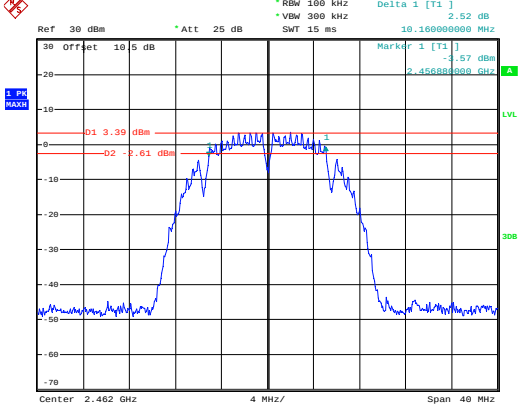
6dB Emission Bandwidth	
802.11b Lowest Channel	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 2.11 dB *VSW 300 kHz 10.160000000 MHz SWT 15 ms Marker 1 [T1] -1.59 dBm 2.406880000 GHz D1 3.09 dBm D2 -2.31 dBm Center 2.412 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231061458-RF Tester:Arthur Su Date: 10.NOV.2023 22:18:22
802.11b Middle Channel	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 3.30 dB *VSW 300 kHz 10.160000000 MHz SWT 15 ms Marker 1 [T1] -1.61 dBm 2.431880000 GHz D1 3.61 dBm D2 -2.39 dBm Center 2.437 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231061458-RF Tester:Arthur Su Date: 10.NOV.2023 22:19:50
802.11b Highest Channel	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 2.52 dB *VSW 300 kHz 10.160000000 MHz SWT 15 ms Marker 1 [T1] -1.57 dBm 2.456880000 GHz D1 3.39 dBm D2 -2.61 dBm Center 2.462 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231061458-RF Tester:Arthur Su Date: 10.NOV.2023 22:20:56




6dB Emission Bandwidth

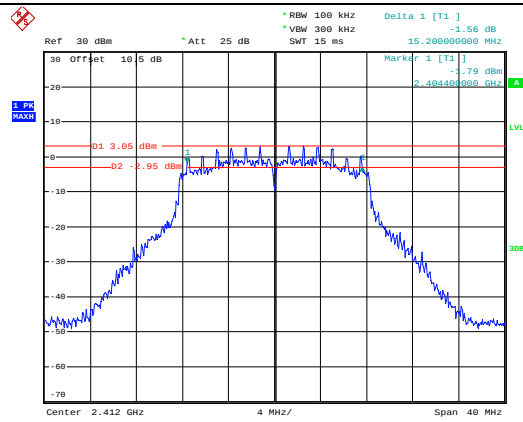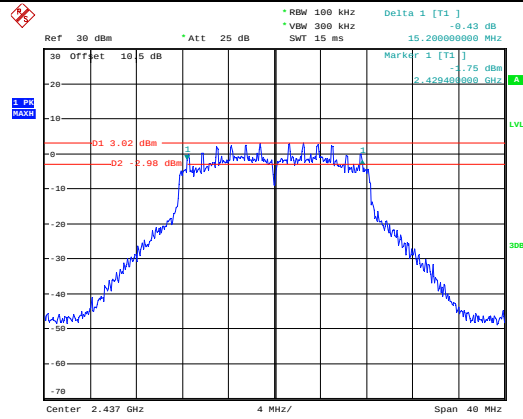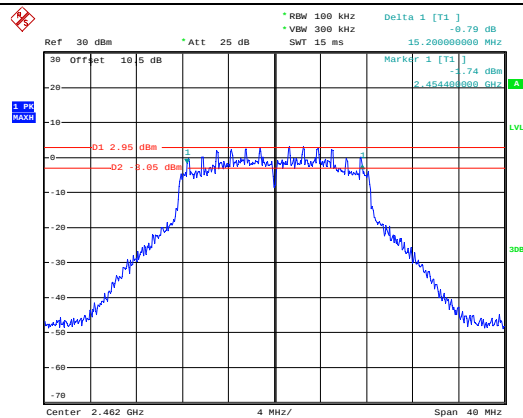802.11g
Lowest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:16:35802.11g
Middle ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:15:07802.11g
Highest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:13:09

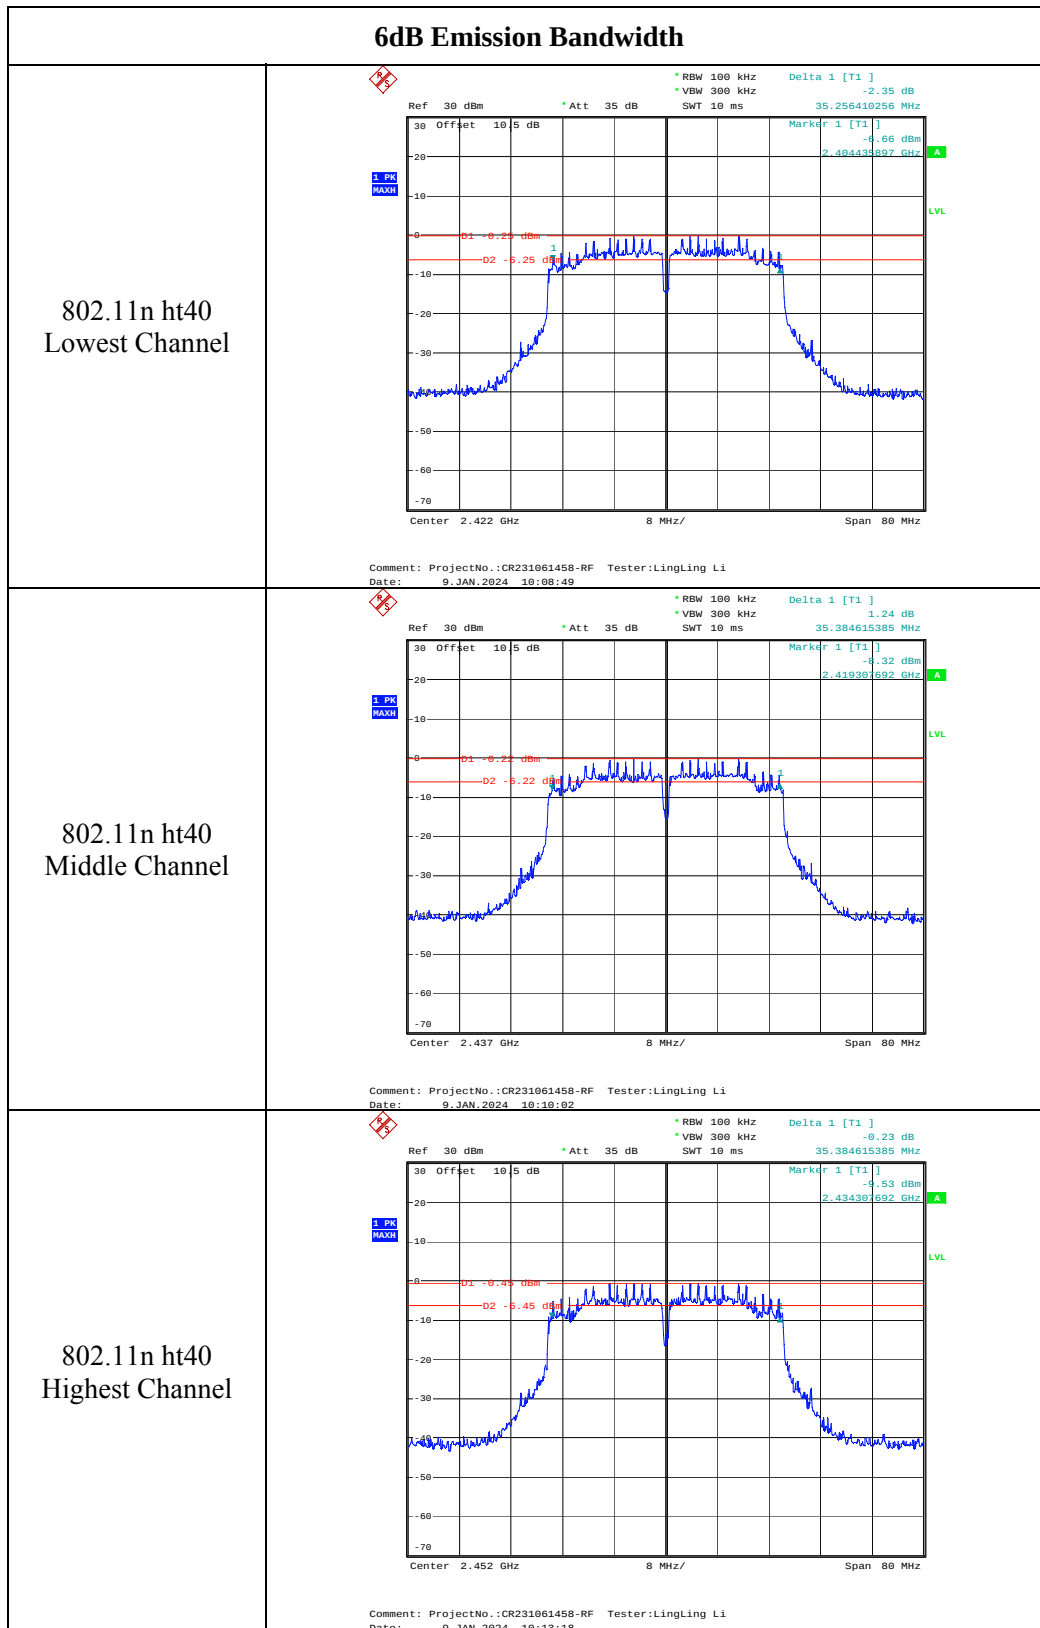

6dB Emission Bandwidth

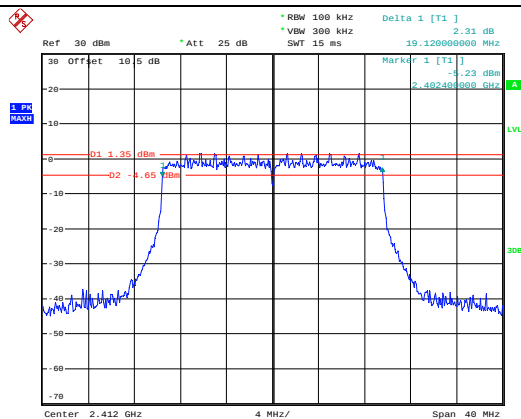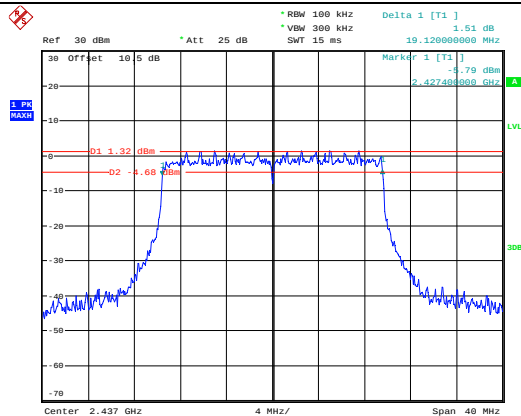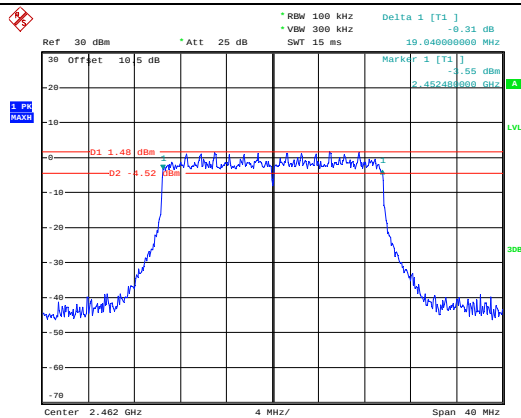802.11ax hew20
Lowest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:07:54802.11ax hew20
Middle ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:09:45802.11ax hew20
Highest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:11:13

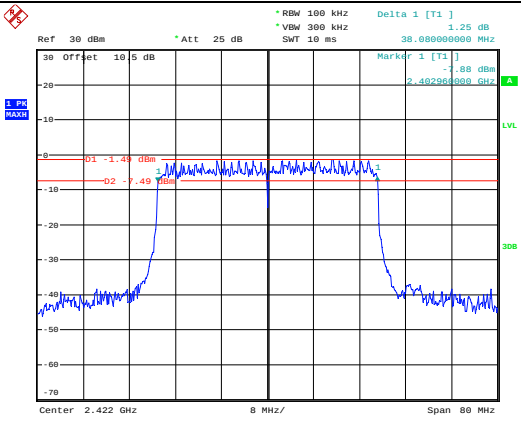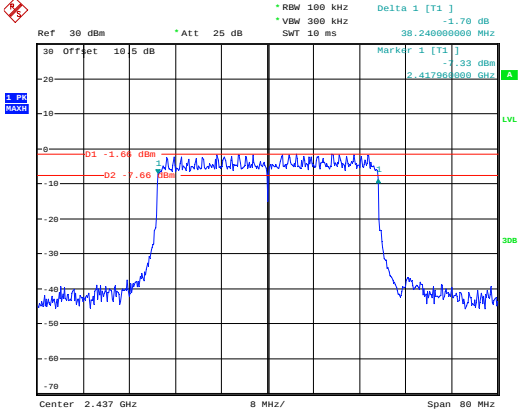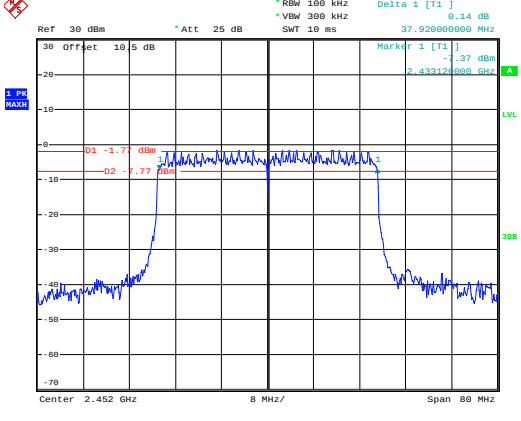6dB Emission Bandwidth	
802.11ax hew40 Lowest Channel	 ProjectNo.:CR231061458-RF Tester:Arthur Su Date: 10.NOV.2023 22:01:07
802.11ax hew40 Middle Channel	 ProjectNo.:CR231061458-RF Tester:Arthur Su Date: 10.NOV.2023 22:03:21
802.11ax hew40 Highest Channel	 ProjectNo.:CR231061458-RF Tester:Arthur Su Date: 10.NOV.2023 22:05:21

4.4 99% Occupied Bandwidth

Serial Number:	2CHV-2	Test Date:	2023/11/10-2024/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/Ling Ling Li	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.5-25.1	Relative Humidity: (%)	45-55	ATM Pressure: (kPa)	101.3-101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:




Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023-03-31	2024-03-30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).




Test Data:

Test Modes	Test Channel	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)
802.11b	Lowest	2412	13.440
	Middle	2437	13.440
	Highest	2462	13.440
802.11g	Lowest	2412	16.800
	Middle	2437	16.800
	Highest	2462	16.800
802.11n ht20	Lowest	2412	17.821
	Middle	2437	17.885
	Highest	2462	17.949
802.11n ht40	Lowest	2422	36.154
	Middle	2437	36.154
	Highest	2452	36.282
802.11ax hew20	Lowest	2412	19.120
	Middle	2437	19.120
	Highest	2462	19.120
802.11ax hew40	Lowest	2422	37.920
	Middle	2437	37.920
	Highest	2452	37.920
Note: Test only was performed at Chain 0.			


99% Occupied Bandwidth

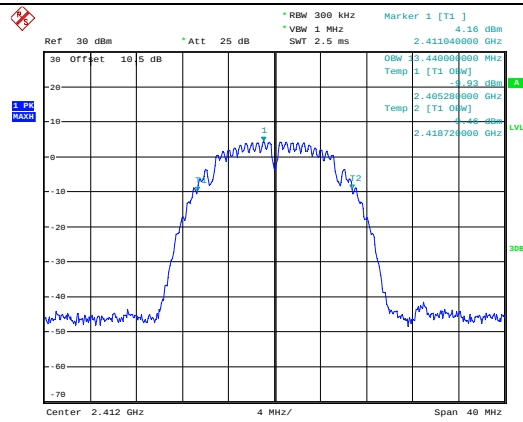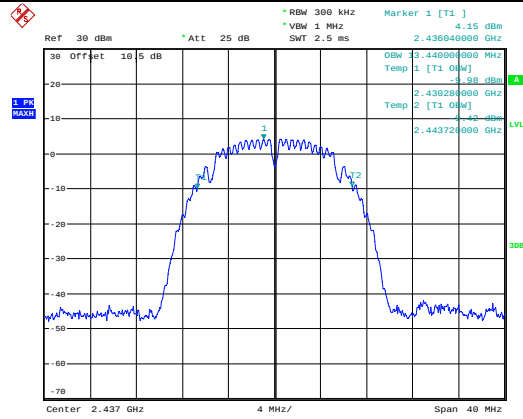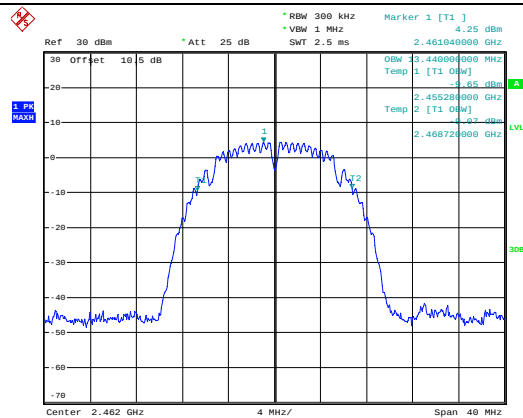802.11b
Lowest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:18:35802.11b
Middle ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:20:03802.11b
Highest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:21:09


99% Occupied Bandwidth

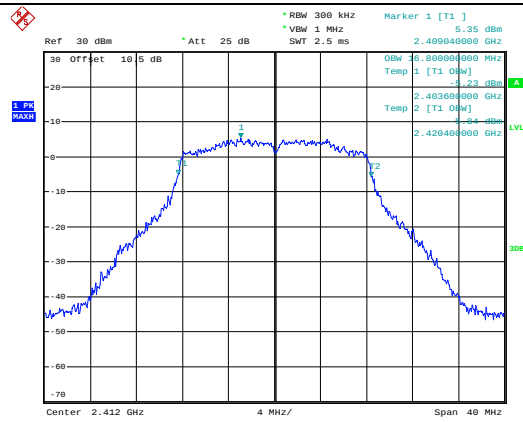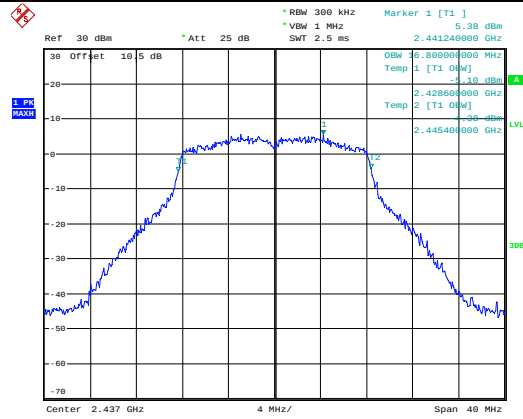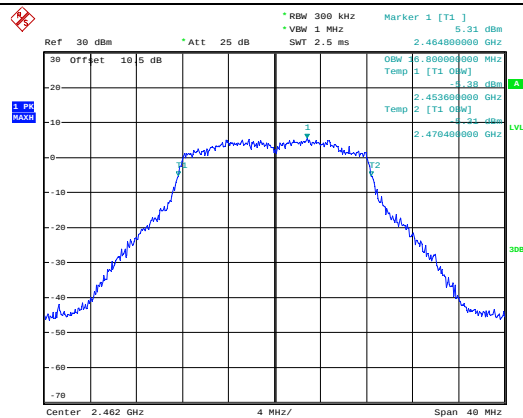802.11g
Lowest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:16:51802.11g
Middle ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:15:24802.11g
Highest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:13:26


99% Occupied Bandwidth

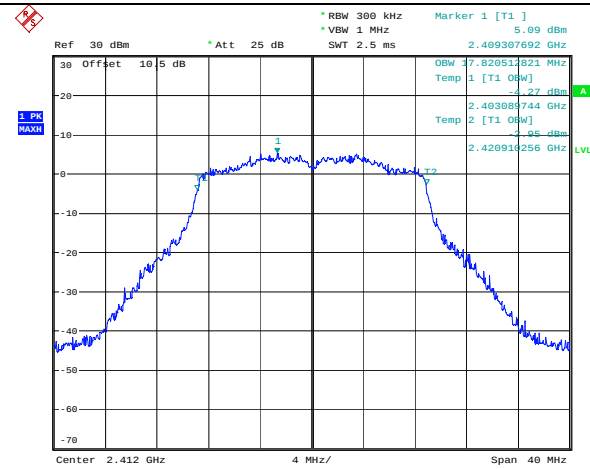802.11n ht20
Lowest Channel

Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9 JAN. 2024 10:25:13

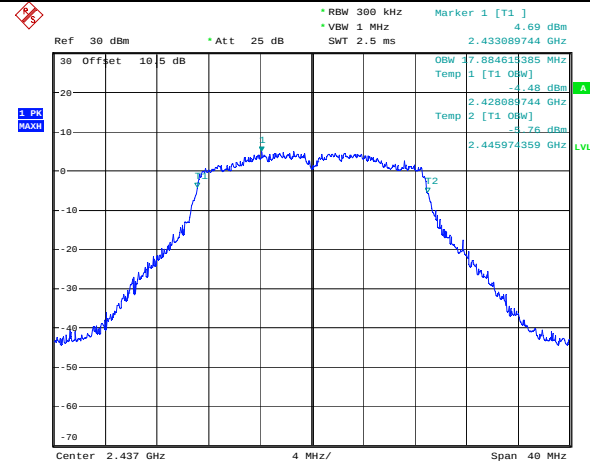
802.11n ht20
Middle Channel

Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9 JAN. 2024 10:27:03

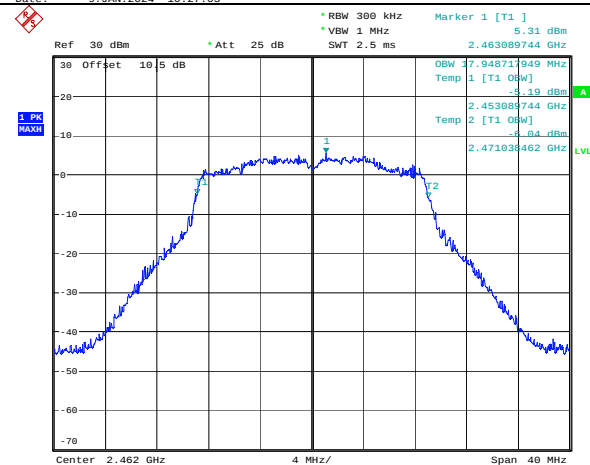
802.11n ht20
Highest Channel

Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9 JAN. 2024 10:28:23


99% Occupied Bandwidth

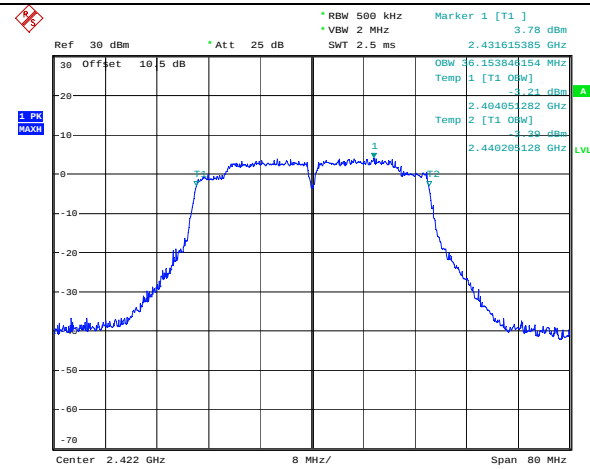802.11n ht40
Lowest Channel

Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9 JAN. 2024 10:20:48



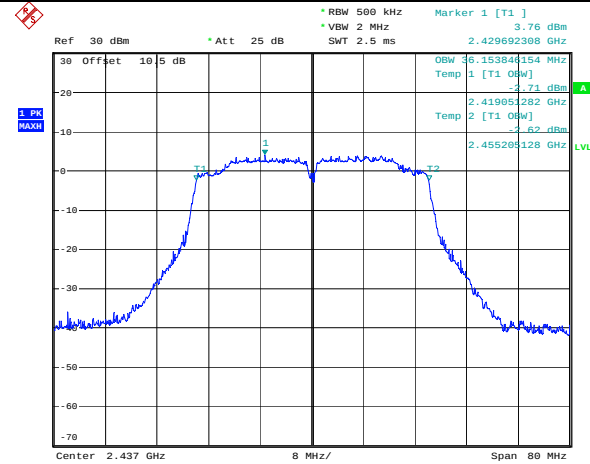
802.11n ht40
Middle Channel

Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9 JAN. 2024 10:23:02



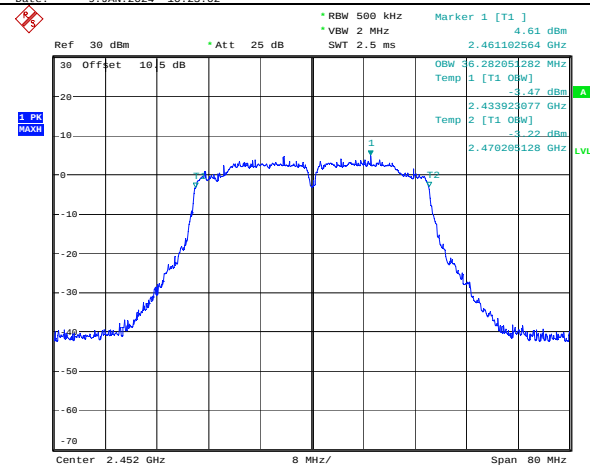
802.11n ht40
Highest Channel

Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9 JAN. 2024 10:16:30

99% Occupied Bandwidth

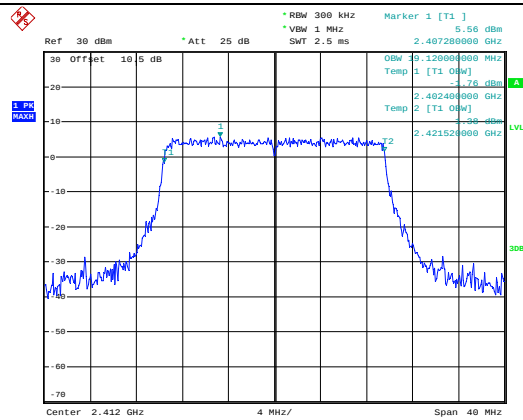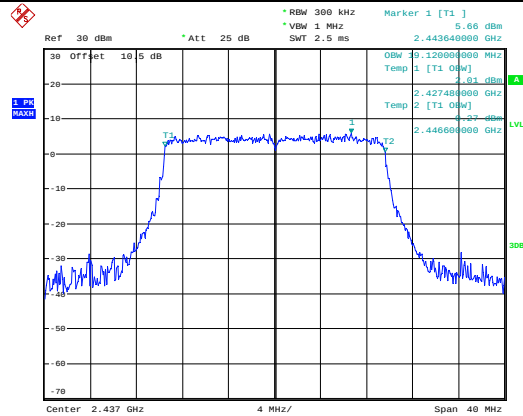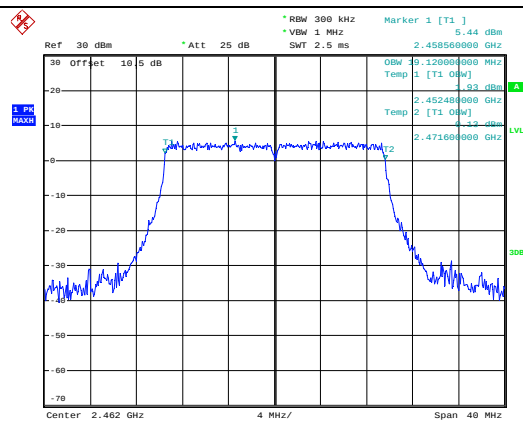802.11ax hew20
Lowest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:08:10802.11ax hew20
Middle ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:10:04802.11ax hew20
Highest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:11:32

99% Occupied Bandwidth

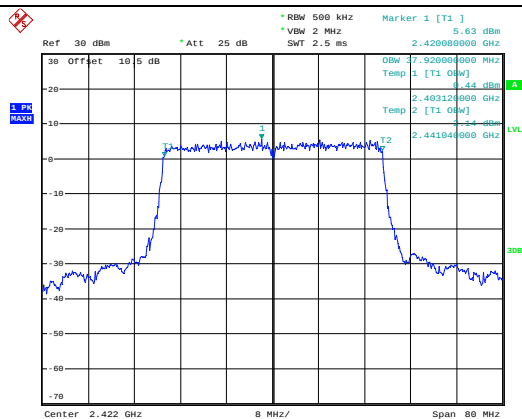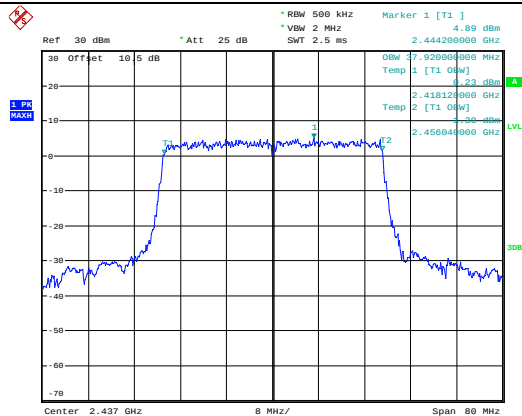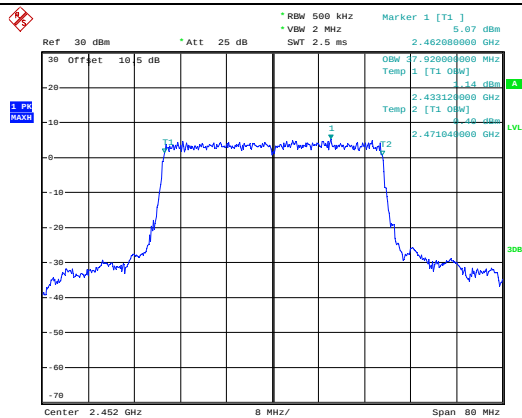802.11ax hew40
Lowest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:01:23802.11ax hew40
Middle ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:03:38802.11ax hew40
Highest ChannelProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:05:37

4.5 Maximum Conducted Output Power

Serial Number:	2CHV-2	Test Date:	2023/11/10-2024/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/Ling Ling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.1	Relative Humidity: (%)	45-55	ATM Pressure: (kPa)	101.3-101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Modes	Test Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11b	2412	16.71	17.09	/	30
	2437	16.19	17.03	/	30
	2462	17.86	16.58	/	30
802.11g	2412	21.97	21.74	/	30
	2437	20.47	20.64	/	30
	2462	20.78	21.05	/	30
802.11n ht20	2412	21.45	21.63	24.55	30
	2437	21.52	21.44	24.49	30
	2462	21.56	21.43	24.51	30
802.11n ht40	2422	21.67	21.80	24.75	30
	2437	21.72	21.69	24.72	30
	2452	21.75	21.72	24.75	30
802.11ax hew20	2412	23.09	22.58	25.85	30
	2437	23.16	23.02	26.10	30
	2462	22.70	22.82	25.77	30
802.11ax hew40	2422	21.83	21.69	24.77	30
	2437	21.64	21.88	24.77	30
	2452	21.57	21.95	24.77	30

Note:

- The total Peak output power = $10 \cdot \log [(10^{\text{Chain 0 Peak output power}/10}) + (10^{\text{Chain 1 Peak output power}/10})]$
- The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:
 Array Gain = 0 dB (i.e., no array gain) for $N_{\text{ANT}} \leq 4$
 Directional gain = $G_{\text{ANT MAX}} + \text{Array Gain} = 2.57\text{dBi} < 6\text{dBi}$
 So, the maximum output power limit does not need to be reduced.

Test Modes	Test Frequency (MHz)	Maximum Conducted Average Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11b	2412	14.11	14.45	/	30
	2437	13.52	14.59	/	30
	2462	15.38	13.87	/	30
802.11g	2412	14.29	13.83	/	30
	2437	12.94	12.73	/	30
	2462	12.92	13.49	/	30
802.11n ht20	2412	13.65	12.75	16.23	30
	2437	13.59	13.19	16.40	30
	2462	13.48	13.75	16.63	30
802.11n ht40	2422	13.45	13.19	16.33	30
	2437	12.96	13.05	16.02	30
	2452	12.82	12.08	15.48	30
802.11ax hew20	2412	15.38	14.64	18.04	30
	2437	15.48	15.23	18.37	30
	2462	14.91	15.24	18.09	30
802.11ax hew40	2422	13.95	13.80	16.89	30
	2437	14.07	13.97	17.03	30
	2452	13.62	14.40	17.04	30

Note:

1. The total Average output power = $10 \cdot \log [(10^{\text{Chain 0 Peak output power}/10}) + (10^{\text{Chain 1 Peak output power}/10})]$

2. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4

Directional gain = GANT MAX + Array Gain = 2.57dBi < 6 dBi

So, the maximum output power limit does not need to be reduced.

4.6 Maximum Power Spectral Density

Serial Number:	2CHV-2	Test Date:	2023/11/10-2024/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/Ling Ling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.1	Relative Humidity: (%)	45-55	ATM Pressure: (kPa)	101.3-101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023-03-31	2024-03-30


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)
		Chain 0	Chain 1	Total	
802.11b	2412	-10.61	-10.16	/	8.00
	2437	-10.93	-9.63	/	8.00
	2462	-9.61	-10.49	/	8.00
802.11g	2412	-11.36	-11.49	/	8.00
	2437	-12.55	-12.21	/	8.00
	2462	-12.34	-11.97	/	8.00
802.11n ht20	2412	-12.64	-12.39	-9.50	8.00
	2437	-12.18	-12.37	-9.26	8.00
	2462	-11.91	-12.66	-9.26	8.00
802.11n ht40	2422	-15.36	-14.01	-11.62	8.00
	2437	-14.11	-14.26	-11.17	8.00
	2452	-13.45	-15.03	-11.16	8.00
802.11ax hew20	2412	-13.01	-13.41	-10.20	8.00
	2437	-13.45	-13.42	-10.42	8.00
	2462	-14.21	-12.96	-10.53	8.00
802.11ax hew40	2422	-16.68	-16.69	-13.67	8.00
	2437	-16.85	-16.49	-13.66	8.00
	2452	-17.14	-16.79	-13.95	8.00

Note:


1. The total Power Spectral Density = $10 \cdot \log [(10^{\text{Chain 0 Power Spectral Density}/10}) + (10^{\text{Chain 1 Power Spectral Density}/10})]$
2. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on IEEE 802.11 devices, the Array Gain = $10 \log (N_{\text{ANT}}/N_{\text{SS}})$ dB;
So, the Directional gain = $G_{\text{ANT MAX}} + 10 \log (N_{\text{ANT}}/N_{\text{SS}}) = 2.57 + 10 \log (2/1) = 5.57 \text{ dBi} < 6 \text{ dBi}$.
So, the power spectral density (PSD) limit does not need to be reduced.

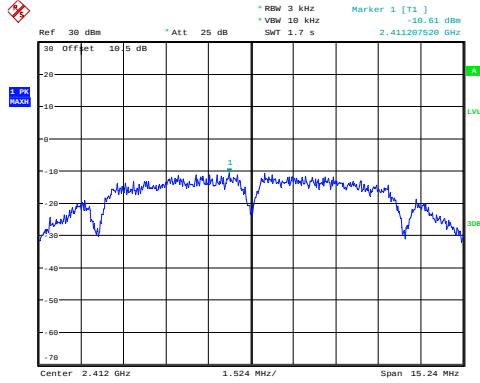Test Plots for Maximum Power Spectral Density:**Maximum Power Spectral Density****Chain 0****Chain 1****802.11b Lowest Channel**


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:18:59

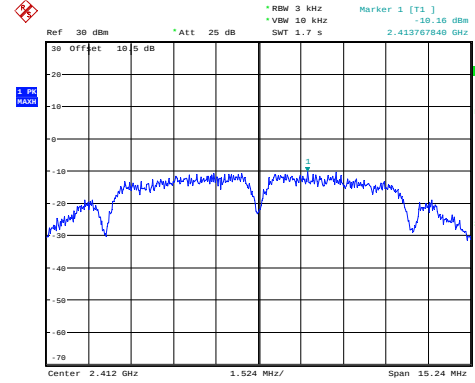


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:24:21

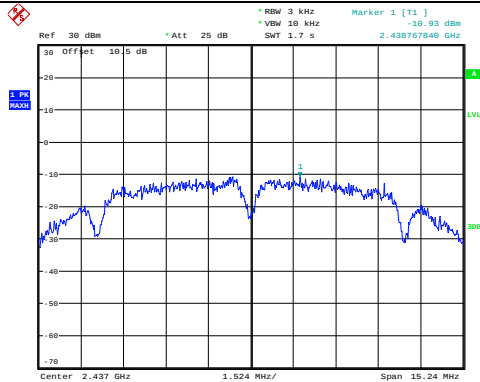802.11b Middle Channel


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:20:21

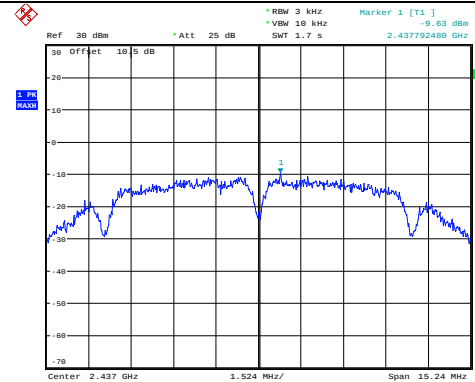

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:25:33

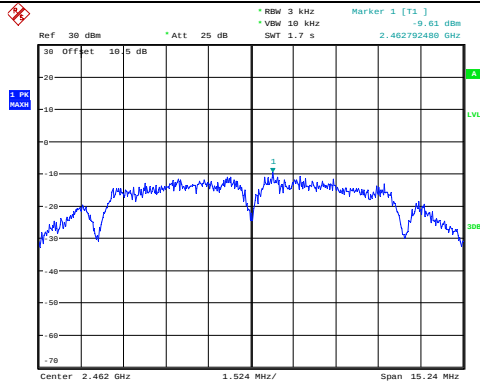802.11b Highest Channel

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:21:26

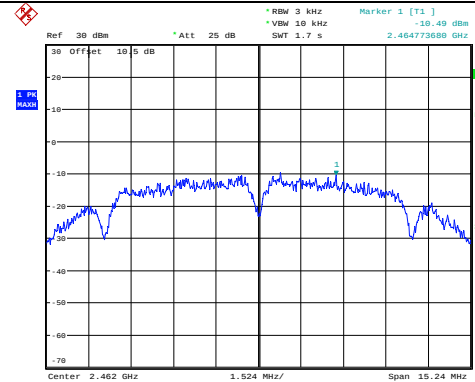


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:26:07

Maximum Power Spectral Density


Chain 0

Chain 1

802.11g Lowest Channel

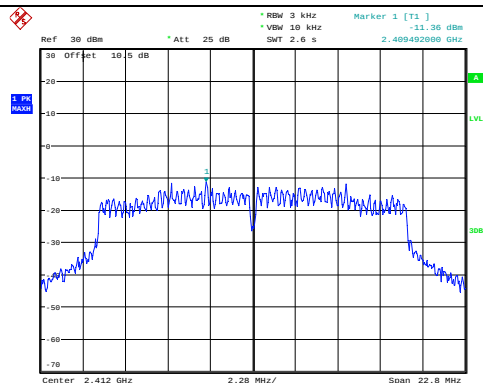


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:17:32

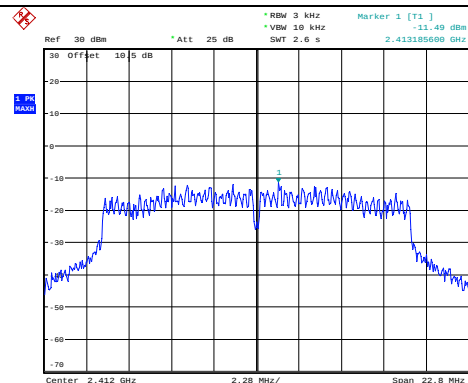


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:29:41

802.11g Middle Channel

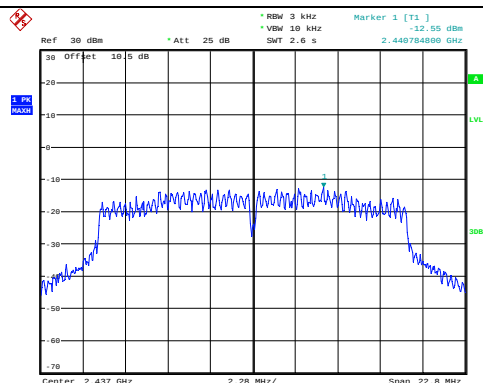


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:17:56

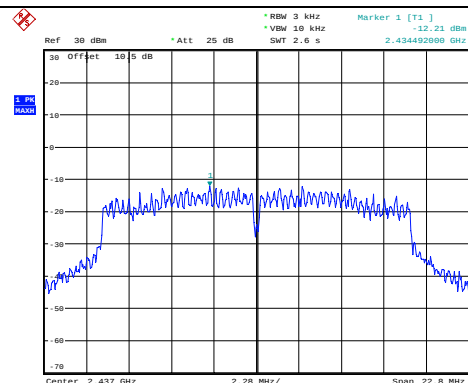


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:28:50

802.11g Highest Channel

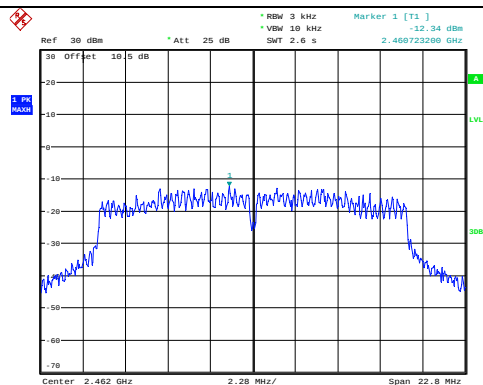

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:13:58

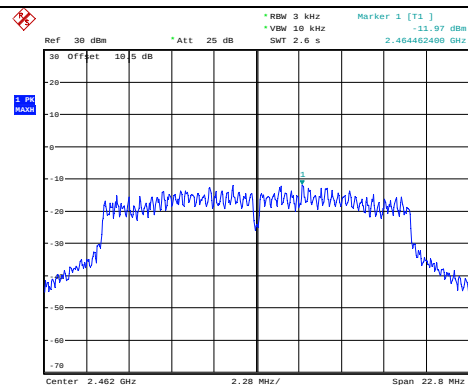


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:27:22

Maximum Power Spectral Density


Chain 0

Chain 1

802.11n ht20 Lowest Channel

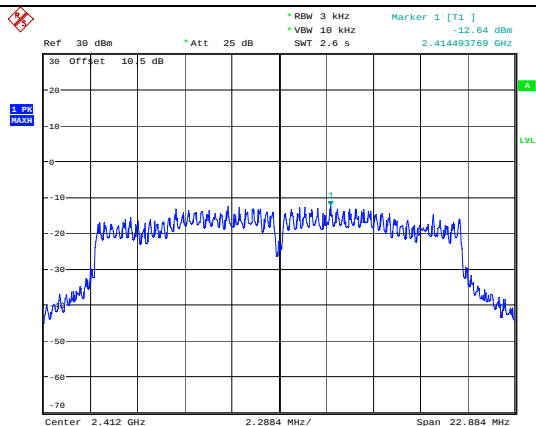


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:26:00

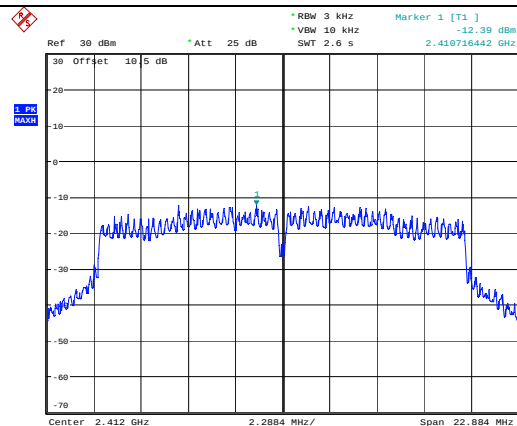


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:39:35

802.11n ht20 Middle Channel

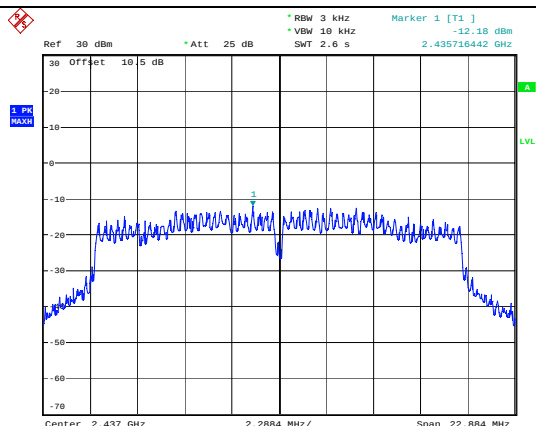


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:26:45

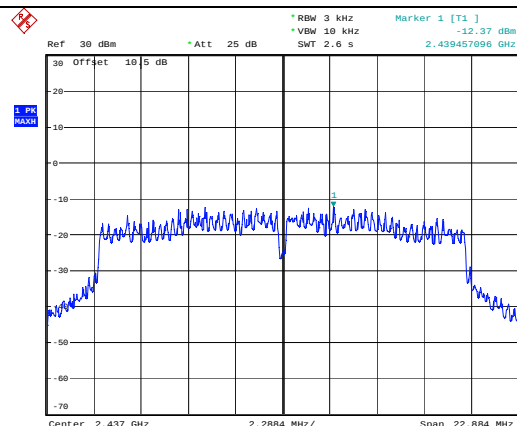


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:41:01

802.11n ht20 Highest Channel

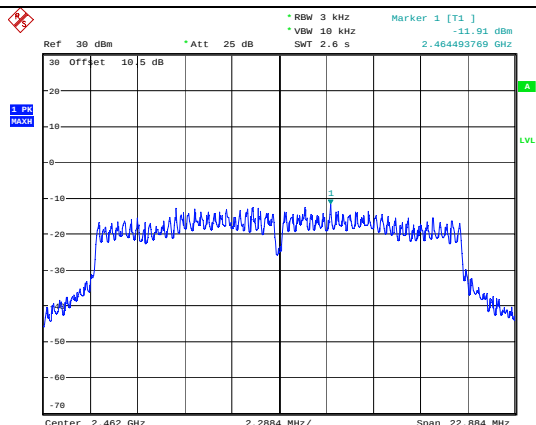

Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:28:59

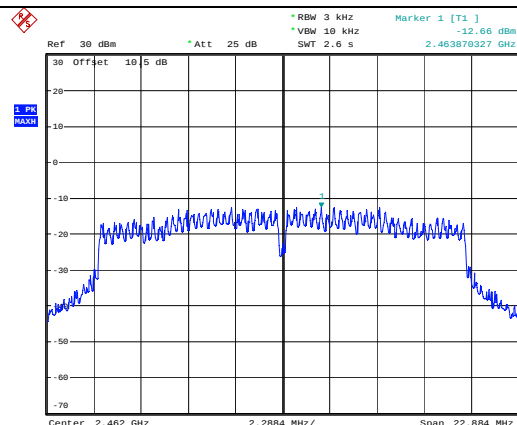


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:42:30

Maximum Power Spectral Density


Chain 0

Chain 1

802.11n ht40 Lowest Channel

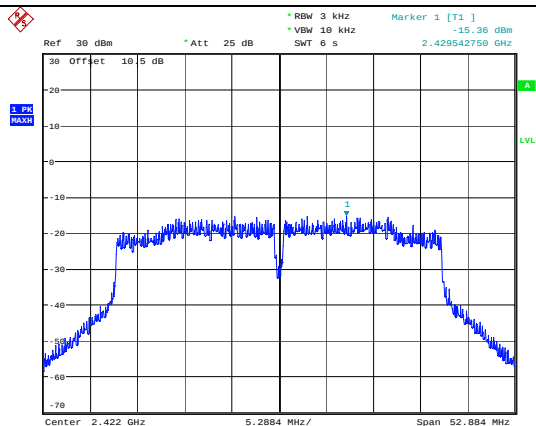


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:21:58

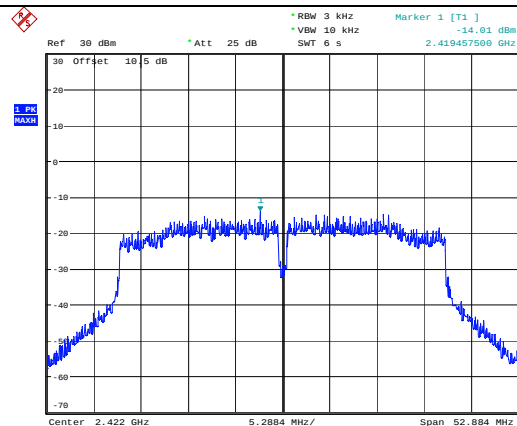


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:44:38

802.11n ht40 Middle Channel

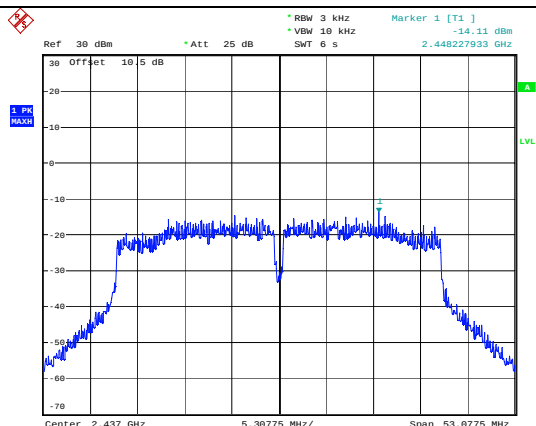


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:21:11

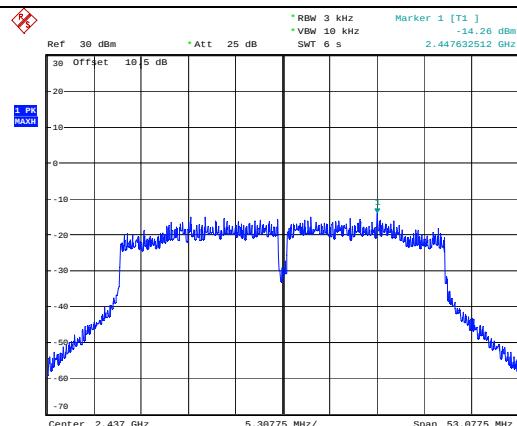


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:46:44

802.11n ht40 Highest Channel

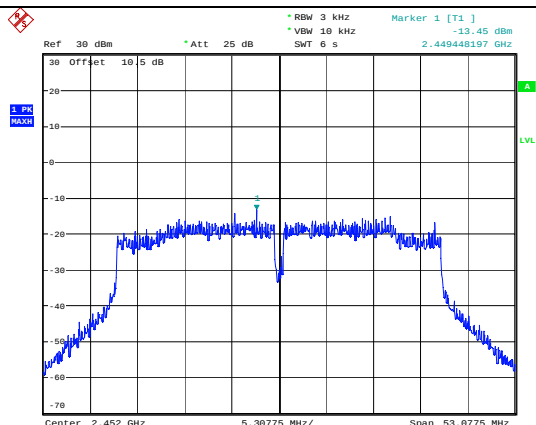

Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:19:11

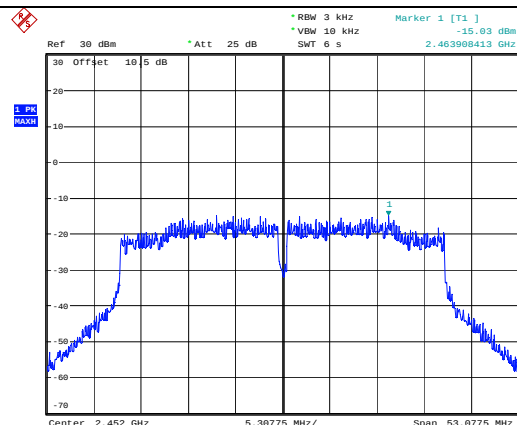


Comment: ProjectNo.:CR231061458-RF Tester:LingLing L1
Date: 9 JAN 2024 10:48:27

Maximum Power Spectral Density


Chain 0

Chain 1

802.11ax hew20 Lowest Channel

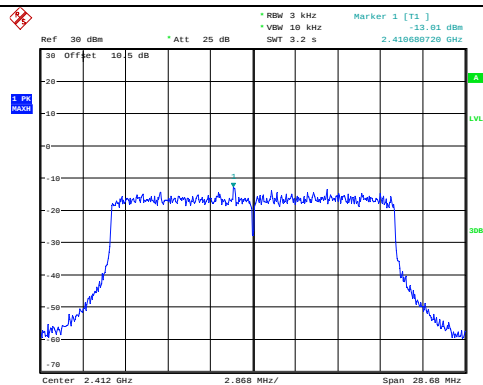


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:08:49

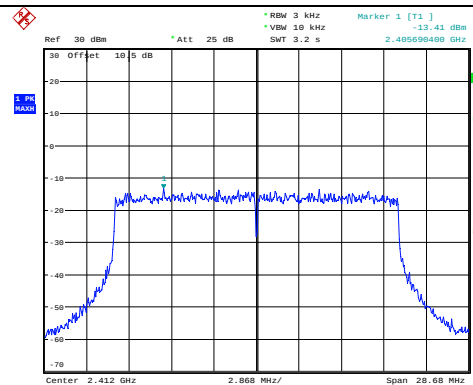


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:31:12

802.11ax hew20 Middle Channel

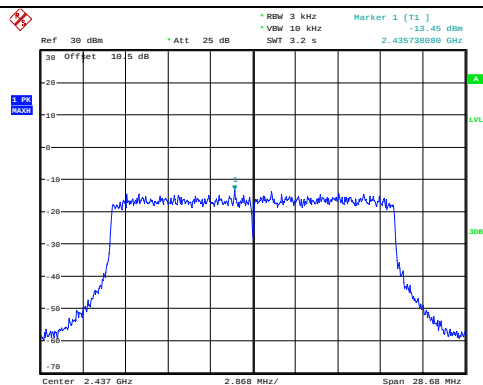


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:10:43

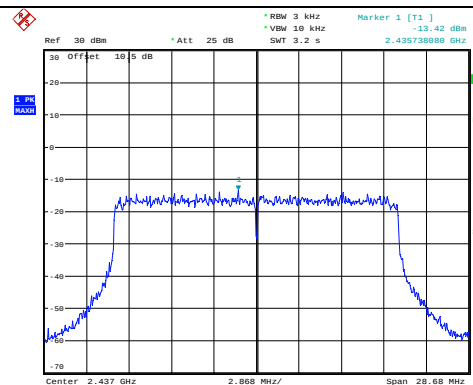


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:32:28

802.11ax hew20 Highest Channel

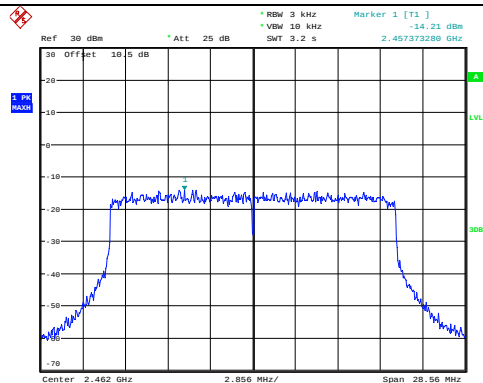

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:12:11

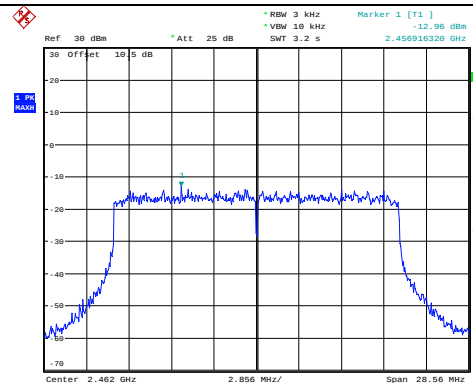


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:33:46

Maximum Power Spectral Density


Chain 0

Chain 1

802.11ax hew40 Lowest Channel

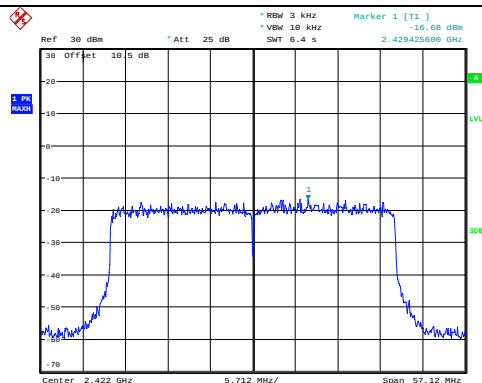


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:02:33

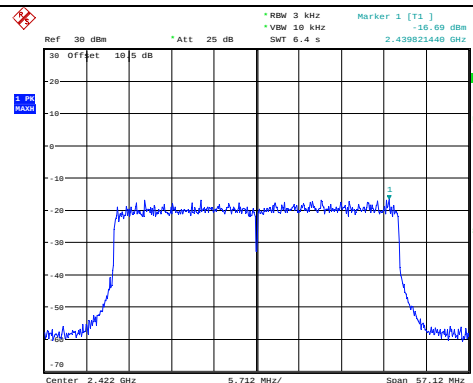


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:35:37

802.11ax hew40 Middle Channel

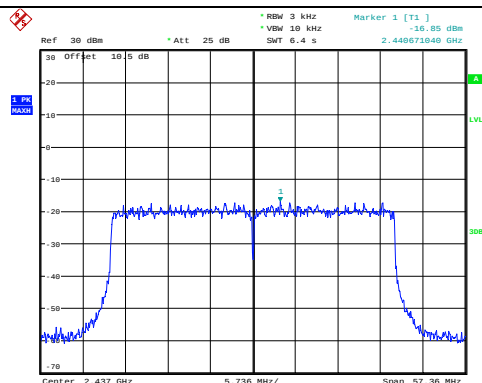


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:04:47

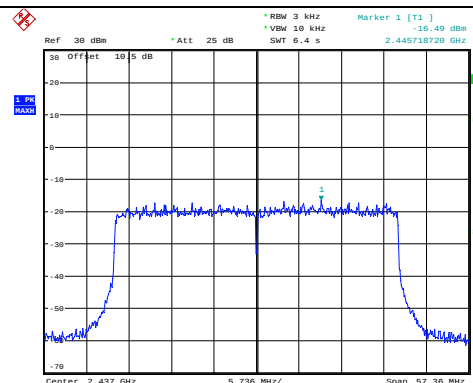


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:37:25

802.11ax hew40 Highest Channel

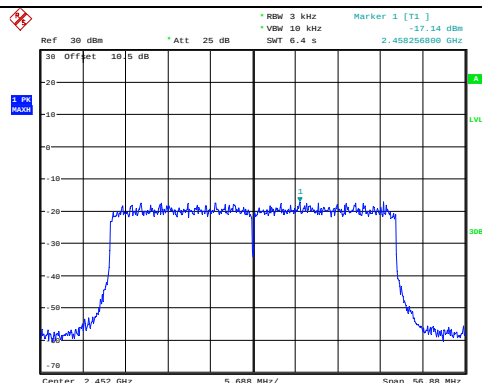

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:06:47

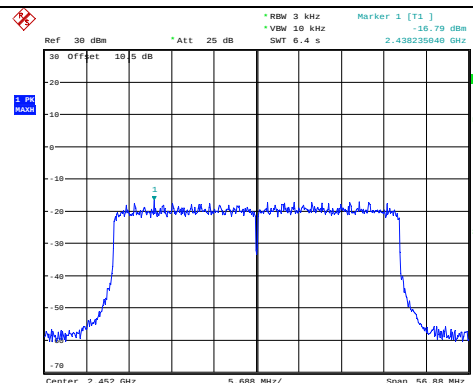

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:41:18

4.7 100 kHz Bandwidth of Frequency Band Edge

Serial Number:	2CHV-2	Test Date:	2023/11/10-2024/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/Ling Ling Li	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	24.5-25.1	Relative Humidity: (%)	45-55	ATM Pressure: (kPa)	101.3-101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023-03-31	2024-03-30

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

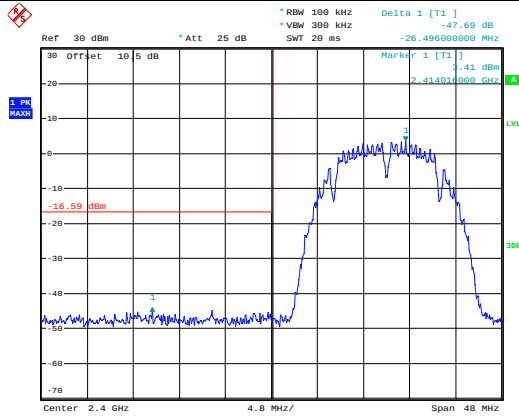100 kHz Bandwidth of Frequency Band Edge**802.11b_Chain 0_Lowest Band edge**


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:19:12

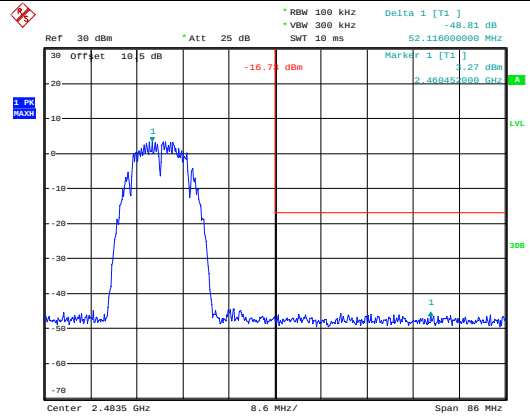802.11b_Chain 0_Highest Band edge


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:21:40

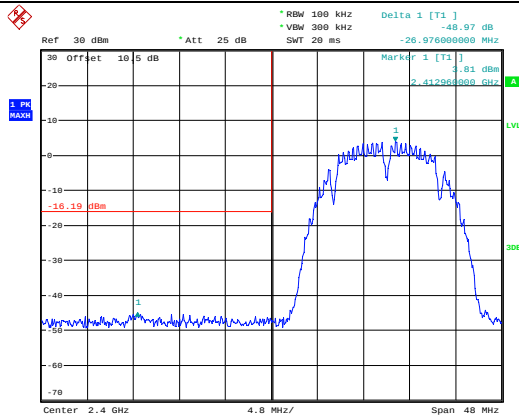802.11b_Chain 1_Lowest Band edge


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:24:34

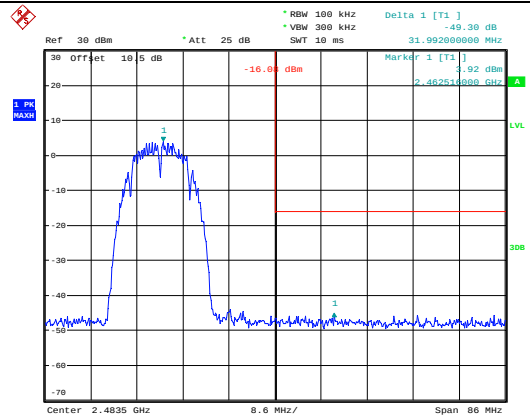802.11b_Chain 1_Highest Band edge


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:26:20

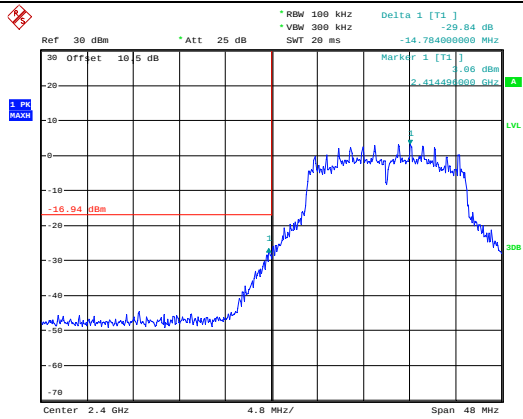100 kHz Bandwidth of Frequency Band Edge**802.11g_Chain 0_Lowest Band edge**


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:17:49

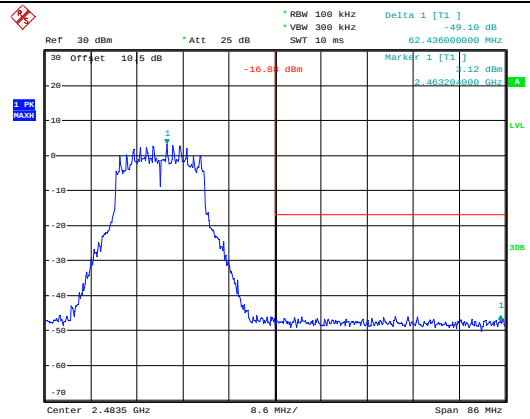802.11g_Chain 0_Highest Band edge

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:14:11

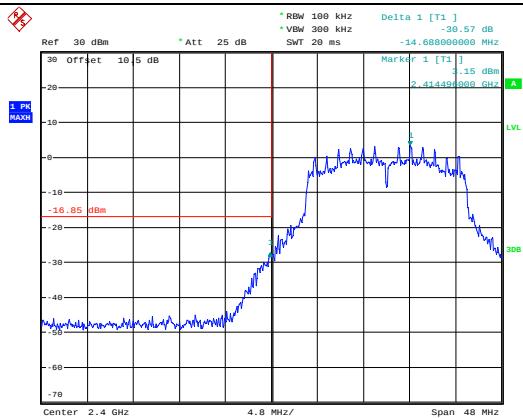802.11g_Chain 1_Lowest Band edge


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:29:54

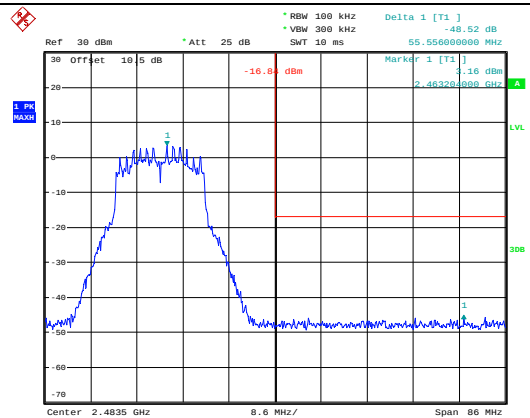802.11g_Chain 1_Highest Band edge

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:27:35


100 kHz Bandwidth of Frequency Band Edge

802.11n ht20_Chain 0_Lowest Band edge

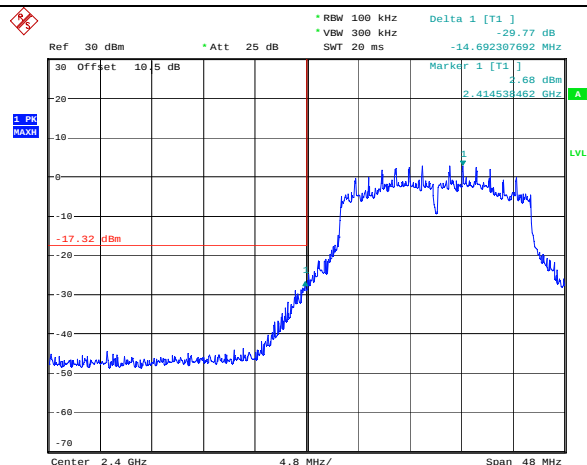


Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9.JAN.2024 10:26:19

802.11n ht20_Chain 0_Highest Band edge

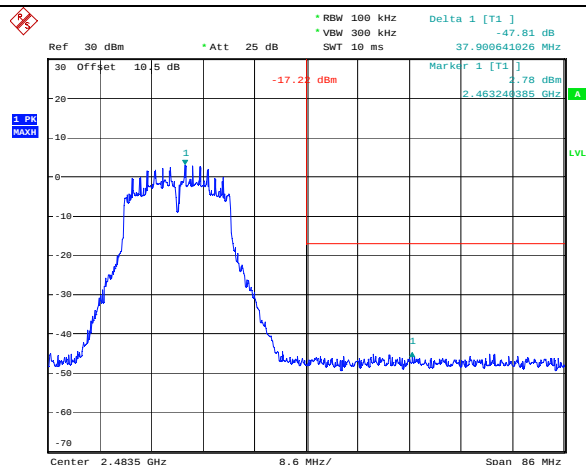


Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9.JAN.2024 10:29:16

802.11n ht20_Chain 1_Lowest Band edge

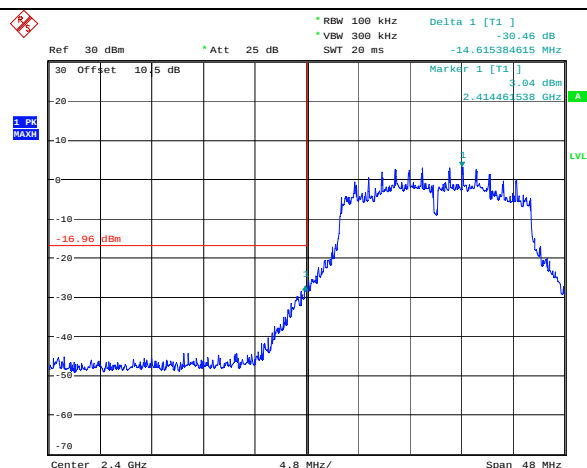

Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9.JAN.2024 10:39:49


802.11n ht20_Chain 1_Highest Band edge

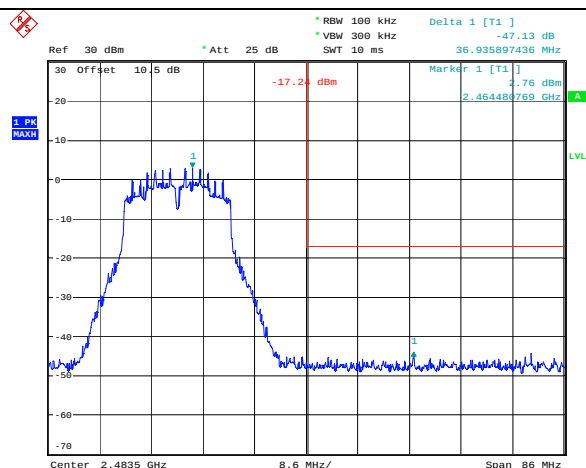


Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9.JAN.2024 10:42:46

100 kHz Bandwidth of Frequency Band Edge


802.11n ht40_Chain 0_Lowest Band edge

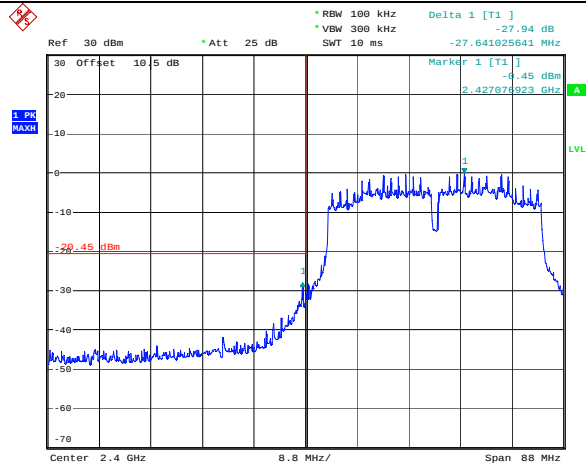


802.11n ht40_Chain 0_Highest Band edge

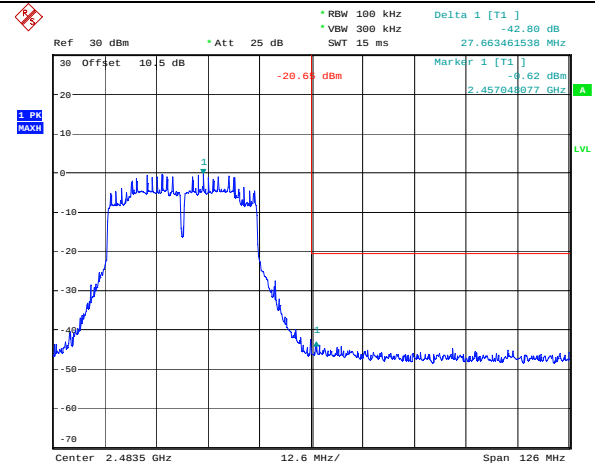


802.11n ht40_Chain 1_Lowest Band edge

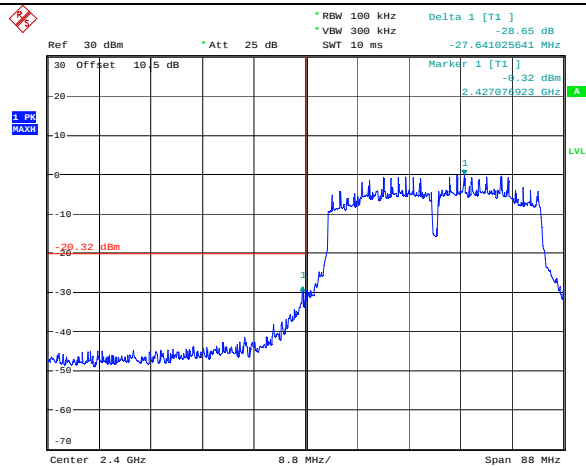


802.11n ht40_Chain 1_Highest Band edge

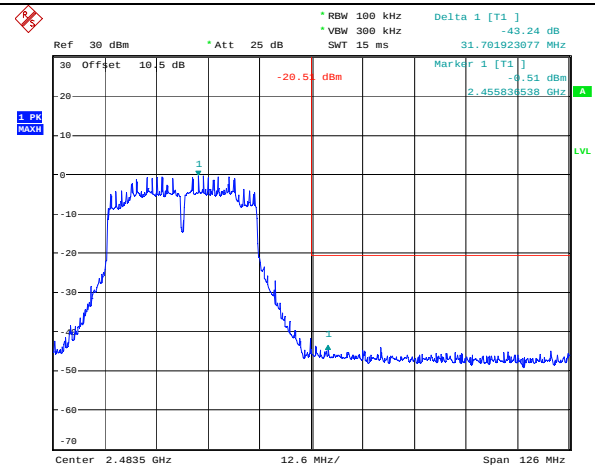


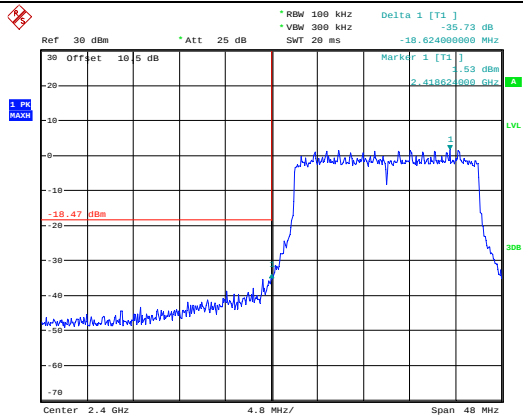100 kHz Bandwidth of Frequency Band Edge**802.11ax hew20_Chain 0_Lowest Band edge**


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:09:05

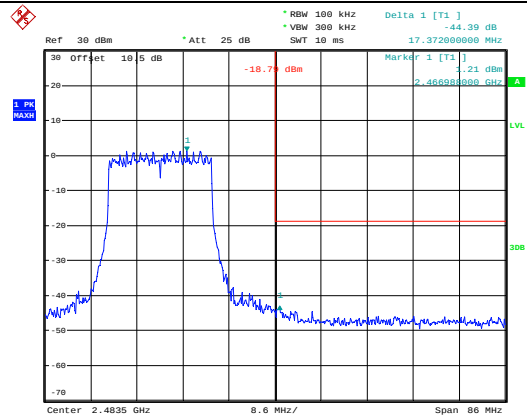802.11ax hew20_Chain 0_Highest Band edge

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:12:27

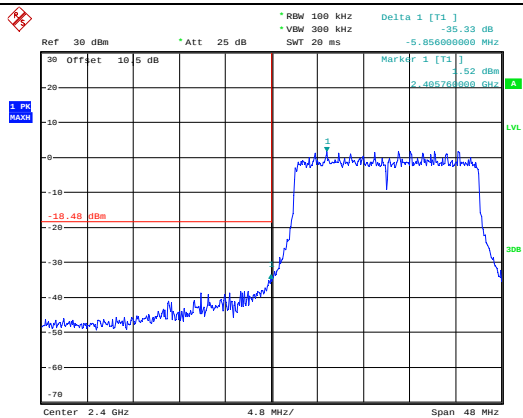802.11ax hew20_Chain 1_Lowest Band edge


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:31:25

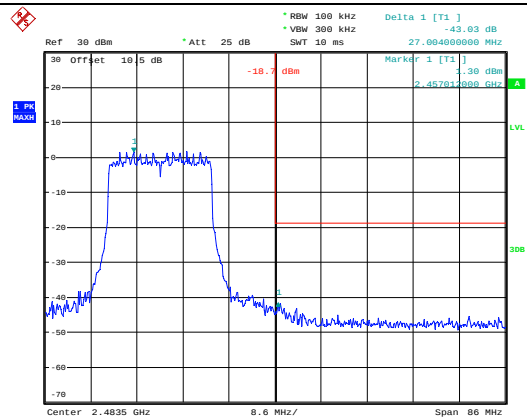802.11ax hew20_Chain 1_Highest Band edge

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:34:02


100 kHz Bandwidth of Frequency Band Edge

802.11ax hew40_Chain 0_Lowest Band edge

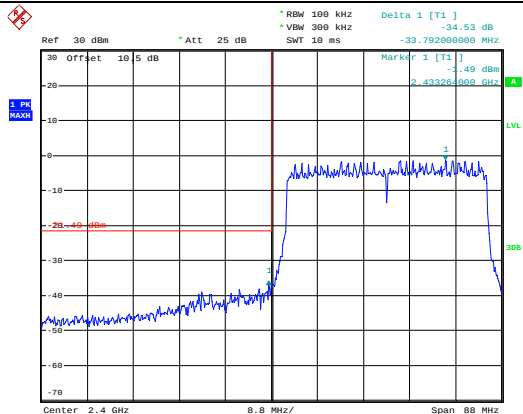


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:02:47

802.11ax hew40_Chain 0_Highest Band edge

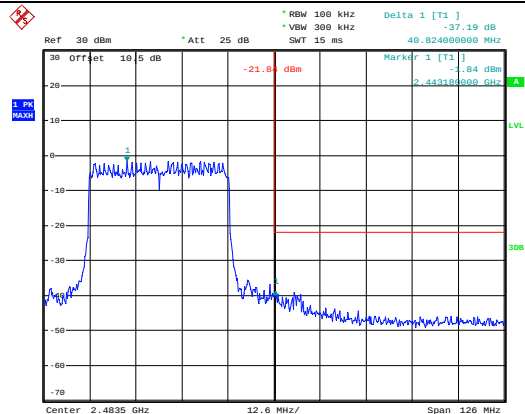


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:07:01

802.11ax hew40_Chain 1_Lowest Band edge

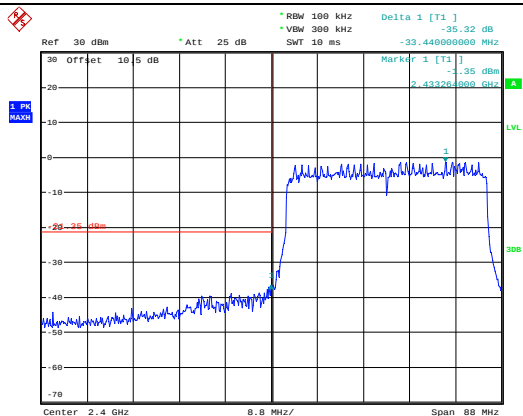

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:35:50

802.11ax hew40_Chain 1_Highest Band edge

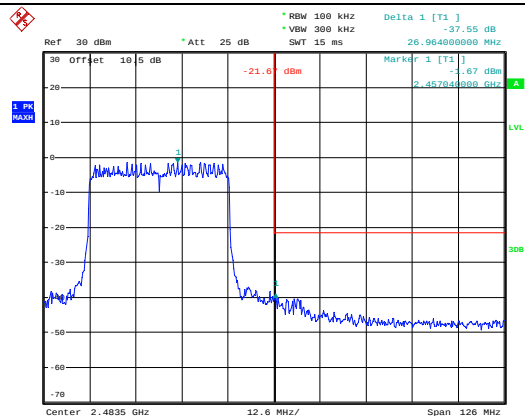

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 22:41:32

4.8 Duty Cycle

Serial Number:	2CHV-2	Test Date:	2023/11/10-2024/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/Ling Ling Li	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.5-25.1	Relative Humidity: (%)	45-55	ATM Pressure: (kPa)	101.3-101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty Factor (dB)	VBW Setting (kHz)
802.11b	100	100	100.00	/	/	0.01
802.11g	0.152	0.193	78.76	6579	1.04	10
802.11n ht20	0.324	0.365	88.77	3086	0.52	5
802.11n ht40	0.327	0.365	89.59	3058	0.48	5
802.11ax hew20	0.268	0.308	87.01	3731	0.60	5
802.11ax hew40	0.168	0.21	80.00	5952	0.97	10

Note: Test only was performed at Chain 0.


Duty Cycle

802.11b

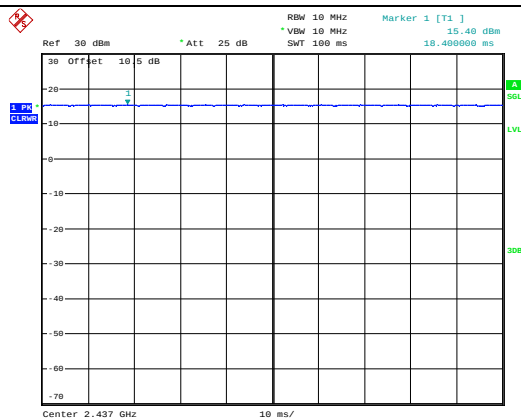


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 21:51:31

802.11g

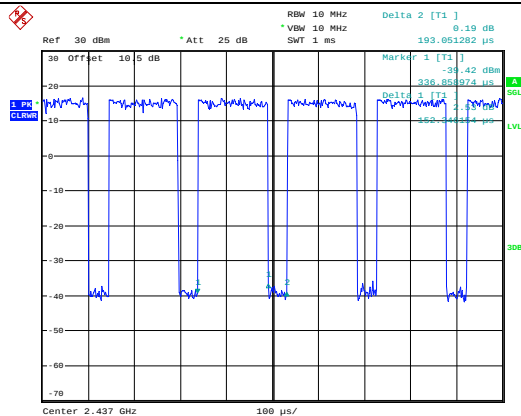


ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 21:53:43

802.11n ht20

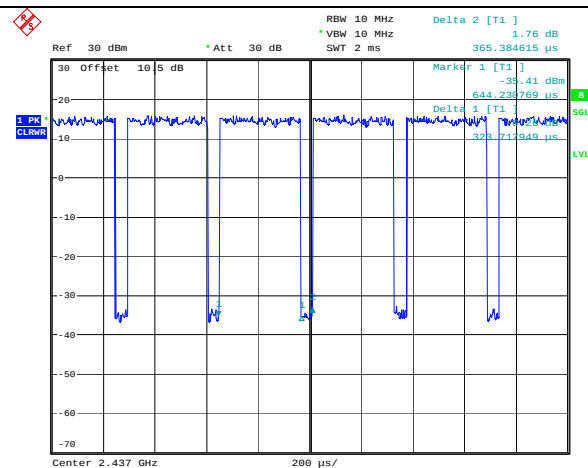


Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9.JAN.2024 10:06:00

802.11n ht40

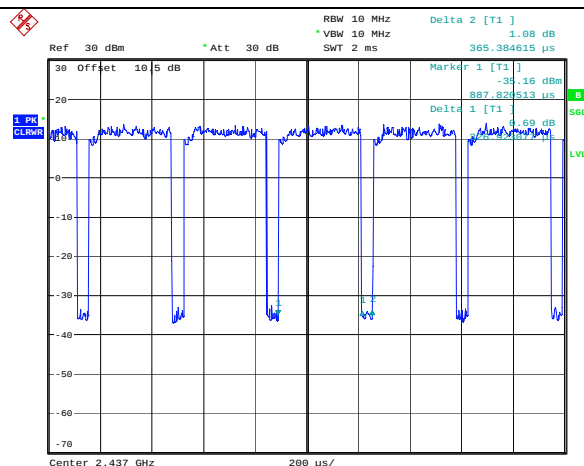


Comment: ProjectNo.:CR231061458-RF Tester:LingLing Li
Date: 9.JAN.2024 10:10:53

802.11ax hew20

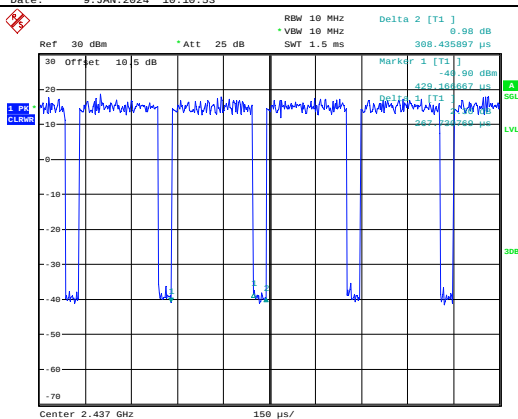

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 21:55:59

802.11ax hew40

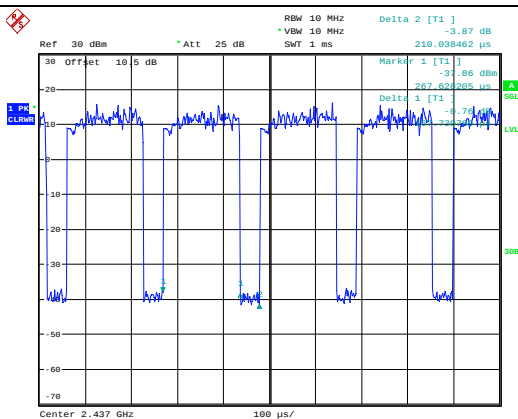

ProjectNo.:CR231061458-RF Tester:Arthur Su
Date: 10.NOV.2023 21:57:51

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231061458-EXP EUT EXTERNAL PHOTOGRAPHS and CR231061458-INP EUT INTERNAL PHOTOGRAPHS.

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231061458-00C-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====