

TEST REPORT

Report No.: 20060285HKG-001

Tristar Production Limited

Application For Certification
(Original Grant)

FCC ID: 2AWLXRBE001CC

IC: 26194-RBE001CC

Transceiver

Prepared and Checked by:

Signed On File

Lee For Yiu, Florey
Assistant Engineer

Approved by:

Wong Kwok Yeung, Kenneth
Senior Lead Engineer
Date: July 22, 2020

TEST REPORT**GENERAL INFORMATION**

Grantee:	Tristar Production Limited
Grantee Address:	Vision Exchange Building, Territorials Street, Mriehel. Birkirkara, BRK 3000, Malta
Contact Person:	Rebecca Koo
Tel:	(852) 2700 7725
Fax:	(852) 2367 0868
e-mail:	rebecca@intermedasia.com
Manufacturer:	Tristar Production Limited
Manufacturer Address:	Vision Exchange Building, Territorials Street, Mriehel. Birkirkara, BRK 3000, Malta
Brand Name:	Rubik's Brand Ltd
Model / HVIN:	RBE001-CC
PMN:	RBE001-CC
Type of EUT:	Transceiver
Description of EUT:	Rubik's Connected Cube
Serial Number:	N/A
FCC ID / IC:	2AWLXRBE001CC / 26194-RBE001CC
Date of Sample Submitted:	June 04, 2020
Date of Test:	June 04, 2020 to July 20, 2020
Report No.:	20060285HKG-001
Report Date:	July 22, 2020
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-210 Issue 10 Certification.

TEST REPORT**SUMMARY OF TEST RESULT**

Test Specification	Reference	Results
Radiated Emission	15.249, 15.209 /	Pass
Radiated Emission on the Bandedge	RSS-210 B.10, RSS-210 4.4	
AC power-line conducted emissions limits	15.207 / RSS-Gen 8.8	
Radiated Emission in Restricted Bands	15.205 / RSS-210 4.1	Pass

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2019 Edition

RSS-210 Issue 10, December 2019

RSS-Gen Issue 5 Amendment 1, March 2019

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

TEST REPORT**TABLE OF CONTENTS**

1.0	GENERAL DESCRIPTION	5
1.1	Product Description	5
1.2	Related Submittal(s) Grants	5
1.3	Test Methodology	5
1.4	Test Facility	5
2.0	SYSTEM TEST CONFIGURATION	6
2.1	Justification	6
2.2	EUT Exercising Software	6
2.3	Special Accessories	6
2.4	Measurement Uncertainty	6
2.5	Support Equipment List and Description	6
3.0	EMISSION RESULTS	7
3.1	Field Strength Calculation	7
3.2	Radiated Emission Configuration Photograph	8
3.3	Radiated Emission Data	8
4.0	EQUIPMENT PHOTOGRAPHS	18
5.0	PRODUCT LABELLING	18
6.0	TECHNICAL SPECIFICATIONS	18
7.0	INSTRUCTION MANUAL	18
8.0	MISCELLANEOUS INFORMATION	19
8.1	Radiated Emission on the Bandedge	19
8.2	Emissions Test Procedures	24
8.3	Occupied Bandwidth	27
9.0	CONFIDENTIALITY REQUEST	29
10.0	EQUIPMENT LIST	29

TEST REPORT

1.0 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT), is a portable 2.4GHz Bluetooth 5.0 BLE Cube (Cube Unit) for a RC Cube. The sample supplied operated on 40 channels, normally at 2402 - 2480MHz. The channels are separated with 2MHz spacing.

The EUT is powered by 1 x 3.7V Rechargeable battery. After switching on the EUT, the cube will light up and record movement based on the switches pressed in smartphone controller app.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The 3m Chamber used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042H.

TEST REPORT

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by DC 3.7V (1 x 3.7V Rechargeable Battery).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

2.5 Support Equipment List and Description

Support Equipment:	HP EliteBook Notebook (Provided by Intertek)
Cables:	1 x USB cable with length of 0.85 meter long (Provided by Client)

TEST REPORT

3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB μ V/m

RR = RA - AG - AV in dB μ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

TEST REPORT**3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 4804 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 0.6 dB

TEST REPORT

RADIATED EMISSIONS

Model: RBE001-CC

Date of Test: July 20, 2020

Worst-Case Operating Mode: Transmitting (Data Rate: 1Mbps)

Table 1
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Lowest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	94.3	33	29.4	90.7	94.0	-3.3
V	4804.000	51.5	33	34.9	53.4	54.0	-0.6
V	7206.000	44.5	33	37.9	49.4	54.0	-4.6
H	9608.000	22.3	33	40.4	29.7	54.0	-24.3
H	12010.000	37.8	33	40.5	45.3	54.0	-8.7
H	14412.000	22.7	33	40.0	29.7	54.0	-24.3

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	95.3	33	29.4	91.7	114.0	-22.3
V	4804.000	55.4	33	34.9	57.3	74.0	-16.7
V	7206.000	48.8	33	37.9	53.7	74.0	-20.3
H	9608.000	31.0	33	40.4	38.4	74.0	-35.6
H	12010.000	46.2	33	40.5	53.7	74.0	-20.3
H	14412.000	31.8	33	40.0	38.8	74.0	-35.2

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative sign in the column shows value below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: RBE001-CC

Date of Test: July 20, 2020

Worst-Case Operating Mode: Transmitting (Data Rate: 1Mbps)

Table 2
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Middle Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	92.9	33	29.4	89.3	94.0	-4.7
V	4880.000	47.2	33	34.9	49.1	54.0	-4.9
V	7320.000	46.3	33	37.9	51.2	54.0	-2.8
H	9760.000	23.3	33	40.4	30.7	54.0	-23.3
H	12200.000	33.2	33	40.5	40.7	54.0	-13.3
H	14640.000	24.6	33	38.4	30.0	54.0	-24.0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	94.3	33	29.4	90.7	114.0	-23.3
V	4880.000	52.2	33	34.9	54.1	74.0	-19.9
V	7320.000	50.4	33	37.9	55.3	74.0	-18.7
H	9760.000	30.7	33	40.4	38.1	74.0	-35.9
H	12200.000	44.1	33	40.5	51.6	74.0	-22.4
H	14640.000	32.9	33	38.4	38.3	74.0	-35.7

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative sign in the column shows value below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: RBE001-CC

Date of Test: July 20, 2020

Worst-Case Operating Mode: Transmitting (Data Rate: 1Mbps)

Table 3
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Highest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	89.7	33	29.4	86.1	94.0	-7.9
V	4960.000	49.9	33	34.9	51.8	54.0	-2.2
V	7440.000	46.6	33	37.9	51.5	54.0	-2.5
H	9920.000	22.3	33	40.4	29.7	54.0	-24.3
H	12400.000	22.5	33	40.5	30.0	54.0	-24.0
H	14880.000	24.2	33	38.4	29.6	54.0	-24.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	91.7	33	29.4	88.1	114.0	-25.9
V	4960.000	52.6	33	34.9	54.5	74.0	-19.5
V	7440.000	50.9	33	37.9	55.8	74.0	-18.2
H	9920.000	31.1	33	40.4	38.5	74.0	-35.5
H	12400.000	30.6	33	40.5	38.1	74.0	-35.9
H	14880.000	33.0	33	38.4	38.4	74.0	-35.6

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative sign in the column shows value below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: RBE001-CC

Date of Test: July 20, 2020

Worst-Case Operating Mode: Transmitting (Data Rate: 2Mbps)

Table 4
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	89.0	33	29.4	85.4	94.0	-8.6
H	4804.000	51.3	33	34.9	53.2	54.0	-0.8
V	7206.000	40.3	33	37.9	45.2	54.0	-8.8
H	9608.000	22.3	33	40.4	29.7	54.0	-24.3
H	12010.000	31.9	33	40.5	39.4	54.0	-14.6
H	14412.000	22.7	33	40.0	29.7	54.0	-24.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	94.8	33	29.4	91.2	114.0	-22.8
H	4804.000	57.2	33	34.9	59.1	74.0	-14.9
V	7206.000	49.8	33	37.9	54.7	74.0	-19.3
H	9608.000	31.0	33	40.4	38.4	74.0	-35.6
H	12010.000	45.7	33	40.5	53.2	74.0	-20.8
H	14412.000	31.8	33	40.0	38.8	74.0	-35.2

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative sign in the column shows value below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: RBE001-CC

Date of Test: July 20, 2020

Worst-Case Operating Mode: Transmitting (Data Rate: 2Mbps)

Table 5
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Middle Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	88.2	33	29.4	84.6	94.0	-9.4
H	4880.000	50.5	33	34.9	52.4	54.0	-1.6
H	7320.000	41.6	33	37.9	46.5	54.0	-7.5
H	9760.000	23.3	33	40.4	30.7	54.0	-23.3
H	12200.000	29.9	33	40.5	37.4	54.0	-16.6
H	14640.000	24.6	33	38.4	30.0	54.0	-24.0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	90.6	33	29.4	87.0	114.0	-27.0
H	4880.000	55.5	33	34.9	57.4	74.0	-16.6
H	7320.000	50.3	33	37.9	55.2	74.0	-18.8
H	9760.000	30.7	33	40.4	38.1	74.0	-35.9
H	12200.000	43.7	33	40.5	51.2	74.0	-22.8
H	14640.000	32.9	33	38.4	38.3	74.0	-35.7

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative sign in the column shows value below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: RBE001-CC

Date of Test: July 20, 2020

Worst-Case Operating Mode: Transmitting (Data Rate: 2Mbps)

Table 6
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	86.9	33	29.4	83.3	94.0	-10.7
V	4960.000	50.1	33	34.9	52.0	54.0	-2.0
V	7440.000	40.4	33	37.9	45.3	54.0	-8.7
H	9920.000	22.3	33	40.4	29.7	54.0	-24.3
H	12400.000	22.5	33	40.5	30.0	54.0	-24.0
H	14880.000	24.2	33	38.4	29.6	54.0	-24.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	93.6	33	29.4	90.0	114.0	-24.0
V	4960.000	54.7	33	34.9	56.6	74.0	-17.4
V	7440.000	49.0	33	37.9	53.9	74.0	-20.1
H	9920.000	31.1	33	40.4	38.5	74.0	-35.5
H	12400.000	30.6	33	40.5	38.1	74.0	-35.9
H	14880.000	33.0	33	38.4	38.4	74.0	-35.6

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative sign in the column shows value below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: RBE001-CC

Date of Test: July 20, 2020

Worst-Case Operating Mode: Charging

Table 7
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement


Polarization	Frequency (MHz)	Reading (dBmV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	33.531	39.3	16	10.0	33.3	40.0	-6.7
H	83.500	38.0	16	7.0	29.0	40.0	-11.0
V	154.188	30.7	16	15.0	29.7	43.5	-13.8
V	217.441	22.4	16	17.0	23.4	46.0	-22.6
H	305.069	23.3	16	23.0	30.3	46.0	-15.7
V	388.188	20.2	16	25.0	29.2	46.0	-16.8
V	569.538	15.6	16	28.0	27.6	46.0	-18.4
H	718.713	16.4	16	30.0	30.4	46.0	-15.6

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT**Conducted Emission Data**

Model No.: RBE001-CC
Worst Case: Charging

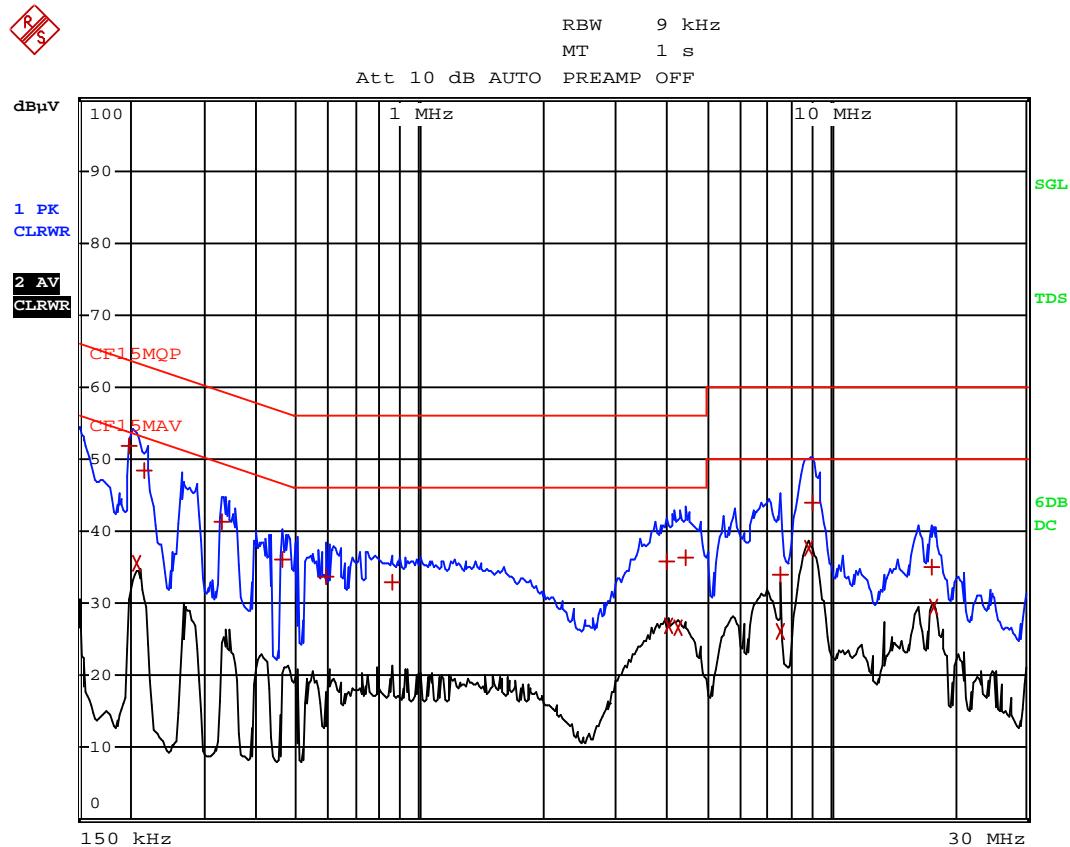

Date: 24.JUN.2020 11:35:53

TEST REPORT

Model No.: RBE001-CC
Worst Case: Charging

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP	Trace2:	CF15MAV	Trace3:	---
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB	
1	Quasi Peak 199.5 kHz	51.84 L1	-	-11.79	
2	CISPR Average 208.5 kHz	35.43 N	-	-17.83	
1	Quasi Peak 217.5 kHz	48.43 N	-	-14.47	
1	Quasi Peak 334.5 kHz	41.35 N	-	-17.98	
1	Quasi Peak 460.5 kHz	36.07 L1	-	-20.60	
1	Quasi Peak 591 kHz	33.80 N	-	-22.19	
1	Quasi Peak 856.5 kHz	32.87 N	-	-23.13	
1	Quasi Peak 4.0065 MHz	35.91 N	-	-20.08	
2	CISPR Average 4.065 MHz	27.00 N	-	-18.99	
2	CISPR Average 4.272 MHz	26.53 L1	-	-19.46	
1	Quasi Peak 4.461 MHz	36.36 L1	-	-19.64	
1	Quasi Peak 7.5615 MHz	33.93 N	-	-26.06	
2	CISPR Average 7.566 MHz	26.17 L1	-	-23.82	
2	CISPR Average 8.8575 MHz	37.72 N	-	-12.27	
1	Quasi Peak 9.042 MHz	43.89 N	-	-16.10	
1	Quasi Peak 17.619 MHz	35.03 N	-	-24.96	
2	CISPR Average 17.8485 MHz	29.56 N	-	-20.43	

Date: 24.JUN.2020 11:35:33

TEST REPORT

4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

TEST REPORT

8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure.



8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209 / RSS-210 4.4, whichever is the lesser attenuation, which meet the requirement of part 15.249(d) / RSS-210 B.10.

TEST REPORT

PEAK MEASUREMENT (Data Rate: 1Mbps)

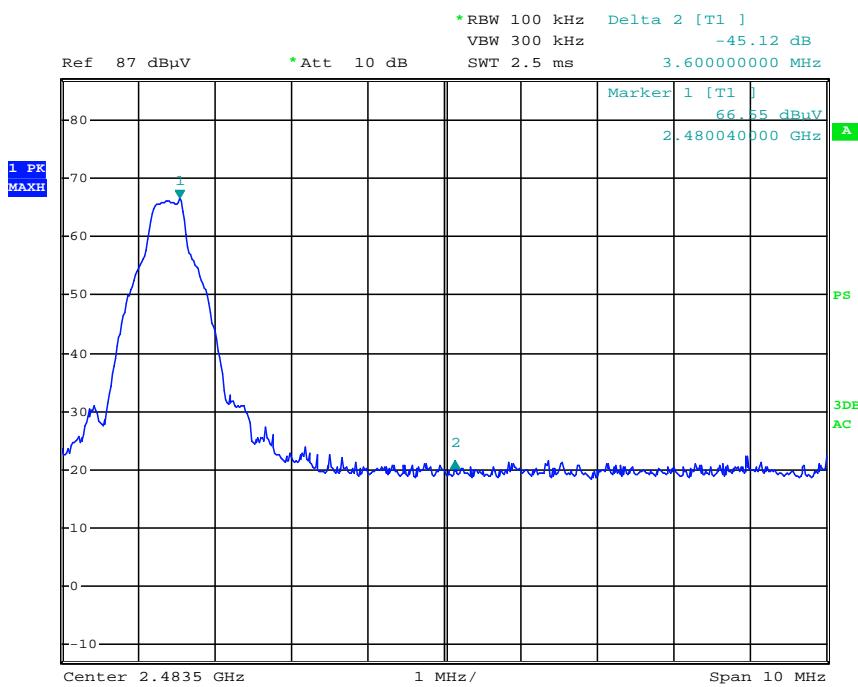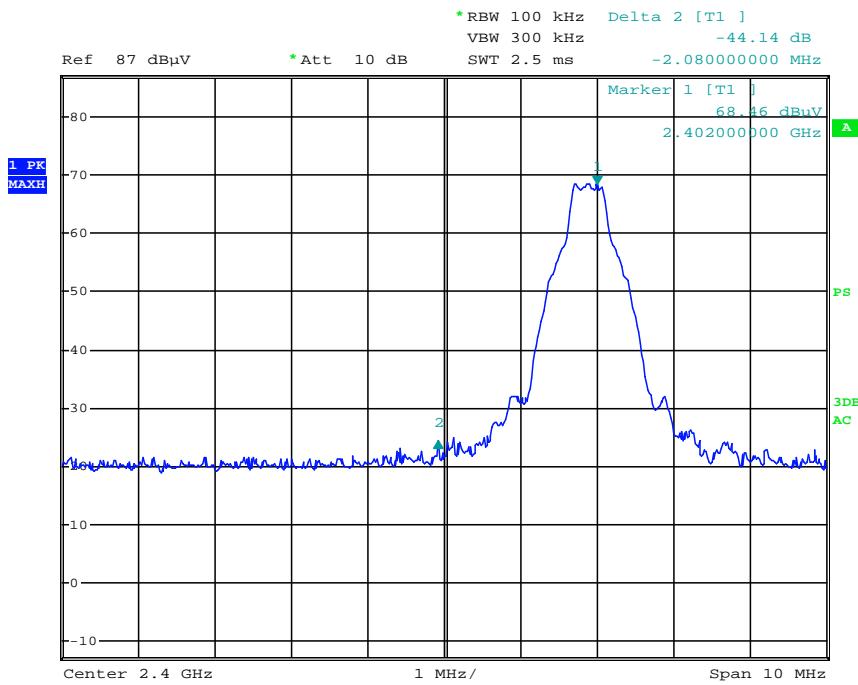

TEST REPORT**PEAK MEASUREMENT (Data Rate: 1Mbps)**

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=91.7 \text{ dB}\mu\text{V/m} - 44.1 \text{ dB}$$

$$=47.6 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=90.7 \text{ dB}\mu\text{V/m} - 44.1 \text{ dB}$$

$$=46.6 \text{ dB}\mu\text{V/m}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=88.1 \text{ dB}\mu\text{V/m} - 45.1 \text{ dB}$$

$$=43.0 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot



$$=86.1 \text{ dB}\mu\text{V/m} - 45.1 \text{ dB}$$

$$=41.0 \text{ dB}\mu\text{V/m}$$

The resultant field strength meets the general radiated emission limit in Section 15.209 / RSS-210 4.4, which does not exceed 74 dB μ V/m (Peak Limit) but exceeded 54 dB μ V/m (Average Limit).

TEST REPORT

PEAK MEASUREMENT (Data Rate: 2Mbps)

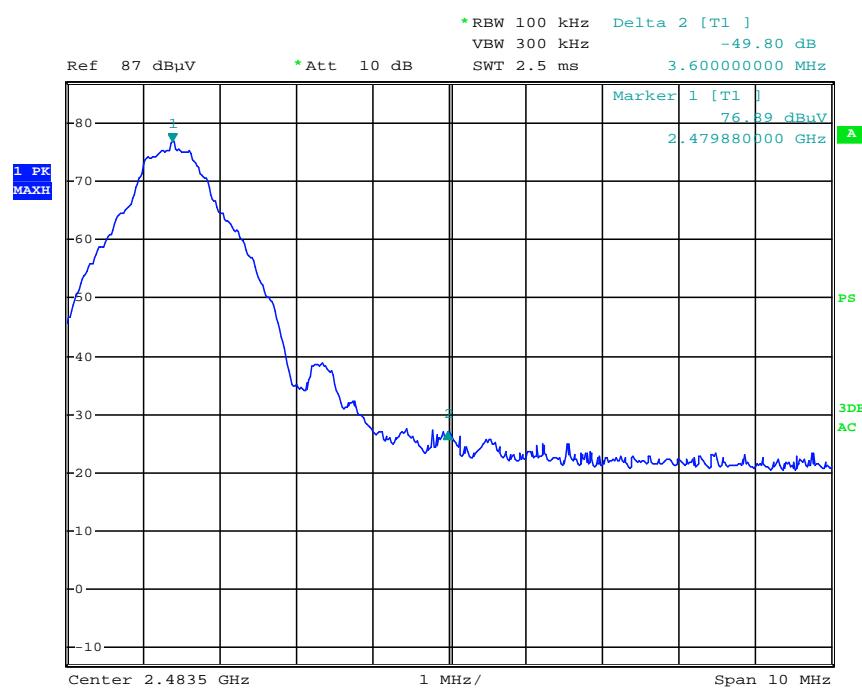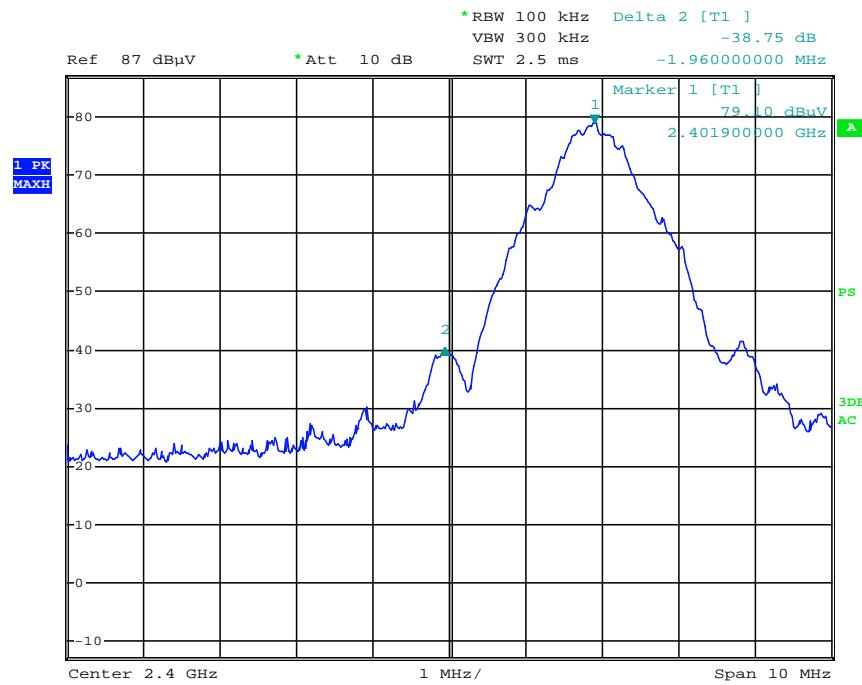

TEST REPORT**PEAK MEASUREMENT (Data Rate: 2Mbps)**

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=91.2 dB μ V/m – 38.8 dB

=52.4 dB μ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=85.4 dB μ V/m – 38.8 dB

=46.6 dB μ V/m

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=90.0 dB μ V/m – 49.8 dB

=40.2 dB μ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=83.3 dB μ V/m – 49.8 dB

=33.5 dB μ V/m

The resultant field strength meets the general radiated emission limit in Section 15.209 / RSS-210 4.4, which does not exceed 74 dB μ V/m (Peak Limit) but exceeded 54 dB μ V/m (Average Limit).

TEST REPORT

8.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

TEST REPORT

8.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


TEST REPORT

8.2.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

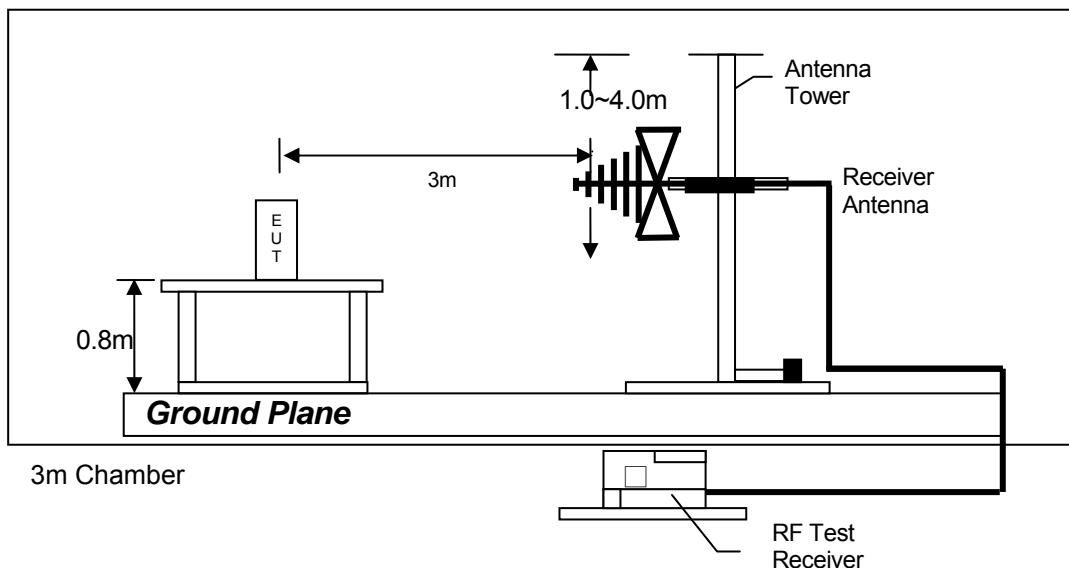

Test setup of radiated emissions up to 1GHz

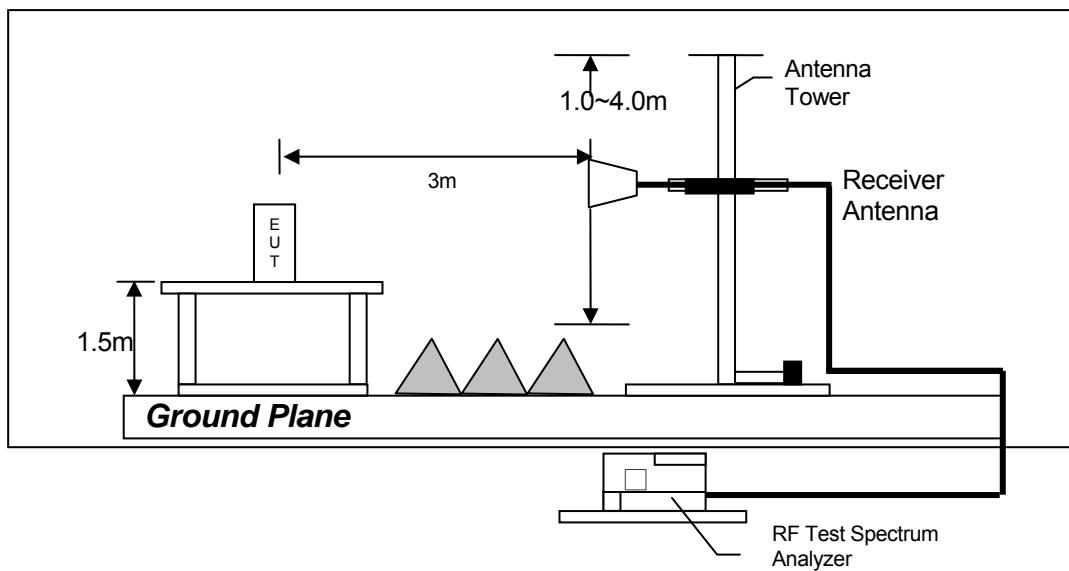

Test setup of radiated emissions above 1GHz


TEST REPORT

8.3 Occupied Bandwidth

Occupied Bandwidth Results: (Data Rate: 1Mbps)

Occupied Bandwidth (kHz)	
Low Channel: 2402	980
Middle Channel: 2440	1000
High Channel: 2480	1040

The worst case is shown as below

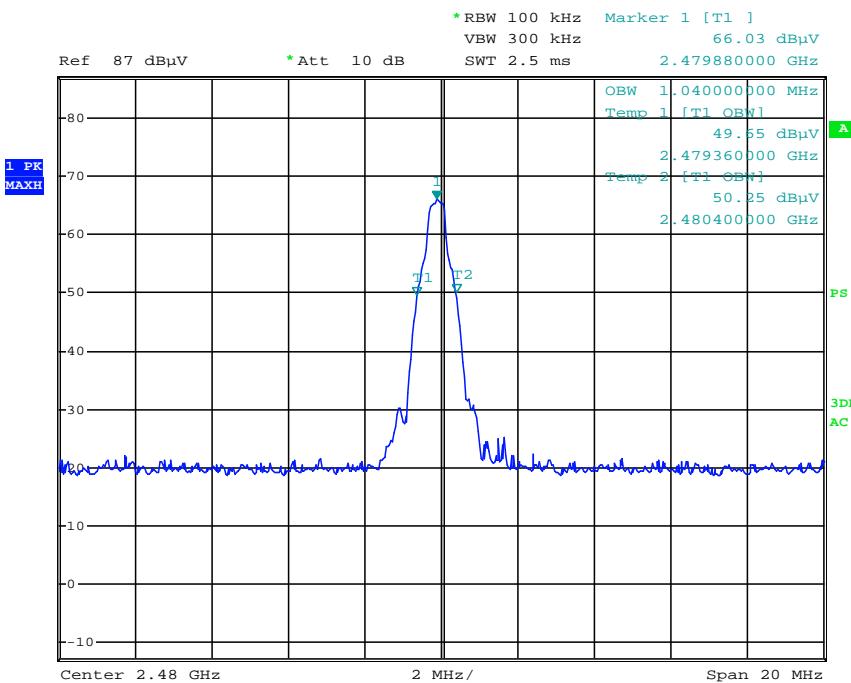


TEST REPORT

Occupied Bandwidth Results: (Data Rate: 2Mbps)

Occupied Bandwidth (kHz)	
Low Channel: 2402	1800
Middle Channel: 2440	1840
High Channel: 2480	1840

The worst case is shown as below

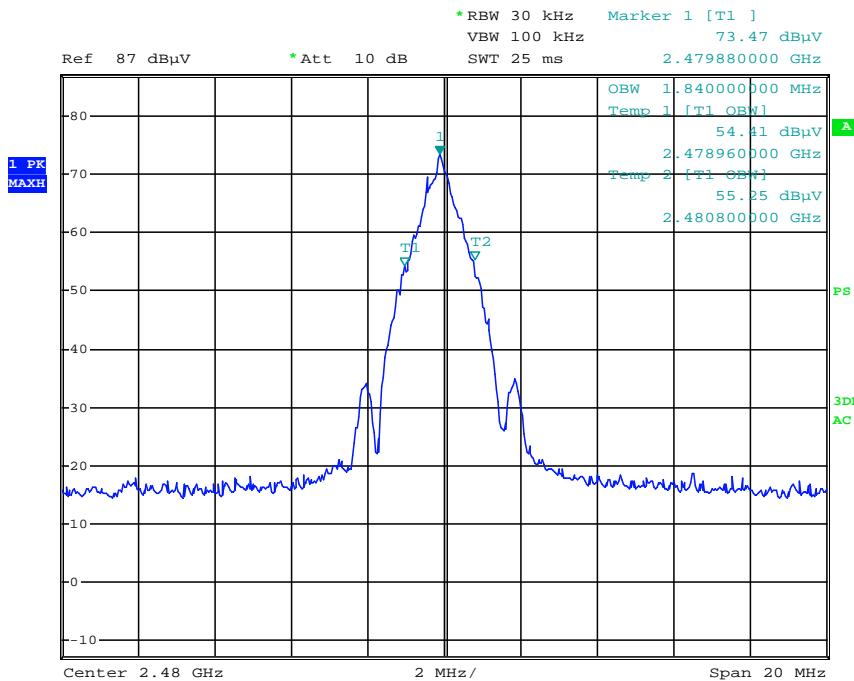

TEST REPORT

9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

10.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	Test Receiver	Biconical Antenna	Spectrum Analyzer
Registration No.	EW-3156	EW-0571	EW-2253
Manufacturer	ROHDE SCHWARZ	EMCO	ROHDE SCHWARZ
Model No.	ESR26	3104C	FSP40
Calibration Date	August 01, 2019	July 23, 2019	November 18, 2019
Calibration Due Date	August 01, 2020	January 23, 2021	November 18, 2020

Equipment	Log Periodic Antenna	RF Pre-amplifier 3 pcs (9kHz to 40GHz)	14m Double Shield RF Cable
Registration No.	EW-1042	EW-3006	EW-2505
Manufacturer	EMCO	SCHWARZBECK	RADIALL
Model No.	3148	BBV 9718	Nm-RG142-
Calibration Date	November 23, 2018	November 25, 2019	November 14, 2019
Calibration Due Date	November 23, 2020	November 25, 2020	November 14, 2020

Equipment	Double Ridged Guide Antenna	Horn Antenna (14GHz – 40GHz)	RF Cable 14m
Registration No.	EW-0194	EW-1679	EW-2505
Manufacturer	EMCO	SCHWARZBECK	GREATBILLION
Model No.	3115	BBHA9170	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	March 26, 2020	October 1, 2019	November 14, 2019
Calibration Due Date	March 26, 2021	October 1, 2020	November 14, 2020

2) Conducted Emissions Test

Equipment	Test Receiver	Artificial Mains Network
Registration No.	EW-3156	EW-2874
Manufacturer	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	ESR26	ENV-216
Calibration Date	August 01, 2019	July 05, 2019
Calibration Due Date	August 01, 2020	October 05, 2020

3) Bandwidth Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2253
Manufacturer	ROHDE SCHWARZ
Model No.	FSP40
Calibration Date	November 18, 2019
Calibration Due Date	November 18, 2020