


Antenna Gain & Efficiency


Passive Test For D6										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)	Directivity (dBi)	Beamwidth (3dB)
2400	37.78	-4.23	1.61	-0.54	16.569	21.215	1.61	-18.44	46.5	45.85
2405	36.07	-4.43	1.36	-0.79	15.675	20.39	1.36	-17.76	46.55	45.95
2410	36.47	-4.38	1.3	-0.85	15.782	20.686	1.3	-16.94	46.61	46.05
2415	36.35	-4.39	1.23	-0.92	15.581	20.769	1.23	-16.45	46.6	46.11
2420	37.2	-4.3	1.27	-0.88	15.74	21.456	1.27	-15.55	46.59	46.17
2425	37.82	-4.22	1.39	-0.76	15.702	22.118	1.39	-14.89	46.68	46.15
2430	40.23	-3.95	1.67	-0.48	16.4	23.828	1.67	-14.29	46.77	46.14
2435	40.37	-3.94	1.71	-0.44	16.147	24.227	1.71	-14.06	46.78	46.06
2440	40.86	-3.89	1.78	-0.37	15.978	24.88	1.78	-13.91	46.79	45.97
2445	40.74	-3.9	1.71	-0.44	15.699	25.045	1.71	-13.76	46.69	45.9
2450	38.1	-4.19	1.37	-0.78	14.466	23.635	1.37	-14.14	46.58	45.82
2455	38.98	-4.09	1.43	-0.72	14.554	24.422	1.43	-14.33	46.66	45.89
2460	39.5	-4.03	1.42	-0.73	14.575	24.921	1.42	-14.26	46.74	45.97
2465	35.44	-4.5	0.88	-1.27	12.977	22.468	0.88	-14.6	46.64	45.97
2470	35.8	-4.46	0.82	-1.33	13.084	22.719	0.82	-14.55	46.54	45.98
2475	36.65	-4.36	0.73	-1.42	13.504	23.142	0.73	-14.17	46.51	46.22
2480	35.08	-4.55	0.34	-1.81	13.129	21.954	0.34	-14.1	46.48	46.46
2485	37.73	-4.23	0.46	-1.69	14.386	23.346	0.46	-14.2	46.51	46.61
2490	36.8	-4.34	0.03	-2.12	14.447	22.354	0.03	-14.59	46.53	46.76
2495	36.96	-4.32	-0.05	-2.2	15.009	21.951	-0.05	-14.43	46.65	46.57
2500	37.53	-4.26	0.11	-2.04	15.848	21.682	0.11	-14.77	46.77	46.39

Application Information	
Antenna model	V1.0
TotalTime	4m 18s 135ms
AdditionalInfor	NULL


2350.00MHz - 2550.00MHz Gain

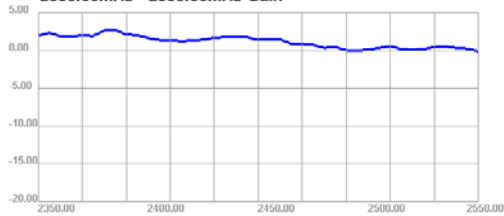


2350.00MHz - 2550.00MHz Efficiency

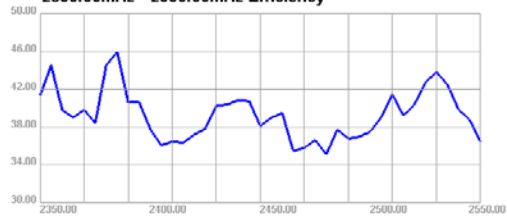

Dimension of Antenna

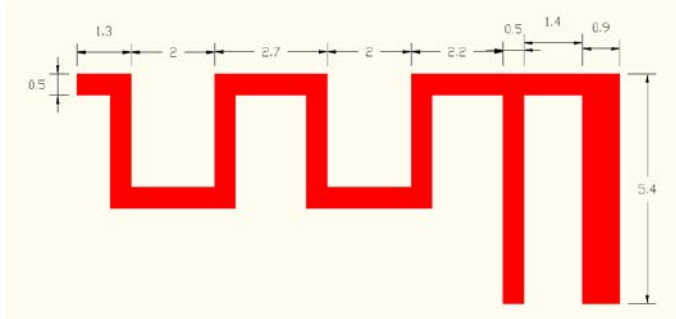

2D Test Pattern

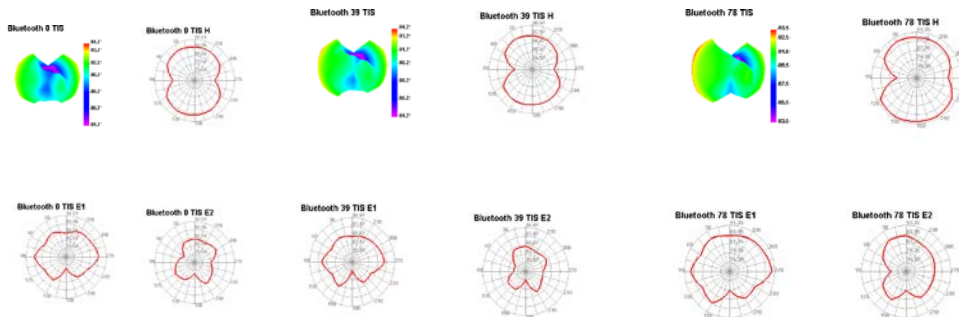

Antenna Manufacturer

Applicant:Qiaolian Electronics DongGuan co.,LTD
Address:Dongxing Industrial park, Qiishi Town, Dongguan City, Guangdong Prov. China