

Prüfbericht-Nr.: <i>Test report no.:</i>	60399900 001	Auftrags-Nr.: <i>Order no.:</i>	168264754	Seite 1 von 27 Page 1 of 27
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2020-05-13	
Auftraggeber: <i>Client:</i>	SAS VIWONE 48 BOULEVARD GOUVION SAINT CYR PARIS FRANCE			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Headset			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	PURE+ GOLD MAT (MEMORY 64GB), PURE+ BLACK MAT (MEMORY 64GB), PURE+ WHITE (LIMITED EDITION) 128GB, ETERNAL BLACK (GAMME ONE) 128GB, ETERNAL GOLD (GAMME ONE) 128GB, REBEL CHROME GOLD (GAMME ONE) 128GB, PURE BLACK MAT (BLUETOOTH), PURE GOLD MAT (BLUETOOTH) (Trademark: VIWONE)			
Auftrags-Inhalt: <i>Order content:</i>	FCC approval			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 FCC KDB Publication 447498 v06			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2020-07-16	Please refer to photo documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A002867070-001			
Prüfzeitraum: <i>Testing period:</i>	2020-07-17 - 2020-07-31			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>		genehmigt von: <i>authorized by:</i>		
Datum: <i>Date:</i>	2020-08-14	Ausstellungsdatum: <i>Issue date:</i>	2020-08-14	
Stellung / Position	Ryan Yang / Project Engineer	Stellung / Position	Winnie Hou / Technical Certifier	
Sonstiges / Other: FCC ID: 2AWOJV12705				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.6 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.7 20dB BANDWIDTH

RESULT: Pass

5.1.8 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.9 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.10 TIME OF OCCUPANCY

RESULT: Pass

5.1.11 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1	GENERAL REMARKS.....	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	8
3	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS	9
3.3	INDEPENDENT OPERATION MODES.....	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	11
3.5	SUBMITTED DOCUMENTS	11
4	TEST SET-UP AND OPERATION MODES.....	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	12
4.2	TEST OPERATION AND TEST SOFTWARE.....	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS.....	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1	Antenna Requirement.....	15
5.1.2	Maximum Peak Conducted Output Power	16
5.1.3	Conducted Power Spectral Density.....	17
5.1.4	6dB Bandwidth.....	18
5.1.5	Conducted Spurious Emissions Measured in 100 kHz Bandwidth	19
5.1.6	Radiated Spurious Emission	20
5.1.7	20dB Bandwidth.....	21
5.1.8	Carrier Frequency Separation	22
5.1.9	Number of Hopping Frequency.....	23
5.1.10	Time of Occupancy.....	24
5.1.11	Conducted Emission on AC Mains	25
6	SAFETY HUMAN EXPOSURE.....	26
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE.....	26
6.1.1	Electromagnetic Fields	26
7	PHOTOGRAPHS OF THE TEST SET-UP	27

Prüfbericht - Nr.: 60399900 001
Test Report No.

Seite 4 von 27
Page 4 of 27

8	LIST OF TABLES	27
----------	-----------------------------	-----------

Prüfbericht - Nr.: 60399900 001
Test Report No.

Seite 5 von 27
Page 5 of 27

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of BDR/EDR mode

Appendix C: Test Results of BLE

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

TÜV Rheinland (Shenzhen) Co., Ltd.

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2020-08-20
OSP	R&S	OSP 150	101017	2020-12-17
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2020-12-17
Wideband Power Sensor	R&S	NRP-Z81	105350	2020-12-17
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2021-07-23
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2020-08-19
Signal Analyzer	R&S	FSV 40	101439	2020-08-21
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2020-08-21
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2020-08-20
Amplifier	R&S	SCU-18F	180070	2020-08-20
Amplifier	R&S	SCU40A	100475	2020-08-20
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2020-09-02
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2020-09-02
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2020-09-02
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2020-09-01
Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	2020-09-02
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A

Prüfbericht - Nr.: 60399900 001
Test Report No.

Seite 7 von 27
Page 7 of 27

Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2021-07-06

Conducted Emission on AC Mains				
Equipment	Manufacturer	Model No.	Serial No.	Cali. until
EMI Test Receiver	R&S	ESR3	102428	2020-09-03
Artificial Mains Network	R&S	ENV216	102333	2020-08-19
EMC32 test software	R&S	EMC32(Ver.10.50.0 1)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

Prüfbericht - Nr.: 60399900 001
Test Report No.

Seite 8 von 27
Page 8 of 27

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Headset, which supports Bluetooth wireless technology.

According to the declaration of the applicant, the electrical circuit design, PCB layout and components used are identical for all models, only the model number, colour and supported function are different, see below table for details:

Model No.	Supported Function	Memory Capacity of TF Card	Tested
PURE+ GOLD MAT (MEMORY 64GB)	Bluetooth, TF Card	64GB	☒
PURE+ BLACK MAT (MEMORY 64GB)	Bluetooth, TF Card	64GB	☐
PURE+ WHITE (LIMITED EDITION) 128GB	Bluetooth, TF Card	128GB	☐
ETERNAL BLACK (GAMME ONE) 128GB	Bluetooth, TF Card	128GB	☐
ETERNAL GOLD (GAMME ONE) 128GB	Bluetooth, TF Card	128GB	☐
REBEL CHROME GOLD (GAMME ONE) 128GB	Bluetooth, TF Card	128GB	☐
PURE BLACK MAT (BLUETOOTH)	Bluetooth	N/A	☐
PURE GOLD MAT (BLUETOOTH)	Bluetooth	N/A	☐

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Bluetooth Headset
Type Designation	PURE+ GOLD MAT (MEMORY 64GB), PURE+ BLACK MAT (MEMORY 64GB), PURE+ WHITE (LIMITED EDITION) 128GB, ETERNAL BLACK (GAMME ONE) 128GB, ETERNAL GOLD (GAMME ONE) 128GB, REBEL CHROME GOLD (GAMME ONE) 128GB, PURE BLACK MAT (BLUETOOTH), PURE GOLD MAT (BLUETOOTH)
Trademark	VIWONE
FCC ID	2AWOJV12705

Operating Voltage	DC 5V via power adapter DC 3.7V via internal rechargeable lithium battery
Testing Voltage	Fully charged battery AC 120V@60Hz
Antenna Type	PIFA Antenna
Antenna Gain	2.66 dBi
Technical Specification of BDR/EDR	
Operating Frequency	2402 MHz to 2480 MHz
Type of Modulation	GFSK(BDR), $\pi/4$ -DQPSK(EDR), 8DPSK(EDR)
Channel Number	79 channels
Channel Separation	1MHz
Technical Specification of BLE	
Frequency Range	2402 MHz to 2480 MHz
Type of Modulation	GFSK(BT_LE)
Channel Number	40 channels
Data Rate	1 Mbps
Channel Separation	2 MHz

Table 3: RF Channel and Frequency of BDR/EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for General 2.4GHz

Table 4: RF Channel and Frequency of BLE

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz for BLE

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode (BDR & EDR mode)
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Bluetooth transmitting mode (BLE)
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- C. On, Transmitting on Hopping channel
- D. On, Bluetooth transmitting mode
- E. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- ID Label and Location Info
- Operation Description
- Model Difference Letter
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model PURE+ GOLD MAT(MEMORY 64GB) in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
Adapter	ZIMI	MDY-08-EH	N/A	Input: 100-240V, 50/60Hz, 0.5A Output: DC 5V@2.5A / 9V@2A / 12V@1.5A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

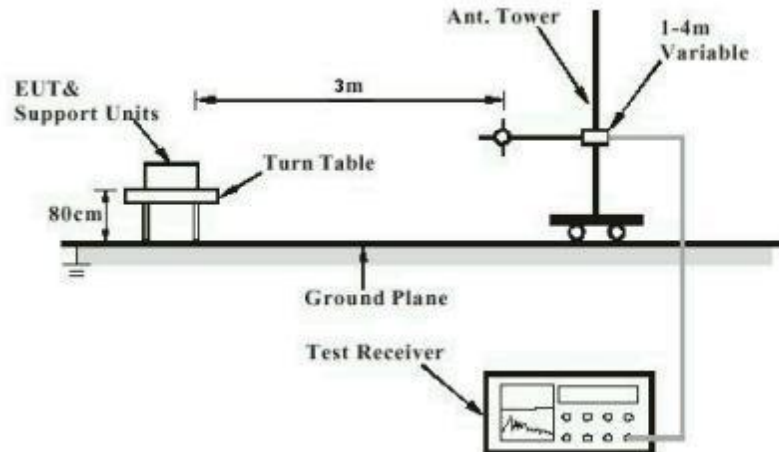


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

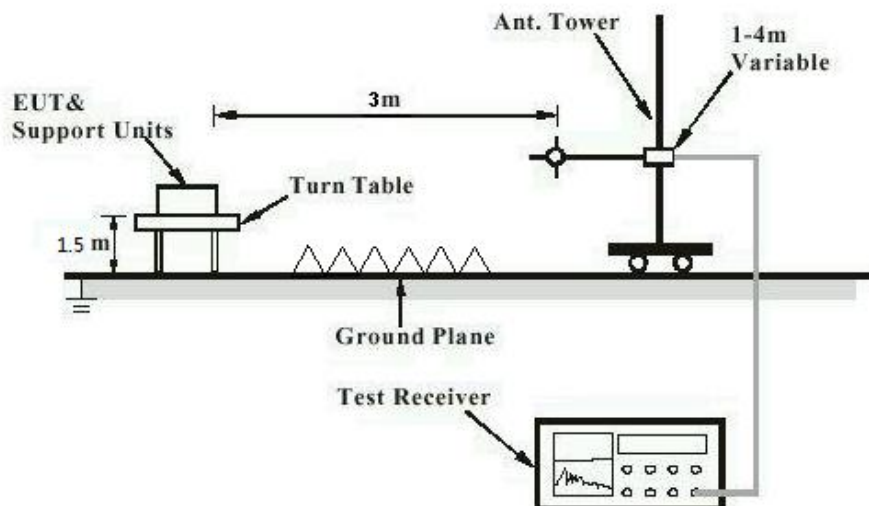


Diagram of Measurement Configuration for Mains Conduction Measurement


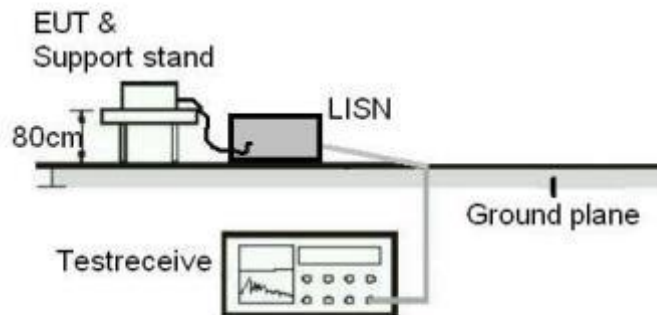


Diagram of Measurement Configuration for Conducted Transmitter Measurement

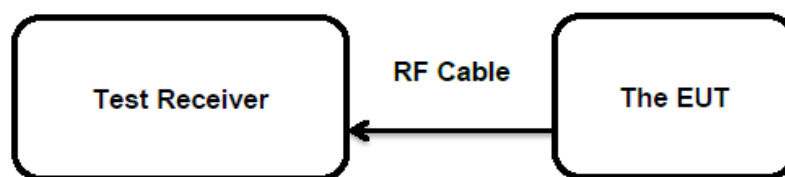

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 2.66 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(1)&(3)
 Basic standard : ANSI C63.10: 2013
 Limits : FHSS < 0.125 Watts, DSSS < 1.0 Watts
 Kind of test site : Shielded Room

Test Setup

Date of testing : 2020-07-20
 Input voltage : Fully charged battery
 Operation mode : A, B
 Test channel : Low / Middle / High
 Ambient temperature : 25 °C
 Relative humidity : 56 %
 Atmospheric pressure : 101 kPa

Table 6: Test Result of Maximum Peak Conducted Output Power, BDR & EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BDR)	2402.0	9.30	0.0085	< 0.125
	2441.0	9.70	0.0093	
	2480.0	9.10	0.0081	
Maximum Measured Value		9.70	0.0093	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	8.40	0.0069	< 0.125
	2441.0	8.90	0.0078	
	2480.0	7.70	0.0059	
Maximum Measured Value		8.90	0.0078	

Table 7: Test Result of Maximum Peak Conducted Output Power, BLE

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BLE)	2402	9.20	0.0083	< 1.0
	2440	9.70	0.0093	
	2480	9.10	0.0081	
Maximum Measured Value		9.70	0.0093	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G) of Bluetooth: 2.66 dBi,

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 17 von 27
Page 17 of 27

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(e)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-07-20
Input voltage	: Fully charged battery
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix C.

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 18 von 27
Page 18 of 27

5.1.4 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(a)(2)
Basic standard	: ANSI C63.10: 2013
Limits	: > 500 KHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-07-20
Input voltage	: Fully charged battery
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix C.

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 19 von 27
Page 19 of 27

5.1.5 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: Refer to test result
Input voltage	: Fully charged battery
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B & C.

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 20 von 27
Page 20 of 27

5.1.6 Radiated Spurious Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2020-07-21 ~ 2020-07-24
Input voltage	: Fully charged battery
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B & C.

Prüfbericht - Nr.: 60399900 001
Test Report No.Seite 21 von 27
Page 21 of 27

5.1.7 20dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1)
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-07-20
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 22 von 27
Page 22 of 27

5.1.8 Carrier Frequency Separation

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-07-20
Input voltage	: Fully charged battery
Operation mode	: C
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 23 von 27
Page 23 of 27

5.1.9 Number of Hopping Frequency

RESULT:

Pass

Test Specification

Test standard	: FCC part 15.247(a)(1)(iii)
Basic standard	: ANSI C63.10: 2013
Limits	: ≥ 15 non-overlapping channels
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-07-20
Input voltage	: Fully charged battery
Operation mode	: C
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 24 von 27
Page 24 of 27**5.1.10 Time of Occupancy****RESULT:****Pass****Test Specification**

Test standard	: FCC part 15.247(a)(1)(iii)
Basic standard	: ANSI C63.10: 2013
Limits	: < 0.4s
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-07-20
Input voltage	: Fully charged battery
Operation mode	: C
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **60399900 001**
Test Report No.Seite 25 von 27
Page 25 of 27**5.1.11 Conducted Emission on AC Mains****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-07-31
Input voltage	: AC 120V@60Hz
Operation mode	: D
Earthing	: Not connected
Ambient temperature	: 22 °C
Relative humidity	: 64 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

6 Safety Human Exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:

Pass

Test Specification

Test standard : FCC KDB Publication 447498 v06

Measurement Record:

The minimum distance for the EUT is less than 5mm.

Since maximum peak output power of the transmitter is 9.70 dBm $\approx$ 9.33 mW < 10 mW.

Hence the EUT is excluded from SAR evaluation according to FCC KDB Publication 447498 D01 General RF Exposure Guidance v06.

7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

8 List of Tables

Table 1: List of Test and Measurement Equipment	6
Table 2: Technical Specification of EUT	9
Table 3: RF Channel and Frequency of BDR/EDR.....	10
Table 4: RF Channel and Frequency of BLE.....	11
Table 5: Auxiliary Equipment Used during Test.....	12
Table 6: Test Result of Maximum Peak Conducted Output Power, BDR & EDR	16
Table 7: Test Result of Maximum Peak Conducted Output Power, BLE	16