



# TEST REPORT

**APPLICANT** : Xingtera Inc.

**PRODUCT NAME** : Xingtera IP Camera Series

**MODEL NAME** : XTEE50216, XTEE51216

**BRAND NAME** : Xingtera

**FCC ID** : 2AWQ9-XTEE50216

**STANDARD(S)** : 47 CFR Part 2  
47 CFR Part 96

**RECEIPT DATE** : 2022-09-15

**TEST DATE** : 2022-09-22 to 2022-09-28

**ISSUE DATE** : 2022-11-29

Edited by: Peng Mi  
Peng Mi (Rapporteur)

Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>1. Technical Information .....</b>                             | <b>3</b>  |
| <b>1.1. Applicant and Manufacturer Information .....</b>          | <b>3</b>  |
| <b>1.2. Equipment Under Test (EUT) Description .....</b>          | <b>3</b>  |
| <b>1.3. Maximum E.R.P./E.I.R.P. and Emission Designator .....</b> | <b>4</b>  |
| <b>1.4. Test Standards and Results .....</b>                      | <b>5</b>  |
| <b>1.5. Environmental Conditions .....</b>                        | <b>6</b>  |
| <b>2. 47 CFR Part 2, Part 96 Requirements .....</b>               | <b>7</b>  |
| <b>2.1. E.R.P./E.I.R.P. ....</b>                                  | <b>7</b>  |
| <b>2.2. Radiated Spurious Emissions .....</b>                     | <b>12</b> |
| <b>Annex A Test Uncertainty .....</b>                             | <b>18</b> |
| <b>Annex B Testing Laboratory Information .....</b>               | <b>19</b> |

| Change History |            |                   |
|----------------|------------|-------------------|
| Version        | Date       | Reason for change |
| 1.0            | 2022-11-29 | First edition     |
|                |            |                   |



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

|                              |                                                                                                    |
|------------------------------|----------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>            | Xingtera Inc.                                                                                      |
| <b>Applicant Address:</b>    | 4633 Old Ironsides Dr, Suite 460, Santa Clara, California, USA, 95054                              |
| <b>Manufacturer:</b>         | Xiamen Four-Faith Communication Technology Co., Ltd.                                               |
| <b>Manufacturer Address:</b> | 11th Floor, A-06 Area, No.370, Chengyi Street, Jimei District, Xiamen City, Fujian Province, China |

## 1.2. Equipment Under Test (EUT) Description

|                          |                           |                           |
|--------------------------|---------------------------|---------------------------|
| <b>Product Name:</b>     | Xingtera IP Camera Series |                           |
| <b>Sample No.:</b>       | 3#                        |                           |
| <b>Hardware Version:</b> | V1.0.1.0                  |                           |
| <b>Software Version:</b> | FFIPC_11.1.0.6-r29        |                           |
| <b>Modulation Type:</b>  | QPSK, 16QAM               |                           |
| <b>Operation Band:</b>   | Band 48                   |                           |
| <b>Frequency Range:</b>  | LTE Band 48               | Tx: 3550MHz–3700MHz       |
|                          |                           | Rx: 3550MHz–3700MHz       |
| <b>Channel Bandwidth</b> | LTE Band 48               | 5MHz, 10MHz, 15MHz, 20MHz |
| <b>Antenna Type:</b>     | Fixed External Antenna    |                           |
| <b>Antenna Gain:</b>     | LTE Band 48               | 3.49dBi                   |



**Note 1:** This test report is variant from the original report (Report No.: SZ22090060W02, FCC ID: 2A8OE-F-SC241), based on the similarity between before, changed the applicant information, product name, brand name, FCC ID and model name, and they certify that the product have two models as below: XTEE50216 and XTEE51216 are accordant in both hardware and basic software, these models only differ in software function, XTEE51216 software support AI process function. Manufacturer information, product name and brand name are the same. No other changes, and the changes do not affect the results in this report.

**Note 1:** The test results of all conducted test items please refer to the module FCC test report (FCC ID: ZMOFM160NA, Report No.: FYCR220400010001), which issued on May 20, 2022 and test report (FCC ID: ZMOFM160NA, Report No.: KSCR220500074001), which issued on May 13, 2022 by SGS-CSTC Standards Technical Services (Suzhou) Co.,Ltd. We only recorded the radiated test result in this report.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

| LTE Band 48 | Maximum E.R.P./E.I.R.P. (W) |       |
|-------------|-----------------------------|-------|
| BW(MHz)     | QPSK                        | 16QAM |
| 20          | 0.284                       | 0.311 |
| 15          | 0.349                       | 0.274 |
| 10          | 0.364                       | 0.300 |
| 5           | 0.394                       | 0.270 |



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to Part 2 and Part 96 for the EUT FCC ID Certification:

| No | Identity       | Document Title                                                                |
|----|----------------|-------------------------------------------------------------------------------|
| 1  | 47 CFR Part 2  | Frequency Allocations and Radio Treaty Matters; General Rules and Regulations |
| 2  | 47 CFR Part 96 | CITIZENS BROADBAND RADIO SERVICE                                              |

Test detailed items/section required by FCC rules and results are as below:

| Section          | Description                                     | Test Date     | Test Engineer | Result                | Method Determination /Remark |
|------------------|-------------------------------------------------|---------------|---------------|-----------------------|------------------------------|
| 2.1046, 96.41(b) | Transmitter Conducted Output Power and ERP/EIRP | Sep. 22, 2022 | Li Huaijie    | PASS <sub>Note2</sub> | No deviation                 |
| 2.1049           | Occupied Bandwidth                              | N/A           | N/A           | N/A <sub>Note1</sub>  | N/A                          |
| 96.41(g)         | Peak -Average Ratio                             | N/A           | N/A           | N/A <sub>Note1</sub>  | N/A                          |
| 2.1055           | Frequency Stability                             | N/A           | N/A           | N/A <sub>Note1</sub>  | N/A                          |
| 2.1051, 96.41(e) | Conducted Spurious Emissions                    | N/A           | N/A           | N/A <sub>Note1</sub>  | N/A                          |
| 2.1051, 96.41(e) | Band Edge                                       | N/A           | N/A           | N/A <sub>Note1</sub>  | N/A                          |
| 2.1051, 96.41(e) | Radiated Spurious Emissions                     | Sep. 28, 2022 | Gao Jianrou   | PASS <sub>Note2</sub> | No deviation                 |

**Note 1:** The test results of all conducted test items please refer to the module FCC test report (FCC ID: ZMOFM160NA, Report No.: FYCR220400010001), which issued on May 20, 2022 and test report (FCC ID: ZMOFM160NA, Report No.: KSCR220500074001), which issued on May 13, 2022 by SGS-CSTC Standards Technical Services (Suzhou) Co.,Ltd. We only recorded the radiated test result in this report.

**Note 2:** The test results of these test items in this report refer to the test report (Report No.: SZ22090060W02).

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method



determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |        |
|-----------------------------|--------|
| Temperature (°C):           | 15-35  |
| Relative Humidity (%):      | 30-60  |
| Atmospheric Pressure (kPa): | 86-106 |

## 2.47 CFR Part 2, Part 96 Requirements

### 2.1.E.R.P./E.I.R.P.


#### 2.1.1.Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

The maximum effective isotropic radiated power (EIRP) and maximum Power Spectral Density (PSD) of any CBSD and End User Device must comply with the limits shown in the table as below. paragraph

| Device                       | Maximum EIRP (dBm/10 megahertz) | Maximum PSD (dBm/MHz) |
|------------------------------|---------------------------------|-----------------------|
| End User Device              | 23                              | n/a                   |
| Category A CBSD              | 30                              | 20                    |
| Category B CBSD <sup>1</sup> | 47                              | 37                    |

#### 2.1.2.Test Description

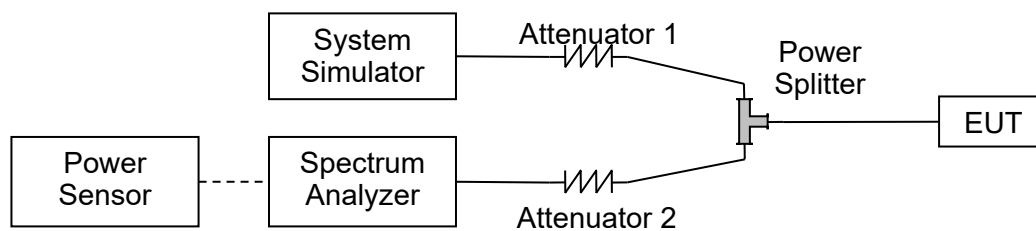

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.



### 2.1.3. Test procedure

KDB 971168 D01v03 Section 5.2 and ANSI/TIA-603-E-2016.

$EIRP \text{ (dBm)} = \text{Conducted Output Power (dBm)} + \text{Antenna Gain (dBi)}$

$ERP \text{ (dBm)} = EIPR \text{ (dBm)} - 2.15$

### 2.1.4. Result

#### Effective Radiated Power and Effective Isotropic Radiated Power:

| LTE Band 48     |            |         |           | Measured E.I.R.P. |       |                    |       |                  |       |
|-----------------|------------|---------|-----------|-------------------|-------|--------------------|-------|------------------|-------|
| BW [MHz]        | Modulation | RB Size | RB Offset | Low Ch. / Freq.   |       | Middle Ch. / Freq. |       | High Ch. / Freq. |       |
| Channel         |            |         |           | 55340             |       | 55990              |       | 56640            |       |
| Frequency (MHz) |            |         |           | 3560              |       | 3625               |       | 3690             |       |
|                 |            |         |           | dBm               | W     | dBm                | W     | dBm              | W     |
| 20              | QPSK       | 1       | 0         | 22.27             | 0.169 | 24.41              | 0.276 | 23.12            | 0.205 |
| 20              | QPSK       | 1       | 49        | 22.09             | 0.162 | 24.32              | 0.270 | 23.29            | 0.213 |
| 20              | QPSK       | 1       | 99        | 21.84             | 0.153 | 24.53              | 0.284 | 23.29            | 0.213 |
| 20              | QPSK       | 50      | 0         | 23.32             | 0.215 | 23.58              | 0.228 | 24.31            | 0.270 |
| 20              | QPSK       | 50      | 24        | 23.31             | 0.214 | 23.71              | 0.235 | 24.54            | 0.284 |
| 20              | QPSK       | 50      | 50        | 23.34             | 0.216 | 23.08              | 0.203 | 22.09            | 0.162 |
| 20              | QPSK       | 100     | 0         | 20.78             | 0.120 | 20.81              | 0.121 | 19.46            | 0.088 |
| 20              | 16QAM      | 1       | 0         | 23.62             | 0.230 | 23.81              | 0.240 | 23.95            | 0.248 |
| 20              | 16QAM      | 1       | 49        | 23.75             | 0.237 | 23.66              | 0.232 | 24.93            | 0.311 |
| 20              | 16QAM      | 1       | 99        | 20.77             | 0.119 | 21.85              | 0.153 | 24.73            | 0.297 |
| 20              | 16QAM      | 50      | 0         | 20.26             | 0.106 | 22.57              | 0.181 | 22.97            | 0.198 |
| 20              | 16QAM      | 50      | 24        | 22.57             | 0.181 | 20.33              | 0.108 | 23.43            | 0.220 |
| 20              | 16QAM      | 50      | 50        | 22.39             | 0.173 | 22.42              | 0.175 | 23.54            | 0.226 |
| 20              | 16QAM      | 100     | 0         | 19.76             | 0.095 | 17.24              | 0.053 | 20.69            | 0.117 |



| LTE Band 48     |            |         |           | Measured E.I.R.P. |       |                    |       |                  |       |
|-----------------|------------|---------|-----------|-------------------|-------|--------------------|-------|------------------|-------|
| BW [MHz]        | Modulation | RB Size | RB Offset | Low Ch. / Freq.   |       | Middle Ch. / Freq. |       | High Ch. / Freq. |       |
| Channel         |            |         |           | 55315             |       | 55990              |       | 56665            |       |
| Frequency (MHz) |            |         |           | 3557.5            |       | 3625               |       | 3692.5           |       |
|                 |            |         |           | dBm               | W     | dBm                | W     | dBm              | W     |
| 15              | QPSK       | 1       | 0         | 24.41             | 0.276 | 24.75              | 0.299 | 25.00            | 0.316 |
| 15              | QPSK       | 1       | 37        | 24.50             | 0.282 | 24.80              | 0.302 | 25.43            | 0.349 |
| 15              | QPSK       | 1       | 74        | 24.54             | 0.284 | 24.13              | 0.259 | 25.27            | 0.337 |
| 15              | QPSK       | 36      | 0         | 23.32             | 0.215 | 23.48              | 0.223 | 24.31            | 0.270 |
| 15              | QPSK       | 36      | 20        | 23.42             | 0.220 | 23.75              | 0.237 | 24.44            | 0.278 |
| 15              | QPSK       | 36      | 39        | 23.46             | 0.222 | 23.49              | 0.223 | 24.54            | 0.284 |
| 15              | QPSK       | 75      | 0         | 21.80             | 0.151 | 22.22              | 0.167 | 23.48            | 0.223 |
| 15              | 16QAM      | 1       | 0         | 23.40             | 0.219 | 23.21              | 0.209 | 24.06            | 0.255 |
| 15              | 16QAM      | 1       | 37        | 23.49             | 0.223 | 23.46              | 0.222 | 24.06            | 0.255 |
| 15              | 16QAM      | 1       | 74        | 23.40             | 0.219 | 23.61              | 0.230 | 24.38            | 0.274 |
| 15              | 16QAM      | 36      | 0         | 22.31             | 0.170 | 20.42              | 0.110 | 23.41            | 0.219 |
| 15              | 16QAM      | 36      | 20        | 22.35             | 0.172 | 22.83              | 0.192 | 21.28            | 0.134 |
| 15              | 16QAM      | 36      | 39        | 22.45             | 0.176 | 22.78              | 0.190 | 23.45            | 0.221 |
| 15              | 16QAM      | 75      | 0         | 21.21             | 0.132 | 21.56              | 0.143 | 22.30            | 0.170 |



| LTE Band 48     |            |         |           | Measured E.I.R.P. |       |                    |       |                  |       |
|-----------------|------------|---------|-----------|-------------------|-------|--------------------|-------|------------------|-------|
| BW [MHz]        | Modulation | RB Size | RB Offset | Low Ch. / Freq.   |       | Middle Ch. / Freq. |       | High Ch. / Freq. |       |
| Channel         |            |         |           | 55290             |       | 55990              |       | 56690            |       |
| Frequency (MHz) |            |         |           | 3555              |       | 3625               |       | 3695             |       |
|                 |            |         |           | dBm               | W     | dBm                | W     | dBm              | W     |
| 10              | QPSK       | 1       | 0         | 24.40             | 0.275 | 24.76              | 0.299 | 25.27            | 0.337 |
| 10              | QPSK       | 1       | 25        | 24.76             | 0.299 | 24.85              | 0.305 | 25.61            | 0.364 |
| 10              | QPSK       | 1       | 49        | 24.47             | 0.280 | 24.69              | 0.294 | 25.51            | 0.356 |
| 10              | QPSK       | 25      | 0         | 23.60             | 0.229 | 23.64              | 0.231 | 24.69            | 0.294 |
| 10              | QPSK       | 25      | 12        | 23.69             | 0.234 | 24.02              | 0.252 | 24.63            | 0.290 |
| 10              | QPSK       | 25      | 25        | 23.33             | 0.215 | 24.16              | 0.261 | 24.43            | 0.277 |
| 10              | QPSK       | 50      | 0         | 23.76             | 0.238 | 23.69              | 0.234 | 24.73            | 0.297 |
| 10              | 16QAM      | 1       | 0         | 23.73             | 0.236 | 23.64              | 0.231 | 24.25            | 0.266 |
| 10              | 16QAM      | 1       | 25        | 23.63             | 0.231 | 23.60              | 0.229 | 24.77            | 0.300 |
| 10              | 16QAM      | 1       | 49        | 23.42             | 0.220 | 24.04              | 0.254 | 24.42            | 0.277 |
| 10              | 16QAM      | 25      | 0         | 22.70             | 0.186 | 22.92              | 0.196 | 23.35            | 0.216 |
| 10              | 16QAM      | 25      | 12        | 22.66             | 0.185 | 23.06              | 0.202 | 23.68            | 0.233 |
| 10              | 16QAM      | 25      | 25        | 22.62             | 0.183 | 22.89              | 0.195 | 23.69            | 0.234 |
| 10              | 16QAM      | 50      | 0         | 22.34             | 0.171 | 22.80              | 0.191 | 23.85            | 0.243 |




| LTE Band 48     |            |         |           | Measured E.I.R.P. |       |                    |       |                  |       |
|-----------------|------------|---------|-----------|-------------------|-------|--------------------|-------|------------------|-------|
| BW [MHz]        | Modulation | RB Size | RB Offset | Low Ch. / Freq.   |       | Middle Ch. / Freq. |       | High Ch. / Freq. |       |
| Channel         |            |         |           | 55265             |       | 55990              |       | 56175            |       |
| Frequency (MHz) |            |         |           | 3552.5            |       | 3625               |       | 3697.5           |       |
|                 |            |         |           | dBm               | W     | dBm                | W     | dBm              | W     |
| 5               | QPSK       | 1       | 0         | 24.26             | 0.267 | 24.76              | 0.299 | 25.96            | 0.394 |
| 5               | QPSK       | 1       | 12        | 24.49             | 0.281 | 24.55              | 0.285 | 25.23            | 0.333 |
| 5               | QPSK       | 1       | 24        | 24.42             | 0.277 | 24.90              | 0.309 | 25.09            | 0.323 |
| 5               | QPSK       | 12      | 0         | 23.80             | 0.240 | 23.14              | 0.206 | 24.27            | 0.267 |
| 5               | QPSK       | 12      | 7         | 23.37             | 0.217 | 23.29              | 0.213 | 24.84            | 0.305 |
| 5               | QPSK       | 12      | 13        | 23.72             | 0.236 | 24.56              | 0.286 | 23.93            | 0.247 |
| 5               | QPSK       | 25      | 0         | 23.47             | 0.222 | 23.19              | 0.208 | 25.03            | 0.318 |
| 5               | 16QAM      | 1       | 0         | 23.50             | 0.224 | 23.89              | 0.245 | 24.07            | 0.255 |
| 5               | 16QAM      | 1       | 12        | 23.32             | 0.215 | 23.90              | 0.245 | 24.31            | 0.270 |
| 5               | 16QAM      | 1       | 24        | 23.38             | 0.218 | 22.93              | 0.196 | 23.34            | 0.216 |
| 5               | 16QAM      | 12      | 0         | 22.31             | 0.170 | 22.20              | 0.166 | 23.38            | 0.218 |
| 5               | 16QAM      | 12      | 7         | 22.47             | 0.177 | 22.96              | 0.198 | 23.23            | 0.210 |
| 5               | 16QAM      | 12      | 13        | 22.55             | 0.180 | 22.90              | 0.195 | 23.51            | 0.224 |
| 5               | 16QAM      | 25      | 0         | 22.52             | 0.179 | 21.96              | 0.157 | 23.34            | 0.216 |

## 2.2. Radiated Spurious Emissions


### 2.2.1. Requirement

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed  $-40\text{dBm/MHz}$ .

### 2.2.2. Test Description

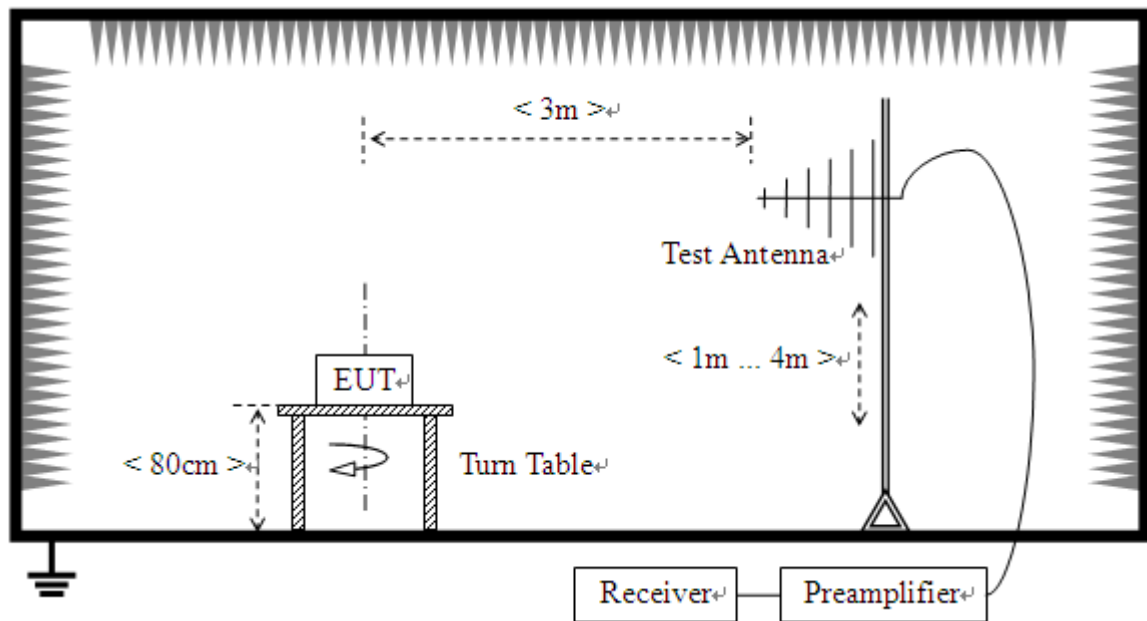

(For the test frequency from 30MHz to 1GHz)

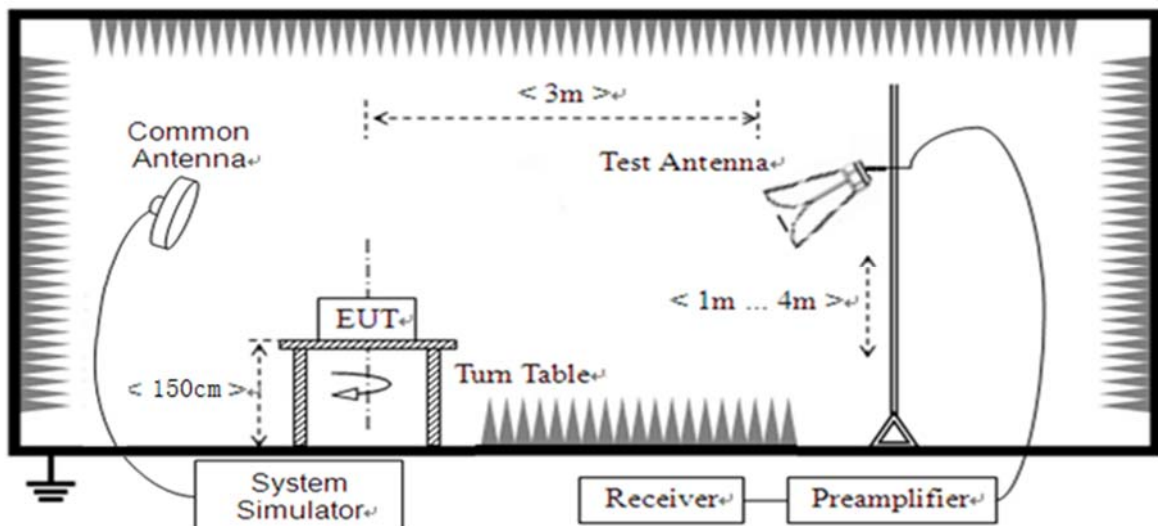

(For the test frequency above 1GHz)



The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

**Note:** when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

### 2.2.3.Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.



## 2.2.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST\_TX}} - P_{\text{SUBST\_RX}} - L_{\text{SUBST\_CABLES}} + G_{\text{SUBST\_TX\_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where  $A_{\text{SUBST}}$  is the final substitution correction including receive antenna gain.

$P_{\text{SUBST\_TX}}$  is signal generator level,

$P_{\text{SUBST\_RX}}$  is receiver level,

$L_{\text{SUBST\_CABLES}}$  is cable losses including TX cable,

$G_{\text{SUBST\_TX\_ANT}}$  is substitution antenna gain.

$A_{\text{TOT}}$  is total correction factor including cable loss and substitution correction

During the test, the data of  $A_{\text{TOT}}$  was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of  $A_{\text{TOT}}$ .


**Note1:** The power of the EUT transmitting frequency should be ignored.

**Note2:** All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note3:** All bandwidth and modulation were considered and evaluated respectively by performing full test for each band, only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.

**Note4:** N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.

## LTE Band 48, 20MHz BW, Low Channel, QPSK

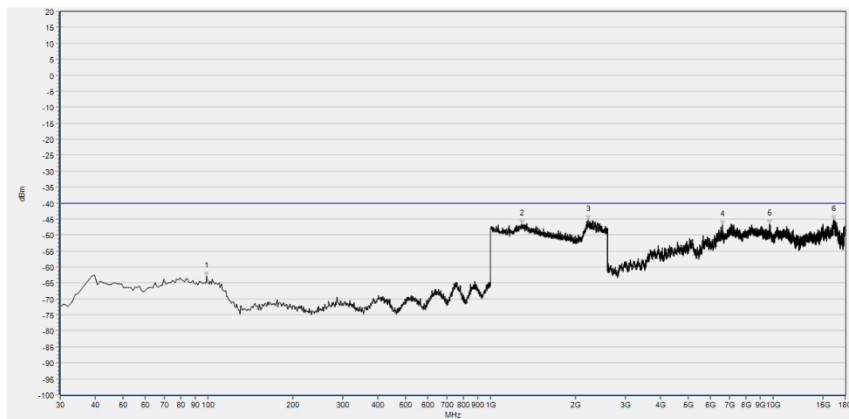


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna    | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1   | 98.939    | -62.89   | -40.00      | Horizontal | PASS    |
| 2   | 1293.093  | -46.69   | -40.00      | Horizontal | PASS    |
| 3   | 2212.412  | -45.28   | -40.00      | Horizontal | PASS    |
| 4   | 6632.527  | -46.91   | -40.00      | Horizontal | PASS    |
| 5   | 9725.465  | -46.69   | -40.00      | Horizontal | PASS    |
| 6   | 16382.677 | -45.29   | -40.00      | Horizontal | PASS    |

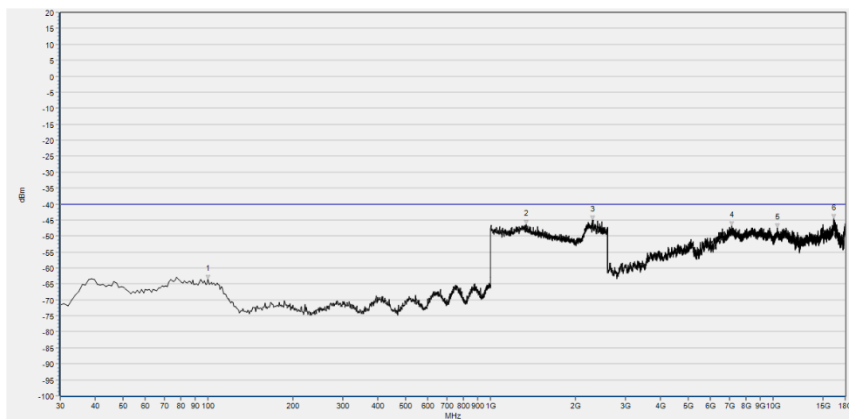


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna  | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1   | 99.910    | -63.65   | -40.00      | Vertical | PASS    |
| 2   | 1339.540  | -46.43   | -40.00      | Vertical | PASS    |
| 3   | 2300.501  | -44.93   | -40.00      | Vertical | PASS    |
| 4   | 7156.231  | -46.86   | -40.00      | Vertical | PASS    |
| 5   | 10335.427 | -47.50   | -40.00      | Vertical | PASS    |
| 6   | 16425.805 | -44.58   | -40.00      | Vertical | PASS    |

## LTE Band 48, 20MHz BW, Mid Channel, QPSK

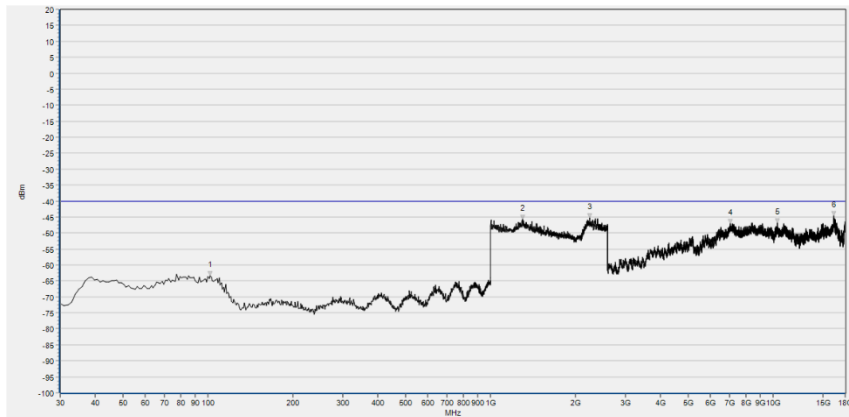


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna    | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1   | 101.852   | -63.38   | -40.00      | Horizontal | PASS    |
| 2   | 1301.101  | -45.67   | -40.00      | Horizontal | PASS    |
| 3   | 2241.241  | -45.20   | -40.00      | Horizontal | PASS    |
| 4   | 7069.974  | -47.06   | -40.00      | Horizontal | PASS    |
| 5   | 10335.427 | -46.76   | -40.00      | Horizontal | PASS    |
| 6   | 16422.725 | -44.50   | -40.00      | Horizontal | PASS    |

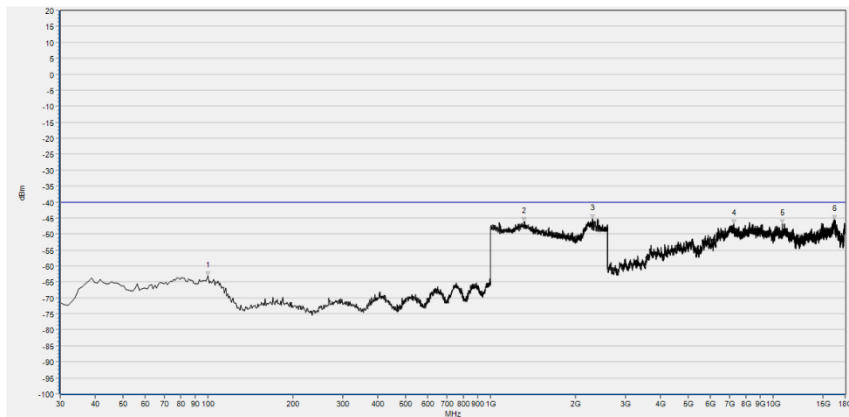


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna  | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1   | 99.910    | -63.21   | -40.00      | Vertical | PASS    |
| 2   | 1312.312  | -46.24   | -40.00      | Vertical | PASS    |
| 3   | 2303.704  | -45.36   | -40.00      | Vertical | PASS    |
| 4   | 7273.295  | -46.71   | -40.00      | Vertical | PASS    |
| 5   | 10816.003 | -46.87   | -40.00      | Vertical | PASS    |
| 6   | 16456.611 | -45.44   | -40.00      | Vertical | PASS    |

## LTE Band 48, 20MHz BW, High Channel, QPSK

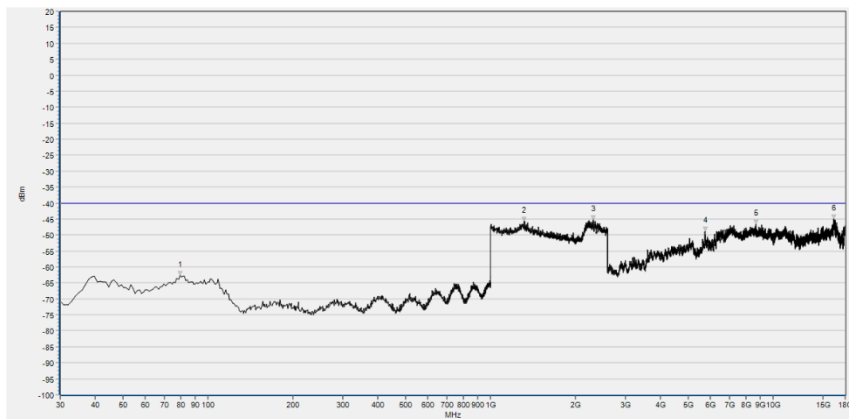

| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna    | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1   | 79.520    | -62.77   | -40.00      | Horizontal | PASS    |
| 2   | 1313.914  | -45.78   | -40.00      | Horizontal | PASS    |
| 3   | 2306.907  | -45.19   | -40.00      | Horizontal | PASS    |
| 4   | 5742.228  | -48.93   | -40.00      | Horizontal | PASS    |
| 5   | 8684.217  | -46.66   | -40.00      | Horizontal | PASS    |
| 6   | 16407.321 | -45.02   | -40.00      | Horizontal | PASS    |

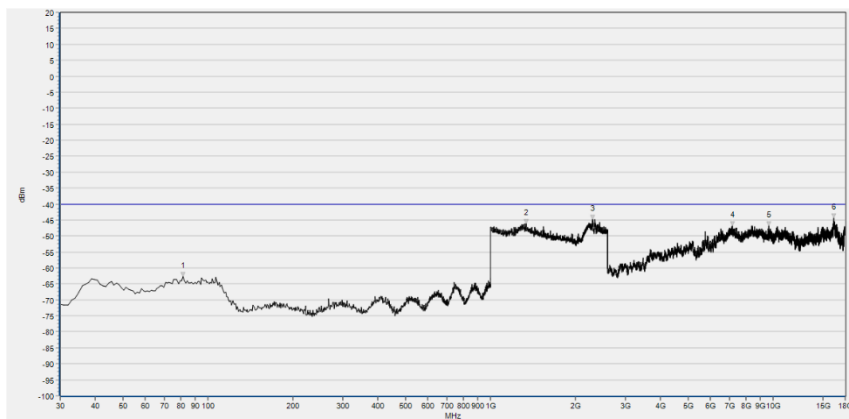

| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna  | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1   | 81.461    | -62.61   | -40.00      | Vertical | PASS    |
| 2   | 1336.336  | -46.22   | -40.00      | Vertical | PASS    |
| 3   | 2303.704  | -44.74   | -40.00      | Vertical | PASS    |
| 4   | 7165.473  | -46.85   | -40.00      | Vertical | PASS    |
| 5   | 9651.530  | -46.75   | -40.00      | Vertical | PASS    |
| 6   | 16422.725 | -44.39   | -40.00      | Vertical | PASS    |



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

| Test Items                          | Uncertainty   |
|-------------------------------------|---------------|
| Output Power                        | $\pm 2.22$ dB |
| Bandwidth                           | $\pm 5\%$     |
| Conducted Spurious Emission         | $\pm 2.77$ dB |
| Band Edge                           | $\pm 2.77$ dB |
| Equivalent Isotropic Radiated Power | $\pm 2.22$ dB |
| Radiated Spurious Emissions         | $\pm 6$ dB    |

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

|                            |                                                                                                                                  |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Laboratory Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| <b>Laboratory Address:</b> | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| <b>Telephone:</b>          | +86 755 36698555                                                                                                                 |
| <b>Facsimile:</b>          | +86 755 36698525                                                                                                                 |

### 2. Identification of the Responsible Testing Location

|                 |                                                                                                                                  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| <b>Address:</b> | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 List of Software Used

| Description            | Manufacturer | Software Version |
|------------------------|--------------|------------------|
| Morlab FCC Test System | MORLAB       | V2.8             |
| MORLAB EMCR V1.2       | MORLAB       | V1.0             |

##### 4.2 Radiated Test Equipments

| Equipment Name                       | Serial No.  | Type         | Manufacturer | Cal. Date  | Due Date   |
|--------------------------------------|-------------|--------------|--------------|------------|------------|
| System Simulator                     | 152038      | CMW500       | R&S          | 2021.10.21 | 2022.10.20 |
| System Simulator                     | 6200995016  | MT8820C      | Anritsu      | 2021.10.21 | 2022.10.20 |
| Receiver                             | MY54130016  | N9038A       | Agilent      | 2022.07.07 | 2023.07.06 |
| Test Antenna - Bi-Log                | 9163-519    | VULB 9163    | Schwarzbeck  | 2022.02.25 | 2025.02.24 |
| Test Antenna - Horn                  | 9170C-531   | BBHA9170     | Schwarzbeck  | 2022.05.23 | 2025.05.24 |
| Test Antenna - Horn                  | 01774       | BBHA 9120D   | Schwarzbeck  | 2022.07.13 | 2025.07.12 |
| Coaxial cable (N male) (9KHz-30MHz)  | CB04        | EMC04        | Morlab       | N/A        | N/A        |
| Coaxial cable (N male) (30MHz-26GHz) | CB02        | EMC02        | Morlab       | N/A        | N/A        |
| Coaxial cable (N male) (30MHz-26GHz) | CB03        | EMC03        | Morlab       | N/A        | N/A        |
| Coaxial cable (N male) (30MHz-40GHz) | CB05        | EMC05        | Morlab       | N/A        | N/A        |
| 1-18GHz pre-Amplifier                | 61171/61172 | S020180L3203 | Tonscend     | 2022.07.08 | 2023.07.07 |
| 18-26.5GHz pre-Amplifier             | 46732       | S10M100L3802 | Tonscend     | 2022.07.08 | 2023.07.07 |
| 26-40GHz pre-Amplifier               | 56774       | S40M400L4002 | Tonscend     | 2022.07.08 | 2023.07.07 |



REPORT No. : SZ22100134W02

|                     |     |                   |            |            |            |
|---------------------|-----|-------------------|------------|------------|------------|
| Notch Filter        | N/A | WRCGV<br>-LTE B48 | Wainwright | 2022.07.08 | 2023.07.07 |
| Anechoic<br>Chamber | N/A | 9m*6m*6m          | CRT        | 2019.07.13 | 2022.07.12 |

\_\_\_\_\_ END OF REPORT \_\_\_\_\_