



BUREAU
VERITAS

Test Report No.: RF200610N013



Certificate # 2951.01

TEST REPORT

Applicant	ForThink Technology co., ltd.
Address	898# Baicao Road, West High-Tech Zone, Chengdu, Sichuan, China

Manufacturer or Supplier	ForThink Technology co., ltd.
Address	898# Baicao Road, West High-Tech Zone, Chengdu, Sichuan, China
Product	Social Distance Watch
Brand Name	EHIGH
Model	EH100606A04-X
Additional Model & Model Difference	EH100602A03-X, EH100602A03-H, EH100602A04-H, see item 3.1
Date of tests	Jun. 10, 2020 ~ Jul. 27, 2020

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart F, Section 15.519

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department

Date: Aug. 05, 2020

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES.....	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4 DESCRIPTION OF SUPPORT UNITS.....	9
4 TEST TYPES AND RESULTS	10
4.1 RADIATED EMISSION.....	10
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	10
4.1.2 TEST INSTRUMENTS	11
4.1.3 TEST PROCEDURES.....	12
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	13
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS.....	15
4.2 UWB BANDWIDTH.....	25
4.2.1 LIMITS OF UWB BANDWIDTH.....	25
4.2.2 TEST INSTRUMENTS	25
4.2.3 TEST PROCEDURES.....	25
4.2.4 DEVIATION FROM TEST STANDARD	25
4.2.5 TEST SETUP	25
4.2.6 EUT OPERATING CONDITIONS	26
4.2.7 TEST RESULTS.....	26
4.3 PEAK LEVEL OF THE EMISSION	27
4.3.1 LIMITS OF PEAK LEVEL OF THE EMISSION	27
4.3.2 TEST INSTRUMENTS	27
4.3.3 TEST PROCEDURES.....	28
4.3.4 DEVIATION FROM TEST STANDARD	28
4.3.5 TEST SETUP	29
4.3.6 EUT OPERATING CONDITIONS	29
4.3.7 TEST RESULTS.....	30



4.4	SHUTOFF TIMING REQUIREMENTS	32
4.4.1	LIMITS OF SHUTOFF TIMING REQUIREMENTS	32
4.4.2	TEST INSTRUMENTS	32
4.4.3	TEST PROCEDURES	32
4.4.4	DEVIATION FROM TEST STANDARD	32
4.4.5	TEST SETUP	32
4.4.6	EUT OPERATING CONDITIONS	33
4.4.7	TEST RESULTS	33
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	34
5	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	35



Test Report No.: RF200610N013

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF200610N013	Original release	Aug. 05, 2020



BUREAU
VERITAS

Test Report No.: RF200610N013

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart F(Section 15.519)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by Battery
15.519(a)(1)	Shutoff Timing Requirements	PASS	Meet the requirement of limit.
15.503(d) 15.519(b)	UWB bandwidth	PASS	Meet the requirement of limit.
15.519(c)/ 15.209 15.519(d)	Radiated Emissions	PASS	Meet the requirement of limit.
15.519(e)	Peak Level of the Emission	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GHz	3.60dB
	1GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	5.00dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



BUREAU
VERITAS

Test Report No.: RF200610N013

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Social Distance Watch
BRAND NAME	EHIGH
MODEL NO.	EH100606A04-X
ADDITIONAL NO.	EH100602A03-X, EH100602A03-H, EH100602A04-H
FCC ID	2AWQO-EH100606A04-X
NOMINAL VOLTAGE	DC 3.7V from Li-ion Battery or DC 5V from Charging base
UWB CATEGORY	Hand Held Device
MODULATION TYPE	BPM-BPSK
FREQUENCY	3993.6MHz for UWB
EIRP POWER (MAX.)	-27.34dBm/3MHz
ANTENNA TYPE	Chip Antenna, with 2dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	Refer to user's manual

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. When the EUT charging that wireless function can't working, the charging mode was tested in the FCC Part 15B (sDoC) report.
4. Additional models (see above table) are identical with the test model EH100606A04-X except the appearance and model no. for trading purpose.
5. The product contains circuits Wi-Fi and RFID, but the Wi-Fi circuit and RFID circuit are not used in normal operation. The Wi-Fi and RFID are permanently turned off by software.



BUREAU
VERITAS

Test Report No.: RF200610N013

3.2 DESCRIPTION OF TEST MODES

CHANNEL	FREQUENCY
1	3993.6MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO						DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	BW	PL	STR	
-	✓	✓	-	✓	✓	✓	DC 3.7V from Fully Battery

Where **RE \geq 1G**: Radiated Emission above 1GHz

RE $<$ 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

BW: 10dB Bandwidth measurement

PL: Peak Level of the Emission

STR: Shutoff Timing Requirements

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	1	1	BPM-BPSK

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	1	1	BPM-BPSK



BUREAU
VERITAS

Test Report No.: RF200610N013

UWB BANDWIDTH MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	1	1	BPM-BPSK

PEAK LEVEL OF THE EMISSION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	1	1	BPM-BPSK

SHUTOFF TIMING REQUIREMENTS:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	1	1	BPM-BPSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 53%RH	DC 3.7V from Fully Battery	Allen
RE≥1G	23deg. C, 53%RH	DC 3.7V from Fully Battery	Allen
PLC	N/A	N/A	N/A
BW	20deg. C, 55%RH	DC 3.7V from Fully Battery	Daniel
PL	23deg. C, 53%RH	DC 3.7V from Fully Battery	Daniel
STR	23deg. C, 53%RH	DC 3.7V from Fully Battery	Daniel



BUREAU
VERITAS

Test Report No.: RF200610N013

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart F, Section 15.519

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A



BUREAU
VERITAS

Test Report No.: RF200610N013

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

(a) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{UV}/m) = 20 log Emission level (uV/m).

(b) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

(c) In addition to the radiated emission limits specified in the table in paragraph (a)(b) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3



BUREAU
VERITAS

Test Report No.: RF200610N013

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 18,20	Mar. 17,21
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 22,20	May 21,21
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 28,20	May 27,21
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 15,20	Mar. 14,21
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Jun. 23,20	Jun. 22,21
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jun. 23,20	Jun. 22,21
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Jun. 23,20	Jun. 22,21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 21,20	Apr. 20,21
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 21,20	Apr. 20,21
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Mar. 04,20	Mar. 03,21
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	N/A	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



4.1.3 TEST PROCEDURES

1. The EUT was placed on the top of a rotating table 0.8 meters (below 960MHz) and 1.5 meters (above 960MHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
7. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTES:


1. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Quasi-peak detection at frequency below 960MHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Average detection at frequency above 960MHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1KHz and the video bandwidth is 3KHz for Average detection at frequency range from 1164-1240MHz & 1559-1610MHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Below 30MHz test setup

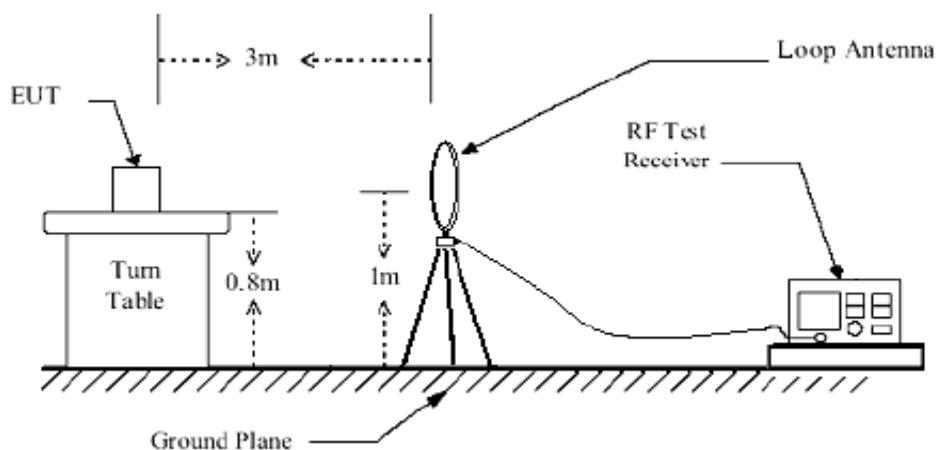


Below 960MHz test setup

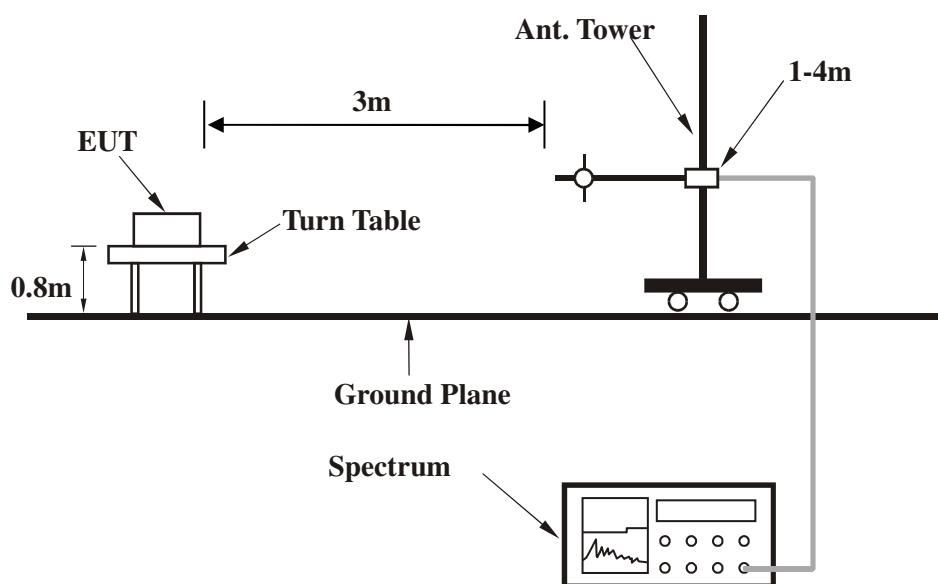

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 960MHz test setup

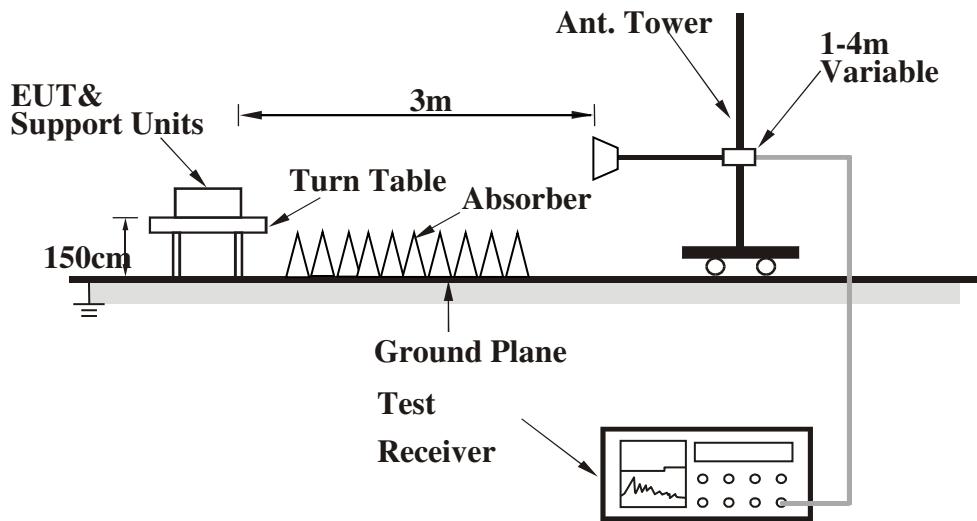

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



BUREAU
VERITAS

Test Report No.: RF200610N013

4.1.7 TEST RESULTS


Radiated Emissions Test Data Below 960 MHz:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 960MHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	18.08 QP	40.00	-21.92	1.00 H	235	30.22	-12.14
2	120.16	13.32 QP	43.50	-30.18	1.00 H	98	33.13	-19.81
3	298.93	15.06 QP	46.00	-30.94	1.00 H	114	29.37	-14.31
4	427.95	19.96 QP	46.00	-26.04	1.00 H	216	30.94	-10.98
5	542.98	21.64 QP	46.00	-24.36	1.00 H	59	29.66	-8.02
6	656.46	24.05 QP	46.00	-21.95	1.00 H	301	29.88	-5.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

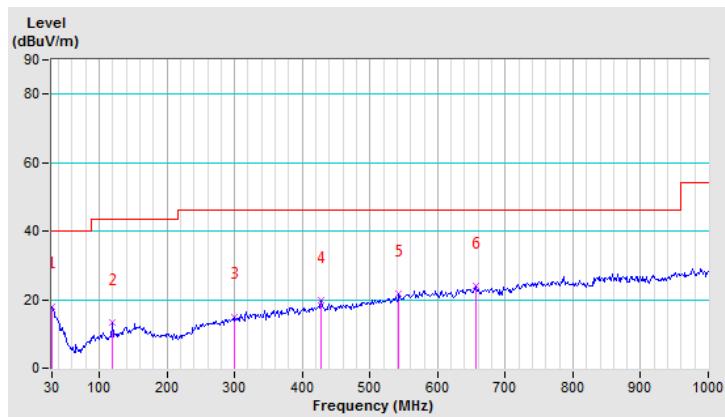



BUREAU
VERITAS


Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 960MHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.55	17.30 QP	40.00	-22.70	1.00 V	152	30.02	-12.72
2	103.06	13.16 QP	43.50	-30.34	1.00 V	325	33.40	-20.24
3	230.53	12.36 QP	46.00	-33.64	1.00 V	251	30.98	-18.62
4	379.76	17.91 QP	46.00	-28.09	1.00 V	85	29.86	-11.95
5	493.24	19.61 QP	46.00	-26.39	1.00 V	112	29.24	-9.63
6	606.71	21.86 QP	46.00	-24.14	1.00 V	164	28.61	-6.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

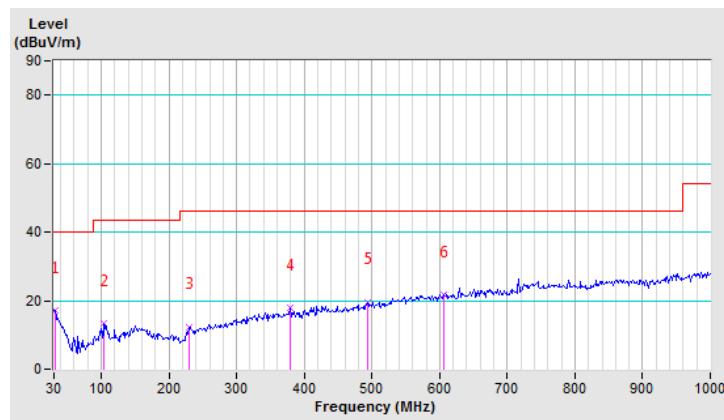



BUREAU
VERITAS

Test Report No.: RF200610N013


Radiated Emissions above 960 MHz:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	960MHz ~ 8GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	1178.46	-67.66 PK	-55.30	-12.36	1.00 H	235
2	1178.46	-80.48 AV	-75.30	-5.18	1.00 H	235
3	1610.00	-59.14 PK	-55.30	-3.84	1.00 H	12
4	1610.00	-84.11 AV	-75.30	-8.81	1.00 H	12
5	1932.49	-70.88 PK	-43.30	-27.58	1.00 H	36
6	1932.49	-82.74 AV	-63.30	-19.44	1.00 H	36
7	2630.15	-64.21 PK	-41.30	-22.91	1.00 H	265
8	2630.15	-79.98 AV	-61.30	-18.68	1.00 H	265
9	3144.58	-66.29 PK	-21.30	-44.99	1.00 H	241
10	3144.58	-80.03 AV	-41.30	-38.73	1.00 H	241
11	5420.78	-70.51 PK	-21.30	-49.21	1.00 H	31
12	5420.78	-82.14 AV	-41.30	-40.84	1.00 H	31
13	5618.10	-71.33 PK	-21.30	-50.03	1.00 H	75
14	5618.10	-82.21 AV	-41.30	-40.91	1.00 H	75
15	6491.93	-59.22 PK	-21.30	-37.92	1.00 H	65
16	6491.93	-83.33 AV	-41.30	-42.03	1.00 H	65
17	7062.74	-72.03 PK	-21.30	-50.73	1.00 H	28
18	7062.74	-84.05 AV	-41.30	-42.75	1.00 H	28
19	7309.39	-67.64 PK	-21.30	-46.34	1.00 H	139
20	7309.39	-83.64 AV	-41.30	-42.34	1.00 H	139
21	7901.34	-71.61 PK	-21.30	-50.31	1.00 H	46
22	7901.34	-83.67 AV	-41.30	-42.37	1.00 H	46

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.

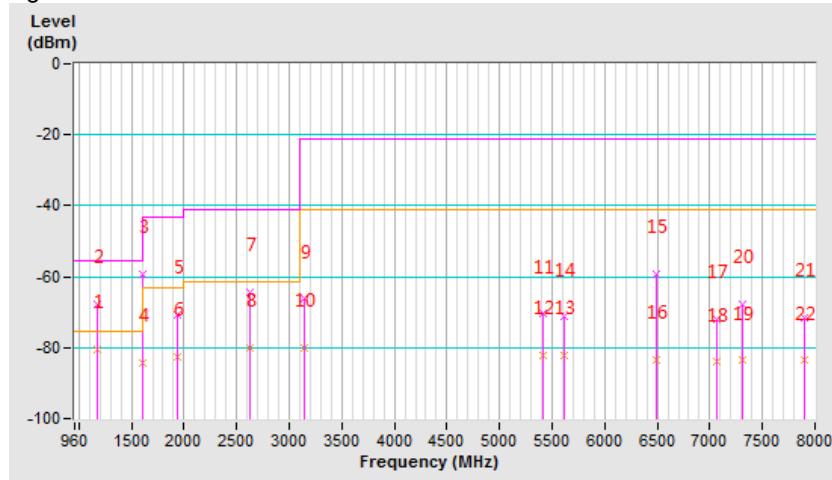



BUREAU
VERITAS


Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	960MHz ~ 8GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	1199.60	-66.45 PK	-55.30	-11.15	1.00 V	25
2	1199.60	-82.76 AV	-75.30	-7.46	1.00 V	25
3	1805.65	-72.46 PK	-43.30	-29.16	1.00 V	19
4	1805.65	-83.19 AV	-63.30	-19.89	1.00 V	19
5	2129.81	-71.15 PK	-41.30	-29.85	1.00 V	325
6	2129.81	-83.08 AV	-61.30	-21.78	1.00 V	325
7	2616.06	-67.68 PK	-41.30	-26.38	1.00 V	247
8	2616.06	-81.12 AV	-61.30	-19.82	1.00 V	247
9	3186.87	-65.55 PK	-21.30	-44.25	1.00 V	65
10	3186.87	-79.83 AV	-41.30	-38.53	1.00 V	65
11	3503.98	-68.29 PK	-21.30	-46.99	1.00 V	24
12	3503.98	-82.25 AV	-41.30	-40.95	1.00 V	24
13	5634.21	-70.51 PK	-21.30	-49.21	1.00 V	11
14	5634.21	-54.36 AV	-41.30	-13.06	1.00 V	11
15	6069.11	-71.03 PK	-21.30	-49.73	1.00 V	125
16	6069.11	-83.28 AV	-41.30	-41.98	1.00 V	125
17	6534.21	-69.28 PK	-21.30	-47.98	1.00 V	114
18	6534.21	-83.99 AV	-41.30	-42.69	1.00 V	114
19	6992.27	-71.31 PK	-21.30	-50.01	1.00 V	299
20	6992.27	-83.46 AV	-41.30	-42.16	1.00 V	299
21	7880.20	-68.52 PK	-21.30	-47.22	1.00 V	298
22	7880.20	-84.72 AV	-41.30	-43.42	1.00 V	298

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.

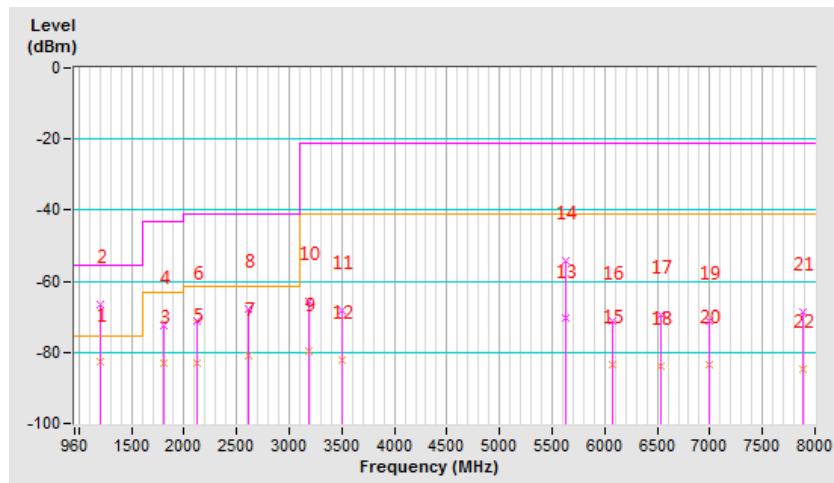



BUREAU
VERITAS


Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	8GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	8480.48	-53.96 PK	-21.30	-32.66	1.00 H	24
2	8480.48	-65.94 AV	-41.30	-24.64	1.00 H	24
3	8896.90	-53.28 PK	-21.30	-31.98	1.00 H	221
4	8896.90	-65.98 AV	-41.30	-24.68	1.00 H	221
5	9857.86	-51.22 PK	-21.30	-29.92	1.00 H	124
6	9857.86	-65.40 AV	-41.30	-24.10	1.00 H	124
7	10434.43	-53.68 PK	-21.30	-32.38	1.00 H	264
8	10434.43	-66.59 AV	-41.30	-25.29	1.00 H	264
9	11267.27	-53.61 PK	-41.30	-12.31	1.00 H	298
10	11267.27	-67.19 AV	-61.30	-5.89	1.00 H	298
11	11875.88	-51.94 PK	-41.30	-10.64	1.00 H	164
12	11875.88	-67.45 AV	-61.30	-6.15	1.00 H	164
13	13061.06	-53.75 PK	-41.30	-12.45	1.00 H	29
14	13061.06	-66.69 AV	-61.30	-5.39	1.00 H	29
15	14342.34	-52.28 PK	-41.30	-10.98	1.00 H	33
16	14342.34	-65.94 AV	-61.30	-4.64	1.00 H	33
17	15303.30	-48.52 PK	-41.30	-7.22	1.00 H	163
18	15303.30	-64.85 AV	-61.30	-3.55	1.00 H	163
19	16168.17	-51.35 PK	-41.30	-10.05	1.00 H	293
20	16168.17	-65.70 AV	-61.30	-4.40	1.00 H	293
21	17225.23	-52.23 PK	-41.30	-10.93	1.00 H	177
22	17225.23	-66.90 AV	-61.30	-5.60	1.00 H	177

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.
3. Above 18GHz have been test and test data more than 20dB margin.

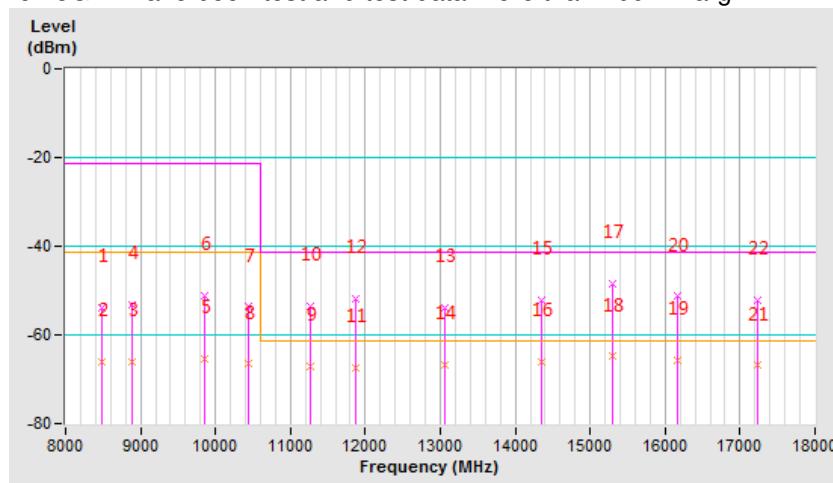



BUREAU
VERITAS


Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	8GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	8480.48	-48.66 PK	-21.30	-27.36	1.00 V	15
2	8480.48	-65.86 AV	-41.30	-24.56	1.00 V	15
3	10178.18	-51.15 PK	-21.30	-29.85	1.00 V	278
4	10178.18	-65.64 AV	-41.30	-24.34	1.00 V	278
5	10914.91	-56.68 PK	-41.30	-15.38	1.00 V	362
6	10914.91	-66.52 AV	-61.30	-5.22	1.00 V	362
7	11971.97	-53.64 PK	-41.30	-12.34	1.00 V	159
8	11971.97	-66.13 AV	-61.30	-4.83	1.00 V	159
9	13189.19	-54.36 PK	-41.30	-13.06	1.00 V	264
10	13189.19	-67.97 AV	-61.30	-6.67	1.00 V	264
11	14022.02	-55.85 PK	-41.30	-14.55	1.00 V	251
12	14022.02	-66.82 AV	-61.30	-5.52	1.00 V	251
13	14662.66	-53.09 PK	-41.30	-11.79	1.00 V	297
14	14662.66	-66.34 AV	-61.30	-5.04	1.00 V	297
15	15143.14	-49.28 PK	-41.30	-7.98	1.00 V	34
16	15143.14	-65.71 AV	-61.30	-4.41	1.00 V	34
17	16488.49	-52.34 PK	-41.30	-11.04	1.00 V	329
18	16488.49	-65.89 AV	-61.30	-4.59	1.00 V	329
19	17033.03	-54.58 PK	-41.30	-13.28	1.00 V	158
20	17033.03	-67.07 AV	-61.30	-5.77	1.00 V	158
21	17833.83	-55.68 PK	-41.30	-14.38	1.00 V	28
22	17833.83	-67.01 AV	-61.30	-5.71	1.00 V	28

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.
3. Above 18GHz have been test and test data more than 20dB margin.

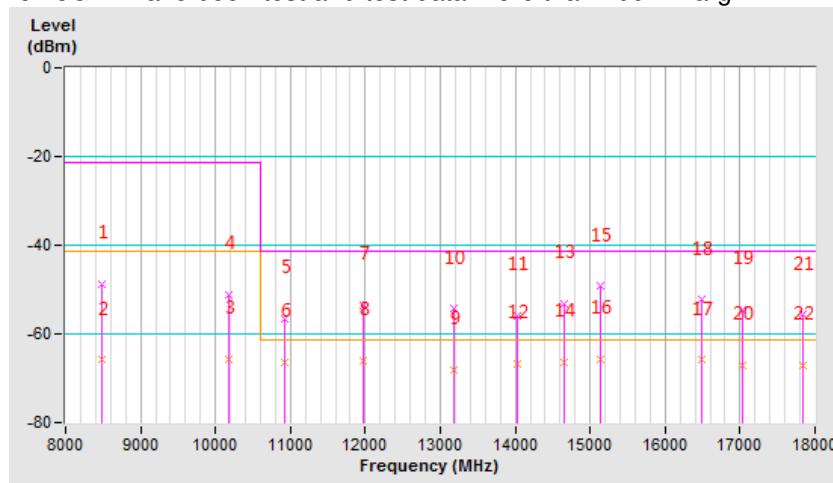



BUREAU
VERITAS

Test Report No.: RF200610N013


Radiated Emissions Test Data in The GPS Bands:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	1164 – 1240 MHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	1166.59	-93.02 AV	-85.30	-7.72	1.00 H	85
2	1175.03	-93.48 AV	-85.30	-8.18	1.00 H	15
3	1182.94	-93.01 AV	-85.30	-7.71	1.00 H	462
4	1194.96	-93.90 AV	-85.30	-8.60	1.00 H	77
5	1210.63	-93.19 AV	-85.30	-7.89	1.00 H	15
6	1227.98	-94.39 AV	-85.30	-9.09	1.00 H	36

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.

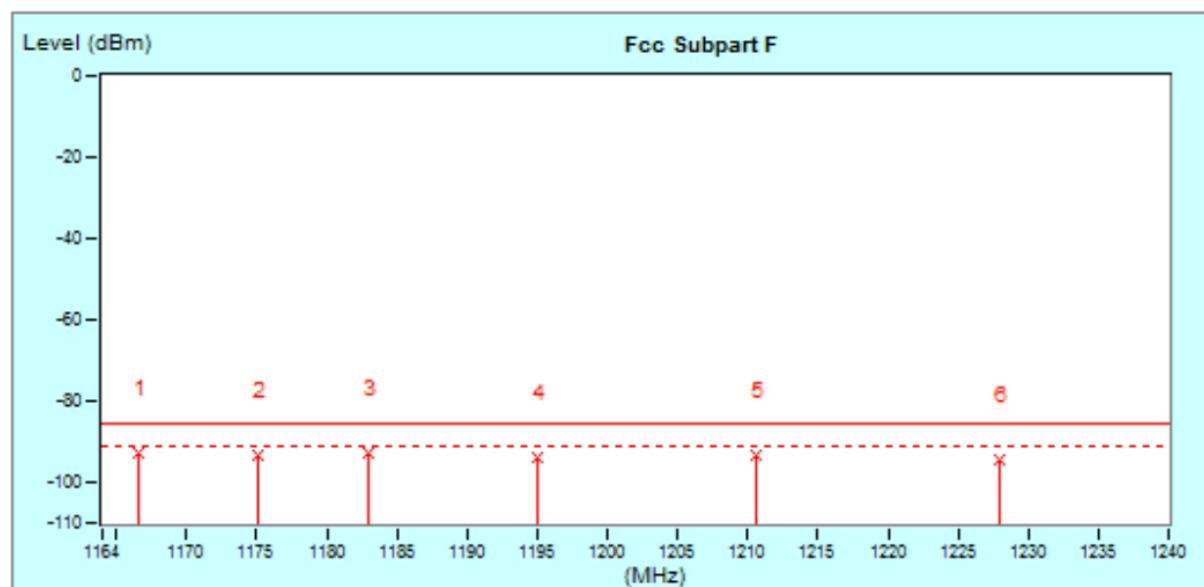



BUREAU
VERITAS


Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	1164 – 1240 MHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	1165.98	-92.56 AV	-85.30	-7.26	1.00 V	45
2	1179.14	-94.00 AV	-85.30	-8.70	1.00 V	29
3	1183.32	-92.22 AV	-85.30	-6.92	1.00 V	188
4	1192.15	-92.87 AV	-85.30	-7.57	1.00 V	235
5	1209.04	-93.12 AV	-85.30	-7.82	1.00 V	69
6	1227.22	-92.10 AV	-85.30	-6.80	1.00 V	168

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.

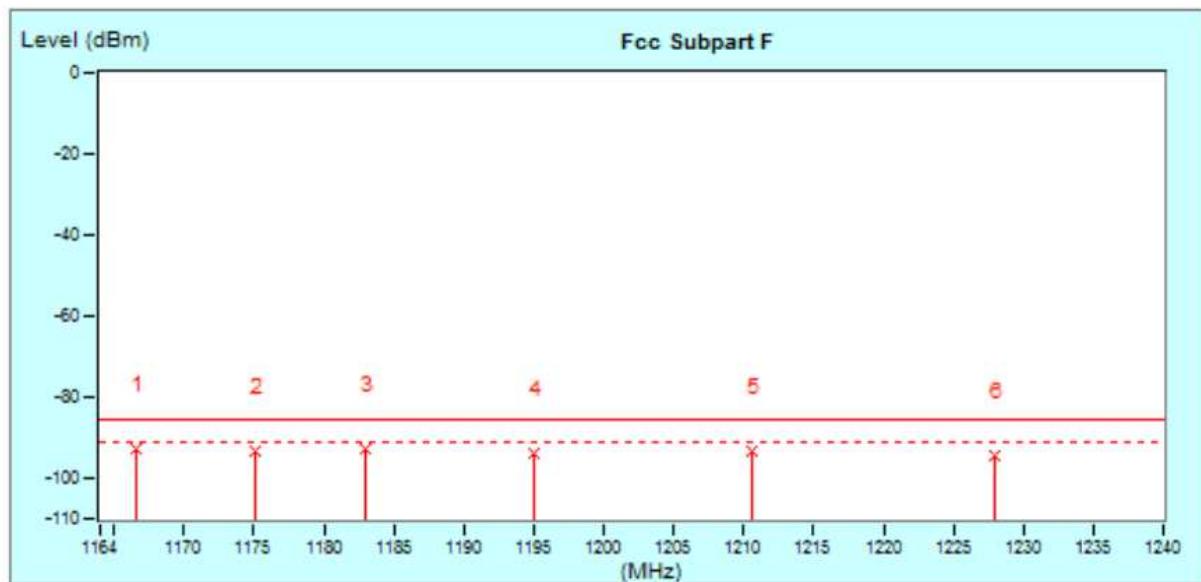



BUREAU
VERITAS


Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	1559- 1610 MHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	1563.65	-94.95 AV	-85.30	-9.04	1.00 H	100
2	1568.60	-95.19 AV	-85.30	-9.27	1.00 H	54
3	1575.49	-94.54 AV	-85.30	-8.61	1.00 H	352
4	1581.92	-94.55 AV	-85.30	-8.60	1.00 H	64
5	1587.33	-94.72 AV	-85.30	-8.76	1.00 H	89
6	1594.12	-94.94 AV	-85.30	-8.96	1.00 H	167

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.

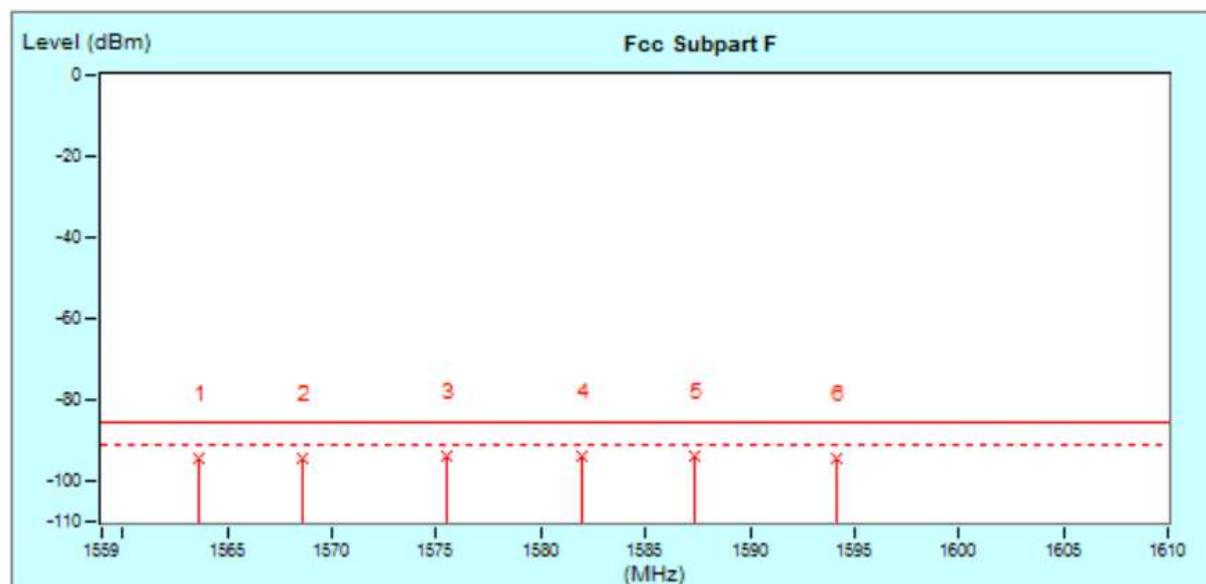



BUREAU
VERITAS


Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	1559- 1610 MHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)
1	1562.11	-95.22 AV	-85.30	-9.92	1.00 V	26
2	1566.81	-95.52 AV	-85.30	-9.60	1.00 V	35
3	1572.63	-95.27 AV	-85.30	-9.34	1.00 V	158
4	1579.37	-95.11 AV	-85.30	-9.17	1.00 V	241
5	1585.24	-95.20 AV	-85.30	-9.25	1.00 V	60
6	1594.02	-95.17 AV	-85.30	-9.19	1.00 V	239

REMARKS:

1. The emission levels of other frequencies were greater than 20dB margin.
2. Margin value = Emission level – Limit value.

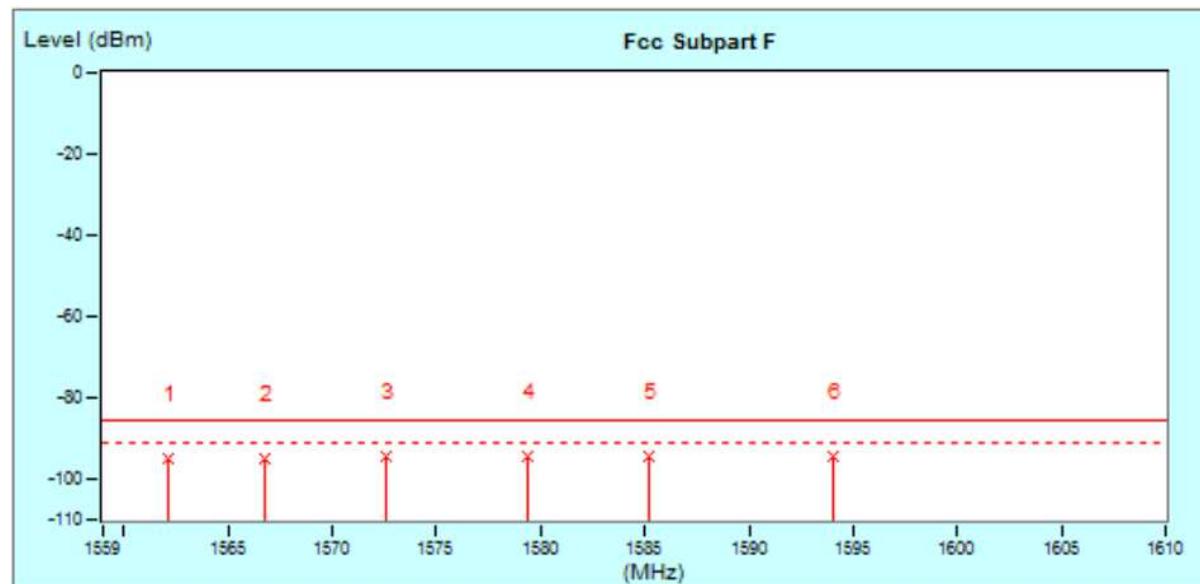



4.2 UWB BANDWIDTH

4.2.1 LIMITS OF UWB BANDWIDTH

FCC 15.503(d) Has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

FCC 15.519(3)(b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Aug. 02,20	Aug. 01,21
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


4.2.3 TEST PROCEDURES

1. Set the centre frequency of the channel under test
2. Set resolution bandwidth (RBW) = 1MHz
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 10 dB relative to the maximum level measured in the fundamental emission.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

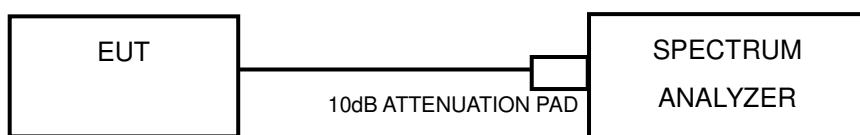



BUREAU
VERITAS


Test Report No.: RF200610N013

4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously.

4.2.7 TEST RESULTS

Frequency(MHz)	Measured Frequencies		10dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
	FL (MHz)	FH (MHz)			
3993.6	3743.96	4340.96	597	FL > 3100 and FH < 10600	Pass

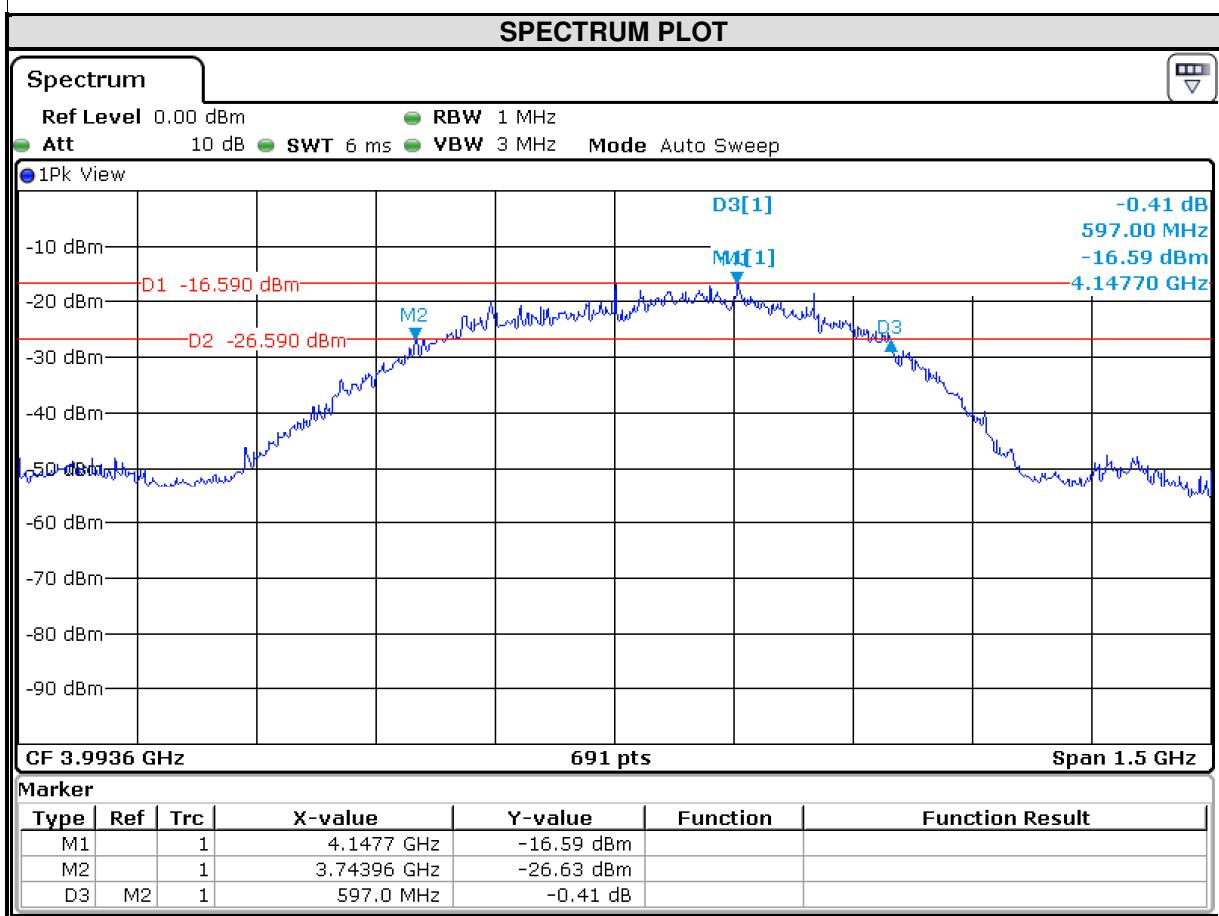



4.3 PEAK LEVEL OF THE EMISSION

4.3.1 LIMITS OF PEAK LEVEL OF THE EMISSION

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP.

When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs, fM. If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.3$.

When the test RBW=3MHz, the EIRP limit should be $0+20\log(3/50)=-24.44\text{dBm}$

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 12,20	Mar. 11,21
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Aug. 02,19	Aug. 01,20
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jul. 21, 20	Jul. 20, 21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Feb. 10,20	Feb. 09,21
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 18,20	Apr. 18,21
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



4.3.3 TEST PROCEDURES


1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE: The RBW=3MHz, VBW=3MHz, so the EIRP limit is $0\text{dBm}+20\log(3/50)=-24.44\text{dBm}/3\text{MHz}$.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

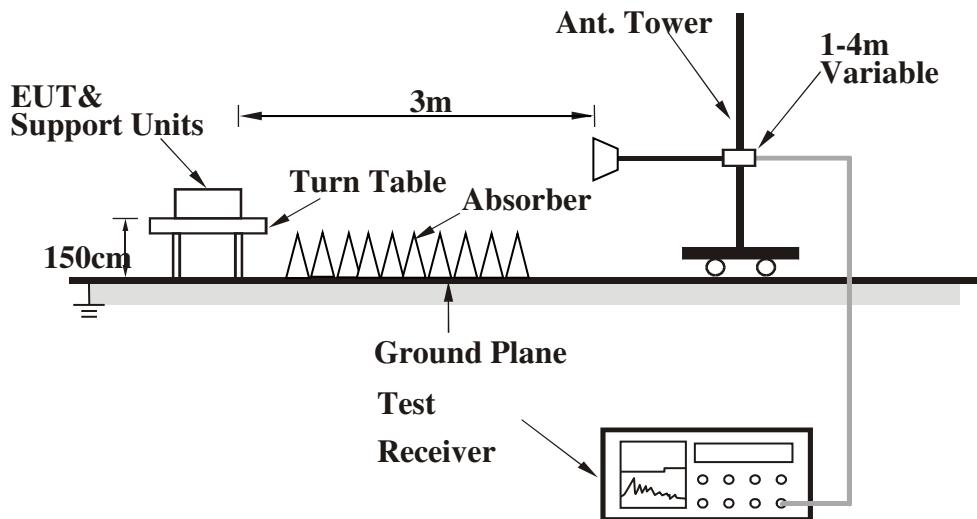

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously.




BUREAU
VERITAS

Test Report No.: RF200610N013

4.3.7 TEST RESULTS

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
TEST FREQUENCY	3993.6MHz		

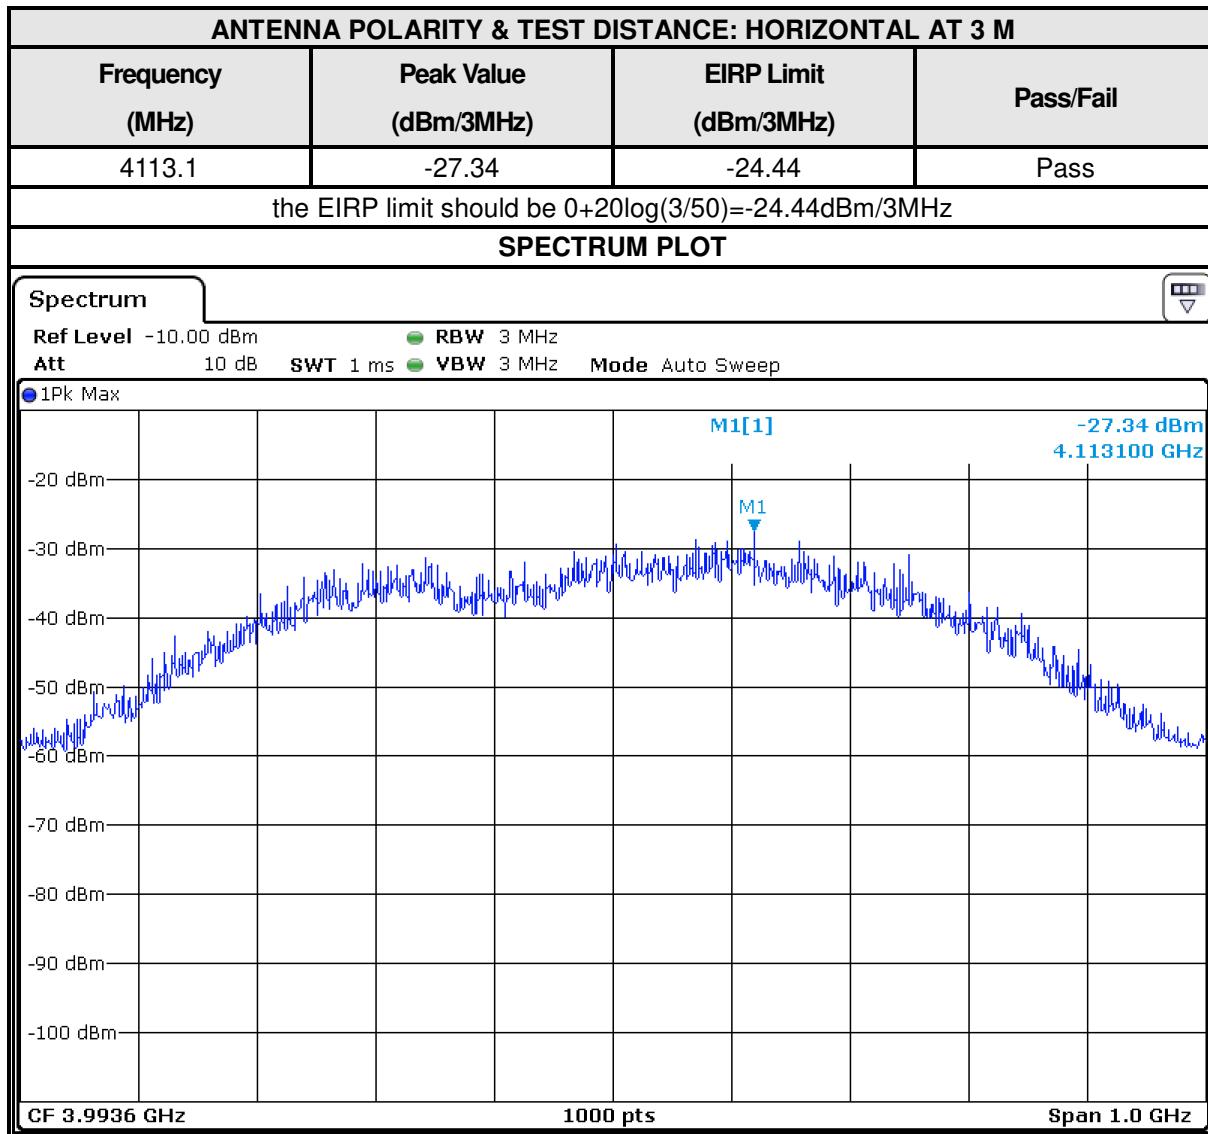




BUREAU
VERITAS

Test Report No.: RF200610N013

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
TEST FREQUENCY	3993.6MHz		

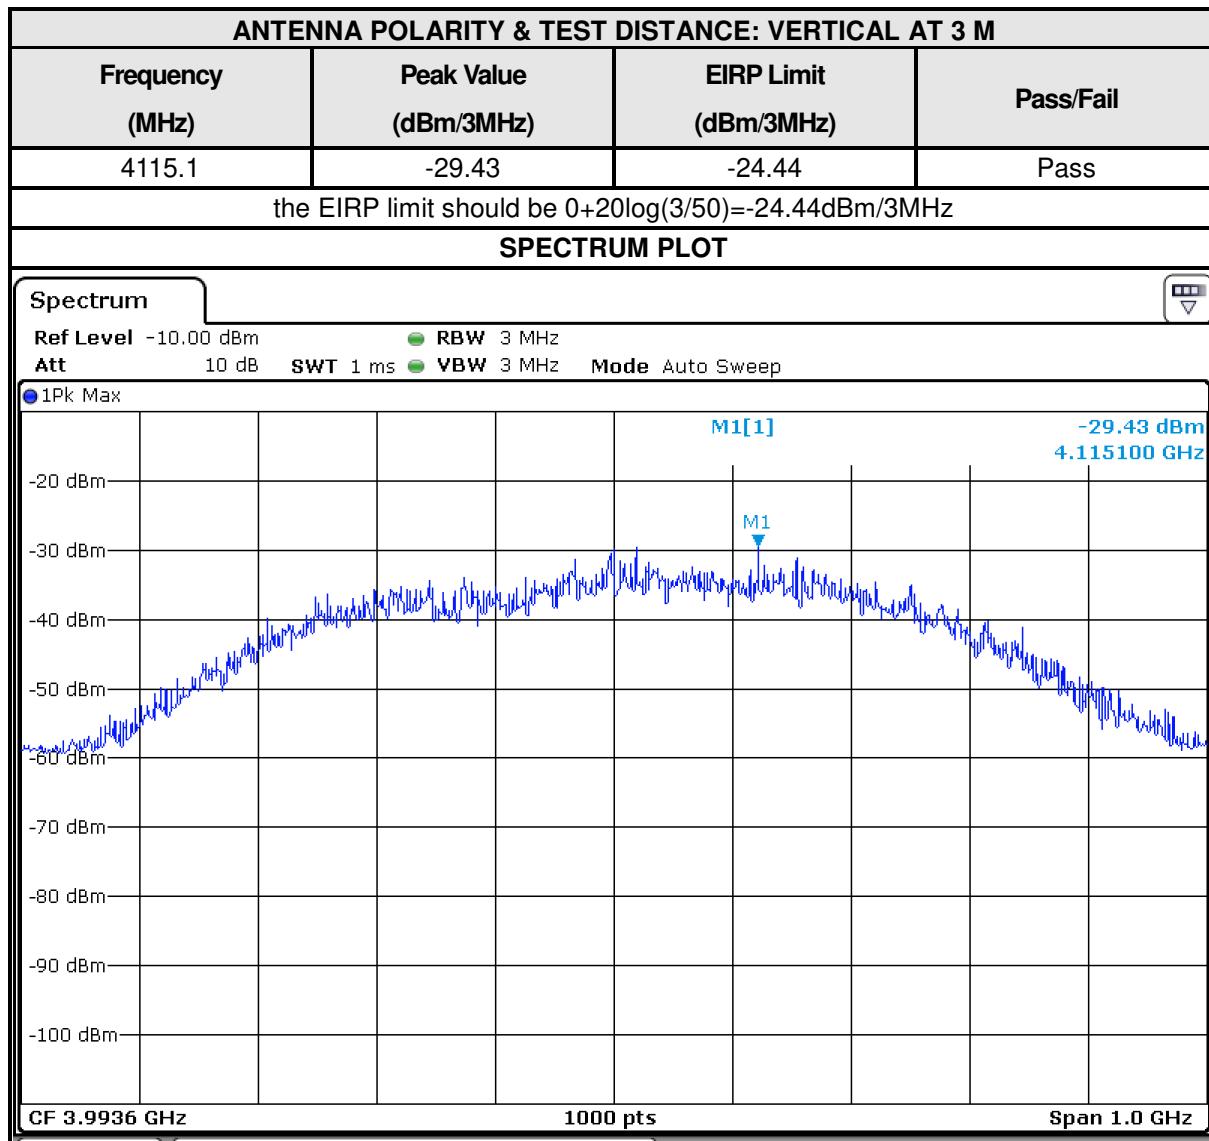

4.4 SHUTOFF TIMING REQUIREMENTS

4.4.1 LIMITS OF SHUTOFF TIMING REQUIREMENTS

The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

4.4.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Aug. 02,19	Aug. 01,20
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTE: 1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


4.4.3 TEST PROCEDURES

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer set the center frequency, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the transmission duration was measured and recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

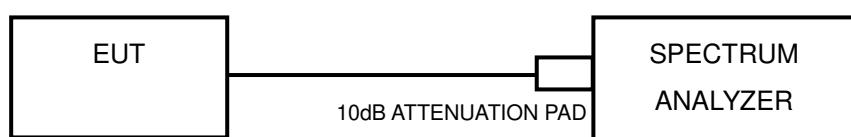



BUREAU
VERITAS


Test Report No.: RF200610N013

4.4.6 EUT OPERATING CONDITIONS

- Turned on the power of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

4.4.7 TEST RESULTS

FREQUENCY (MHz)	MEASUREMENT RESULT (sec)	MAXIMUM LIMIT (sec)	PASS/FAIL
3993.6	9.3913	10	PASS

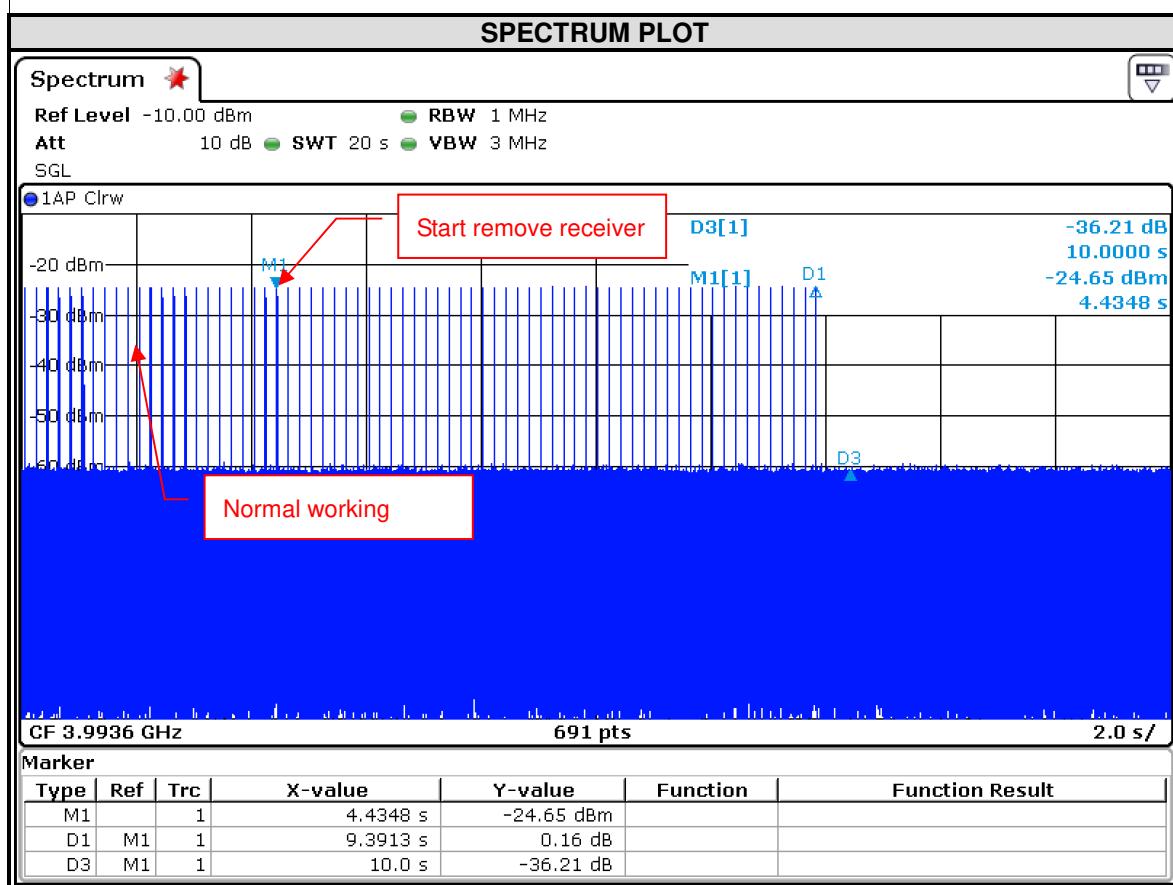



Test Report No.: RF200610N013

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF200610N013

5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---