



EMI TEST REPORT

Test Report No. : 13397625H-B-R1

Applicant : YOSHIKAWA KOGYO Co.,Ltd.
Type of EUT : STANDARD-TAG
Model Number of EUT : YS-F-T008A
FCC ID : 2AWRK-YS-KT008
Test regulation : FCC Part 15 Subpart B: 2020 Class A
Test Result : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 13397625H-B. 13397625H-B is replaced with this report.

Date of test: July 2, 2020

Representative test engineer:

Hiroyuki Furutaka

Engineer

Consumer Technology Division

Approved by:

Shinichi Miyazono

Engineer

Consumer Technology Division



CERTIFICATE 5107.02

The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.
Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Report Cover Page - 13-EM-F0429 Issue # 17.0

REVISION HISTORY

Original Test Report No.: 13397625H-B

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13397625H-B	August 4, 2020	-	-
1	13397625H-B-R1	September 1, 2020	P.6	Addition of the following sentence in Clause 3.1; * Also the EUT complies with FCC Part 15 Subpart C.
1	13397625H-B-R1	September 1, 2020	P.6	Update for FCC version in Clause 3.1; From FCC Part 15 final revised on May 26, 2020 and effective July 27, 2020 except 15.258 To FCC Part 15 final revised on June 26, 2020 and effective July 27, 2020
1	13397625H-B-R1	September 1, 2020	P.6	Addition of "Part 15 Class A Digital Device" in Clause 3.2.
1	13397625H-B-R1	September 1, 2020	P.9	Deletion of the following sentence from Clause 4.1; * It was confirmed by using checker that the EUT receives the signal from the transmitter (pair of EUT).
1	13397625H-B-R1	September 1, 2020	P.10	Deletion of the following sentence from Clause 5.4; For above 1 GHz, test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.
1	13397625H-B-R1	September 1, 2020	P.11	Deletion of the description on 6/24 in Section 5.5

Reference: Abbreviations (Including words undescribed in this report)

AAN	Asymmetric Artificial Network	ILAC	International Laboratory Accreditation Conference
AC	Alternating Current	ISED	Innovation, Science and Economic Development Canada
AM	Amplitude Modulation	ISN	Impedance Stabilization Network
AMN	Artificial Mains Network	ISO	International Organization for Standardization
Amp, AMP	Amplifier	JAB	Japan Accreditation Board
ANSI	American National Standards Institute	LAN	Local Area Network
Ant, ANT	Antenna	LCL	Longitudinal Conversion Loss
AP	Access Point	LIMS	Laboratory Information Management System
ASK	Amplitude Shift Keying	LISN	Line Impedance Stabilization Network
Atten., ATT	Attenuator	MRA	Mutual Recognition Arrangement
AV	Average	N/A	Not Applicable
BPSK	Binary Phase-Shift Keying	NIST	National Institute of Standards and Technology
BR	Bluetooth Basic Rate	NS	No signal detect.
BT	Bluetooth	NSA	Normalized Site Attenuation
BT LE	Bluetooth Low Energy	NVLAP	National Voluntary Laboratory Accreditation Program
BW	BandWidth	OBW	Occupied Band Width
C.F	Correction Factor	OFDM	Orthogonal Frequency Division Multiplexing
Cal Int	Calibration Interval	PK	Peak
CAV	CISPR AV	PlT	long-term flicker severity
CCK	Complementary Code Keying	POHC(A)	Partial Odd Harmonic Current
CDN	Coupling Decoupling Network	Pol., Pola.	Polarization
Ch., CH	Channel	PR-ASK	Phase Reversal ASK
CISPR	Comite International Special des Perturbations Radioelectriques	Pst	short-term flicker severity
Corr.	Correction	QAM	Quadrature Amplitude Modulation
CPE	Customer premise equipment	QP	Quasi-Peak
CW	Continuous Wave	QPSK	Quadri-Phase Shift Keying
DBPSK	Differential BPSK	r.m.s., RMS	Root Mean Square
DC	Direct Current	RBW	Resolution Band Width
DET	Detector	RE	Radio Equipment
D-factor	Distance factor	REV	Reverse
Dmax	maximum absolute voltage change during an observation period	RF	Radio Frequency
DQPSK	Differential QPSK	RFID	Radio Frequency Identifier
DSSS	Direct Sequence Spread Spectrum	RSS	Radio Standards Specifications
EDR	Enhanced Data Rate	Rx	Receiving
e.i.r.p., EIRP	Equivalent Isotropically Radiated Power	SINAD	Ratio of (Signal + Noise + Distortion) to (Noise + Distortion)
EM clamp	Electromagnetic clamp	S/N	Signal to Noise ratio
EMC	ElectroMagnetic Compatibility	SA, S/A	Spectrum Analyzer
EMI	ElectroMagnetic Interference	SG	Signal Generator
EMS	ElectroMagnetic Susceptibility	SVSWR	Site-Voltage Standing Wave Ratio
EN	European Norm	THC(A)	Total Harmonic Current
e.r.p., ERP	Effective Radiated Power	THD(%)	Total Harmonic Distortion
EU	European Union	TR	Test Receiver
EUT	Equipment Under Test	Tx	Transmitting
Fac.	Factor	VBW	Video BandWidth
FCC	Federal Communications Commission	Vert.	Vertical
FHSS	Frequency Hopping Spread Spectrum	WLAN	Wireless LAN
FM	Frequency Modulation	xDSL	Generic term for all types of DSL technology (DSL: Digital Subscriber Line)
Freq.	Frequency		
FSK	Frequency Shift Keying		
Fund	Fundamental		
FWD	Forward		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
I/O	Input/Output		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone : +81 596 24 8999
 Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of EUT during testing.....	9
SECTION 5: Radiated Emission.....	10
APPENDIX 1: Test data	12
Radiated Emission	12
APPENDIX 2: Test instruments	14
APPENDIX 3: Photographs of test setup	15
Radiated Emission	15
Worst Case Position	16

SECTION 1: Customer information

Company Name : YOSHIKAWA KOGYO Co.,Ltd.
Address : 8-1 Hibikinokita Wakamatsu-ku Kitakyusyu City Fukuoka 808-0138
Japan
Telephone Number : +81-93-695-3093
Facsimile Number : +81-93-695-3094
Contact Person : Toshiharu Konomi

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages

- Operating/Test Mode(s) (Mode(s)) on all the relevant pages

- SECTION 1: Customer information

- SECTION 2: Equipment under test (EUT) other than the Receipt Date

- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type : STANDARD-TAG
Model Number : YS-F-T008A
Serial Number : Refer to SECTION 4.2
Rating : DC 3.0 V
Receipt Date : June 19, 2020
Country of Mass-production : Japan
Condition : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification : No Modification by the test lab

2.2 Product Description

Model: YS-F-T008A (referred to as the EUT in this report) is a STANDARD-TAG.

Radio Specification

[Transmitter part]

Radio Type : Transmitter
Frequency of Operation : 315 MHz
Modulation : ASK
Antenna type : Pattern Antenna
Clock frequency (Maximum) : 9.8 MHz

[Receiver part]

Radio Type : Receiver
Frequency of Operation : 125 kHz

Variant model

Tested model: YS-F-T008A has a variant model: YS-F-T003A.

The difference of these models is the presence or absence of the vibration function. (YS-F-T003A has Vibration function.)

The two models were compared, all the tests were performed only with model: YS-F-T008A as its result was the worst one.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart B
FCC Part 15 final revised on June 26, 2020 and effective July 27, 2020

Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

* The revision does not affect the test result conducted before its effective date.

* Also the EUT complies with FCC Part 15 Subpart C.

3.2 Procedures and results

[Part 15 Class A Digital Device]

Item	Test Procedure	Limits	Deviation	Worst margin	Result	Remarks
Conducted emission	FCC: ANSI C63.4: 2014 7. AC power - line conducted emission measurements	Class A	N/A	N/A	N/A	*1)
Radiated emission	FCC: ANSI C63.4: 2014 8. Radiated emission measurements	Class A	N/A	15.7 dB 21.1287 MHz, Vertical, QP <Mode 1>	Complied a)	-
*Note: UL Japan, Inc's EMI Work Procedure 13-EM-W0420.						
*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.						
a) Refer to APPENDIX 1 (data of Radiated Emission)						
Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.						

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	5.0 dB
200 MHz to 1000 MHz (Horizontal)	5.2 dB	
	(Vertical)	6.3 dB
10 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	4.8 dB
200 MHz to 1000 MHz (Horizontal)	5.0 dB	
	(Vertical)	5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
0.5 m	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

* A2LA Certificate Number: 5107.02/ FCC Test Firm Registration Number: 199967 / ISED Lab Company Number: 2973C

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124


SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Remarks
Mode 1	Alarm status with 3M zone
Mode 2	Safe status with 3M zone
*EUT was set by the software as follows; Software:	V22.18.07

*The test signal level was confirmed to be sufficient to stabilize the local oscillator of the EUT.

4.2 Configuration and peripherals

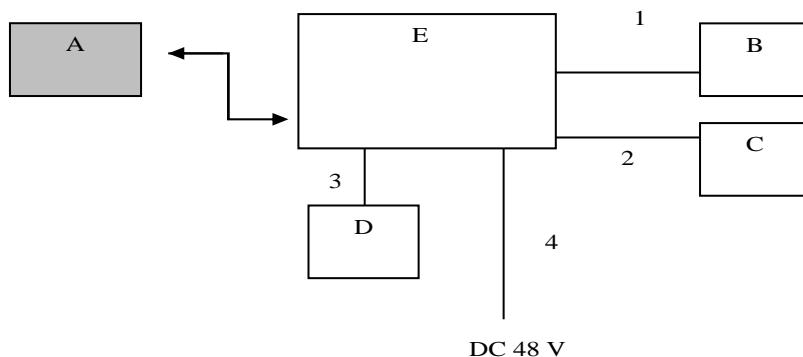

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

* Item No. A includes Receiver Antenna.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	STANDARD-TAG	YS-F-T008A	594	YOSHIKAWA KOGYO Co.,Ltd.	EUT
B	UHF Antenna	-	001	YOSHIKAWA KOGYO Co.,Ltd.	-
C	Indicator lamp	YS-F-V027A-R	-	Schneider Electric	-
D	Speaker	YS-F-S003A	01238	YOSHIKAWA KOGYO Co.,Ltd.	-
E	DETECTOR	YS-F-R023A	001573	YOSHIKAWA KOGYO Co.,Ltd.	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	4.0	Unshielded	Unshielded	-
2	Signal Cable	5.7	Unshielded	Unshielded	-
3	Signal Cable	5.2	Unshielded	Unshielded	-
4	DC Cable	2.2	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Emission

5.1 Operating environment

Test place : No.1 semi anechoic chamber
 Temperature : See data
 Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The EUT was set on the center of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in Appendix 3.

5.3 Test conditions

Frequency range : 30 MHz - 200 MHz (Biconical antenna) / 200 MHz - 1000 MHz (Logperiodic antenna)
 Test distance : 10 m
 EUT position : Table top
 EUT operation mode : See Clause 4.1

5.4 Test procedure

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.


The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver.

The radiated emission measurements were made with the following detector function of the Test Receiver.

Frequency	Below 1GHz
Instrument used	Test Receiver
IF Bandwidth	QP: BW 120 kHz

Figure 2: Test Setup

Below 1 GHz

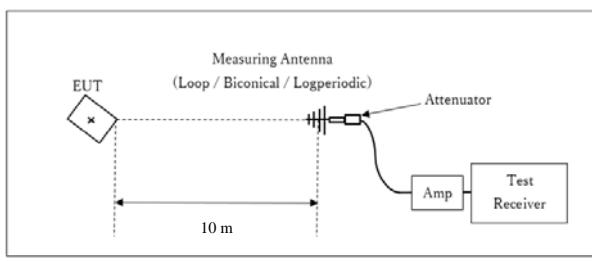

Test Distance: 10 m

- The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

5.5 Test result

Summary of the test results: Pass

The limit is rounded down to one decimal place.

The test result is rounded off to one or two decimal places, so some differences might be observed.


Date: July 2, 2020 Test engineer: Hiroyuki Furutaka

APPENDIX 1: Test data

Radiated Emission

Report No. 13397625H
 Test place Ise EMC Lab.
 Semi Anechoic Chamber No.1
 Date July 2, 2020
 Temperature / Humidity 21 deg. C / 52 % RH
 Engineer Hiroyuki Furutaka
 (Below 1 GHz)
 Mode Mode 1

Limit : FCC_Part 15 Subpart B(15.109)_Class A

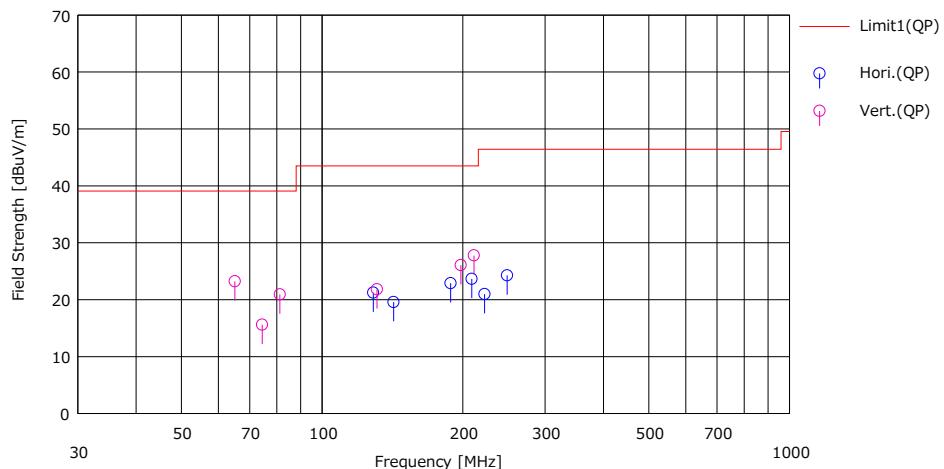

Na	Freq. [MHz]	Reading (QP)		Ant.Fcc	Loss	Gain	Result (QP)	Limit (QP)	Margin (QP)	Pob.	Heght [H/V] [cm]	Angle [deg]	Ant. Type	Comment
		[dBuV]	[dB/m]											
1	1286.82	37.80	13.47	8.91	38.94	21.24	43.50	22.2	Hori.	400	123	BA		
2	1422.40	35.00	14.44	9.08	38.94	19.58	43.50	23.9	Hori.	400	5	BA		
3	1883.88	36.00	16.23	9.59	38.93	22.89	43.50	20.6	Hori.	400	342	BA		
4	2090.77	41.90	10.86	9.82	38.92	23.66	43.50	19.8	Hori.	325	0	LA20		
5	2226.50	39.00	10.94	9.95	38.90	20.99	46.40	25.4	Hori.	300	357	LA20		
6	2489.87	41.40	11.52	10.21	38.86	24.27	46.40	22.1	Hori.	400	13	LA20		
7	65.059	47.40	6.67	8.01	38.85	23.23	39.10	15.8	Vert.	100	229	BA		
8	74.435	40.00	6.30	8.16	38.86	15.60	39.10	23.5	Vert.	100	91	BA		
9	81.231	44.60	6.92	8.26	38.87	20.91	39.10	18.1	Vert.	100	345	BA		
10	1310.51	38.20	13.63	8.94	38.94	21.83	43.50	21.6	Vert.	100	351	BA		
11	1980.81	38.90	16.41	9.70	38.93	26.08	43.50	17.4	Vert.	100	345	BA		
12	2112.87	46.00	10.84	9.84	38.91	27.77	43.50	15.7	Vert.	100	40	LA20		

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz :- HORN

CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission

Report No. 13397625H
 Test place Ise EMC Lab.
 Semi Anechoic Chamber No.1
 Date July 2, 2020
 Temperature / Humidity 21 deg. C / 52 % RH
 Engineer Hiroyuki Furutaka
 (Below 1 GHz)
 Mode Mode 2

Limit : FCC_Part 15 Subpart B(15.109)_Class A

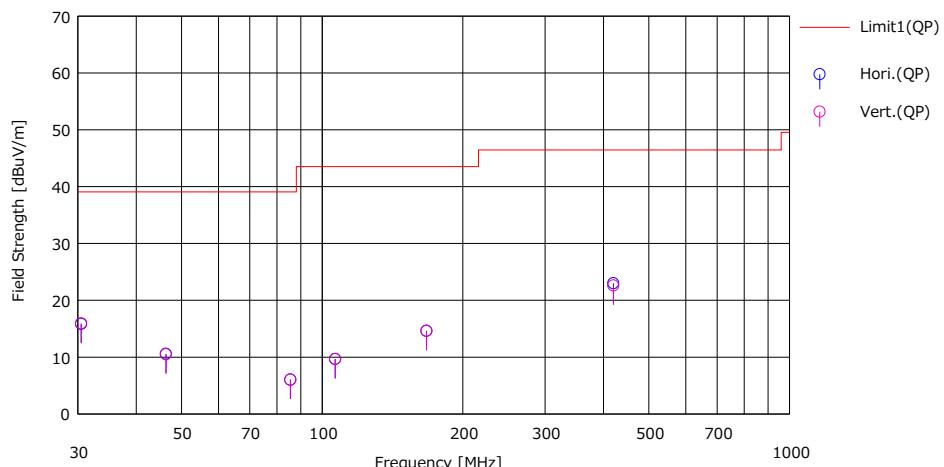

Na	Freq. [MHz]	Reading (QP)		Ant.Foc [dB/m]	Loss [dB]	Gain [dB]	Result (QP)	Limit (QP)	Margin [dBuV/m]	Polar. [dB]	Height [H/V] [cm]	Angle [deg]	Ant. Type	Comment
		Reading [dBuV]	Margin [dBuV/m]											
1	30.510	29.30	18.03	7.32	38.81	15.84	39.10	23.2	23.2	Hori.	400	34.6	BA	
2	46.320	29.50	12.25	7.65	38.82	10.58	39.10	26.5	26.5	Hori.	400	10	BA	
3	85.512	29.00	7.60	8.33	38.89	6.04	39.10	33.0	33.0	Hori.	400	3	BA	
4	106.627	29.00	10.97	8.63	38.95	9.65	43.50	33.8	33.8	Hori.	400	107	BA	
5	167.207	28.60	15.60	9.37	38.94	14.63	43.50	28.8	28.8	Hori.	400	85	BA	
6	420.000	34.00	15.84	11.61	38.46	22.99	46.40	23.4	23.4	Hori.	200	1	LA20	
7	30.510	29.40	18.03	7.32	38.81	15.94	39.10	23.1	23.1	Vert.	100	359	BA	
8	46.320	29.40	12.25	7.65	38.82	10.48	39.10	28.6	28.6	Vert.	100	359	BA	
9	85.512	29.00	7.60	8.33	38.89	6.04	39.10	33.0	33.0	Vert.	100	358	BA	
10	106.627	29.00	10.97	8.63	38.95	9.65	43.50	33.8	33.8	Vert.	100	354	BA	
11	167.207	28.55	15.60	9.37	38.94	14.58	43.50	28.9	28.9	Vert.	100	236	BA	
12	420.000	33.60	15.84	11.61	38.46	22.59	46.40	23.8	23.8	Vert.	100	66	LA20	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz :- HORN

CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	COTS-ME MI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	06/03/2020	12
RE	MAEC-01	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	06/08/2020	24
RE	MOS-27	141566	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q26	01/07/2020	12
RE	MMM-03	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	08/20/2019	12
RE	MJM-25	142226	Measure	KOMELON	KMC-36	-	-	-
RE	MAT-08	141213	Attenuator(6dB)	Weinschel Corp	2	BK7971	11/14/2019	12
RE	KBA-05	141198	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	2513	04/22/2020	12
RE	MCC-02	141350	Coaxial Cable	Suhner/storm/Agilent/ TSJ	-	-	06/25/2020	12
RE	MLA-20	141264	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-189	04/22/2020	12
RE	MPA-19	141585	Pre Amplifier	MITEQ	MLA-10K01-B01-35	1237616	02/10/2020	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated emission

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124