



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

LEHE Information Technology Co.,Ltd

1418 moganshan Road, shangcheng Industrial Zone, Hangzhou, Zhejiang 310011 China

FCC ID: 2AWSFMSN00

Report Type: Original Report	Product Type: Wi-SUN Comm Module
Test Engineer:	Chao Gao
Report Number:	RSHA200622003-00A
Report Date:	2020-07-15
Reviewed By:	Oscar Ye EMC Manager
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	8
EUT EXERCISE SOFTWARE	8
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
FACTOR & OVER LIMIT CALCULATION.....	16
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	29
APPLICABLE STANDARD	29
EUT SETUP	29
EMI TEST RECEIVER SETUP.....	30
TEST PROCEDURE	30
CORRECTED AMPLITUDE & MARGIN CALCULATION	30
TEST RESULTS SUMMARY	30
TEST DATA	31
FCC §15.247(a) (1)- CHANNEL SEPARATION TEST	66
APPLICABLE STANDARD	66
TEST PROCEDURE	66
TEST DATA	66
FCC §15.247(a) (1) (i)– 20 dB EMISSION BANDWIDTH.....	71
APPLICABLE STANDARD	71
TEST PROCEDURE	71
TEST DATA	71
FCC §15.247(a) (1) (i)-QUANTITY OF HOPPING CHANNEL TEST	76

APPLICABLE STANDARD	76
TEST PROCEDURE	76
TEST DATA	76
FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME)	79
APPLICABLE STANDARD	79
TEST PROCEDURE	79
TEST DATA	79
FCC §15.247(b) (2) - MAXIMUM CONDUCTED OUTPUT POWER.....	83
APPLICABLE STANDARD	83
TEST PROCEDURE	83
TEST DATA	83
FCC §15.247(d) - BAND EDGE	88
APPLICABLE STANDARD	88
TEST PROCEDURE	88
TEST DATA	88

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	LEHE Information Technology Co.,Ltd
Tested Model:	MSN00
Product Type:	Wi-SUN Comm Module
Power Supply:	DC 4V
RF Function:	SRD
Operating Band/Frequency:	902.2~927.8MHz(50 kbps), 902.4~927.6(150 kbps)
Channel Number:	129(50 kbps), 64(150 kbps)
Channel Separation:	0.2 MHz(50 kbps), 0.4 MHz (150 kbps)

**All measurement and test data in this report was gathered from production sample serial number: 20200622003.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2020-06-22)*

Objective

This report is prepared on behalf of *LEHE Information Technology Co.,Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Available Channel List for 50kbps:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.20	33	908.60	65	915.00	117	925.40
2	902.40	34	908.80	66	915.20	118	925.60
3	902.60	35	909.00	67	915.40	119	925.80
4	902.80	36	909.20	68	915.60	120	926.00
5	903.00	37	909.40	69	915.80	121	926.20
6	903.20	38	909.60	70	916.00	122	926.40
7	903.40	39	909.80	71	916.20	123	926.60
8	903.60	40	910.00	72	916.40	124	926.80
9	903.80	41	910.20	73	916.60	125	927.00
10	904.00	42	910.40	74	916.80	126	927.20
11	904.20	43	910.60	75	917.00	127	927.40
12	904.40	44	910.80	76	917.20	128	927.60
.....						129	927.80

EUT was tested with channel 1, 65, 129.

Available Channel List for 150kbps:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.40	17	908.80	33	915.20	49	921.60
2	902.80	18	909.20	34	915.60	50	922.00
3	903.20	19	909.60	35	916.00	51	922.40
4	903.60	20	910.00	36	916.40	52	922.80
5	904.00	21	910.40	37	916.80	53	923.20
6	904.40	22	910.80	38	917.20	54	923.60
7	904.80	23	911.20	39	917.60	55	924.00
8	905.20	24	911.60	40	918.00	56	924.40
9	905.60	25	912.00	41	918.40	57	924.80
10	906.00	26	912.40	42	918.80	58	925.20
11	906.40	27	912.80	43	919.20	59	925.60
12	906.80	28	913.20	44	919.60	60	926.00
13	907.20	29	913.60	45	920.00	61	926.40
14	907.60	30	914.00	46	920.40	62	926.80
15	908.00	31	914.40	47	920.80	63	927.20
16	908.40	32	914.80	48	921.20	64	927.60

EUT was tested with channel 1, 33, 64.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test tool: VC_700X_User_Tool

Pre-scan with 50kbps data rate, the worst case was performed as below:

Frequency(MHz)	Power Setting
902.2	Default
915.0	Default
927.8	Default

Pre-scan with 150kbps data rate, the worst case was performed as below:

Frequency(MHz)	Power Setting
902.4	Default
915.2	Default
927.6	Default

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
LEHE	Debug board	/	/
LEHE	Rod antenna	/	/
LEHE	Whip antenna	/	/
LEHE	FRP antenna	/	/
/	Socket	/	/
Innov	Adapter	IVP1200-1000	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Power cable	1.0	EUT	Adapter
Power cable	1.0	Adapter	LISN


Block Diagram of Test Setup

For Conducted Emissions:

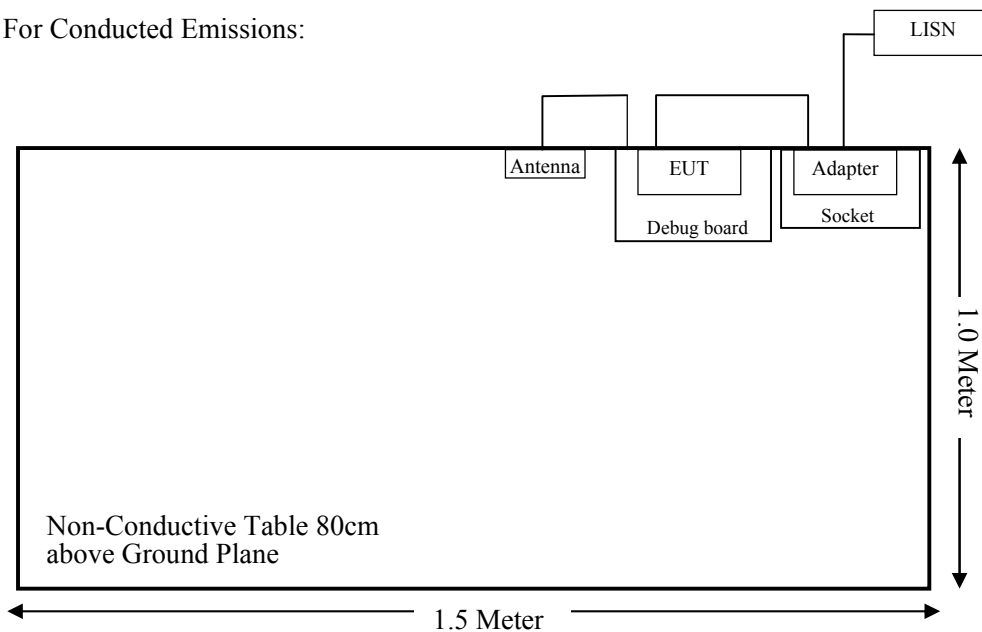


For Radiated Emissions(Below 1GHz):

Turntable
2m Diameter

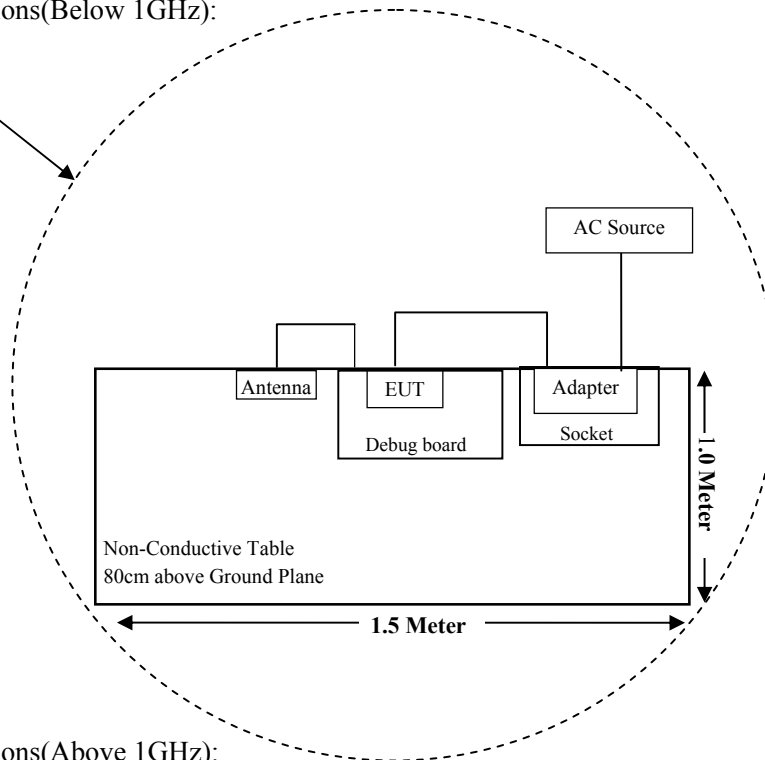

For Radiated Emissions(Above 1GHz):

Turntable
2m Diameter

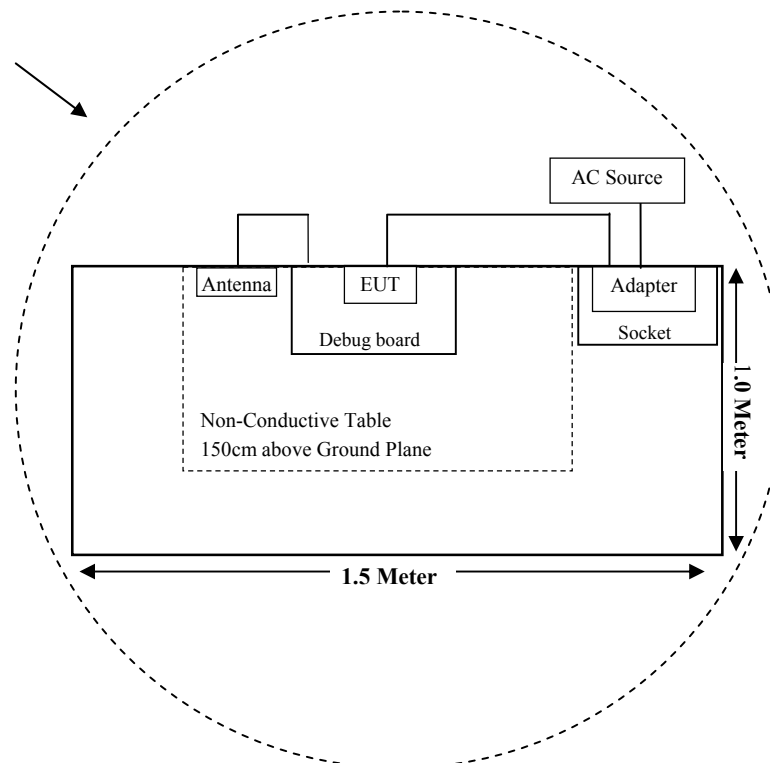

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310& §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247(a)(1) (i)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(i)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(i)	Quantity of hopping channel Test	Compliant
§15.247(b)(2)	Peak Output Power Measurement	Compliant
§15.247(d)	Band Edge	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-TRONICS	Notch Filter	BRC50722	G013	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	FSV40	101116	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
LEHE	RF Cable	LEHE C01	C01	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-08-05	2020-08-04
Rohde & Schwarz	LISN	ENV216	3560655016	2019-11-30	2020-11-29
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	0357.8810.54	2020-01-10	2021-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data (worst case):

Frequency Range (MHz)	Maximum Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
902-928	4.0	2.51	28.0	630.96	20	0.3153	0.6013

Note: The Tune-up power was declared by the manufacturer.

Conclusion: The EUT meets RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by § 2.1093.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT test with three Antennas, one is Rod antenna and the antenna gain is 3dBi; one is Whip antenna and the antenna gain is 2dBi; other is FRP antenna and then antenna gain is 4dBi, Which unit professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. Please refer to the EUT photos.

Antenna Type	Antenna Gain	Input impedance
Rod antenna	3dBi	50Ω
Whip antenna	2dBi	50Ω
FRP antenna	4dBi	50Ω


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

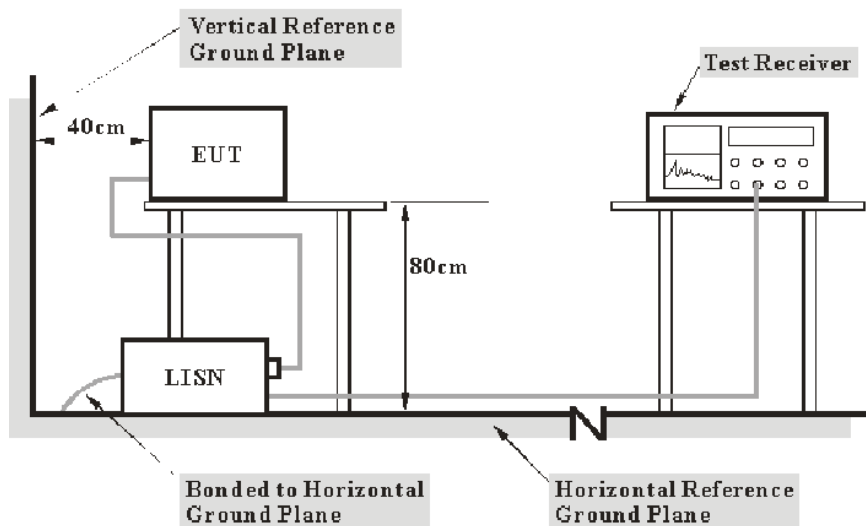

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	24.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa

The testing was performed by Chao Gao on 2020-06-30.

EUT operation mode: Charging


For rod antenna - 50Kbps

AC 120V/60Hz, Line

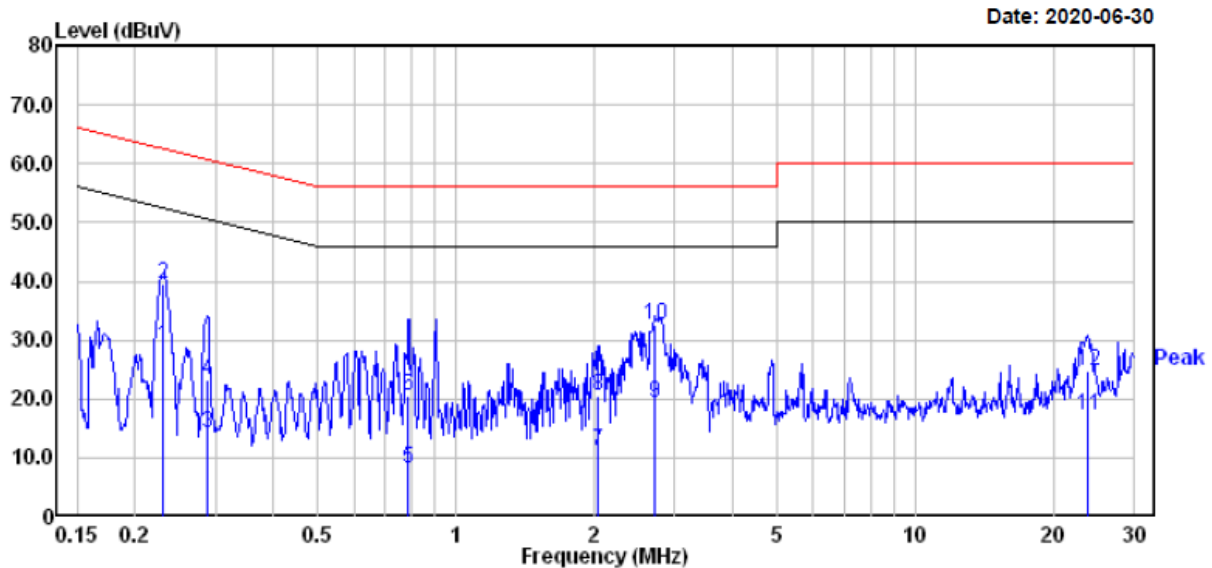

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.230	9.30	19.82	29.12	52.44	-23.32 Average
2	0.230	19.80	19.82	39.62	62.44	-22.82 QP
3	0.288	-5.60	19.82	14.22	50.59	-36.37 Average
4	0.288	3.40	19.82	23.22	60.59	-37.37 QP
5	0.788	-11.60	19.71	8.11	46.00	-37.89 Average
6	0.788	0.80	19.71	20.51	56.00	-35.49 QP
7	2.044	-8.49	19.79	11.30	46.00	-34.70 Average
8	2.044	0.61	19.79	20.40	56.00	-35.60 QP
9	2.721	0.00	19.47	19.47	46.00	-26.53 Average
10	2.721	13.20	19.47	32.67	56.00	-23.33 QP
11	23.762	-2.50	19.75	17.25	50.00	-32.75 Average
12	23.762	5.10	19.75	24.85	60.00	-35.15 QP

AC 120V/60Hz, Neutral

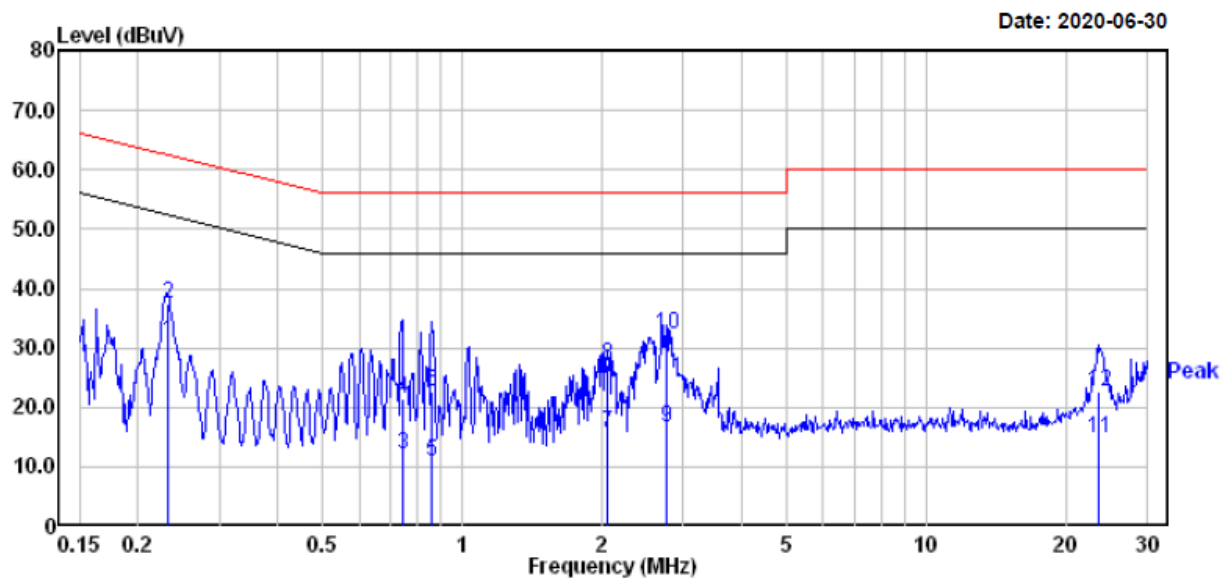

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.232	11.40	19.82	31.22	52.39	-21.17	Average
2	0.232	17.60	19.82	37.42	62.39	-24.97	QP
3	0.743	-7.80	19.73	11.93	46.00	-34.07	Average
4	0.743	1.70	19.73	21.43	56.00	-34.57	QP
5	0.857	-8.99	19.71	10.72	46.00	-35.28	Average
6	0.857	3.01	19.71	22.72	56.00	-33.28	QP
7	2.055	-4.20	19.79	15.59	46.00	-30.41	Average
8	2.055	7.40	19.79	27.19	56.00	-28.81	QP
9	2.750	-2.80	19.47	16.67	46.00	-29.33	Average
10	2.750	12.90	19.47	32.37	56.00	-23.63	QP
11	23.511	-5.11	19.77	14.66	50.00	-35.34	Average
12	23.511	2.79	19.77	22.56	60.00	-37.44	QP


Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Attenuator (dB)

2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)


For rod antenna - 150kbps

AC 120V/60Hz, Line

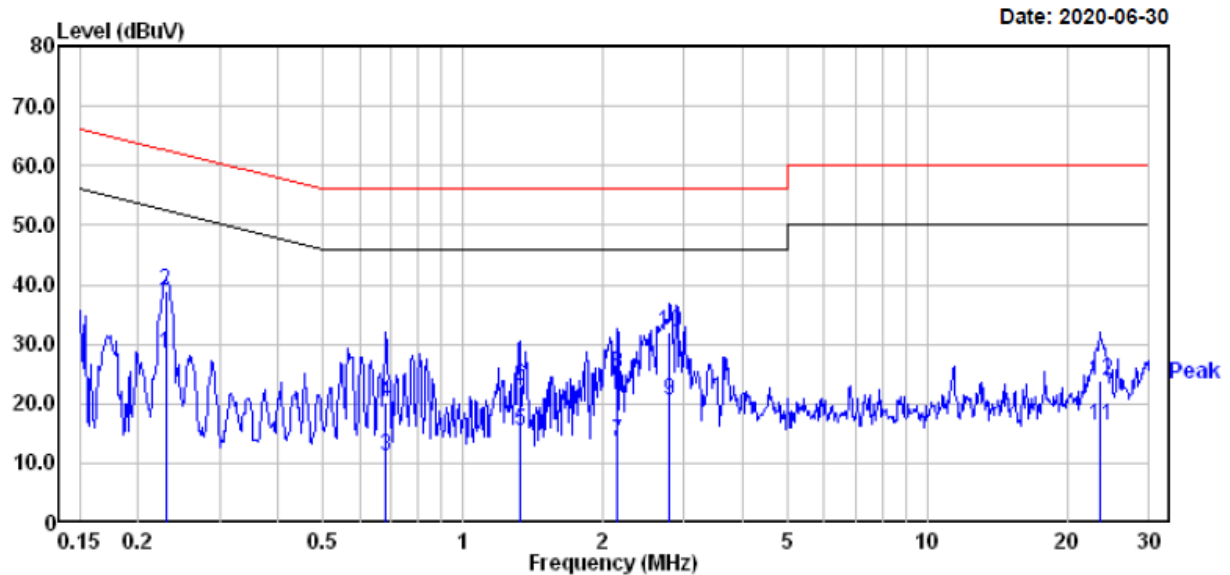

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.229	8.50	19.82	28.32	52.48	-24.16	Average
2	0.229	19.00	19.82	38.82	62.48	-23.66	QP
3	0.683	-8.70	19.75	11.05	46.00	-34.95	Average
4	0.683	0.50	19.75	20.25	56.00	-35.75	QP
5	1.324	-4.39	19.82	15.43	46.00	-30.57	Average
6	1.324	3.01	19.82	22.83	56.00	-33.17	QP
7	2.155	-6.20	19.71	13.51	46.00	-32.49	Average
8	2.155	5.40	19.71	25.11	56.00	-30.89	QP
9	2.794	1.00	19.47	20.47	46.00	-25.53	Average
10	2.794	12.40	19.47	31.87	56.00	-24.13	QP
11	23.636	-3.60	19.76	16.16	50.00	-33.84	Average
12	23.636	4.10	19.76	23.86	60.00	-36.14	QP

AC 120V/60Hz, Neutral

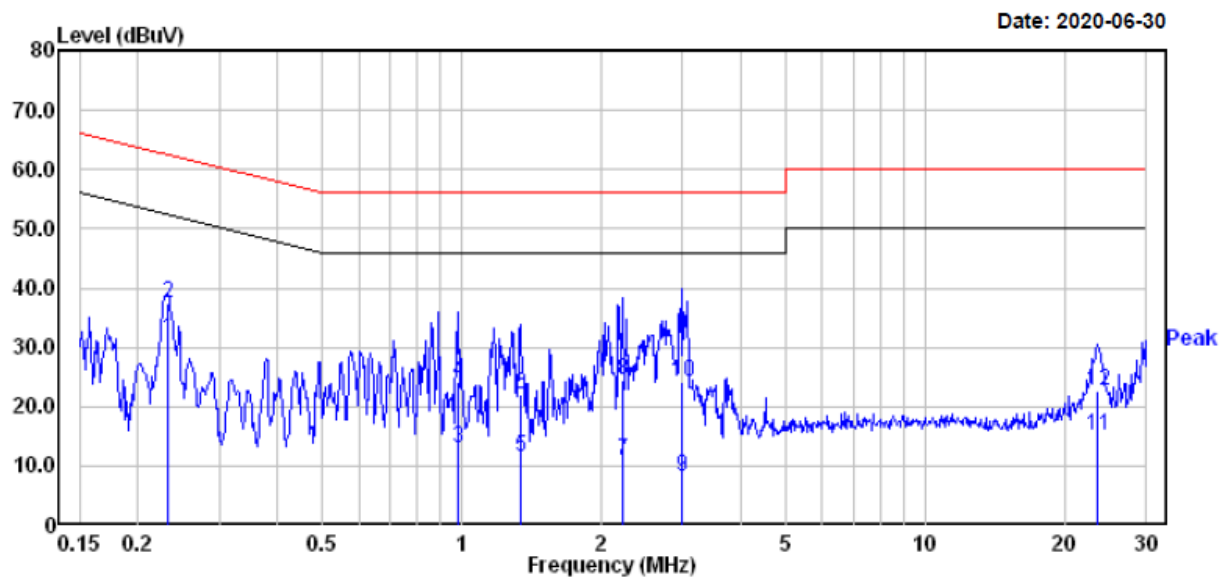


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.232	11.50	19.82	31.32	52.39	-21.07	Average
2	0.232	17.70	19.82	37.52	62.39	-24.87	QP
3	0.979	-6.70	19.80	13.10	46.00	-32.90	Average
4	0.979	4.40	19.80	24.20	56.00	-31.80	QP
5	1.338	-8.49	19.82	11.33	46.00	-34.67	Average
6	1.338	2.11	19.82	21.93	56.00	-34.07	QP
7	2.225	-8.80	19.66	10.86	46.00	-35.14	Average
8	2.225	4.80	19.66	24.46	56.00	-31.54	QP
9	2.993	-11.40	19.46	8.06	46.00	-37.94	Average
10	2.993	4.70	19.46	24.16	56.00	-31.84	QP
11	23.636	-4.80	19.76	14.96	50.00	-35.04	Average
12	23.636	2.80	19.76	22.56	60.00	-37.44	QP

Note:


- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Attenuator (dB)
- 2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

For whip antenna - 50kbps

AC 120V/60Hz, Line

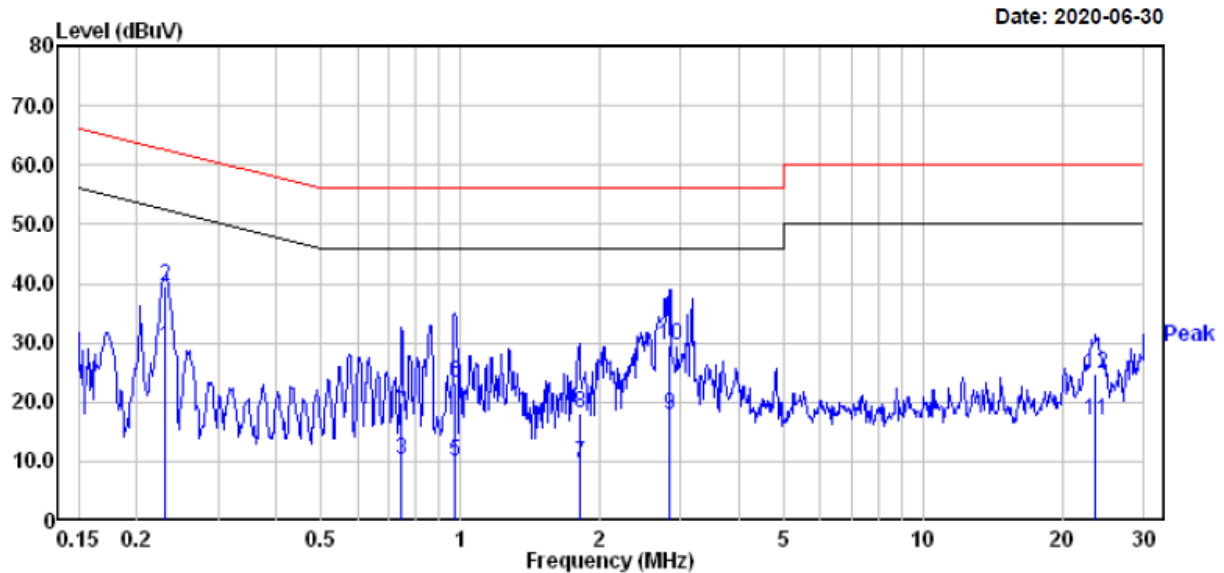

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.230	9.40	19.82	29.22	52.44	-23.22	Average
2	0.230	19.80	19.82	39.62	62.44	-22.82	QP
3	0.747	-9.40	19.73	10.33	46.00	-35.67	Average
4	0.747	0.30	19.73	20.03	56.00	-35.97	QP
5	0.974	-9.80	19.80	10.00	46.00	-36.00	Average
6	0.974	3.50	19.80	23.30	56.00	-32.70	QP
7	1.810	-10.30	19.84	9.54	46.00	-36.46	Average
8	1.810	-1.60	19.84	18.24	56.00	-37.76	QP
9	2.839	-1.61	19.47	17.86	46.00	-28.14	Average
10	2.839	10.19	19.47	29.66	56.00	-26.34	QP
11	23.636	-2.90	19.76	16.86	50.00	-33.14	Average
12	23.636	4.90	19.76	24.66	60.00	-35.34	QP

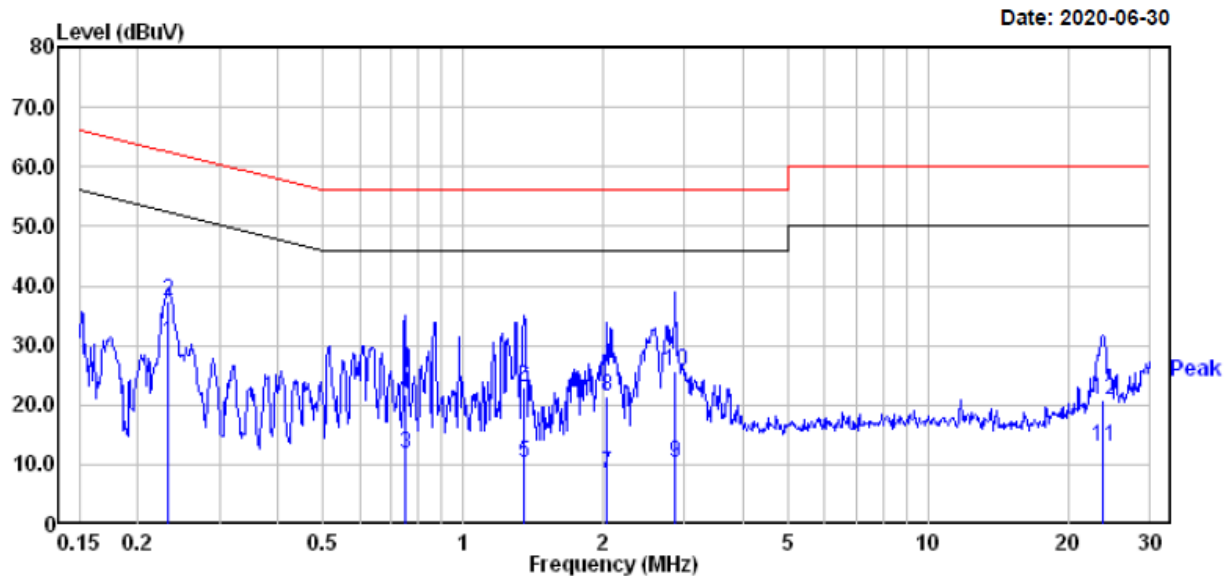AC 120V/60Hz, Neutral

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.233	10.80	19.82	30.62	52.35	-21.73	Average
2	0.233	17.60	19.82	37.42	62.35	-24.93	QP
3	0.751	-7.80	19.72	11.92	46.00	-34.08	Average
4	0.751	2.00	19.72	21.72	56.00	-34.28	QP
5	1.352	-9.70	19.83	10.13	46.00	-35.87	Average
6	1.352	3.10	19.83	22.93	56.00	-33.07	QP
7	2.044	-11.19	19.79	8.60	46.00	-37.40	Average
8	2.044	1.61	19.79	21.40	56.00	-34.60	QP
9	2.869	-9.30	19.46	10.16	46.00	-35.84	Average
10	2.869	6.10	19.46	25.56	56.00	-30.44	QP
11	23.762	-6.70	19.75	13.05	50.00	-36.95	Average
12	23.762	1.20	19.75	20.95	60.00	-39.05	QP


Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Attenuator (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)


For whip antenna - 150kbps

AC 120V/60Hz, Line

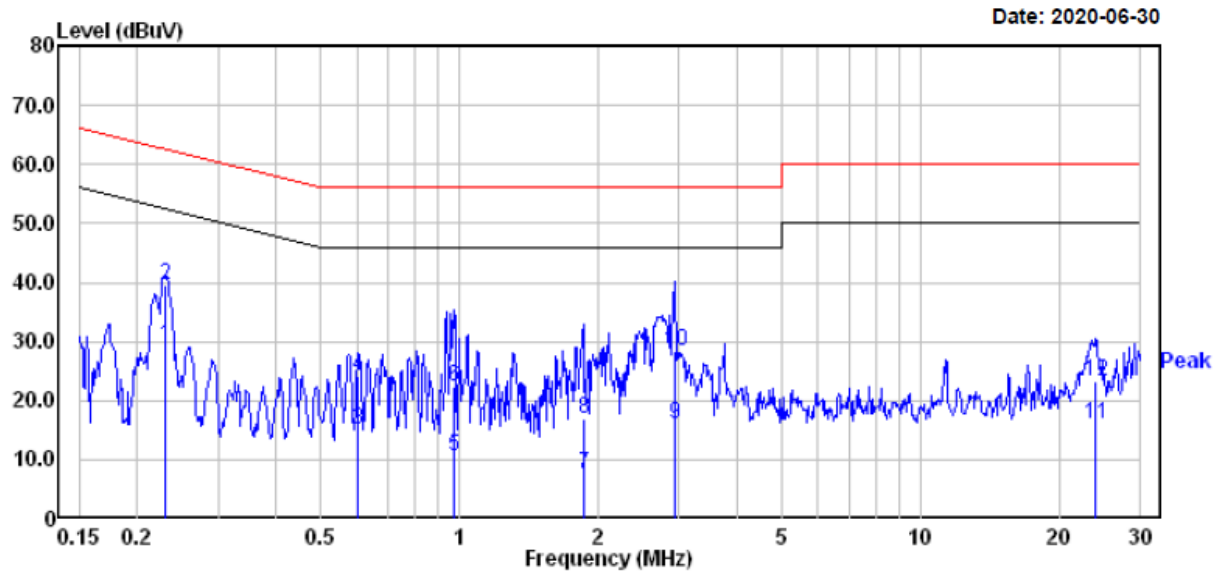

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.230	9.40	19.82	29.22	52.44	-23.22	Average
2	0.230	19.80	19.82	39.62	62.44	-22.82	QP
3	0.604	-4.80	19.75	14.95	46.00	-31.05	Average
4	0.604	4.40	19.75	24.15	56.00	-31.85	QP
5	0.974	-9.30	19.80	10.50	46.00	-35.50	Average
6	0.974	2.40	19.80	22.20	56.00	-33.80	QP
7	1.858	-12.31	19.84	7.53	46.00	-38.47	Average
8	1.858	-3.01	19.84	16.83	56.00	-39.17	QP
9	2.946	-3.60	19.46	15.86	46.00	-30.14	Average
10	2.946	8.90	19.46	28.36	56.00	-27.64	QP
11	24.015	-3.70	19.74	16.04	50.00	-33.96	Average
12	24.015	3.60	19.74	23.34	60.00	-36.66	QP

AC 120V/60Hz, Neutral

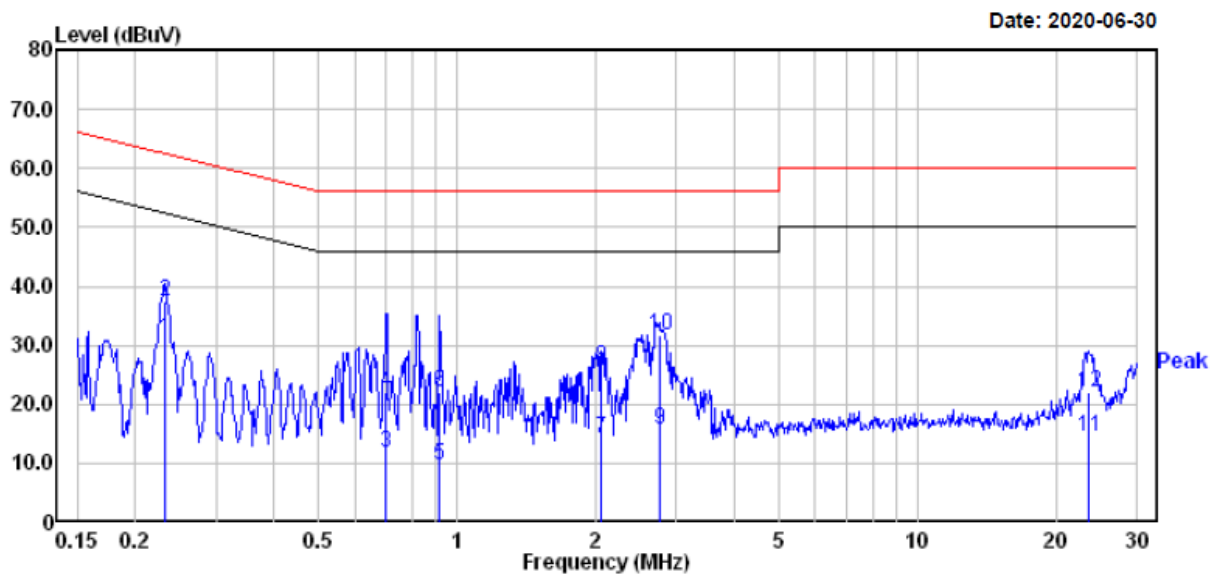


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.232	11.20	19.82	31.02	52.39	-21.37	Average
2	0.232	17.50	19.82	37.32	62.39	-25.07	QP
3	0.701	-8.10	19.75	11.65	46.00	-34.35	Average
4	0.701	2.40	19.75	22.15	56.00	-33.85	QP
5	0.918	-10.21	19.75	9.54	46.00	-36.46	Average
6	0.918	2.19	19.75	21.94	56.00	-34.06	QP
7	2.055	-5.50	19.79	14.29	46.00	-31.71	Average
8	2.055	6.40	19.79	26.19	56.00	-29.81	QP
9	2.750	-3.90	19.47	15.57	46.00	-30.43	Average
10	2.750	12.20	19.47	31.67	56.00	-24.33	QP
11	23.636	-5.20	19.76	14.56	50.00	-35.44	Average
12	23.636	2.20	19.76	21.96	60.00	-38.04	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Attenuator (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)


For FRP antenna - 50kbps

AC 120V/60Hz, Line

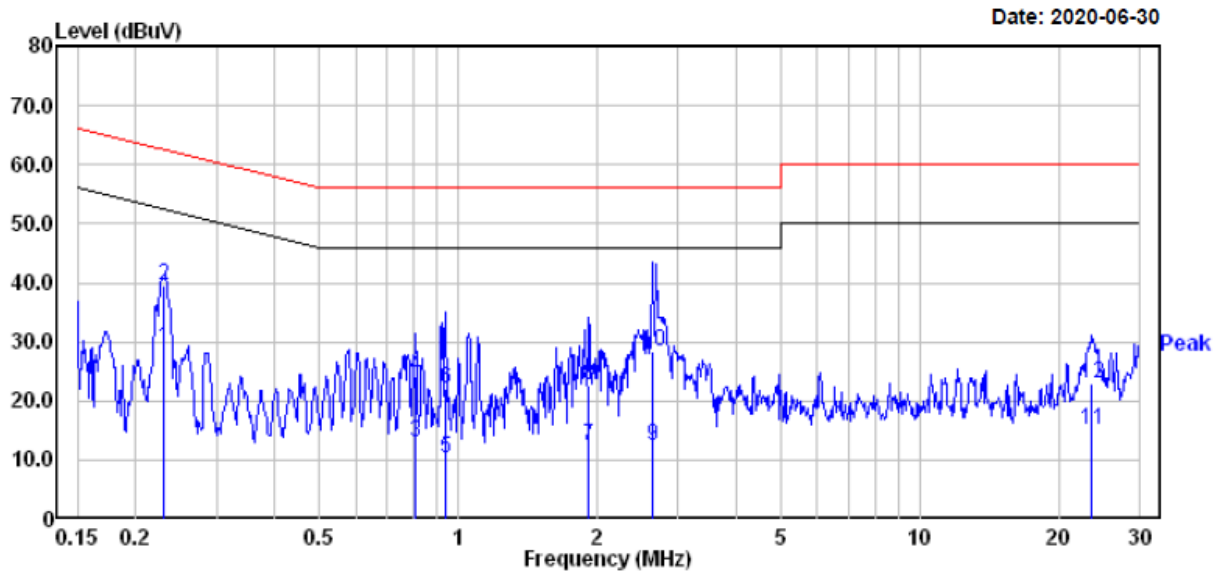

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.230	9.30	19.82	29.12	52.44	-23.32	Average
2	0.230	19.80	19.82	39.62	62.44	-22.82	QP
3	0.804	-6.70	19.70	13.00	46.00	-33.00	Average
4	0.804	4.40	19.70	24.10	56.00	-31.90	QP
5	0.938	-9.61	19.77	10.16	46.00	-35.84	Average
6	0.938	2.39	19.77	22.16	56.00	-33.84	QP
7	1.918	-7.60	19.83	12.23	46.00	-33.77	Average
8	1.918	2.90	19.83	22.73	56.00	-33.27	QP
9	2.636	-7.00	19.47	12.47	46.00	-33.53	Average
10	2.636	9.00	19.47	28.47	56.00	-27.53	QP
11	23.511	-4.71	19.77	15.06	50.00	-34.94	Average
12	23.511	3.09	19.77	22.86	60.00	-37.14	QP

AC 120V/60Hz, Neutral

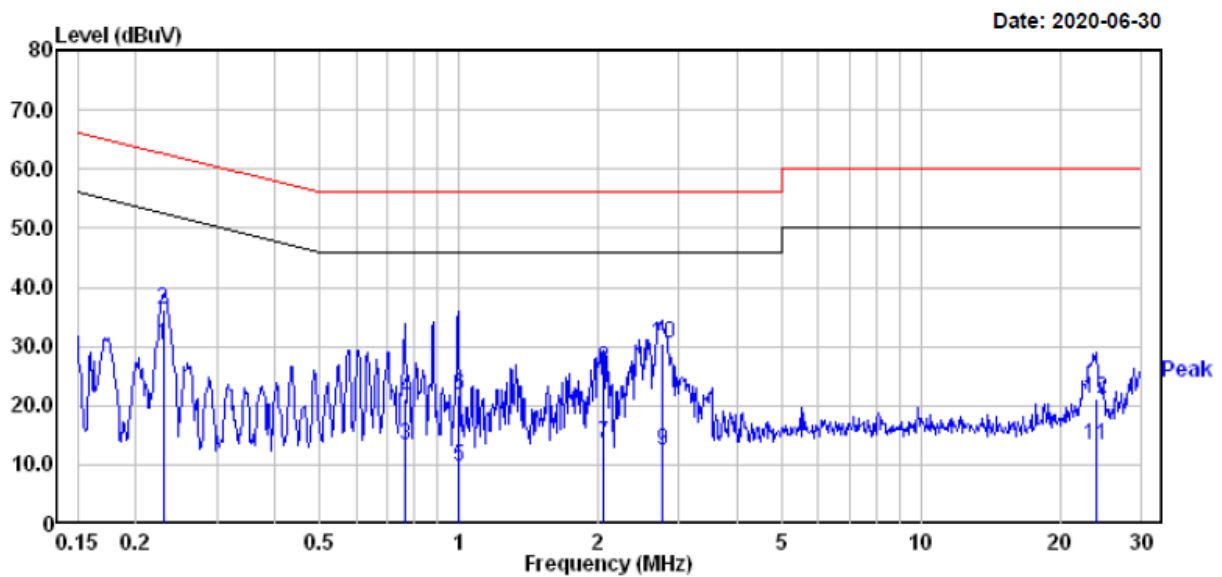


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.229	10.40	19.82	30.22	52.48	-22.26	Average
2	0.229	16.50	19.82	36.32	62.48	-26.16	QP
3	0.767	-6.50	19.72	13.22	46.00	-32.78	Average
4	0.767	1.50	19.72	21.22	56.00	-34.78	QP
5	1.000	-10.30	19.82	9.52	46.00	-36.48	Average
6	1.000	1.90	19.82	21.72	56.00	-34.28	QP
7	2.055	-6.30	19.79	13.49	46.00	-32.51	Average
8	2.055	6.50	19.79	26.29	56.00	-29.71	QP
9	2.750	-7.10	19.47	12.37	46.00	-33.63	Average
10	2.750	11.00	19.47	30.47	56.00	-25.53	QP
11	23.888	-6.49	19.74	13.25	50.00	-36.75	Average
12	23.888	1.31	19.74	21.05	60.00	-38.95	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Attenuator (dB)
- 2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)


For FRP antenna - 150kbps

AC 120V/60Hz, Line

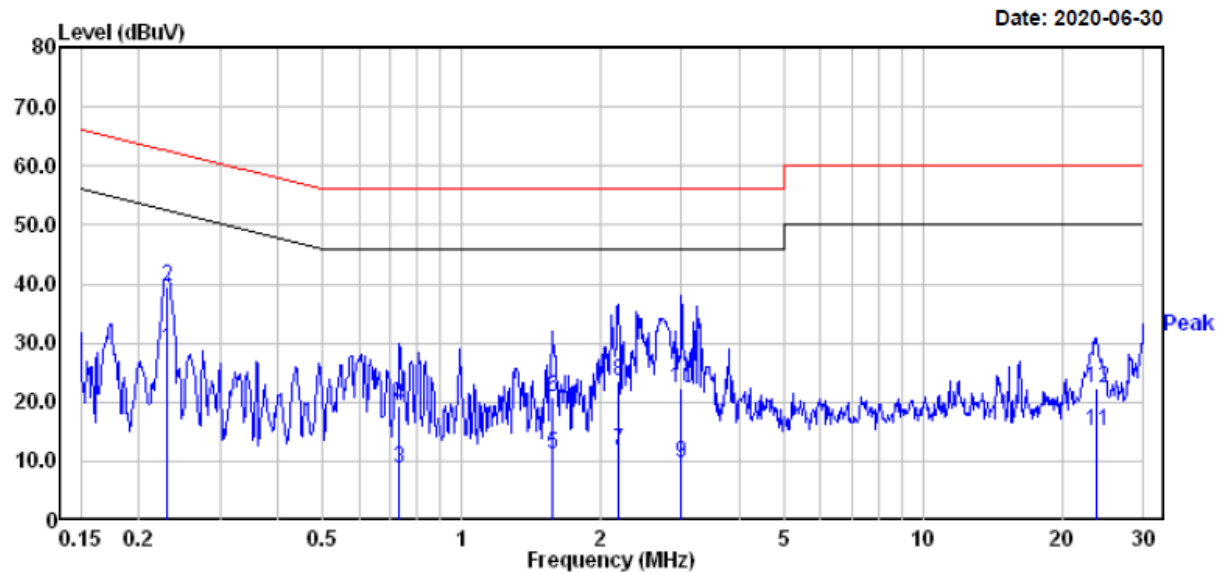

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.230	9.30	19.82	29.12	52.44	-23.32	Average
2	0.230	19.80	19.82	39.62	62.44	-22.82	QP
3	0.735	-11.00	19.73	8.73	46.00	-37.27	Average
4	0.735	-0.50	19.73	19.23	56.00	-36.77	QP
5	1.577	-8.81	19.85	11.04	46.00	-34.96	Average
6	1.577	0.89	19.85	20.74	56.00	-35.26	QP
7	2.190	-7.99	19.68	11.69	46.00	-34.31	Average
8	2.190	4.01	19.68	23.69	56.00	-32.31	QP
9	2.993	-9.70	19.46	9.76	46.00	-36.24	Average
10	2.993	2.90	19.46	22.36	56.00	-33.64	QP
11	23.762	-4.70	19.75	15.05	50.00	-34.95	Average
12	23.762	2.60	19.75	22.35	60.00	-37.65	QP

AC 120V/60Hz, Neutral

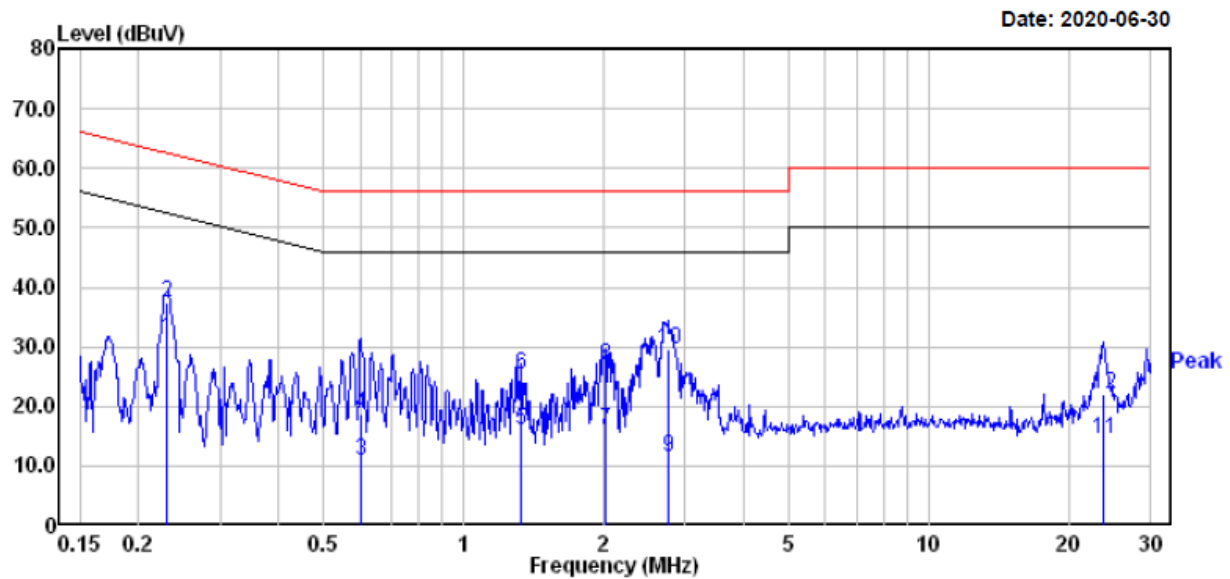

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.230	11.50	19.82	31.32	52.44	-21.12	Average
2	0.230	17.60	19.82	37.42	62.44	-25.02	QP
3	0.601	-8.90	19.75	10.85	46.00	-35.15	Average
4	0.601	-1.10	19.75	18.65	56.00	-37.35	QP
5	1.331	-3.69	19.82	16.13	46.00	-29.87	Average
6	1.331	5.51	19.82	25.33	56.00	-30.67	QP
7	2.023	-3.70	19.81	16.11	46.00	-29.89	Average
8	2.023	7.20	19.81	27.01	56.00	-28.99	QP
9	2.750	-8.00	19.47	11.47	46.00	-34.53	Average
10	2.750	10.20	19.47	29.67	56.00	-26.33	QP
11	23.762	-5.20	19.75	14.55	50.00	-35.45	Average
12	23.762	2.20	19.75	21.95	60.00	-38.05	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Attenuator (dB)


2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

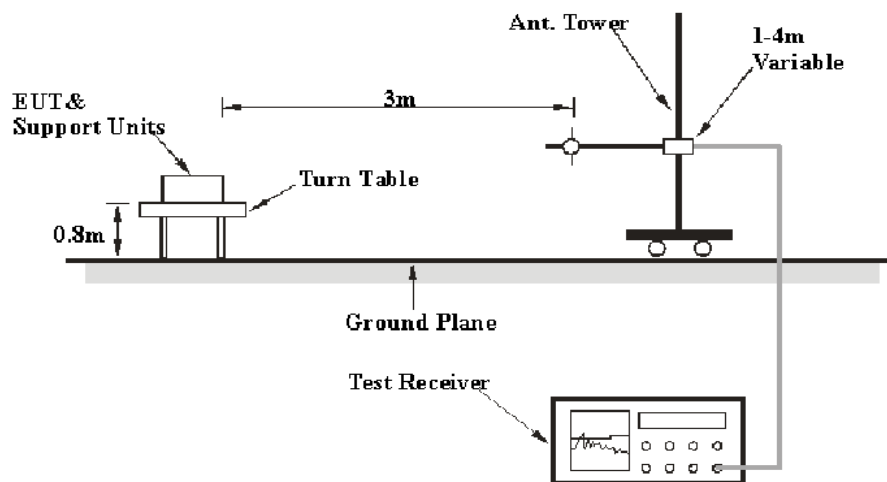

Above 1GHz:

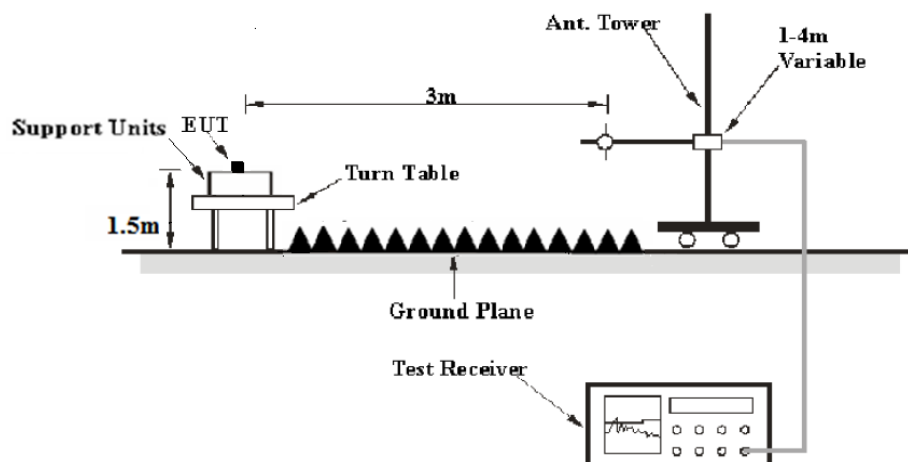

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz - 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Note: For below 1GHz: the limit of Restricted Bands Emissions is Compliant 15.209, the limit out of Restricted Bands Emissions is Compliant for 20dB below Fundamental.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV /m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	24.8~25.4℃
Relative Humidity:	49~50%
ATM Pressure:	100.7~101.2 kPa

The testing was performed by Chao Gao from 2020-07-06 to 2020-07-10.

EUT operation mode: Transmitting


For rod antenna - 50kbps

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in X-axis of orientation** was recorded.)

Note: This test was performed with the 902-928MHz notch filter.

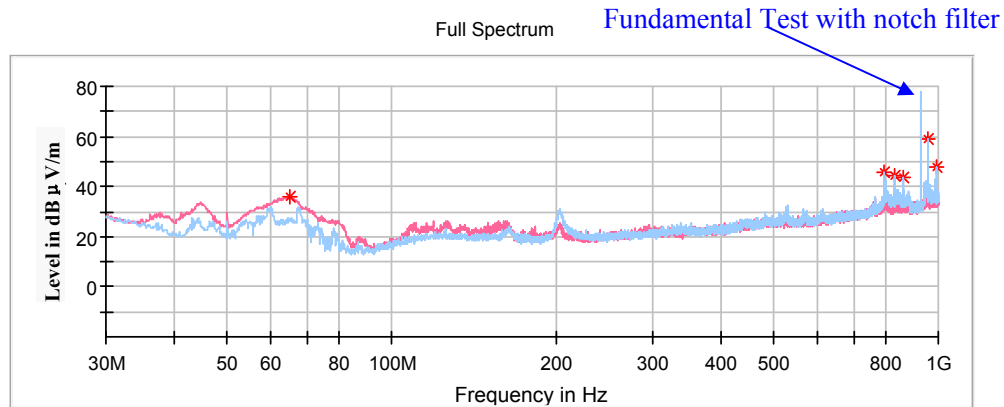

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Max Peak (dBμV/m)	Height	Polar				
		(cm)	(H/V)				
64.92	35.83	100	V	69	-18.1	103.66	67.83
797.15	45.76	100	H	199	-1.5	104.78	59.02
829.16	44.05	100	H	129	-1.0	104.78	60.73
862.99	43.73	100	H	119	-0.4	104.78	61.05
959.02	59.28	100	H	35	1.4	104.78	45.50
991.03	47.52	100	H	41	2.1	54.00	6.48

1GHz-10GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
- Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
- Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Low Channel: 902.2 MHz


Full Spectrum

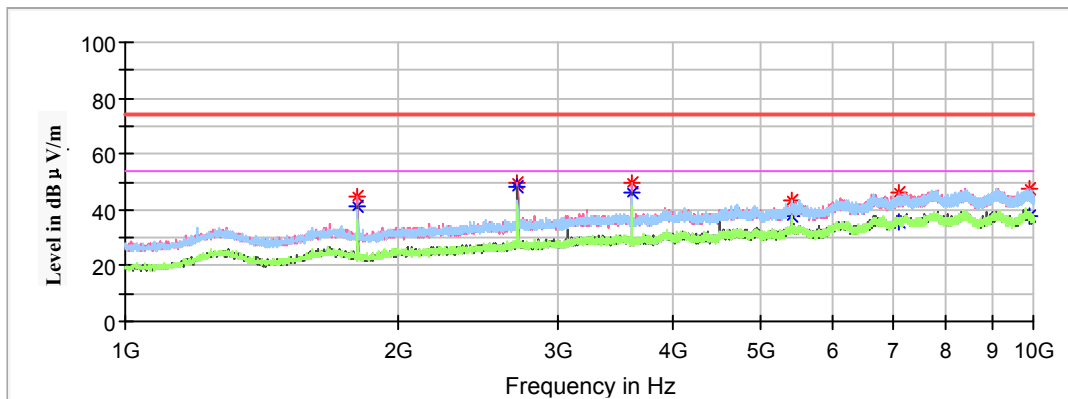

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1804.40	---	41.30	150	V	252.0	-15.2	54.00	12.70
1804.40	44.49	---	150	V	252.0	-15.2	74.00	29.51
2706.60	---	48.52	200	V	282.0	-11.5	54.00	5.48
2706.60	49.94	---	200	V	282.0	-11.5	74.00	24.06
3608.20	---	46.21	200	V	102.0	-8.4	54.00	7.79
3608.20	49.65	---	200	V	102.0	-8.4	74.00	24.35
5412.70	---	37.97	150	H	136.0	-4.1	54.00	16.03
5412.70	43.27	---	150	H	136.0	-4.1	74.00	30.73
7108.30	---	35.57	150	V	195.0	0.2	54.00	18.43
7108.30	46.15	---	150	V	195.0	0.2	74.00	27.85
9896.50	---	37.83	200	V	102.0	2.0	54.00	16.17
9896.50	47.82	---	200	V	102.0	2.0	74.00	26.18

Middle Channel: 915.0 MHz


Full Spectrum

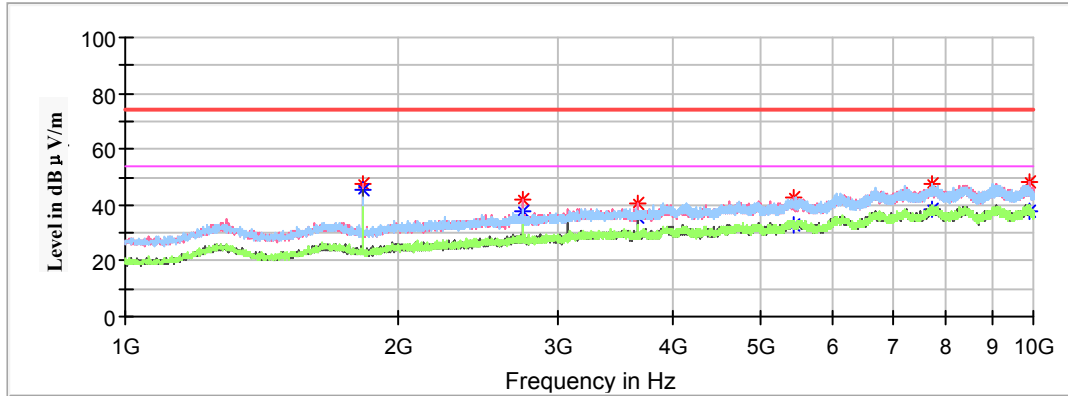

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1830.00	47.72	---	150	V	323.0	-15.1	74.00	26.28
1830.00	---	45.14	150	V	323.0	-15.1	54.00	8.86
2745.00	42.05	---	200	V	1.0	-11.3	74.00	31.95
2745.00	---	37.58	200	V	1.0	-11.3	54.00	16.42
3659.50	40.40	---	200	V	103.0	-8.2	74.00	33.60
3659.50	---	35.59	200	V	103.0	-8.2	54.00	18.41
5445.10	---	33.11	150	V	357.0	-4.0	54.00	20.89
5445.10	43.01	---	150	V	357.0	-4.0	74.00	30.99
7741.90	---	38.34	150	H	18.0	1.4	54.00	15.66
7741.90	47.78	---	150	H	18.0	1.4	74.00	26.22
9923.50	---	37.81	200	H	143.0	1.9	54.00	16.19
9923.50	48.21	---	200	H	143.0	1.9	74.00	25.79

High Channel: 927.8 MHz

Full Spectrum

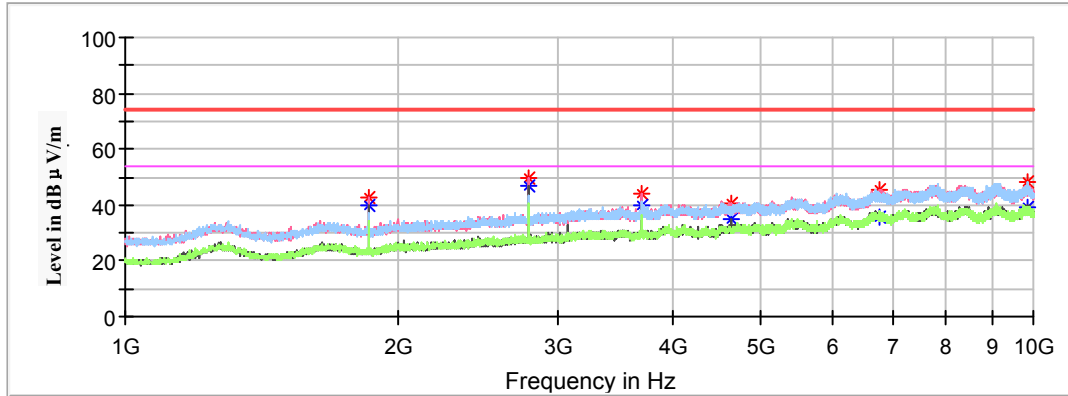

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1855.60	---	40.17	150	V	329.0	-15.0	54.00	13.83
1855.60	42.40	---	150	V	329.0	-15.0	74.00	31.60
2783.40	---	46.86	200	V	186.0	-11.1	54.00	7.14
2783.40	49.62	---	200	V	186.0	-11.1	74.00	24.38
3710.80	---	40.01	150	V	136.0	-8.1	54.00	13.99
3710.80	44.03	---	150	V	136.0	-8.1	74.00	29.97
4638.70	---	35.18	150	V	136.0	-5.9	54.00	18.82
4638.70	40.49	---	150	V	136.0	-5.9	74.00	33.51
6767.20	---	35.71	200	V	342.0	-0.6	54.00	18.29
6767.20	45.30	---	200	V	342.0	-0.6	74.00	28.70
9837.10	---	39.31	200	H	252.0	2.0	54.00	14.69
9837.10	48.24	---	200	H	252.0	2.0	74.00	25.76

Band Edge Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	(dBμV/m)	Height (cm)	Polar (H/V)	Degree			
Channel Frequency: 902.2MHz							
902.00	35.11	200	H	143	1.02	104.84	69.73
902.00	33.61	100	V	36	1.02	103.31	69.70
902.20	124.84	100	H	21	1.02	/	/
902.20	123.31	100	V	54	1.02	/	/
Channel Frequency: 927.8MHz							
927.80	124.78	100	H	46	1.67	/	/
927.80	123.66	100	V	135	1.67	/	/
928.00	36.23	100	H	304	1.68	104.78	68.55
928.00	34.49	200	V	110	1.68	103.66	69.17


For whip antenna - 50kbps

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in X-axis of orientation** was recorded.)

Note: This test was performed with the 902-928MHz notch filter.

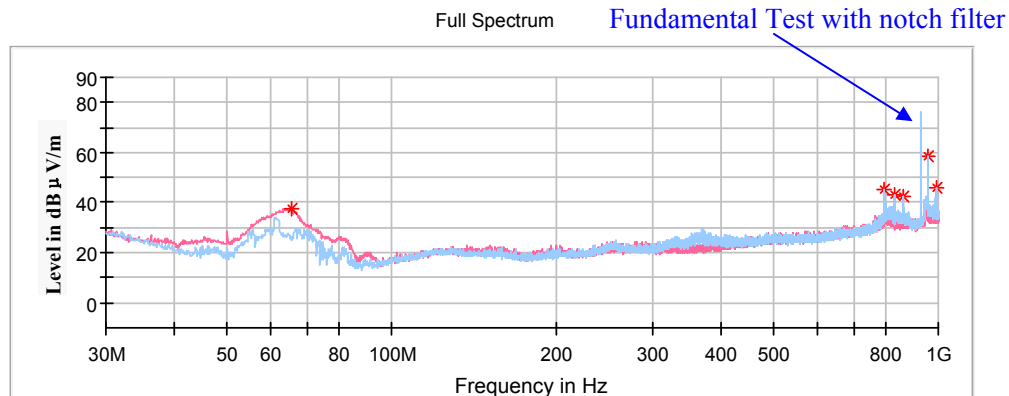

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Max Peak (dBμV/m)	Height	Polar				
		(cm)	(H/V)				
65.53	37.90	100	V	0	-18.0	101.93	64.03
796.91	45.49	100	H	145	-1.5	102.78	57.29
828.92	43.19	100	H	139	-1.0	102.78	59.59
862.99	42.16	100	H	38	-0.4	102.78	60.62
959.02	58.25	100	H	155	1.4	102.78	44.53
991.03	46.05	100	H	139	2.1	54.00	7.95

1GHz-10GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

- Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) - Corrected Amplitude (dB μ V/m)

Low Channel: 902.2 MHz


Full Spectrum

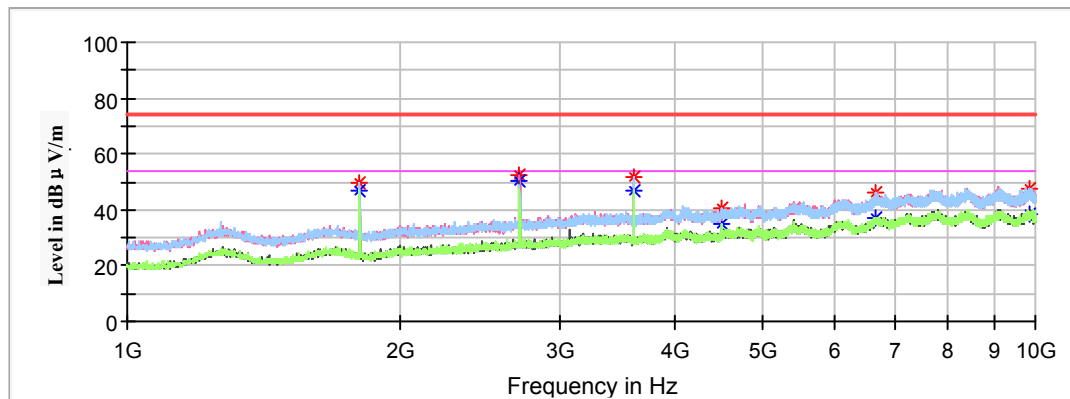

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1804.40	---	46.95	200	H	108.0	-15.2	54.00	7.05
1804.40	49.68	---	200	H	108.0	-15.2	74.00	24.32
2706.60	---	50.34	150	V	9.0	-11.5	54.00	3.66
2706.60	52.18	---	150	V	9.0	-11.5	74.00	21.82
3609.10	---	47.12	150	H	179.0	-8.4	54.00	6.88
3609.10	51.66	---	150	H	179.0	-8.4	74.00	22.34
4510.90	---	34.77	200	H	182.0	-6.2	54.00	19.23
4510.90	40.80	---	200	H	182.0	-6.2	74.00	33.20
6680.80	---	36.79	150	V	93.0	-0.8	54.00	17.21
6680.80	46.04	---	150	V	93.0	-0.8	74.00	27.96
9846.10	---	38.32	200	H	0.0	2.0	54.00	15.68
9846.10	47.61	---	200	H	0.0	2.0	74.00	26.39

Middle Channel: 915.0 MHz


Full Spectrum

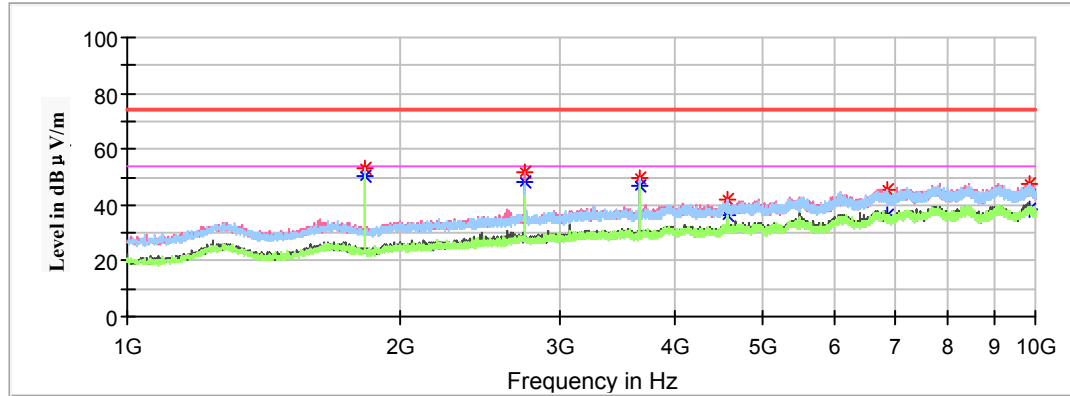

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1830.00	---	50.16	200	H	110.0	-15.1	54.00	3.84
1830.00	52.89	---	200	H	110.0	-15.1	74.00	21.11
2745.00	---	48.15	200	V	193.0	-11.3	54.00	5.85
2745.00	52.06	---	200	V	193.0	-11.3	74.00	21.94
3659.50	---	46.91	150	H	151.0	-8.2	54.00	7.09
3659.50	49.54	---	150	H	151.0	-8.2	74.00	24.46
4574.80	---	36.63	150	H	179.0	-6.1	54.00	17.37
4574.80	42.11	---	150	H	179.0	-6.1	74.00	31.89
6859.00	---	36.33	150	H	0.0	-0.4	54.00	17.67
6859.00	45.20	---	150	H	0.0	-0.4	74.00	28.80
9834.40	---	38.41	200	H	240.0	2.0	54.00	15.59
9834.40	47.35	---	200	H	240.0	2.0	74.00	26.65

High Channel: 927.8 MHz

Full Spectrum

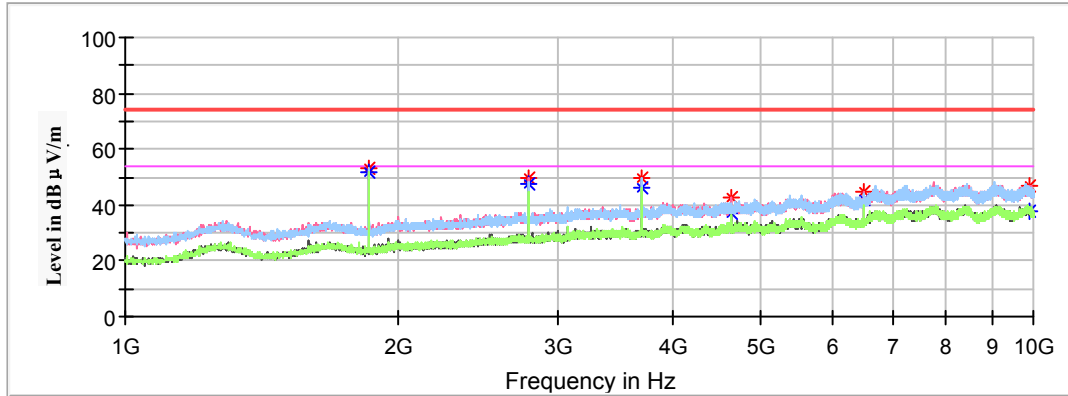

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1855.60	---	51.85	200	H	107.0	-15.0	54.00	2.15
1855.60	53.35	---	200	H	107.0	-15.0	74.00	20.65
2783.40	---	47.53	200	V	203.0	-11.1	54.00	6.47
2783.40	49.84	---	200	V	203.0	-11.1	74.00	24.16
3710.80	---	46.46	200	H	180.0	-8.1	54.00	7.54
3710.80	49.38	---	200	H	180.0	-8.1	74.00	24.62
4638.70	---	36.79	150	V	252.0	-5.9	54.00	17.21
4638.70	42.37	---	150	V	252.0	-5.9	74.00	31.63
6494.50	---	41.79	150	V	223.0	-1.2	54.00	12.21
6494.50	44.77	---	150	V	223.0	-1.2	74.00	29.23
9924.40	---	38.04	200	H	208.0	1.9	54.00	15.96
9924.40	47.10	---	200	H	208.0	1.9	74.00	26.90

Band Edge Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	(dBμV/m)	Height (cm)	Polar (H/V)	Degree			
Channel Frequency: 902.2MHz							
902.00	33.07	100	H	217	1.02	102.84	69.77
902.00	33.16	100	V	16	1.02	102.36	69.20
902.20	122.84	100	H	65	1.02	/	/
902.20	122.36	100	V	95	1.02	/	/
Channel Frequency: 927.8MHz							
927.80	122.78	100	H	321	1.67	/	/
927.80	121.93	100	V	57	1.67	/	/
928.00	32.91	200	H	359	1.68	102.78	69.87
928.00	33.44	200	V	148	1.68	101.93	68.49


For FRP antenna - 50kbps

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in X-axis of orientation** was recorded.)

Note: This test was performed with the 902-928MHz notch filter.

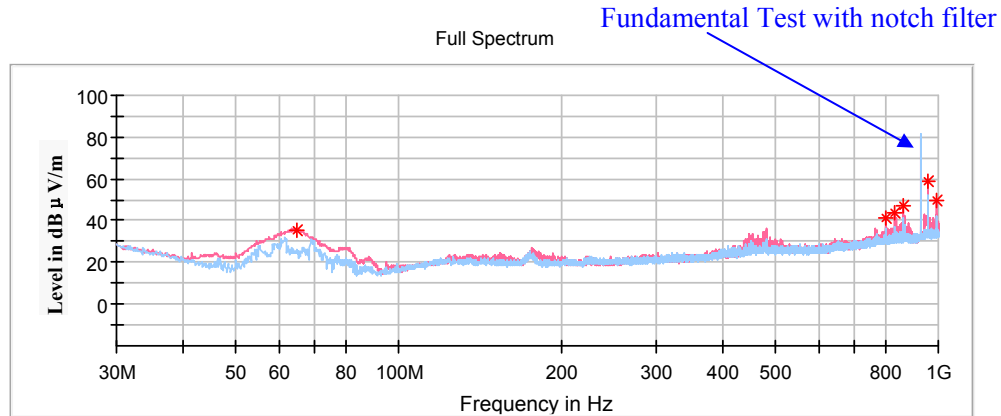

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	Max Peak (dBµV/m)	Height	Polar				
		(cm)	(H/V)				
65.04	35.79	100	V	215	-18.0	103.01	67.22
797.15	41.02	200	V	148	-1.5	103.01	61.99
828.92	43.88	200	V	114	-1.0	103.01	59.13
863.11	46.95	200	V	77	-0.4	103.01	56.06
959.02	58.58	100	V	66	1.4	103.01	44.43
991.15	49.25	100	V	298	2.1	54.00	4.75

1GHz-10GHz

(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:


1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Low Channel: 902.2 MHz


Full Spectrum

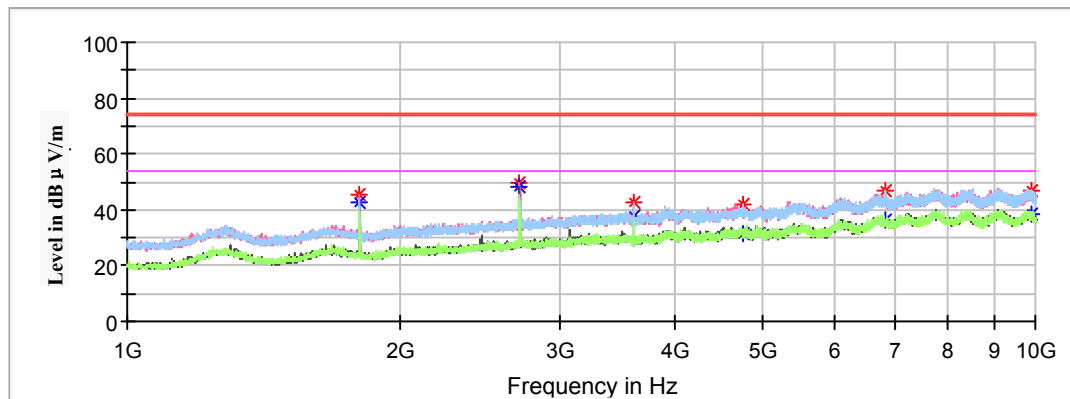

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1804.40	---	42.53	200	V	314.0	-15.2	54.00	11.47
1804.40	45.73	---	200	V	314.0	-15.2	74.00	28.27
2706.60	---	48.39	200	V	19.0	-11.5	54.00	5.61
2706.60	49.69	---	200	V	19.0	-11.5	74.00	24.31
3609.10	---	37.50	200	V	300.0	-8.4	54.00	16.50
3609.10	42.56	---	200	V	300.0	-8.4	74.00	31.44
4770.10	---	31.45	150	H	251.0	-5.7	54.00	22.55
4770.10	41.85	---	150	H	251.0	-5.7	74.00	32.15
6828.40	---	36.29	200	H	132.0	-0.4	54.00	17.71
6828.40	47.06	---	200	H	132.0	-0.4	74.00	26.94
9918.10	---	38.14	150	V	62.0	1.9	54.00	15.86
9918.10	47.10	---	150	V	62.0	1.9	74.00	26.90

Middle Channel: 915.0 MHz


Full Spectrum

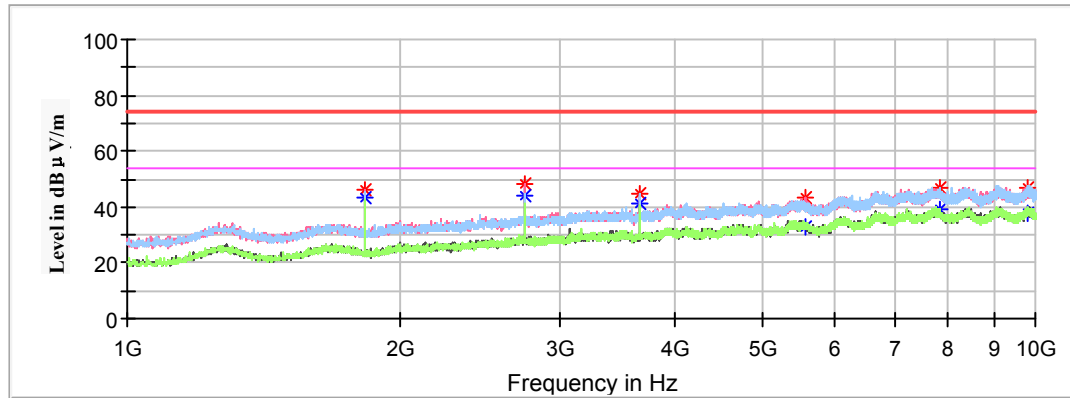

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1830.00	---	43.09	200	V	187.0	-15.1	54.00	10.91
1830.00	45.94	---	200	V	187.0	-15.1	74.00	28.06
2745.00	---	44.31	150	V	123.0	-11.3	54.00	9.69
2745.00	47.95	---	150	V	123.0	-11.3	74.00	26.05
3659.50	---	41.49	200	V	313.0	-8.2	54.00	12.51
3659.50	44.60	---	200	V	313.0	-8.2	74.00	29.40
5571.10	---	32.70	200	H	58.0	-3.8	54.00	21.30
5571.10	43.14	---	200	H	58.0	-3.8	74.00	30.86
7847.20	---	38.89	200	H	281.0	1.6	54.00	15.11
7847.20	46.98	---	200	H	281.0	1.6	74.00	27.02
9788.50	---	37.49	150	V	108.0	2.0	54.00	16.51
9788.50	47.20	---	150	V	108.0	2.0	74.00	26.80

High Channel: 927.8 MHz

Full Spectrum

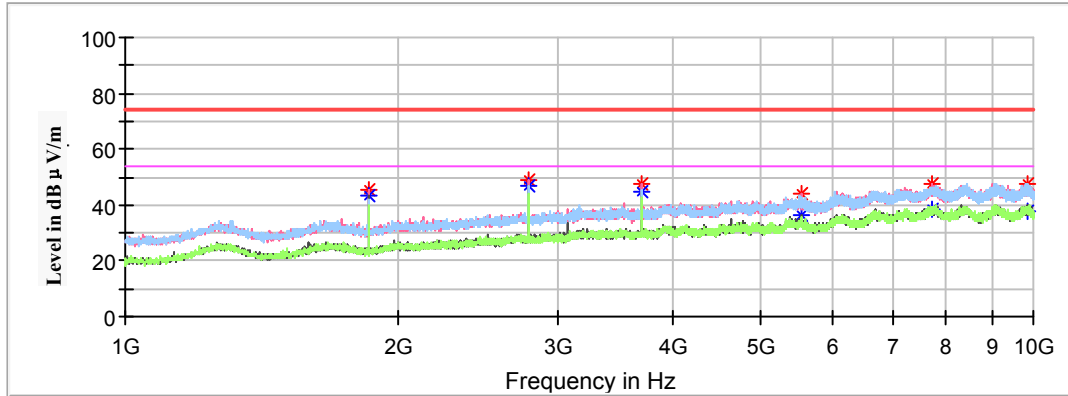

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1855.60	---	43.33	150	V	315.0	-15.0	54.00	10.67
1855.60	45.24	---	150	V	315.0	-15.0	74.00	28.76
2783.40	---	46.89	200	V	238.0	-11.1	54.00	7.11
2783.40	49.01	---	200	V	238.0	-11.1	74.00	24.99
3710.80	---	44.53	150	V	59.0	-8.1	54.00	9.47
3710.80	47.27	---	150	V	59.0	-8.1	74.00	26.73
5566.60	---	36.23	150	V	210.0	-3.8	54.00	17.77
5566.60	43.71	---	150	V	210.0	-3.8	74.00	30.29
7716.70	---	38.19	200	V	0.0	1.4	54.00	15.81
7716.70	47.26	---	200	V	0.0	1.4	74.00	26.74
9869.50	---	38.01	150	H	123.0	2.0	54.00	15.99
9869.50	47.67	---	150	H	123.0	2.0	74.00	26.33

Band Edge Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)


Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	(dBμV/m)	Height (cm)	Polar (H/V)	Degree			
Channel Frequency: 902.2MHz							
902.00	32.61	100	H	357	1.02	103.84	71.23
902.00	37.34	100	V	162	1.02	103.13	65.79
902.20	123.84	100	H	87	1.02	/	/
902.20	123.13	100	V	31	1.02	/	/
Channel Frequency: 927.8MHz							
927.80	123.78	100	H	354	1.67	/	/
927.80	123.01	100	V	2	1.67	/	/
928.00	33.15	200	H	149	1.68	103.78	70.63
928.00	36.53	100	V	201	1.68	103.01	66.48


Conducted Spurious Emissions at Antenna Port:

Low Channel

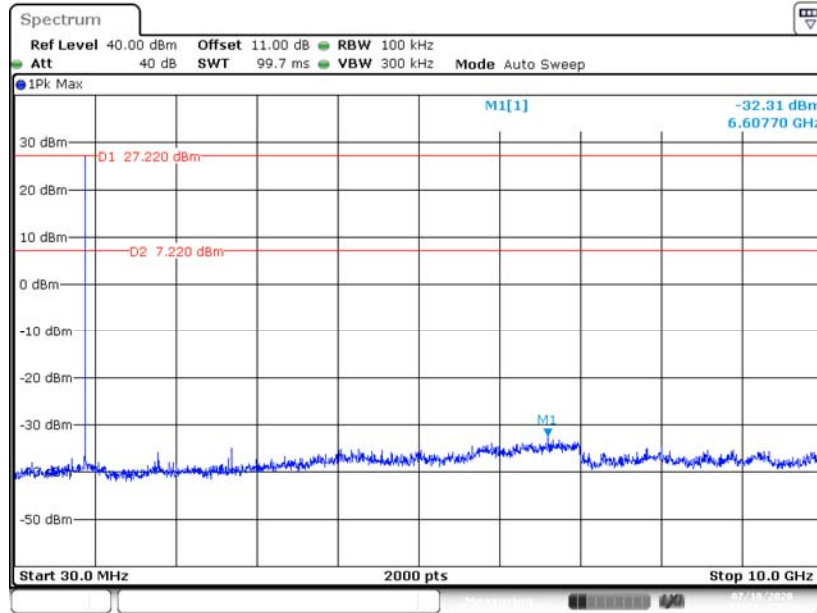


Date: 10 JUL 2020 15:34:31

Middle Channel

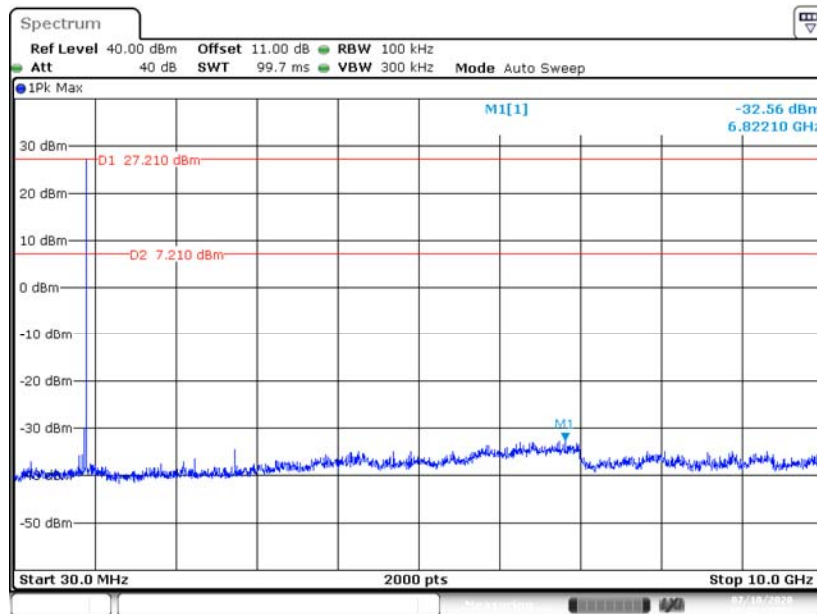

Date: 10 JUL 2020 15:32:20

High Channel

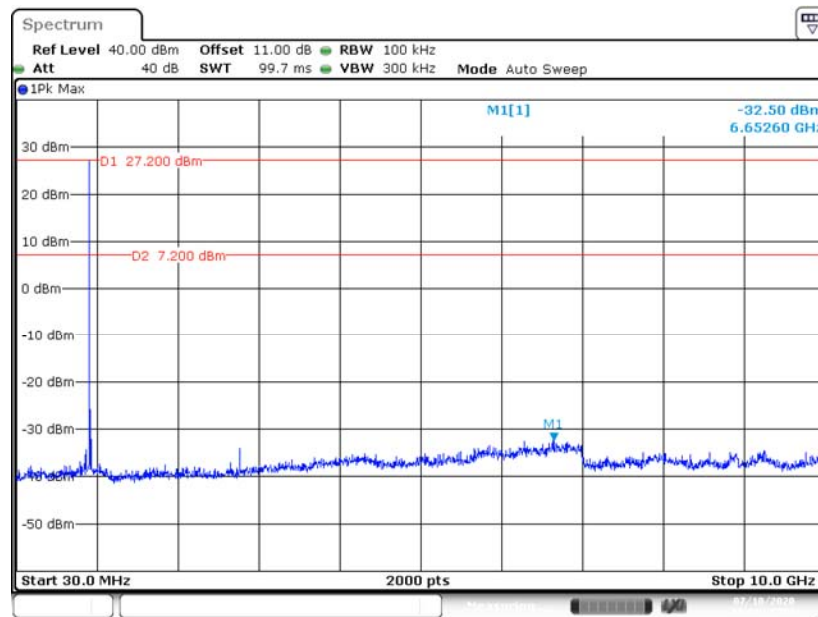

Date: 10 JUL 2020 15:31:25


For rod antenna - 150kbps

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in X-axis of orientation** was recorded.)

Note: This test was performed with the 902-928MHz notch filter.

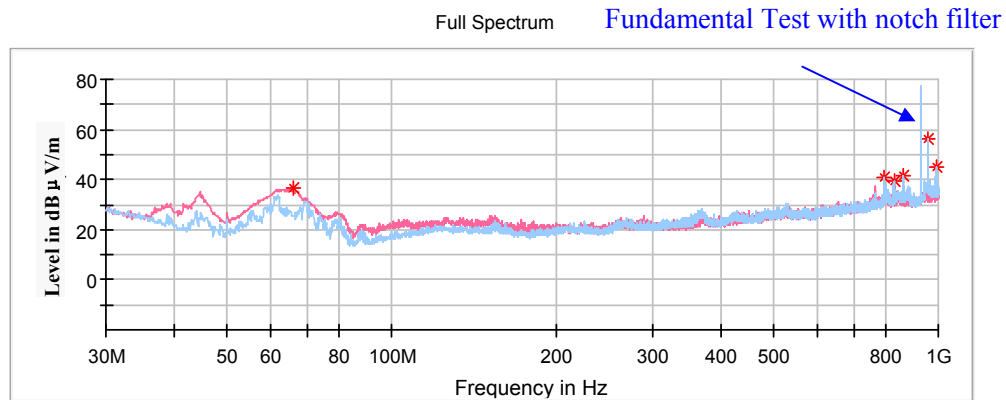

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Max Peak (dBμV/m)	Height	Polar				
		(cm)	(H/V)				
66.01	36.36	100	V	306	-18.0	103.95	67.59
796.30	40.82	100	H	287	-1.5	104.77	63.95
828.43	39.29	200	H	57	-1.0	104.77	65.48
862.87	41.23	100	H	160	-0.4	104.77	63.54
958.90	56.16	100	H	150	1.4	104.77	48.61
990.79	45.31	100	H	92	2.1	54.00	8.69

1GHz-10GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

- Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Low Channel: 902.4 MHz


Full Spectrum

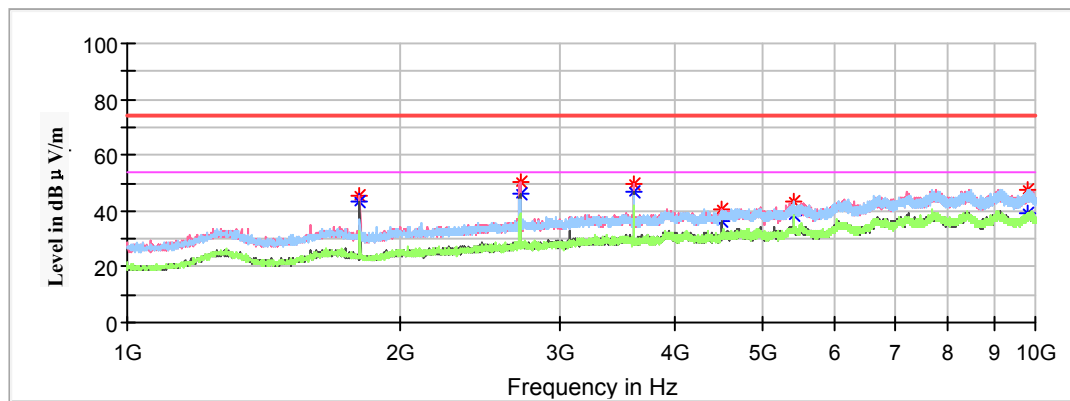

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1804.80	---	43.11	200	V	280.0	-15.2	54.00	10.89
1804.80	45.78	---	200	V	280.0	-15.2	74.00	28.22
2707.20	---	46.21	200	V	266.0	-11.5	54.00	7.79
2707.20	50.35	---	200	V	266.0	-11.5	74.00	23.65
3609.10	---	46.68	200	V	92.0	-8.4	54.00	7.32
3609.10	49.35	---	200	V	92.0	-8.4	74.00	24.65
4511.80	---	36.06	200	V	107.0	-6.2	54.00	17.94
4511.80	40.67	---	200	V	107.0	-6.2	74.00	33.33
5414.50	---	38.76	150	H	253.0	-4.1	54.00	15.24
5414.50	43.07	---	150	H	253.0	-4.1	74.00	30.93
9820.00	---	39.11	150	H	238.0	2.0	54.00	14.89
9820.00	47.72	---	150	H	238.0	2.0	74.00	26.28

Middle Channel: 915.2 MHz


Full Spectrum

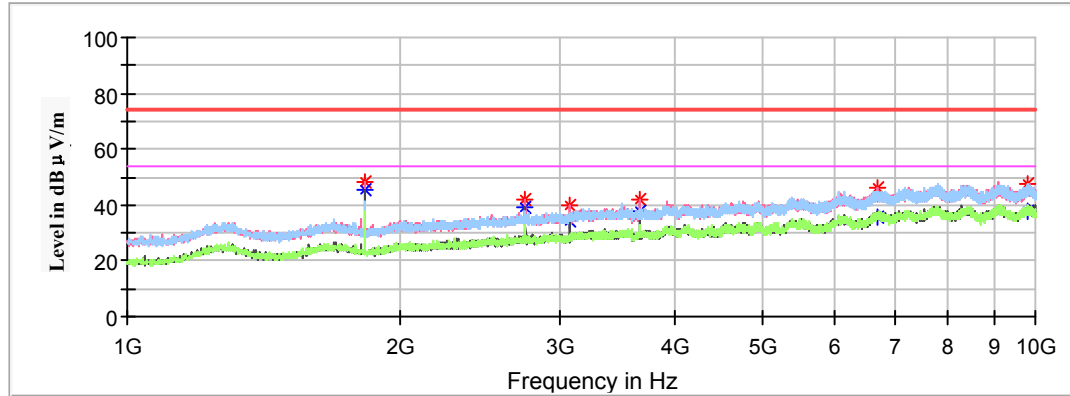

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1830.40	---	45.75	150	V	329.0	-15.1	54.00	8.25
1830.40	48.29	---	150	V	329.0	-15.1	74.00	25.71
2745.60	---	39.07	200	V	224.0	-11.3	54.00	14.93
2745.60	41.85	---	200	V	224.0	-11.3	74.00	32.15
3071.80	---	34.17	150	V	232.0	-9.9	54.00	19.83
3071.80	39.58	---	150	V	232.0	-9.9	74.00	34.42
3660.40	---	37.45	150	V	329.0	-8.2	54.00	16.55
3660.40	42.17	---	150	V	329.0	-8.2	74.00	31.83
6716.80	---	35.99	150	H	295.0	-0.7	54.00	18.01
6716.80	46.15	---	150	H	295.0	-0.7	74.00	27.85
9788.50	---	37.51	150	H	196.0	2.0	54.00	16.49
9788.50	47.33	---	150	H	196.0	2.0	74.00	26.67

High Channel: 927.6 MHz

Full Spectrum

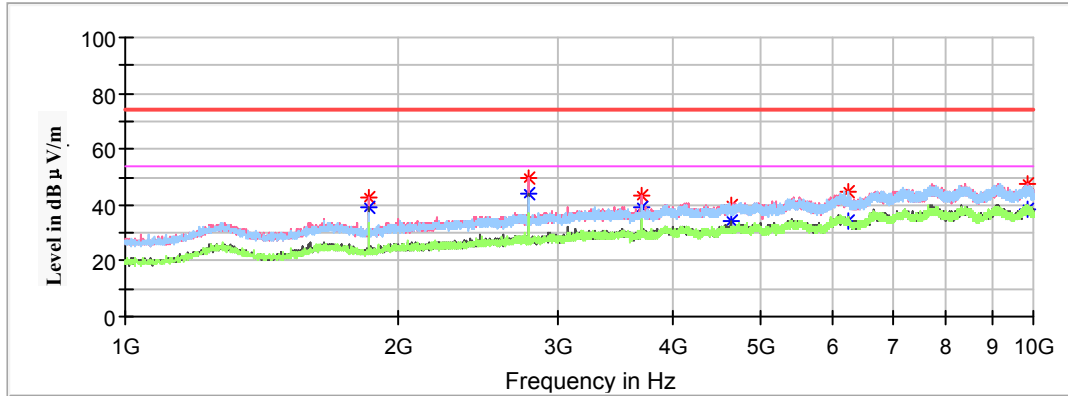

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1855.20	---	39.02	150	V	313.0	-15.0	54.00	14.98
1855.20	42.65	---	150	V	313.0	-15.0	74.00	31.35
2782.80	---	44.20	200	V	192.0	-11.1	54.00	9.80
2782.80	49.57	---	200	V	192.0	-11.1	74.00	24.43
3709.90	---	39.29	150	V	136.0	-8.1	54.00	14.71
3709.90	43.27	---	150	V	136.0	-8.1	74.00	30.73
4637.80	---	34.59	150	V	165.0	-5.9	54.00	19.41
4637.80	40.04	---	150	V	165.0	-5.9	74.00	33.96
6245.20	---	34.55	200	H	203.0	-2.1	54.00	19.45
6245.20	44.49	---	200	H	203.0	-2.1	74.00	29.51
9834.40	---	38.54	150	V	0.0	2.0	54.00	15.46
9834.40	47.23	---	150	V	0.0	2.0	74.00	26.77

Band Edge Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	(dBμV/m)	Height (cm)	Polar (H/V)	Degree			
Channel Frequency: 902.4MHz							
902.00	34.62	100	H	127	1.02	105.00	70.38
902.00	34.15	200	V	46	1.02	104.26	70.11
902.40	125.00	100	H	96	1.03	/	/
902.40	124.26	100	V	167	1.03	/	/
Channel Frequency: 927.6MHz							
927.60	124.77	100	H	35	1.67	/	/
927.60	123.95	100	V	79	1.67	/	/
928.00	35.73	100	H	121	1.68	104.77	69.04
928.00	35.10	100	V	156	1.68	103.95	68.85


For whip antenna - 150kbps

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in X-axis of orientation** was recorded.)

Note: This test was performed with the 902-928MHz notch filter.

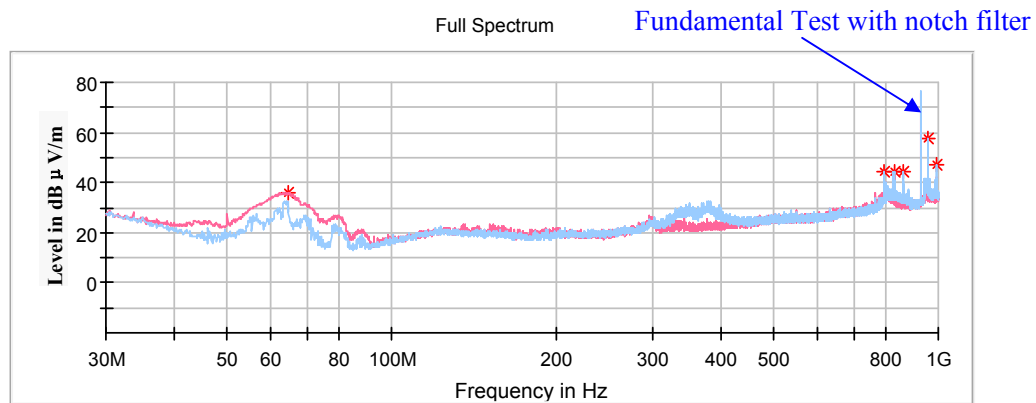

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Max Peak (dBμV/m)	Height	Polar				
		(cm)	(H/V)				
64.80	36.05	100	V	20	-18.1	101.63	65.58
796.54	44.35	100	H	52	-1.5	102.77	58.42
828.55	44.44	200	H	71	-1.0	102.77	58.33
862.87	44.66	200	H	145	-0.4	102.77	58.11
958.90	57.61	100	H	46	1.4	102.77	45.16
990.91	47.33	100	H	46	2.1	54.00	6.67

1GHz-10GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

- Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) - Corrected Amplitude (dB μ V /m)

Low Channel: 902.4 MHz


Full Spectrum

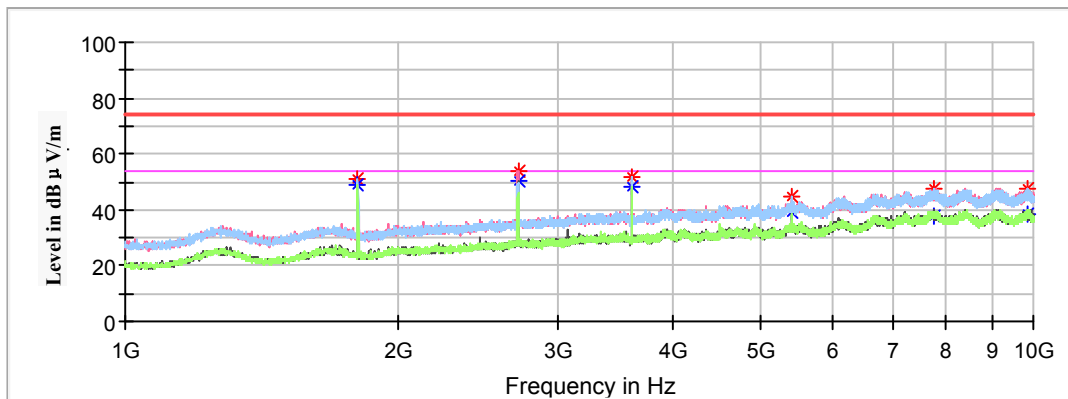

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1804.80	---	48.85	150	H	122.0	-15.2	54.00	5.15
1804.80	51.16	---	150	H	122.0	-15.2	74.00	22.84
2707.20	---	50.37	150	V	185.0	-11.5	54.00	3.63
2707.20	53.91	---	150	V	185.0	-11.5	74.00	20.09
3609.10	---	48.39	150	H	151.0	-8.4	54.00	5.61
3609.10	51.50	---	150	H	151.0	-8.4	74.00	22.50
5414.50	---	39.15	200	V	228.0	-4.1	54.00	14.85
5414.50	44.45	---	200	V	228.0	-4.1	74.00	29.55
7790.50	---	37.72	150	H	94.0	1.5	54.00	16.28
7790.50	47.60	---	150	H	94.0	1.5	74.00	26.40
9859.60	---	38.40	200	H	200.0	2.0	54.00	15.60
9859.60	47.24	---	200	H	200.0	2.0	74.00	26.76

Middle Channel: 915.2 MHz


Full Spectrum

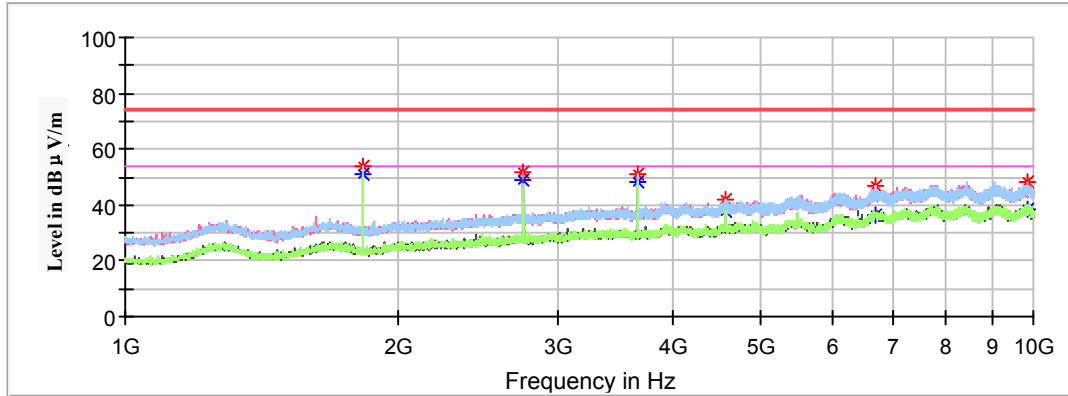

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1830.40	53.66	---	200	H	108.0	-15.1	74.00	20.34
1830.40	---	51.33	200	H	108.0	-15.1	54.00	2.67
2745.60	51.56	---	200	V	208.0	-11.3	74.00	22.44
2745.60	---	48.75	200	V	208.0	-11.3	54.00	5.25
3660.40	50.81	---	150	H	187.0	-8.2	74.00	23.19
3660.40	---	48.28	150	H	187.0	-8.2	54.00	5.72
4575.70	41.98	---	150	H	187.0	-6.1	74.00	32.02
4575.70	---	37.77	150	H	187.0	-6.1	54.00	16.23
6688.00	---	36.11	200	H	181.0	-0.8	54.00	17.89
6688.00	46.53	---	200	H	181.0	-0.8	74.00	27.47
9857.80	---	38.28	200	V	3.0	2.0	54.00	15.72
9857.80	48.15	---	200	V	3.0	2.0	74.00	25.85

High Channel: 927.6 MHz

Full Spectrum

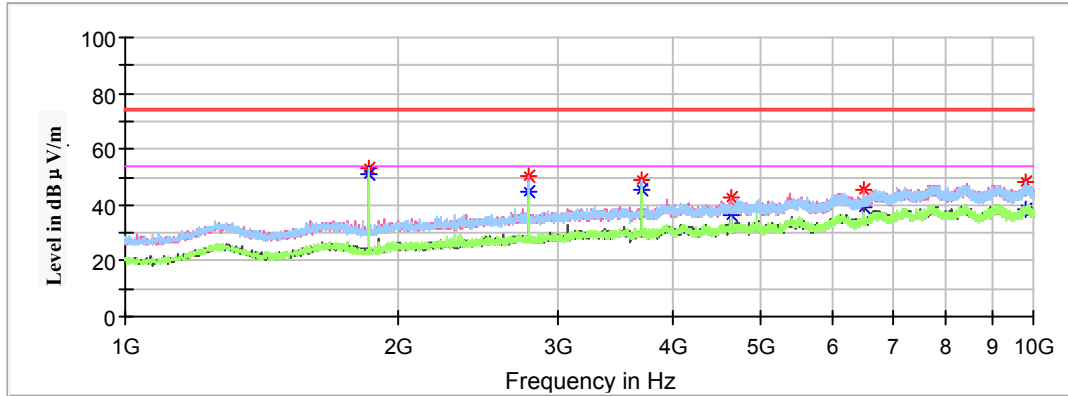

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1855.20	---	50.96	200	H	108.0	-15.0	54.00	3.04
1855.20	53.45	---	200	H	108.0	-15.0	74.00	20.55
2782.80	---	44.99	150	V	215.0	-11.1	54.00	9.01
2782.80	50.56	---	150	V	215.0	-11.1	74.00	23.44
3709.90	---	45.25	200	H	181.0	-8.1	54.00	8.75
3709.90	48.96	---	200	H	181.0	-8.1	74.00	25.04
4637.80	---	36.22	150	V	343.0	-5.9	54.00	17.78
4637.80	42.74	---	150	V	343.0	-5.9	74.00	31.26
6493.60	---	39.19	150	V	215.0	-1.2	54.00	14.81
6493.60	45.74	---	150	V	215.0	-1.2	74.00	28.26
9822.70	---	38.40	200	V	217.0	2.0	54.00	15.60
9822.70	48.51	---	200	H	217.0	2.0	74.00	25.49

Band Edge Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	(dBμV/m)	Height (cm)	Polar (H/V)	Degree			
Channel Frequency: 902.4MHz							
902.00	34.08	200	H	222	1.02	103.00	68.92
902.00	32.83	100	V	231	1.02	102.41	69.58
902.40	123.00	100	H	343	1.03	/	/
902.40	122.41	100	V	49	1.03	/	/
Channel Frequency: 927.6MHz							
927.60	122.77	100	H	64	1.67	/	/
927.60	121.63	100	V	36	1.67	/	/
928.00	33.70	100	H	1	1.68	102.77	69.07
928.00	33.54	200	V	186	1.68	101.63	68.09


For FRP antenna - 150kbps

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in X-axis of orientation** was recorded.)

Note: This test was performed with the 902-928MHz notch filter.

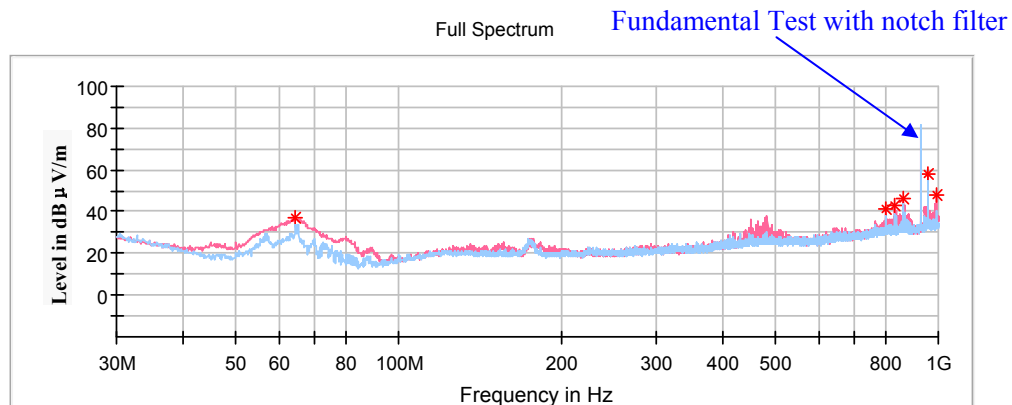

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Max Peak (dBμV/m)	Height	Polar				
		(cm)	(H/V)				
64.19	36.82	100	V	251	-18.1	102.83	66.01
796.54	41.34	200	V	125	-1.5	102.83	61.49
828.31	43.33	200	V	104	-1.0	102.83	58.97
862.87	46.00	200	V	62	-0.4	102.83	56.83
958.90	58.43	100	V	68	1.4	102.83	44.40
990.91	48.34	100	V	63	2.1	54.00	5.66

1GHz-10GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
- Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
- Margin (dB) = Limit (dB μ V/m) - Corrected Amplitude (dB μ V /m)

Low Channel: 902.4 MHz


Full Spectrum

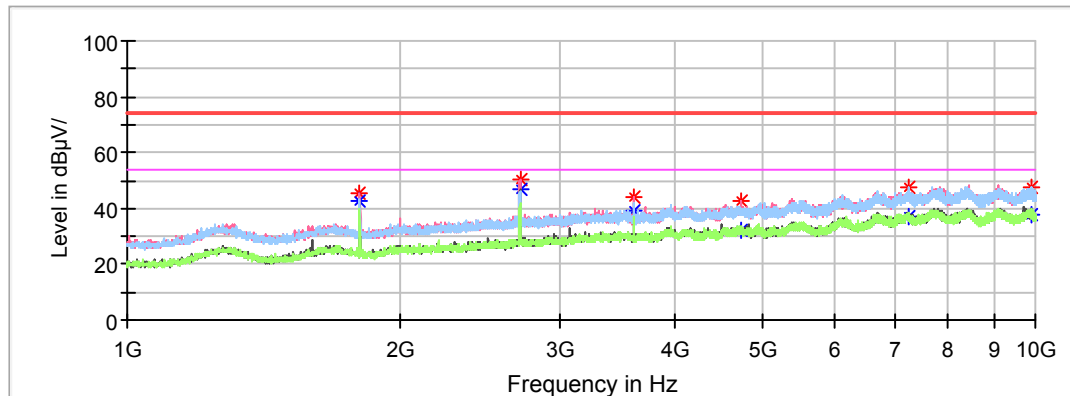

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1804.80	45.13	---	200	V	328.0	-15.2	74.00	28.87
1804.80	---	42.50	200	V	328.0	-15.2	54.00	11.50
2707.20	50.64	---	200	V	29.0	-11.5	74.00	23.36
2707.20	---	47.03	200	V	29.0	-11.5	54.00	6.97
3609.10	43.88	---	150	V	332.0	-8.4	74.00	30.12
3609.10	---	38.95	150	V	332.0	-8.4	54.00	15.05
4732.30	42.31	---	200	V	109.0	-5.7	74.00	31.69
4732.30	---	32.06	200	V	109.0	-5.7	54.00	21.94
7260.40	47.62	---	200	H	0.0	0.5	74.00	26.38
7260.40	---	37.32	200	H	0.0	0.5	54.00	16.68
9899.20	---	37.77	150	V	303.0	2.0	54.00	16.23
9899.20	47.35	---	150	V	303.0	2.0	74.00	26.65

Middle Channel: 915.2 MHz


Full Spectrum

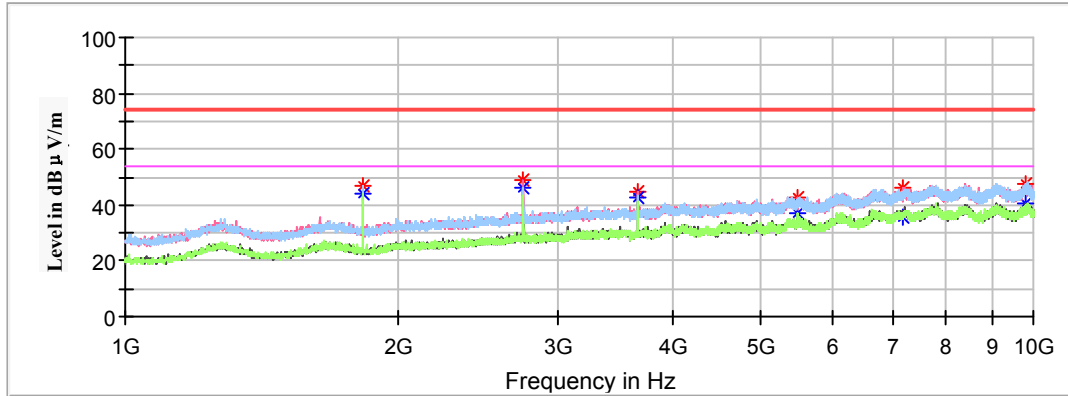

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1830.40	46.59	---	150	H	313.0	-15.1	74.00	27.41
1830.40	---	43.78	150	H	313.0	-15.1	54.00	10.22
2745.10	49.08	---	200	V	10.0	-11.3	74.00	24.92
2745.10	---	46.47	200	V	10.0	-11.3	54.00	7.53
3660.40	45.00	---	200	V	64.0	-8.2	74.00	29.00
3660.40	---	42.88	200	V	64.0	-8.2	54.00	11.12
5491.00	42.33	---	150	H	64.0	-3.9	74.00	31.67
5491.00	---	37.33	150	H	64.0	-3.9	54.00	16.67
7180.30	---	35.87	200	H	350.0	0.3	54.00	18.13
7180.30	46.07	---	200	H	350.0	0.3	74.00	27.93
9784.90	---	40.54	150	V	3.0	2.0	54.00	13.46
9784.90	47.80	---	150	V	3.0	2.0	74.00	26.20

High Channel: 927.6 MHz

Full Spectrum

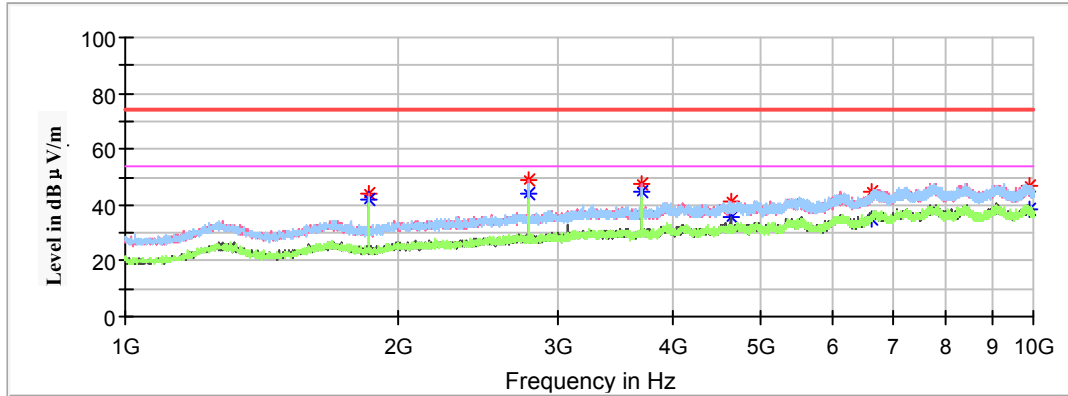

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1855.20	---	41.67	150	V	316.0	-15.0	54.00	12.33
1855.20	44.30	---	150	V	316.0	-15.0	74.00	29.70
2782.80	---	44.13	200	V	164.0	-11.1	54.00	9.87
2782.80	48.88	---	200	V	164.0	-11.1	74.00	25.12
3709.90	---	44.64	200	V	63.0	-8.1	54.00	9.36
3709.90	47.58	---	200	V	63.0	-8.1	74.00	26.42
4637.80	---	35.35	200	V	0.0	-5.9	54.00	18.65
4637.80	41.22	---	200	V	0.0	-5.9	74.00	32.78
6619.60	---	35.29	150	H	117.0	-0.9	54.00	18.71
6619.60	44.92	---	150	H	117.0	-0.9	74.00	29.08
9900.10	---	38.53	200	H	7.0	2.0	54.00	15.47
9900.10	47.05	---	200	H	7.0	2.0	74.00	26.95

Band Edge Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)


Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	(dBμV/m)	Height (cm)	Polar (H/V)	Degree			
Channel Frequency: 902.4MHz							
902.00	33.06	200	H	25	1.02	104.00	70.94
902.00	38.07	200	V	191	1.02	103.08	65.01
902.40	124.00	100	H	186	1.03	/	/
902.40	123.08	100	V	264	1.03	/	/
Channel Frequency: 927.6MHz							
927.60	123.77	100	H	65	1.67	/	/
927.60	122.83	100	V	132	1.67	/	/
928.00	33.13	100	H	359	1.68	103.77	70.64
928.00	36.04	100	V	251	1.68	102.83	66.79


Conducted Spurious Emissions at Antenna Port:

Low Channel

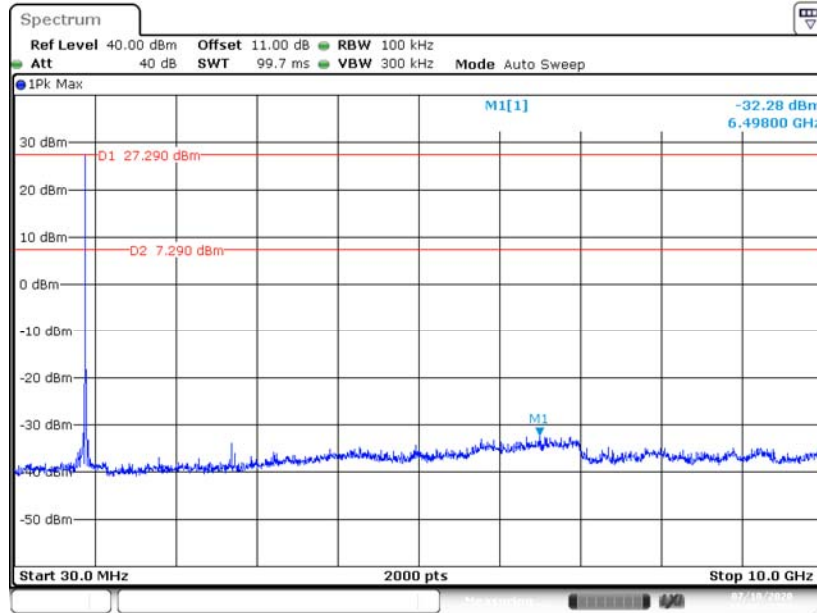


Date: 10 JUL 2020 15:36:48

Middle Channel

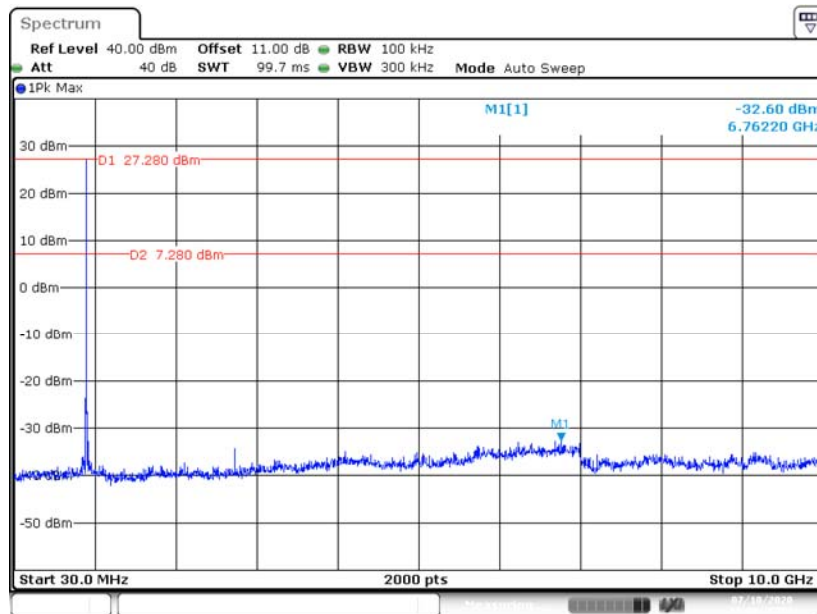

Date: 10 JUL 2020 15:38:35

High Channel

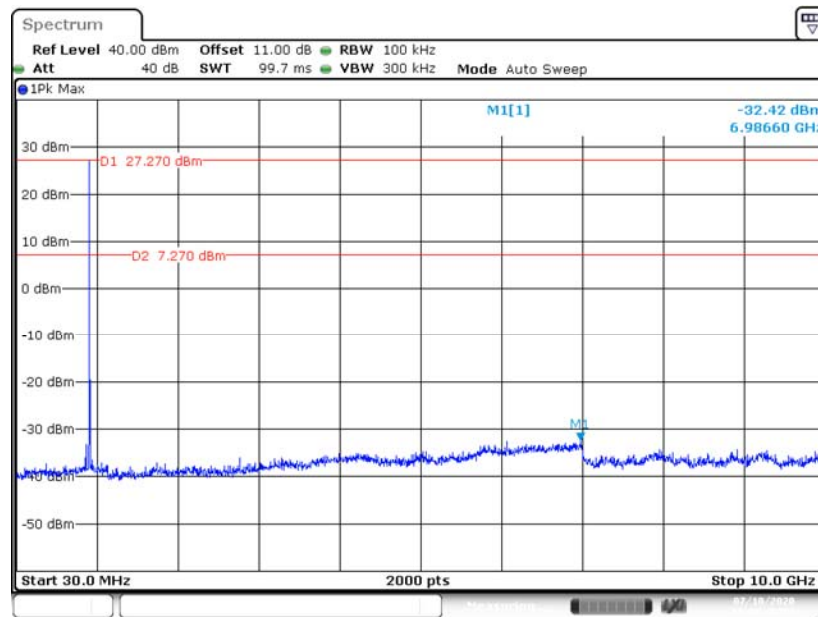

FCC §15.247(a) (1)- CHANNEL SEPARATION TEST**Applicable Standard**

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Chao Gao on 2020-07-10.


EUT operation mode: Transmitting

Test Result: Compliant.

For 50kbps:


Center Frequency (MHz)	Channel Separation (kHz)	Limit (kHz)	Result
902.3	199.710	≥ 103.80	Pass
915.1	199.710	≥ 103.65	Pass
927.7	199.710	≥ 103.65	Pass

Low Channel

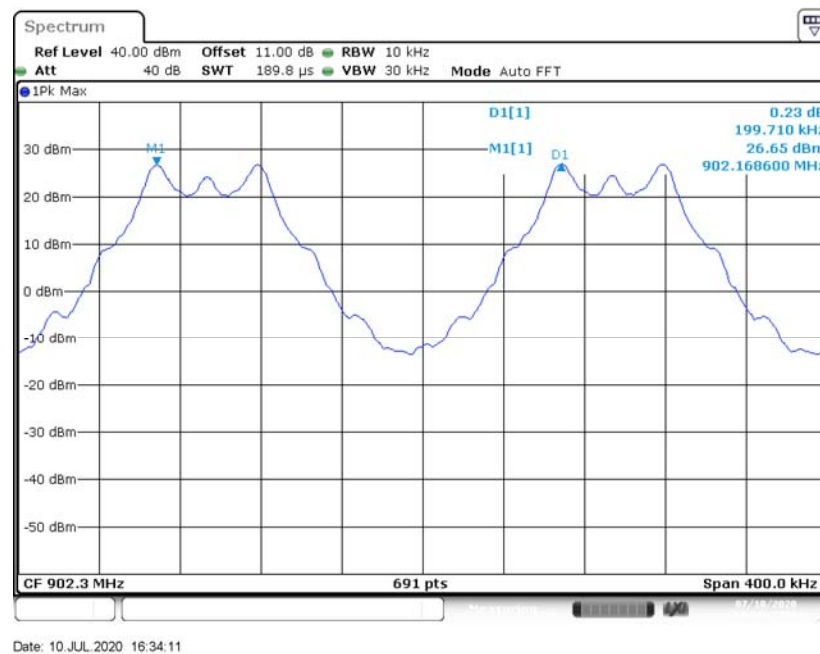


Date: 10 JUL 2020 16:34:11

Middle Channel

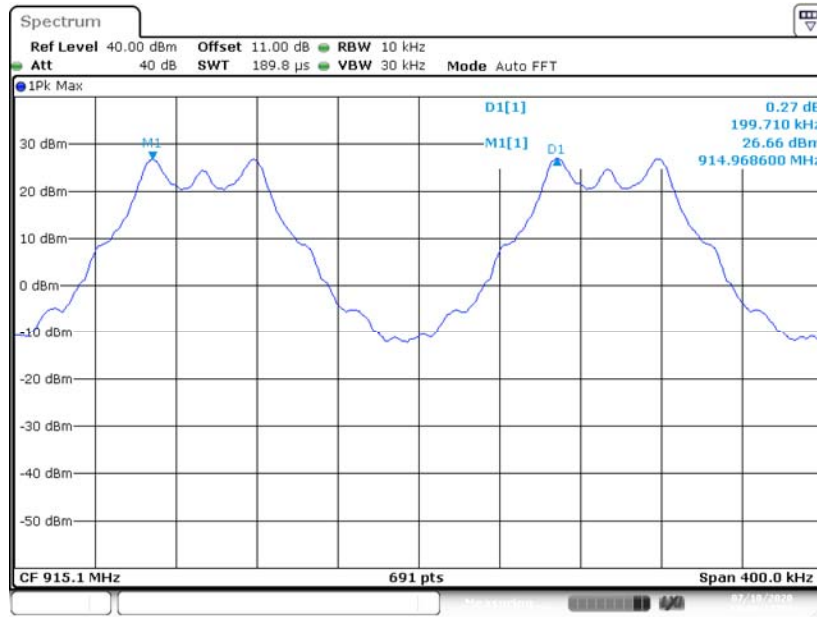

Date: 10 JUL 2020 16:29:34

High Channel

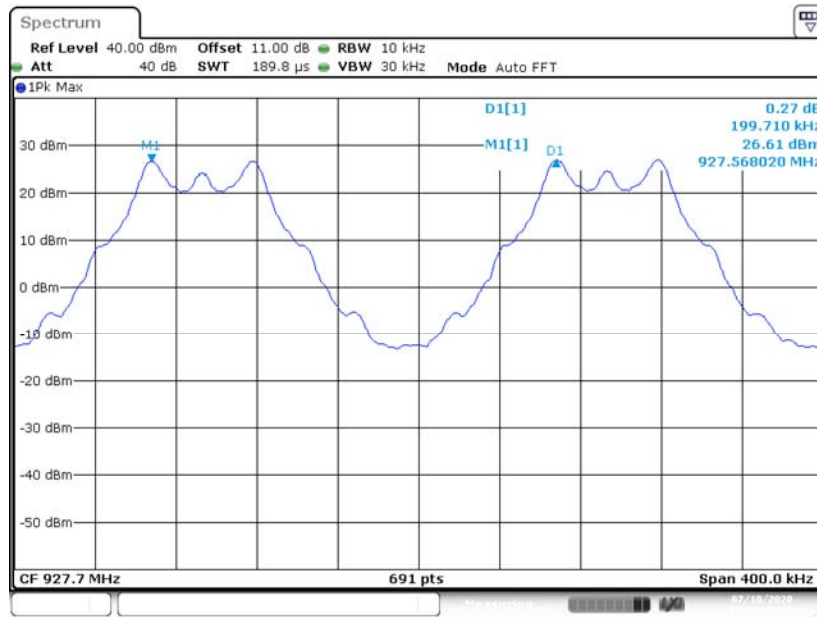


Date: 10 JUL 2020 16:37:12


For 150kbps:

Center Frequency (MHz)	Channel Separation (kHz)	Limit (kHz)	Result
902.6	400.60	≥ 161.25	Pass
915.0	399.40	≥ 158.75	Pass
927.4	400.60	≥ 159.50	Pass

Low Channel

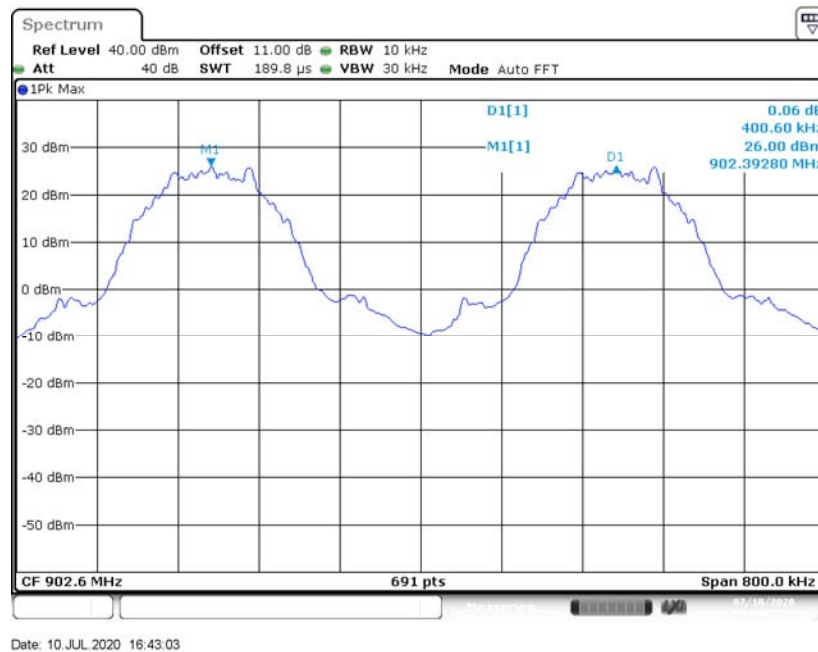


Middle Channel

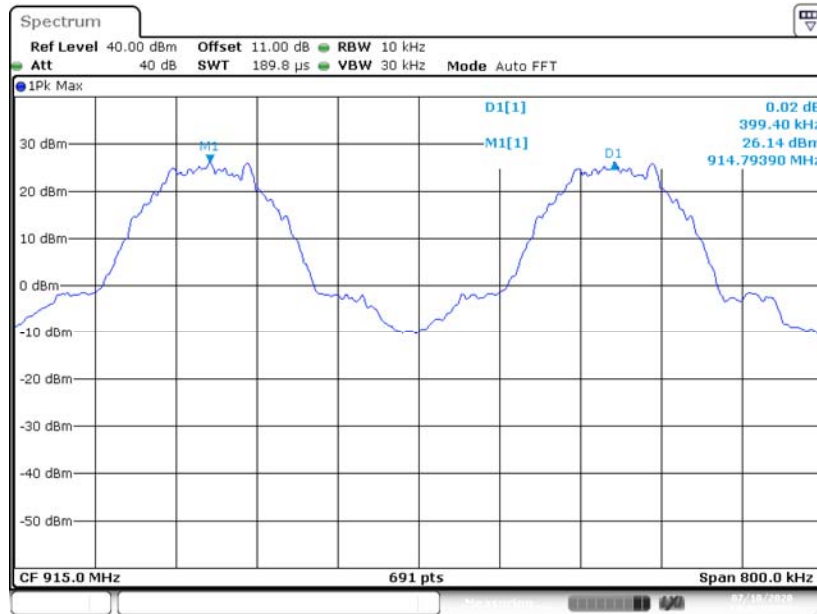

Date: 10 JUL 2020 16:46:51

High Channel

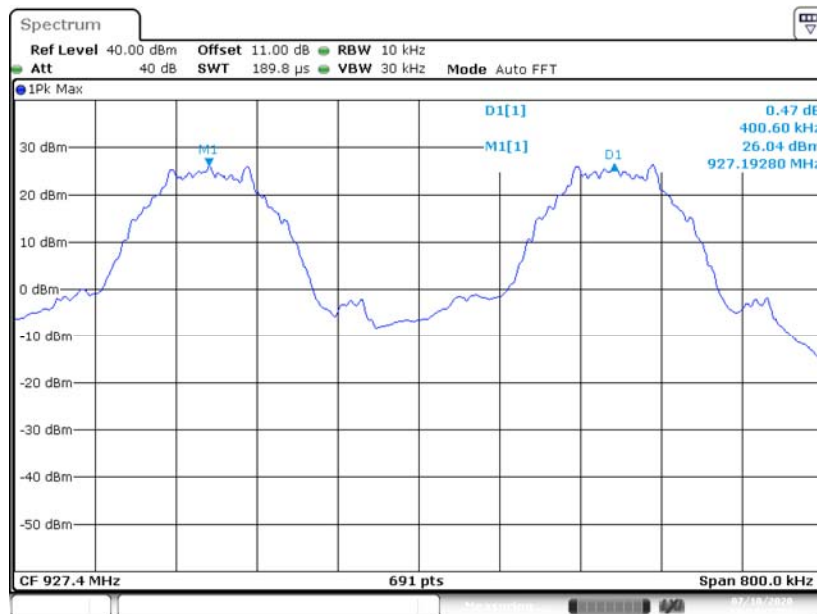

Date: 10 JUL 2020 16:54:51

FCC §15.247(a) (1) (i)– 20 dB EMISSION BANDWIDTH

Applicable Standard

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Chao Gao on 2020-07-10.

EUT operation mode: Transmitting


Test Result: Compliant.

EUT operation mode: Transmitting

For 50kbps:


Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)	Limit (kHz)
Low	902.2	103.80	≤250
Middle	915.0	103.65	≤250
High	927.8	103.65	≤250

Low Channel

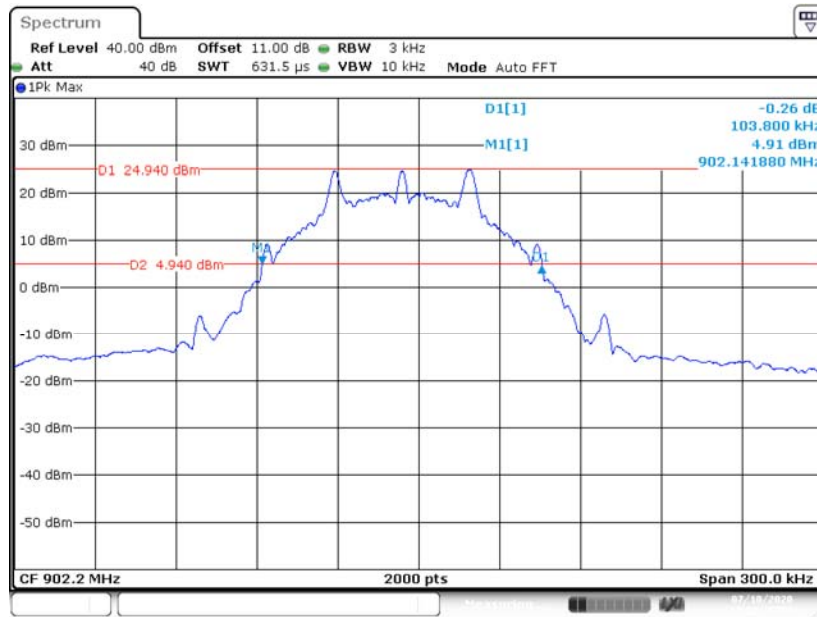


Date: 10 JUL 2020 12:12:35

Middle Channel

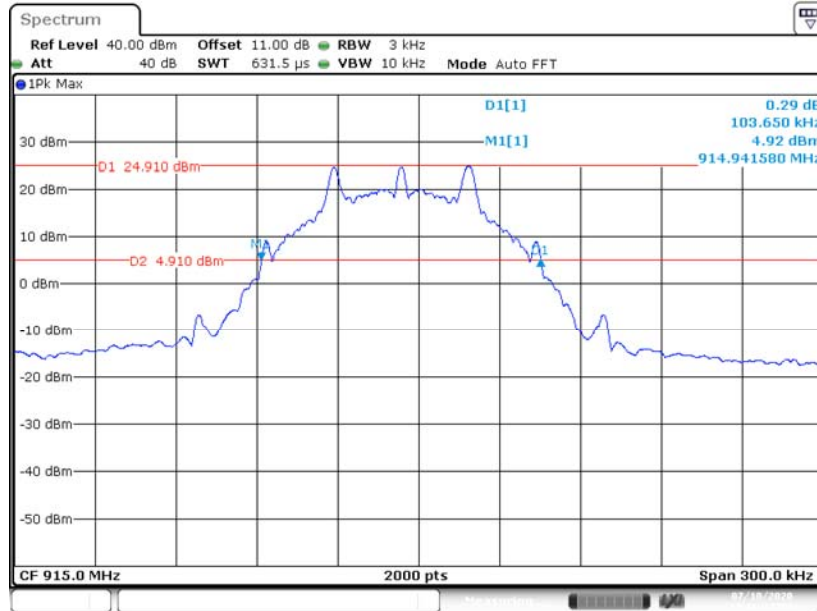

Date: 10 JUL 2020 12:16:35

High Channel

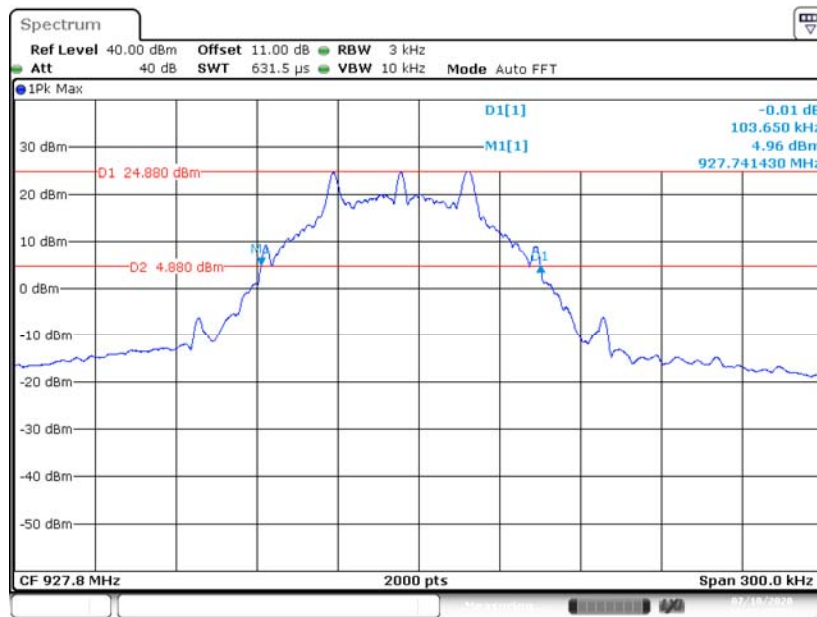


Date: 10 JUL 2020 15:23:19

For 150kbps:


Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)	Limit (kHz)
Low	902.4	161.25	≤250
Middle	915.2	158.75	≤250
High	927.6	159.50	≤250

Low Channel

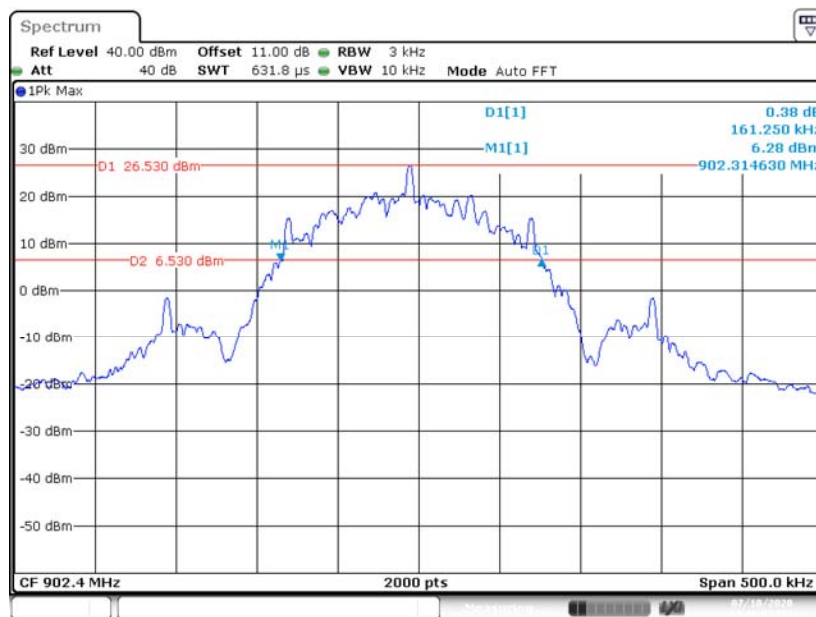


Date: 10 JUL 2020 15:19:52

Middle Channel

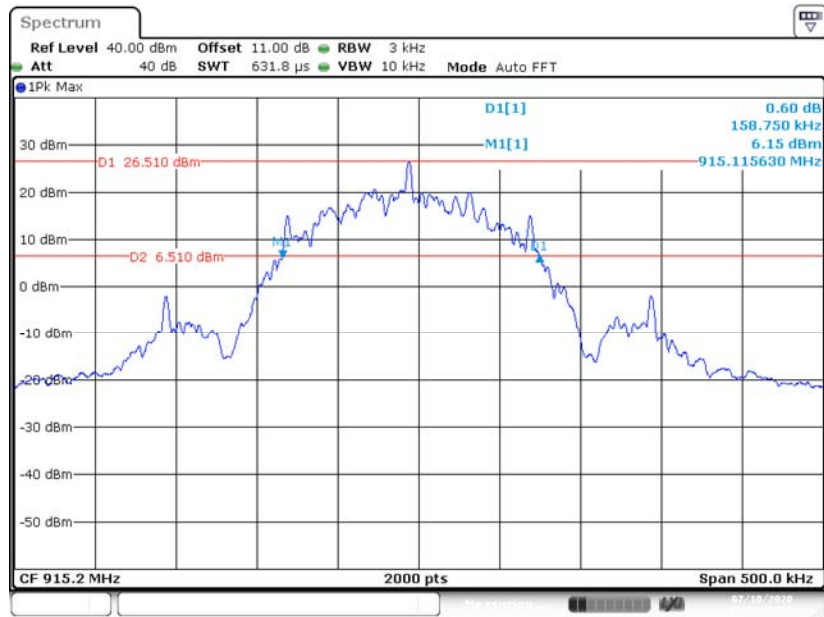

Date: 10 JUL 2020 12:29:39

High Channel

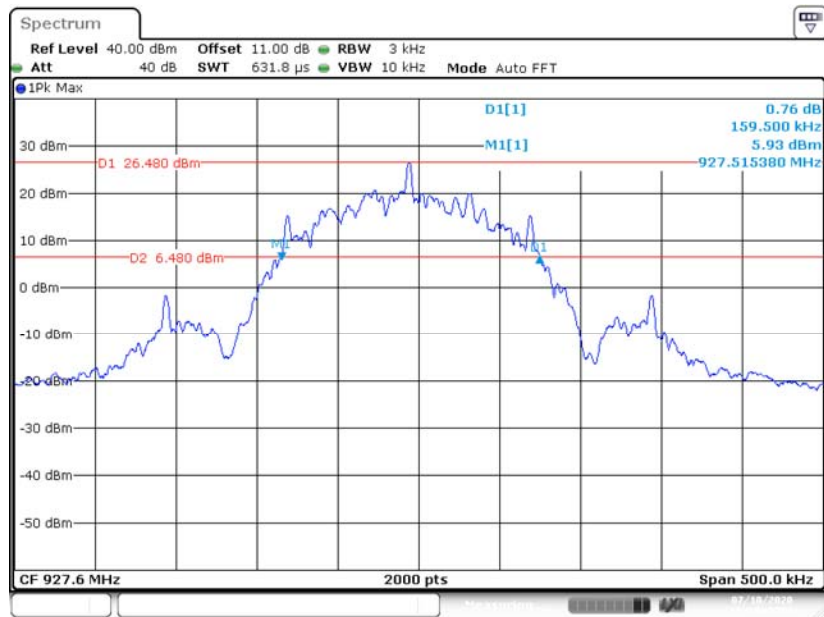

Date: 10 JUL 2020 12:34:08

FCC §15.247(a) (1) (i)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Chao Gao on 2020-07-10.


EUT operation mode: Transmitting

Test Result: Compliant.

For 50kbps:

Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
902~928	129	≥50

Number of Hopping Channels

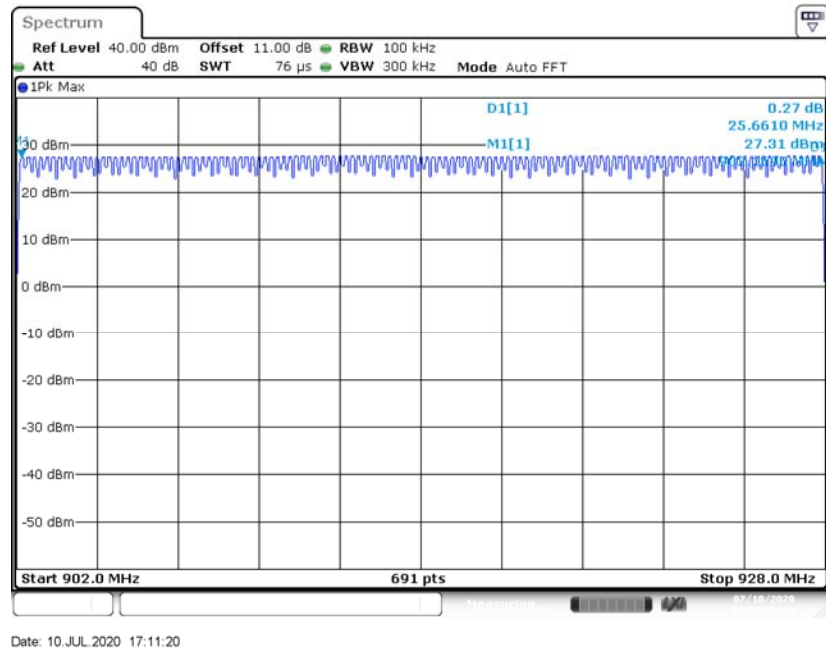

Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
902~928	64	≥50

Spectrum

Ref Level 40.00 dBm Offset 11.00 dB RBW 100 kHz
 Att 40 dB SWT 76 μ s VBW 300 kHz Mode Auto FFT

1Pk Max

D1[1] 0.26 dB
 M1[1] 25.2850 MHz
 27.35 dBm
 902.3570 MHz

Start 902.0 MHz 691 pts Stop 928.0 MHz

Date: 10 JUL 2020 17:23:43

FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 20 (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Chao Gao on 2020-07-12.


EUT operation mode: Transmitting

Test Result: Compliant.


For 50kbps:

Pulse Width	Pulse Number	Dwell Time	Limit	Result
(ms)		(s)	(s)	
18.739	1	0.0187	≤0.4	Pass
Note: Dwell time = Pulse time*N Observed time = 20 s				

Number of Pulses

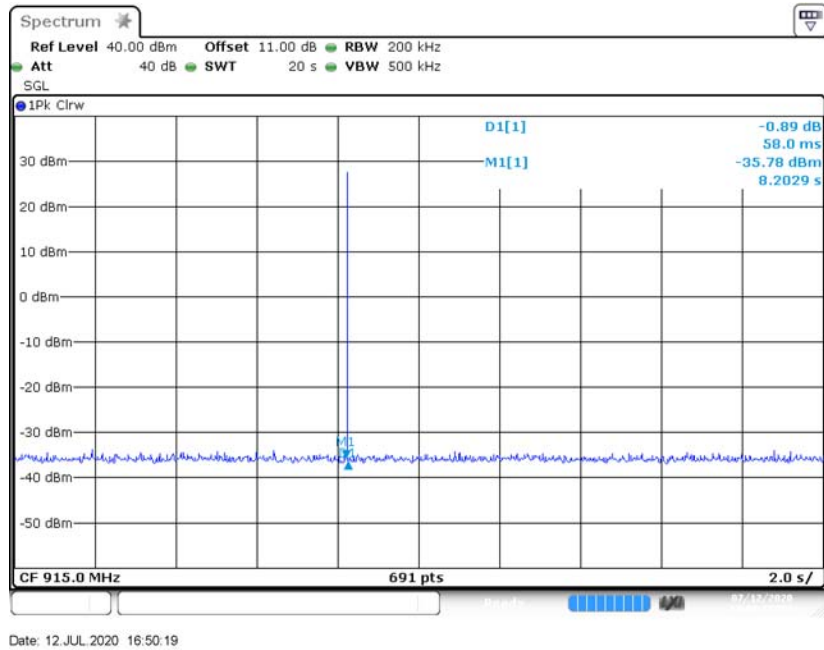


Single Pulse

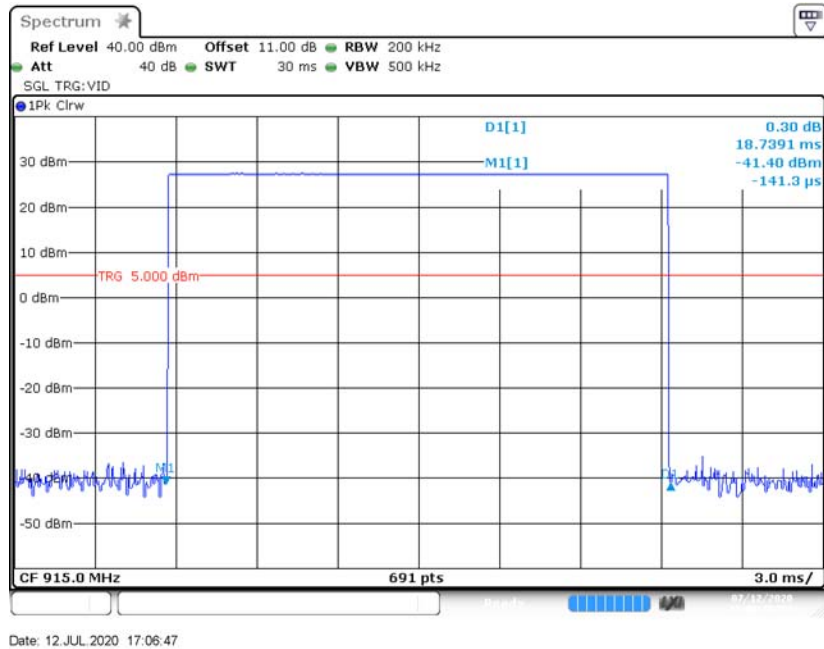


For 150kbps:

Pulse Width	Pulse Number	Dwell Time	Limit	Result
(ms)		(s)	(s)	
6.449	1	0.00645	≤ 0.4	Pass
Note: Dwell time = Pulse time*N Observed time = 20 s				

Number of Pulses

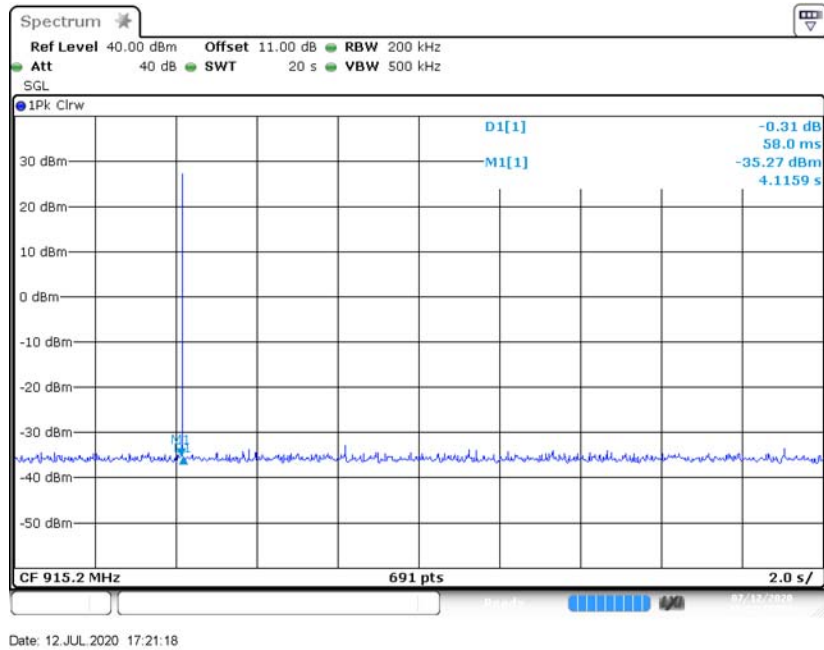

Single Pulse

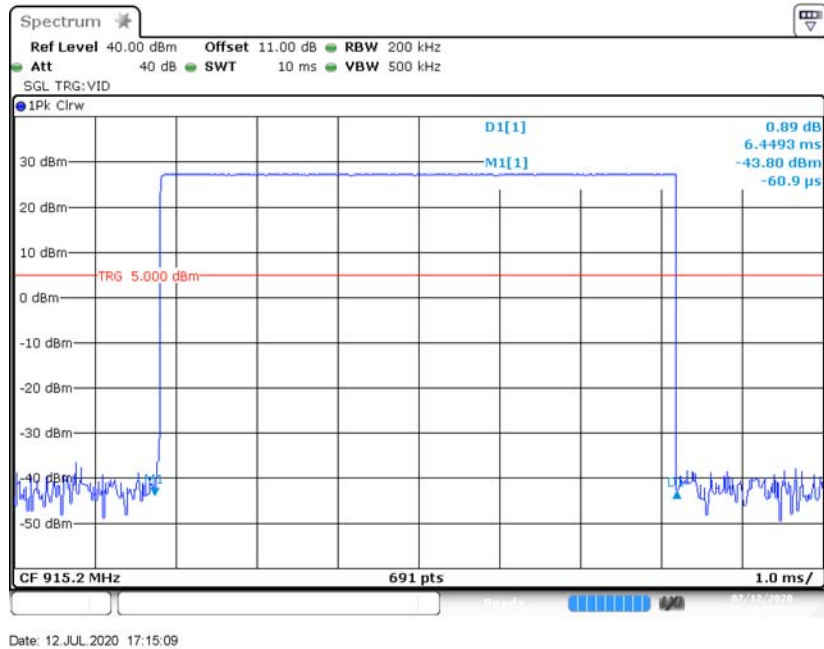

FCC §15.247(b) (2) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

**Test Data****Environmental Conditions**

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa


The testing was performed by Chao Gao on 2020-07-10.

EUT operation mode: Transmitting

For 50kbps:


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	902.2	27.79	30	Pass
Middle	915.0	27.78	30	Pass
High	927.8	27.73	30	Pass

Low Channel

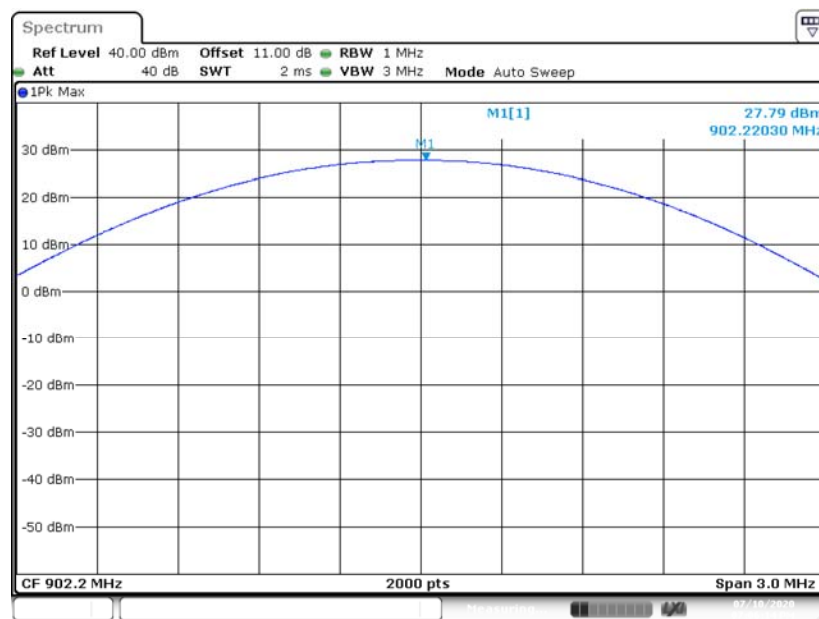


Date: 10 JUL 2020 19:06:14

Middle Channel

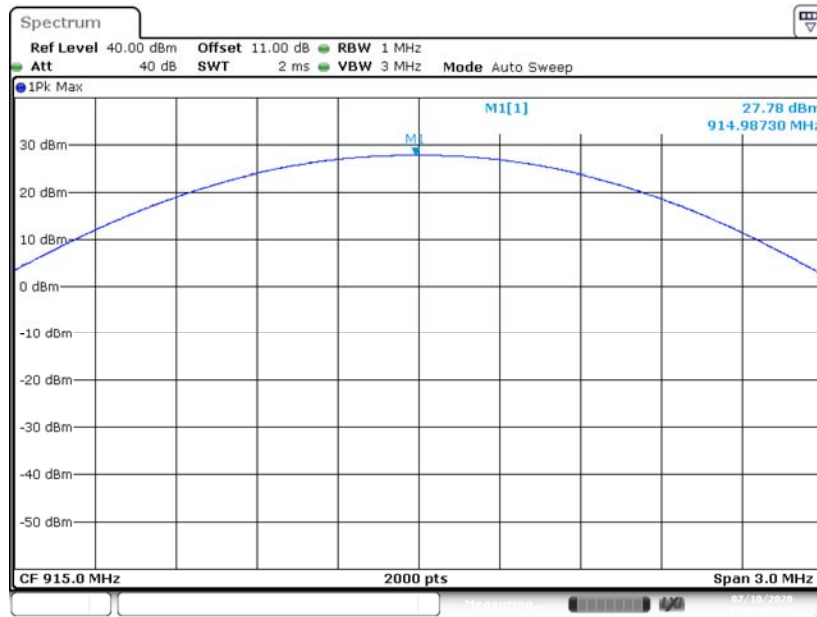

Date: 10 JUL 2020 19:07:02

High Channel

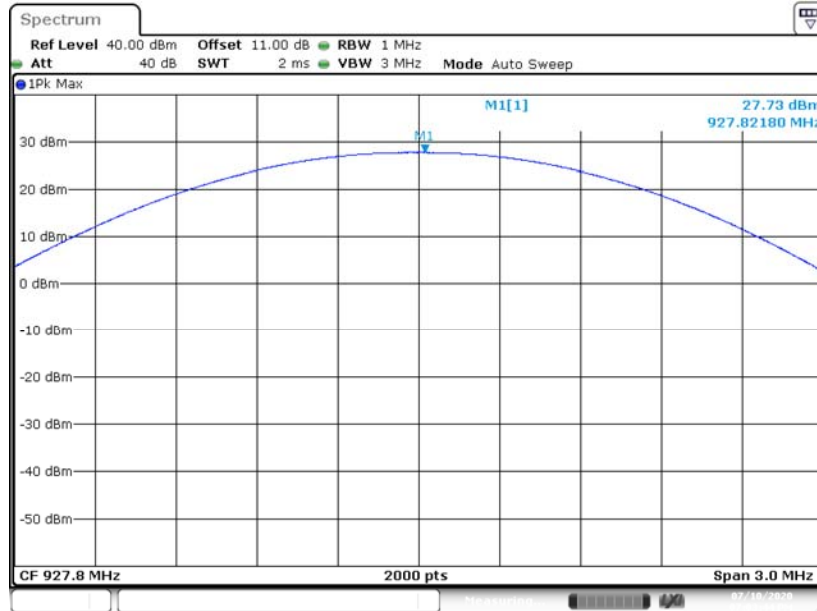


Date: 10 JUL 2020 19:03:44


For 150kbps:

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	902.4	27.95	30	Pass
Middle	915.2	27.85	30	Pass
High	927.6	27.72	30	Pass

Low Channel

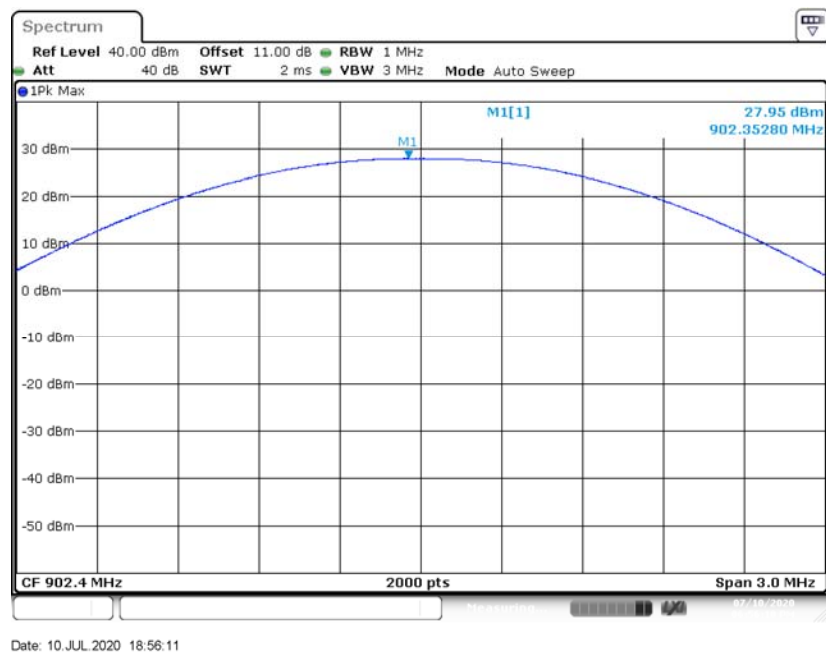


Middle Channel

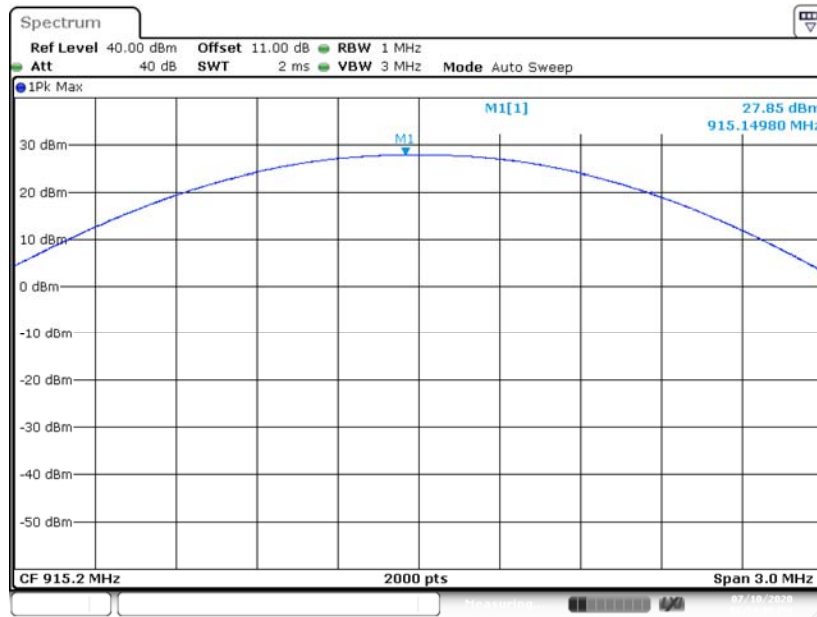

Date: 10 JUL 2020 18:54:05

High Channel

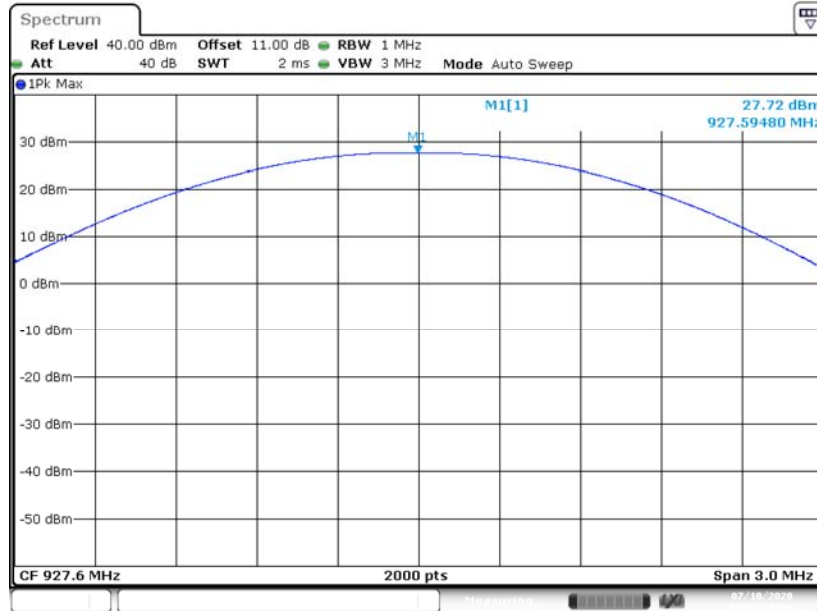

Date: 10 JUL 2020 18:55:29

FCC §15.247(d) - BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the middlemost amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the middlemost point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa


The testing was performed by Chao Gao on 2020-07-10.

EUT operation mode: Transmitting

Test Result: Compliant.


For 50kbps:

Left Side

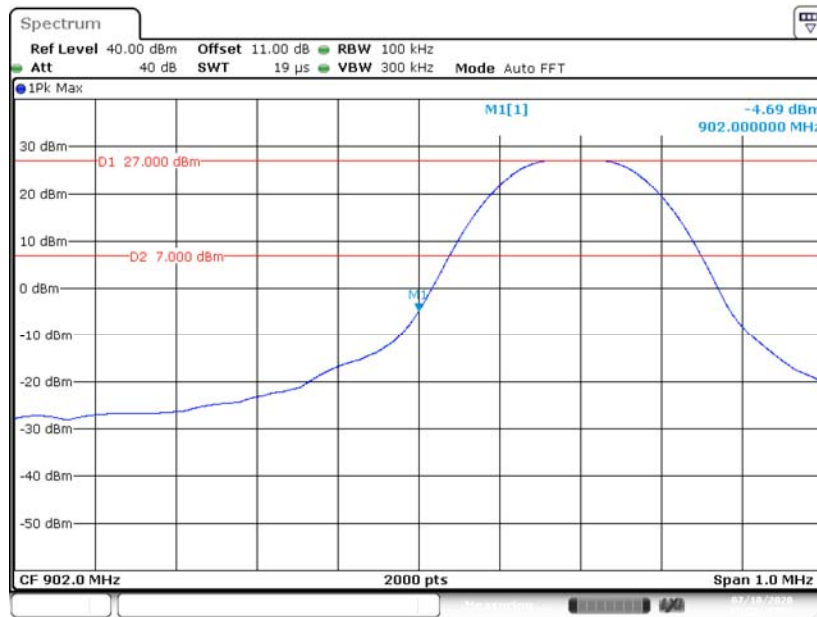


Date: 10 JUL 2020 13:22:36

Right Side

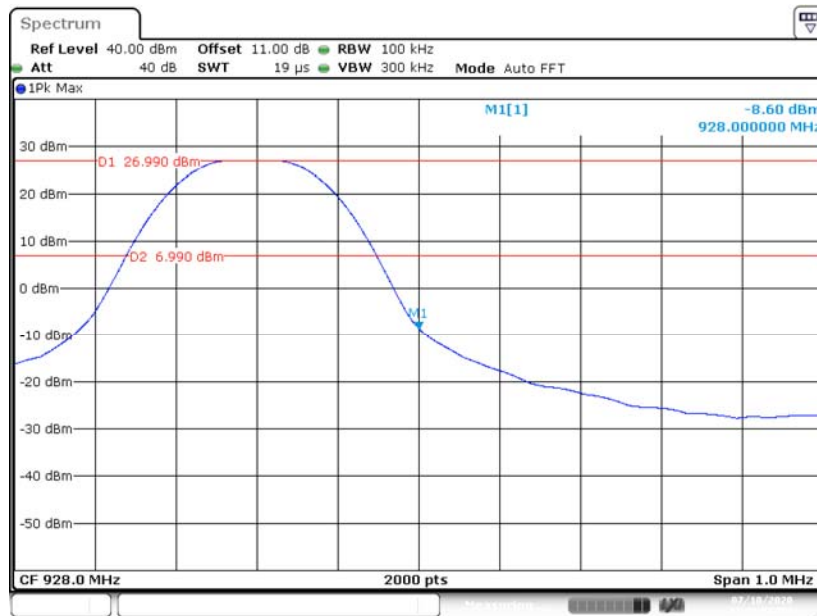


Date: 10 JUL 2020 13:23:56

Left Side-Hopping

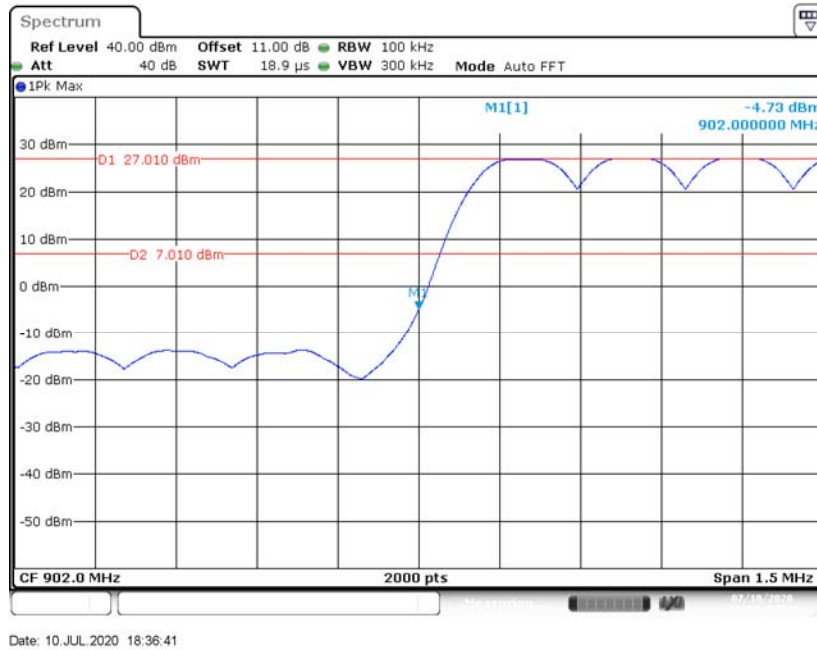


Right Side-Hopping

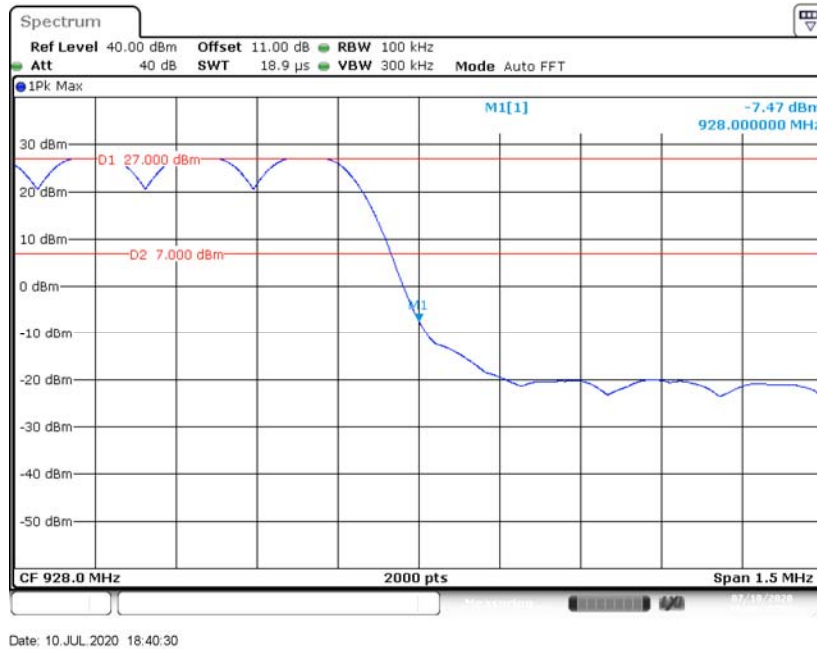


For 150kbps:

Left Side

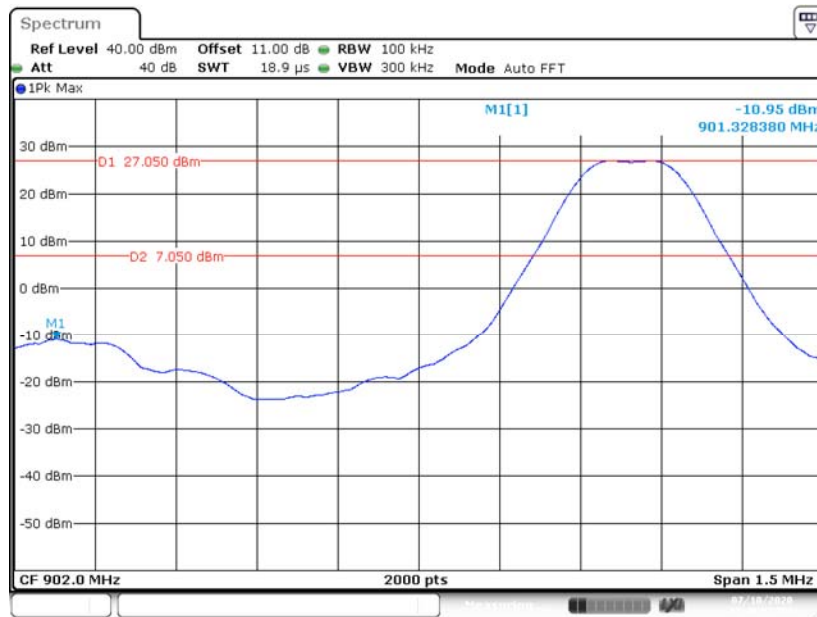


Date: 10 JUL 2020 13:45:52

Right Side

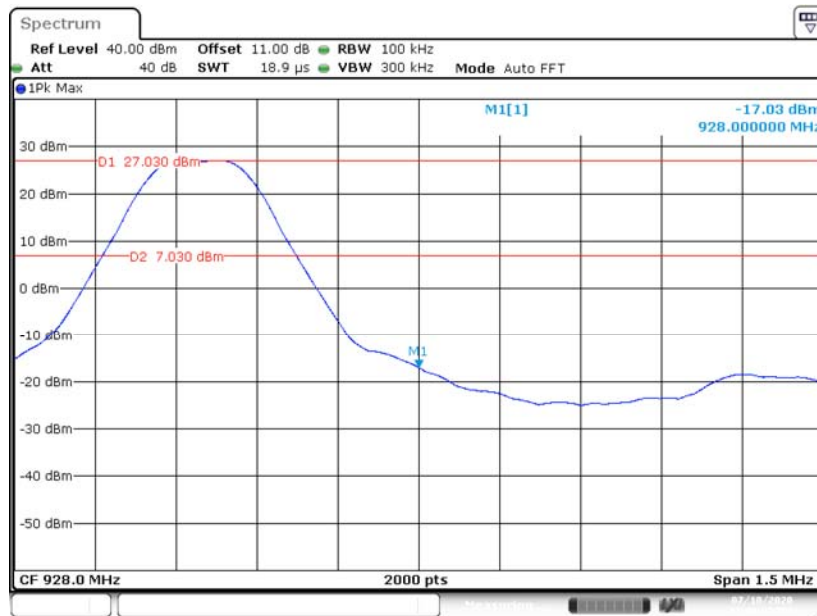

Date: 10 JUL 2020 13:26:33

Left Side-Hopping

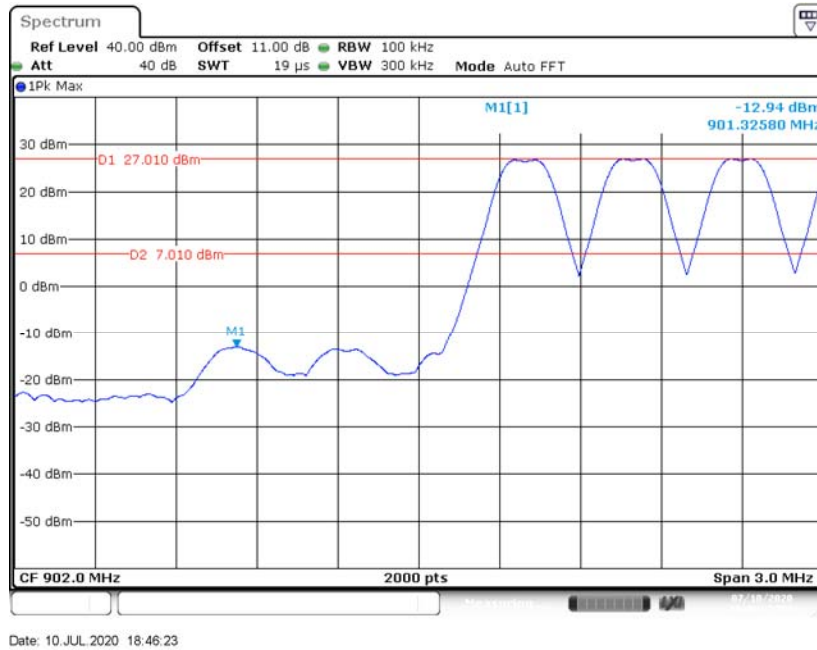

Right Side-Hopping



Declarations

- 1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
- 2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5: This report cannot be reproduced except in full, without prior written approval of the Company.
- 6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******