

MEASUREMENT 7

For Head Liquid


Type: Validation measurement (Fast, 75.00 %)  
Measurement duration: 12 minutes 21 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                        |
|-----------------|------------------------|
| Area Scan       | dx=8mm dy=8mm          |
| Phantom         | Validation plane       |
| Device Position | Dipole                 |
| Band            | CW5200                 |
| Signal          | CW (Crest factor: 1.0) |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5200.000000 |
| Relative Permittivity (real part) | 35.612911   |
| Conductivity (S/m)                | 4.871483    |
| Power Variation (%)               | 0.943213    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

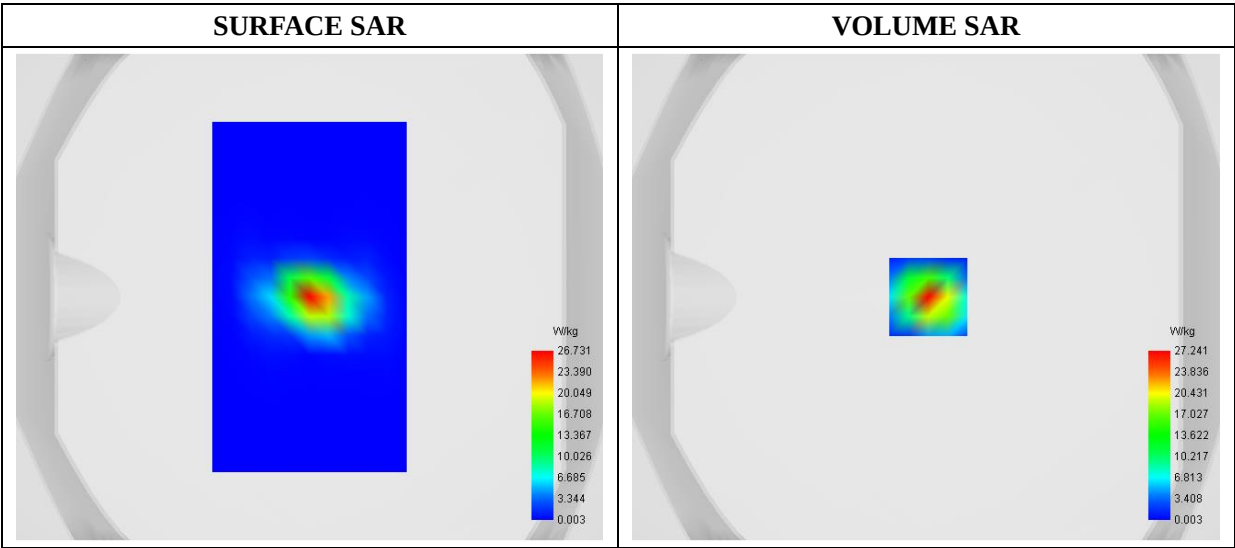

Maximum location: X=1.00, Y=0.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 5.310334  |
| SAR 1g (W/Kg)  | 16.946226 |

|            |         |         |        |        |        |        |        |
|------------|---------|---------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00    | 2.00    | 7.00   | 12.00  | 17.00  | 22.00  | 27.00  |
| SAR (W/Kg) | 41.7264 | 27.2408 | 6.5746 | 1.6234 | 0.3765 | 0.0793 | 0.0129 |

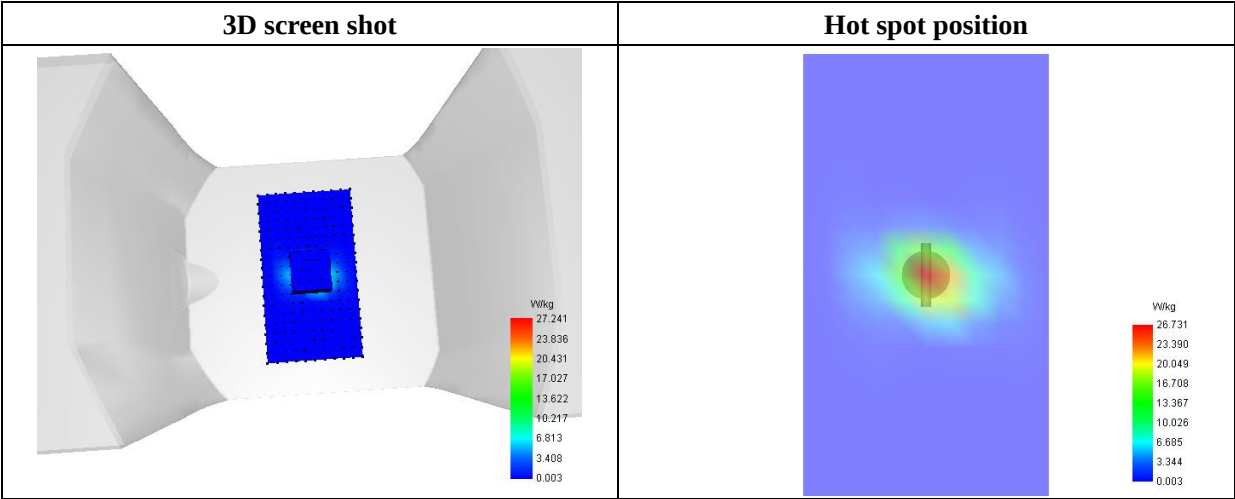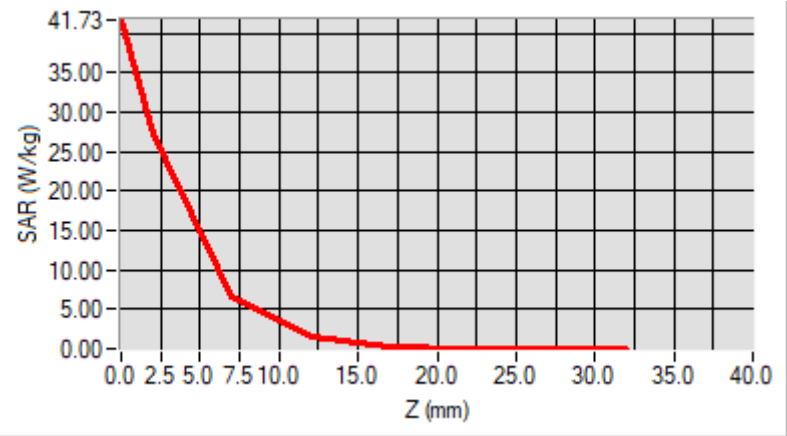

MEASUREMENT 8

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                        |
|-----------------|------------------------|
| Area Scan       | dx=8mm dy=8mm          |
| Phantom         | Validation plane       |
| Device Position | Dipole                 |
| Band            | CW5800                 |
| Signal          | CW (Crest factor: 1.0) |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5800.000000 |
| Relative Permittivity (real part) | 35.612911   |
| Conductivity (S/m)                | 5.171483    |
| Power Variation (%)               | 0.943782    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

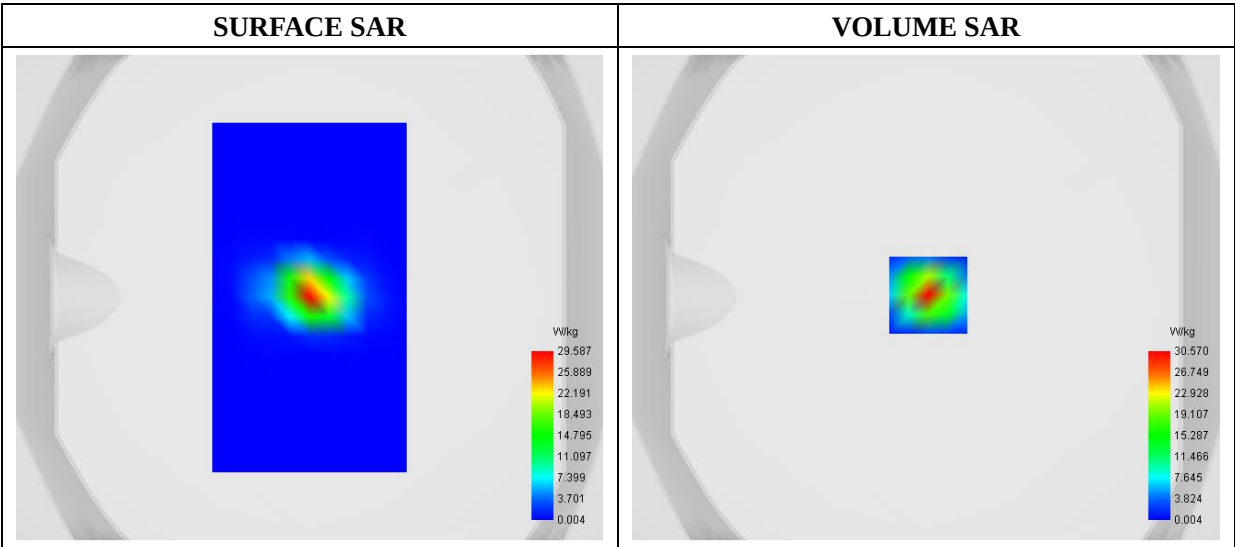

Maximum location: X=1.00, Y=1.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 5.879544  |
| SAR 1g (W/Kg)  | 17.190731 |

|            |         |         |        |        |        |        |        |
|------------|---------|---------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00    | 2.00    | 7.00   | 12.00  | 17.00  | 22.00  | 27.00  |
| SAR (W/Kg) | 48.4695 | 30.5699 | 5.7100 | 1.0698 | 0.1906 | 0.0364 | 0.0052 |

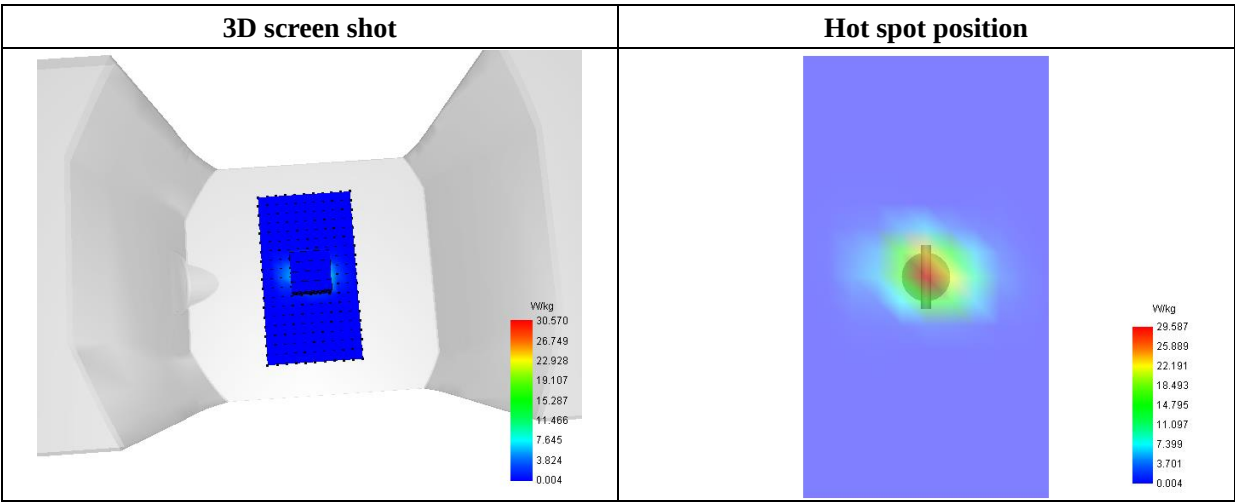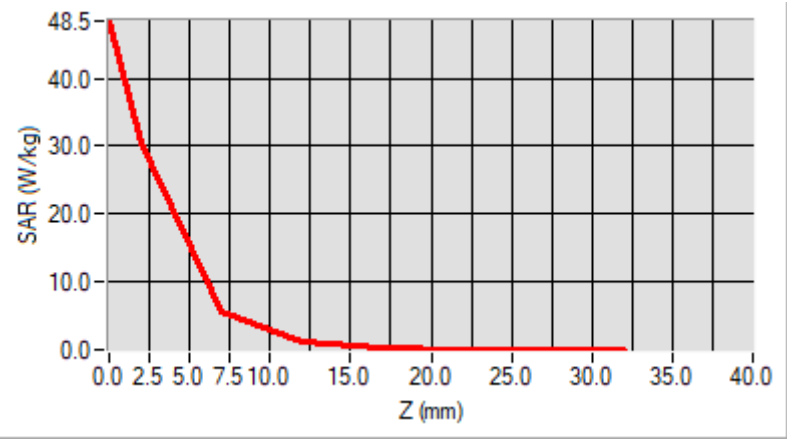

MEASUREMENT 9

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                  |
|-----------------|------------------|
| Area Scan       | dx=8mm dy=8mm    |
| Phantom         | Validation plane |
| Device Position | Dipole           |
| Band            | CW750            |
| Signal          | Duty Cycle 1:1   |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 750.000000 |
| Relative Permittivity (real part) | 54.964739  |
| Conductivity (S/m)                | 0.931048   |
| Power Variation (%)               | 0.034745   |
| Ambient Temperature               | 21.1       |
| Liquid Temperature                | 21.3       |

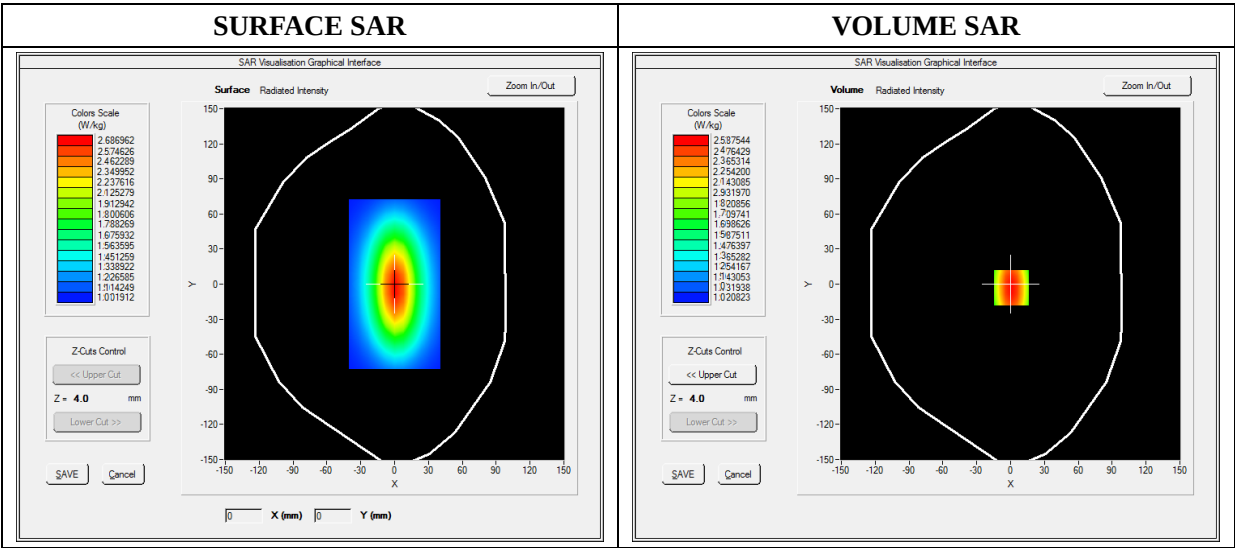




Maximum location: X=0.00, Y=0.00

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 1.000865 |
| SAR 1g (W/Kg)  | 2.124211 |

Z Axis Scan

|            |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  | 24.00  | 29.00  |
| SAR (W/Kg) | 0.0000 | 2.5132 | 1.1087 | 0.8214 | 0.5160 | 0.4875 | 0.4864 |

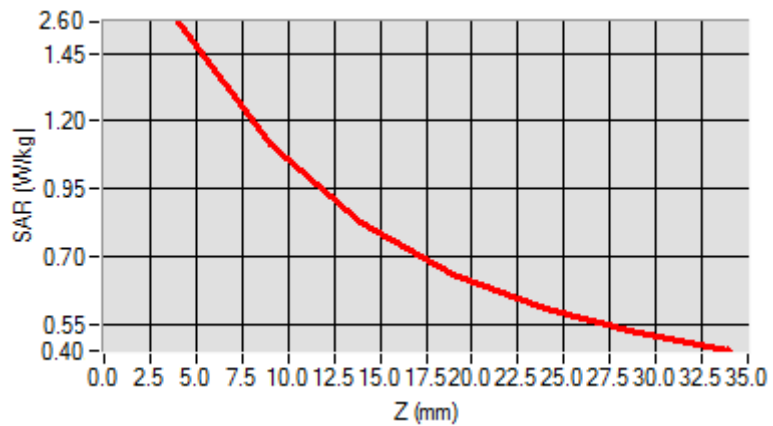
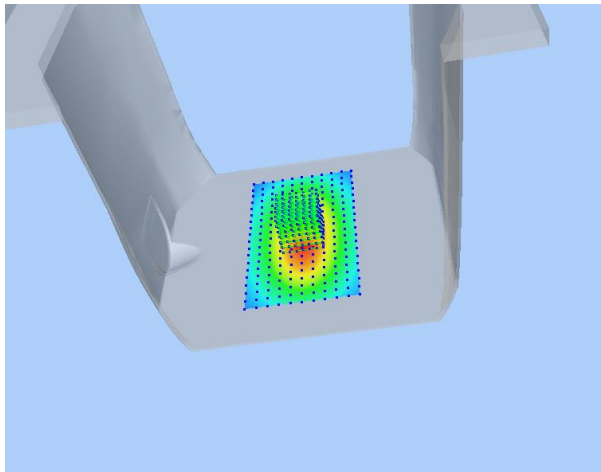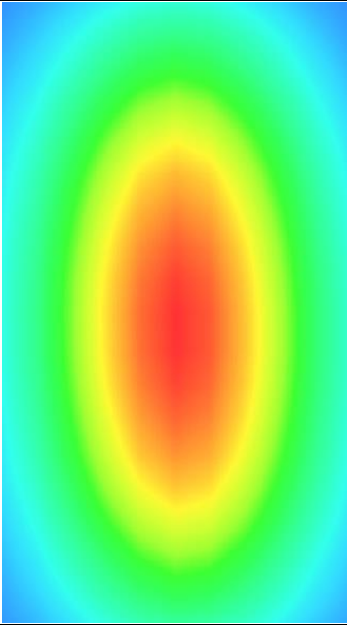
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 10

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                  |
|-----------------|------------------|
| Area Scan       | dx=8mm dy=8mm    |
| Phantom         | Validation plane |
| Device Position | Dipole           |
| Band            | CW835            |
| Signal          | Duty Cycle 1:1   |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 835.000000 |
| Relative Permittivity (real part) | 54.851214  |
| Conductivity (S/m)                | 0.951454   |
| Power Variation (%)               | 0.901472   |
| Ambient Temperature               | 21.1       |
| Liquid Temperature                | 21.3       |

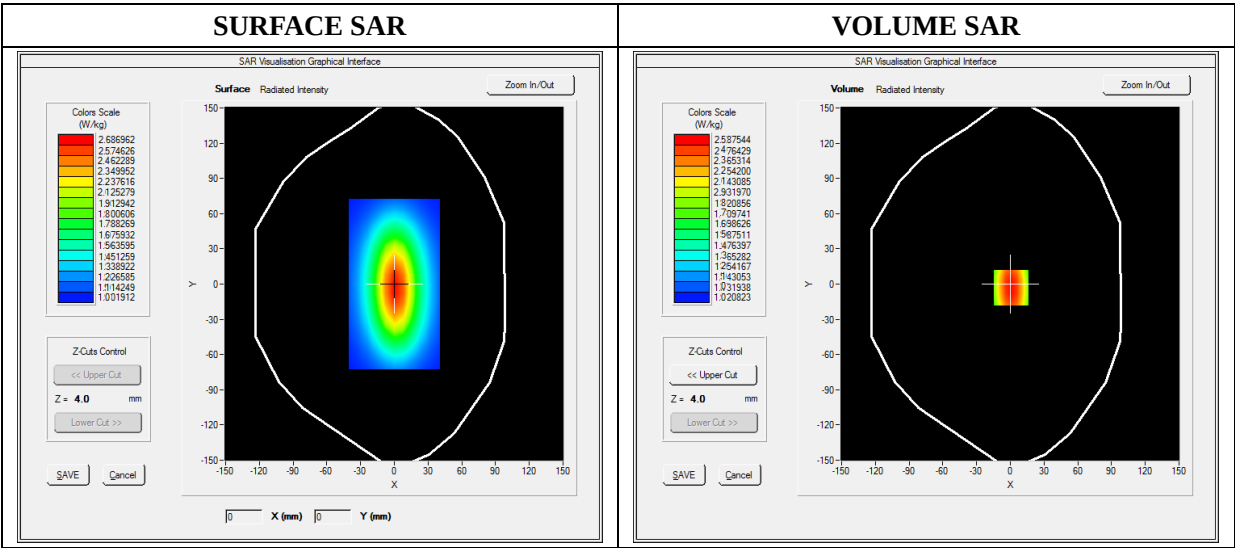




Maximum location: X=0.00, Y=0.00

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 1.028956 |
| SAR 1g (W/Kg)  | 2.354211 |

Z Axis Scan

| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  | 24.00  | 29.00  |
|------------|--------|--------|--------|--------|--------|--------|--------|
| SAR (W/Kg) | 0.0000 | 2.5789 | 1.1300 | 0.8795 | 0.5940 | 0.5011 | 0.5100 |

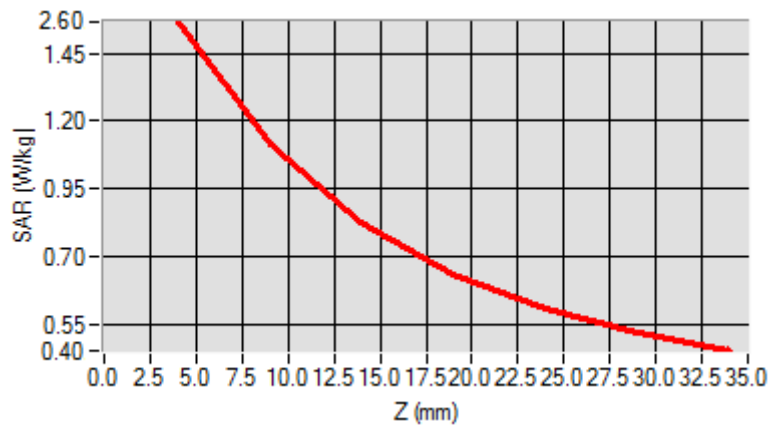
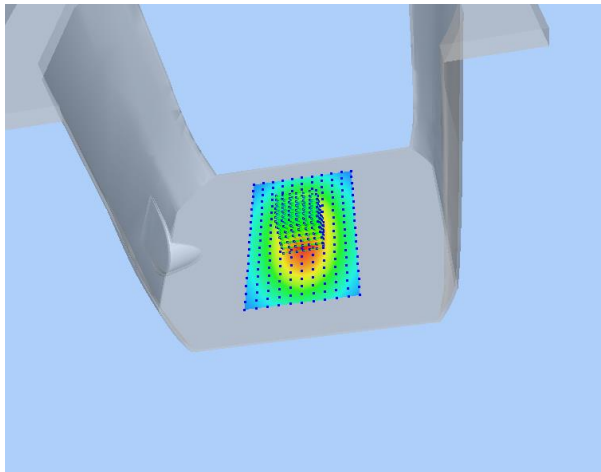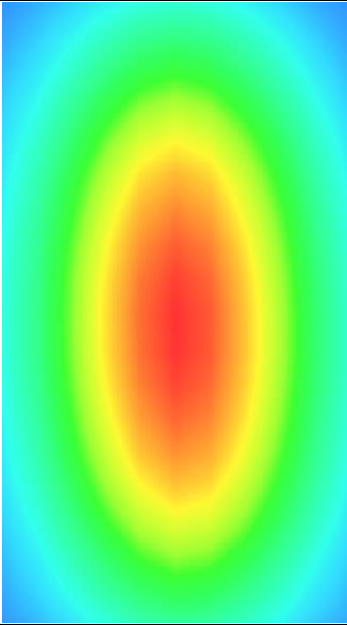
| 3D screen shot                                                                      | Hot spot position                                                                    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

MEASUREMENT 11

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                        |
|-----------------|------------------------|
| Area Scan       | dx=8mm dy=8mm          |
| Phantom         | Validation plane       |
| Device Position | Dipole                 |
| Band            | CW1800                 |
| Signal          | CW (Crest factor: 1.0) |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1800.000000 |
| Relative Permittivity (real part) | 51.224510   |
| Conductivity (S/m)                | 1.461261    |
| Power Variation (%)               | 0.845690    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

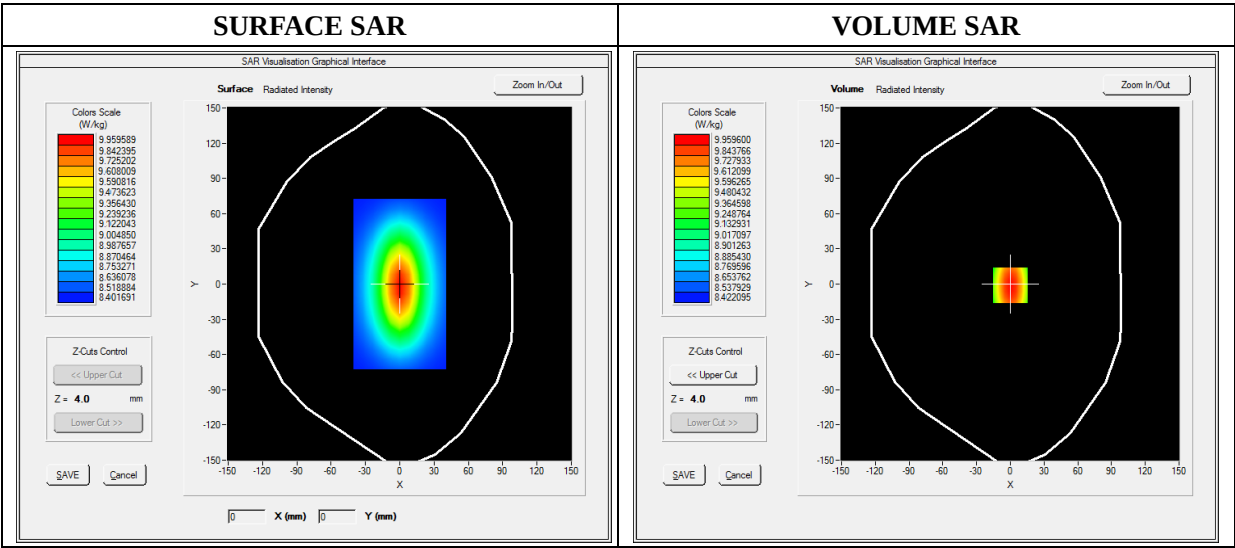




Maximum location: X=0.00, Y=0.00

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 5.221202 |
| SAR 1g (W/Kg)  | 9.582560 |

Z Axis Scan

|            |        |         |        |        |        |        |        |
|------------|--------|---------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00    | 9.00   | 14.00  | 19.00  | 24.00  | 29.00  |
| SAR (W/Kg) | 0.0000 | 11.2425 | 9.4123 | 8.0345 | 6.9125 | 6.3092 | 3.9460 |

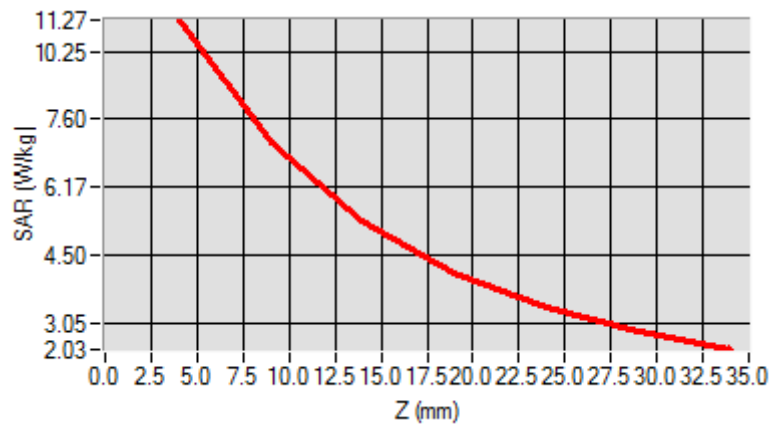
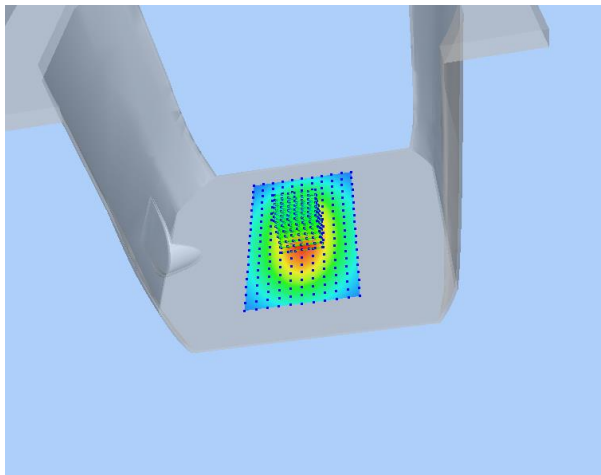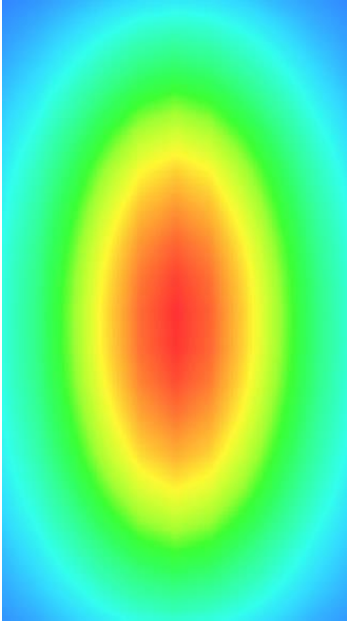
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 12

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                  |
|-----------------|------------------|
| Area Scan       | dx=8mm dy=8mm    |
| Phantom         | Validation plane |
| Device Position | Dipole           |
| Band            | CW1900           |
| Signal          | Duty Cycle 1:1   |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1900.000000 |
| Relative Permittivity (real part) | 52.420415   |
| Conductivity (S/m)                | 1.501966    |
| Power Variation (%)               | 0.541872    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

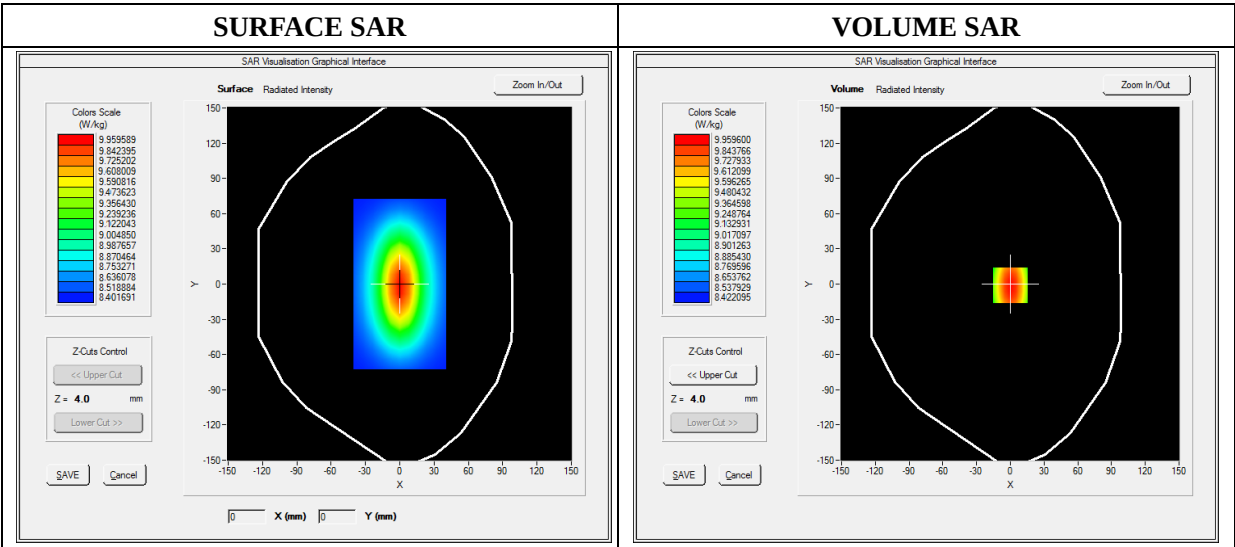




Maximum location: X=0.00, Y=0.00

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 5.134651 |
| SAR 1g (W/Kg)  | 9.781550 |

Z Axis Scan

|            |        |         |         |        |        |        |        |
|------------|--------|---------|---------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00    | 9.00    | 14.00  | 19.00  | 24.00  | 29.00  |
| SAR (W/Kg) | 0.0000 | 10.2031 | 6.43001 | 4.9011 | 4.5325 | 3.1201 | 2.5024 |

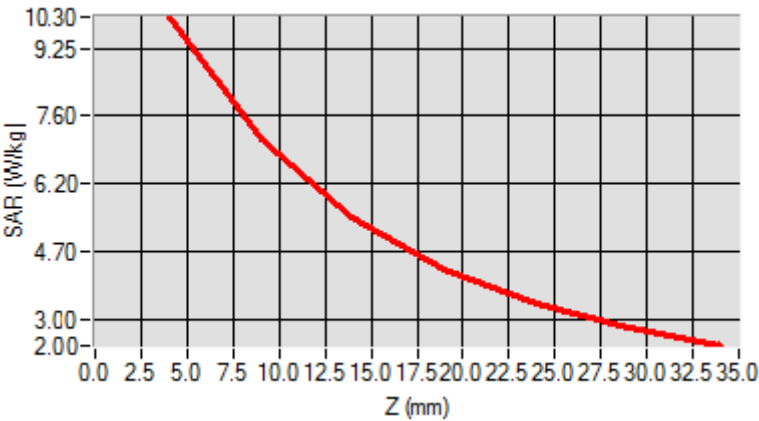
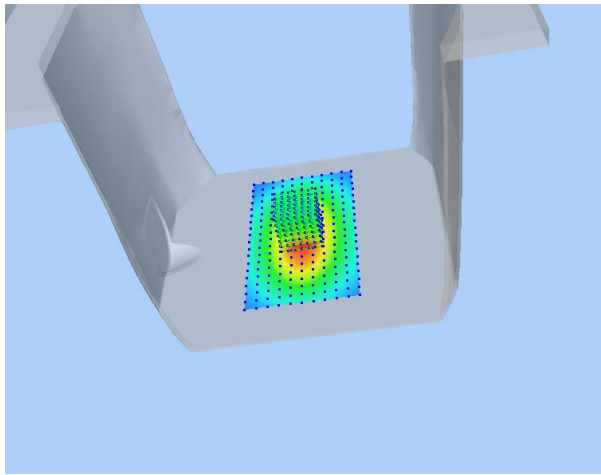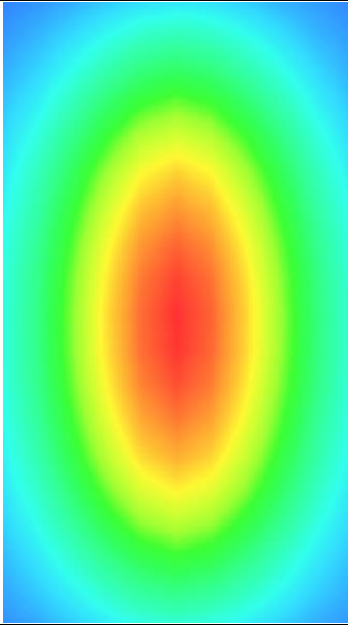
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 13

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                  |
|-----------------|------------------|
| Area Scan       | dx=8mm dy=8mm    |
| Phantom         | Validation plane |
| Device Position | Dipole           |
| Band            | CW2450           |
| Signal          | Duty Cycle 1:1   |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2450.000000 |
| Relative Permittivity (real part) | 52.010212   |
| Conductivity (S/m)                | 1.910255    |
| Power Variation (%)               | 1.369745    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

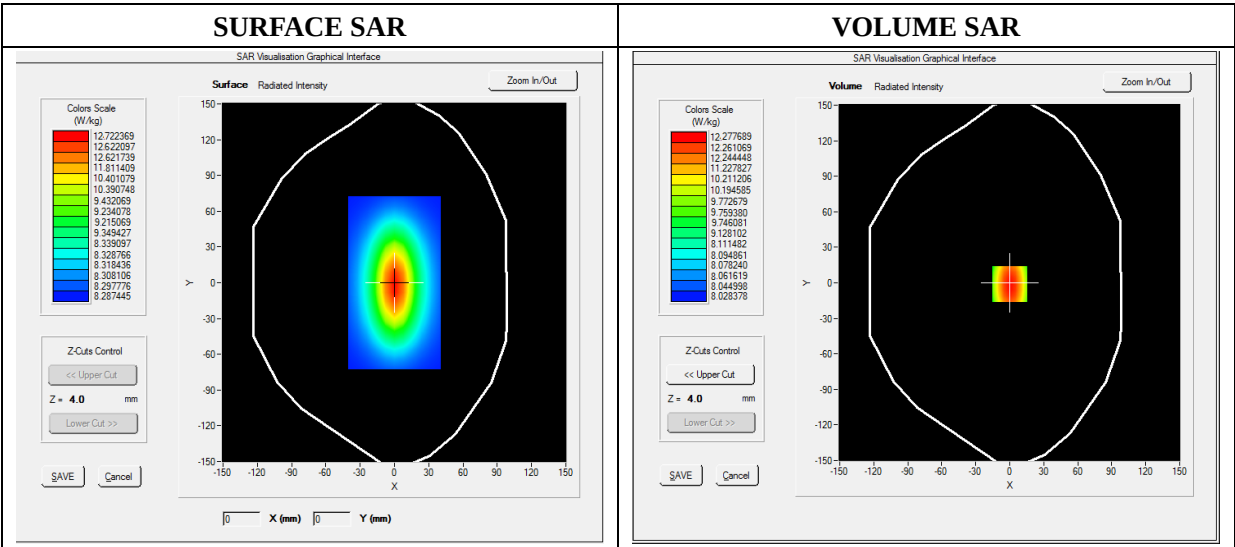




Maximum location: X=0.00, Y=0.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 7.119522  |
| SAR 1g (W/Kg)  | 12.592360 |

Z Axis Scan

| Z (mm)     | 0.00   | 4.00    | 9.00    | 14.00  | 19.00  | 24.00  | 29.00  |
|------------|--------|---------|---------|--------|--------|--------|--------|
| SAR (W/Kg) | 0.0000 | 13.1911 | 11.7951 | 9.2945 | 8.5400 | 6.3712 | 4.6225 |

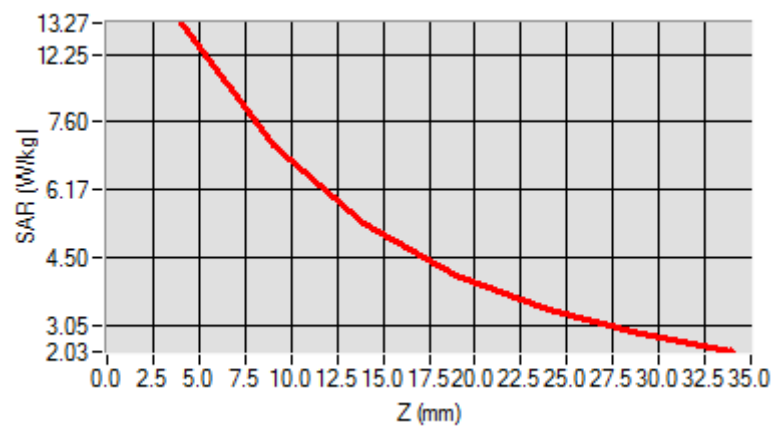
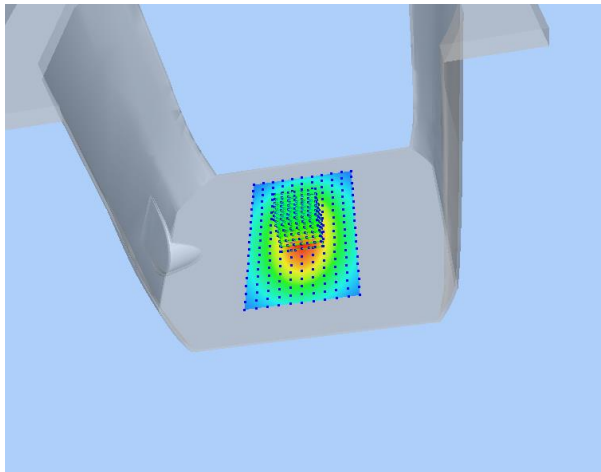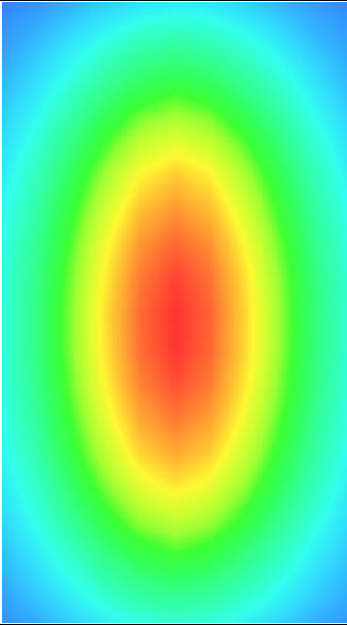
| 3D screen shot                                                                      | Hot spot position                                                                    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

MEASUREMENT 14

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                  |
|-----------------|------------------|
| Area Scan       | dx=8mm dy=8mm    |
| Phantom         | Validation plane |
| Device Position | Dipole           |
| Band            | CW2600           |
| Signal          | Duty Cycle 1:1   |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2600.000000 |
| Relative Permittivity (real part) | 52.241202   |
| Conductivity (S/m)                | 2.120943    |
| Power Variation (%)               | 1.038832    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

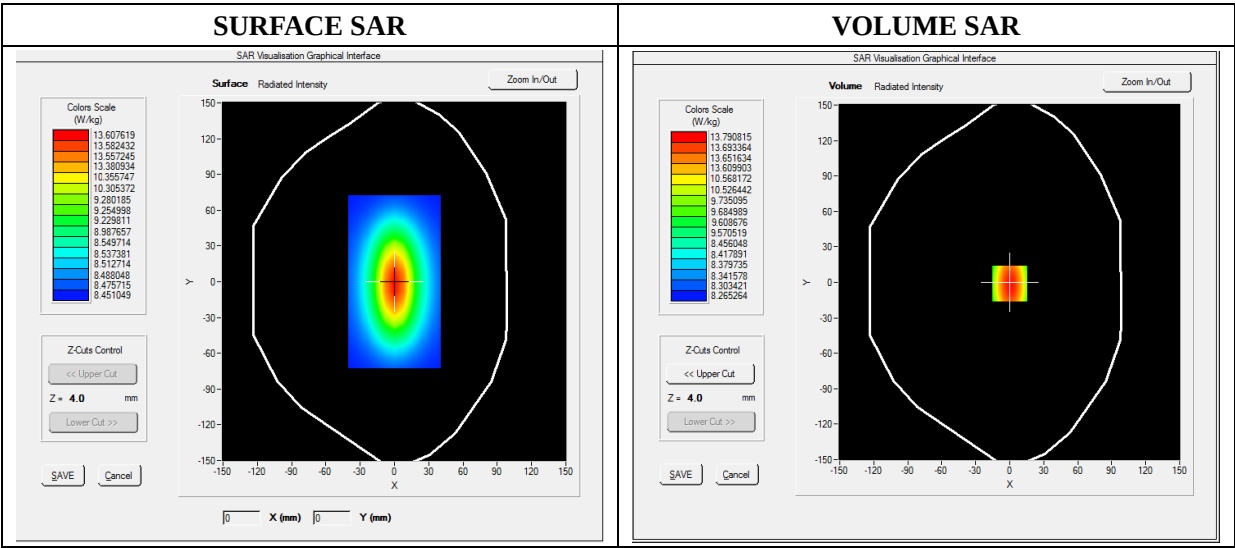




Maximum location: X=0.00, Y=0.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 6.083781  |
| SAR 1g (W/Kg)  | 13.430481 |

Z Axis Scan

|            |        |         |         |        |        |        |        |
|------------|--------|---------|---------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00    | 9.00    | 14.00  | 19.00  | 24.00  | 29.00  |
| SAR (W/Kg) | 0.0000 | 13.6473 | 11.8441 | 9.3627 | 8.5782 | 6.4357 | 4.6342 |

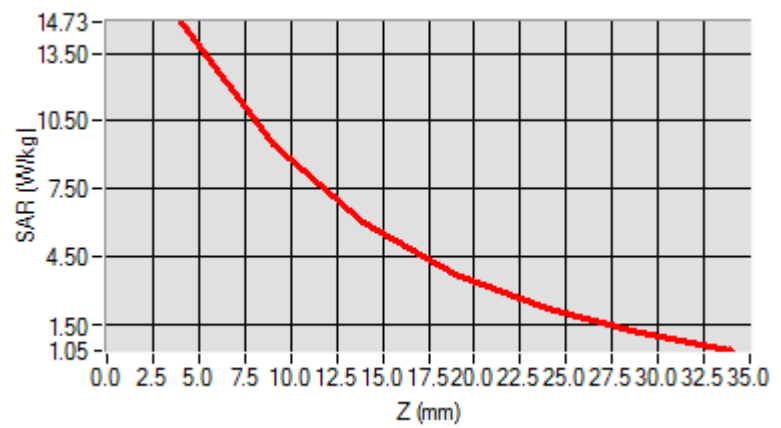
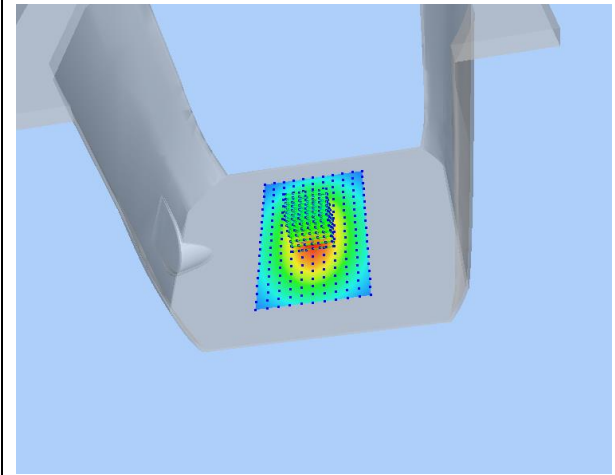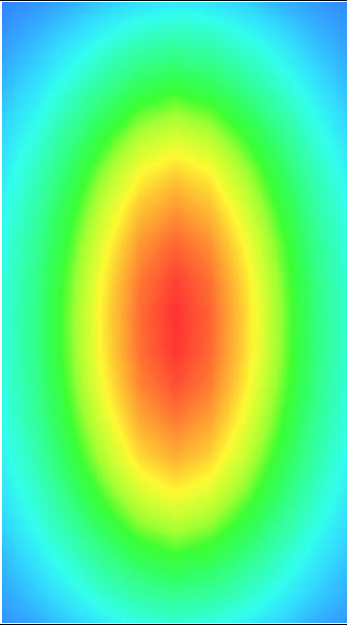
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

## Annex B. Plots of SAR Measurement

---

| <b><u>TYPE</u></b> | <b><u>BAND</u></b> | <b><u>PARAMETERS</u></b>                                                                       |
|--------------------|--------------------|------------------------------------------------------------------------------------------------|
| Phone              | GSM850             | <u>Measurement 3:</u> Left Head with Cheek device position on Middle Channel in GSM mode       |
| Phone              | GSM1900            | <u>Measurement 7:</u> Left Head with Cheek device position on High Channel in GSM mode         |
| Phone              | GPRS850_2TX        | <u>Measurement 11:</u> Left Head with Cheek device position on Middle Channel in GPRS mode     |
| Phone              | GPRS1900_2TX       | <u>Measurement 15:</u> Left Head with Cheek device position on High Channel in GPRS mode       |
| Phone              | WCDMA1900_RMC      | <u>Measurement 19:</u> Left Head with Cheek device position on Low Channel in WCDMA mode       |
| Phone              | WCDMA1700_RMC      | <u>Measurement 23:</u> Left Head with Cheek device position on High Channel in WCDMA mode      |
| Phone              | WCDMA850_RMC       | <u>Measurement 27:</u> Left Head with Cheek device position on Low Channel in WCDMA mode       |
| Phone              | LTE Band 4_RMC     | <u>Measurement 31:</u> Left Head with Cheek device position on Low Channel in LTE mode         |
| Phone              | LTE Band 7_RMC     | <u>Measurement 39:</u> Left Head with Cheek device position on Low Channel in LTE mode         |
| Phone              | WiFi_802.11b       | <u>Measurement 47:</u> Left Head with Cheek device position on Middle Channel in 802.11b mode  |
| Phone              | GSM850             | <u>Measurement 50:</u> Flat Plane with Front device position on Middle Channel in GSM mode     |
| Phone              | GSM1900            | <u>Measurement 51:</u> Flat Plane with Back device position on High Channel in GSM mode        |
| Phone              | GPRS850_2TX        | <u>Measurement 69:</u> Flat Plane with Back device position on Middle Channel in GPRS mode     |
| Phone              | GPRS1900_2TX       | <u>Measurement 73:</u> Flat Plane with Back device position on High Channel in GPRS mode       |
| Phone              | WCDMA1900_RMC      | <u>Measurement 77:</u> Flat Plane with Back side device position on Low Channel in WCDMA mode  |
| Phone              | WCDMA1700_RMC      | <u>Measurement 81:</u> Flat Plane with Back side device position on High Channel in WCDMA mode |
| Phone              | WCDMA850_RMC       | <u>Measurement 85:</u> Flat Plane with Back side device position on Low Channel in WCDMA mode  |
| Phone              | LTE Band 4_RMC     | <u>Measurement 89:</u> Flat Plane with Back device position on Low Channel in LTE mode         |

|                                                                                                                                          |                       |                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------|
| <b>Phone</b>                                                                                                                             | <b>LTE Band 7_RMC</b> | <u>Measurement 102:</u> Flat Plane with Back device position on Middle Channel in LTE mode          |
| <b>Phone</b>                                                                                                                             | <b>WiFi_802.11b</b>   | <u>Measurement 107:</u> Flat Plane with Back side device position on Middle Channel in 802.11b mode |
| <i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i> |                       |                                                                                                     |

MEASUREMENT 3


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-15  
Measurement duration: 11 minutes 48 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | GSM850                        |
| Channels        | Middle                        |
| Signal          | TDMA (Crest factor: 8.0)      |

B. SAR Measurement Results



|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 836.600000 |
| Relative Permittivity (real part) | 41.110245  |
| Conductivity (S/m)                | 0.871245   |
| Power Variation (%)               | 1.144536   |
| Ambient Temperature               | 21.1       |
| Liquid Temperature                | 21.3       |

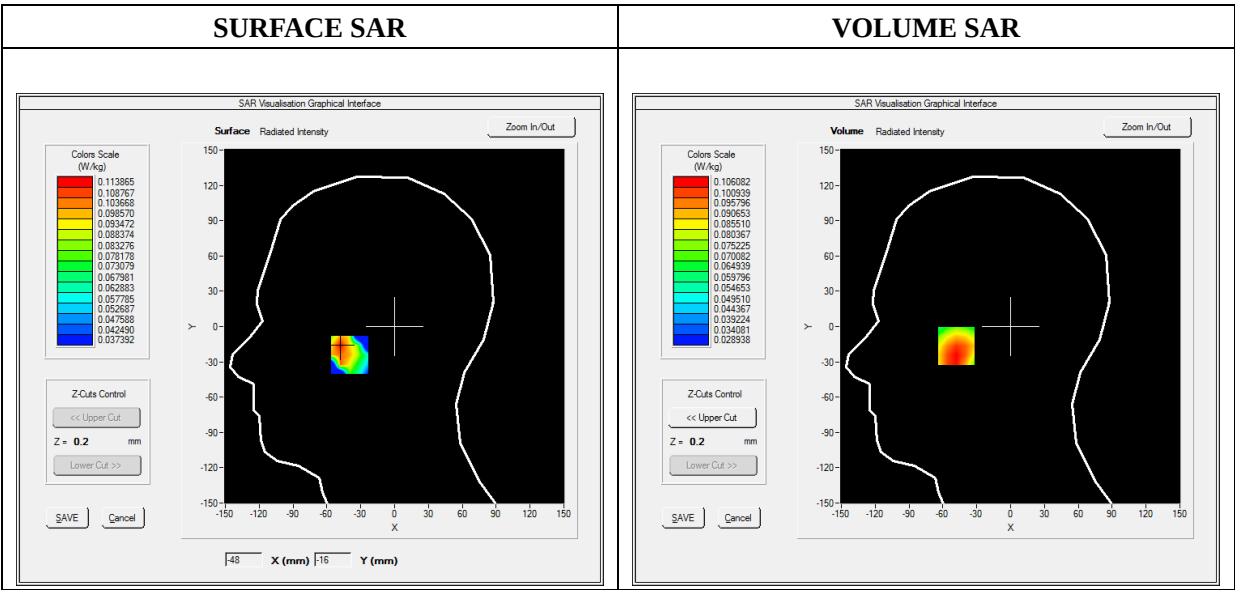

Maximum location: X=-48.00, Y=-16.00

SAR Peak: 0.16 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.079371 |
| SAR 1g (W/Kg)  | 0.105114 |

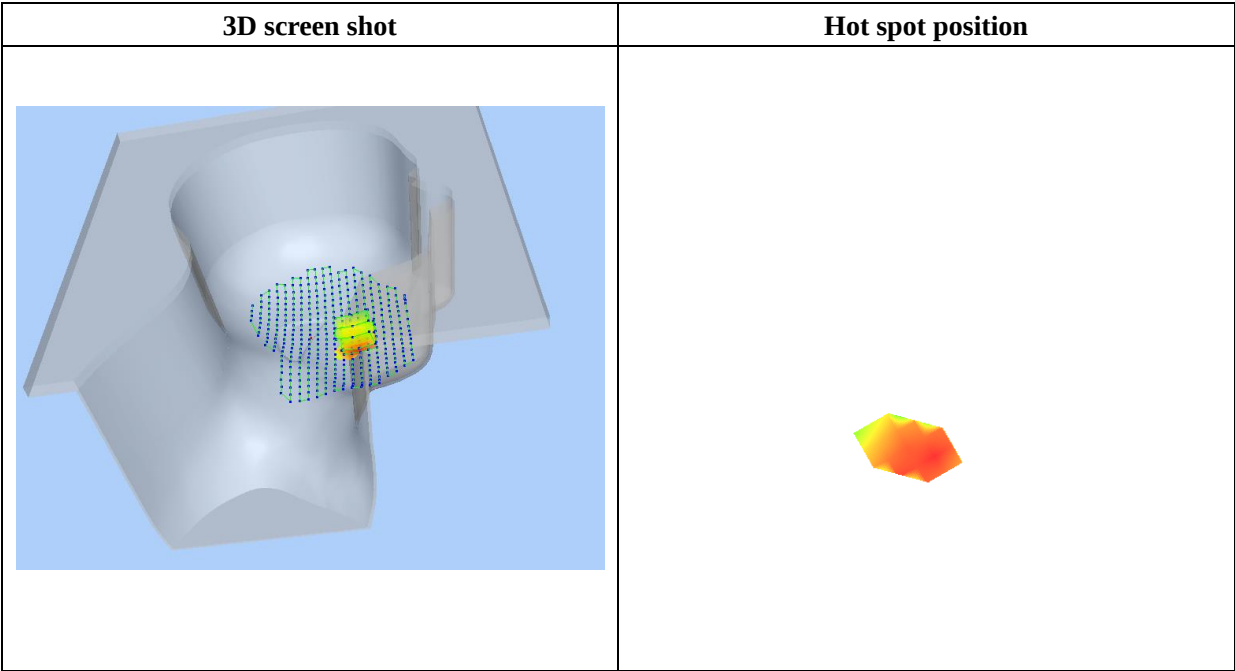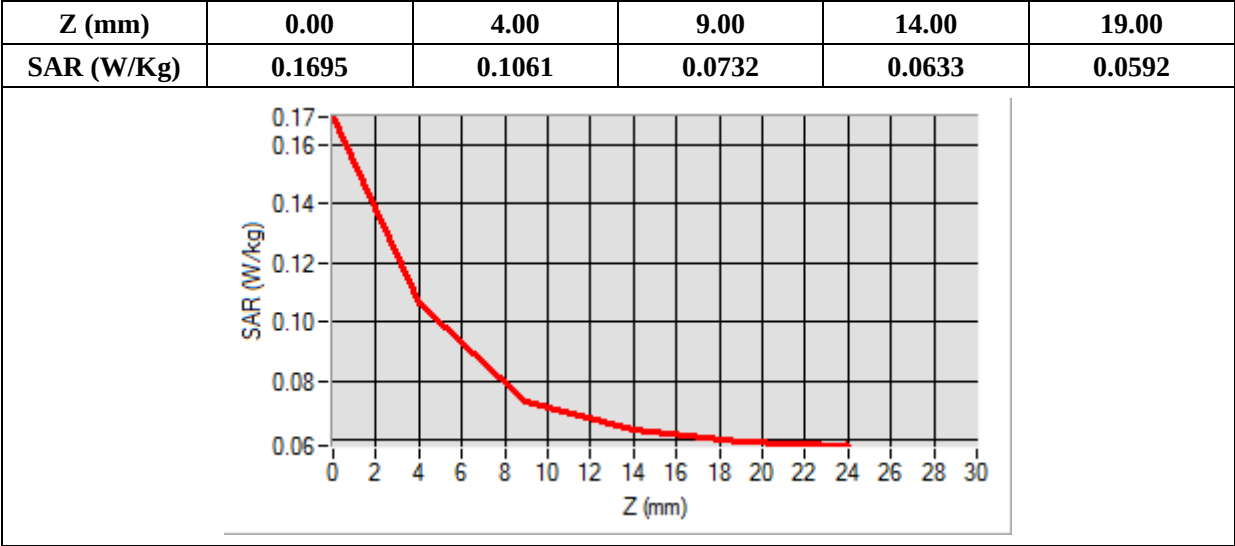

## MEASUREMENT 7

Type: Phone measurement (Complete)

Date of measurement: 2020-06-16

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | GSM1900                       |
| Channels        | High                          |
| Signal          | TDMA (Crest factor: 8.0)      |

### B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1909.800000 |
| Relative Permittivity (real part) | 38.560124   |
| Conductivity (S/m)                | 1.380369    |
| Power Variation (%)               | 1.442440    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

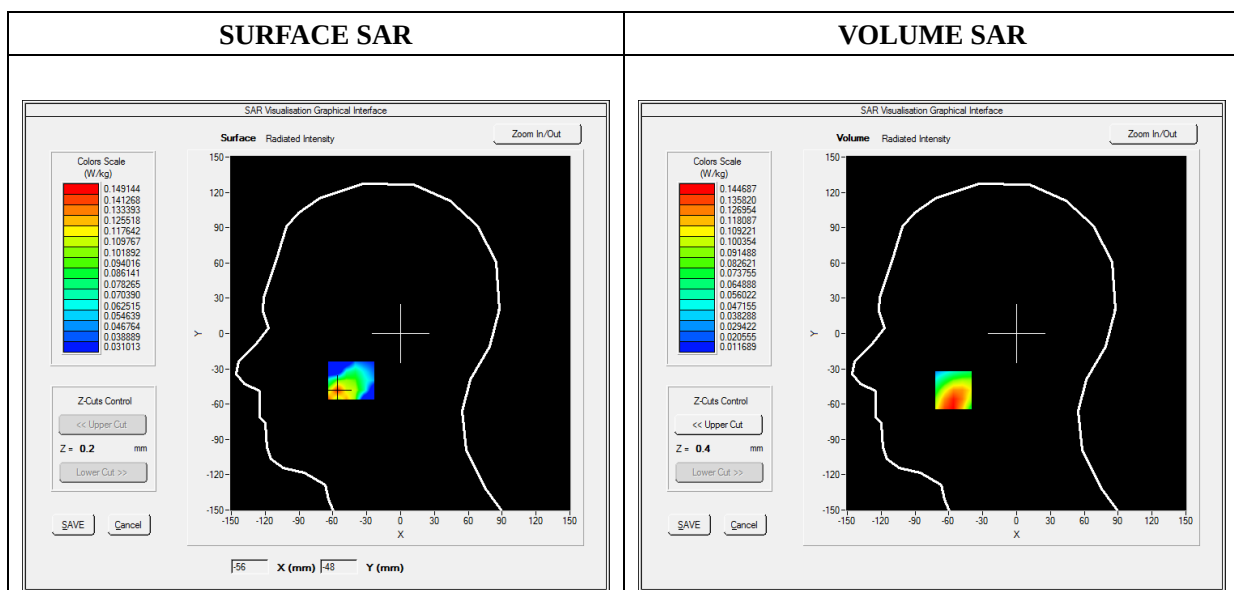




Maximum location: X=-56.00, Y=-48.00

SAR Peak: 0.23 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.079673 |
| SAR 1g (W/Kg)  | 0.136615 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.5315 | 0.1447 | 0.0399 | 0.0477 | 0.0250 |

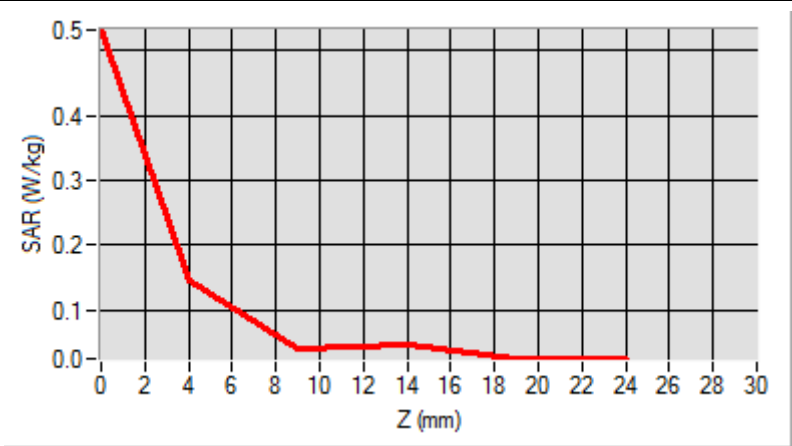
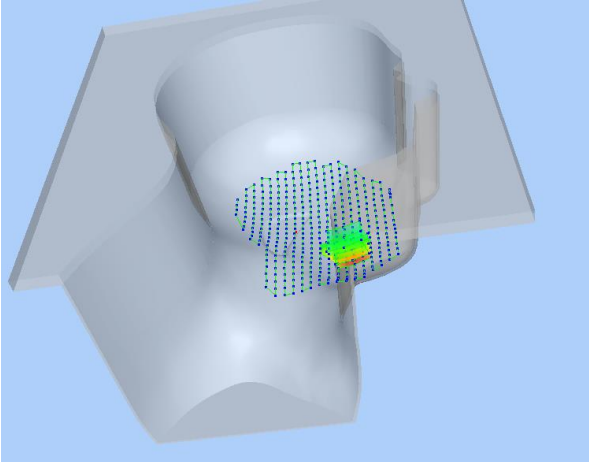
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 11


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-15  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | GPRS850_2TX                   |
| Channels        | Middle                        |
| Signal          | Duty Cycle: 1:4               |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 836.600000 |
| Relative Permittivity (real part) | 41.110245  |
| Conductivity (S/m)                | 0.871245   |
| Power Variation (%)               | 1.536272   |
| Ambient Temperature               | 21.1       |
| Liquid Temperature                | 21.3       |

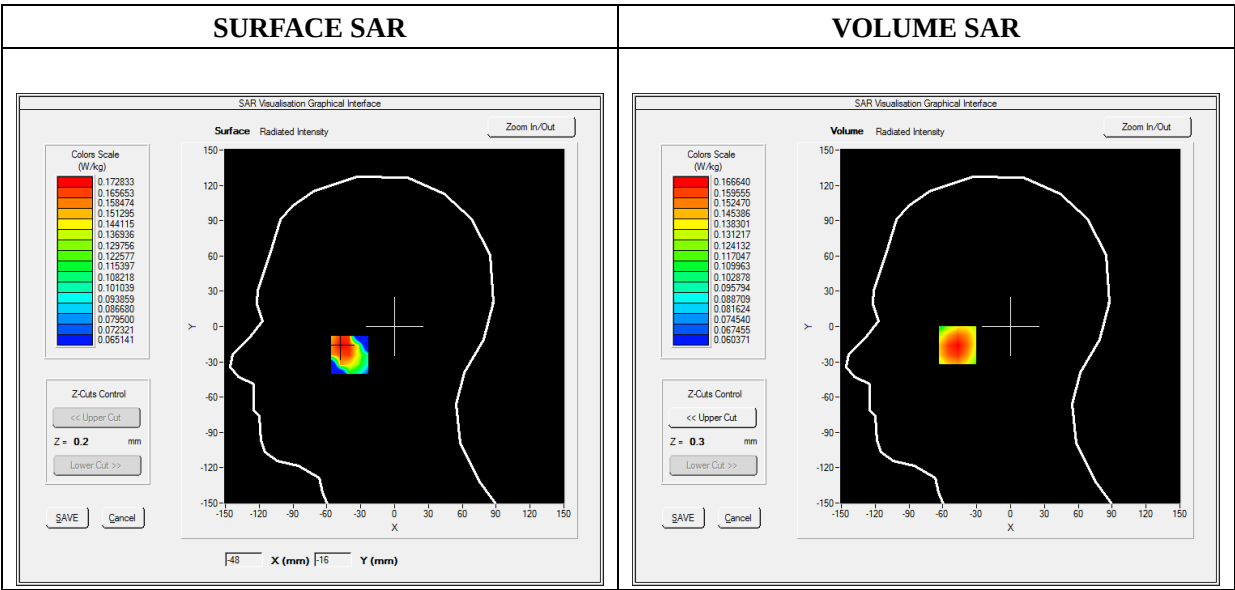



Maximum location: X=-47.00, Y=-15.00

SAR Peak: 0.18 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.138034 |
| SAR 1g (W/Kg)  | 0.163357 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.1765 | 0.1666 | 0.1533 | 0.1391 | 0.1243 |

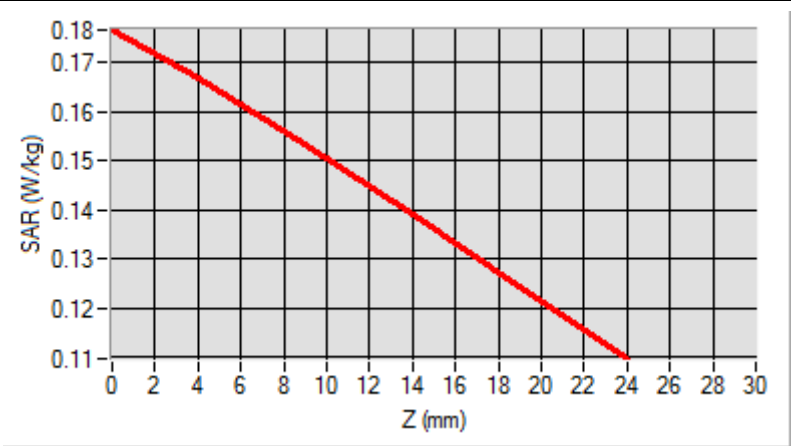
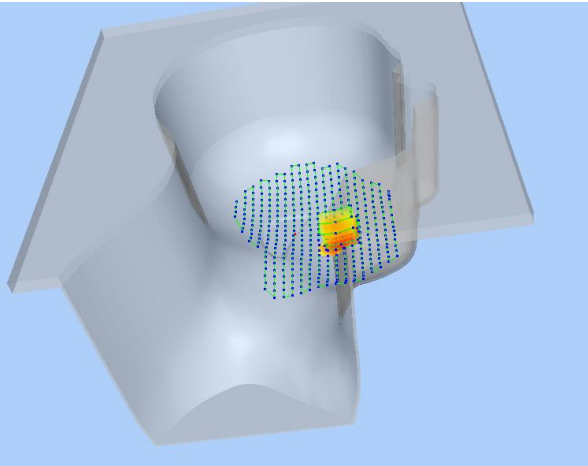
|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                     |
|  |  |

MEASUREMENT 15


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-16  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | GPRS1900_2TX                  |
| Channels        | High                          |
| Signal          | Duty Cycle: 1:4               |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1909.800000 |
| Relative Permittivity (real part) | 38.560124   |
| Conductivity (S/m)                | 1.380369    |
| Power Variation (%)               | 1.536272    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

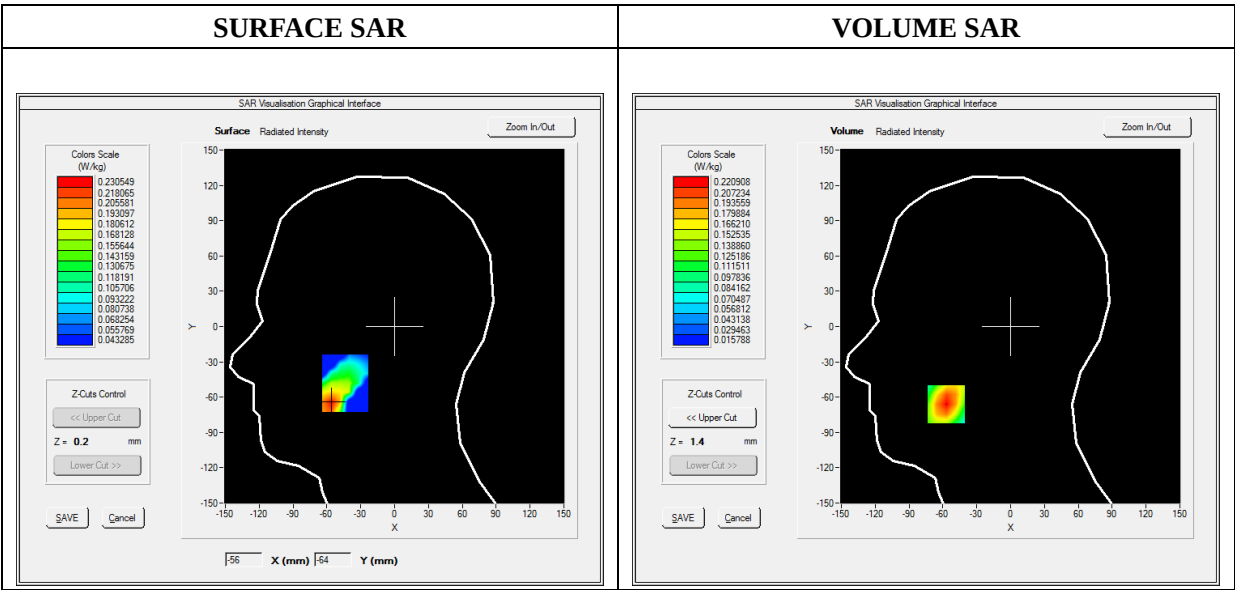

Maximum location: X=-57.00, Y=-66.00

SAR Peak: 0.33 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.124082 |
| SAR 1g (W/Kg)  | 0.208413 |

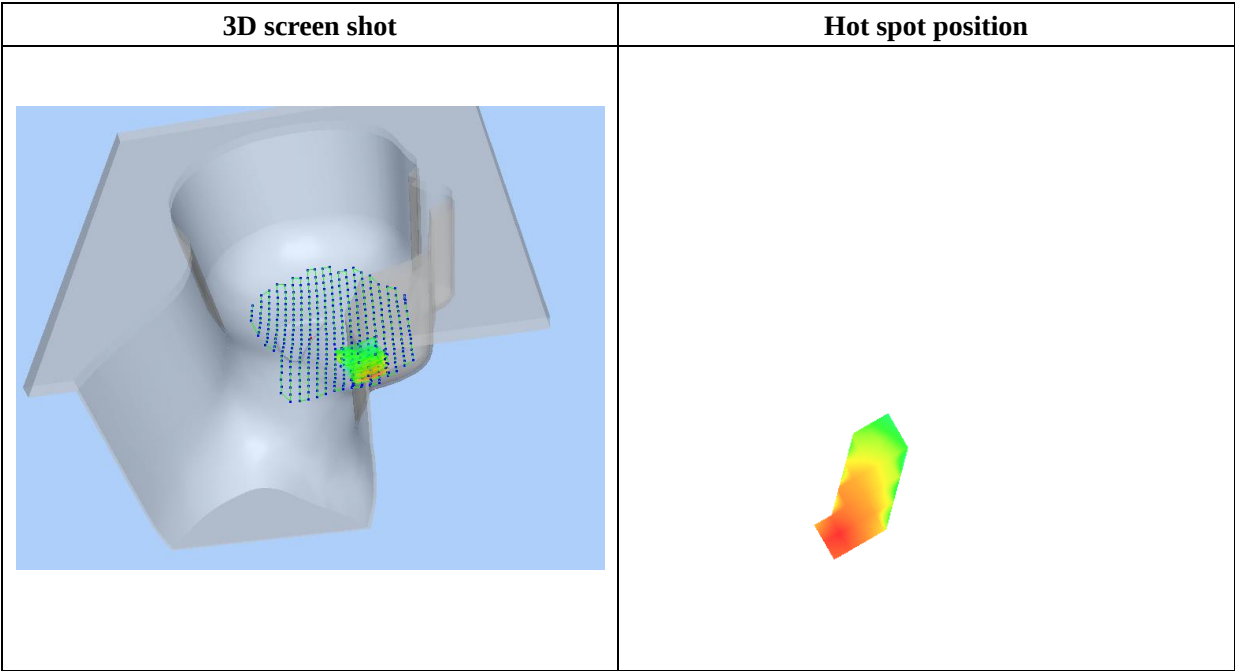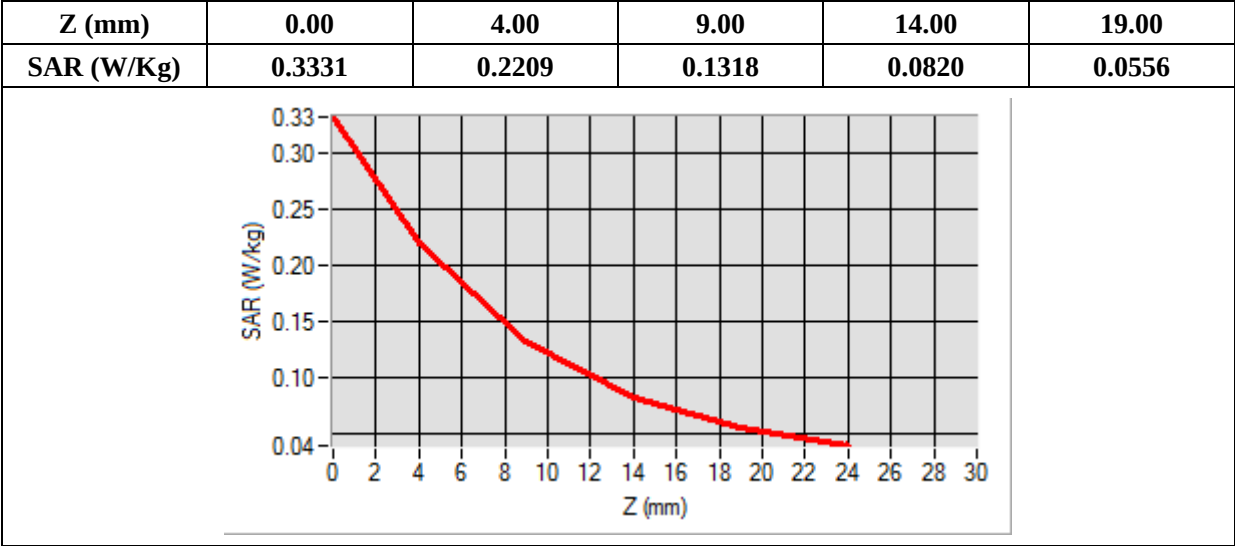

MEASUREMENT 19


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-16  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | WCDMA1900_RMC                 |
| Channels        | Low                           |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1852.400000 |
| Relative Permittivity (real part) | 38.560124   |
| Conductivity (S/m)                | 1.380369    |
| Power Variation (%)               | 1.524540    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

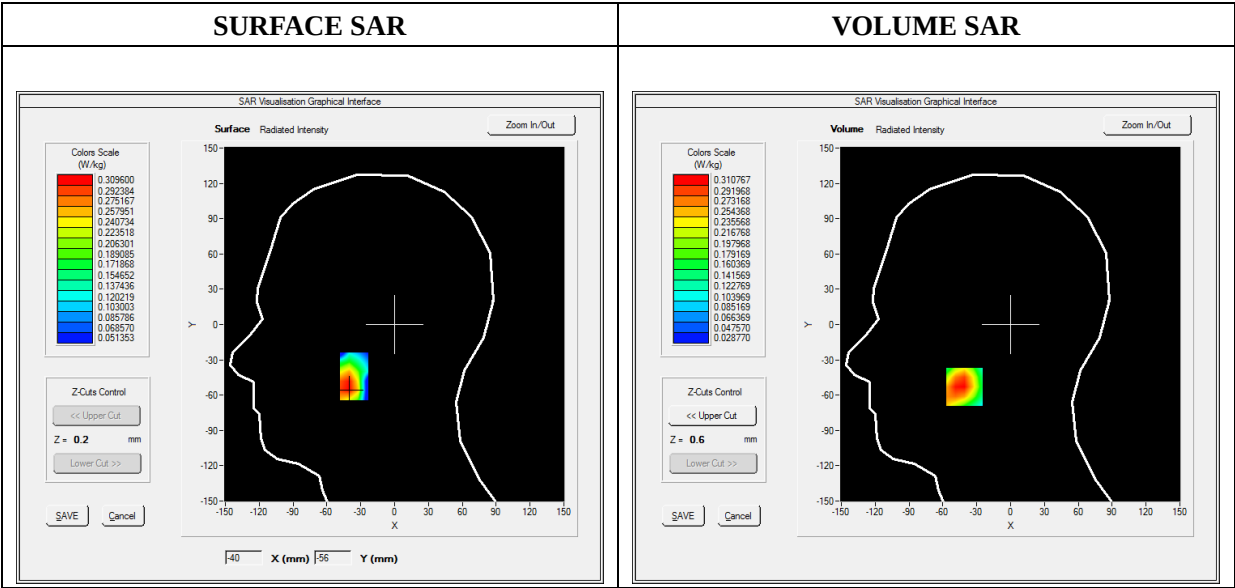




Maximum location: X=-41.00, Y=-53.00

SAR Peak: 0.41 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.196877 |
| SAR 1g (W/Kg)  | 0.299924 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.4029 | 0.3108 | 0.2246 | 0.1640 | 0.1216 |

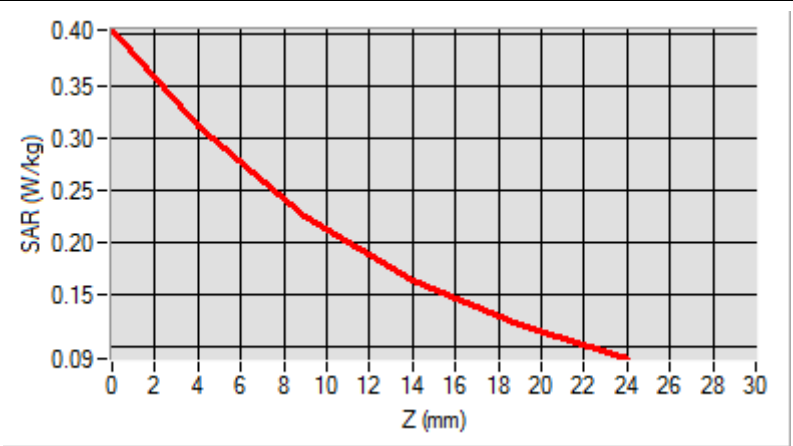
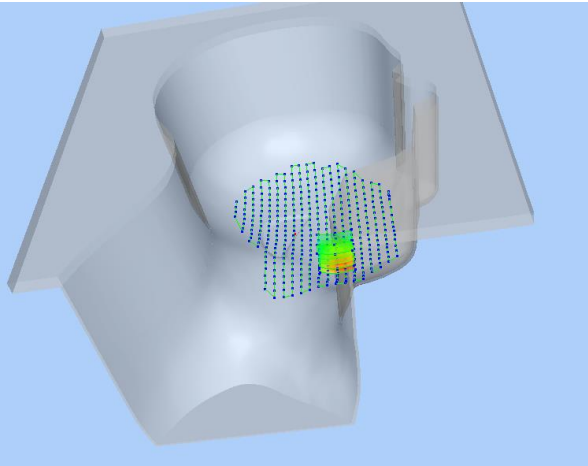
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

## MEASUREMENT 23

Type: Phone measurement (Complete)

Date of measurement: 2020-06-16

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.84; Calibrated: 05/22/2019

### A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | WCDMA1700_RMC                 |
| Channels        | High                          |
| Signal          | Duty Cycle 1:1                |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1752.600000 |
| Relative Permittivity (real part) | 39.024890   |
| Conductivity (S/m)                | 1.371250    |
| Power Variation (%)               | 1.342427    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

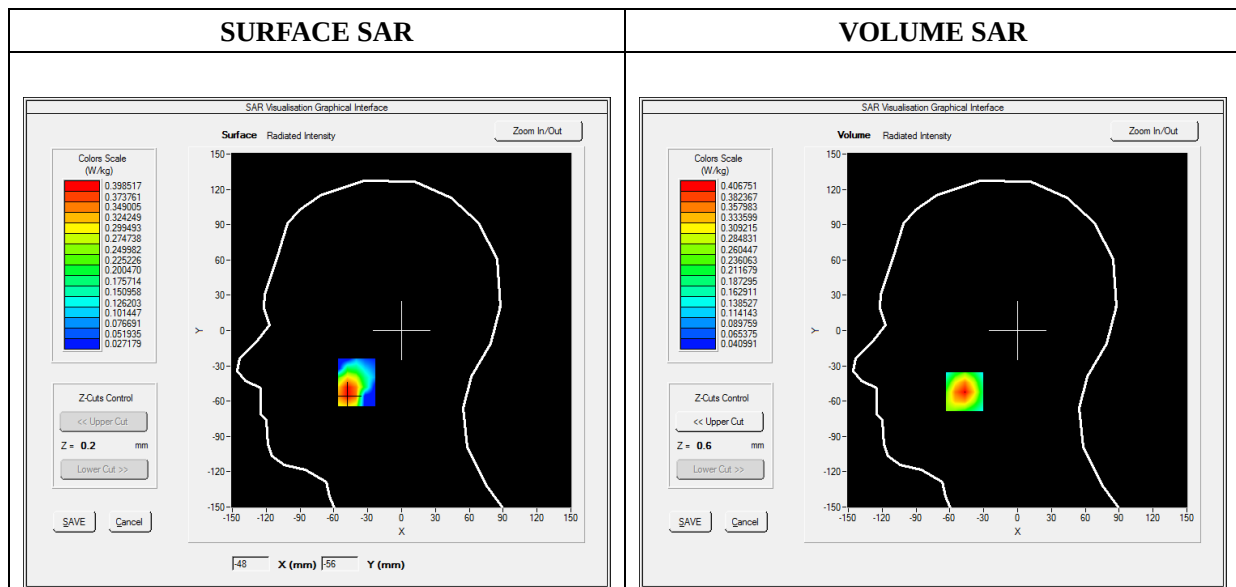

Maximum location: X=-47.00, Y=-52.00

SAR Peak: 0.51 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.246500 |
| SAR 1g (W/Kg)  | 0.381586 |

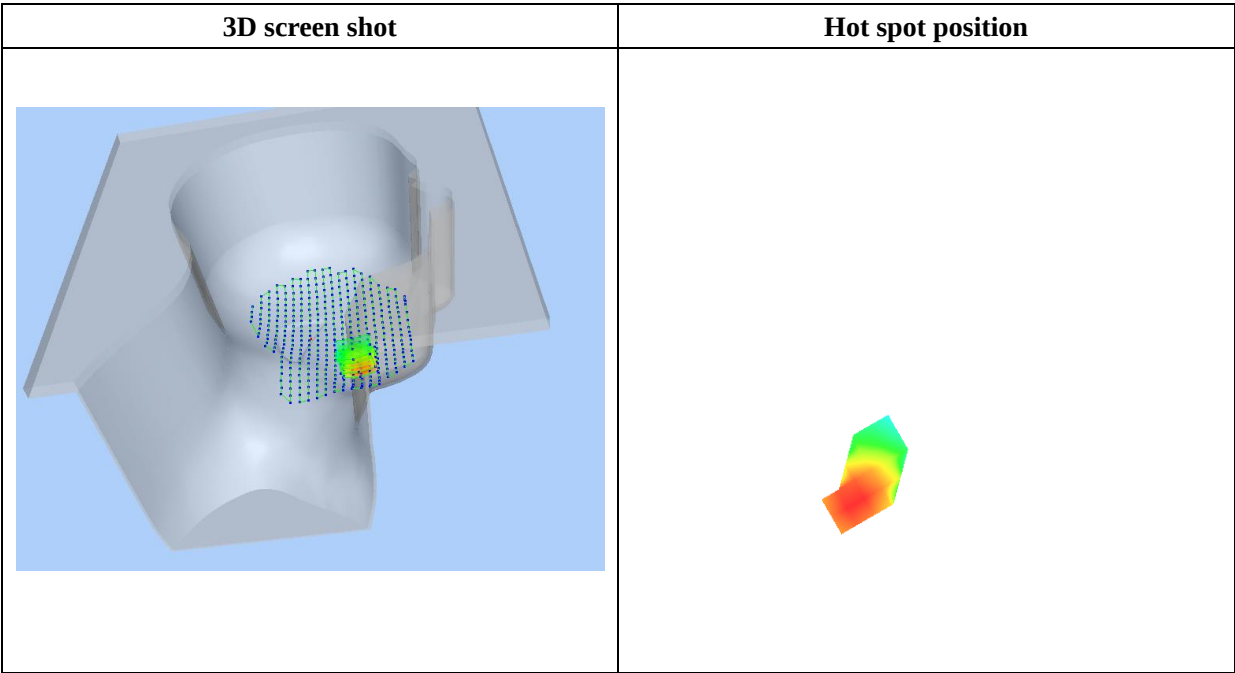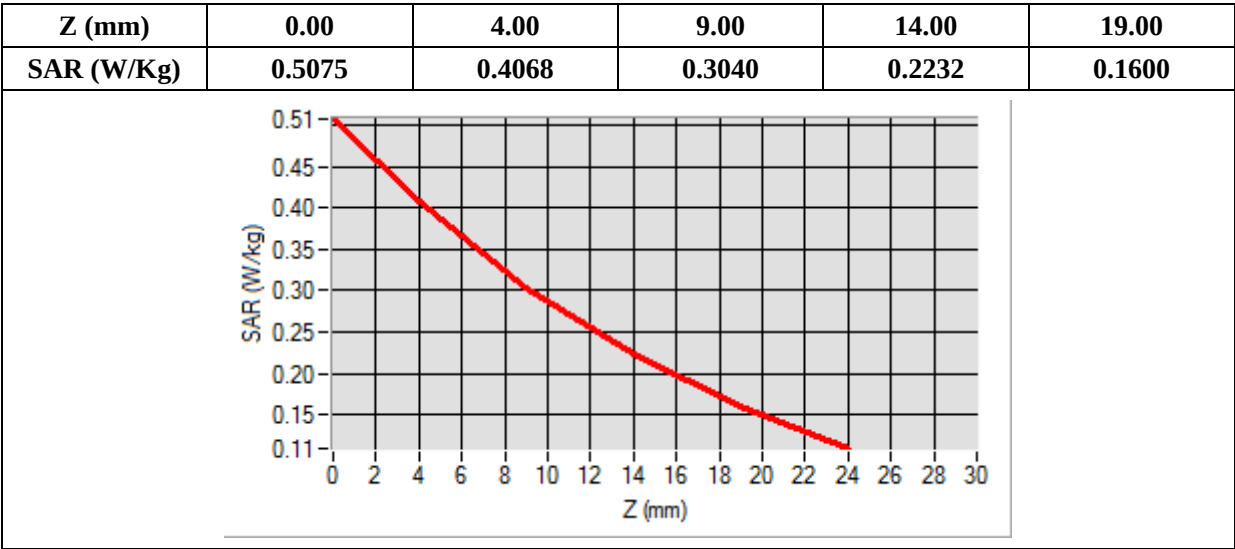

MEASUREMENT 27


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-15  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | WCDMA850_RMC                  |
| Channels        | Low                           |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 826.400000 |
| Relative Permittivity (real part) | 41.110245  |
| Conductivity (S/m)                | 0.871245   |
| Power Variation (%)               | 1.342427   |
| Ambient Temperature               | 21.1       |
| Liquid Temperature                | 21.3       |

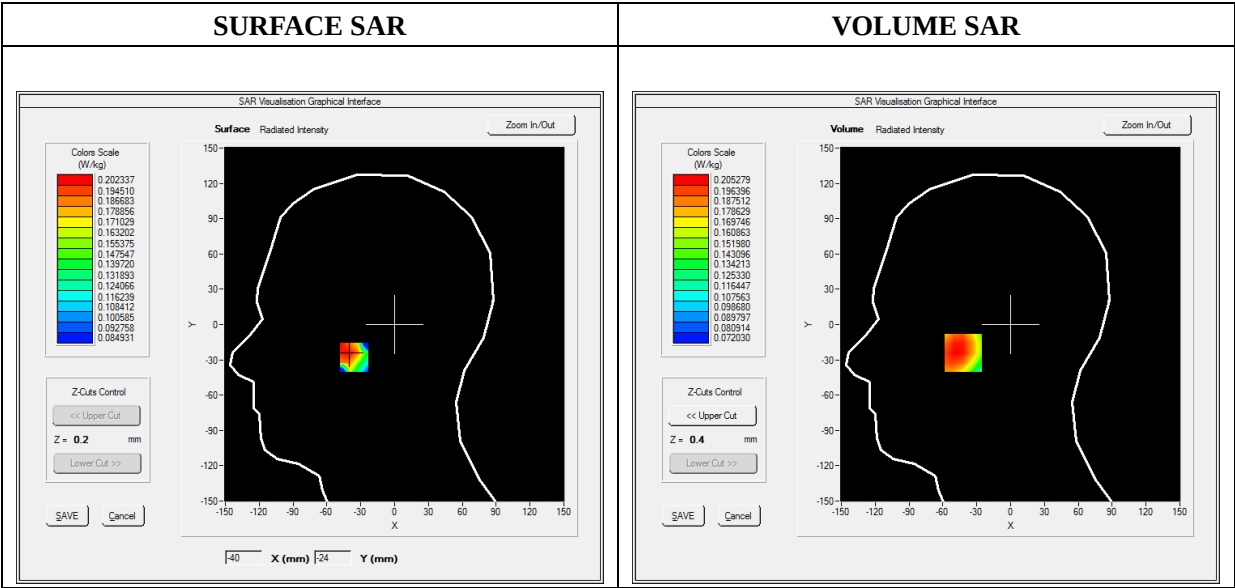



Maximum location: X=-42.00, Y=-24.00

SAR Peak: 0.25 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.168348 |
| SAR 1g (W/Kg)  | 0.203058 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.4182 | 0.2053 | 0.1555 | 0.1524 | 0.1203 |

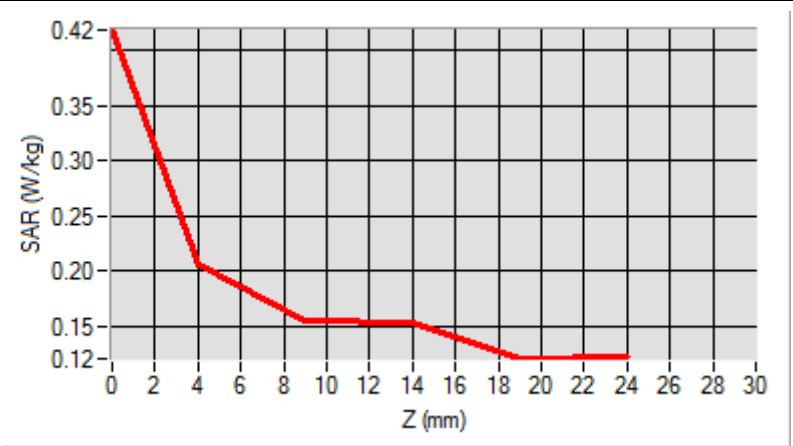
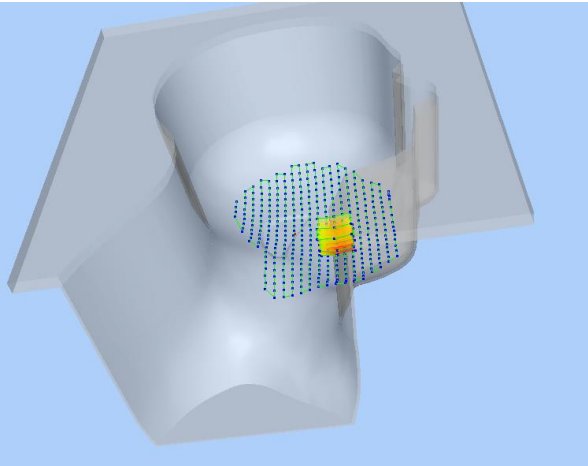
|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                     |
|  |  |

MEASUREMENT 31


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-16  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | LTE Band 4                    |
| Channels        | QPSK, 20MHz, 1RB,Low          |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1720.000000 |
| Relative Permittivity (real part) | 39.024890   |
| Conductivity (S/m)                | 1.371250    |
| Power Variation (%)               | 1.374628    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

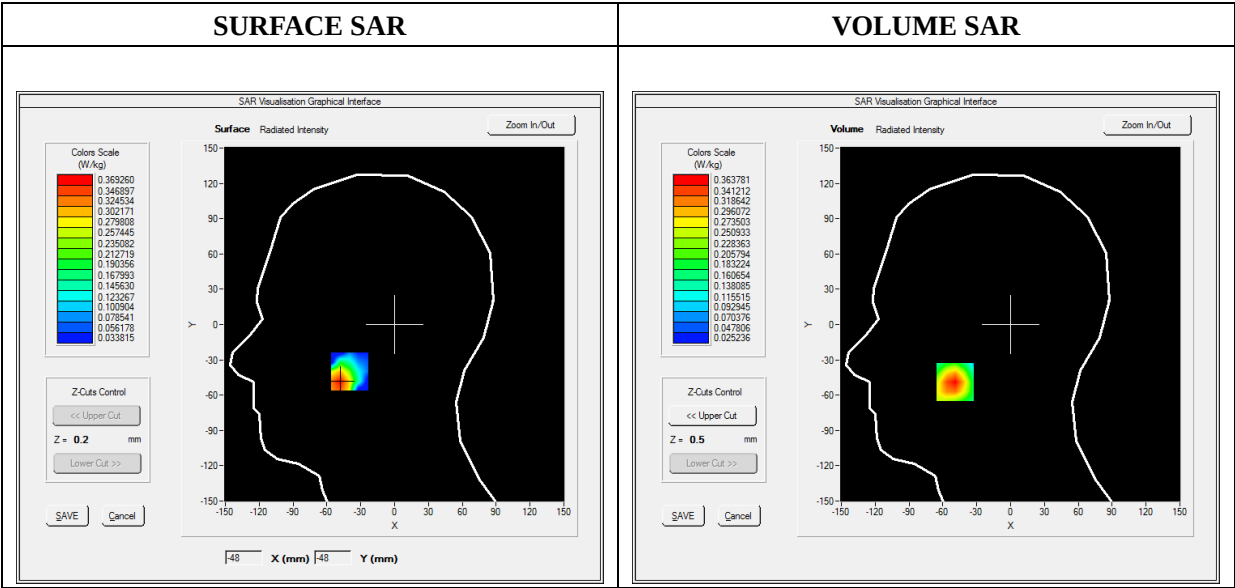

Maximum location: X=-49.00, Y=-49.00

SAR Peak: 0.47 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.219126 |
| SAR 1g (W/Kg)  | 0.343233 |

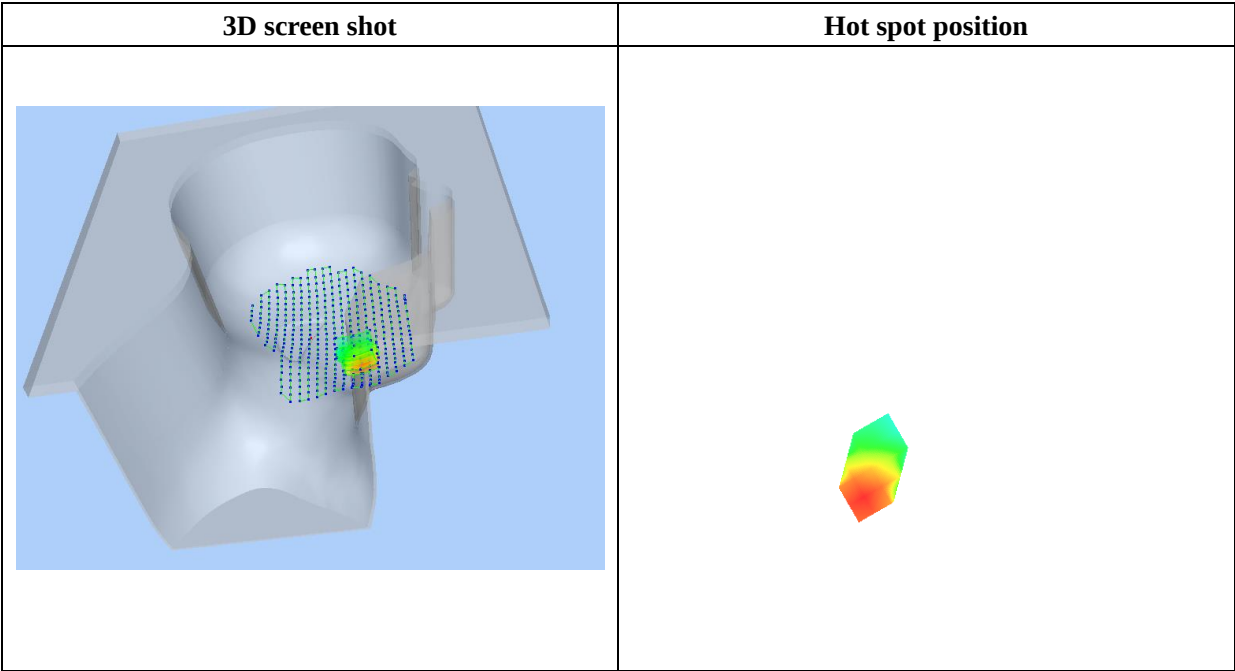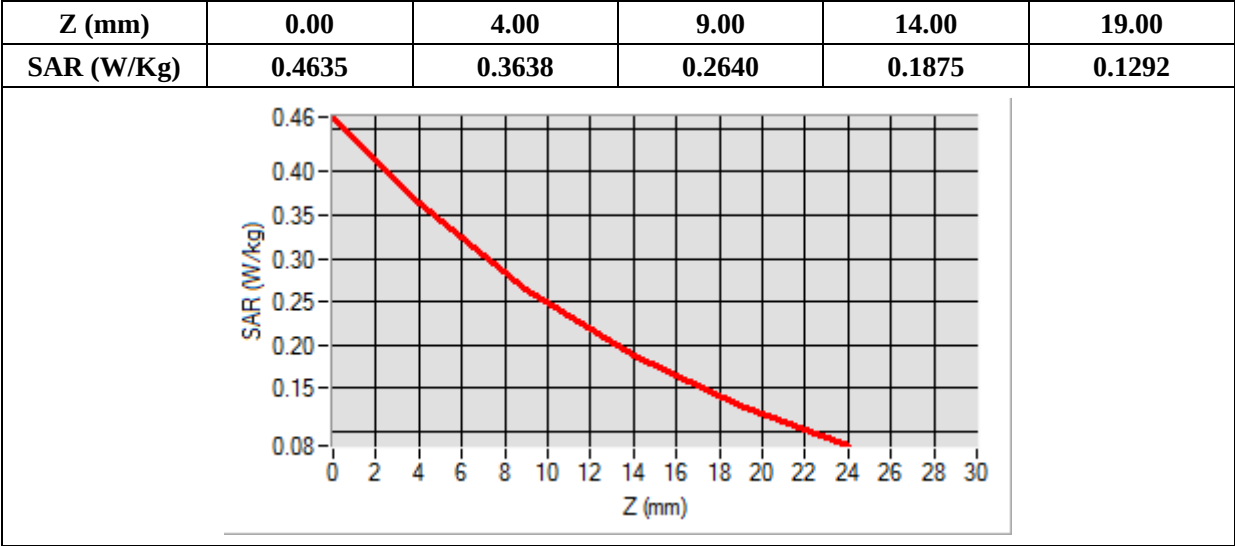

MEASUREMENT 39


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-20  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | LTE Band 7                    |
| Channels        | QPSK, 20MHz, 1RB, Low         |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2510.000000 |
| Relative Permittivity (real part) | 38.631092   |
| Conductivity (S/m)                | 1.930182    |
| Power Variation (%)               | 0.924535    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

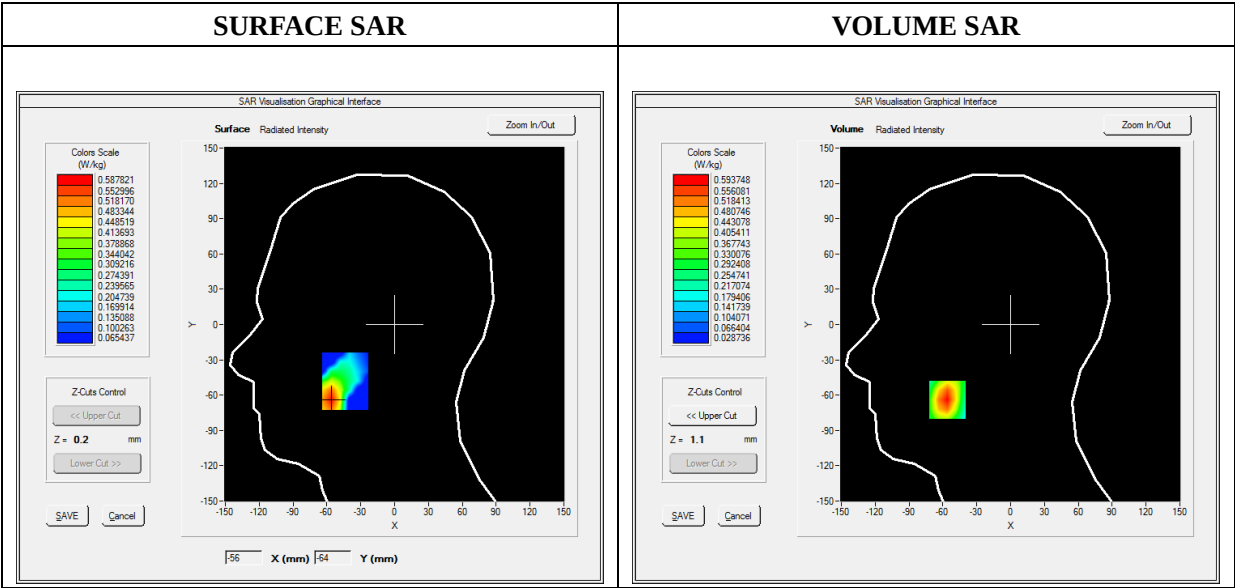




Maximum location: X=-56.00, Y=-64.00

SAR Peak: 0.95 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.304035 |
| SAR 1g (W/Kg)  | 0.557807 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.9394 | 0.5937 | 0.3280 | 0.1859 | 0.1142 |

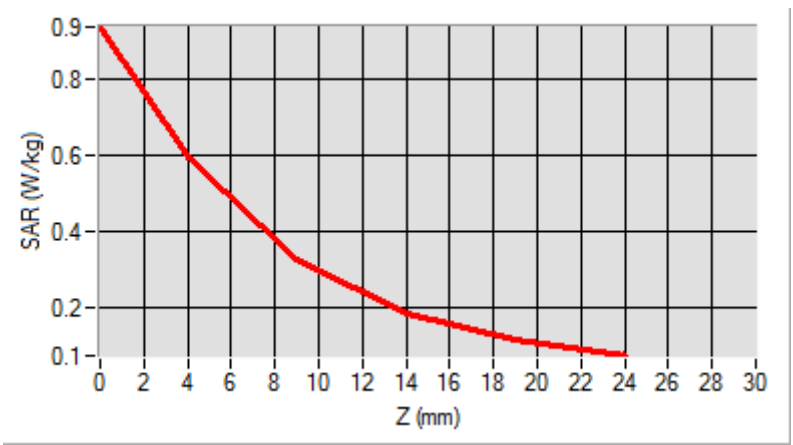
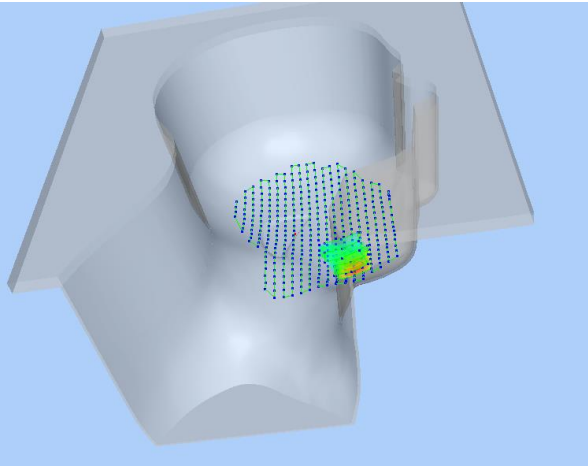
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 47


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-20  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Left head                     |
| Device Position | Cheek                         |
| Band            | WiFi_802.11b                  |
| Channels        | Middle                        |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2437.000000 |
| Relative Permittivity (real part) | 38.153660   |
| Conductivity (S/m)                | 1.740236    |
| Power Variation (%)               | 3.234772    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

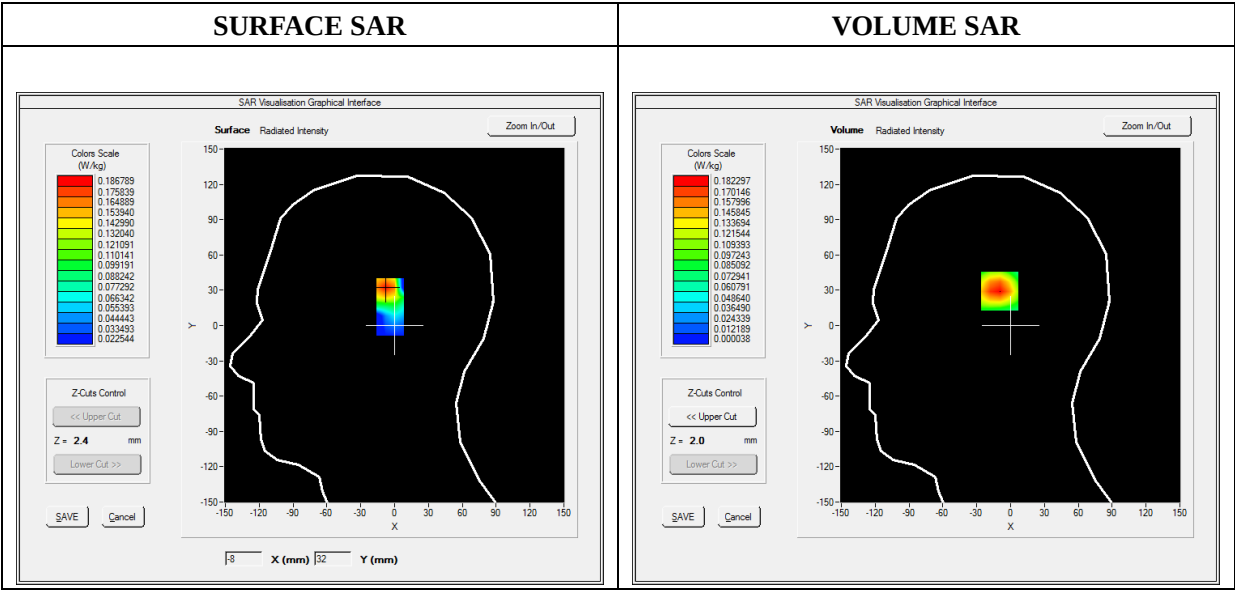

Maximum location: X=-8.00, Y=32.00

SAR Peak: 0.73 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.103743 |
| SAR 1g (W/Kg)  | 0.248142 |

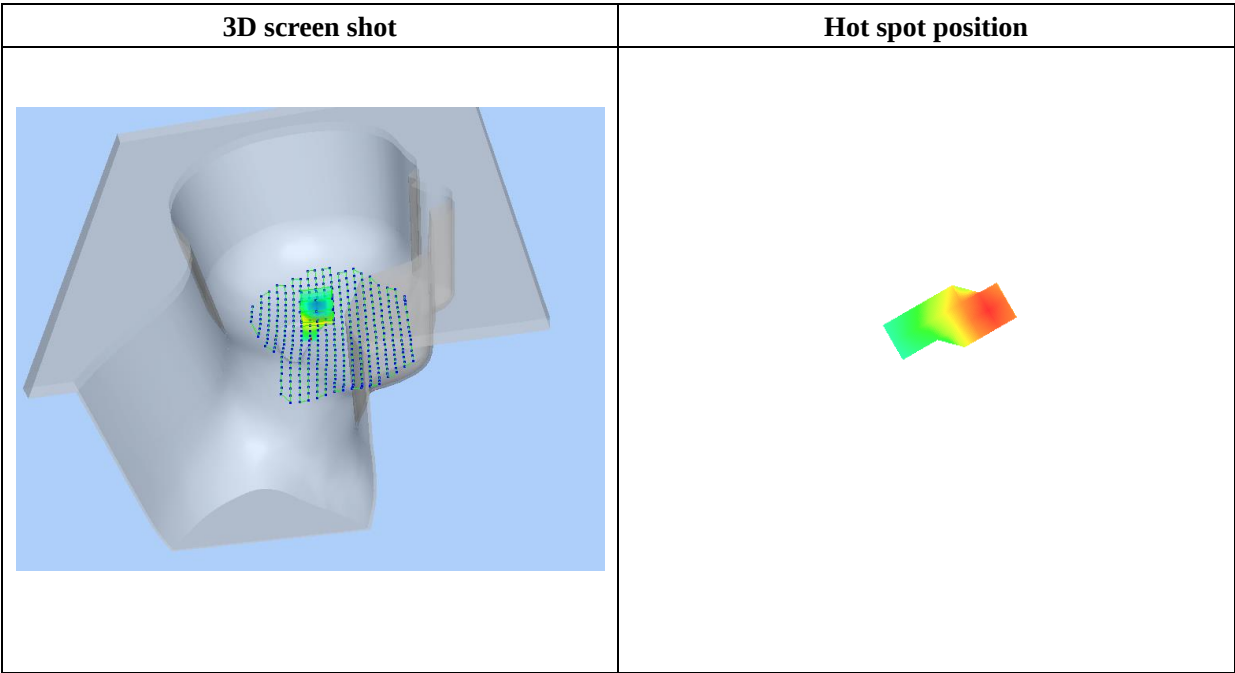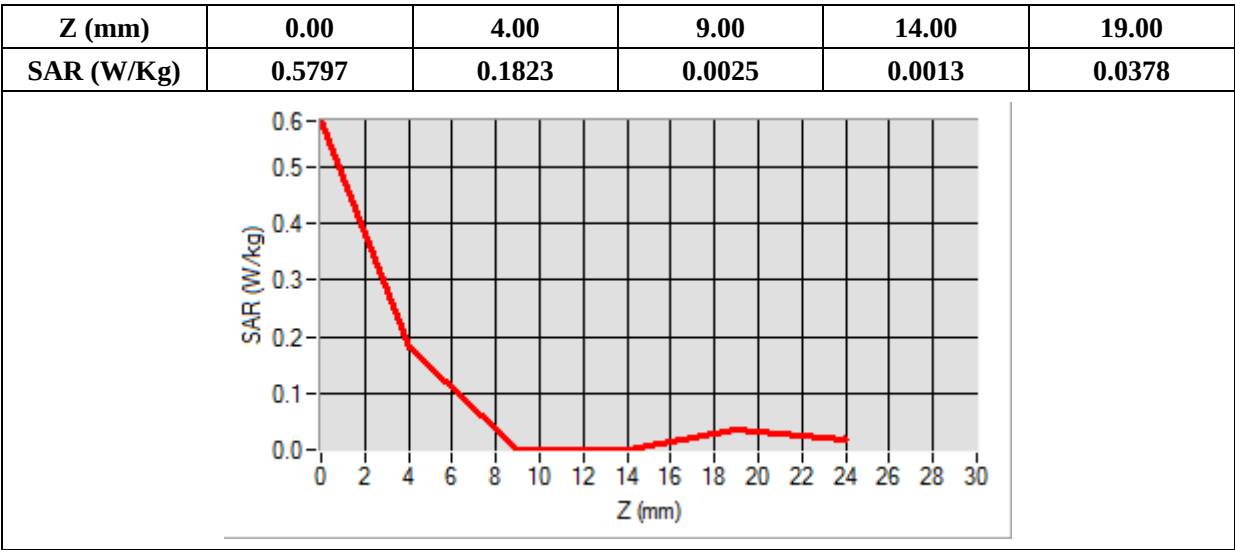

MEASUREMENT 50


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-15  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat Plane                    |
| Device Position | Front                         |
| Band            | GSM850                        |
| Channels        | Middle                        |
| Signal          | TDMA (Crest factor: 8.0)      |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 836.6000000 |
| Relative Permittivity (real part) | 54.851214   |
| Conductivity (S/m)                | 0.951454    |
| Power Variation (%)               | 0.901472    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

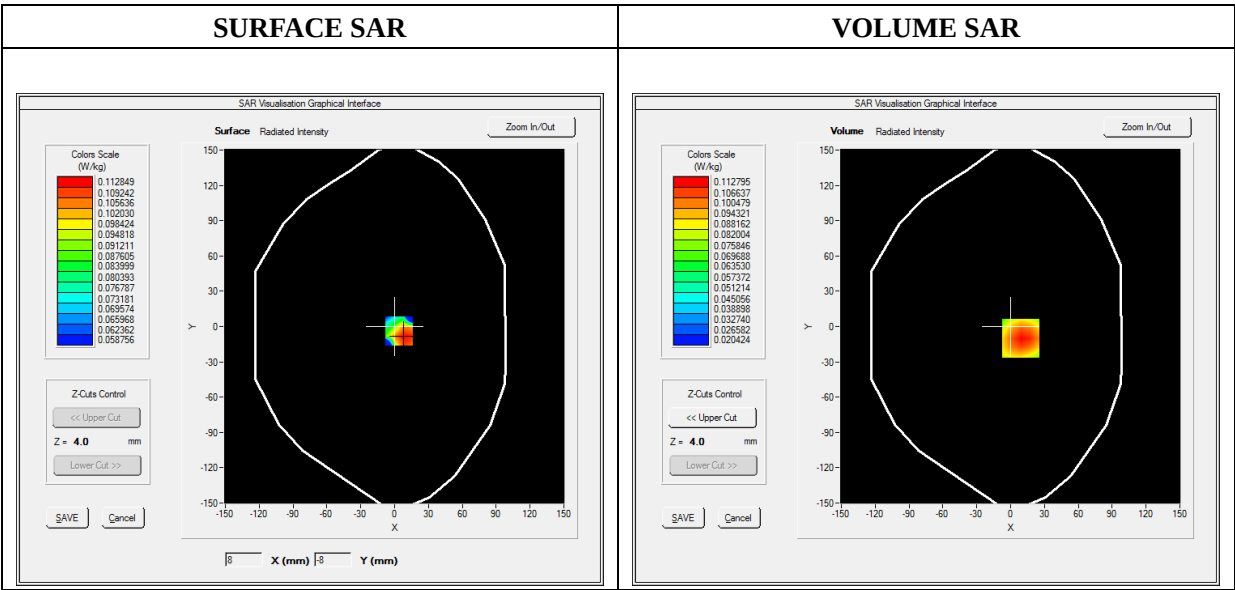

Maximum location: X=9.00, Y=-10.00

SAR Peak: 0.15 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.072949 |
| SAR 1g (W/Kg)  | 0.107971 |

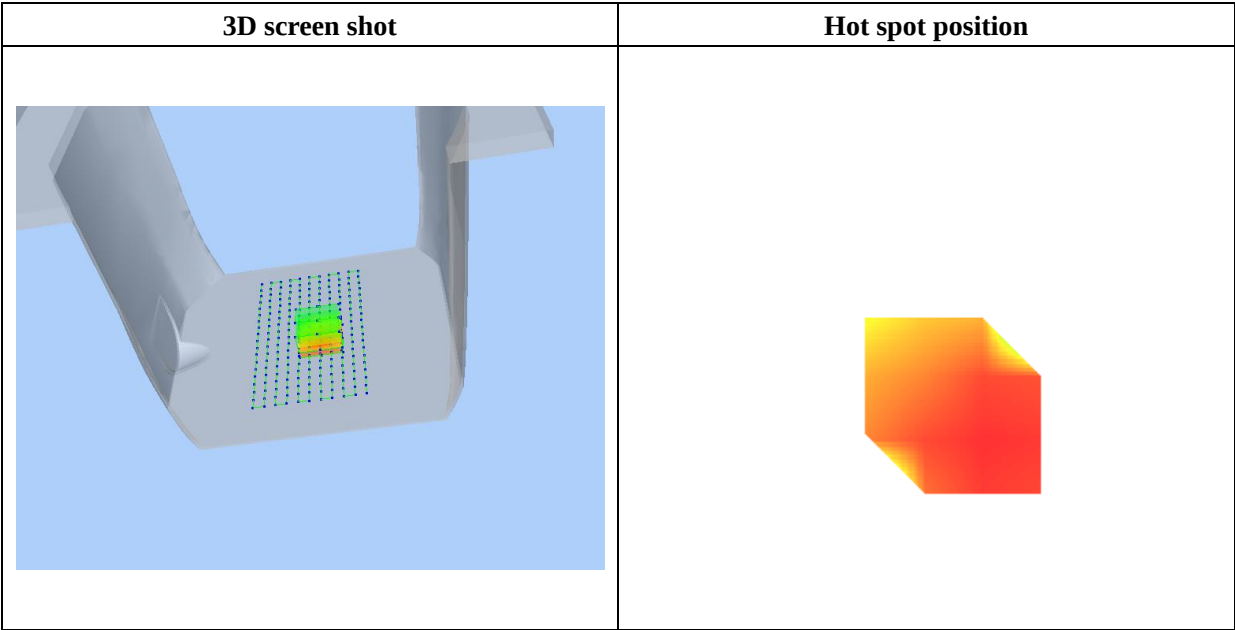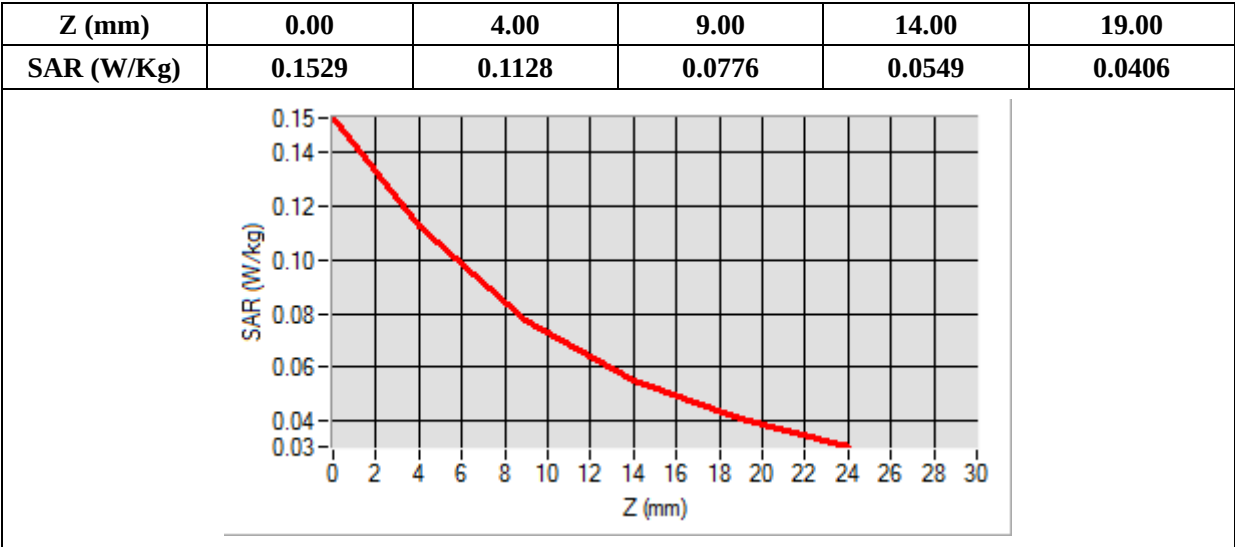

MEASUREMENT 51


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-16  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat Plane                    |
| Device Position | Back                          |
| Band            | GSM1900                       |
| Channels        | High                          |
| Signal          | TDMA (Crest factor: 8.0)      |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1909.800000 |
| Relative Permittivity (real part) | 52.420415   |
| Conductivity (S/m)                | 1.501966    |
| Power Variation (%)               | 1.474622    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

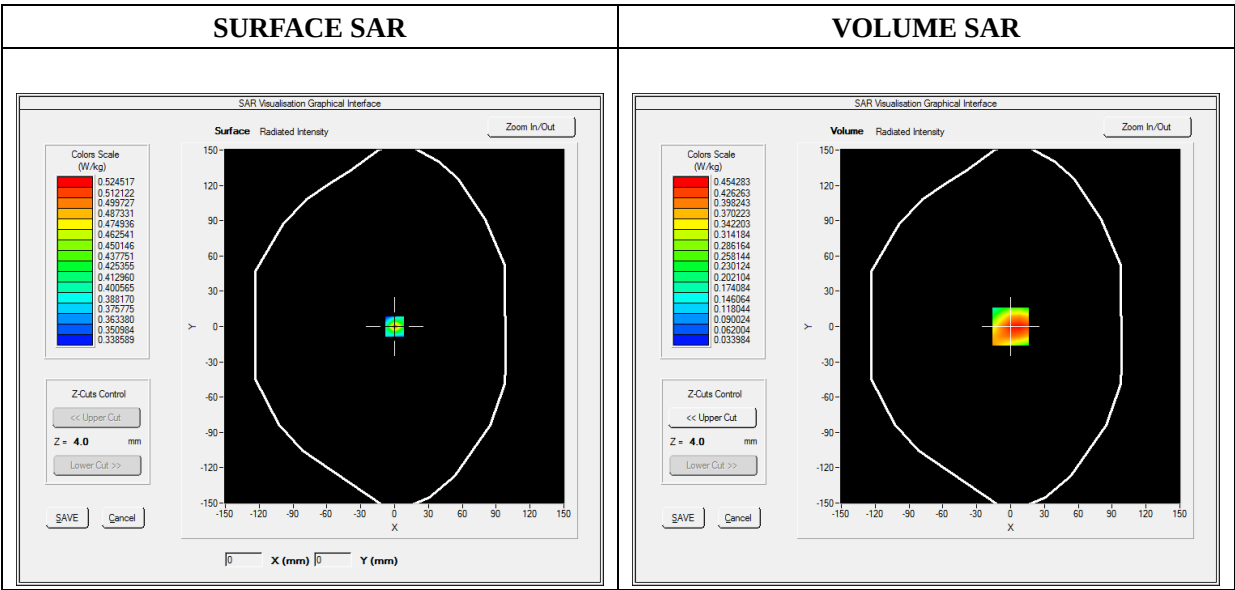



Maximum location: X=0.00, Y=0.00

SAR Peak: 0.71 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.255415 |
| SAR 1g (W/Kg)  | 0.433366 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.9411 | 0.4543 | 0.2323 | 0.1567 | 0.0910 |

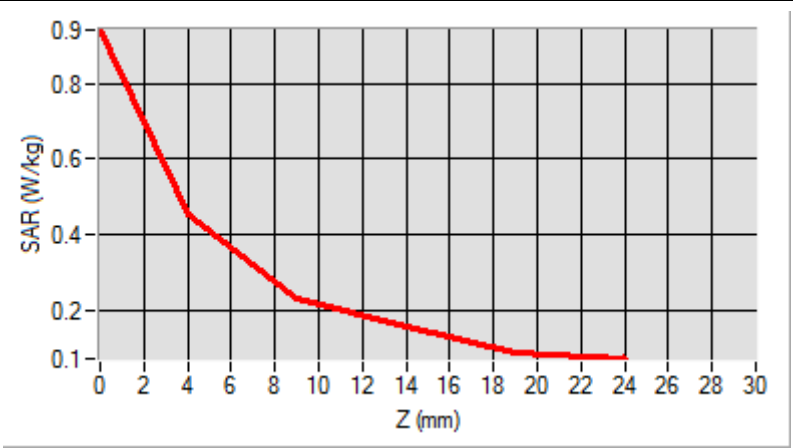
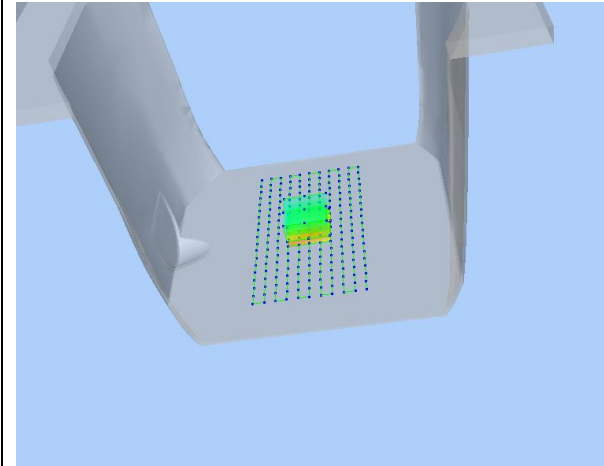
|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                     |
|  |  |

MEASUREMENT 69


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-15  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat plane                    |
| Device Position | Left                          |
| Band            | GPRS850_2TX                   |
| Channels        | Middle                        |
| Signal          | Duty Cycle: 1:4               |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 836.600000 |
| Relative Permittivity (real part) | 54.851214  |
| Conductivity (S/m)                | 0.951454   |
| Power Variation (%)               | 0.901472   |
| Ambient Temperature               | 21.1       |
| Liquid Temperature                | 21.3       |

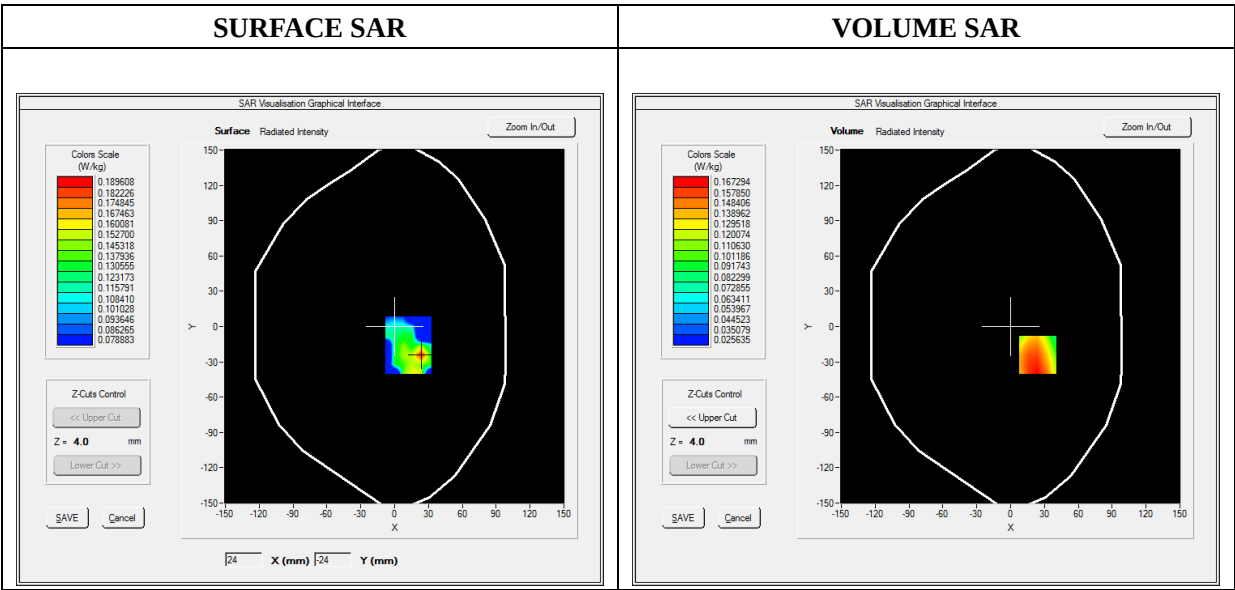




Maximum location: X=24.00, Y=-24.00

SAR Peak: 0.24 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.110430 |
| SAR 1g (W/Kg)  | 0.159732 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.4593 | 0.1673 | 0.0893 | 0.0823 | 0.0471 |

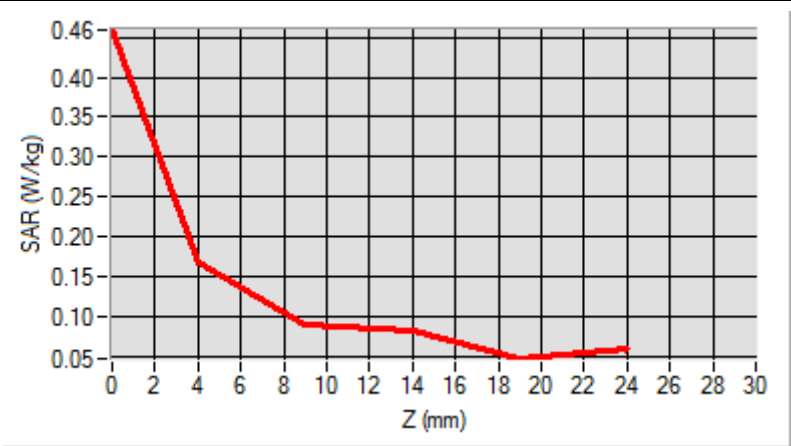
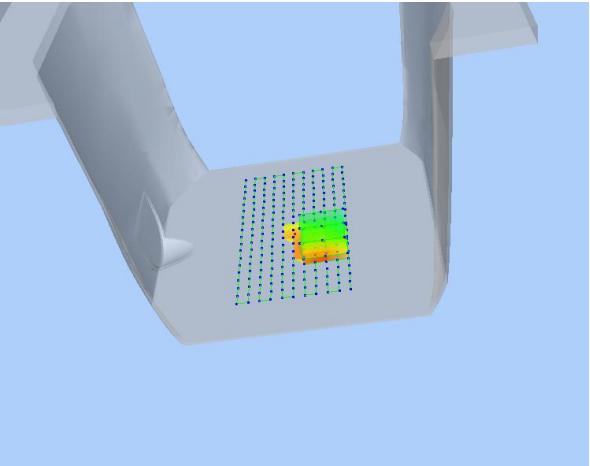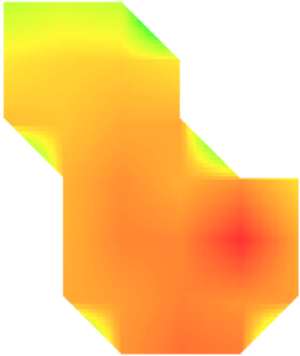
|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                     |
|  |  |

MEASUREMENT 73


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-16  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat plane                    |
| Device Position | Back                          |
| Band            | GPRS1900_2TX                  |
| Channels        | High                          |
| Signal          | Duty Cycle: 1:4               |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1909.800000 |
| Relative Permittivity (real part) | 52.420415   |
| Conductivity (S/m)                | 1.501966    |
| Power Variation (%)               | 2.483762    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

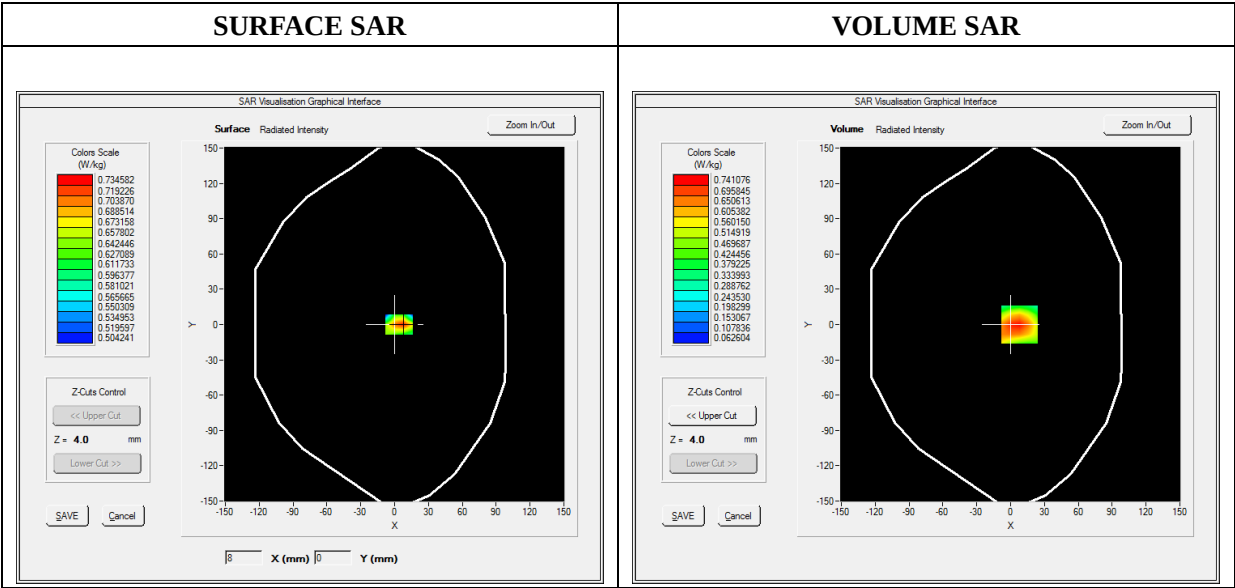

Maximum location: X=8.00, Y=0.00

SAR Peak: 1.14 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.408621 |
| SAR 1g (W/Kg)  | 0.703007 |

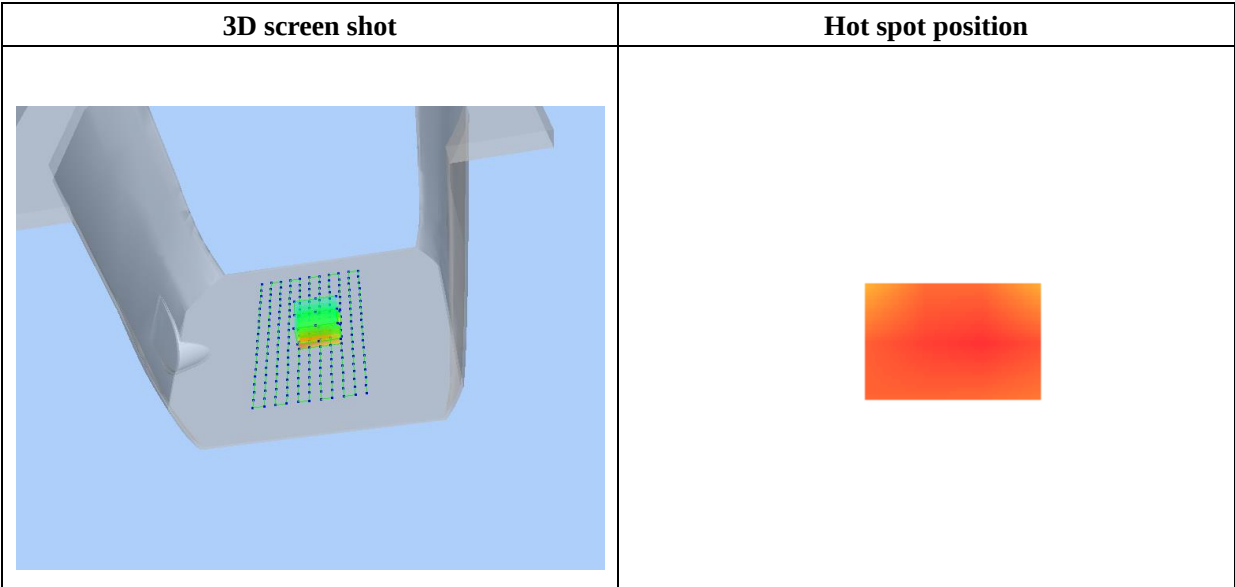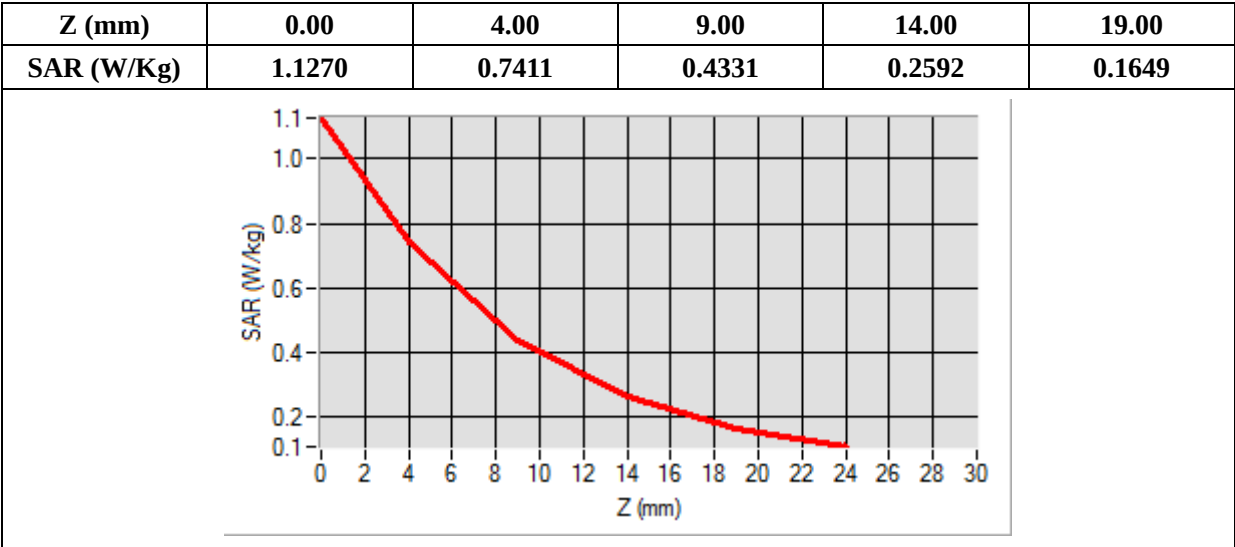

MEASUREMENT 77


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-16  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat Plane                    |
| Device Position | Back                          |
| Band            | WCDMA1900_RMC                 |
| Channels        | Low                           |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1852.400000 |
| Relative Permittivity (real part) | 52.420415   |
| Conductivity (S/m)                | 1.501966    |
| Power Variation (%)               | 1.163283    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.3        |

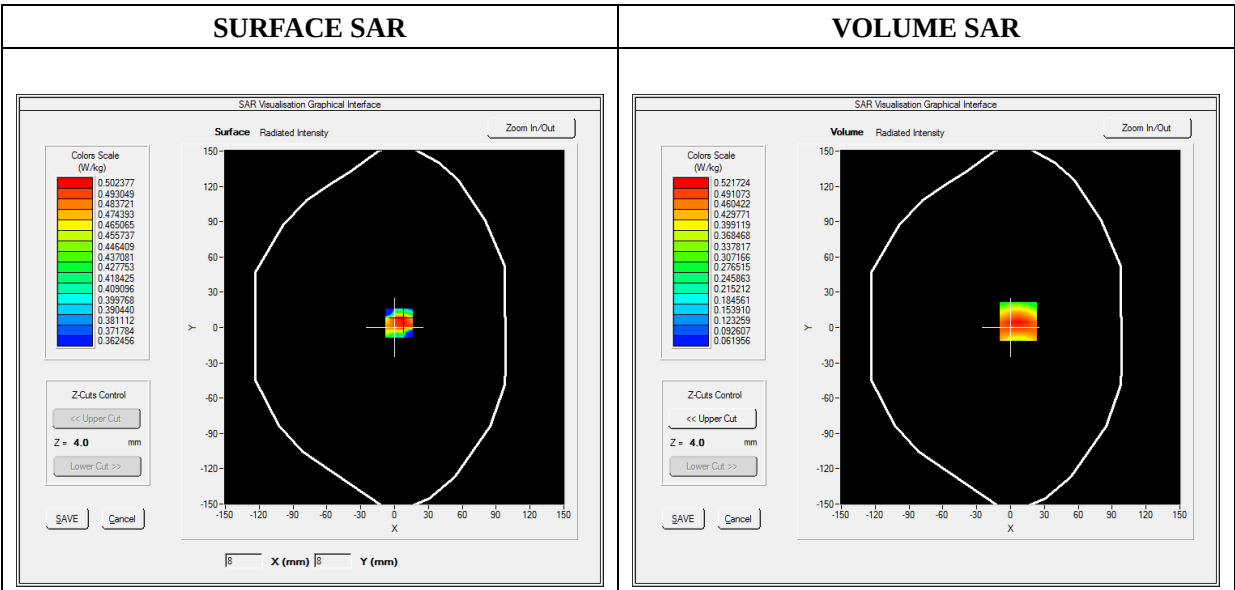

Maximum location: X=7.00, Y=5.00

SAR Peak: 0.76 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.306776 |
| SAR 1g (W/Kg)  | 0.495978 |

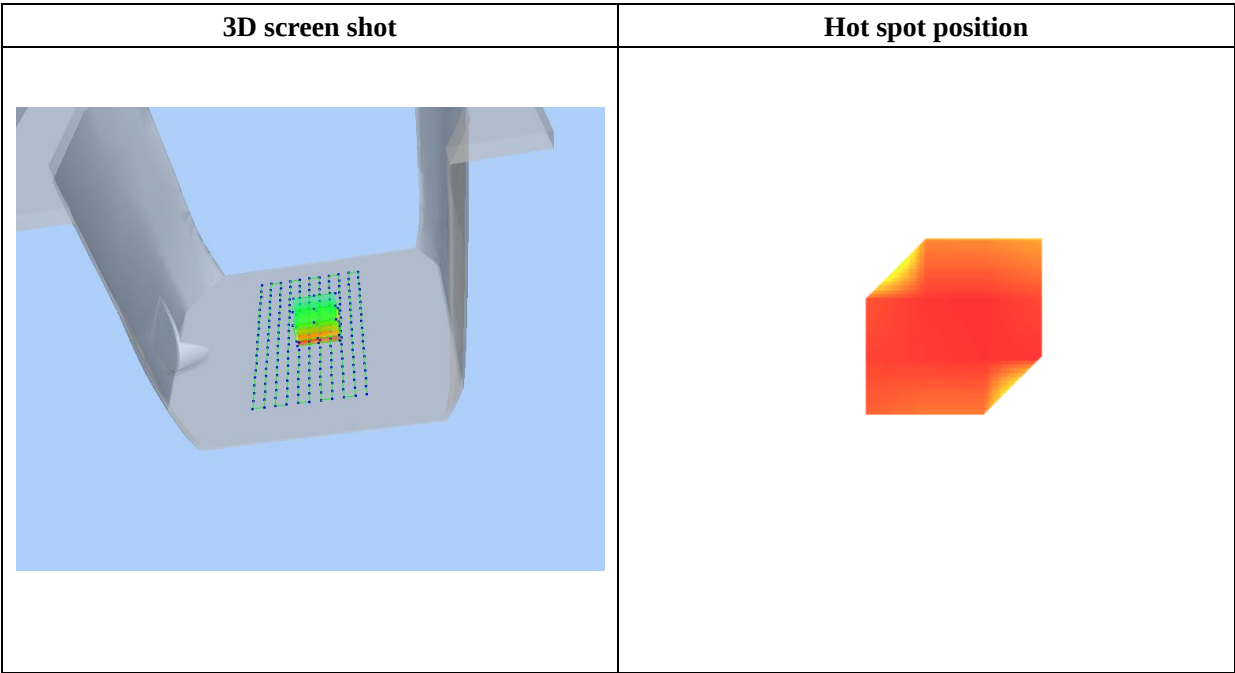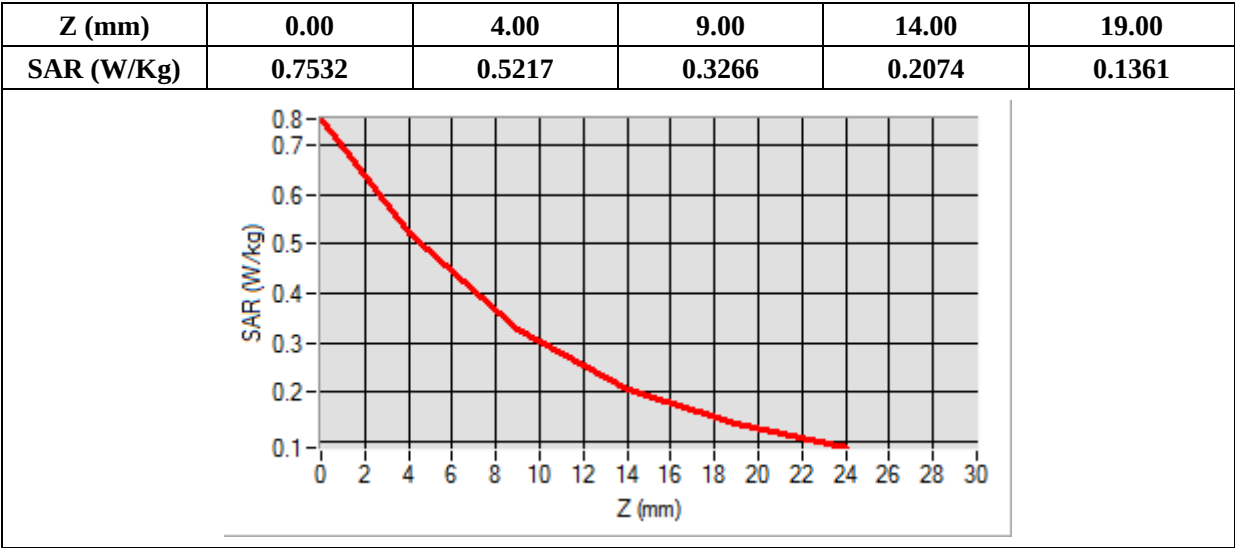

# MEASUREMENT 81

Type: Phone measurement (Complete)

Date of measurement: 2020-06-16

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

## A. Experimental conditions

|                        |                               |
|------------------------|-------------------------------|
| <b>Area Scan</b>       | sam_direct_droit2_surf8mm.txt |
| <b>Phantom</b>         | Flat Plane                    |
| <b>Device Position</b> | Back                          |
| <b>Band</b>            | WCDMA1700_RMC                 |
| <b>Channels</b>        | High                          |
| <b>Signal</b>          | Duty Cycle 1:1                |

## B. SAR Measurement Results

|                                          |             |
|------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                   | 1752.600000 |
| <b>Relative Permittivity (real part)</b> | 51.224510   |
| <b>Conductivity (S/m)</b>                | 1.461261    |
| <b>Power Variation (%)</b>               | 2.341221    |
| <b>Ambient Temperature</b>               | 21.1        |
| <b>Liquid Temperature</b>                | 21.3        |

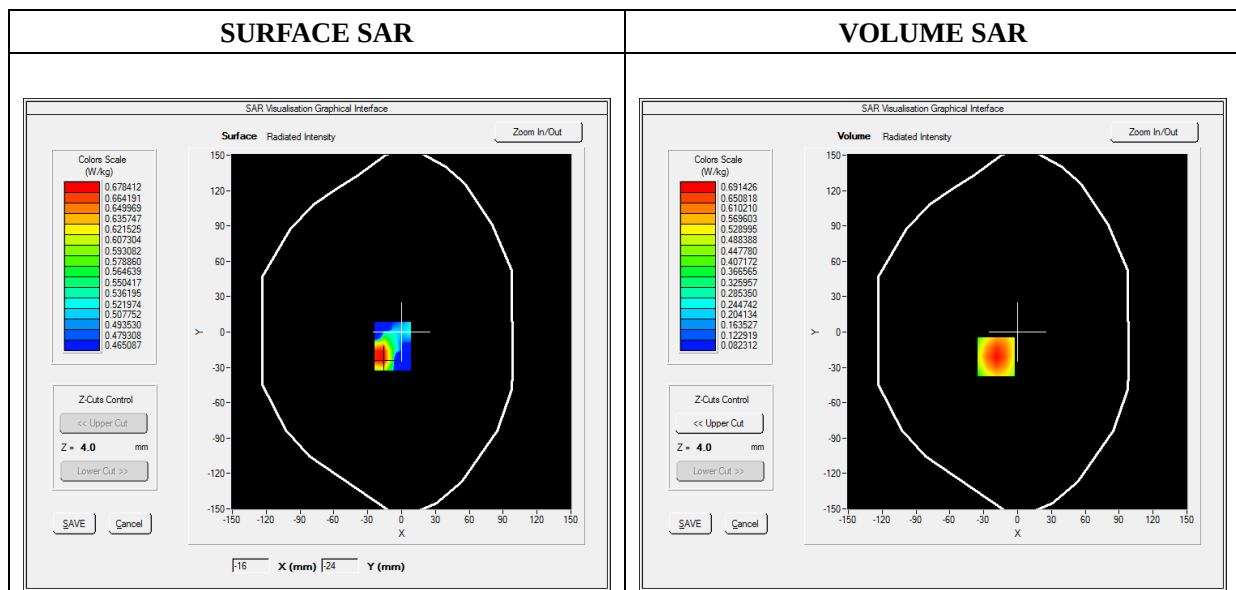


**Maximum location: X=-19.00, Y=-21.00**


**SAR Peak: 1.00 W/kg**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.406950</b> |
|-----------------------|-----------------|

|               |          |
|---------------|----------|
| SAR 1g (W/Kg) | 0.656894 |
|---------------|----------|

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.9926 | 0.6914 | 0.4360 | 0.2783 | 0.1831 |

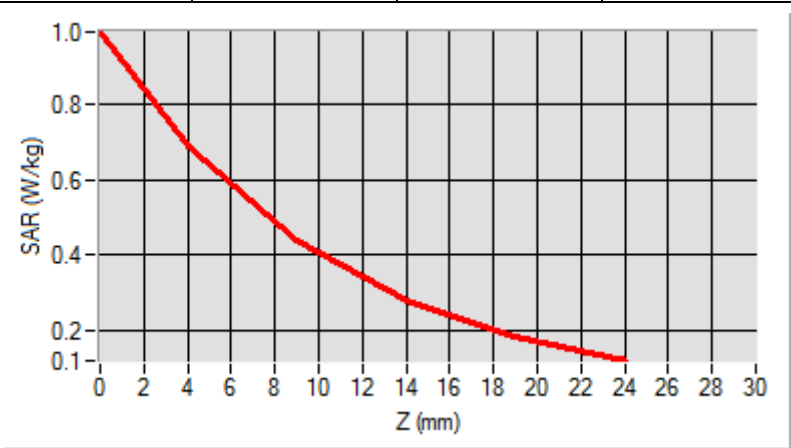
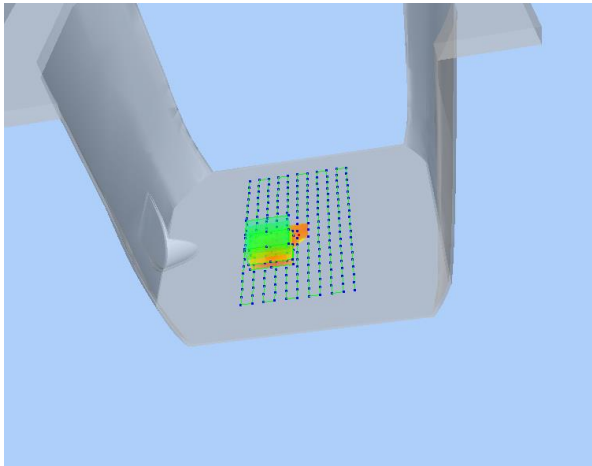
|                                                                                    |                                                                                      |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                     | Hot spot position                                                                    |
|  |  |

MEASUREMENT 85


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-15  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat Plane                    |
| Device Position | Back                          |
| Band            | WCDMA850_RMC                  |
| Channels        | Low                           |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results

|                                   |            |
|-----------------------------------|------------|
| Frequency (MHz)                   | 826.400000 |
| Relative Permittivity (real part) | 54.851214  |
| Conductivity (S/m)                | 0.951454   |
| Power Variation (%)               | 2.341234   |
| Ambient Temperature               | 21.1       |
| Liquid Temperature                | 21.3       |

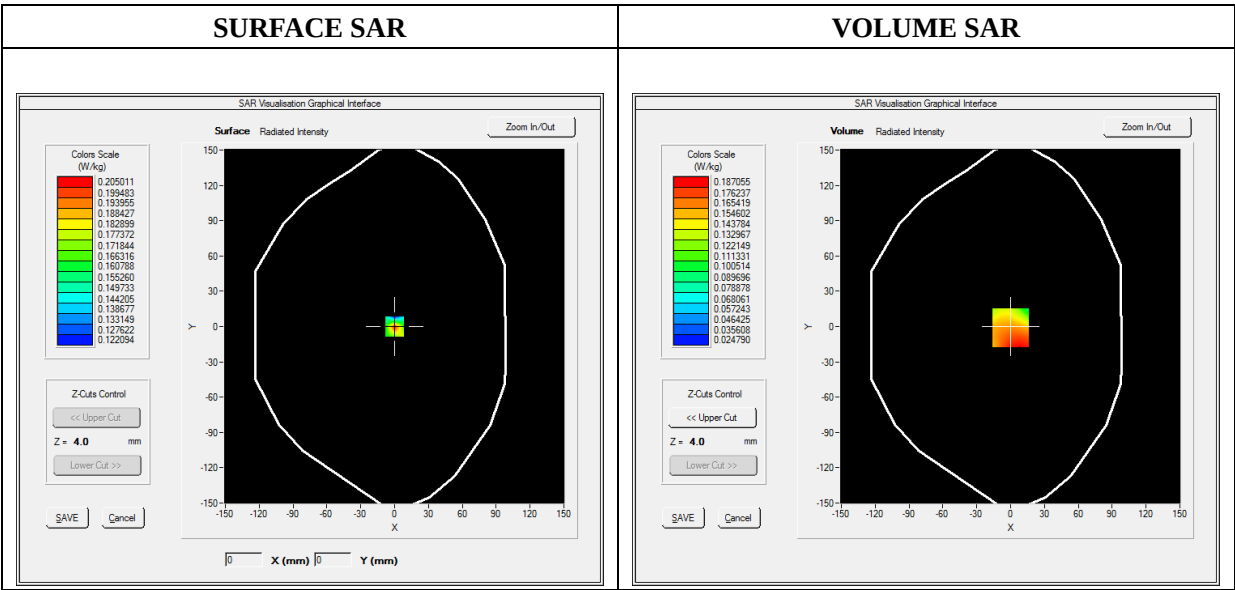



Maximum location: X=0.00, Y=-1.00

SAR Peak: 0.25 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.124960 |
| SAR 1g (W/Kg)  | 0.177429 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.8582 | 0.1871 | 0.0699 | 0.1052 | 0.0346 |

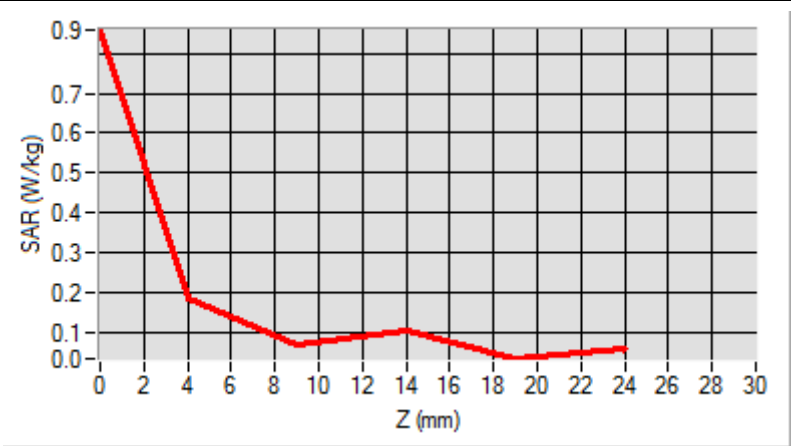
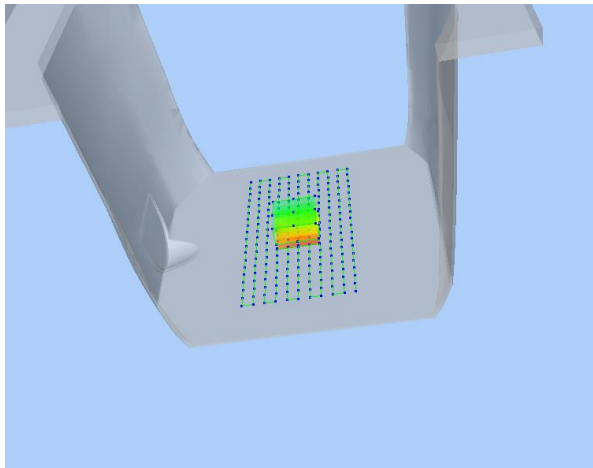
|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                     |
|  |  |

MEASUREMENT 89


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-16  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat Plane                    |
| Device Position | Back                          |
| Band            | LTE Band 4                    |
| Channels        | QPSK, 20MHz, 1RB, Low         |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 1720.000000 |
| Relative Permittivity (real part) | 51.224510   |
| Conductivity (S/m)                | 1.461261    |
| Power Variation (%)               | 0.858383    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

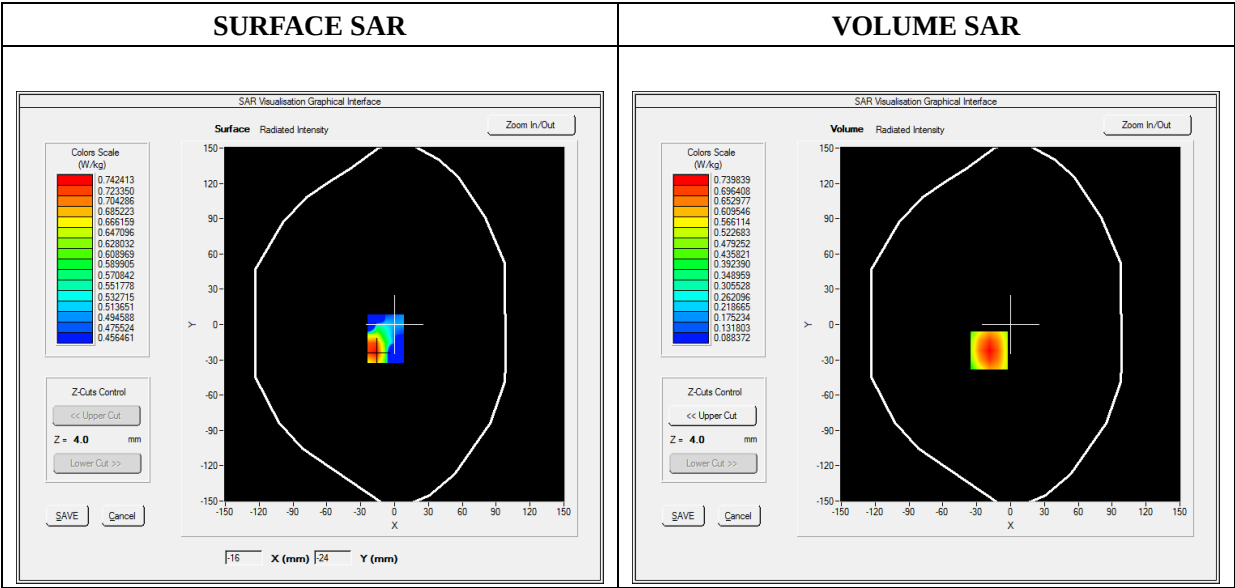

Maximum location: X=-19.00, Y=-22.00

SAR Peak: 1.06 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.435955 |
| SAR 1g (W/Kg)  | 0.702500 |

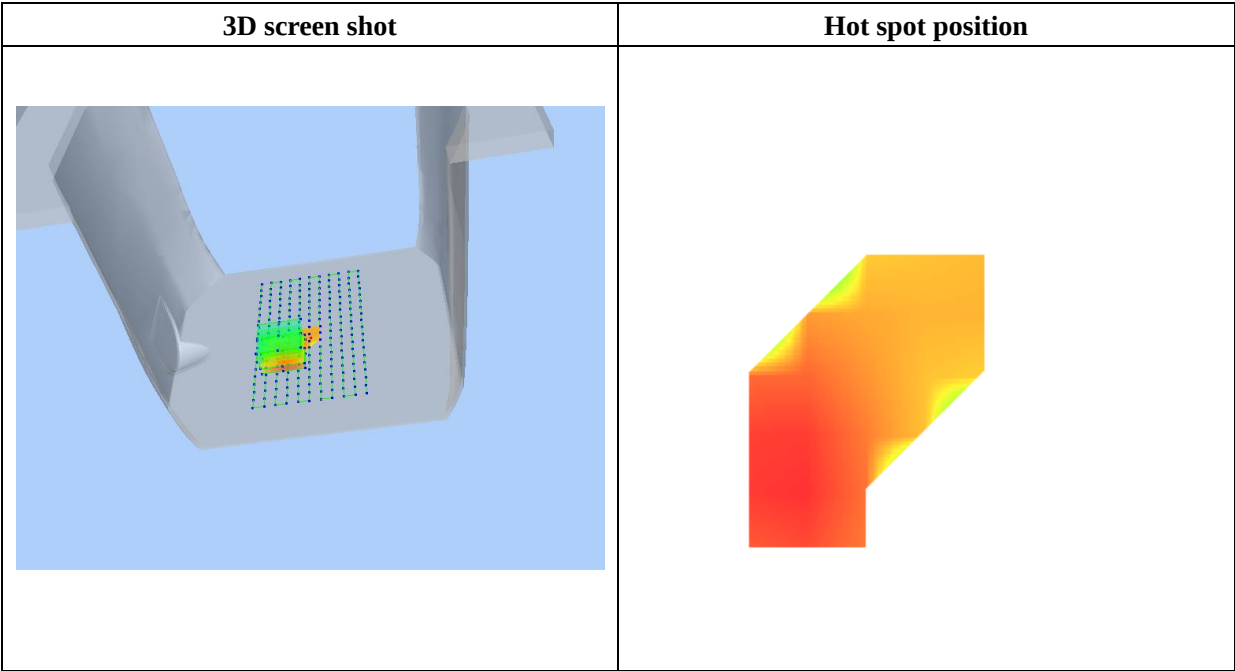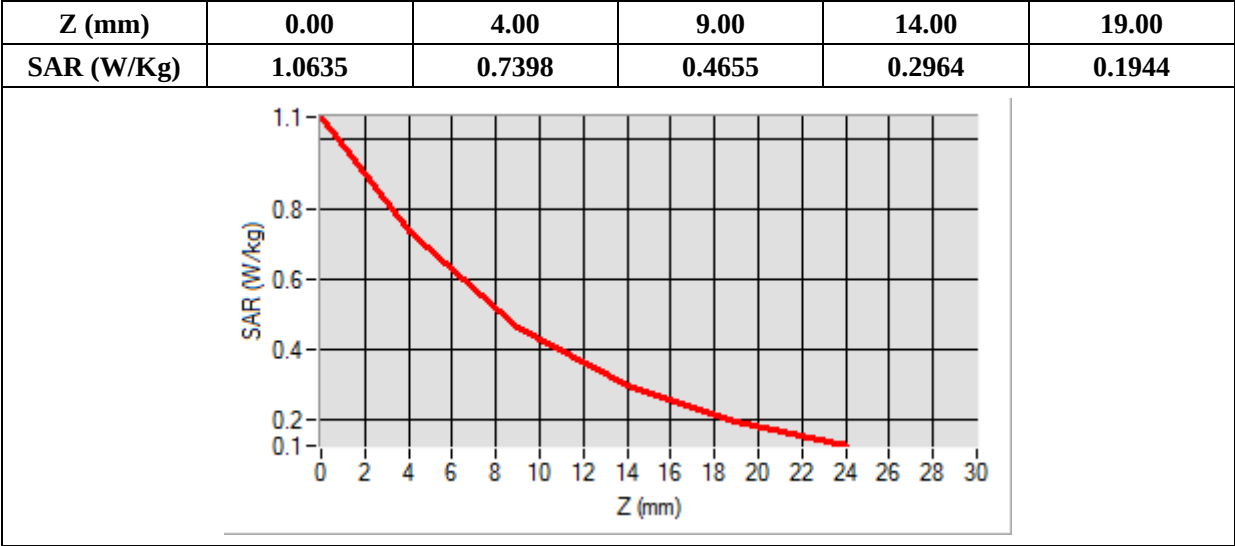

MEASUREMENT 102


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-20  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat Plane                    |
| Device Position | Back                          |
| Band            | LTE Band 7                    |
| Channels        | QPSK, 20MHz, 1RB, Middle      |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2535.000000 |
| Relative Permittivity (real part) | 52.241202   |
| Conductivity (S/m)                | 2.120943    |
| Power Variation (%)               | 3.672346    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

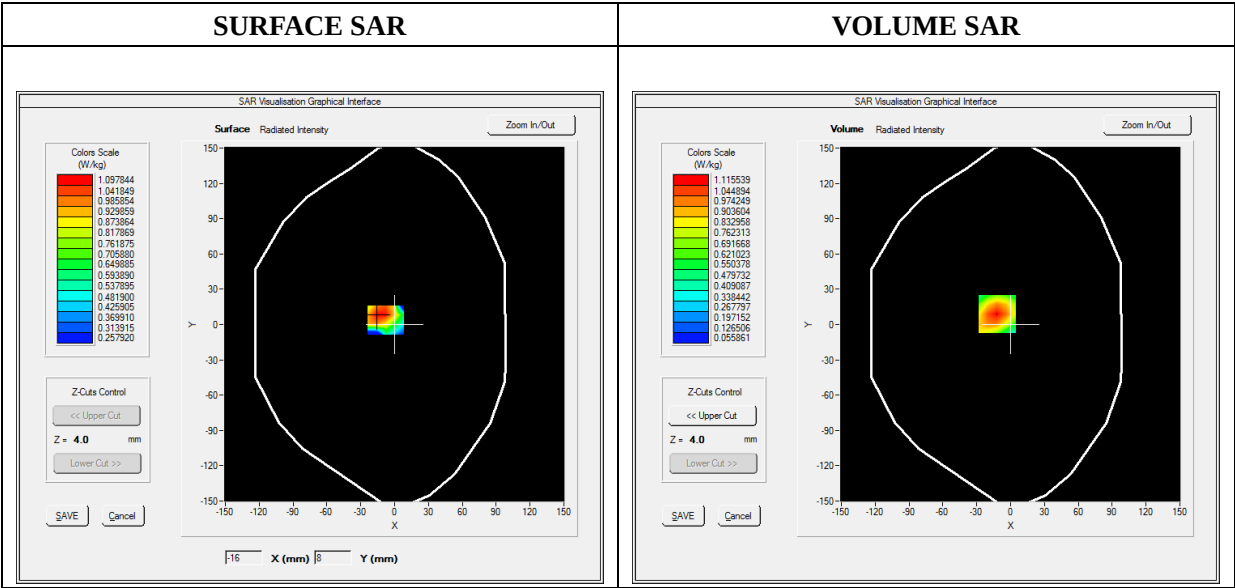




Maximum location: X=-12.00, Y=9.00

SAR Peak: 1.75 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.582939 |
| SAR 1g (W/Kg)  | 1.050320 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 1.7512 | 1.1155 | 0.6175 | 0.3429 | 0.1983 |

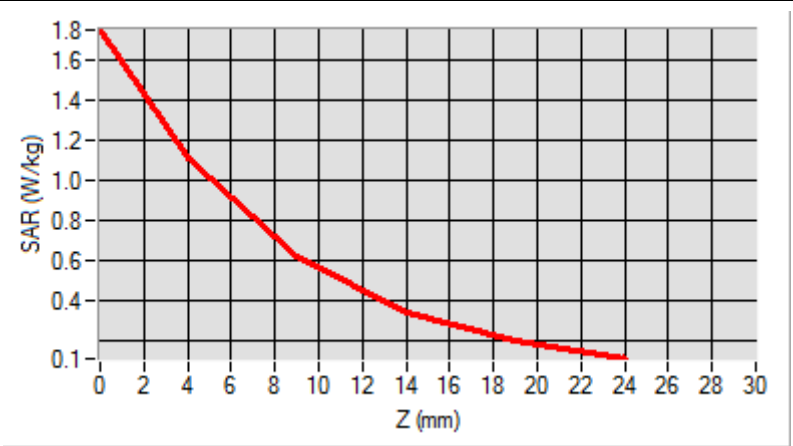
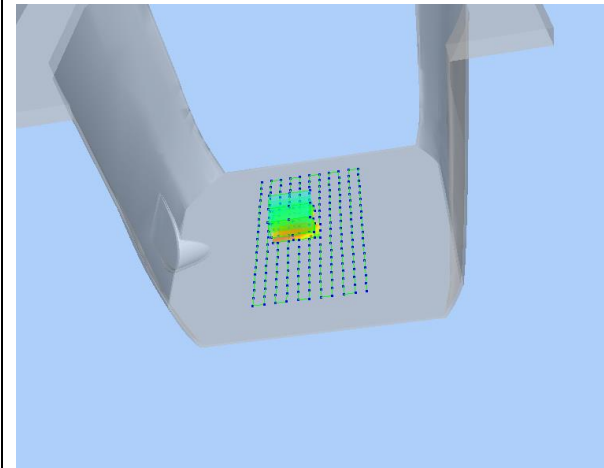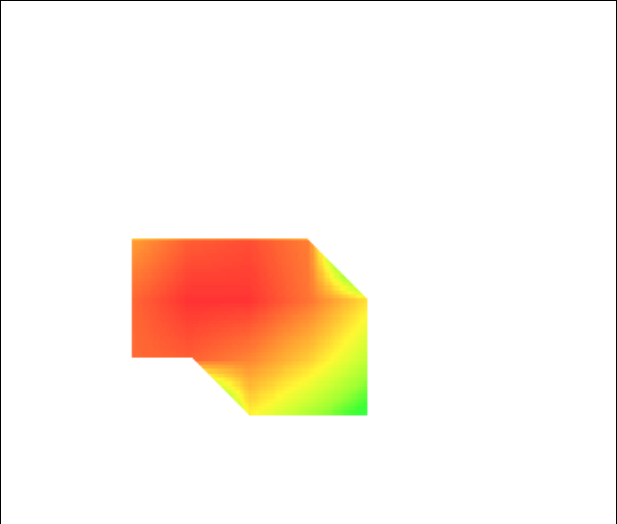
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

MEASUREMENT 107


Type: Phone measurement (Complete)  
Date of measurement: 2020-06-20  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

|                 |                               |
|-----------------|-------------------------------|
| Area Scan       | sam_direct_droit2_surf8mm.txt |
| Phantom         | Flat Plane                    |
| Device Position | Back                          |
| Band            | WiFi_802.11b                  |
| Channels        | Middle                        |
| Signal          | Duty Cycle 1:1                |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2437.000000 |
| Relative Permittivity (real part) | 52.010212   |
| Conductivity (S/m)                | 1.910255    |
| Power Variation (%)               | 2.492743    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

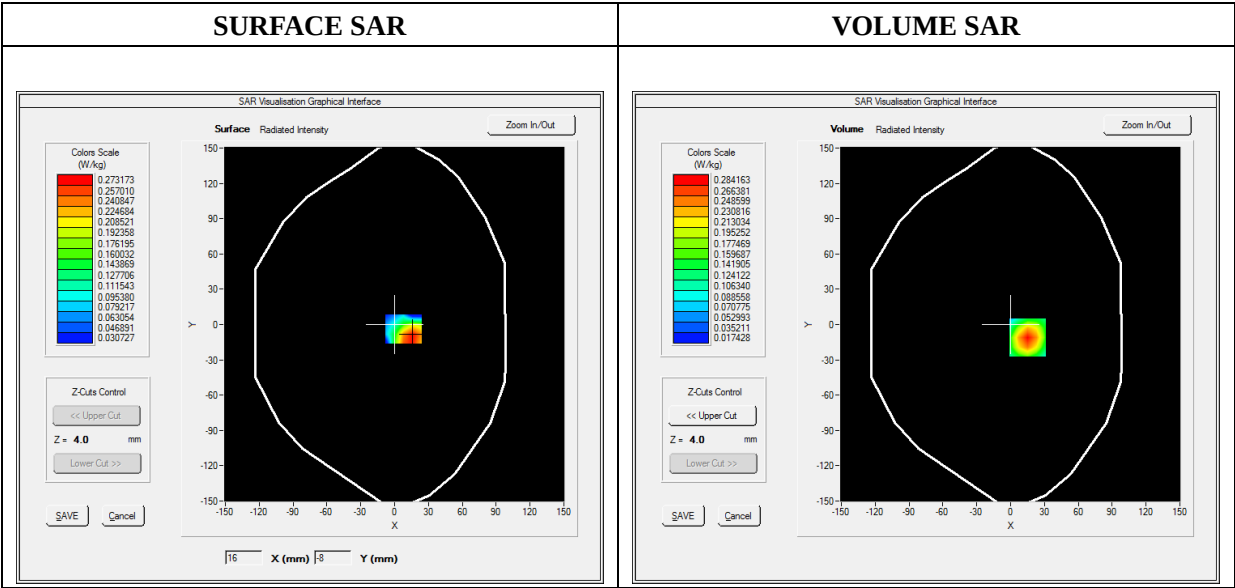




Maximum location: X=15.00, Y=-11.00

SAR Peak: 0.45 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.142260 |
| SAR 1g (W/Kg)  | 0.265211 |

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  |
| SAR (W/Kg) | 0.4500 | 0.2842 | 0.1565 | 0.0880 | 0.0532 |

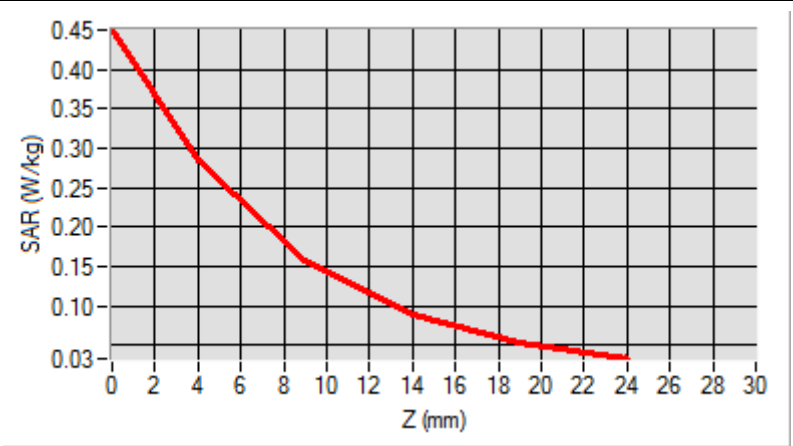
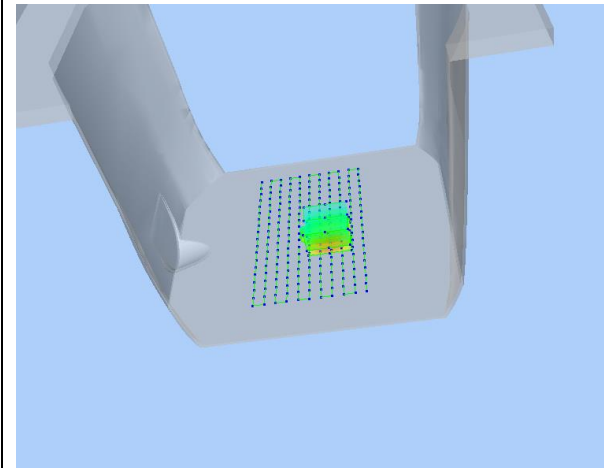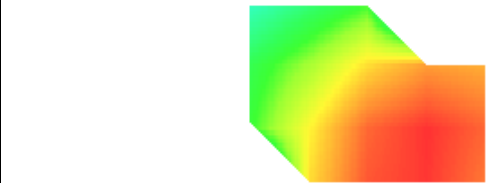
|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3D screen shot                                                                      | Hot spot position                                                                    |
|  |  |

## Annex C. EUT Photos

---


### EUT View Front



### EUT View Back



## Antenna View

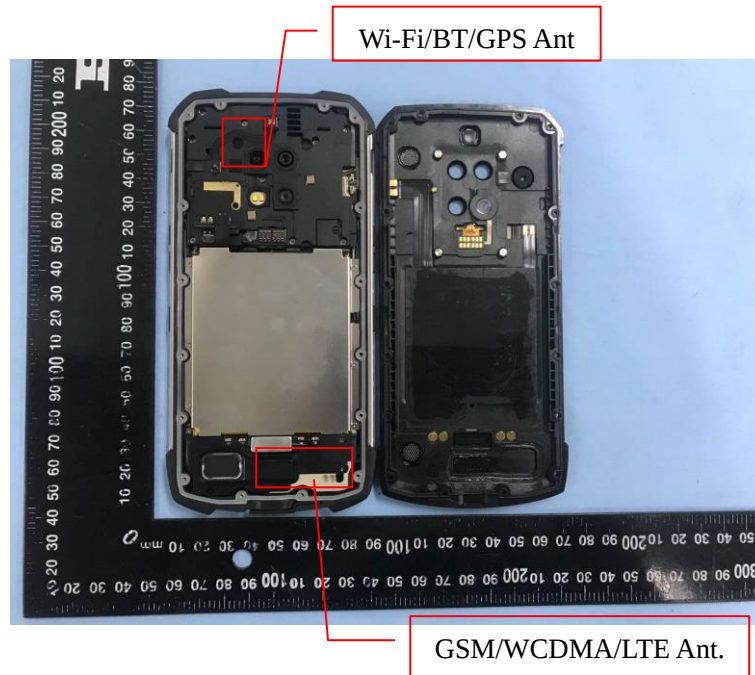


## Annex D. Test Setup Photos

---

### Head Exposure Conditions

**Cheek**

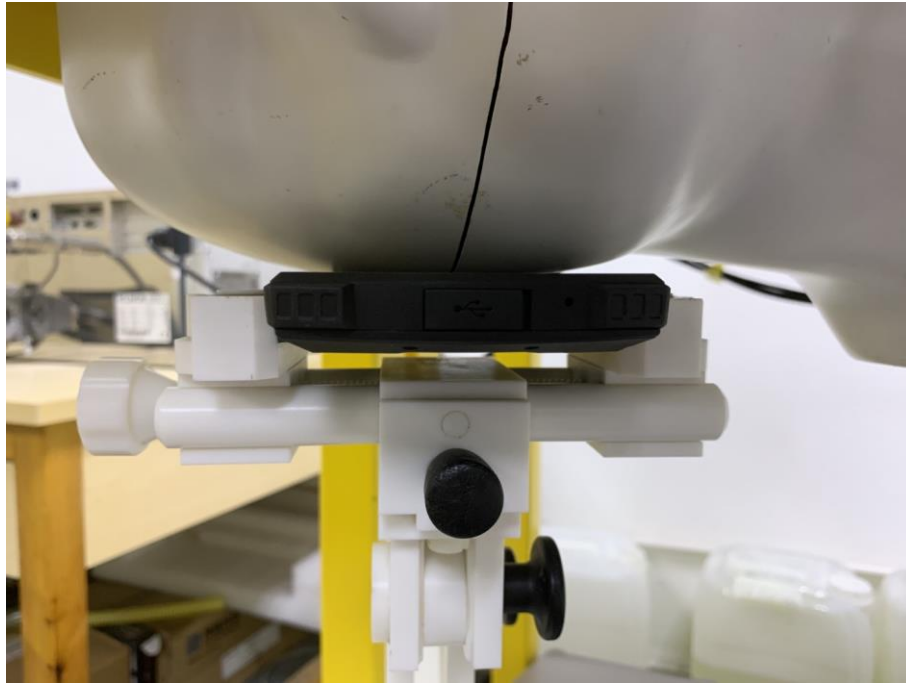

**Tilt**



**Cheek**




**Tilt**



## Body mode Exposure Conditions


### Body Front

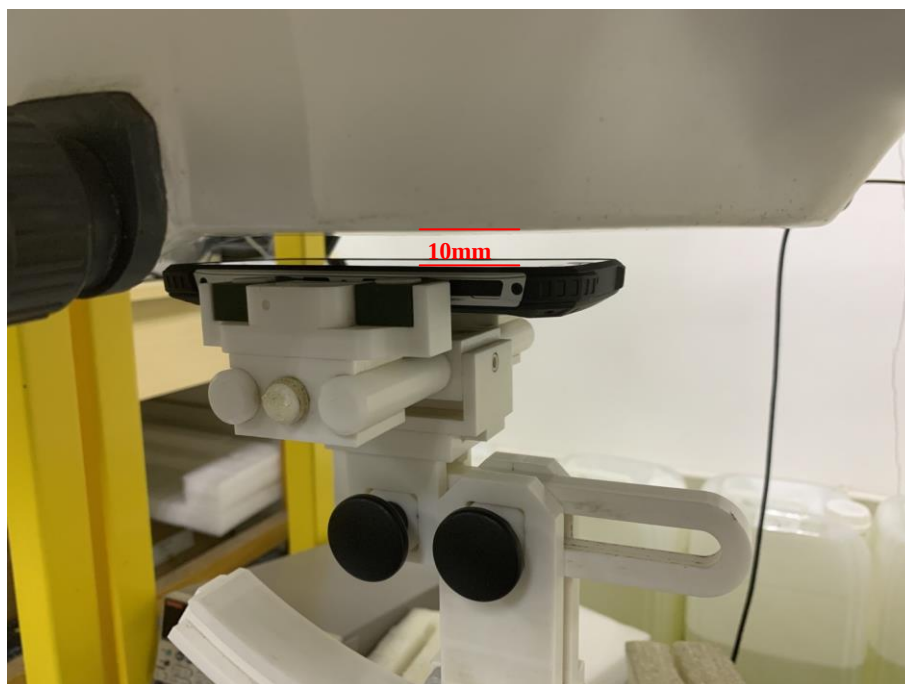


### Body Back



### Body Right

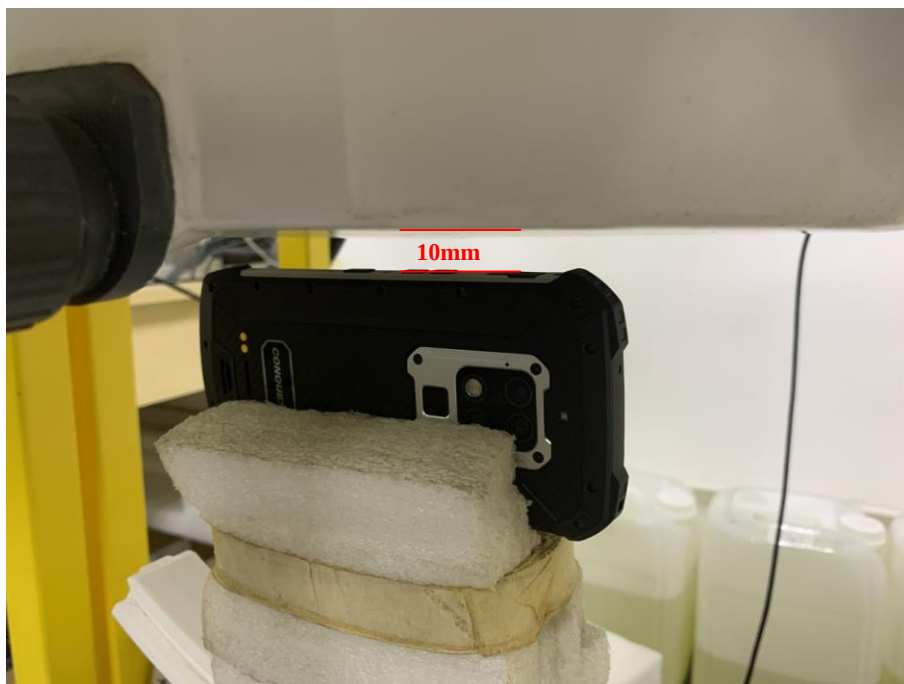

### Body Left

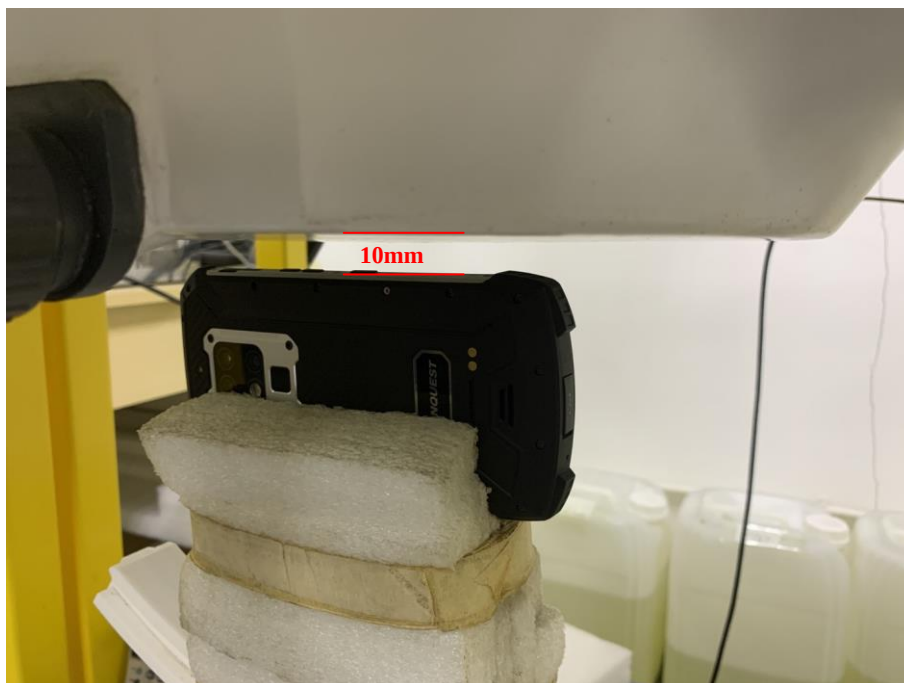

### Body Top



### Body Bottom



## **Annex E. Calibration Certificate**

---

*Please refer to the exhibit for the calibration certificate*

**\*\*\*\*\* END OF REPORT \*\*\*\*\***