

TEST REPORT

Applicant: Ganzhou SHANGJIE Technologies Co. Ltd.

Address of Applicant: Land Parcel D5-2, South District of Huangpu Industrial Zone, Shangyou, Ganzhou, China

Manufacturer: Ganzhou SHANGJIE Technologies Co. Ltd.

Address of Manufacturer: Land Parcel D5-2, South District of Huangpu Industrial Zone, Shangyou, Ganzhou, China

Equipment Under Test (EUT)

Product Name: Remote control

Model No.: DD1601-21, DD1601-1, DD1601-2, DD1601-3, DD1601-4, DD1601-5, DD1601-6, DD1601-7, DD1601-8, DD1601-9, DD1601-10, DD1601-11, DD1601-12, DD1601-13, DD1601-14, DD1601-15, DD1601-16, DD1601-17, DD1601-18, DD1601-19, DD1601-20

FCC ID: 2AWUP-DD1601

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.231

Date of sample receipt: Apr.20,2020

Date of Test: Apr.20,2020- May.12,2020

Date of report issued: May.12,2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
01	May.12,2020	Original

Tested/Prepared By:




Date:

May.12,2020

Project Engineer

Check By:



Date:

May.12,2020

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 TEST FACILITY.....	6
5.5 TEST LOCATION	6
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
5.7 DEVIATION FROM STANDARDS.....	6
5.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
5.9 ADDITIONAL INSTRUCTIONS.....	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 RADIATED EMISSION METHOD	10
7.3 20dB OCCUPY BANDWIDTH	14
7.4 DWELL TIME.....	16
7.5 DUTY CYCLE	17
8 TEST SETUP PHOTO	20
9 EUT CONSTRUCTIONAL DETAILS	20

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
Conduction Emission	15.207	N/A
Field strength of the Fundamental Signal	15.231 (b)	Pass
Spurious Emissions	15.231 (b)/15.209	Pass
20dB Bandwidth	15.231 (c)	Pass
Dwell Time	15.231 (a)(1)	Pass

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Remote control
Model No.:	DD1601-21
Serial No.:	DD1601-1,DD1601-2,DD1601-3,DD1601-4,DD1601-5, DD1601-6,DD1601-7,DD1601-8,DD1601-9,DD1601-10, DD1601-11,DD1601-12,DD1601-13,DD1601-14,DD1601-15, DD1601-16,DD1601-17,DD1601-18,DD1601-19,DD1601-20
Test sample(s) ID:	GTS202004000239-1
Sample(s) Status:	Engineer sample
Operation Frequency:	433.29MHz
Channel Number	1
Modulation technology:	ASK
Antenna Type:	PCB Antenna
Antenna gain:	0
Power supply:	DC 3.0V From Battery

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which only the worst case was shown in this test report and defined as follows:

	Axis	X	Y	Z
433.29MHz	Field Strength(dBuV/m)	72.87	71.65	70.38

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Additional instructions

Software (Used for test) from client

Mode	Special test SW was built-in by manufacturer.
Power set	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 26 2019	June. 25 2020
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 26 2019	June. 25 2020
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 26 2019	June. 25 2020
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 26 2019	June. 25 2020
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 26 2019	June. 25 2020
9	Coaxial Cable	GTS	N/A	GTS211	June. 26 2019	June. 25 2020
10	Coaxial cable	GTS	N/A	GTS210	June. 26 2019	June. 25 2020
11	Coaxial Cable	GTS	N/A	GTS212	June. 26 2019	June. 25 2020
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 26 2019	June. 25 2020
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 26 2019	June. 25 2020
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 26 2019	June. 25 2020
15	Band filter	Amindeon	82346	GTS219	June. 26 2019	June. 25 2020
16	Power Meter	Anritsu	ML2495A	GTS540	June. 26 2019	June. 25 2020
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 26 2019	June. 25 2020
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 26 2019	June. 25 2020
19	Splitter	Agilent	11636B	GTS237	June. 26 2019	June. 25 2020
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 26 2019	June. 25 2020
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 26 2019	June. 25 2020

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 26 2019	June. 25 2020
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 26 2019	June. 25 2020
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 26 2019	June. 25 2020
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 26 2019	June. 25 2020
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 26 2019	June. 25 2020
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 26 2019	June. 25 2020
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 26 2019	June. 25 2020


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 26 2019	June. 25 2020
2	Barometer	ChangChun	DYM3	GTS255	June. 26 2019	June. 25 2020



7 Test results and Measurement Data

7.1 Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
<i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi, reference to the appendix II for details.</i>	

7.2 Radiated Emission Method

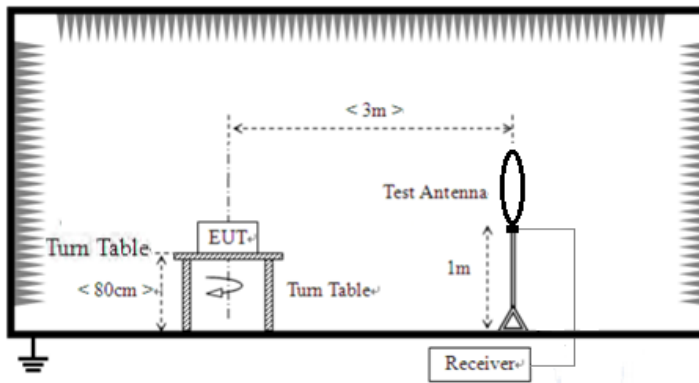Test Requirement:	FCC Part15 C Section 15.231 (b)& Section 15.209					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	9kHz to 5000MHz					
Test site:	Measurement Distance: 3m					
Receiver setup:	Frequency	Detector	RBW	VBW	Value	
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak	
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
Peak		1MHz	10Hz	Average		
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark		
	433.29MHz	100.80		Peak Value		
		80.80		Average Value		
Limit: (Spurious Emissions)	Fundamental Frequency (MHz)		Field Strength of fundamental (microvolts/meter)		Field Strength of Unwanted Emissions (microvolts/meter)	
	40.66-40.70		1,000		100	
	70-130		500		50	
	130-174		500 to 1,500**		50 to 1,50**	
	174-260		1,500		1,50	
	260-470		1,500 to 5,000**		1,50 to 5,00**	
	Above 470		5,000		5,00	
	Frequency (MHz)		Class B(dBuV/m @3m)			
	Above 1000		Peak		Average	
			74		54	
	Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits a higher field strength.					
	Test setup:	Below 30MHz				
						
Test setup:	Below 1GHz					

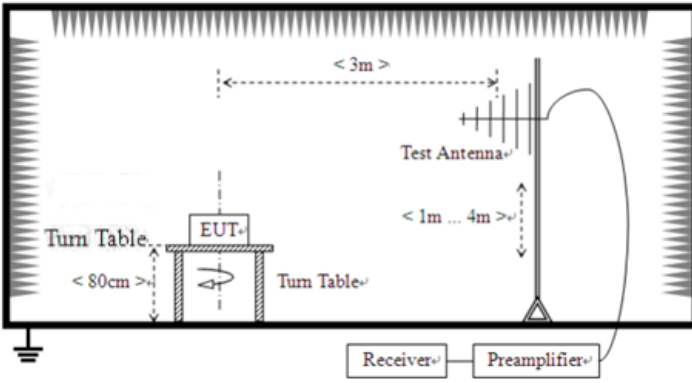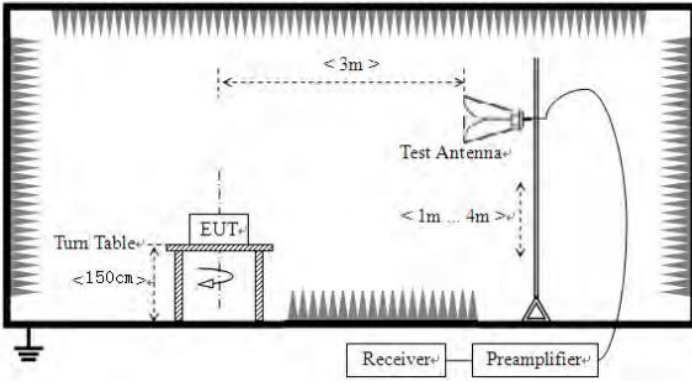	Report No.: CVC2020040002007 01  Above 1GHz 					
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar

Test voltage:	DC 3.0V
Test results:	Pass

Measurement data:

The emissions from 30MHz to 5GHz are measured peak and average level, below 1 GHz measured QP level, detailed test data please see below. Besides, we tested 3 directions and recorded the worst data.


Emission Styles	Frequency (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Direction (H/V)
Fundamental	433.29	72.87	100.80	27.93	PK	H
Spurious	435.56	46.12	80.80	34.68	PK	H
Harmonics	866.58	56.82	80.80	23.98	PK	H
Harmonics	1299.87	55.77	80.80	25.03	PK	H
--	--	--	--	--	--	--
Fundamental	433.29	70.11	100.80	30.69	PK	V
Spurious	435.56	46.89	80.80	33.91	PK	V
Harmonics	866.58	54.98	80.80	25.82	PK	V
Harmonics	1299.87	53.11	80.80	27.69	PK	V
--	--	--	--	--	--	--

Emission Styles	Frequency (MHz)	PK Level (dBuV/m)	AV Factor (dB/m)	AV Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Direction (H/V)
Fundamental	433.29	72.87	-9.53	63.34	80.80	17.46	H
Spurious	435.56	46.12	-9.53	36.59	60.80	24.21	H
Harmonics	866.58	56.82	-9.53	47.29	60.80	13.51	H
Harmonics	1299.87	55.77	-9.53	46.24	60.80	14.56	H
--	--	--	--	--	--	--	--
Fundamental	433.29	70.11	-9.53	60.58	80.80	20.22	V
Spurious	435.56	46.89	-9.53	37.36	60.80	23.44	V
Harmonics	866.58	54.98	-9.53	45.45	60.80	15.35	V
Harmonics	1299.87	53.11	-9.53	43.58	60.80	17.22	V
--	--	--	--	--	--	--	--

Note:

1. AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dB)
2. AV Factor=20*log(Duty Cycle)=20*log(0.432)= -9.53

7.3 20dB Occupy Bandwidth

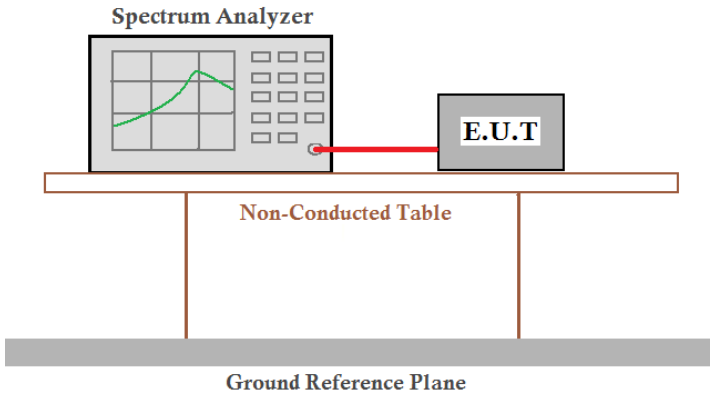Test Requirement:	FCC Part15 C Section 15.231 (c)					
Test Method:	ANSI C63.10:2013					
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar


Measurement Data

Test Frequency (MHz)	20dB bandwidth (MHz)	Limit (MHz)	Result
433.29	0.2414	1.083	Pass


Note: Limit= Fundamental frequency×0.25%

$433.29 \times 0.25\% = 1.083\text{MHz}$

Test plot as follows:

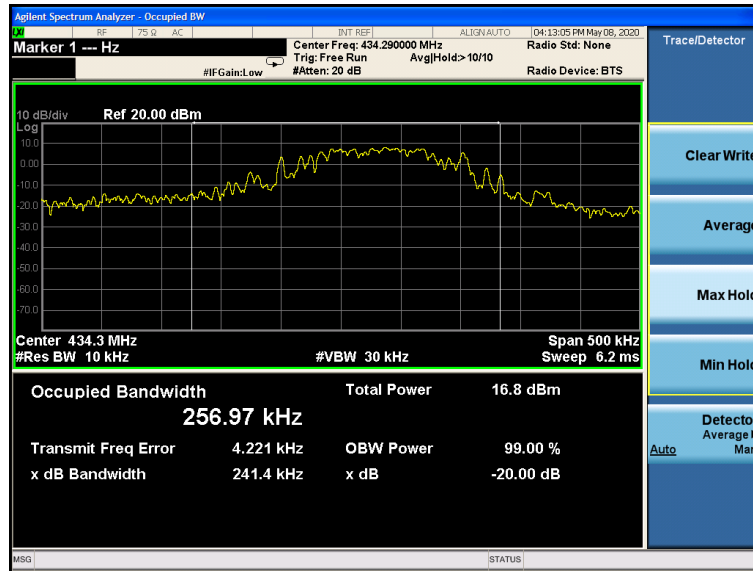


7.4 Dwell Time

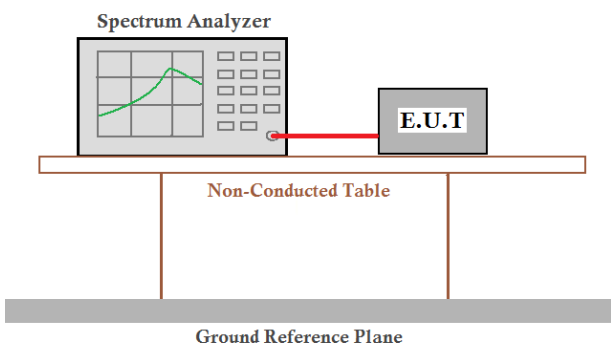Test Requirement:	FCC Part15 C Section 15.231 (a)(1)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak					
Limit:	Not more than 5 seconds					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar


Measurement data:

Frequency (MHz)	Duration of each TX (second)	Limit (second)	Result
433.29	0.210	<5.0	Pass

Test plot as follows:

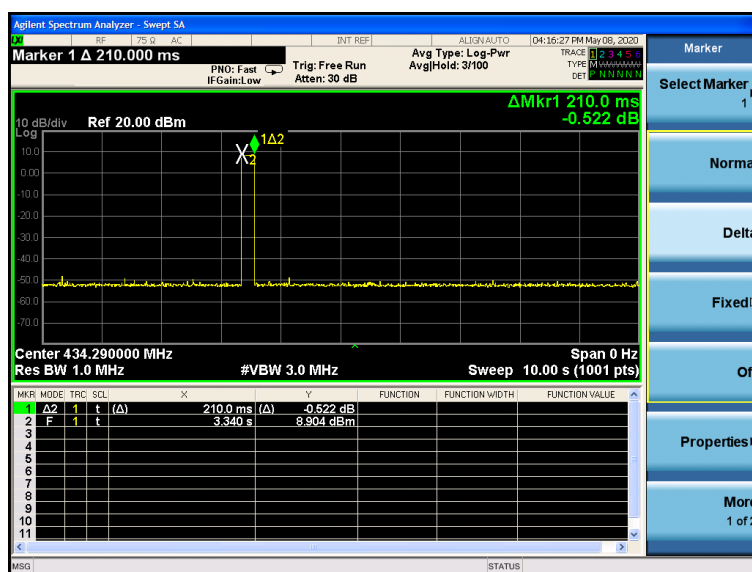

7.5 Duty Cycle

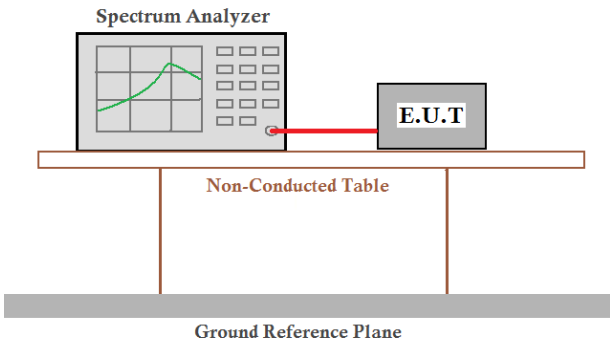Test Requirement:	FCC Part15 C Section 15.231						
Test Method:	ANSI C63.10:2013						
Receiver setup:	RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak						
Limit:	No dedicated limit specified in the Rules.						
Test Procedure:	1. Place the EUT on the table and set it in transmitting mode. 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. 3. Set centre frequency of spectrum analyzer=operating frequency. 4. Set the spectrum analyzer as RBW=100kHz, VBW=100KHz, Span=0Hz, Adjust Sweep=100ms to obtain the “worst-case” pulse on time 5. Repeat above procedures until all frequency measured was complete.						
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test results:	Pass						
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar	

Measurement data:

Calculate Formula: Duty cycle factor =20 log(Duty cycle)
Duty cycle=on time/0.1 seconds or period, whichever is less


Test data:

In a transmit cycle 54.30ms period found burst 26pcs, the Duty Cycle can calculate as below:


Duty Cycle= (1.50*2+0.630*24)/54.30=(3.0+15.12)/54.30=0.334

AV Factor=20*log(Duty Cycle)=20*log(0.334)=-9.53


Test plot as follows:

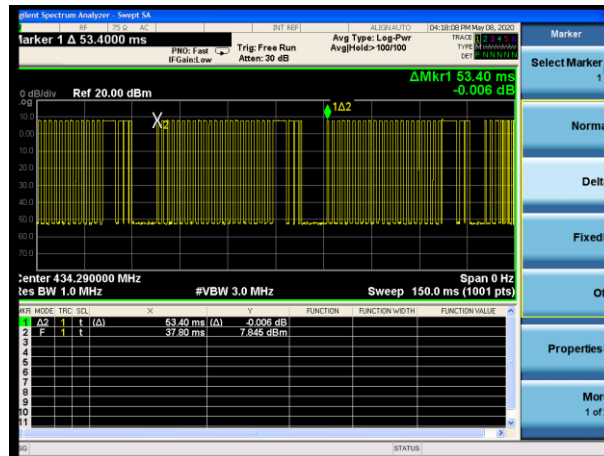


(Transmit cycle 53.40ms)

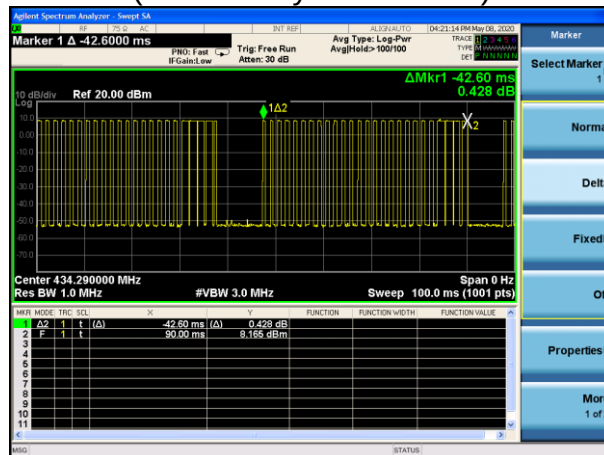

(Total Bursts in a transmit cycle 26pcs)

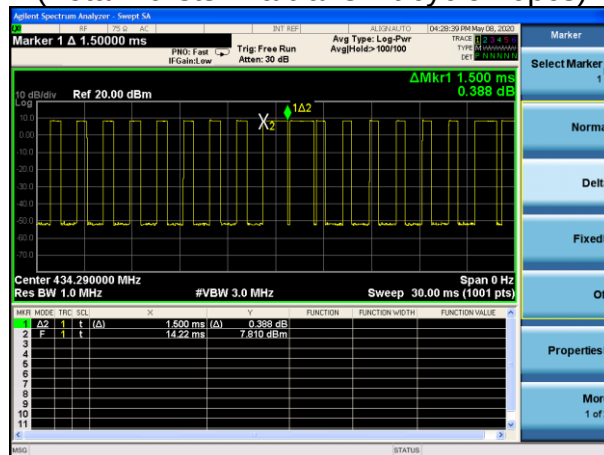

(Time per burst: 1.50ms*2pcs)

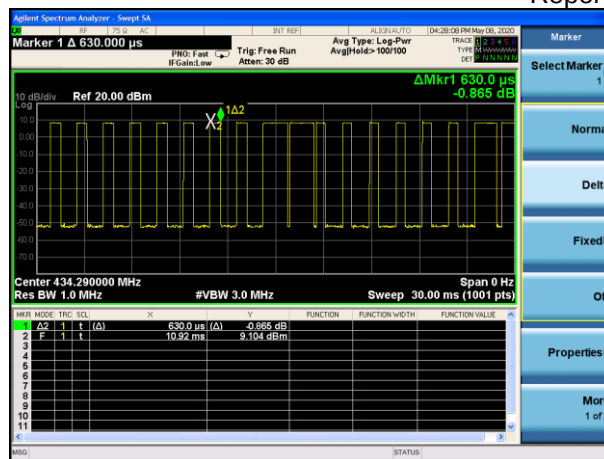

(Time per burst: 0.630ms*24pcs)

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

----- End -----