


Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 97 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2422 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

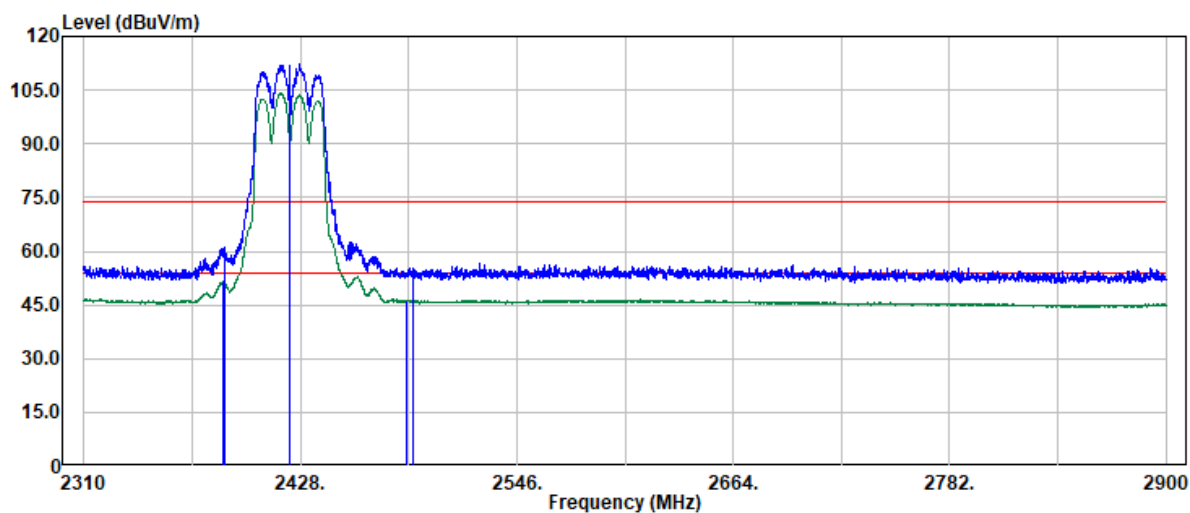

Trace: 1


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2385.64	45.14	6.40	51.54	54.00	-2.46	Average
2386.46	54.75	6.41	61.16	74.00	-12.84	Peak
2422.00	105.71	6.56	112.27	--	--	Peak
2422.00	97.61	6.56	104.17	--	--	Average
2486.29	39.55	6.83	46.38	54.00	-7.62	Average
2489.83	48.48	6.86	55.34	74.00	-18.66	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 98 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2422 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

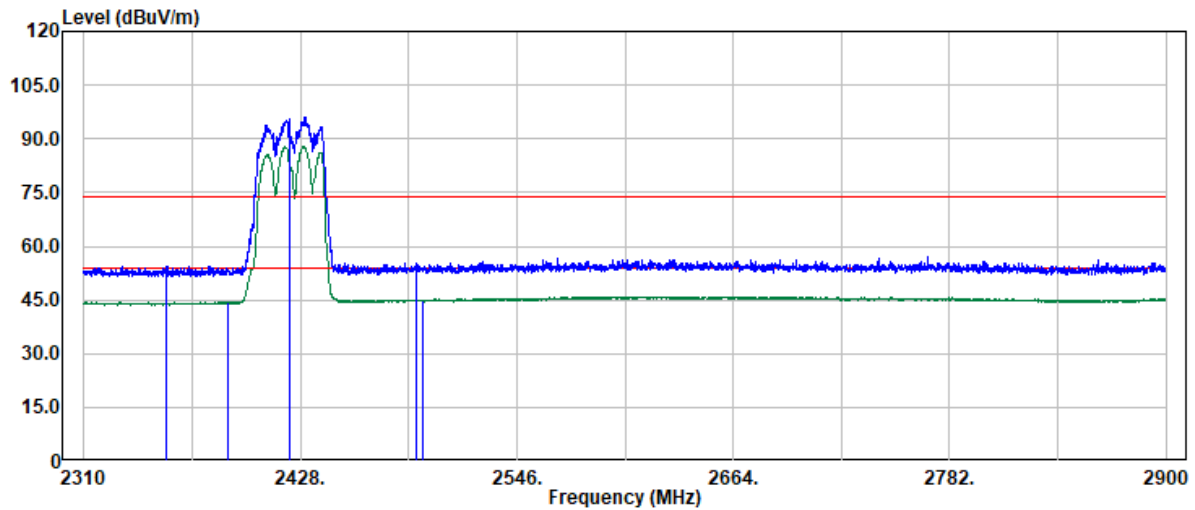

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2355.19	48.30	6.21	54.51	74.00	-19.49	Peak
2388.94	37.98	6.43	44.41	54.00	-9.59	Average
2422.00	89.30	6.56	95.86	--	--	Peak
2422.00	81.12	6.56	87.68	--	--	Average
2491.25	48.45	6.86	55.31	74.00	-18.69	Peak
2494.79	38.20	6.85	45.05	54.00	-8.95	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 99 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2437 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

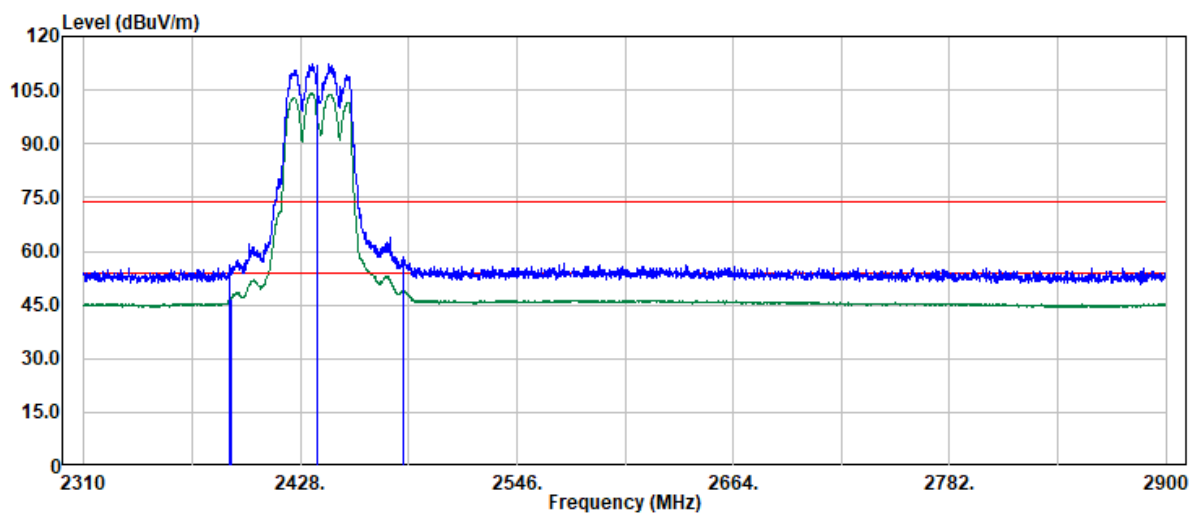

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.41	49.65	6.43	56.08	74.00	-17.92	Peak
2389.89	40.09	6.43	46.52	54.00	-7.48	Average
2437.00	105.62	6.55	112.17	--	--	Peak
2437.00	97.61	6.55	104.16	--	--	Average
2484.29	51.53	6.81	58.34	74.00	-15.66	Peak
2484.40	42.01	6.81	48.82	54.00	-5.18	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 100 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2437 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

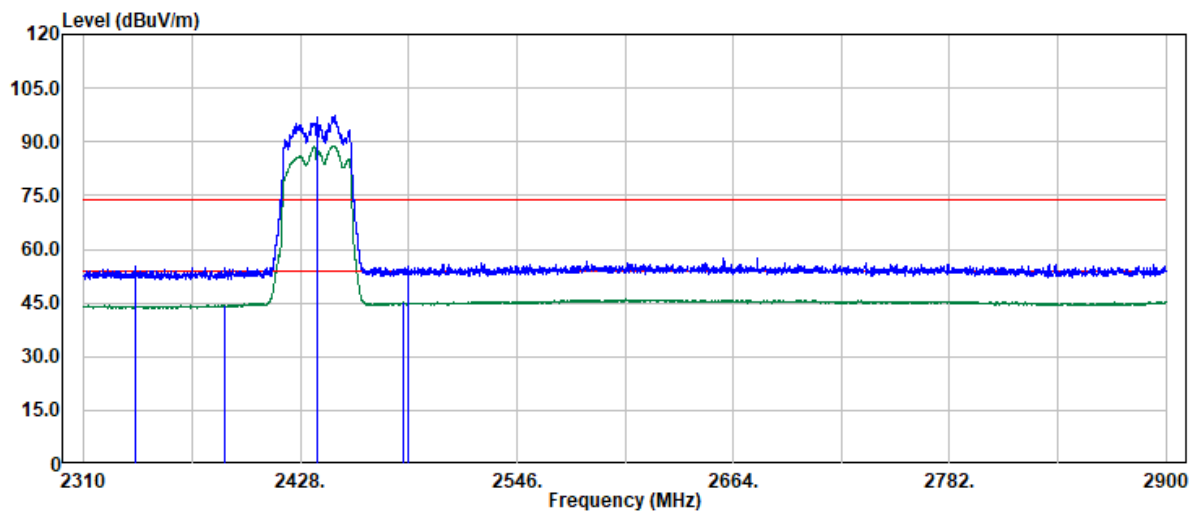

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2337.73	48.78	6.32	55.10	74.00	-18.90	Peak
2386.70	37.96	6.41	44.37	54.00	-9.63	Average
2437.00	90.87	6.55	97.42	--	--	Peak
2437.00	82.30	6.55	88.85	--	--	Average
2484.29	38.27	6.81	45.08	54.00	-8.92	Average
2486.88	48.52	6.84	55.36	74.00	-18.64	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 101 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2452 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

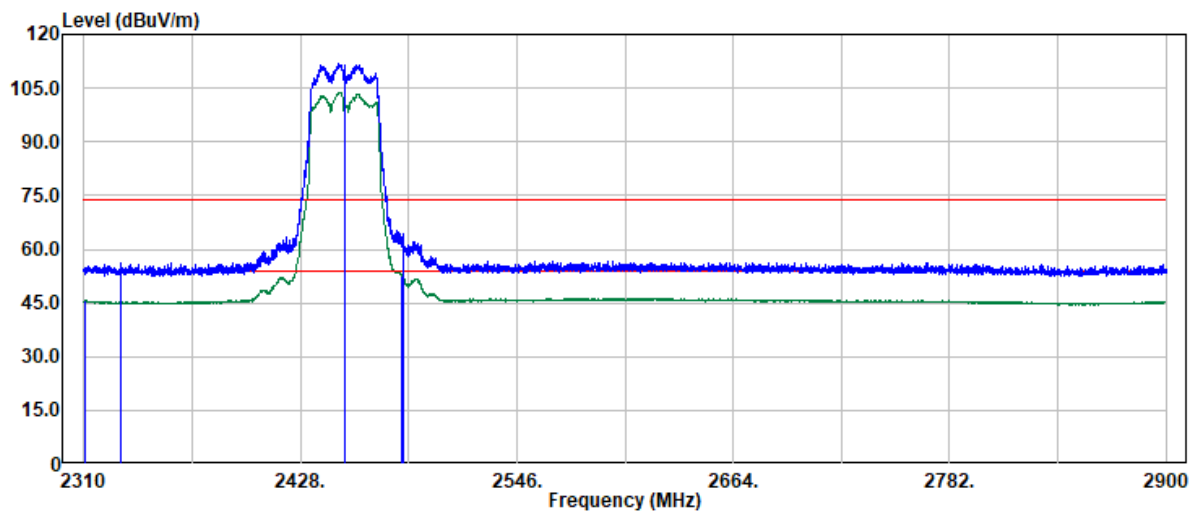

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.24	39.13	6.50	45.63	54.00	-8.37	Average
2329.82	49.70	6.35	56.05	74.00	-17.95	Peak
2452.00	105.12	6.63	111.75	--	--	Peak
2452.00	97.18	6.63	103.81	--	--	Average
2483.50	45.62	6.81	52.43	54.00	-1.57	Average
2484.40	57.62	6.81	64.43	74.00	-9.57	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 102 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2452 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

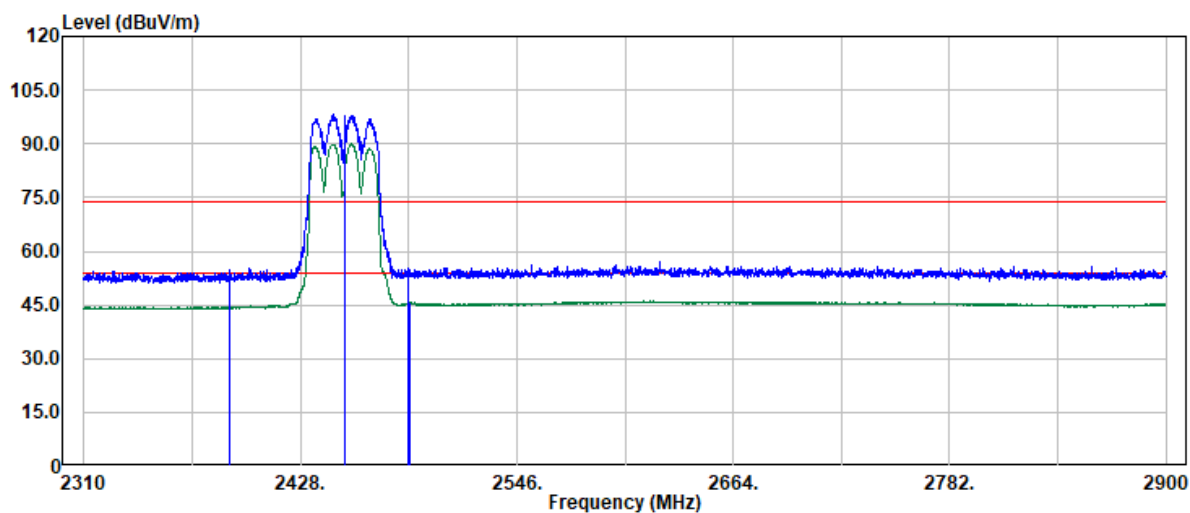

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.65	48.16	6.43	54.59	74.00	-19.41	Peak
2389.65	38.14	6.43	44.57	54.00	-9.43	Average
2452.00	91.52	6.63	98.15	--	--	Peak
2452.00	83.32	6.63	89.95	--	--	Average
2486.65	48.26	6.84	55.10	74.00	-18.90	Peak
2487.35	38.82	6.84	45.66	54.00	-8.34	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 103 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2412 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

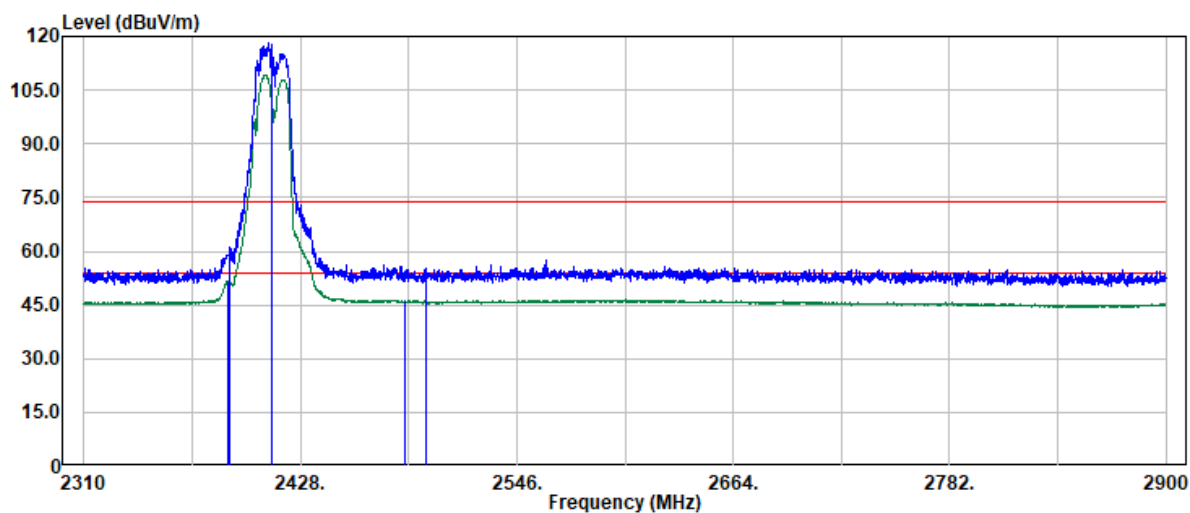

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.47	45.09	6.42	51.51	54.00	-2.49	Average
2389.53	54.65	6.43	61.08	74.00	-12.92	Peak
2412.00	111.83	6.50	118.33	--	--	Peak
2412.00	102.71	6.50	109.21	--	--	Average
2484.88	39.26	6.82	46.08	54.00	-7.92	Average
2496.79	48.27	6.85	55.12	74.00	-18.88	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 104 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2412 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17

Test Date : 2025-02-06
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

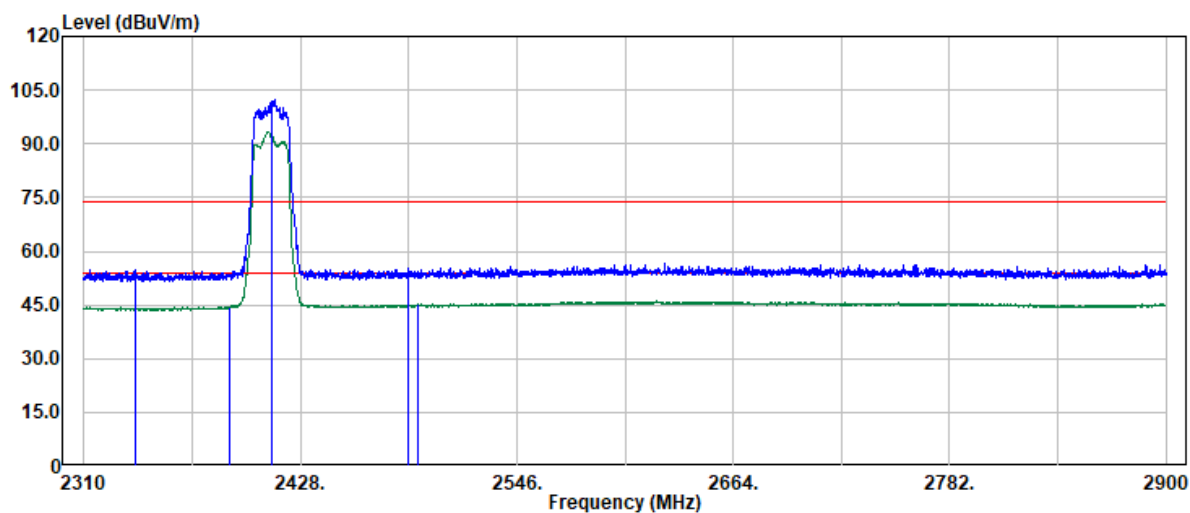

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2337.73	48.41	6.32	54.73	74.00	-19.27	Peak
2389.53	38.15	6.43	44.58	54.00	-9.42	Average
2412.00	95.82	6.50	102.32	--	--	Peak
2412.00	86.79	6.50	93.29	--	--	Average
2486.53	48.45	6.84	55.29	74.00	-18.71	Peak
2491.84	38.50	6.86	45.36	54.00	-8.64	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 105 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2437 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

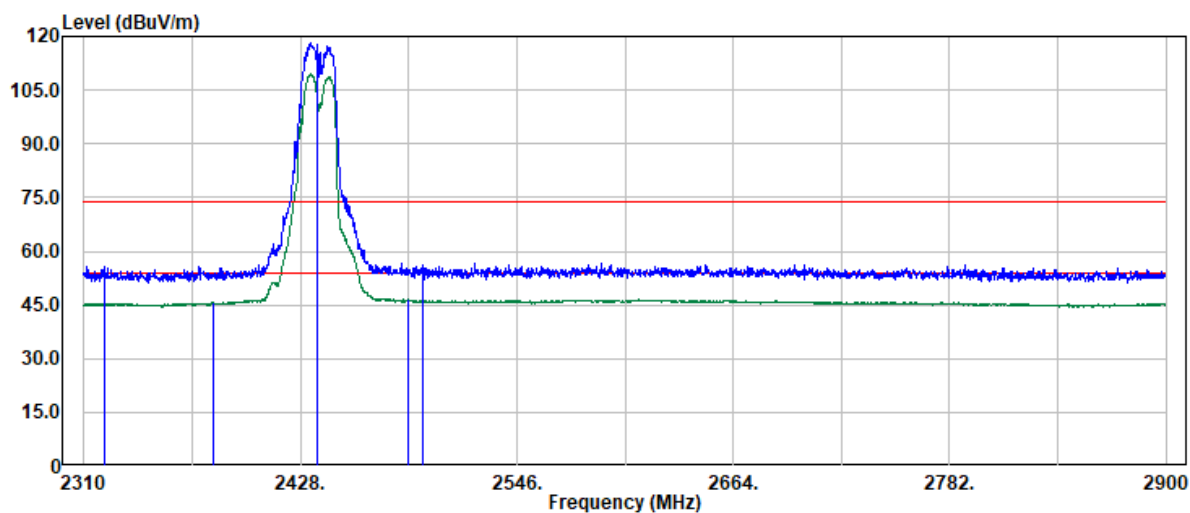

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2320.81	49.52	6.37	55.89	74.00	-18.11	Peak
2380.19	39.31	6.37	45.68	54.00	-8.32	Average
2437.00	111.74	6.55	118.29	--	--	Peak
2437.00	102.92	6.55	109.47	--	--	Average
2486.74	39.62	6.84	46.46	54.00	-7.54	Average
2495.20	49.39	6.85	56.24	74.00	-17.76	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 106 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2437 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

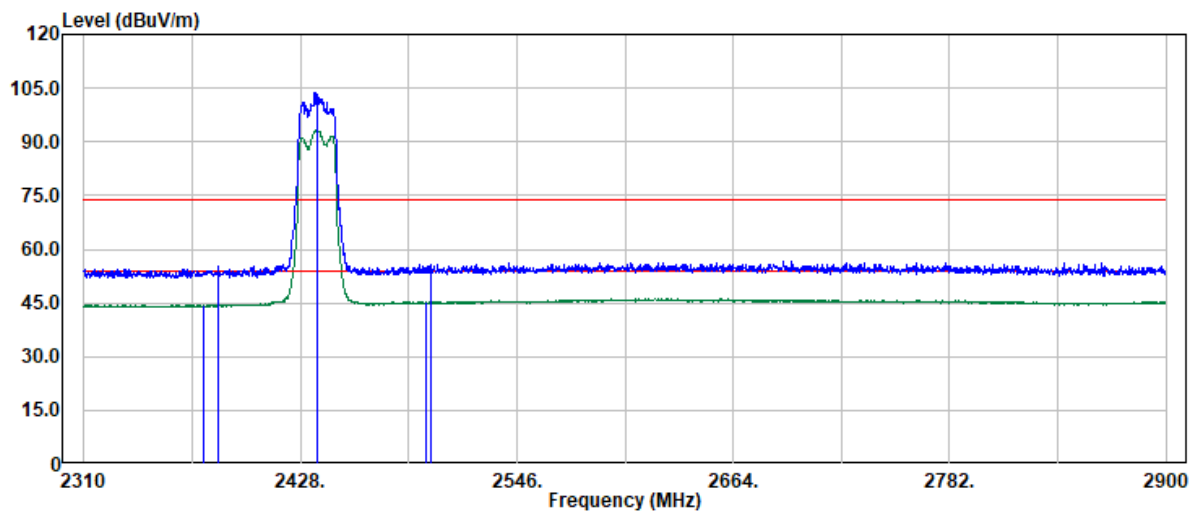

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2375.47	38.07	6.34	44.41	54.00	-9.59	Average
2383.33	48.64	6.39	55.03	74.00	-18.97	Peak
2437.00	97.00	6.55	103.55	--	--	Peak
2437.00	86.53	6.55	93.08	--	--	Average
2496.38	38.42	6.85	45.27	54.00	-8.73	Average
2499.33	48.93	6.84	55.77	74.00	-18.23	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 107 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

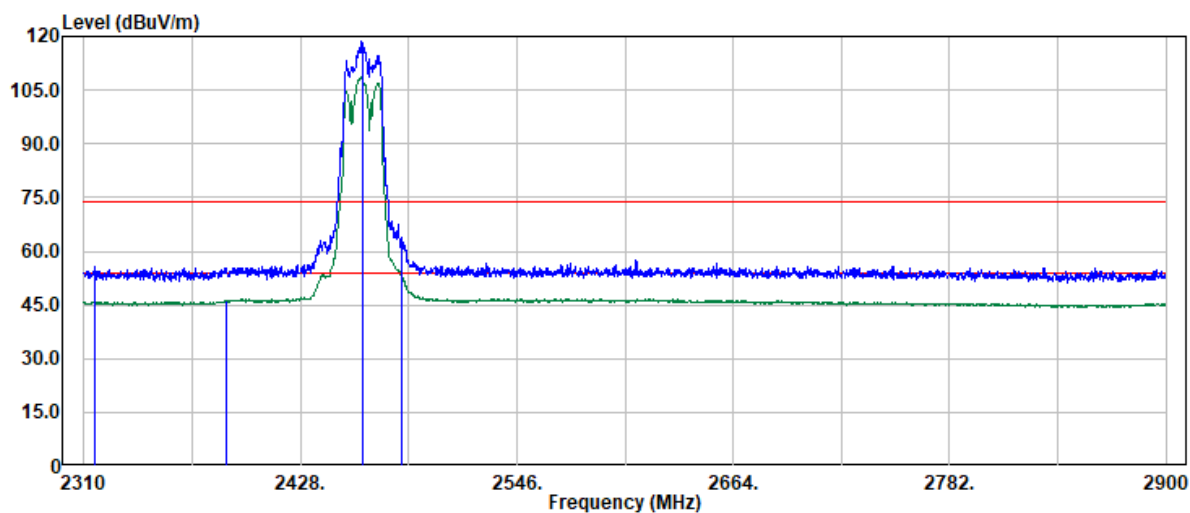

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2315.90	49.34	6.43	55.77	74.00	-18.23	Peak
2387.46	39.79	6.41	46.20	54.00	-7.80	Average
2462.00	111.95	6.60	118.55	--	--	Peak
2462.00	101.92	6.60	108.52	--	--	Average
2483.50	57.09	6.81	63.90	74.00	-10.10	Peak
2483.50	46.62	6.81	53.43	54.00	-0.57	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 108 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

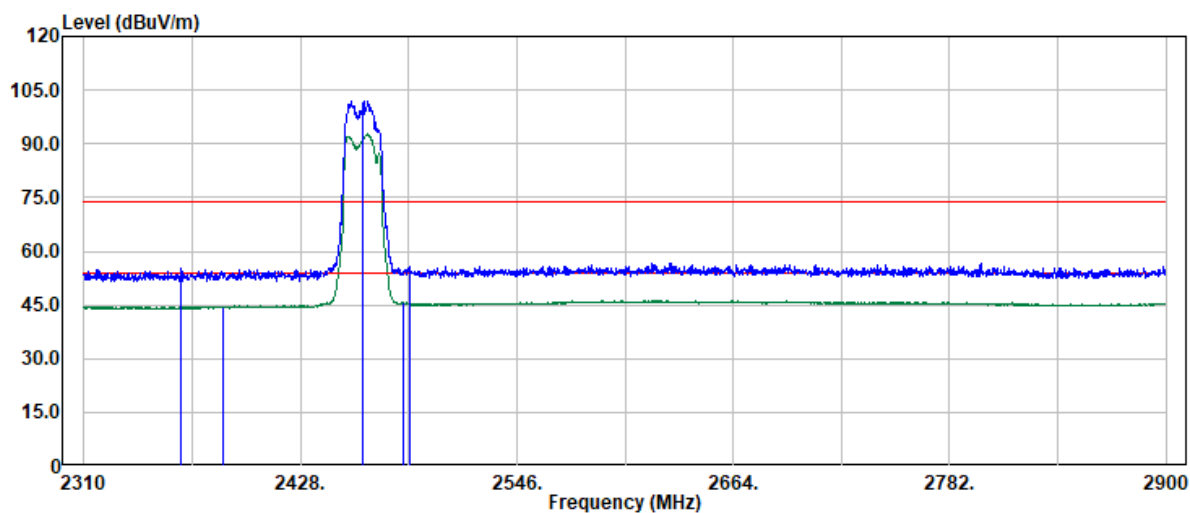

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2363.08	48.85	6.26	55.11	74.00	-18.89	Peak
2385.89	38.16	6.40	44.56	54.00	-9.44	Average
2462.00	95.18	6.60	101.78	--	--	Peak
2462.00	86.08	6.60	92.68	--	--	Average
2484.19	38.83	6.81	45.64	54.00	-8.36	Average
2487.33	48.95	6.84	55.79	74.00	-18.21	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 109 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2422 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

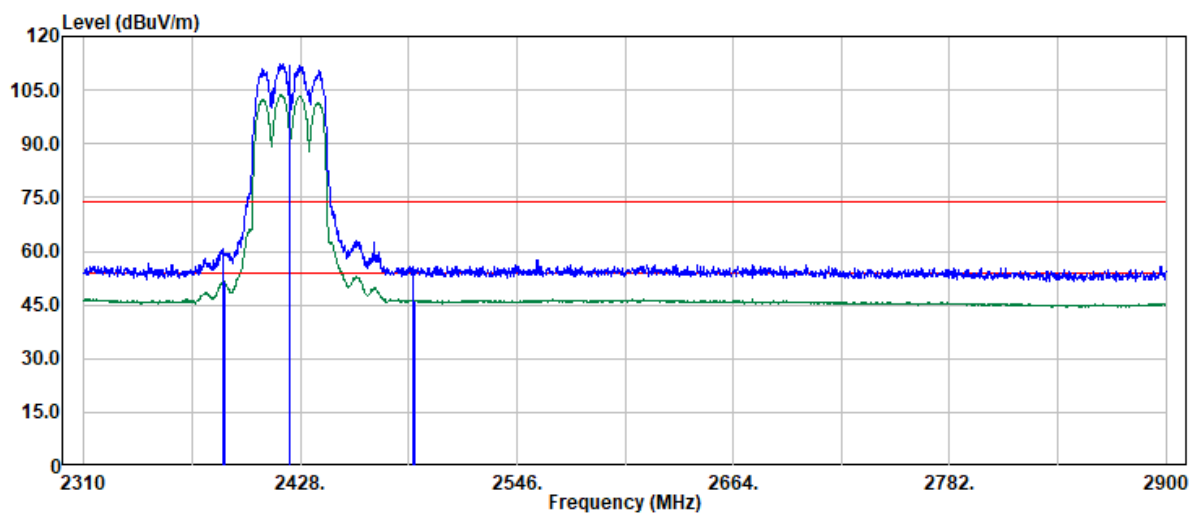


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2385.50	54.11	6.40	60.51	74.00	-13.49	Peak
2386.68	45.10	6.41	51.51	54.00	-2.49	Average
2422.00	105.66	6.56	112.22	--	--	Peak
2422.00	97.04	6.56	103.60	--	--	Average
2489.69	48.88	6.86	55.74	74.00	-18.26	Peak
2490.68	39.51	6.86	46.37	54.00	-7.63	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 110 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2422 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

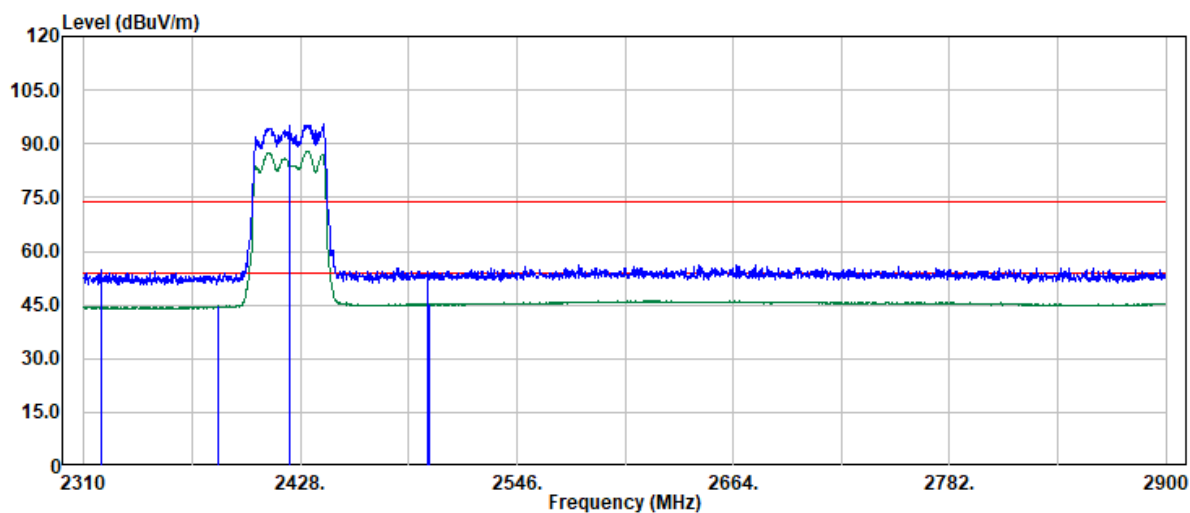


Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2319.24	48.18	6.39	54.57	74.00	-19.43	Peak
2383.14	38.36	6.39	44.75	54.00	-9.25	Average
2422.00	88.79	6.56	95.35	--	--	Peak
2422.00	81.28	6.56	87.84	--	--	Average
2497.56	47.65	6.85	54.50	74.00	-19.50	Peak
2498.15	38.46	6.84	45.30	54.00	-8.70	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 111 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2437 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

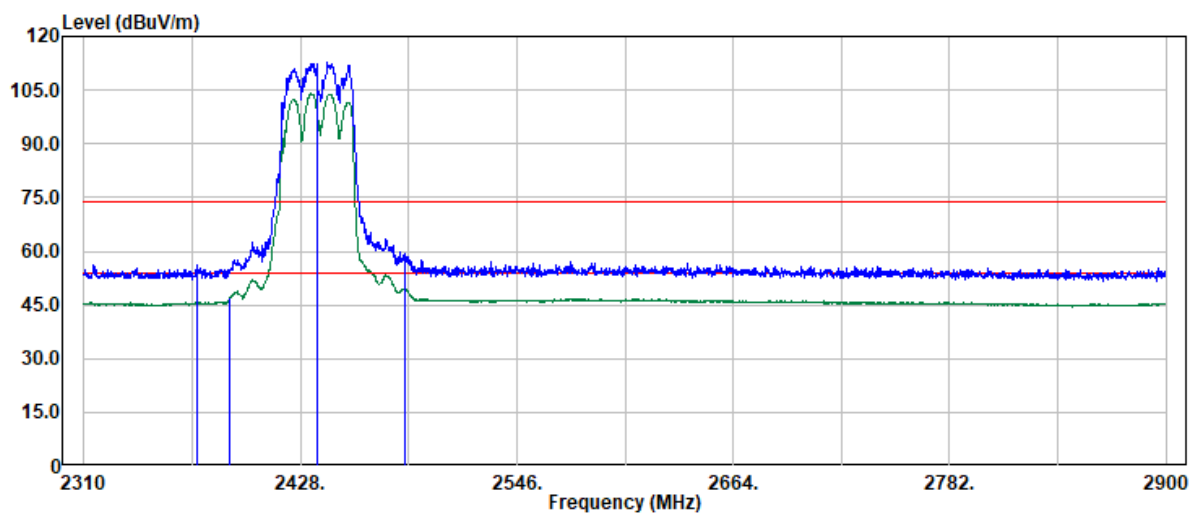


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2371.73	50.03	6.31	56.34	74.00	-17.66	Peak
2389.82	40.62	6.43	47.05	54.00	-6.95	Average
2437.00	106.43	6.55	112.98	--	--	Peak
2437.00	97.50	6.55	104.05	--	--	Average
2484.78	52.30	6.82	59.12	74.00	-14.88	Peak
2484.98	42.74	6.82	49.56	54.00	-4.44	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 112 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2437 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

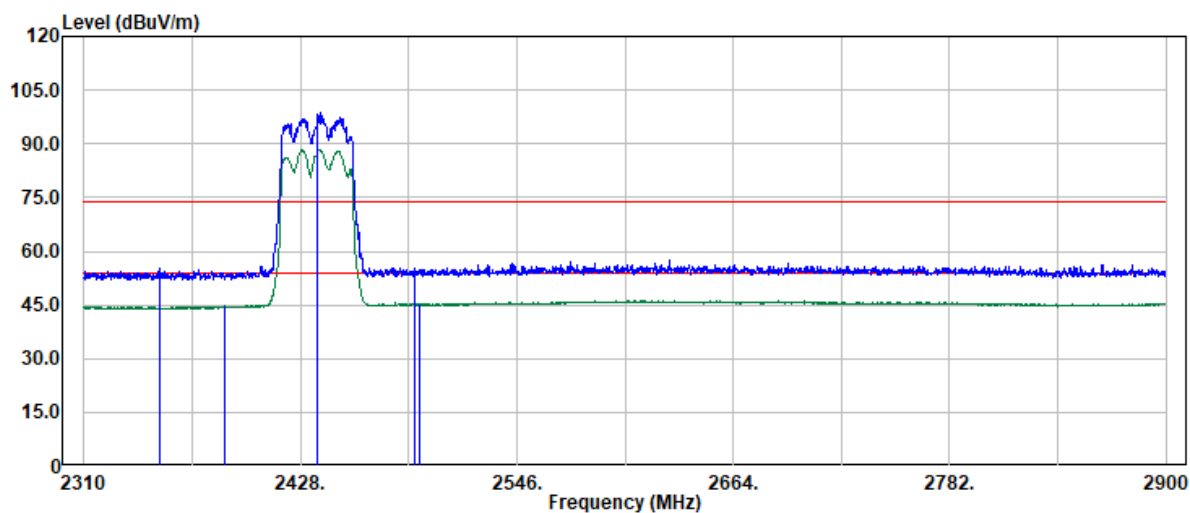

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2351.29	48.89	6.19	55.08	74.00	-18.92	Peak
2386.68	38.21	6.41	44.62	54.00	-9.38	Average
2437.00	92.11	6.55	98.66	--	--	Peak
2437.00	81.91	6.55	88.46	--	--	Average
2490.28	48.27	6.86	55.13	74.00	-18.87	Peak
2492.84	38.51	6.86	45.37	54.00	-8.63	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 113 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2452 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

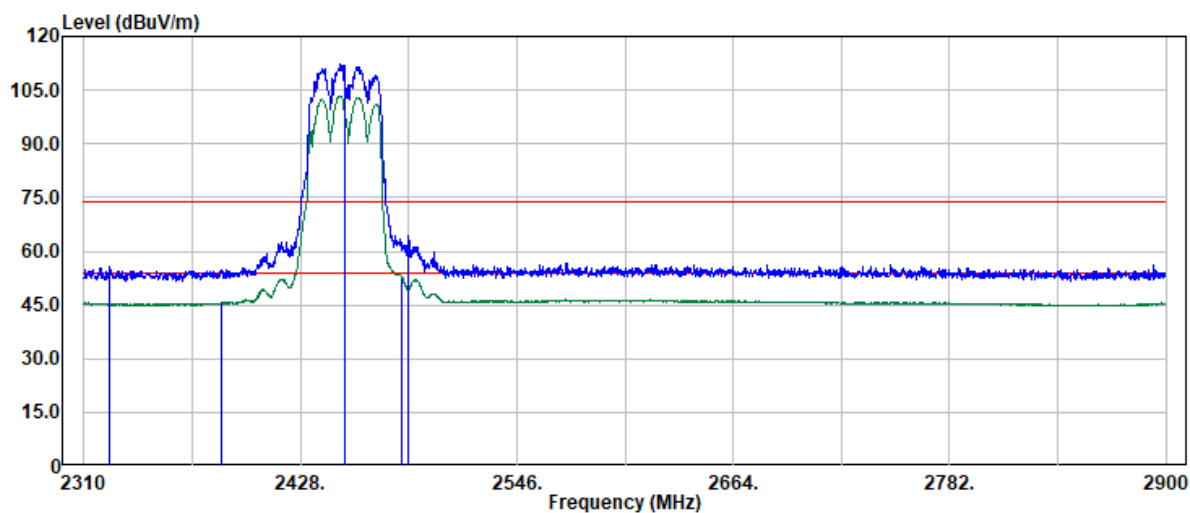

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2323.96	49.46	6.36	55.82	74.00	-18.18	Peak
2385.10	39.41	6.40	45.81	54.00	-8.19	Average
2452.00	105.71	6.63	112.34	--	--	Peak
2452.00	96.82	6.63	103.45	--	--	Average
2483.50	45.83	6.81	52.64	54.00	-1.36	Average
2487.14	57.49	6.84	64.33	74.00	-9.67	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 114 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2452 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

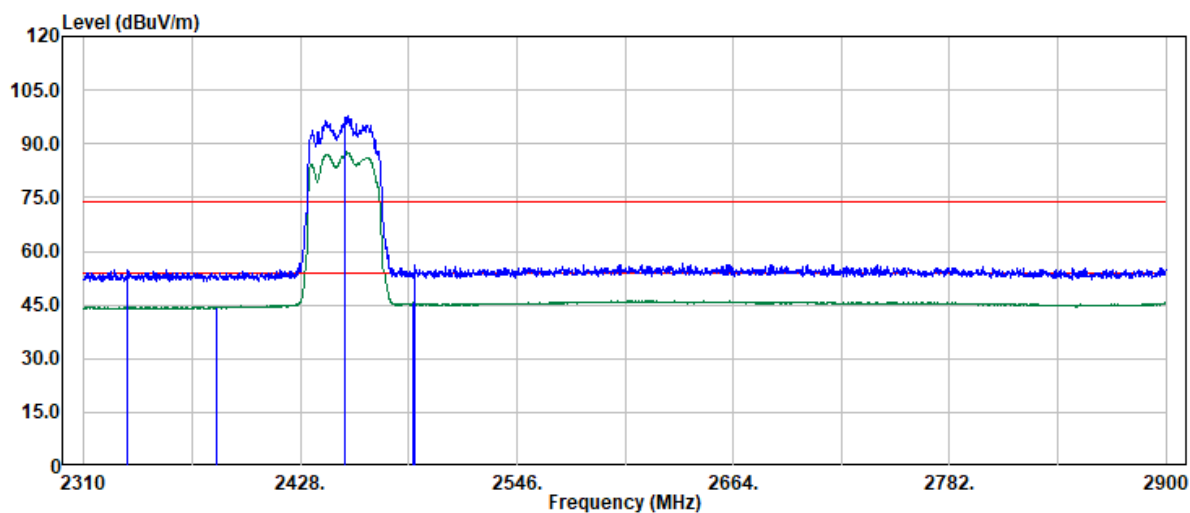

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2333.99	48.58	6.33	54.91	74.00	-19.09	Peak
2381.96	38.18	6.38	44.56	54.00	-9.44	Average
2452.00	90.99	6.63	97.62	--	--	Peak
2452.00	81.04	6.63	87.67	--	--	Average
2489.69	38.69	6.86	45.55	54.00	-8.45	Average
2490.48	49.28	6.86	56.14	74.00	-17.86	Peak


Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 115 / 152
Rev.: 01

TX Test Data

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-08
Temp./Humi. : 24.3/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

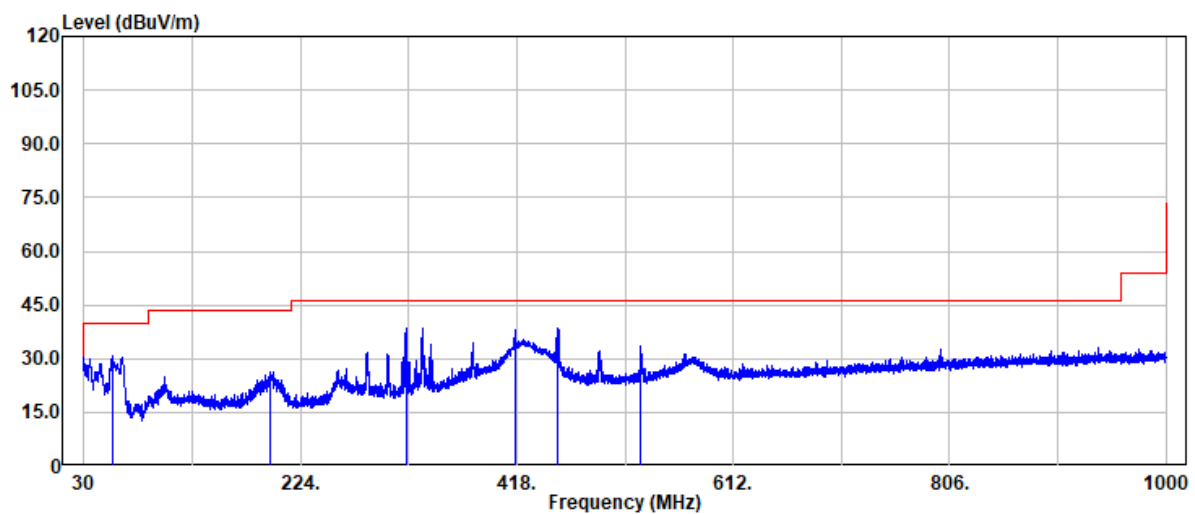


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
55.58	47.35	-16.54	30.81	40.00	-9.19	Peak
197.33	36.71	-10.64	26.07	43.50	-17.43	Peak
319.79	47.55	-9.00	38.55	46.00	-7.45	Peak
417.27	44.45	-6.22	38.23	46.00	-7.77	Peak
454.50	43.82	-5.31	38.51	46.00	-7.49	Peak
528.94	37.33	-3.94	33.39	46.00	-12.61	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 116 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-08
Temp./Humi. : 24.3/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

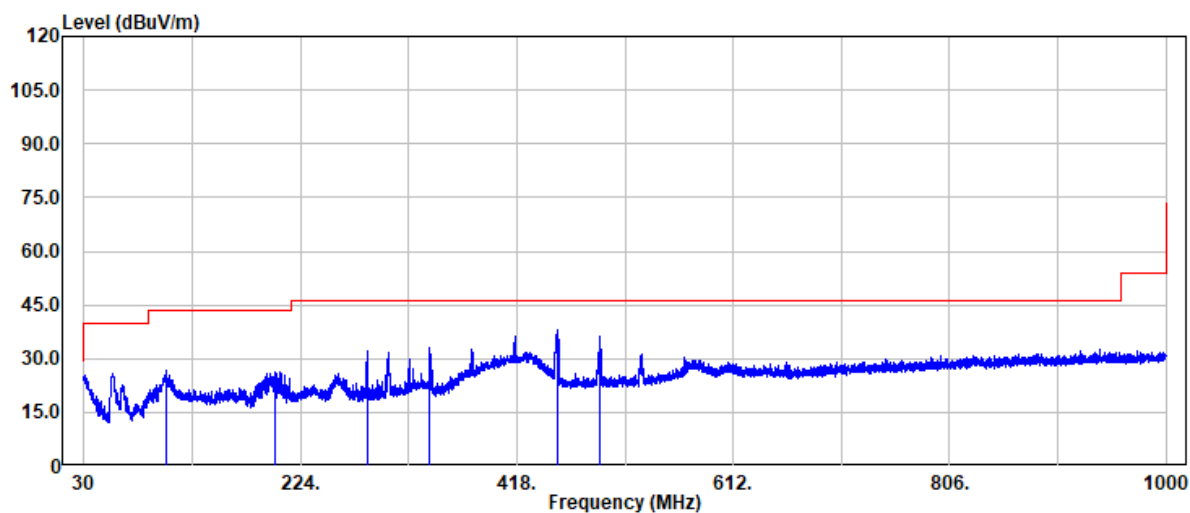


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
104.45	38.74	-12.15	26.59	43.50	-16.91	Peak
200.72	36.96	-10.56	26.40	43.50	-17.10	Peak
284.14	41.87	-9.56	32.31	46.00	-13.69	Peak
339.79	41.57	-8.67	32.90	46.00	-13.10	Peak
454.50	43.37	-5.31	38.06	46.00	-7.94	Peak
492.69	40.83	-4.44	36.39	46.00	-9.61	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 117 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11b_CH1
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : Vertical
Engineer : Tony.Chao
Test Chamber : 966A

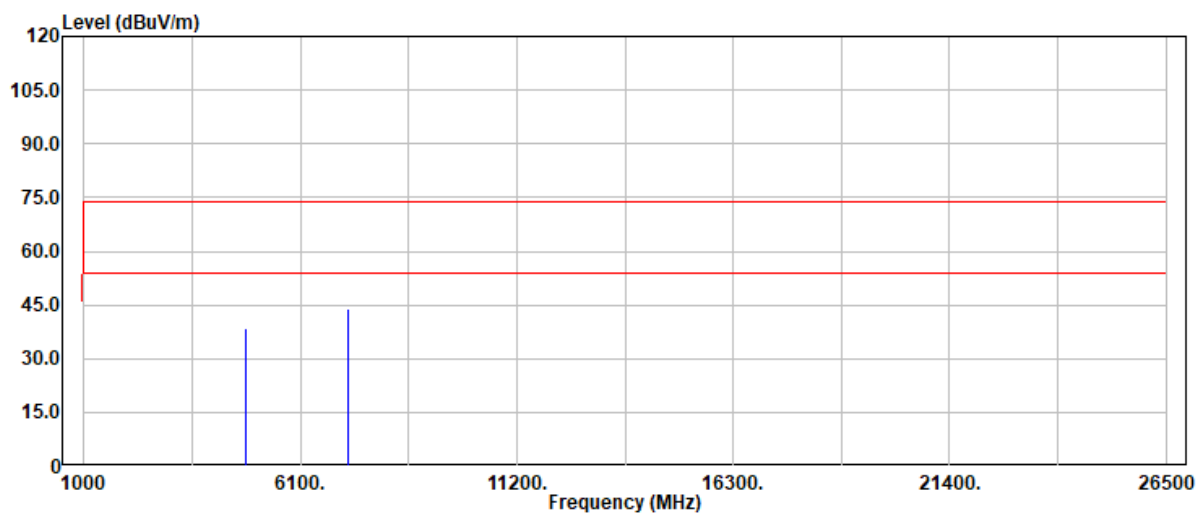


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	36.34	2.07	38.41	74.00	-35.59	Peak
4824.00	29.56	2.07	31.63	54.00	-22.37	Average
7236.00	34.90	8.98	43.88	74.00	-30.12	Peak
7236.00	27.80	8.98	36.78	54.00	-17.22	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 118 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11b_CH1
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : Horizontal
Engineer : Tony.Chao
Test Chamber : 966A

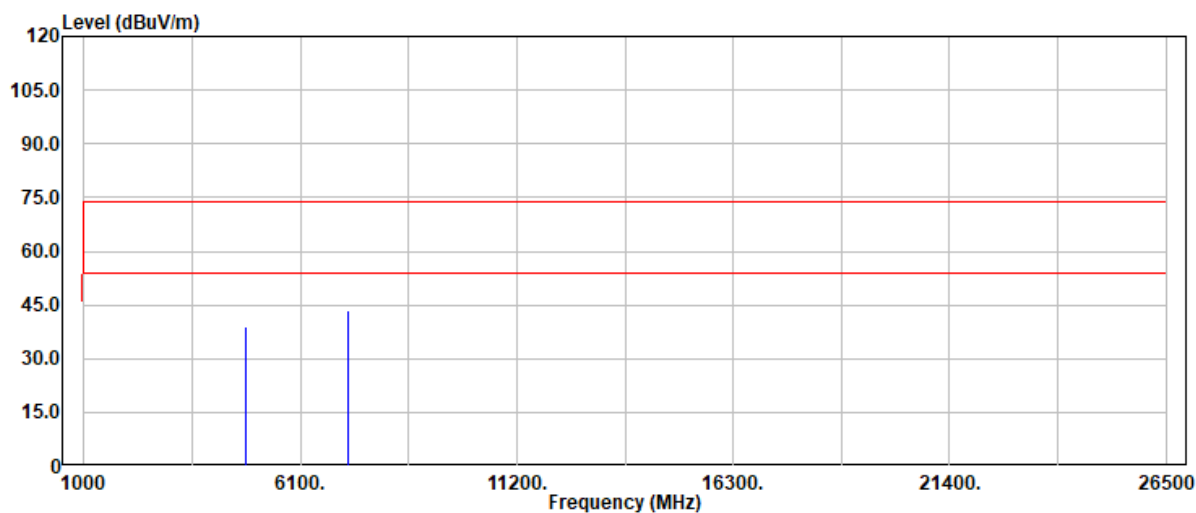


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	36.91	2.07	38.98	74.00	-35.02	Peak
4824.00	29.51	2.07	31.58	54.00	-22.42	Average
7236.00	34.68	8.98	43.66	74.00	-30.34	Peak
7236.00	28.06	8.98	37.04	54.00	-16.96	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 119 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11b_CH1
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : Vertical
Engineer : Tony.Chao
Test Chamber : 966A

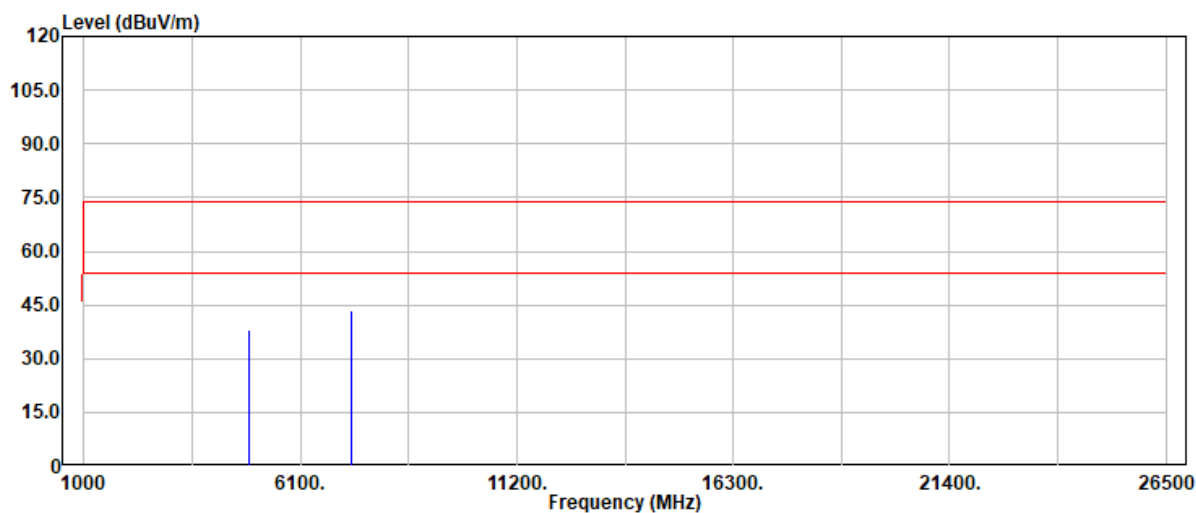


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.44	2.54	37.98	74.00	-36.02	Peak
4874.00	27.35	2.54	29.89	54.00	-24.11	Average
7311.00	34.24	9.17	43.41	74.00	-30.59	Peak
7311.00	27.14	9.17	36.31	54.00	-17.69	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 120 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11b_CH1
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : Horizontal
Engineer : Tony.Chao
Test Chamber : 966A

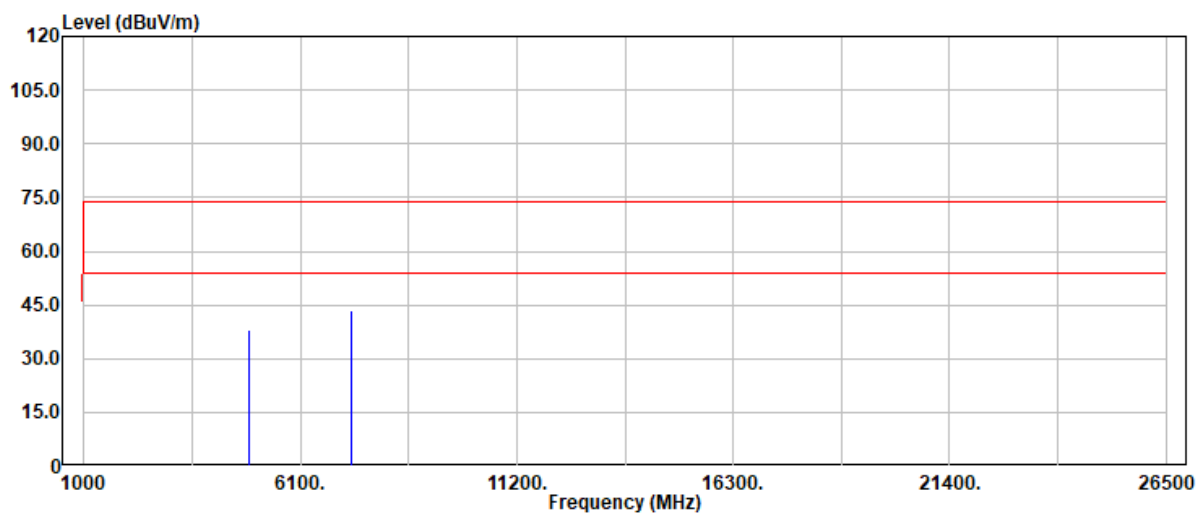


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.44	2.54	37.98	74.00	-36.02	Peak
4874.00	28.00	2.54	30.54	54.00	-23.46	Average
7311.00	34.29	9.17	43.46	74.00	-30.54	Peak
7311.00	27.16	9.17	36.33	54.00	-17.67	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 121 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11b_CH1
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

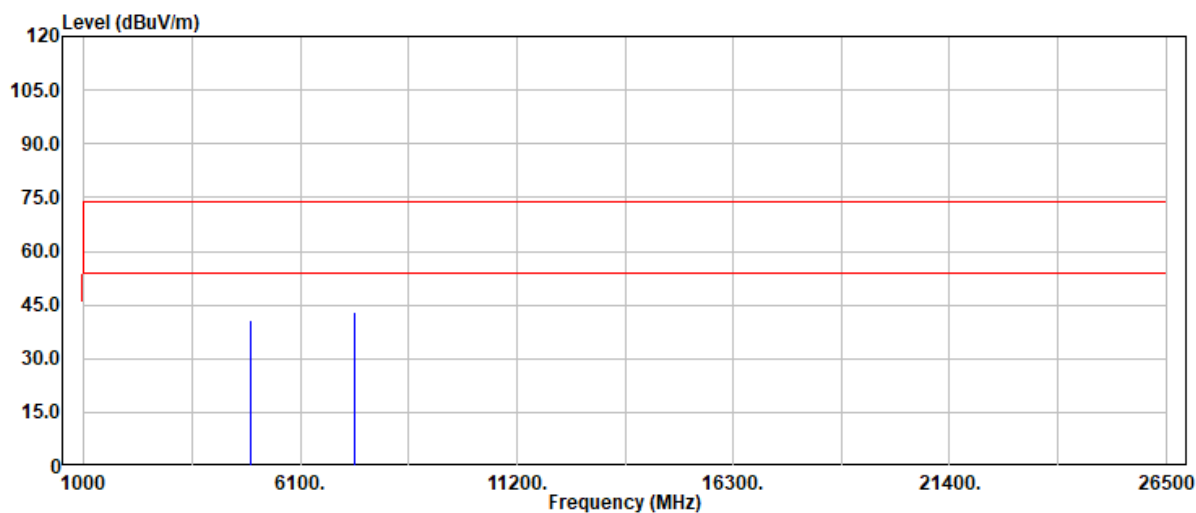


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	37.62	3.27	40.89	74.00	-33.11	Peak
4924.00	29.17	3.27	32.44	54.00	-21.56	Average
7386.00	33.48	9.46	42.94	74.00	-31.06	Peak
7386.00	26.74	9.46	36.20	54.00	-17.80	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 122 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11b_CH1
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

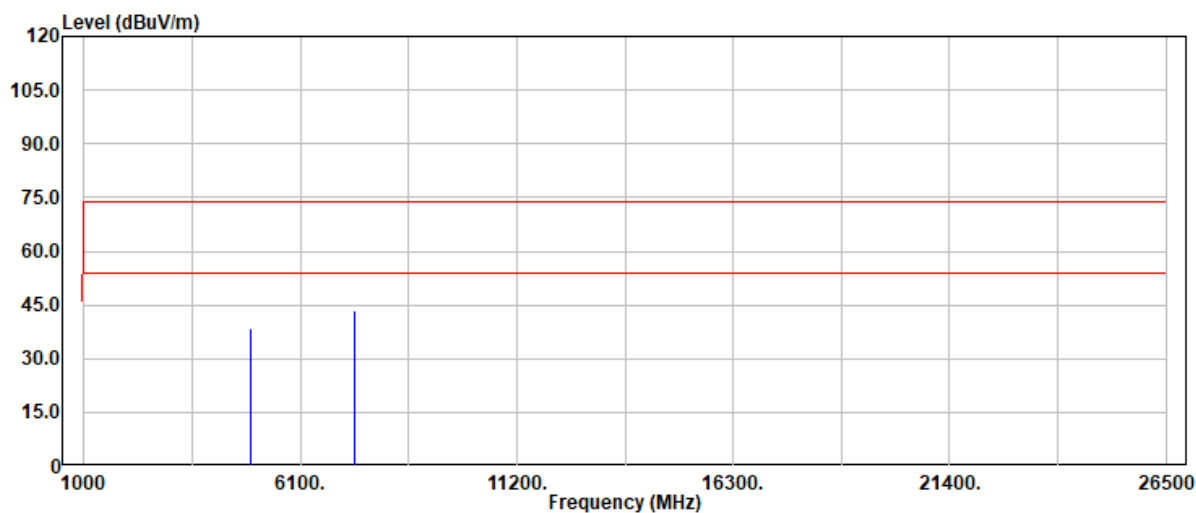


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.09	3.27	38.36	74.00	-35.64	Peak
4924.00	28.26	3.27	31.53	54.00	-22.47	Average
7386.00	34.02	9.46	43.48	74.00	-30.52	Peak
7386.00	26.47	9.46	35.93	54.00	-18.07	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 123 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11g_CH1
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

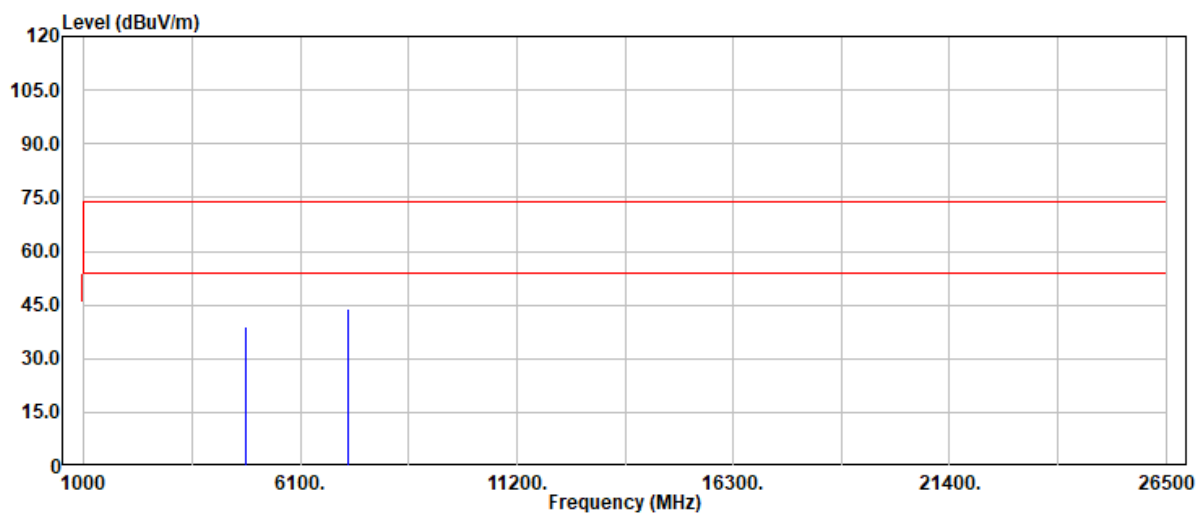


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	37.04	2.07	39.11	74.00	-34.89	Peak
4824.00	28.22	2.07	30.29	54.00	-23.71	Average
7236.00	34.85	8.98	43.83	74.00	-30.17	Peak
7236.00	26.45	8.98	35.43	54.00	-18.57	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 124 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11g_CH1
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

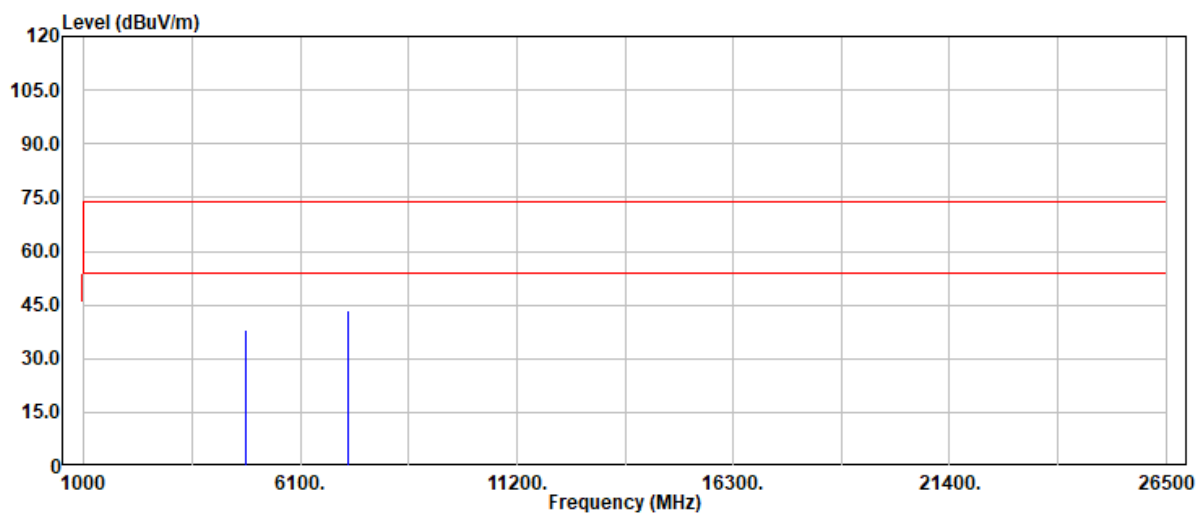


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	35.99	2.07	38.06	74.00	-35.94	Peak
4824.00	28.27	2.07	30.34	54.00	-23.66	Average
7236.00	34.42	8.98	43.40	74.00	-30.60	Peak
7236.00	26.36	8.98	35.34	54.00	-18.66	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 125 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11g_CH1
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

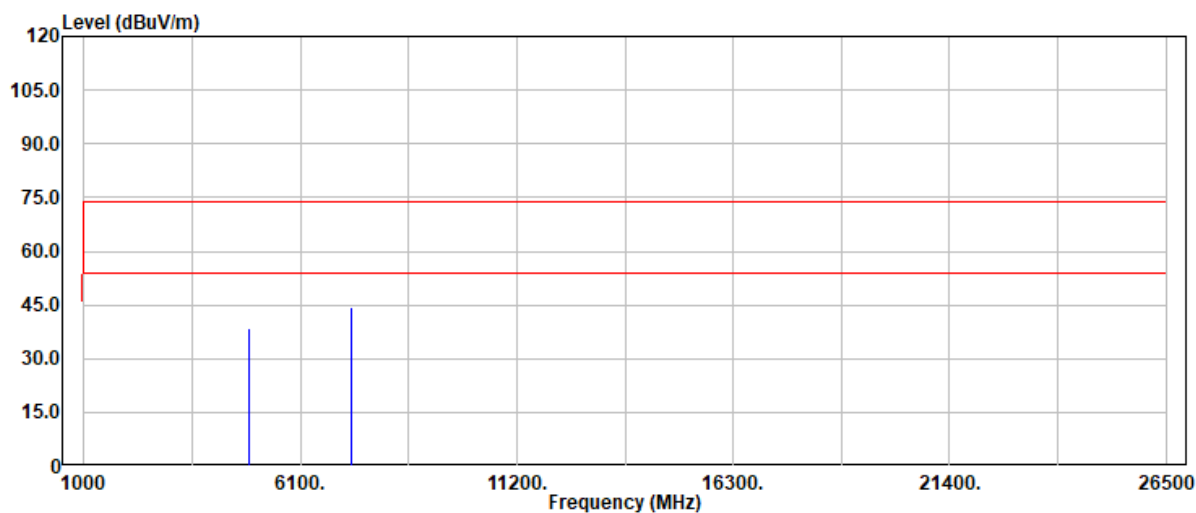


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.16	2.54	38.70	74.00	-35.30	Peak
4874.00	27.81	2.54	30.35	54.00	-23.65	Average
7311.00	35.01	9.17	44.18	74.00	-29.82	Peak
7311.00	26.26	9.17	35.43	54.00	-18.57	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 126 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11g_CH1
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

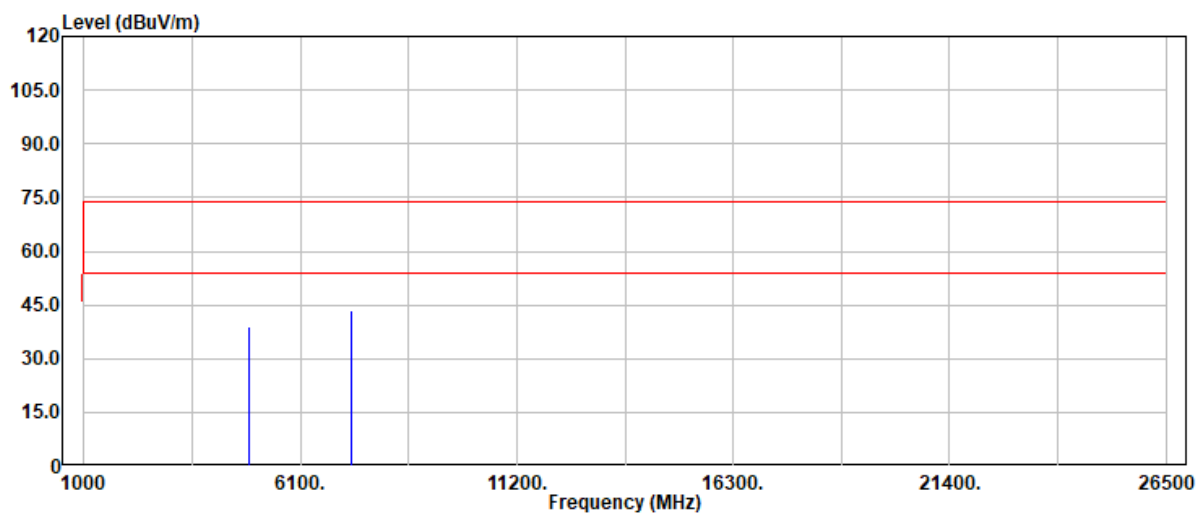


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.49	2.54	39.03	74.00	-34.97	Peak
4874.00	27.81	2.54	30.35	54.00	-23.65	Average
7311.00	34.28	9.17	43.45	74.00	-30.55	Peak
7311.00	26.64	9.17	35.81	54.00	-18.19	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 127 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11g_CH1
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

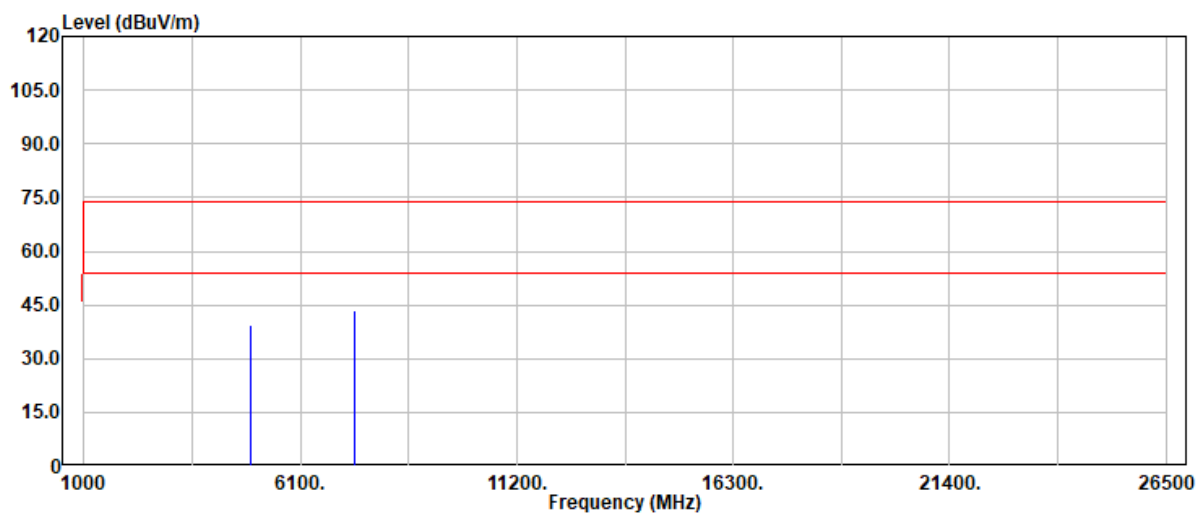


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.96	3.27	39.23	74.00	-34.77	Peak
4924.00	27.55	3.27	30.82	54.00	-23.18	Average
7386.00	34.14	9.46	43.60	74.00	-30.40	Peak
7386.00	26.43	9.46	35.89	54.00	-18.11	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 128 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11g_CH1
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

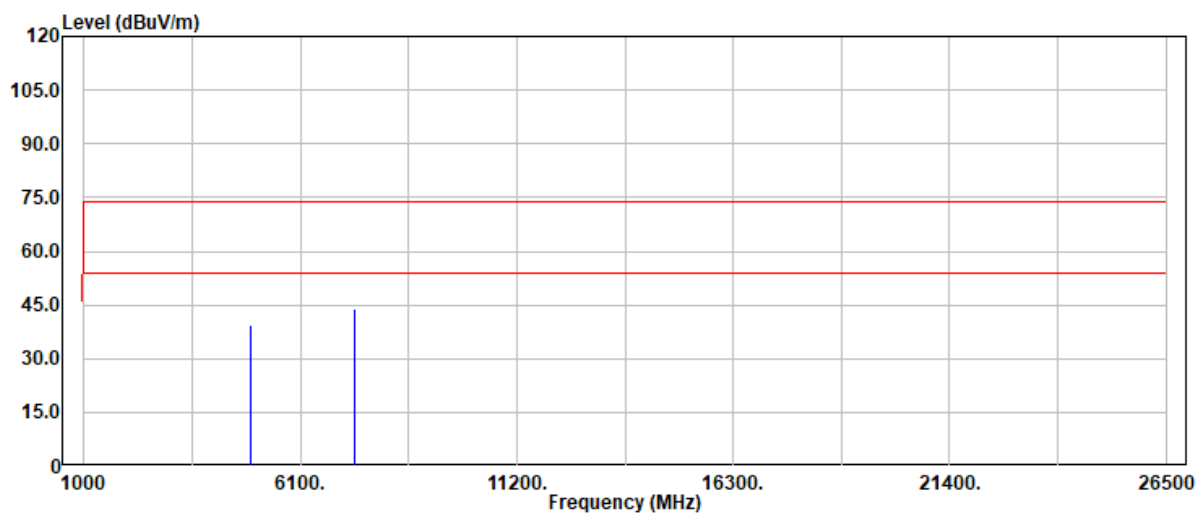


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	36.08	3.27	39.35	74.00	-34.65	Peak
4924.00	27.58	3.27	30.85	54.00	-23.15	Average
7386.00	34.61	9.46	44.07	74.00	-29.93	Peak
7386.00	26.48	9.46	35.94	54.00	-18.06	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 129 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n20
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 18

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

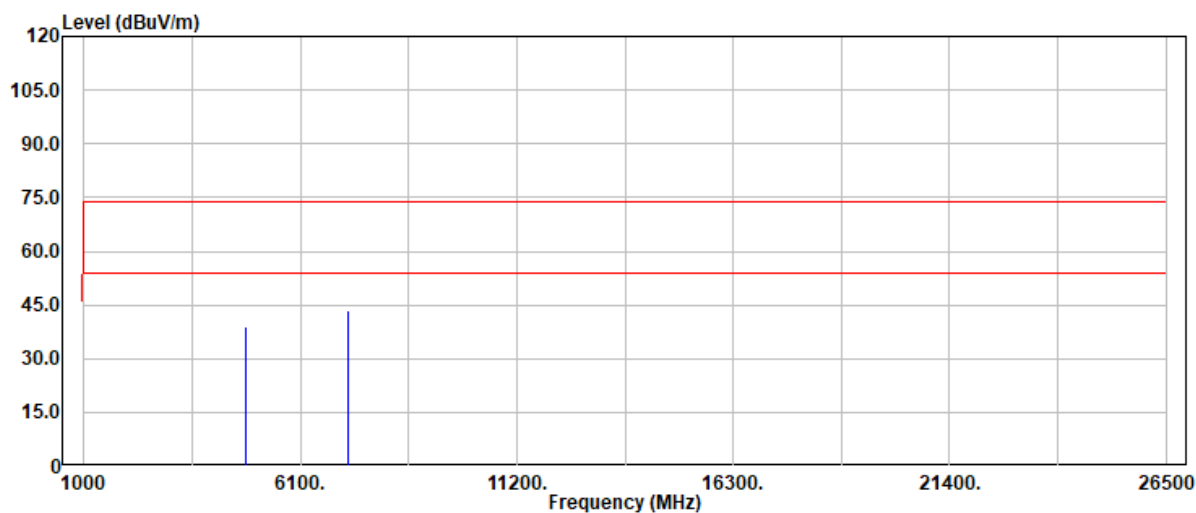


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	36.83	2.07	38.90	74.00	-35.10	Peak
4824.00	28.14	2.07	30.21	54.00	-23.79	Average
7236.00	34.42	8.98	43.40	74.00	-30.60	Peak
7236.00	26.69	8.98	35.67	54.00	-18.33	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 130 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n20
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 18

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

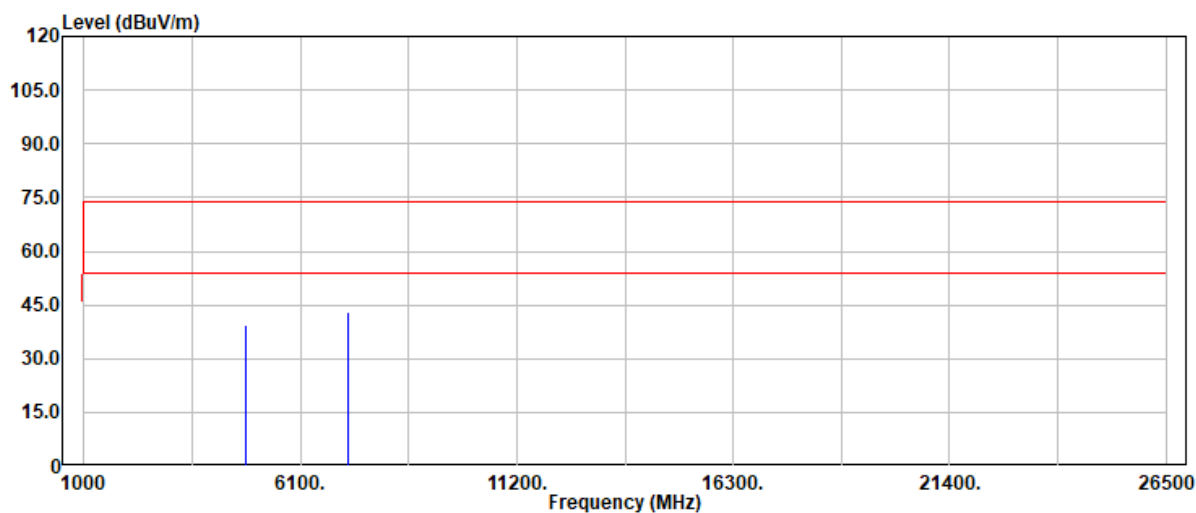


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	37.34	2.07	39.41	74.00	-34.59	Peak
4824.00	28.16	2.07	30.23	54.00	-23.77	Average
7236.00	34.15	8.98	43.13	74.00	-30.87	Peak
7236.00	26.75	8.98	35.73	54.00	-18.27	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 131 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n20
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 18

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : Vertical
Engineer : Tony.Chao
Test Chamber : 966A

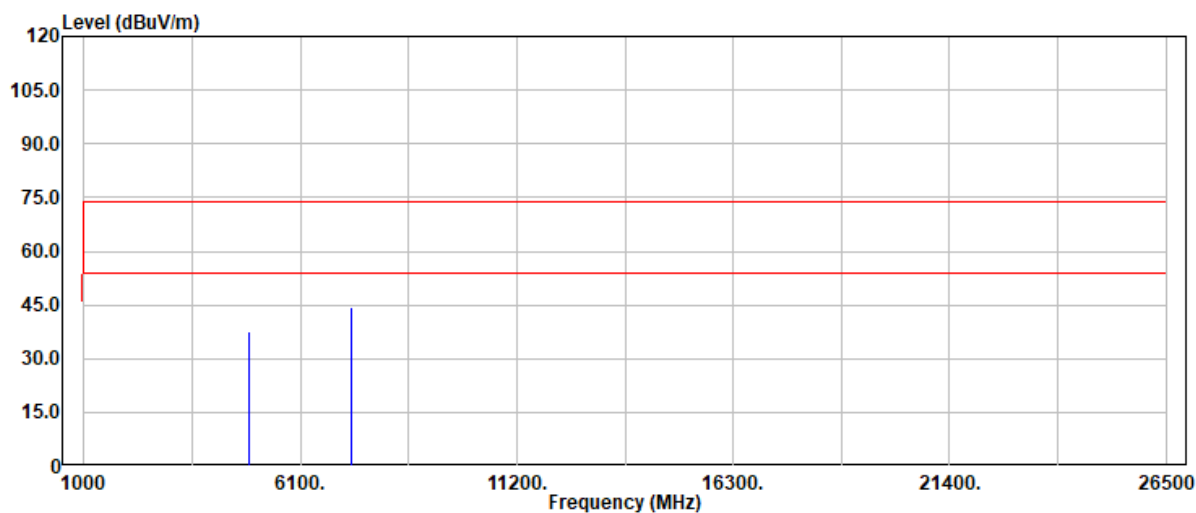


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.24	2.54	37.78	74.00	-36.22	Peak
4874.00	27.57	2.54	30.11	54.00	-23.89	Average
7311.00	35.20	9.17	44.37	74.00	-29.63	Peak
7311.00	27.44	9.17	36.61	54.00	-17.39	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 132 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n20
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 18

Test Date : 2025-02-07
Temp./Humi. : 24.3/58
Antenna Pol. : Horizontal
Engineer : Tony.Chao
Test Chamber : 966A

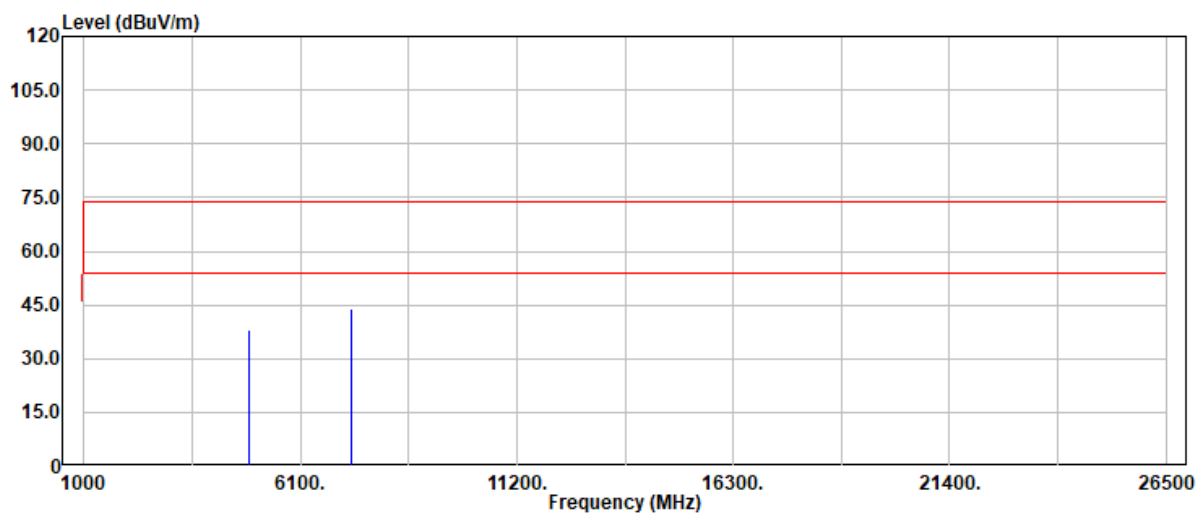


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.37	2.54	37.91	74.00	-36.09	Peak
4874.00	27.78	2.54	30.32	54.00	-23.68	Average
7311.00	34.66	9.17	43.83	74.00	-30.17	Peak
7311.00	27.40	9.17	36.57	54.00	-17.43	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 133 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 18

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

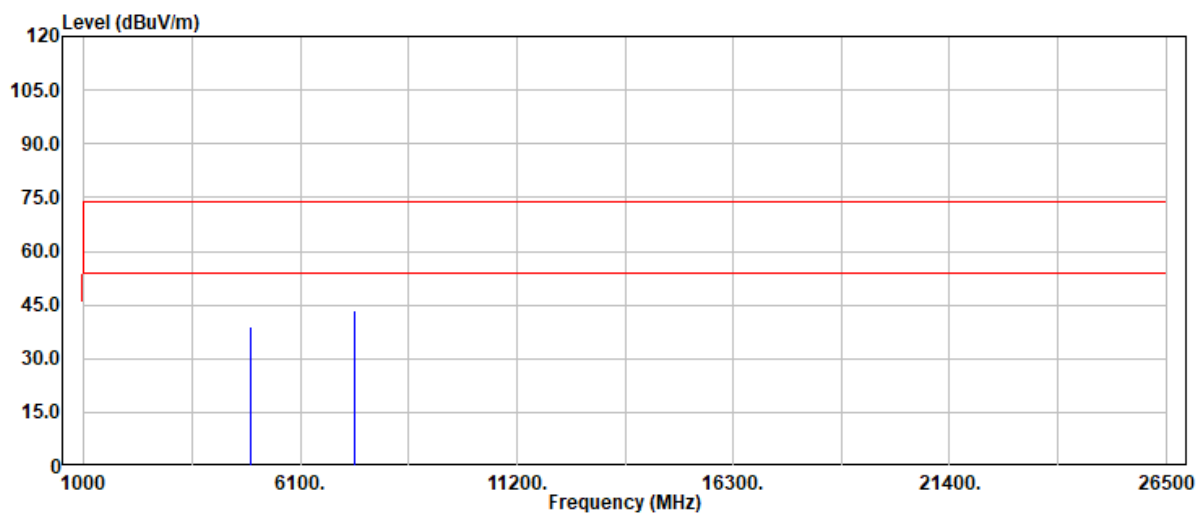


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.83	3.27	39.10	74.00	-34.90	Peak
4924.00	27.58	3.27	30.85	54.00	-23.15	Average
7386.00	33.86	9.46	43.32	74.00	-30.68	Peak
7386.00	26.39	9.46	35.85	54.00	-18.15	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 134 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 18

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

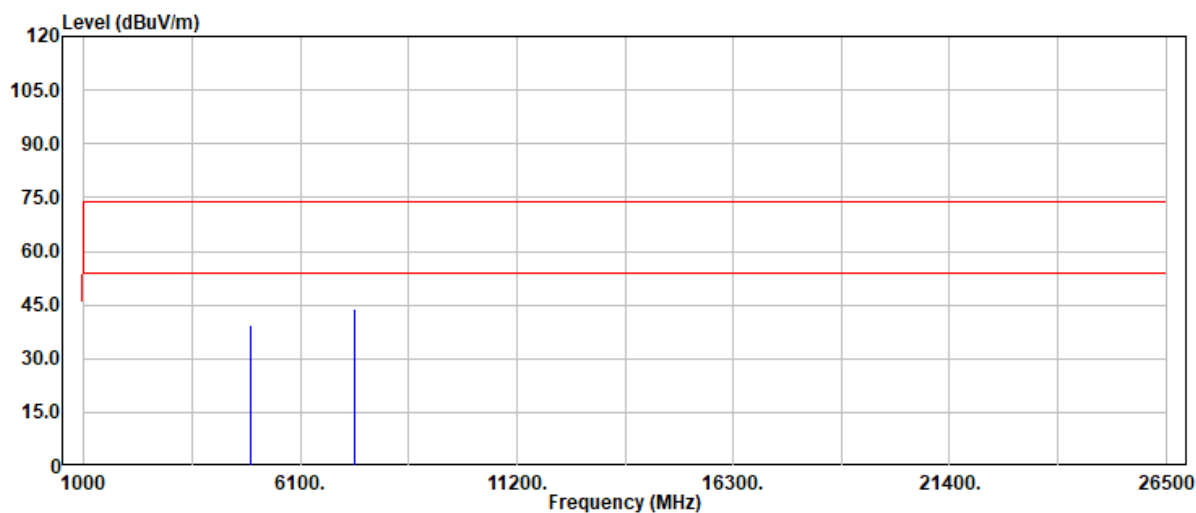


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	36.03	3.27	39.30	74.00	-34.70	Peak
4924.00	27.83	3.27	31.10	54.00	-22.90	Average
7386.00	34.27	9.46	43.73	74.00	-30.27	Peak
7386.00	26.47	9.46	35.93	54.00	-18.07	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 135 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

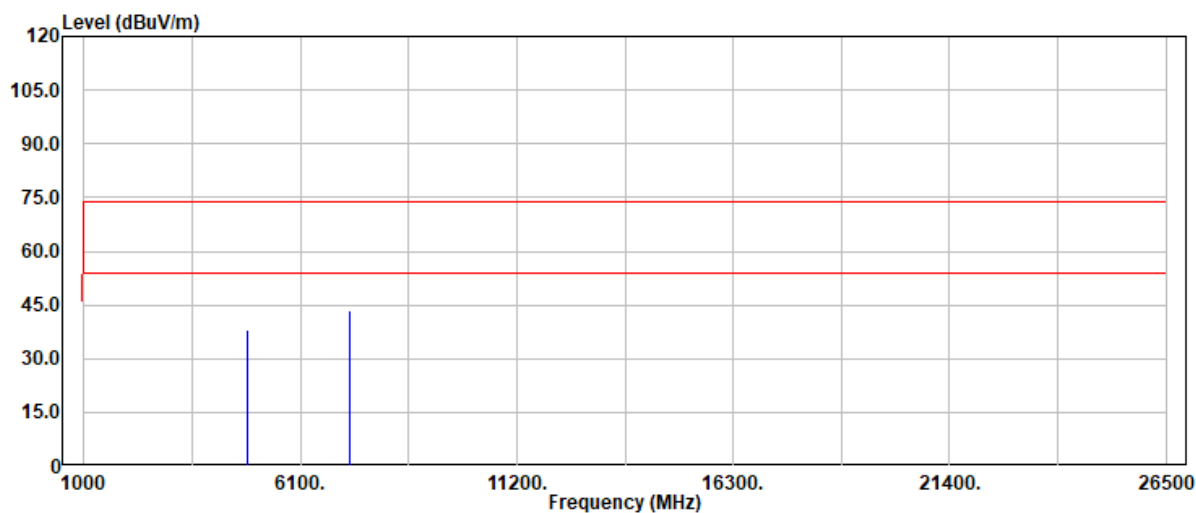


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	35.81	2.16	37.97	74.00	-36.03	Peak
4844.00	28.44	2.16	30.60	54.00	-23.40	Average
7266.00	34.40	9.08	43.48	74.00	-30.52	Peak
7266.00	26.68	9.08	35.76	54.00	-18.24	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 136 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

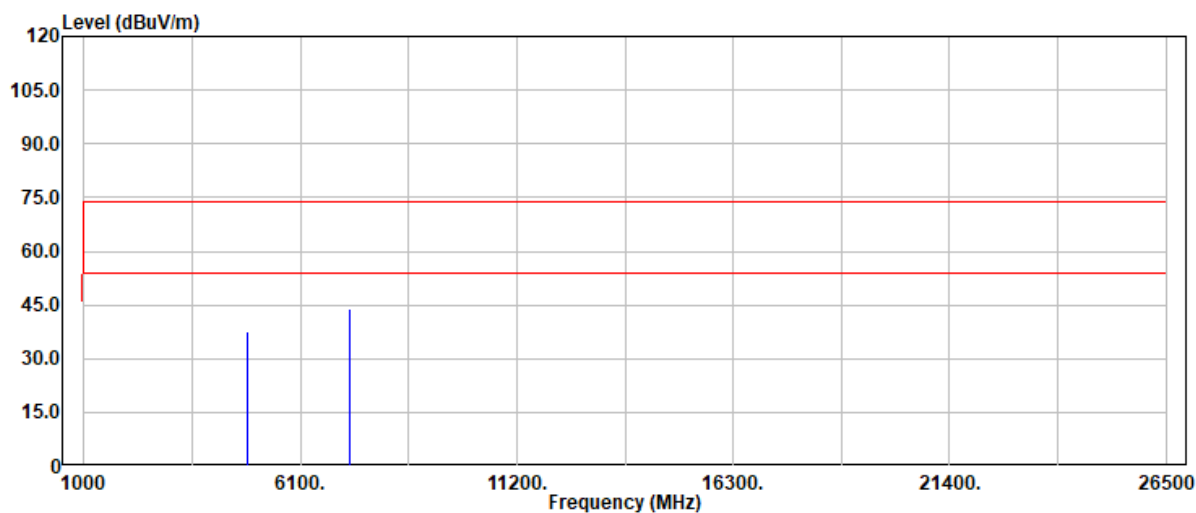


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	35.44	2.16	37.60	74.00	-36.40	Peak
4844.00	28.47	2.16	30.63	54.00	-23.37	Average
7266.00	34.92	9.08	44.00	74.00	-30.00	Peak
7266.00	26.80	9.08	35.88	54.00	-18.12	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 137 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

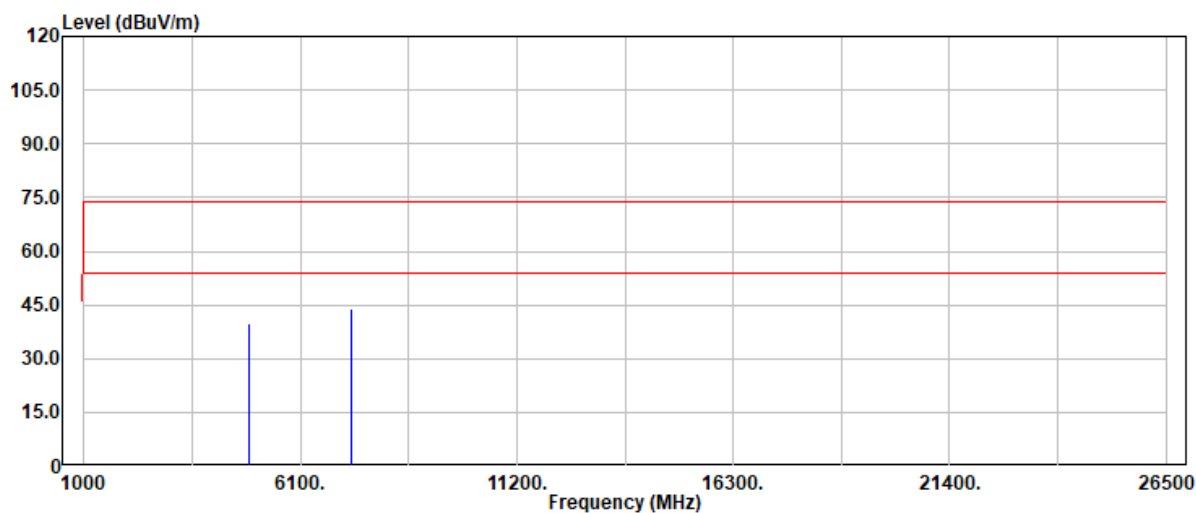


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	37.30	2.54	39.84	74.00	-34.16	Peak
4874.00	27.82	2.54	30.36	54.00	-23.64	Average
7311.00	34.91	9.17	44.08	74.00	-29.92	Peak
7311.00	26.77	9.17	35.94	54.00	-18.06	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 138 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

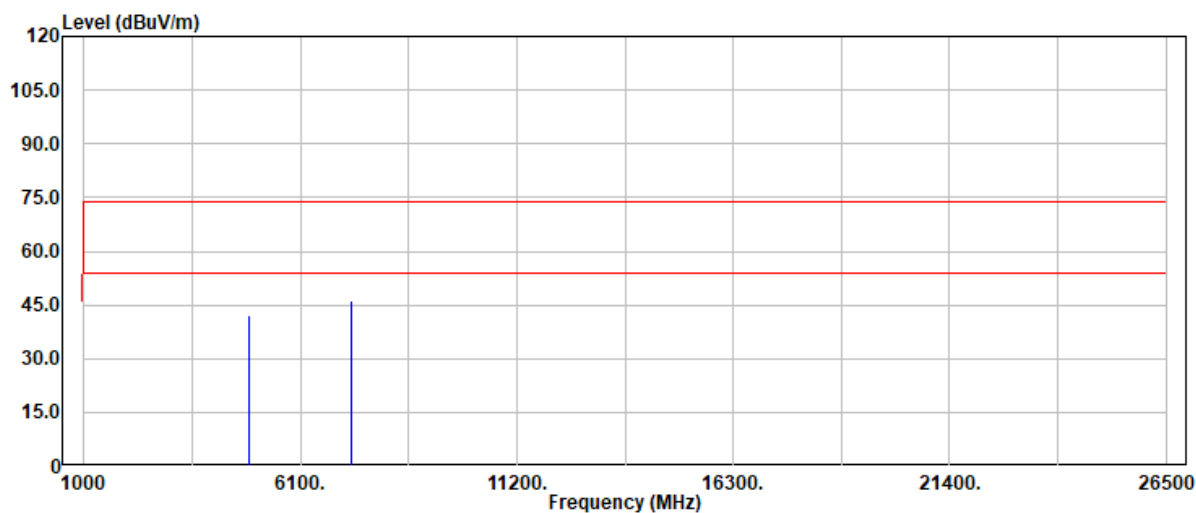


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	39.63	2.54	42.17	74.00	-31.83	Peak
4874.00	27.77	2.54	30.31	54.00	-23.69	Average
7311.00	37.01	9.17	46.18	74.00	-27.82	Peak
7311.00	26.59	9.17	35.76	54.00	-18.24	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 139 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

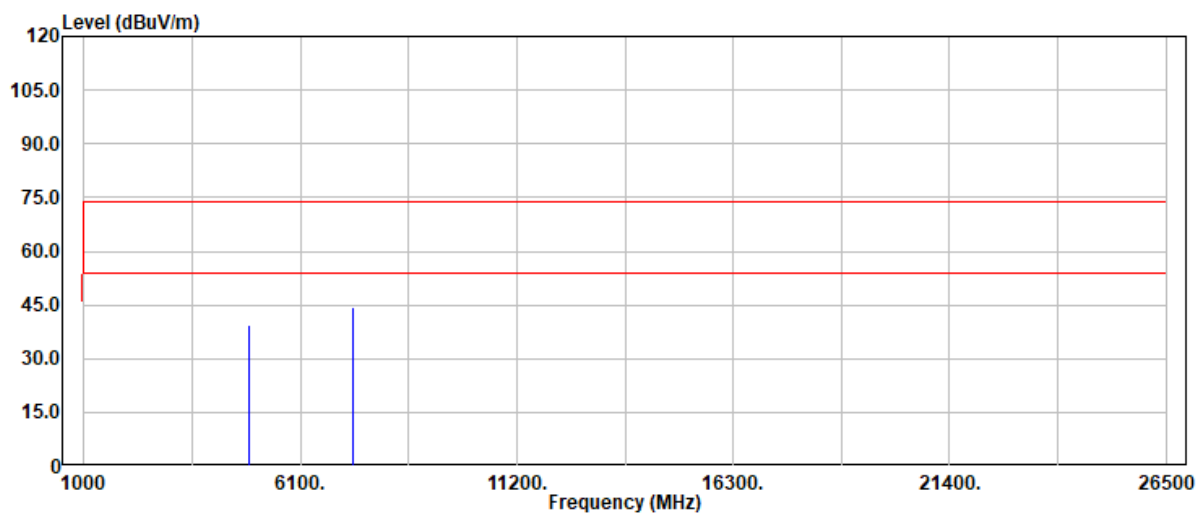


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	36.31	2.99	39.30	74.00	-34.70	Peak
4904.00	27.99	2.99	30.98	54.00	-23.02	Average
7356.00	35.15	9.42	44.57	74.00	-29.43	Peak
7356.00	26.33	9.42	35.75	54.00	-18.25	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 140 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11n40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

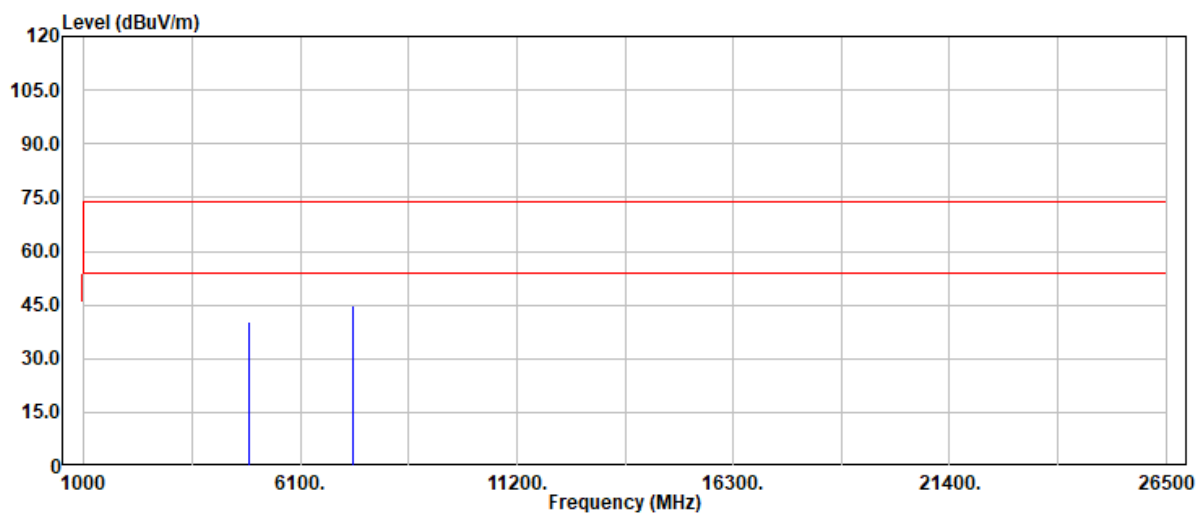


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	37.17	2.99	40.16	74.00	-33.84	Peak
4904.00	27.76	2.99	30.75	54.00	-23.25	Average
7356.00	35.41	9.42	44.83	74.00	-29.17	Peak
7356.00	26.64	9.42	36.06	54.00	-17.94	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 141 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

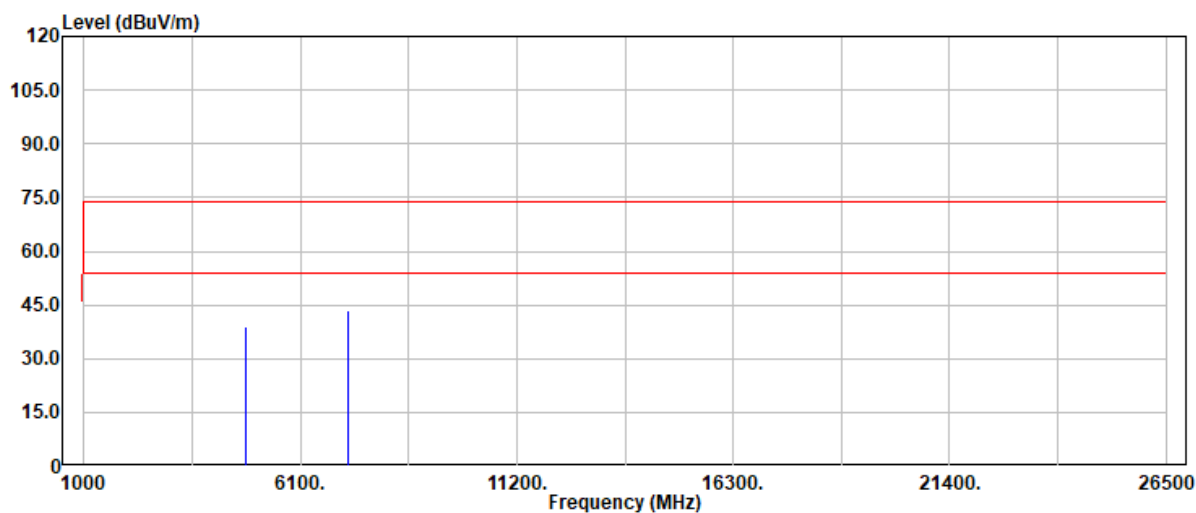


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	36.90	2.07	38.97	74.00	-35.03	Peak
4824.00	28.02	2.07	30.09	54.00	-23.91	Average
7236.00	34.51	8.98	43.49	74.00	-30.51	Peak
7236.00	26.54	8.98	35.52	54.00	-18.48	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 142 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

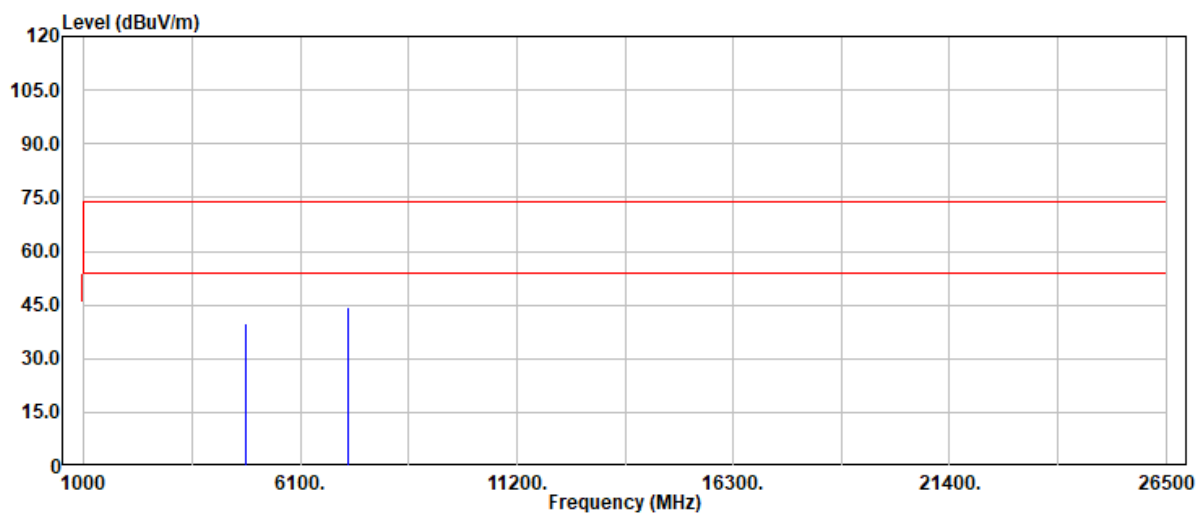


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	37.73	2.07	39.80	74.00	-34.20	Peak
4824.00	28.16	2.07	30.23	54.00	-23.77	Average
7236.00	35.35	8.98	44.33	74.00	-29.67	Peak
7236.00	26.68	8.98	35.66	54.00	-18.34	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 143 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

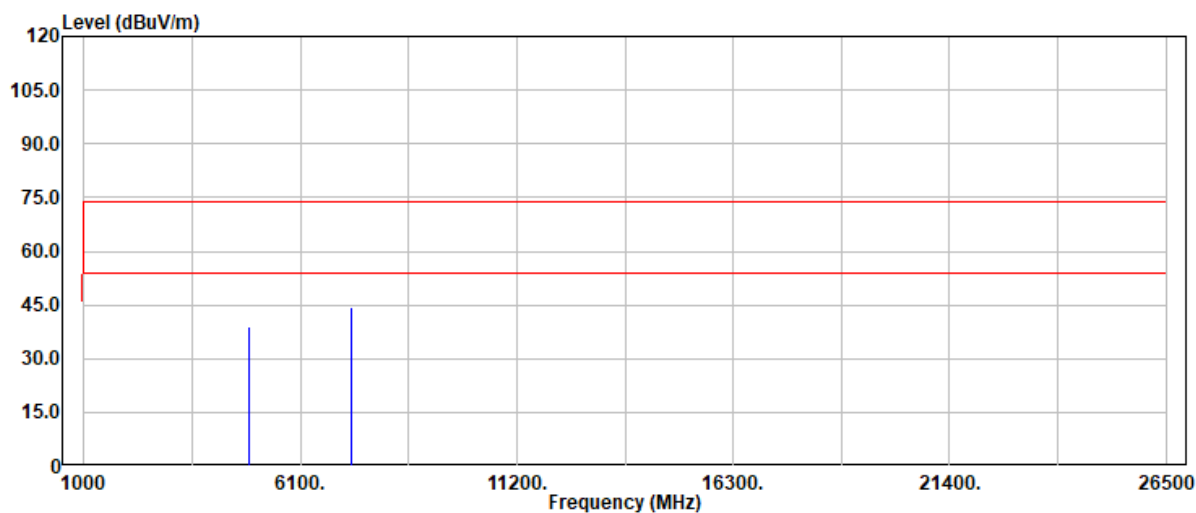


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.25	2.54	38.79	74.00	-35.21	Peak
4874.00	28.16	2.54	30.70	54.00	-23.30	Average
7311.00	35.26	9.17	44.43	74.00	-29.57	Peak
7311.00	26.76	9.17	35.93	54.00	-18.07	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 144 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

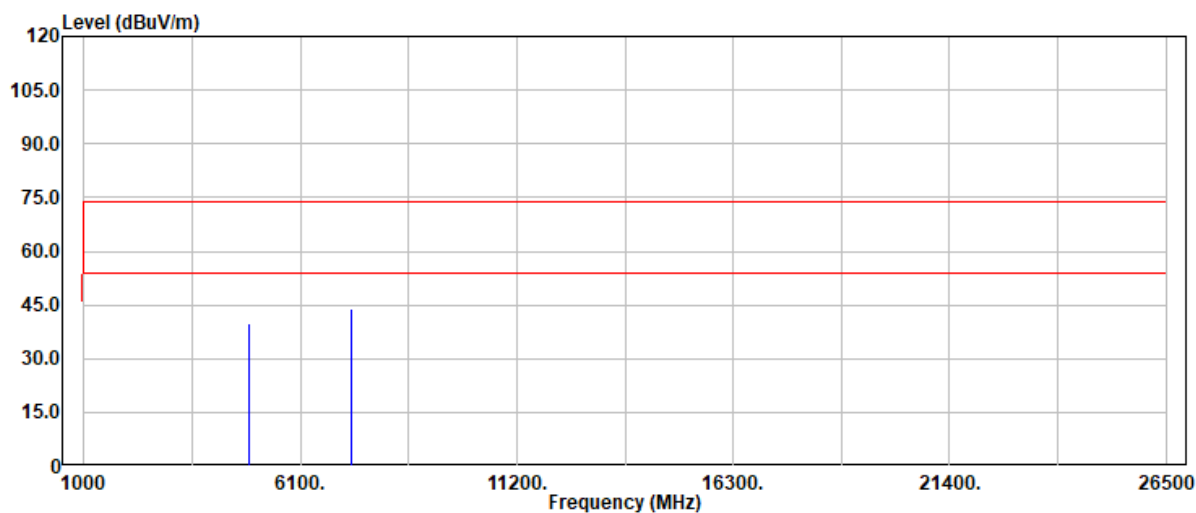


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	37.47	2.54	40.01	74.00	-33.99	Peak
4874.00	27.84	2.54	30.38	54.00	-23.62	Average
7311.00	34.92	9.17	44.09	74.00	-29.91	Peak
7311.00	26.63	9.17	35.80	54.00	-18.20	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 145 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

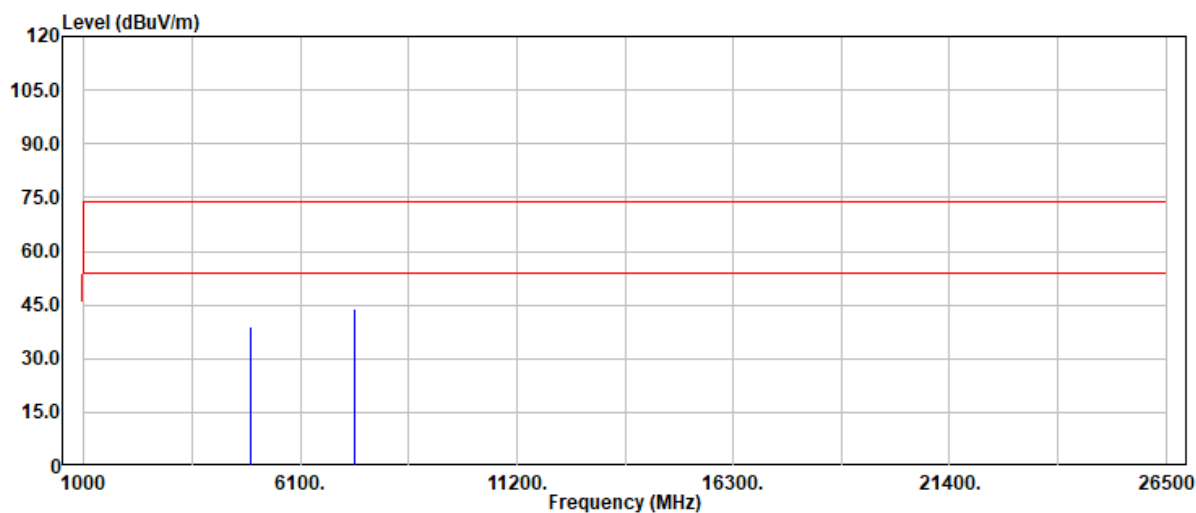


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.90	3.27	39.17	74.00	-34.83	Peak
4924.00	27.80	3.27	31.07	54.00	-22.93	Average
7386.00	34.27	9.46	43.73	74.00	-30.27	Peak
7386.00	26.15	9.46	35.61	54.00	-18.39	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 146 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

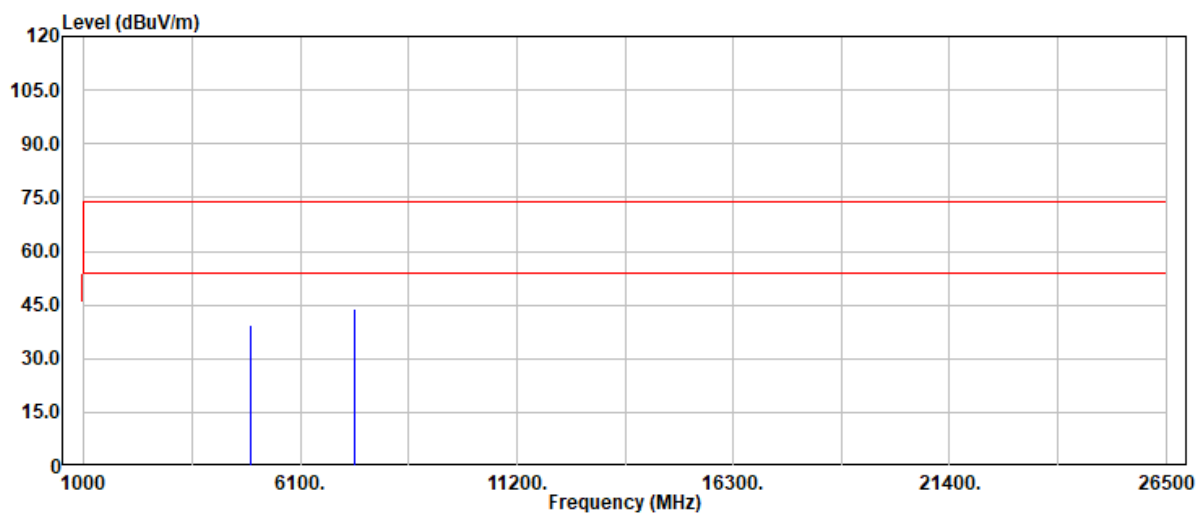


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	36.24	3.27	39.51	74.00	-34.49	Peak
4924.00	28.02	3.27	31.29	54.00	-22.71	Average
7386.00	34.40	9.46	43.86	74.00	-30.14	Peak
7386.00	26.42	9.46	35.88	54.00	-18.12	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 147 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

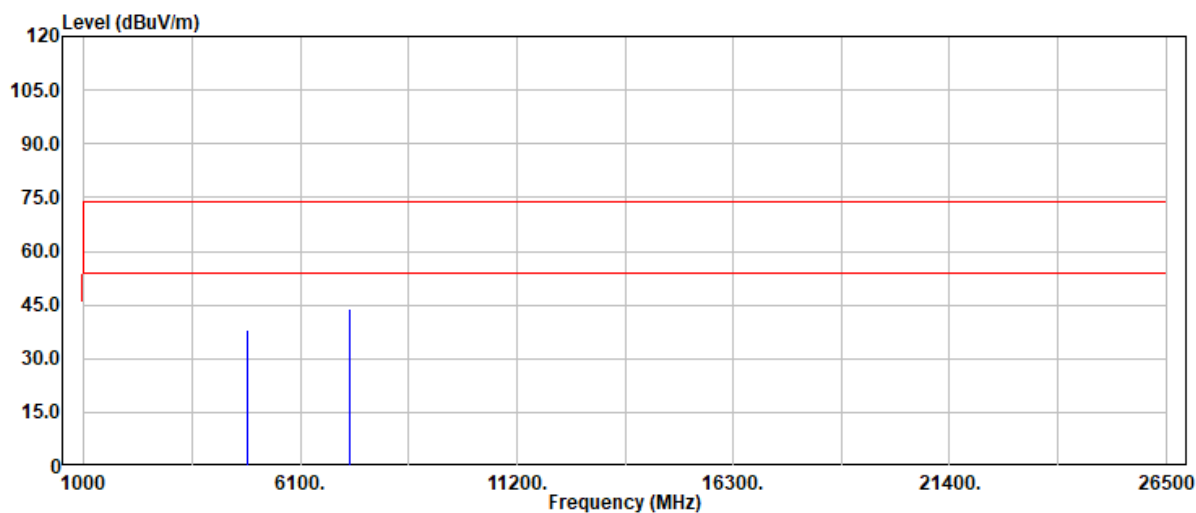


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	35.72	2.16	37.88	74.00	-36.12	Peak
4844.00	28.54	2.16	30.70	54.00	-23.30	Average
7266.00	34.73	9.08	43.81	74.00	-30.19	Peak
7266.00	26.44	9.08	35.52	54.00	-18.48	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 148 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

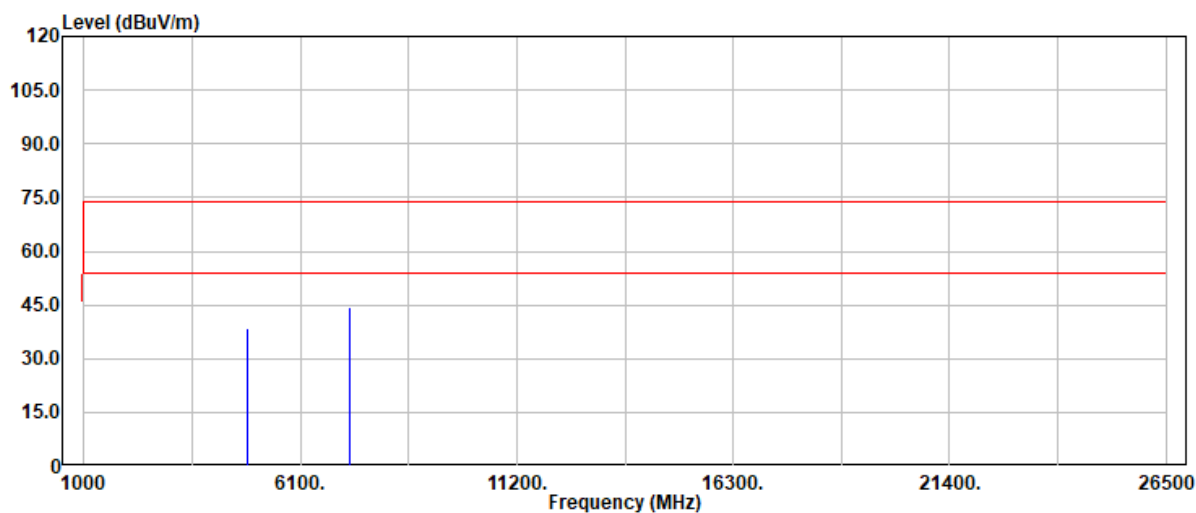


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	36.21	2.16	38.37	74.00	-35.63	Peak
4844.00	27.27	2.16	29.43	54.00	-24.57	Average
7266.00	35.14	9.08	44.22	74.00	-29.78	Peak
7266.00	26.62	9.08	35.70	54.00	-18.30	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 149 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

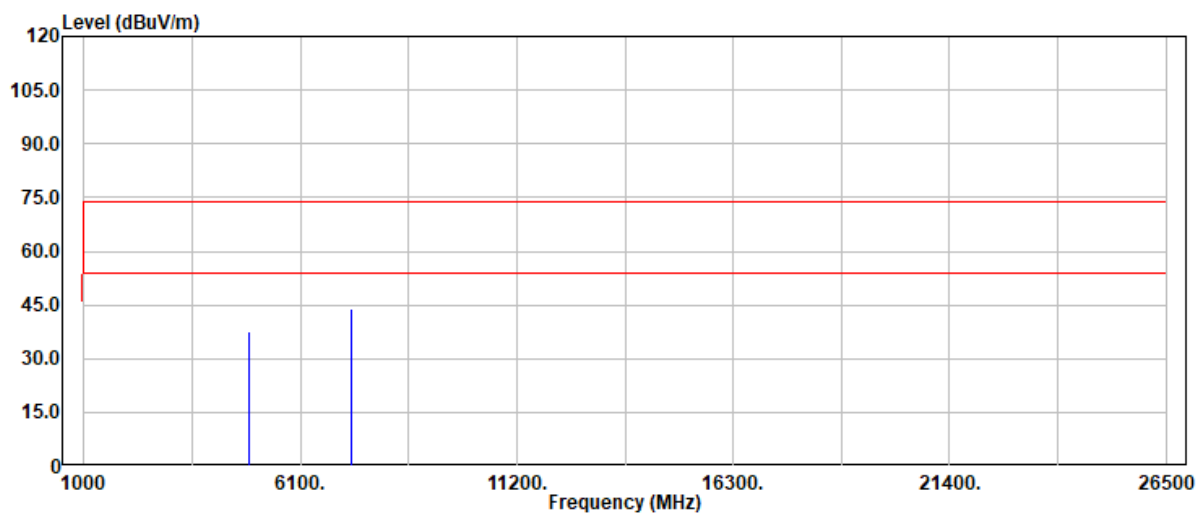


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.21	2.54	37.75	74.00	-36.25	Peak
4874.00	27.87	2.54	30.41	54.00	-23.59	Average
7311.00	34.82	9.17	43.99	74.00	-30.01	Peak
7311.00	26.48	9.17	35.65	54.00	-18.35	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 150 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

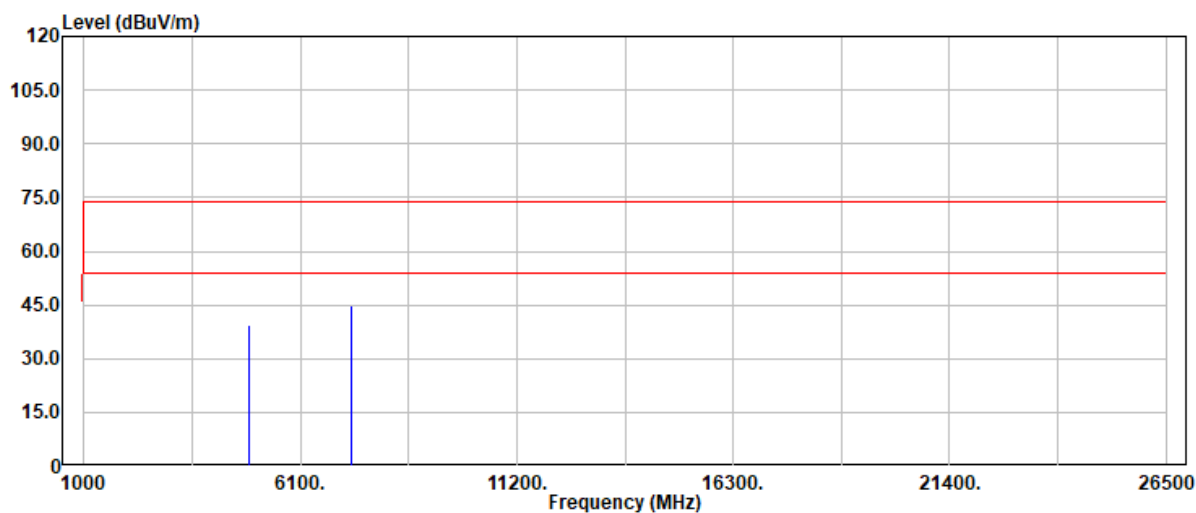


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.81	2.54	39.35	74.00	-34.65	Peak
4874.00	27.96	2.54	30.50	54.00	-23.50	Average
7311.00	35.76	9.17	44.93	74.00	-29.07	Peak
7311.00	26.56	9.17	35.73	54.00	-18.27	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 151 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

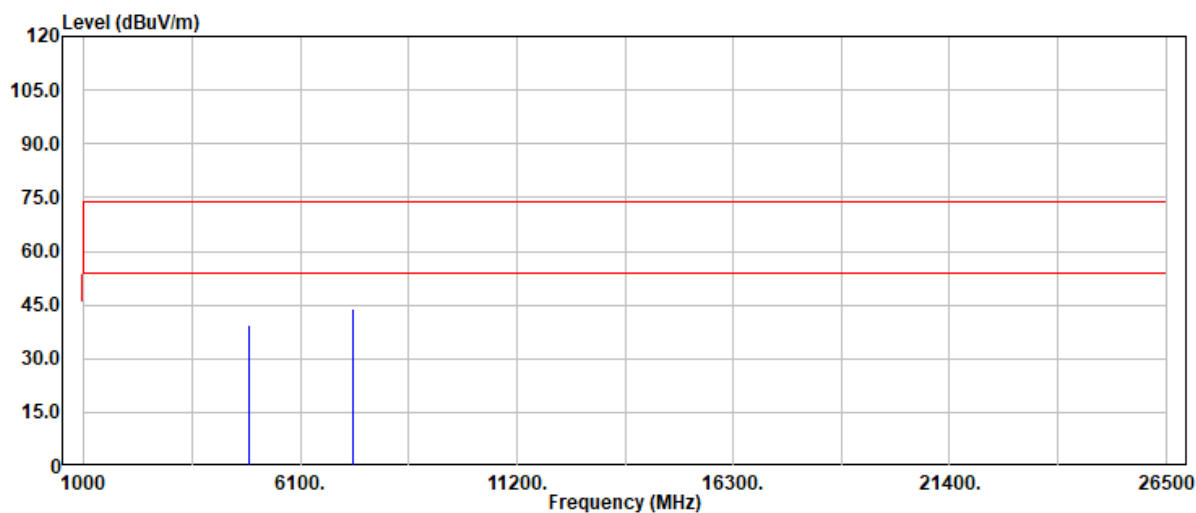


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	36.39	2.99	39.38	74.00	-34.62	Peak
4904.00	27.78	2.99	30.77	54.00	-23.23	Average
7356.00	34.64	9.42	44.06	74.00	-29.94	Peak
7356.00	26.65	9.42	36.07	54.00	-17.93	Average

Project No: TM-2412000476P
Report No.: TMWK2412004833KR

Page: 152 / 152
Rev.: 01

Project No : TM-2412000476P
Operation Band : 802.11ax40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

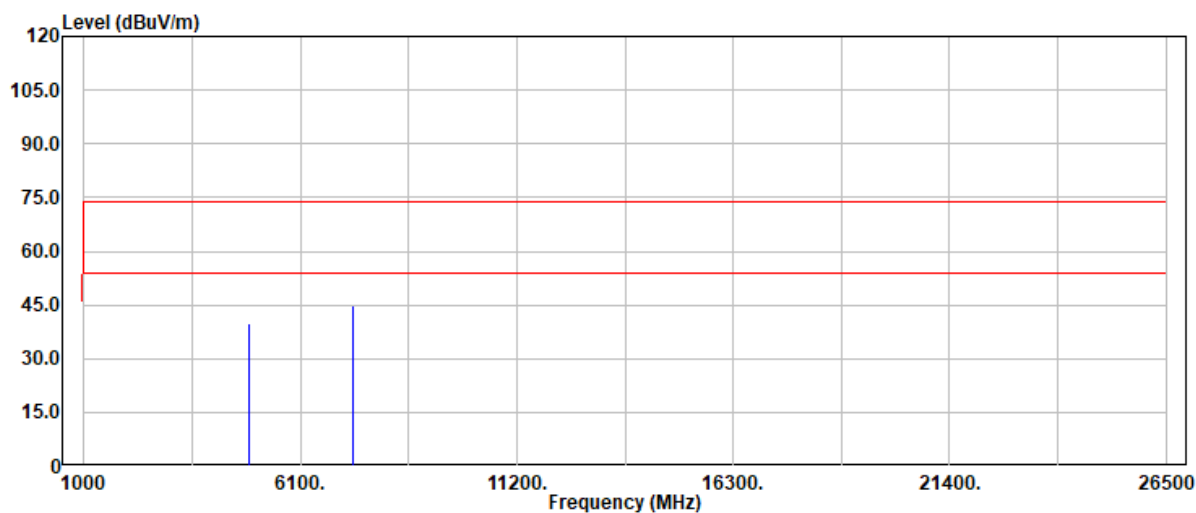

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	36.96	2.99	39.95	74.00	-34.05	Peak
4904.00	27.81	2.99	30.80	54.00	-23.20	Average
7356.00	35.19	9.42	44.61	74.00	-29.39	Peak
7356.00	26.93	9.42	36.35	54.00	-17.65	Average

- End of Test Report -