




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 125 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax40\_Band4  
Frequency : 5755 MHz  
Operation Mode : Bandedge  
EUT Pol : H  
Setting : 24

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

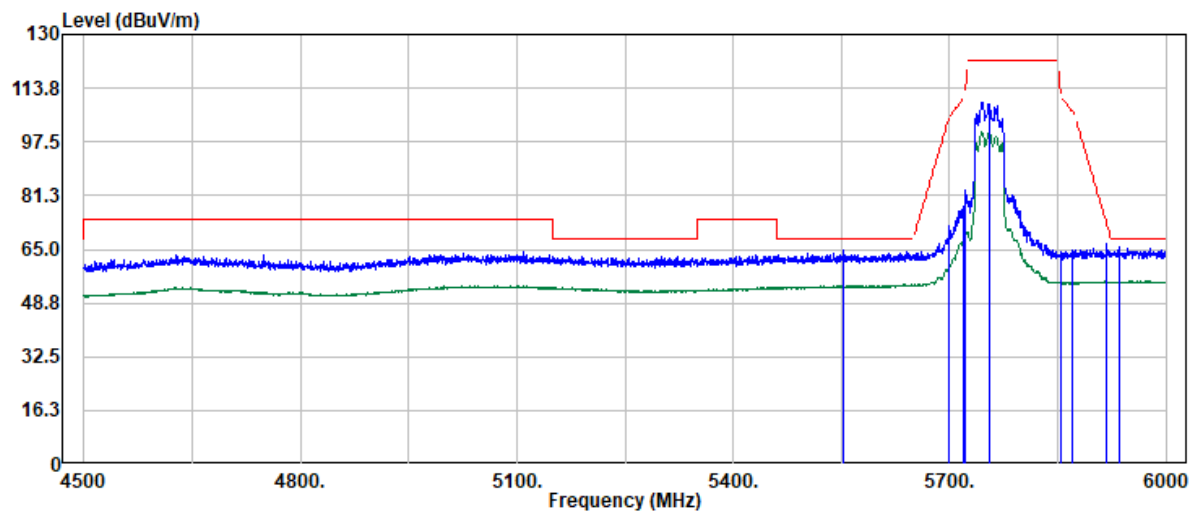


| Trace: 1 |       |        |        |        |        |          |
|----------|-------|--------|--------|--------|--------|----------|
| Freq     | Read  |        | Actual | Limit  |        | Detector |
| -----    | Level | Factor | FS     | @3m    | Margin | Mode     |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 5553.65  | 49.98 | 14.70  | 64.68  | 68.20  | -3.52  | Peak     |
| 5699.10  | 56.54 | 15.47  | 72.01  | 104.54 | -32.53 | Peak     |
| 5718.59  | 62.51 | 15.53  | 78.04  | 110.41 | -32.37 | Peak     |
| 5722.59  | 67.14 | 15.55  | 82.69  | 116.71 | -34.02 | Peak     |
| 5755.00  | 93.72 | 15.62  | 109.34 | --     | --     | Peak     |
| 5755.00  | 84.74 | 15.62  | 100.36 | --     | --     | Average  |
| 5854.55  | 48.81 | 15.39  | 64.20  | 111.83 | -47.63 | Peak     |
| 5869.54  | 49.18 | 15.38  | 64.56  | 106.73 | -42.17 | Peak     |
| 5918.53  | 51.15 | 15.38  | 66.53  | 72.97  | -6.44  | Peak     |
| 5934.52  | 50.54 | 15.43  | 65.97  | 68.20  | -2.23  | Peak     |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 126 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5795 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : Bandedge         | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 23               |              |              |

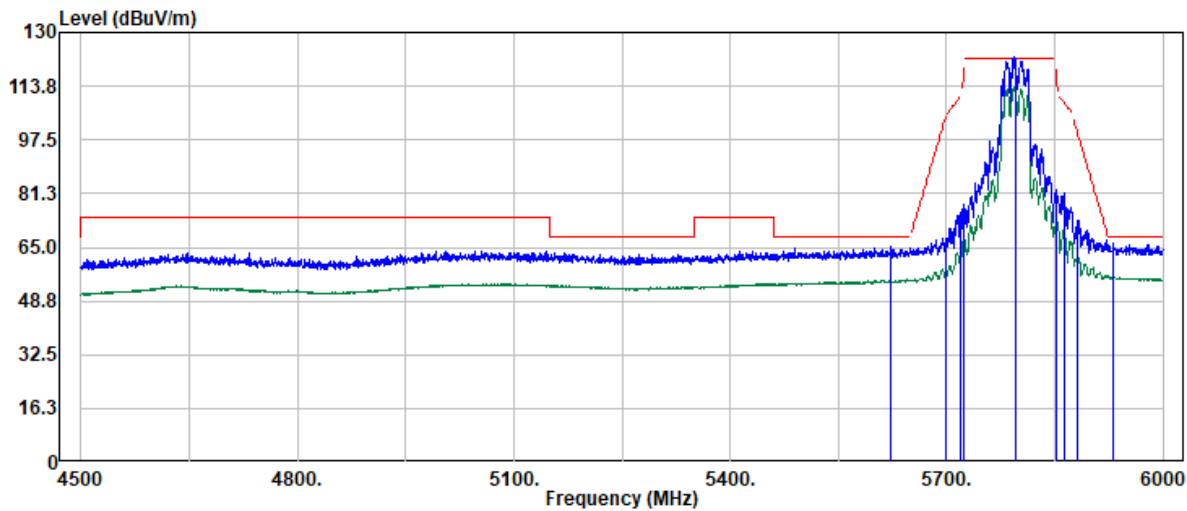


| Trace: 1 |        |        |        |        |        |          |
|----------|--------|--------|--------|--------|--------|----------|
| Freq     | Read   |        | Actual | Limit  |        | Detector |
| -----    | Level  | Factor | FS     | @3m    | Margin | Mode     |
| MHz      | dBuV   | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 5622.63  | 50.13  | 15.08  | 65.21  | 68.20  | -2.99  | Peak     |
| 5699.10  | 52.32  | 15.47  | 67.79  | 104.54 | -36.75 | Peak     |
| 5718.59  | 60.23  | 15.53  | 75.76  | 110.41 | -34.65 | Peak     |
| 5724.59  | 62.27  | 15.56  | 77.83  | 121.27 | -43.44 | Peak     |
| 5795.00  | 106.90 | 15.52  | 122.42 | --     | --     | Peak     |
| 5795.00  | 97.98  | 15.52  | 113.50 | --     | --     | Average  |
| 5852.55  | 67.08  | 15.39  | 82.47  | 116.39 | -33.92 | Peak     |
| 5862.55  | 66.06  | 15.38  | 81.44  | 108.68 | -27.24 | Peak     |
| 5881.04  | 57.78  | 15.34  | 73.12  | 100.71 | -27.59 | Peak     |
| 5931.02  | 50.76  | 15.42  | 66.18  | 68.20  | -2.02  | Peak     |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 127 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5795 MHz         | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : Bandedge         | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 23               |              |              |

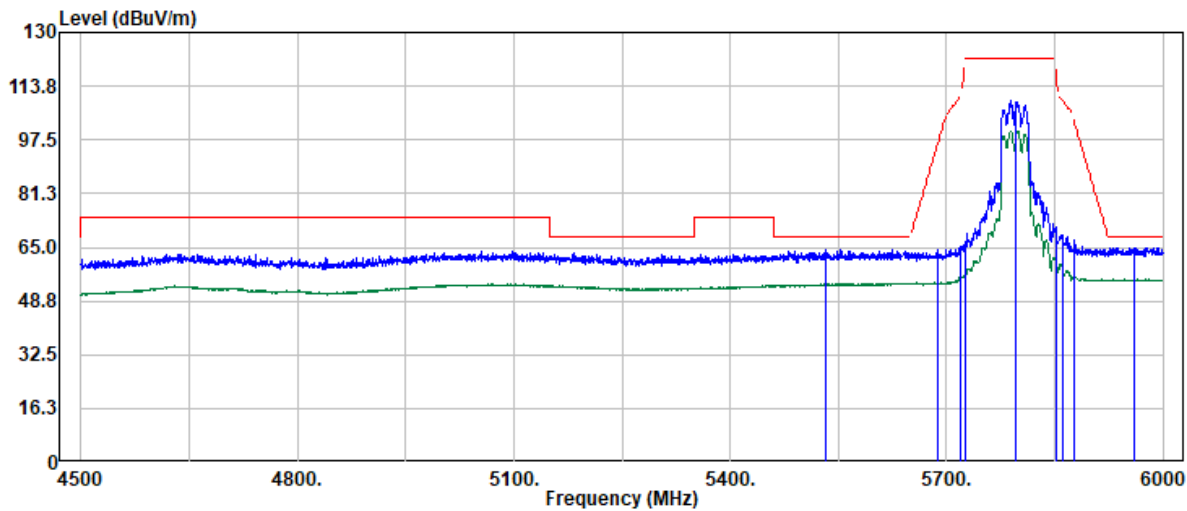

| Trace: 1 |       |        |        |        |        |          |
|----------|-------|--------|--------|--------|--------|----------|
| Freq     | Read  |        | Actual | Limit  |        | Detector |
| -----    | Level | Factor | FS     | @3m    | Margin | Mode     |
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 5533.16  | 49.87 | 14.58  | 64.45  | 68.20  | -3.75  | Peak     |
| 5688.60  | 48.65 | 15.44  | 64.09  | 96.80  | -32.71 | Peak     |
| 5719.59  | 49.60 | 15.54  | 65.14  | 110.69 | -45.55 | Peak     |
| 5725.00  | 50.43 | 15.56  | 65.99  | 122.20 | -56.21 | Peak     |
| 5795.00  | 94.10 | 15.52  | 109.62 | --     | --     | Peak     |
| 5795.00  | 84.79 | 15.52  | 100.31 | --     | --     | Average  |
| 5851.55  | 55.79 | 15.40  | 71.19  | 118.67 | -47.48 | Peak     |
| 5860.05  | 53.35 | 15.39  | 68.74  | 109.39 | -40.65 | Peak     |
| 5877.04  | 51.67 | 15.35  | 67.02  | 103.68 | -36.66 | Peak     |
| 5960.01  | 49.50 | 15.49  | 64.99  | 68.20  | -3.21  | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 128 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax80\_Band4  
Frequency : 5775 MHz  
Operation Mode : Bandedge  
EUT Pol : H  
Setting : 21

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

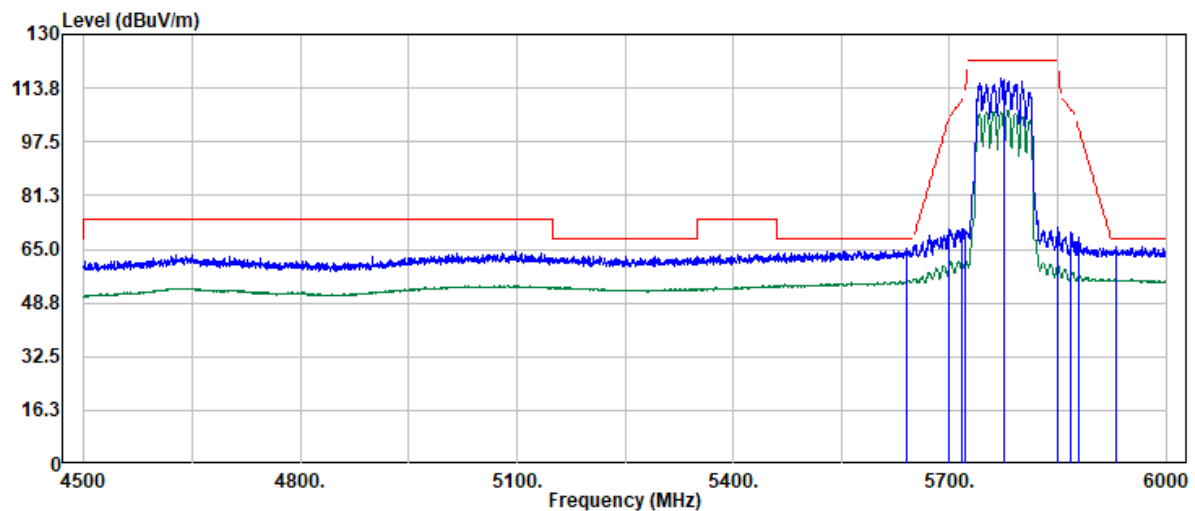

| Trace: 1 |        |        |        |        |        |          |
|----------|--------|--------|--------|--------|--------|----------|
| Freq     | Read   |        | Actual | Limit  |        | Detector |
| -----    | Level  | Factor | FS     | @3m    | Margin | Mode     |
| MHz      | dBuV   | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 5641.62  | 49.84  | 15.27  | 65.11  | 68.20  | -3.09  | Peak     |
| 5699.10  | 55.82  | 15.47  | 71.29  | 104.54 | -33.25 | Peak     |
| 5718.09  | 55.57  | 15.53  | 71.10  | 110.27 | -39.17 | Peak     |
| 5721.59  | 54.91  | 15.54  | 70.45  | 114.43 | -43.98 | Peak     |
| 5775.00  | 101.16 | 15.57  | 116.73 | --     | --     | Peak     |
| 5775.00  | 91.23  | 15.57  | 106.80 | --     | --     | Average  |
| 5850.05  | 55.96  | 15.40  | 71.36  | 122.09 | -50.73 | Peak     |
| 5869.04  | 55.01  | 15.38  | 70.39  | 106.87 | -36.48 | Peak     |
| 5879.54  | 53.25  | 15.34  | 68.59  | 101.83 | -33.24 | Peak     |
| 5931.52  | 50.11  | 15.42  | 65.53  | 68.20  | -2.67  | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 129 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax80\_Band4  
Frequency : 5775 MHz  
Operation Mode : Bandedge  
EUT Pol : H  
Setting : 21

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

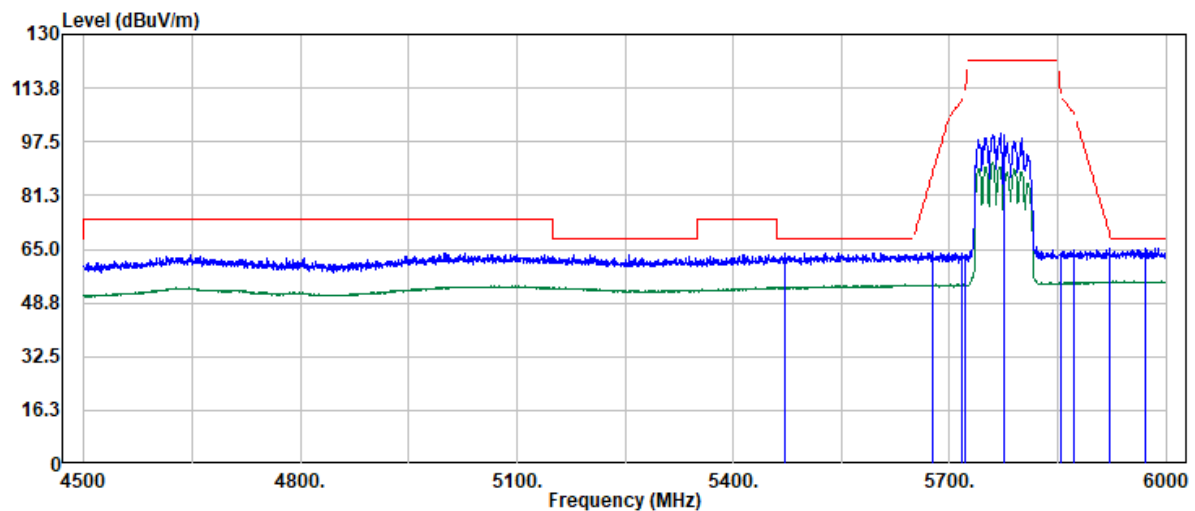

| Trace: 1 |       |        |        |        |        |          |
|----------|-------|--------|--------|--------|--------|----------|
| Freq     | Read  |        | Actual | Limit  |        | Detector |
| -----    | Level | Factor | FS     | @3m    | Margin | Mode     |
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 5470.68  | 49.63 | 14.37  | 64.00  | 68.20  | -4.20  | Peak     |
| 5677.11  | 48.74 | 15.42  | 64.16  | 88.30  | -24.14 | Peak     |
| 5718.09  | 48.08 | 15.53  | 63.61  | 110.27 | -46.66 | Peak     |
| 5721.59  | 47.91 | 15.54  | 63.45  | 114.43 | -50.98 | Peak     |
| 5775.00  | 84.35 | 15.57  | 99.92  | --     | --     | Peak     |
| 5775.00  | 75.52 | 15.57  | 91.09  | --     | --     | Average  |
| 5853.55  | 48.52 | 15.39  | 63.91  | 114.11 | -50.20 | Peak     |
| 5873.04  | 49.51 | 15.37  | 64.88  | 105.75 | -40.87 | Peak     |
| 5922.53  | 49.66 | 15.39  | 65.05  | 70.02  | -4.97  | Peak     |
| 5972.51  | 49.93 | 15.50  | 65.43  | 68.20  | -2.77  | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 130 / 193  
Rev.: 02

## TX Test Data

Project No : TM-2412000476P  
Operation Band : 802.11n40\_Band1  
Frequency : 5190 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting :

Test Date : 2025-02-08  
Temp./Humi. : 24.3/57  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

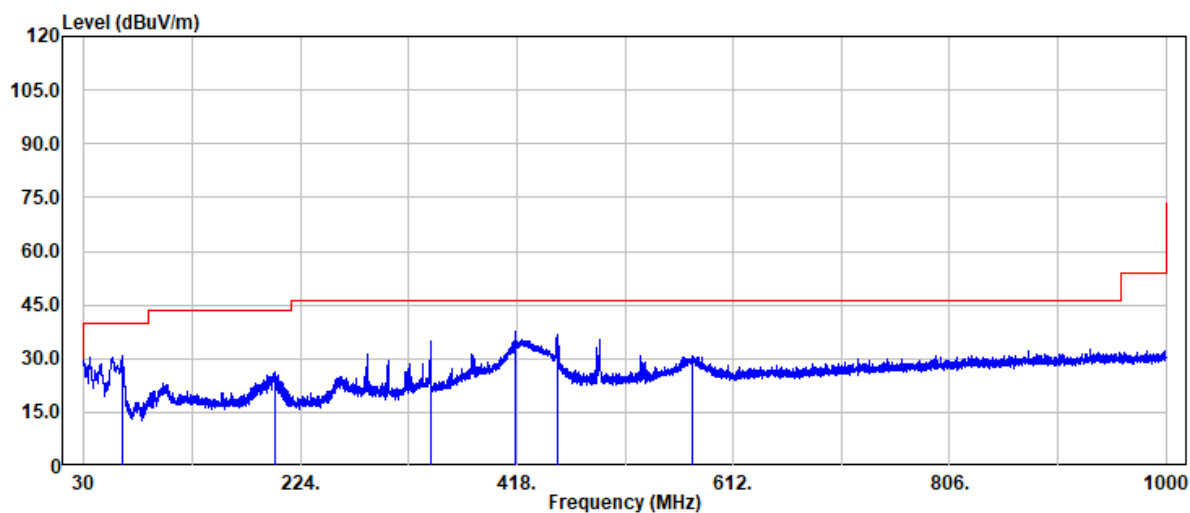

| Freq   | Read  |        | Actual | Limit  |        | Detector |
|--------|-------|--------|--------|--------|--------|----------|
| -----  | Level | Factor | FS     | @3m    | Margin | Mode     |
| -----  | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz    | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 63.95  | 46.50 | -15.90 | 30.60  | 40.00  | -9.40  | Peak     |
| 201.33 | 37.10 | -10.82 | 26.28  | 43.50  | -17.22 | Peak     |
| 340.64 | 43.41 | -8.65  | 34.76  | 46.00  | -11.24 | Peak     |
| 417.15 | 43.63 | -6.23  | 37.40  | 46.00  | -8.60  | Peak     |
| 454.01 | 42.06 | -5.31  | 36.75  | 46.00  | -9.25  | Peak     |
| 575.02 | 33.90 | -3.19  | 30.71  | 46.00  | -15.29 | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 131 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11n40\_Band1  
Frequency : 5190 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting :

Test Date : 2025-02-08  
Temp./Humi. : 24.3/57  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

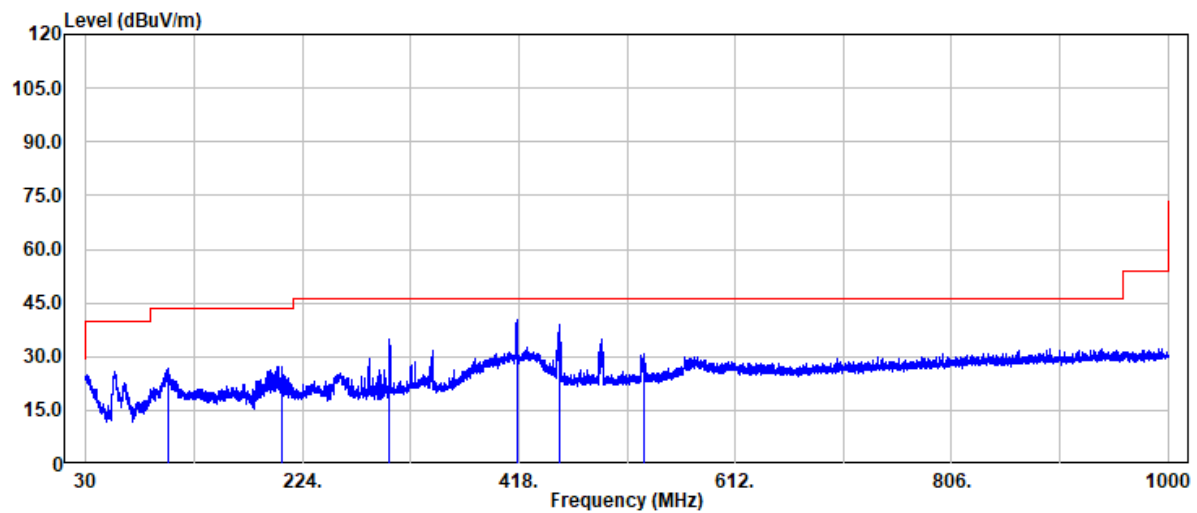

| Freq   | Read  |        | Actual | Limit  |        | Detector |
|--------|-------|--------|--------|--------|--------|----------|
| -----  | Level | Factor | FS     | @3m    | Margin | Mode     |
| -----  | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz    | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 103.11 | 39.23 | -12.61 | 26.62  | 43.50  | -16.88 | Peak     |
| 205.57 | 39.75 | -12.49 | 27.26  | 43.50  | -16.24 | Peak     |
| 301.84 | 44.06 | -9.29  | 34.77  | 46.00  | -11.23 | Peak     |
| 416.30 | 46.38 | -6.25  | 40.13  | 46.00  | -5.87  | Peak     |
| 454.86 | 44.02 | -5.30  | 38.72  | 46.00  | -7.28  | Peak     |
| 530.04 | 34.80 | -3.89  | 30.91  | 46.00  | -15.09 | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 132 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11a\_Band1\_CH0  
Frequency : 5180 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 21

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

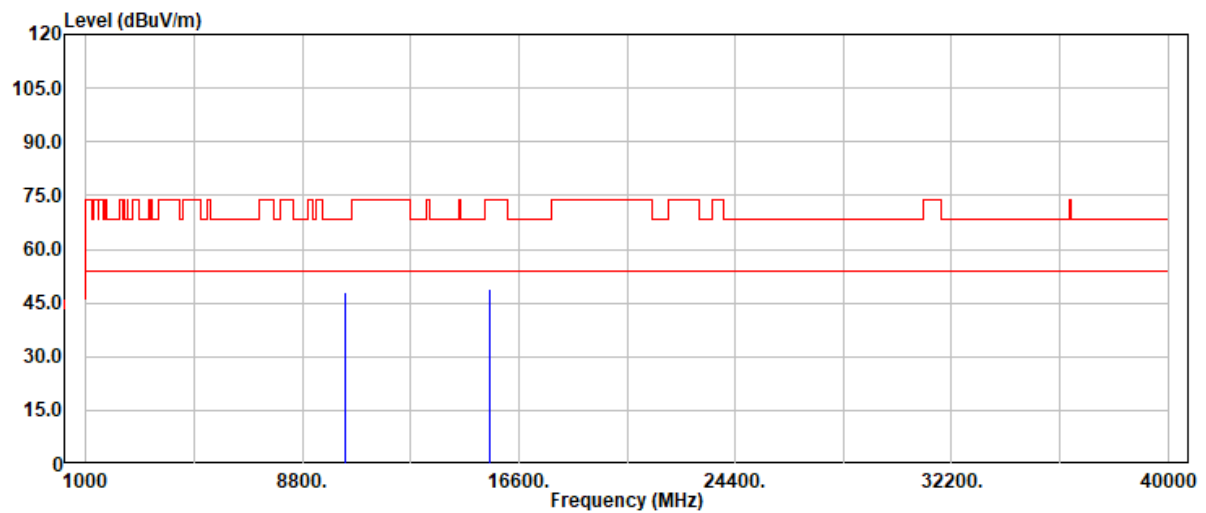

| Freq     | Read  | Factor | Actual | Limit  | Margin | Detector |
|----------|-------|--------|--------|--------|--------|----------|
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 10360.00 | 34.67 | 13.12  | 47.79  | 68.20  | -20.41 | Peak     |
| 15540.00 | 32.95 | 15.77  | 48.72  | 74.00  | -25.28 | Peak     |
| 15540.00 | 24.19 | 15.77  | 39.96  | 54.00  | -14.04 | Average  |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 133 / 193  
Rev.: 02

|                |                     |              |              |
|----------------|---------------------|--------------|--------------|
| Project No     | : TM-2412000476P    | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11a_Band1_CH0 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5180 MHz          | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX                | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                 | Test Chamber | : 966A       |
| Setting        | : 21                |              |              |

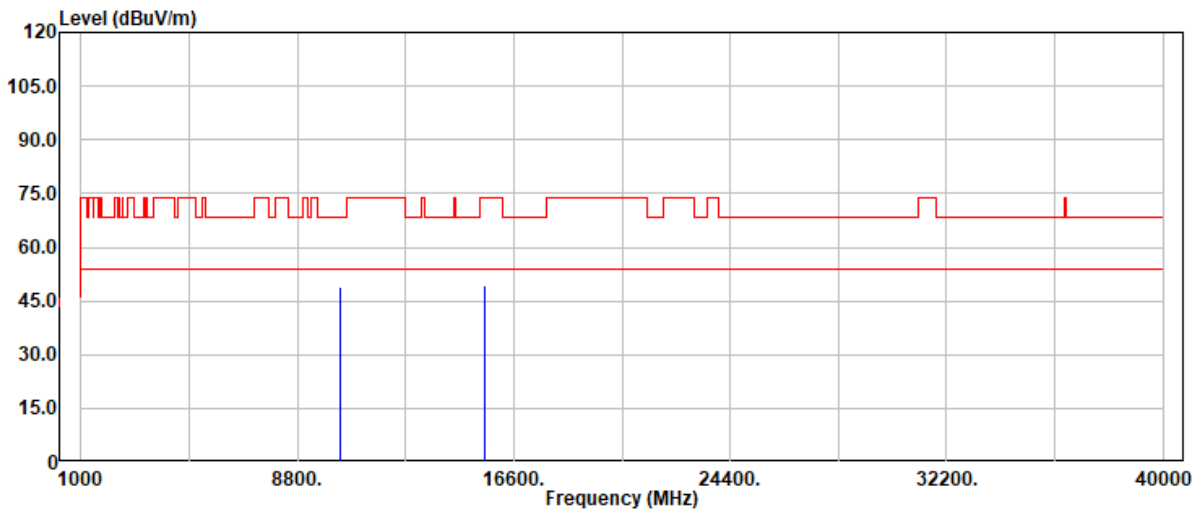

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10360.00 | 35.79      | 13.12  | 48.91     | 68.20     | -19.29 | Peak          |
| 15540.00 | 33.41      | 15.77  | 49.18     | 74.00     | -24.82 | Peak          |
| 15540.00 | 23.81      | 15.77  | 39.58     | 54.00     | -14.42 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 134 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11a\_Band1\_CH0  
Frequency : 5220 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 28

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

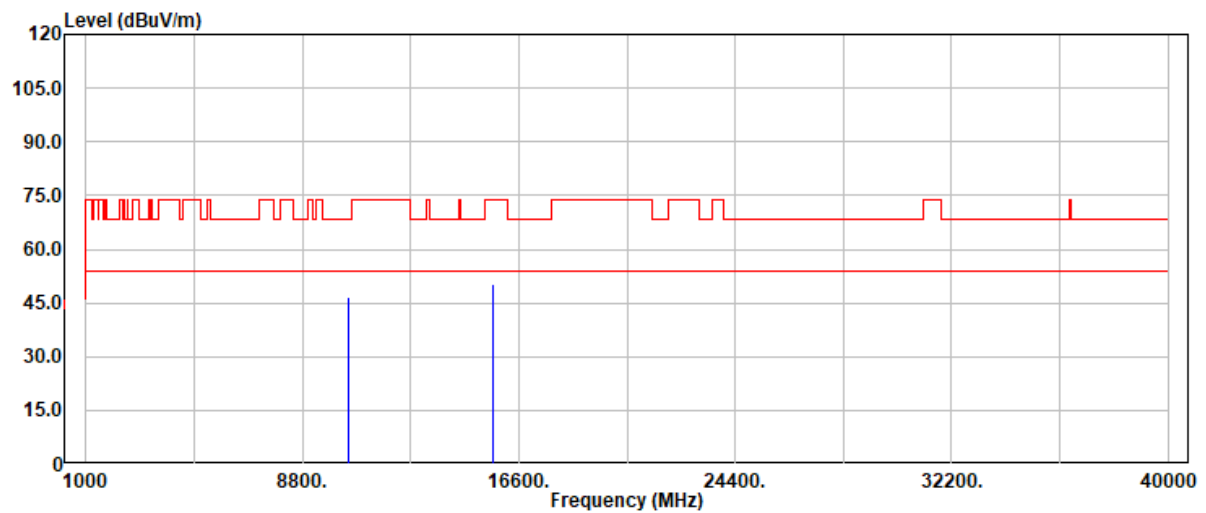


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10440.00 | 33.77      | 12.96  | 46.73     | 68.20     | -21.47 | Peak          |
| 15660.00 | 34.43      | 15.74  | 50.17     | 74.00     | -23.83 | Peak          |
| 15660.00 | 24.91      | 15.74  | 40.65     | 54.00     | -13.35 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 135 / 193  
Rev.: 02

|                |                     |              |              |
|----------------|---------------------|--------------|--------------|
| Project No     | : TM-2412000476P    | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11a_Band1_CH0 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5220 MHz          | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX                | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                 | Test Chamber | : 966A       |
| Setting        | : 28                |              |              |

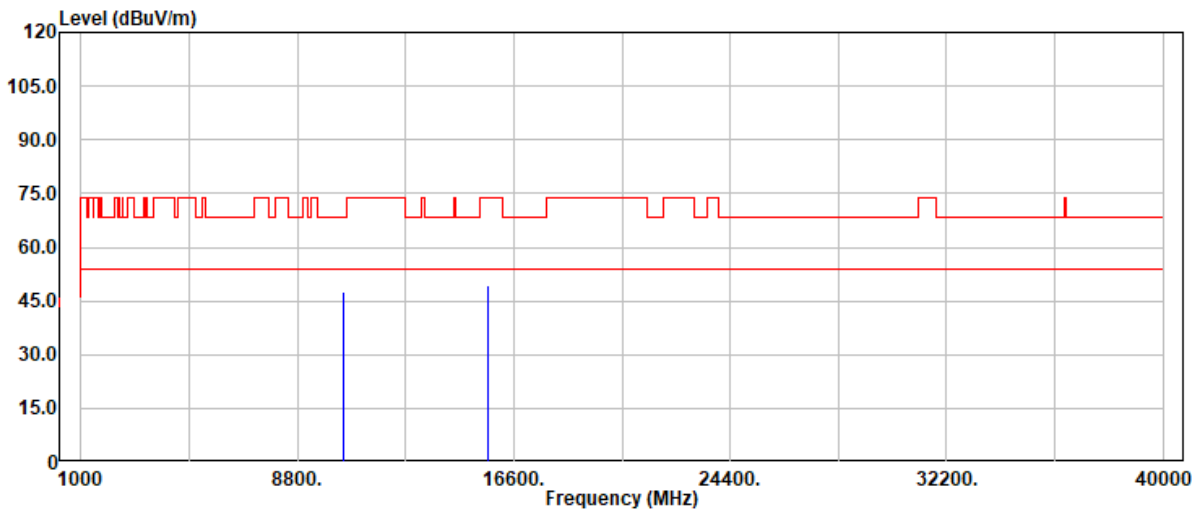

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10440.00 | 34.52      | 12.96  | 47.48     | 68.20     | -20.72 | Peak          |
| 15660.00 | 33.60      | 15.74  | 49.34     | 74.00     | -24.66 | Peak          |
| 15660.00 | 24.81      | 15.74  | 40.55     | 54.00     | -13.45 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 136 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11a\_Band1\_CH0  
Frequency : 5240 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 21

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

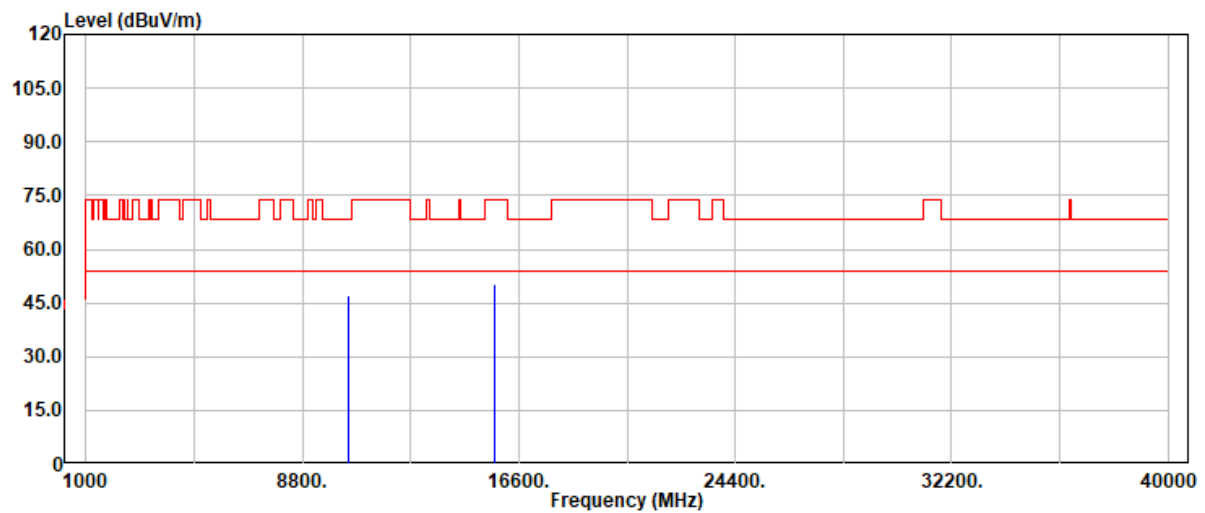


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10480.00 | 34.27      | 12.92  | 47.19     | 68.20     | -21.01 | Peak          |
| 15720.00 | 34.02      | 16.27  | 50.29     | 74.00     | -23.71 | Peak          |
| 15720.00 | 25.42      | 16.27  | 41.69     | 54.00     | -12.31 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 137 / 193  
Rev.: 02

|                |                     |              |              |
|----------------|---------------------|--------------|--------------|
| Project No     | : TM-2412000476P    | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11a_Band1_CH0 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5240 MHz          | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX                | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                 | Test Chamber | : 966A       |
| Setting        | : 21                |              |              |

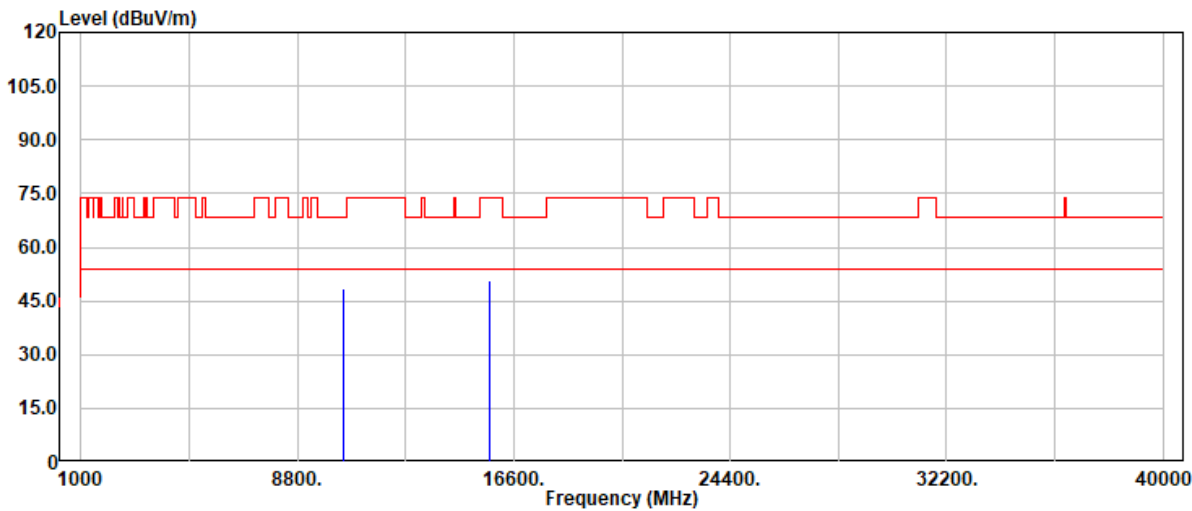


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10480.00 | 35.63      | 12.92  | 48.55     | 68.20     | -19.65 | Peak          |
| 15720.00 | 34.28      | 16.27  | 50.55     | 74.00     | -23.45 | Peak          |
| 15720.00 | 25.27      | 16.27  | 41.54     | 54.00     | -12.46 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 138 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5180 MHz        | Antenna Pol. | : Vertical   |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 19              |              |              |

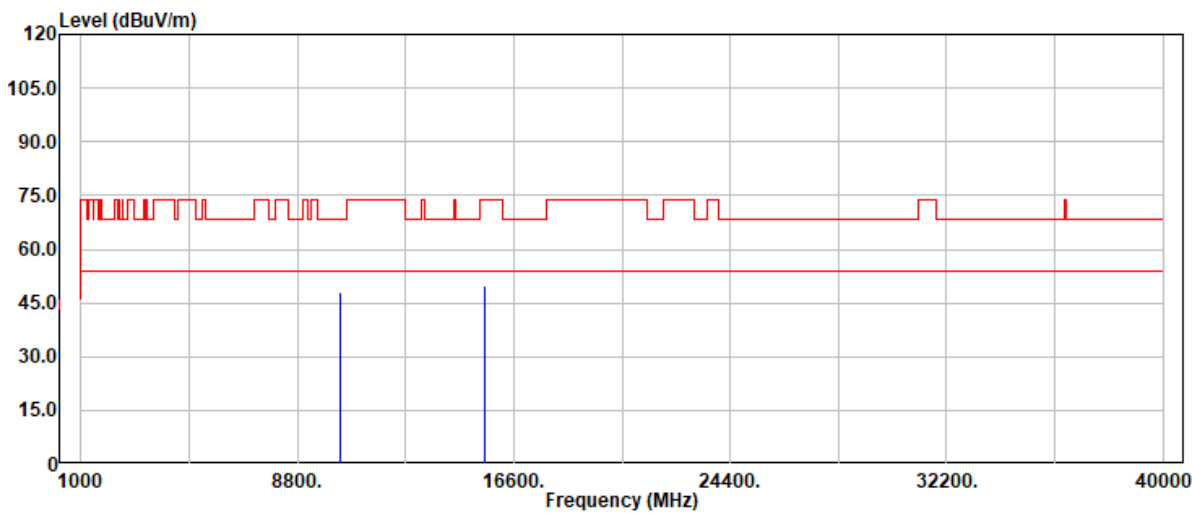

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10360.00 | 35.07      | 13.12  | 48.19     | 68.20     | -20.01 | Peak          |
| 15540.00 | 33.99      | 15.77  | 49.76     | 74.00     | -24.24 | Peak          |
| 15540.00 | 27.21      | 15.77  | 42.98     | 54.00     | -11.02 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 139 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11n20\_Band1  
Frequency : 5180 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 19

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : Horizontal  
Engineer : Tony.Chao  
Test Chamber : 966A

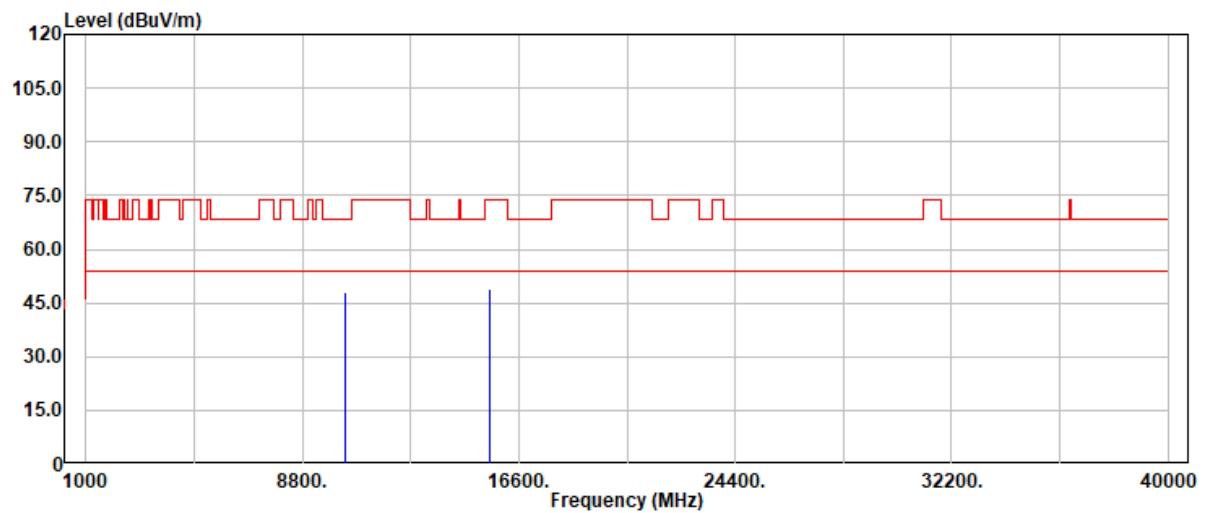

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10360.00 | 34.67      | 13.12  | 47.79     | 68.20     | -20.41 | Peak          |
| 15540.00 | 33.22      | 15.77  | 48.99     | 74.00     | -25.01 | Peak          |
| 15540.00 | 27.27      | 15.77  | 43.04     | 54.00     | -10.96 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 140 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11n20\_Band1  
Frequency : 5220 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 24

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : Vertical  
Engineer : Tony.Chao  
Test Chamber : 966A

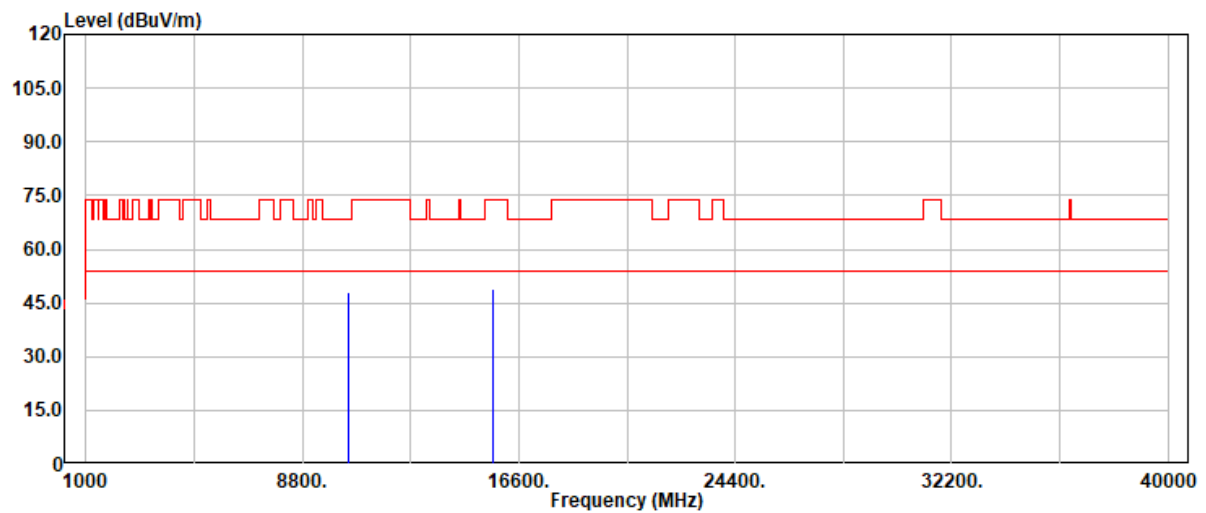

| Freq     | Read  | Factor | Actual | Limit  | Margin | Detector |
|----------|-------|--------|--------|--------|--------|----------|
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 10440.00 | 35.05 | 12.96  | 48.01  | 68.20  | -20.19 | Peak     |
| 15660.00 | 33.33 | 15.74  | 49.07  | 74.00  | -24.93 | Peak     |
| 15660.00 | 27.74 | 15.74  | 43.48  | 54.00  | -10.52 | Average  |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 141 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5220 MHz        | Antenna Pol. | : Horizontal |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 24              |              |              |

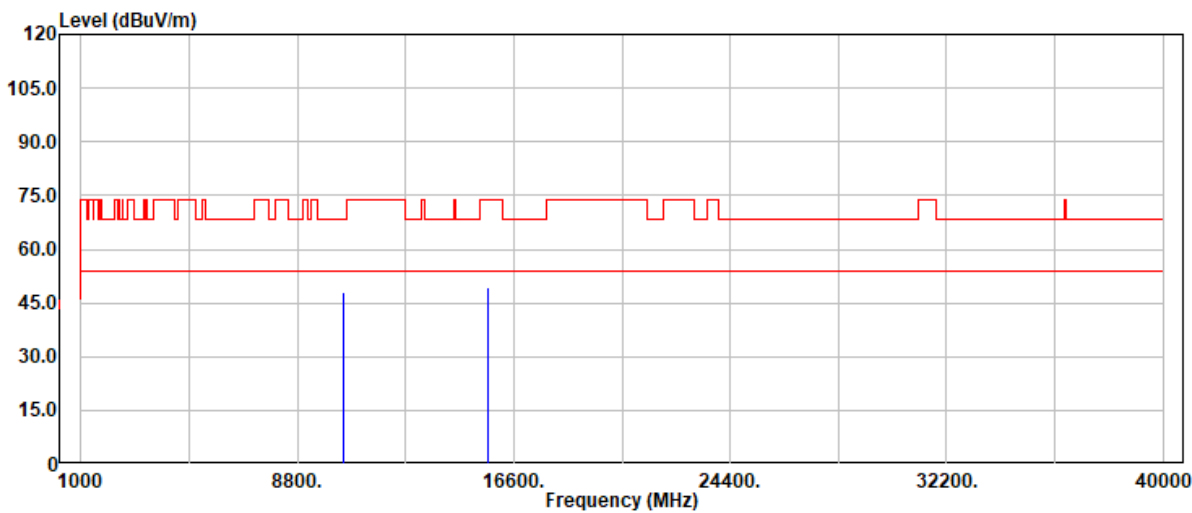


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10440.00 | 34.95      | 12.96  | 47.91     | 68.20     | -20.29 | Peak          |
| 15660.00 | 33.47      | 15.74  | 49.21     | 74.00     | -24.79 | Peak          |
| 15660.00 | 27.86      | 15.74  | 43.60     | 54.00     | -10.40 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 142 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5240 MHz        | Antenna Pol. | : Vertical   |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 19              |              |              |

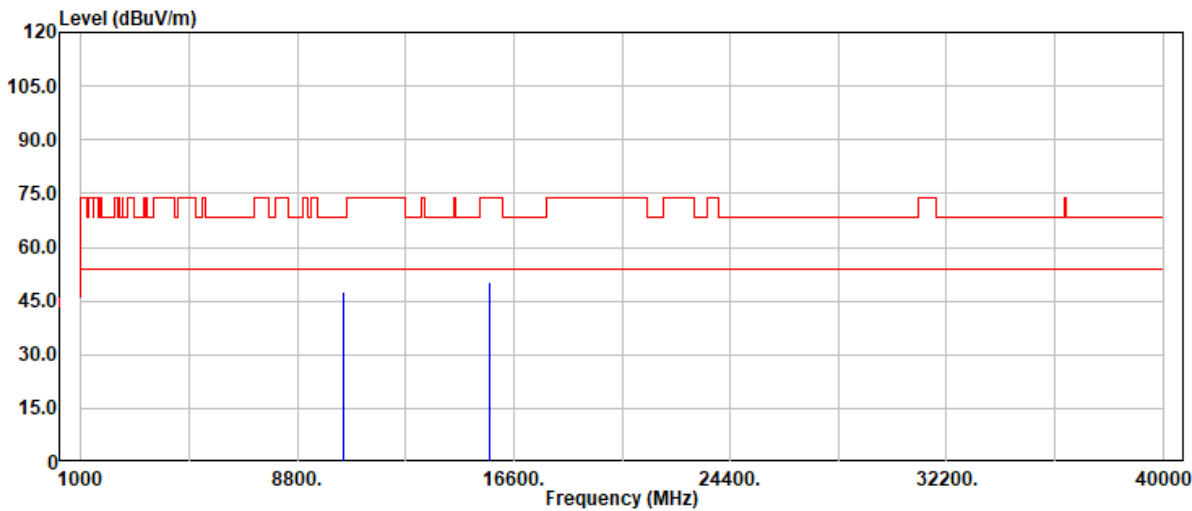


| Freq     | Read  | Factor | Actual | Limit  | Margin | Detector |
|----------|-------|--------|--------|--------|--------|----------|
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 10480.00 | 34.62 | 12.92  | 47.54  | 68.20  | -20.66 | Peak     |
| 15720.00 | 34.04 | 16.27  | 50.31  | 74.00  | -23.69 | Peak     |
| 15720.00 | 27.86 | 16.27  | 44.13  | 54.00  | -9.87  | Average  |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 143 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5240 MHz        | Antenna Pol. | : Horizontal |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 19              |              |              |

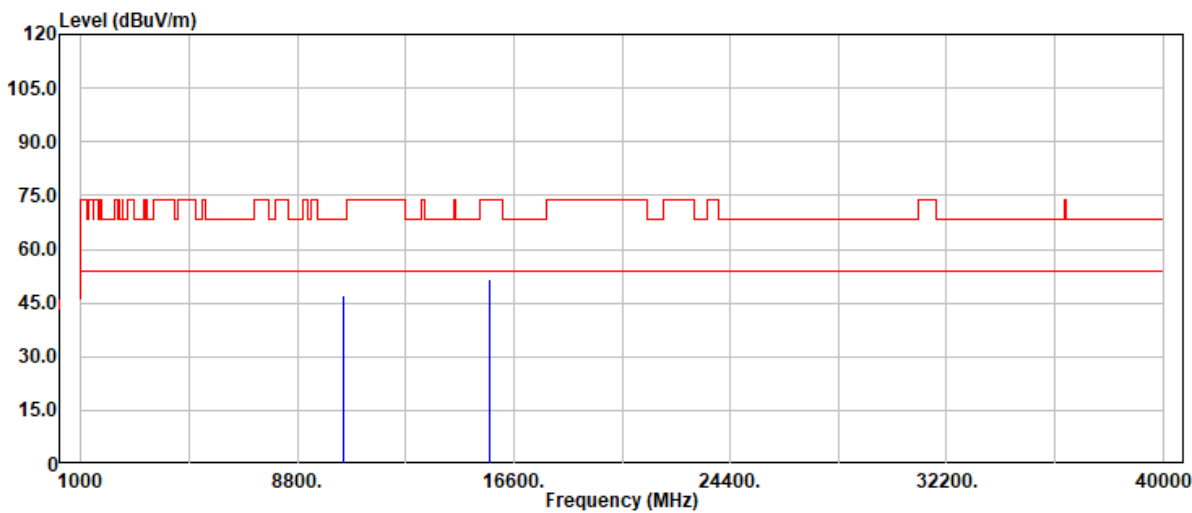


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10480.00 | 34.07      | 12.92  | 46.99     | 68.20     | -21.21 | Peak          |
| 15720.00 | 35.32      | 16.27  | 51.59     | 74.00     | -22.41 | Peak          |
| 15720.00 | 27.85      | 16.27  | 44.12     | 54.00     | -9.88  | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 144 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n40_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5190 MHz        | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 17              |              |              |

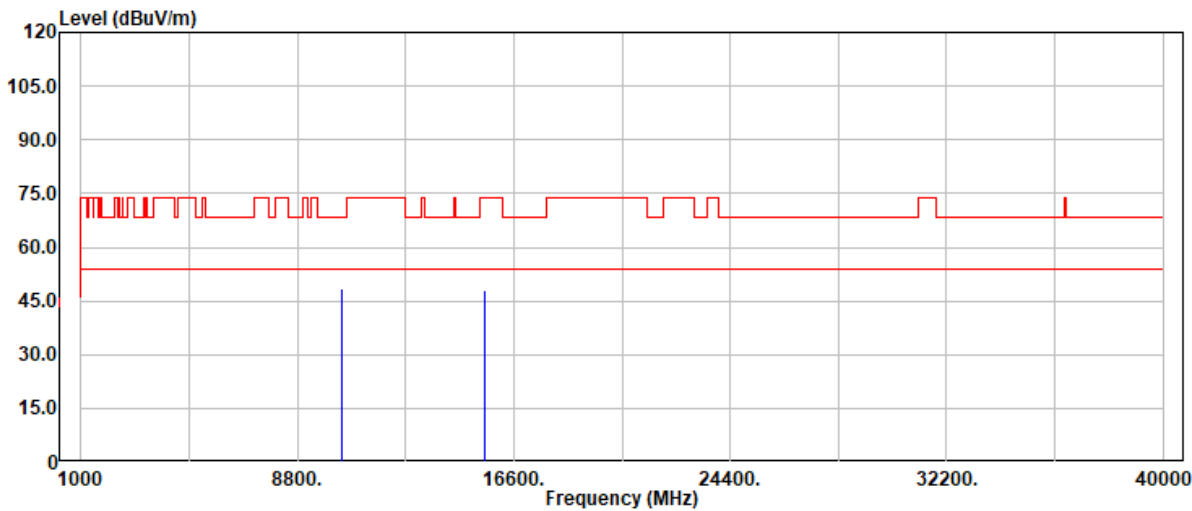


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10380.00 | 35.25      | 13.02  | 48.27     | 68.20     | -19.93 | Peak          |
| 15570.00 | 32.55      | 15.58  | 48.13     | 74.00     | -25.87 | Peak          |
| 15570.00 | 23.86      | 15.58  | 39.44     | 54.00     | -14.56 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 145 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n40_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5190 MHz        | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 17              |              |              |

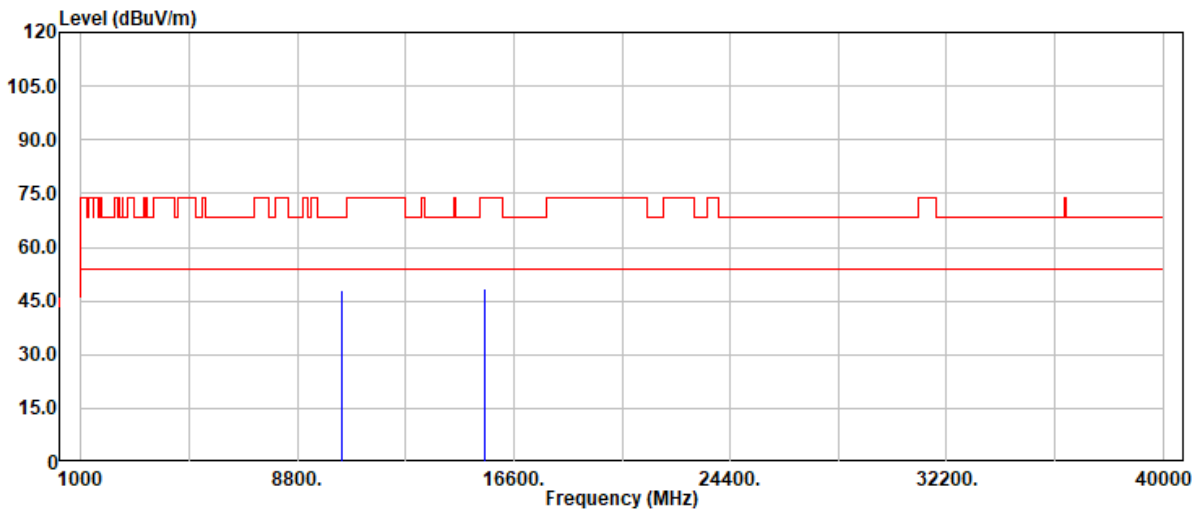


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10380.00 | 35.07      | 13.02  | 48.09     | 68.20     | -20.11 | Peak          |
| 15570.00 | 32.99      | 15.58  | 48.57     | 74.00     | -25.43 | Peak          |
| 15570.00 | 23.77      | 15.58  | 39.35     | 54.00     | -14.65 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 146 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n40_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5230 MHz        | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 17              |              |              |

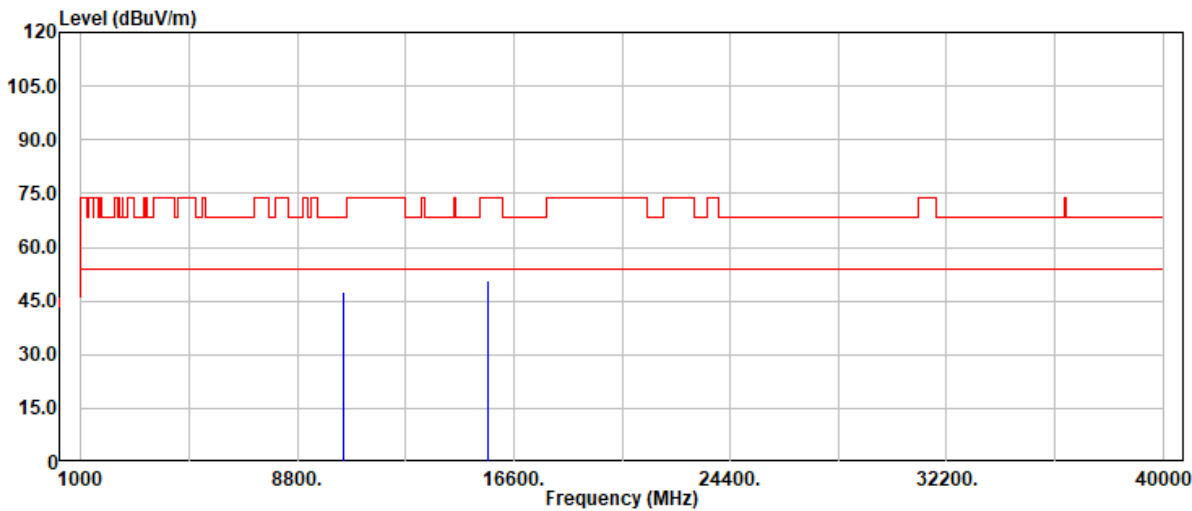


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10460.00 | 34.54      | 12.96  | 47.50     | 68.20     | -20.70 | Peak          |
| 15690.00 | 34.48      | 16.03  | 50.51     | 74.00     | -23.49 | Peak          |
| 15690.00 | 25.03      | 16.03  | 41.06     | 54.00     | -12.94 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 147 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n40_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5230 MHz        | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 17              |              |              |

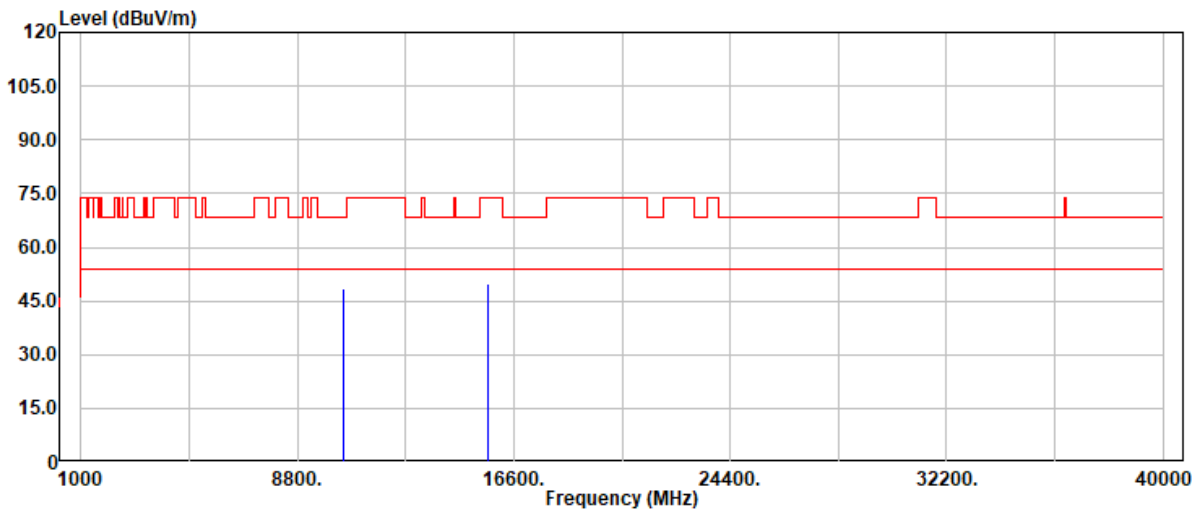


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10460.00 | 35.45      | 12.96  | 48.41     | 68.20     | -19.79 | Peak          |
| 15690.00 | 33.73      | 16.03  | 49.76     | 74.00     | -24.24 | Peak          |
| 15690.00 | 24.96      | 16.03  | 40.99     | 54.00     | -13.01 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 148 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ac80_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5210 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 17               |              |              |

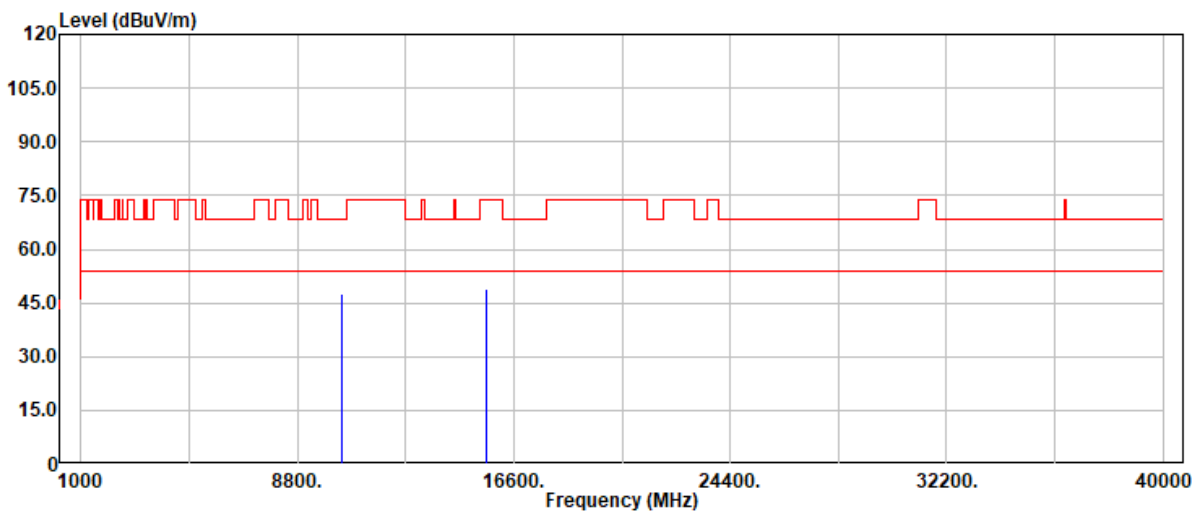

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10420.00 | 34.51      | 12.94  | 47.45     | 68.20     | -20.75 | Peak          |
| 15630.00 | 33.21      | 15.58  | 48.79     | 74.00     | -25.21 | Peak          |
| 15630.00 | 24.73      | 15.58  | 40.31     | 54.00     | -13.69 | Average       |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 149 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ac80\_Band1  
Frequency : 5210 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 17

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

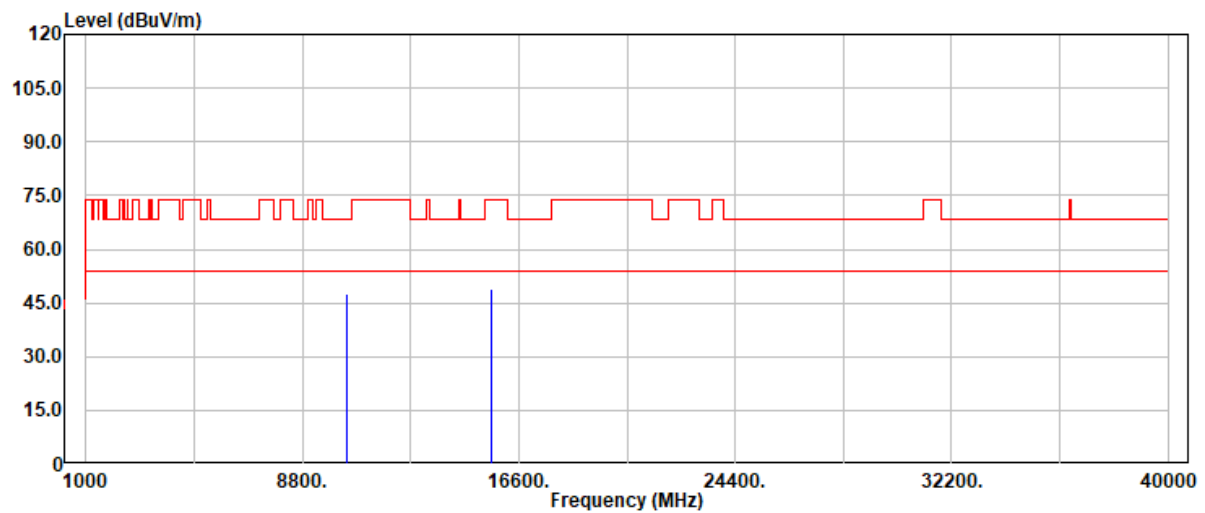


| Freq     | Read  | Factor | Actual | Limit  | Margin | Detector |
|----------|-------|--------|--------|--------|--------|----------|
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 10420.00 | 34.69 | 12.94  | 47.63  | 68.20  | -20.57 | Peak     |
| 15630.00 | 33.33 | 15.58  | 48.91  | 74.00  | -25.09 | Peak     |
| 15630.00 | 24.71 | 15.58  | 40.29  | 54.00  | -13.71 | Average  |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 150 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5180 MHz         | Antenna Pol. | : Vertical   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 19               |              |              |

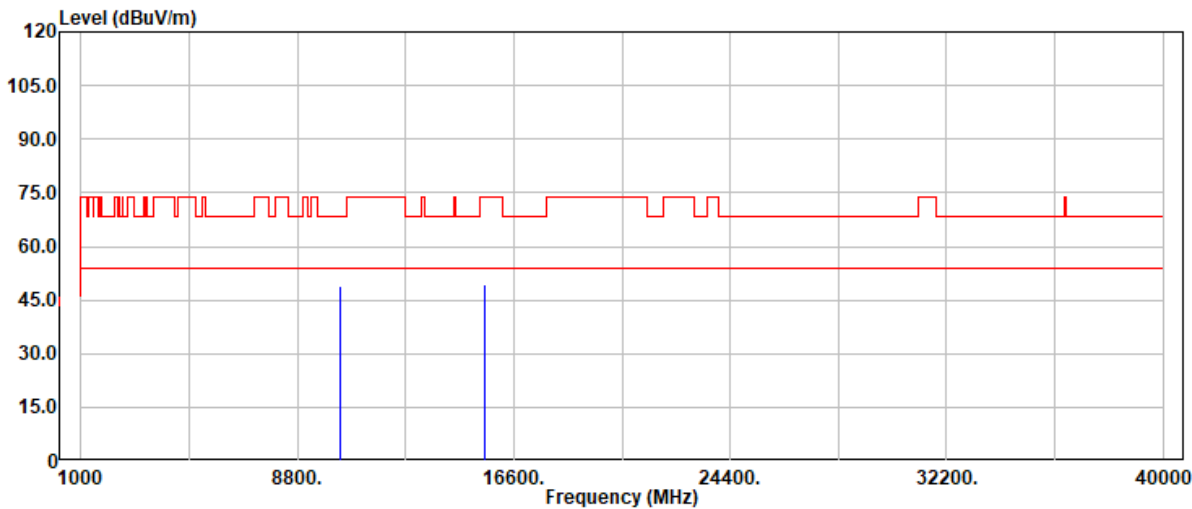


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10360.00 | 35.66      | 13.12  | 48.78     | 68.20     | -19.42 | Peak          |
| 15540.00 | 33.50      | 15.77  | 49.27     | 74.00     | -24.73 | Peak          |
| 15540.00 | 27.10      | 15.77  | 42.87     | 54.00     | -11.13 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 151 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5180 MHz         | Antenna Pol. | : Horizontal |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 19               |              |              |

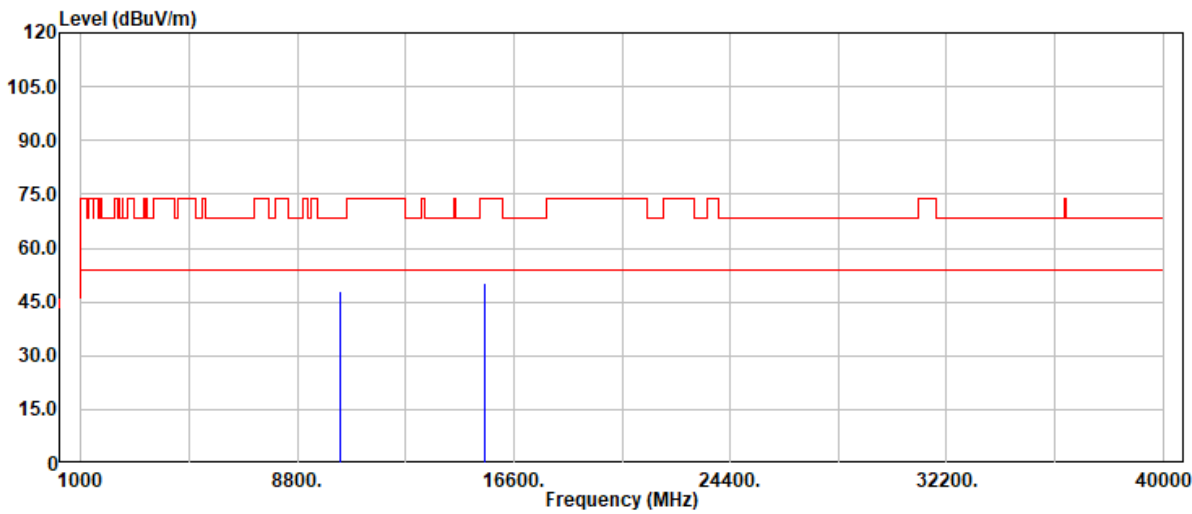


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10360.00 | 34.74      | 13.12  | 47.86     | 68.20     | -20.34 | Peak          |
| 15540.00 | 34.50      | 15.77  | 50.27     | 74.00     | -23.73 | Peak          |
| 15540.00 | 27.05      | 15.77  | 42.82     | 54.00     | -11.18 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 152 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5220 MHz         | Antenna Pol. | : Vertical   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 24               |              |              |

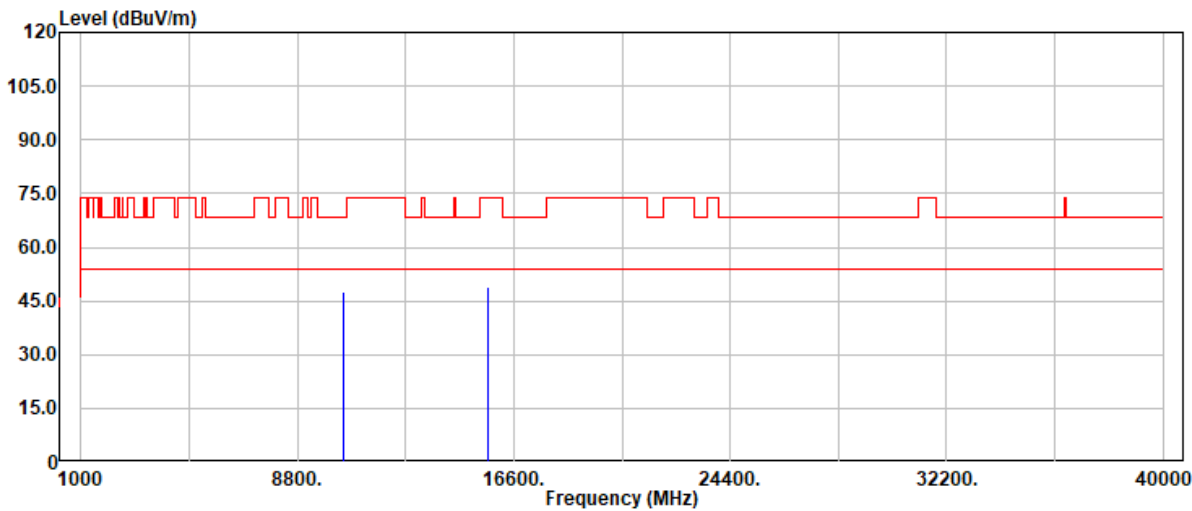


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10440.00 | 34.78      | 12.96  | 47.74     | 68.20     | -20.46 | Peak          |
| 15660.00 | 33.29      | 15.74  | 49.03     | 74.00     | -24.97 | Peak          |
| 15660.00 | 27.75      | 15.74  | 43.49     | 54.00     | -10.51 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 153 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5220 MHz         | Antenna Pol. | : Horizontal |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 24               |              |              |

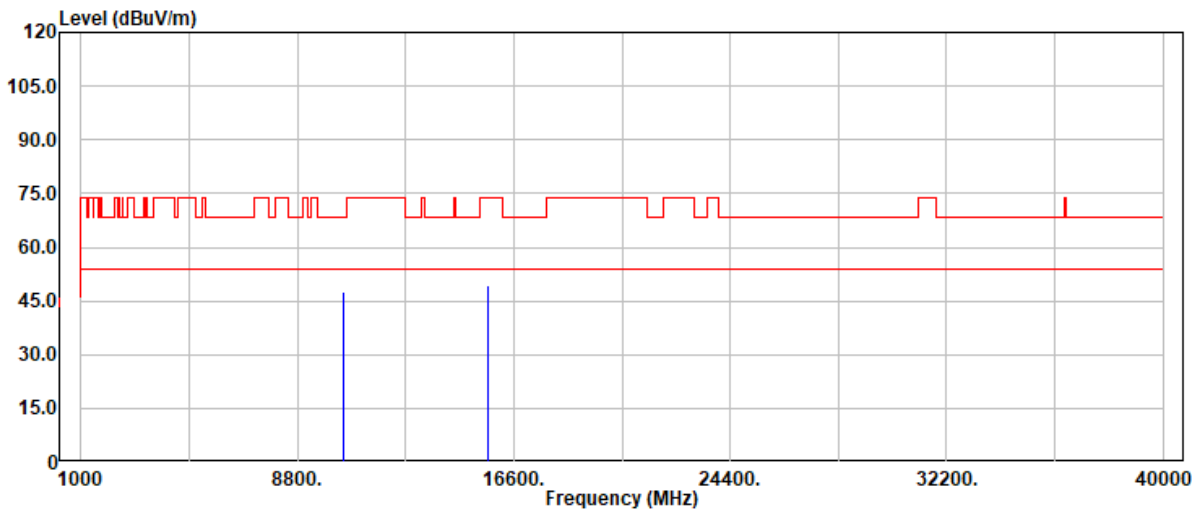


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10440.00 | 34.61      | 12.96  | 47.57     | 68.20     | -20.63 | Peak          |
| 15660.00 | 33.69      | 15.74  | 49.43     | 74.00     | -24.57 | Peak          |
| 15660.00 | 27.75      | 15.74  | 43.49     | 54.00     | -10.51 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 154 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5240 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 19               |              |              |

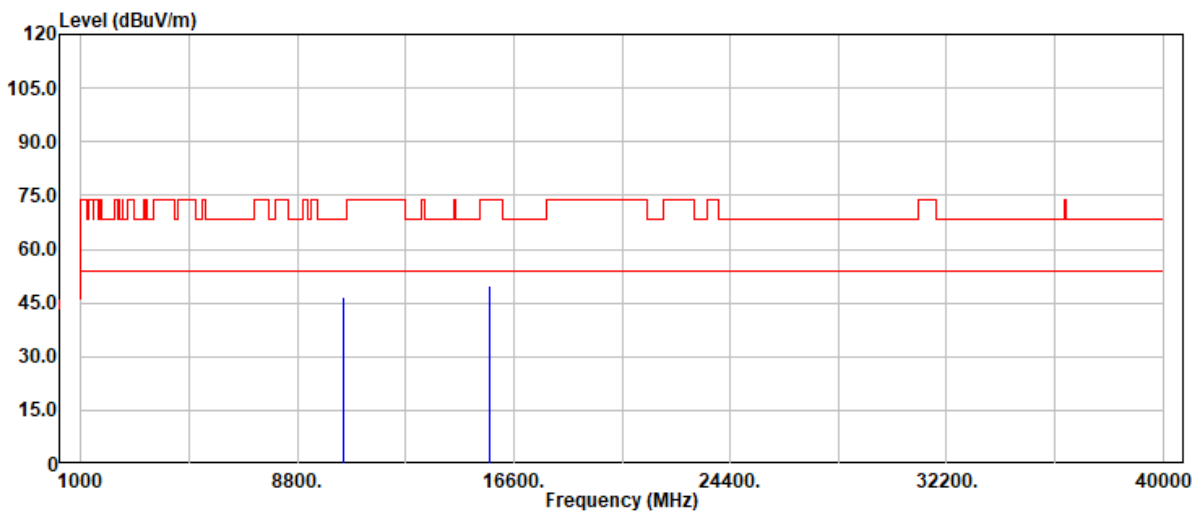

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10480.00 | 33.79      | 12.92  | 46.71     | 68.20     | -21.49 | Peak          |
| 15720.00 | 33.32      | 16.27  | 49.59     | 74.00     | -24.41 | Peak          |
| 15720.00 | 27.68      | 16.27  | 43.95     | 54.00     | -10.05 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 155 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax20\_Band1  
Frequency : 5240 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 19

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

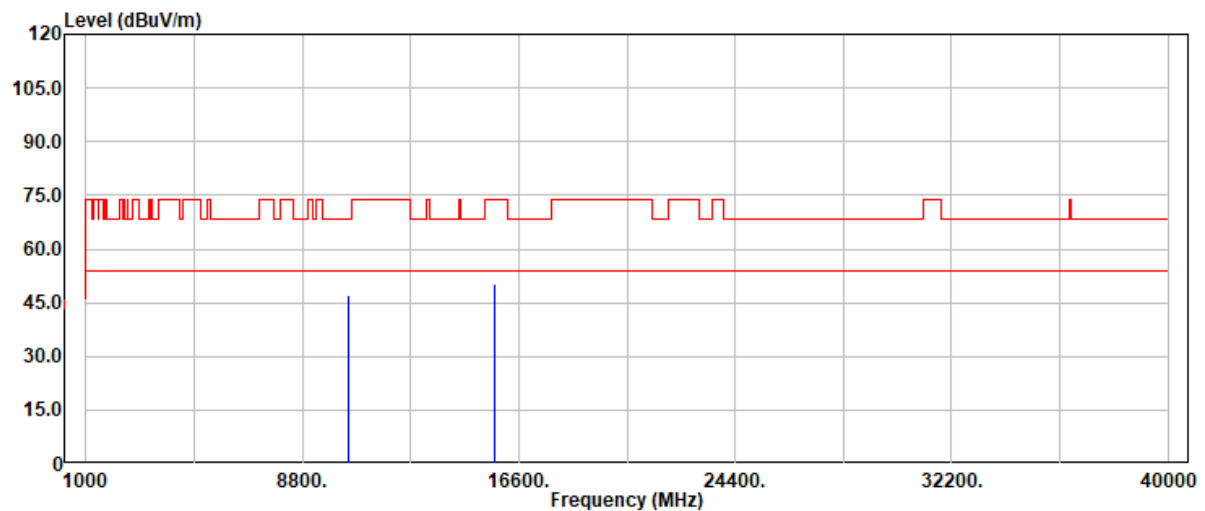

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10480.00 | 34.23      | 12.92  | 47.15     | 68.20     | -21.05 | Peak          |
| 15720.00 | 34.09      | 16.27  | 50.36     | 74.00     | -23.64 | Peak          |
| 15720.00 | 27.43      | 16.27  | 43.70     | 54.00     | -10.30 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 156 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax40\_Band1  
Frequency : 5190 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 17

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

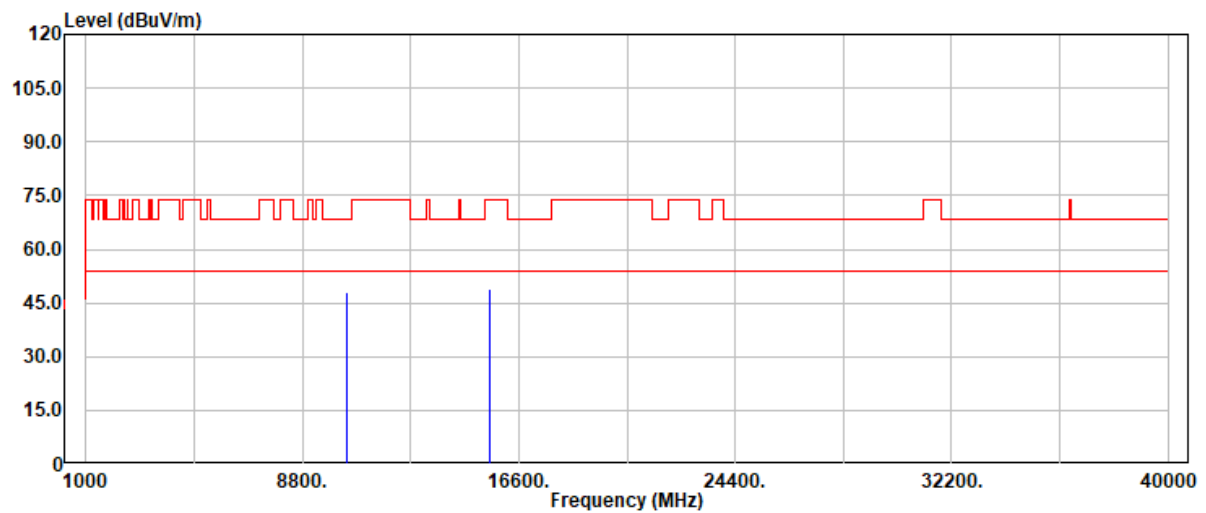

| Freq     | Read  | Factor | Actual | Limit  | Margin | Detector |
|----------|-------|--------|--------|--------|--------|----------|
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 10380.00 | 35.11 | 13.02  | 48.13  | 68.20  | -20.07 | Peak     |
| 15570.00 | 33.52 | 15.58  | 49.10  | 74.00  | -24.90 | Peak     |
| 15570.00 | 23.97 | 15.58  | 39.55  | 54.00  | -14.45 | Average  |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 157 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax40\_Band1  
Frequency : 5190 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 17

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

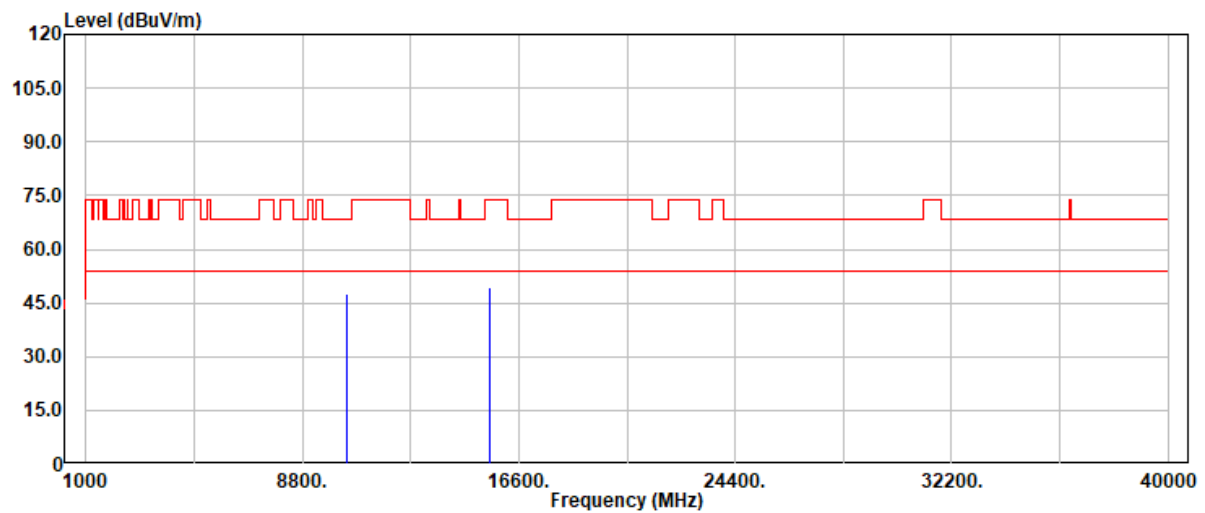


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10380.00 | 34.43      | 13.02  | 47.45     | 68.20     | -20.75 | Peak          |
| 15570.00 | 33.99      | 15.58  | 49.57     | 74.00     | -24.43 | Peak          |
| 15570.00 | 24.06      | 15.58  | 39.64     | 54.00     | -14.36 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 158 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax40_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5230 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 17               |              |              |

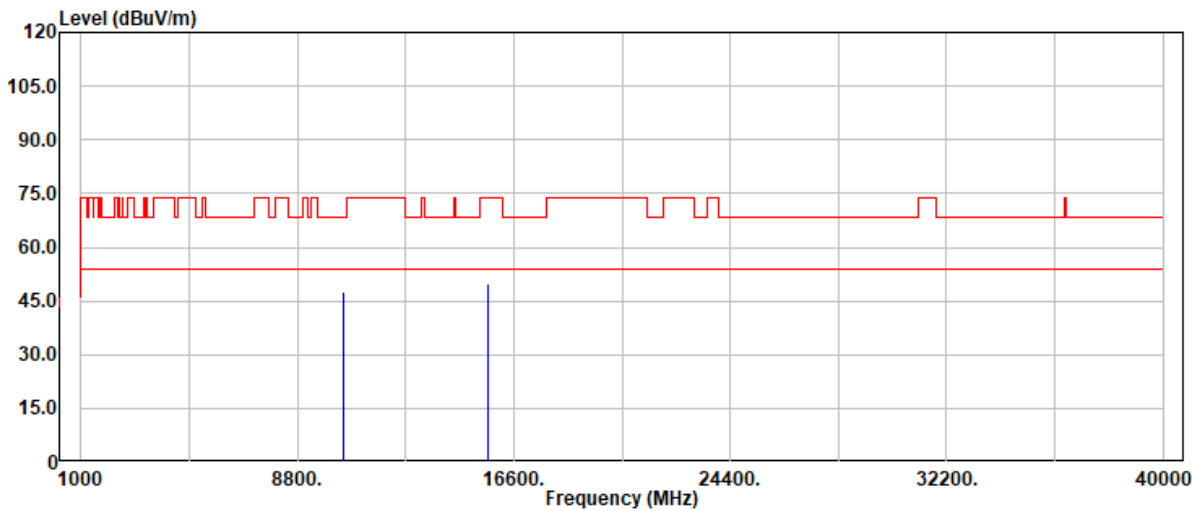

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10460.00 | 34.40      | 12.96  | 47.36     | 68.20     | -20.84 | Peak          |
| 15690.00 | 33.61      | 16.03  | 49.64     | 74.00     | -24.36 | Peak          |
| 15690.00 | 24.55      | 16.03  | 40.58     | 54.00     | -13.42 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 159 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax40\_Band1  
Frequency : 5230 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 17

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

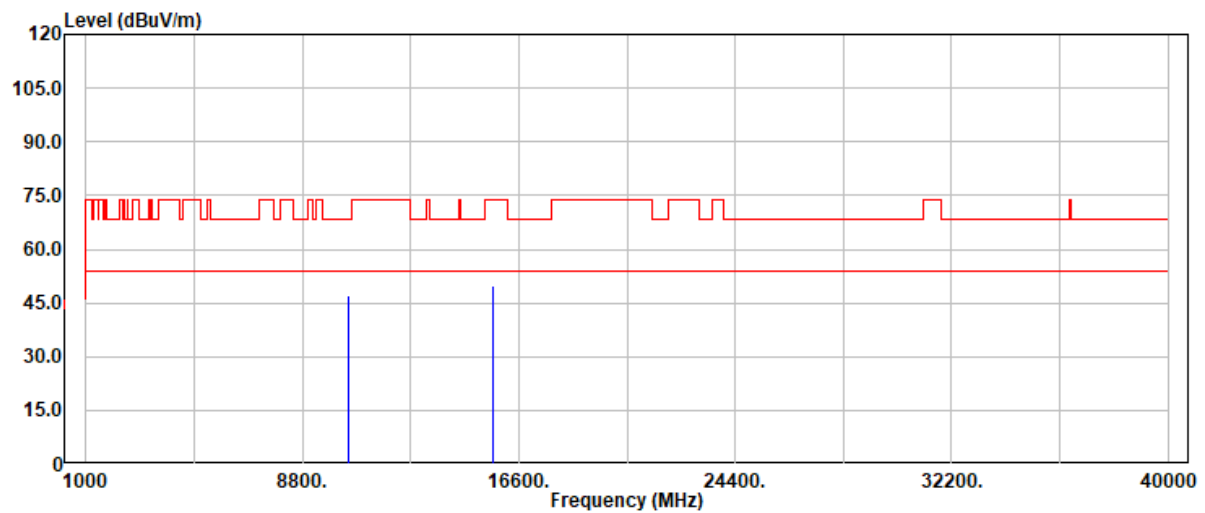


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10460.00 | 34.05      | 12.96  | 47.01     | 68.20     | -21.19 | Peak          |
| 15690.00 | 33.79      | 16.03  | 49.82     | 74.00     | -24.18 | Peak          |
| 15690.00 | 24.36      | 16.03  | 40.39     | 54.00     | -13.61 | Average       |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 160 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax80_Band1 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5210 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 17               |              |              |

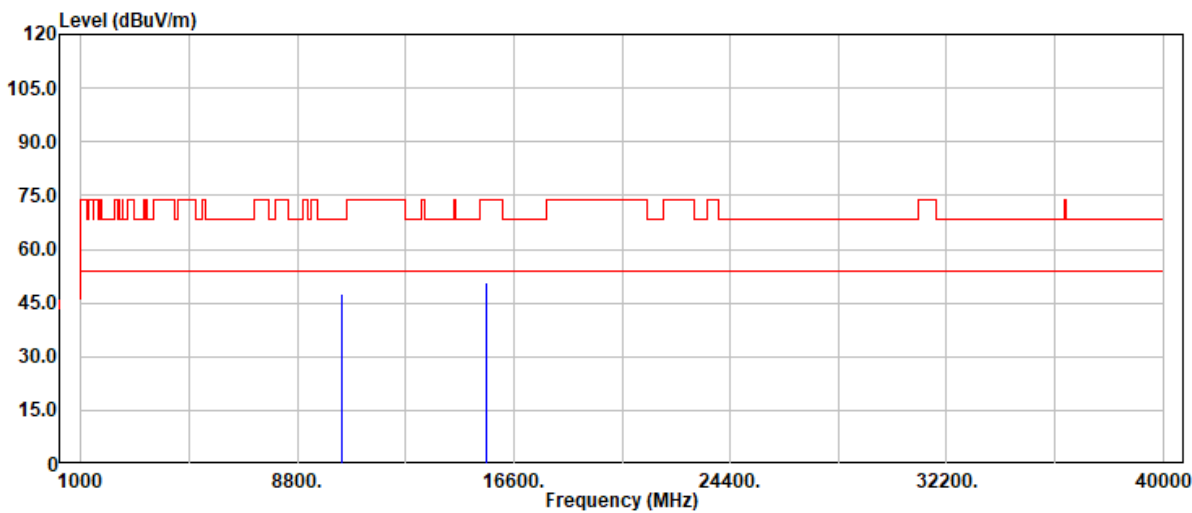

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10420.00 | 34.83      | 12.94  | 47.77     | 68.20     | -20.43 | Peak          |
| 15630.00 | 35.01      | 15.58  | 50.59     | 74.00     | -23.41 | Peak          |
| 15630.00 | 24.67      | 15.58  | 40.25     | 54.00     | -13.75 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 161 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax80\_Band1  
Frequency : 5210 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 17

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

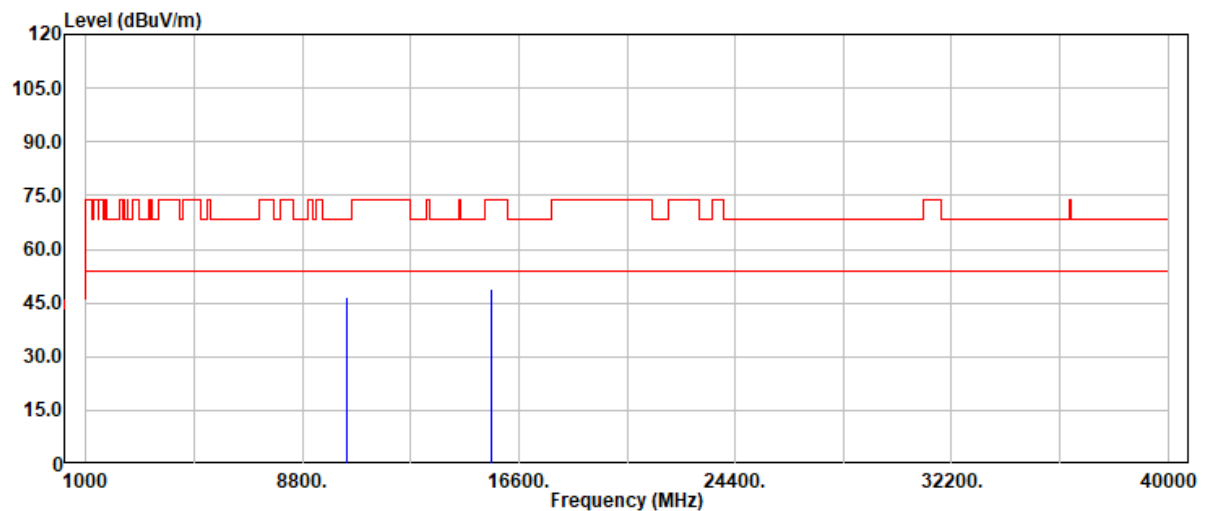

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 10420.00 | 33.80      | 12.94  | 46.74     | 68.20     | -21.46 | Peak          |
| 15630.00 | 33.40      | 15.58  | 48.98     | 74.00     | -25.02 | Peak          |
| 15630.00 | 24.75      | 15.58  | 40.33     | 54.00     | -13.67 | Average       |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 162 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11n20\_Band4  
Frequency : 5825 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting :

Test Date : 2025-02-08  
Temp./Humi. : 24.3/57  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

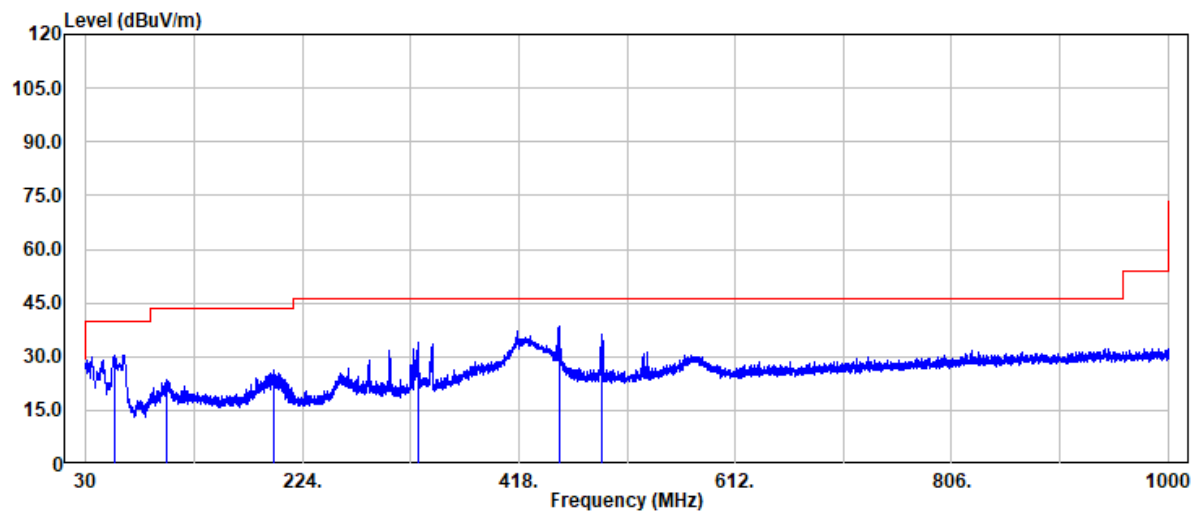

| Freq   | Read   |        | Actual | Limit  |        | Detector |
|--------|--------|--------|--------|--------|--------|----------|
| Level  | Factor | FS     | @3m    | Margin | Mode   |          |
| -----  | -----  | -----  | -----  | -----  | -----  | -----    |
| MHz    | dBuV   | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 56.07  | 46.84  | -16.47 | 30.37  | 40.00  | -9.63  | Peak     |
| 101.78 | 36.57  | -12.99 | 23.58  | 43.50  | -19.92 | Peak     |
| 197.93 | 36.71  | -10.57 | 26.14  | 43.50  | -17.36 | Peak     |
| 327.31 | 42.95  | -8.80  | 34.15  | 46.00  | -11.85 | Peak     |
| 454.62 | 43.60  | -5.30  | 38.30  | 46.00  | -7.70  | Peak     |
| 492.45 | 40.55  | -4.44  | 36.11  | 46.00  | -9.89  | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 163 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11n20\_Band4  
Frequency : 5825 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting :

Test Date : 2025-02-08  
Temp./Humi. : 24.3/57  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

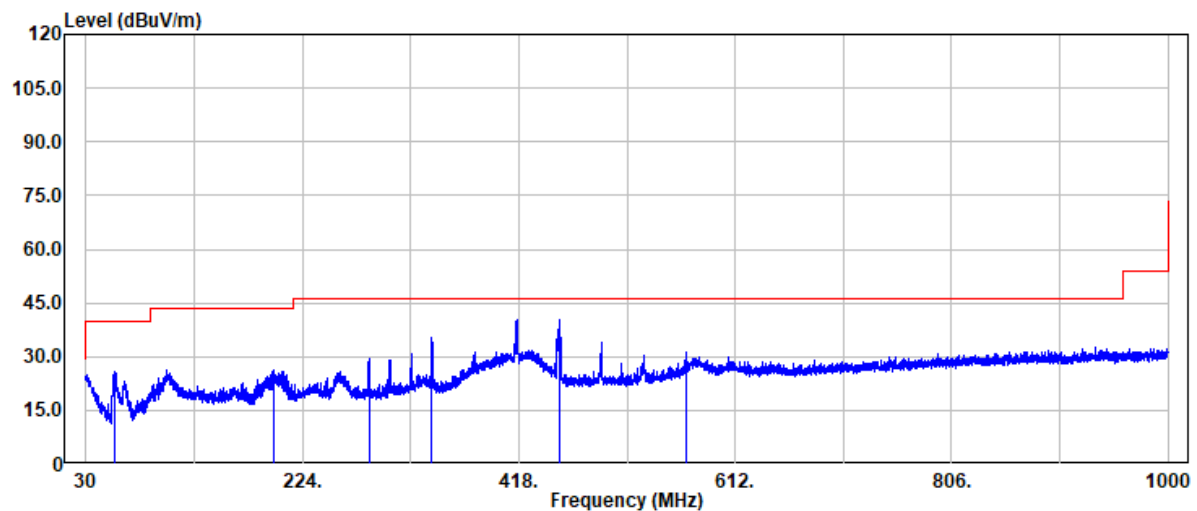

| Freq   | Read  |        | Actual | Limit  |        | Detector |
|--------|-------|--------|--------|--------|--------|----------|
| -----  | Level | Factor | FS     | @3m    | Margin | Mode     |
| -----  | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz    | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 55.83  | 42.10 | -16.50 | 25.60  | 40.00  | -14.40 | Peak     |
| 198.78 | 36.69 | -10.39 | 26.30  | 43.50  | -17.20 | Peak     |
| 283.78 | 39.11 | -9.56  | 29.55  | 46.00  | -16.45 | Peak     |
| 339.43 | 44.08 | -8.68  | 35.40  | 46.00  | -10.60 | Peak     |
| 454.38 | 45.64 | -5.31  | 40.33  | 46.00  | -5.67  | Peak     |
| 568.47 | 34.41 | -3.24  | 31.17  | 46.00  | -14.83 | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 164 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11a\_Band4\_CH0  
Frequency : 5745 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 28

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

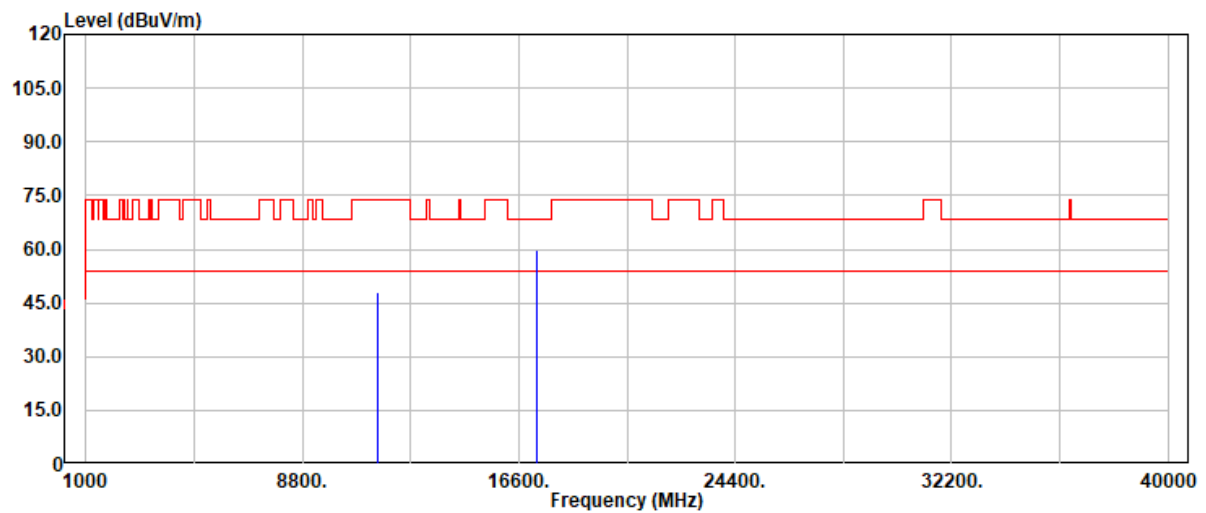

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11490.00 | 35.13      | 12.94  | 48.07     | 74.00     | -25.93 | Peak          |
| 11490.00 | 25.08      | 12.94  | 38.02     | 54.00     | -15.98 | Average       |
| 17235.00 | 33.35      | 26.41  | 59.76     | 68.20     | -8.44  | Peak          |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 165 / 193  
Rev.: 02

|                |                     |              |              |
|----------------|---------------------|--------------|--------------|
| Project No     | : TM-2412000476P    | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11a_Band4_CH0 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5745 MHz          | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX                | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                 | Test Chamber | : 966A       |
| Setting        | : 28                |              |              |

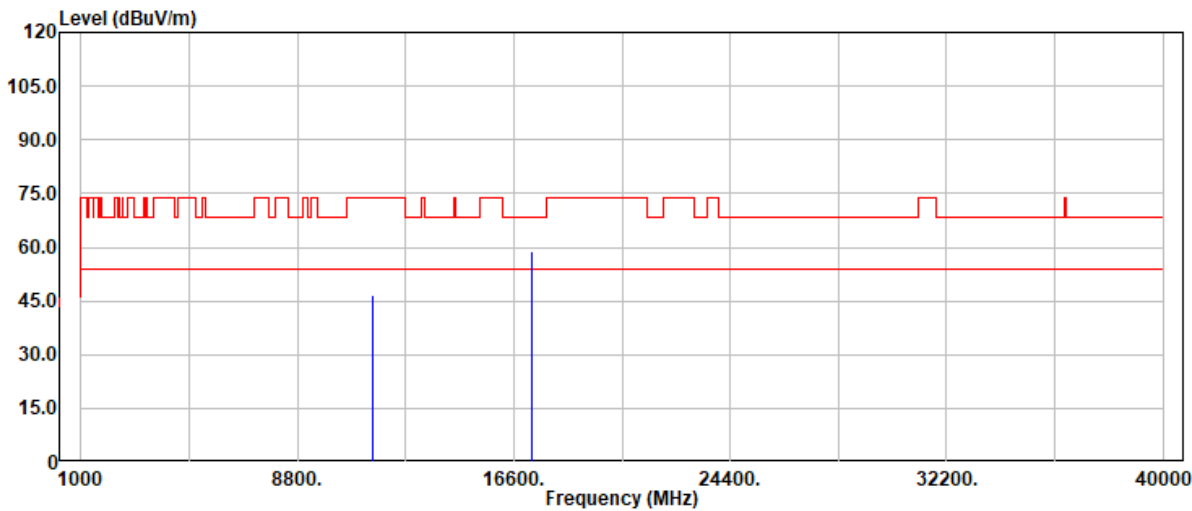

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11490.00 | 33.51      | 12.94  | 46.45     | 74.00     | -27.55 | Peak          |
| 11490.00 | 25.41      | 12.94  | 38.35     | 54.00     | -15.65 | Average       |
| 17235.00 | 32.49      | 26.41  | 58.90     | 68.20     | -9.30  | Peak          |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 166 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11a\_Band4\_CH0  
Frequency : 5785 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 28

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

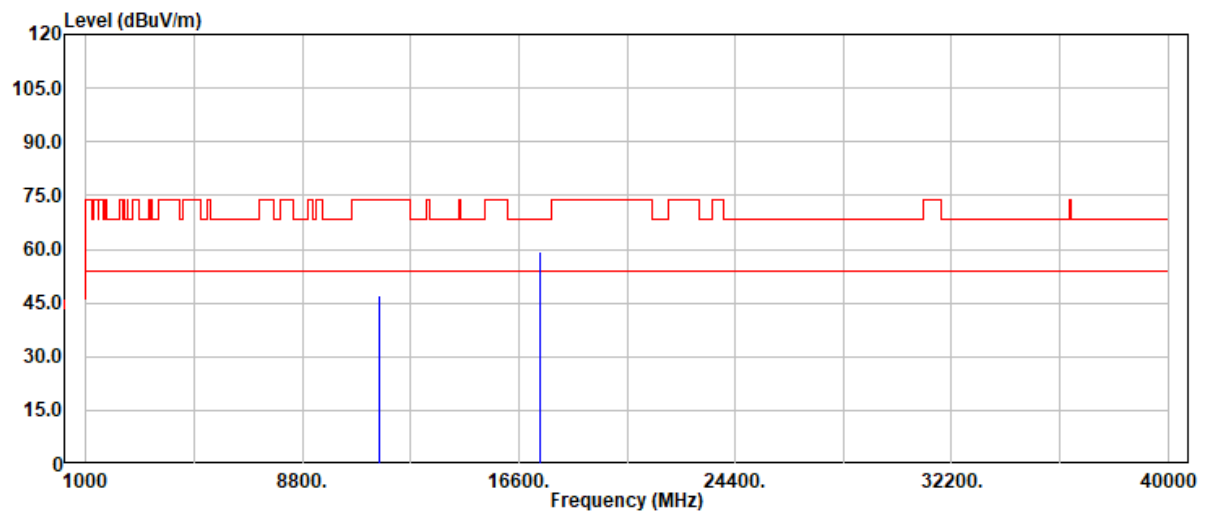


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11570.00 | 34.28      | 12.97  | 47.25     | 74.00     | -26.75 | Peak          |
| 11570.00 | 26.42      | 12.97  | 39.39     | 54.00     | -14.61 | Average       |
| 17355.00 | 33.05      | 26.34  | 59.39     | 68.20     | -8.81  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 167 / 193  
Rev.: 02

|                |                     |              |              |
|----------------|---------------------|--------------|--------------|
| Project No     | : TM-2412000476P    | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11a_Band4_CH0 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5785 MHz          | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX                | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                 | Test Chamber | : 966A       |
| Setting        | : 28                |              |              |

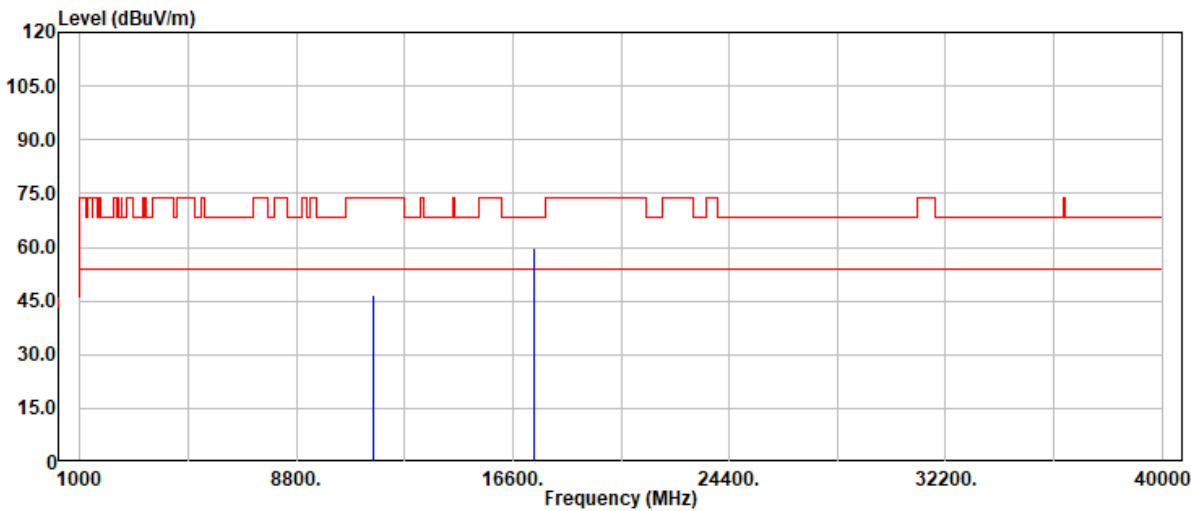


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11570.00 | 33.49      | 12.97  | 46.46     | 74.00     | -27.54 | Peak          |
| 11570.00 | 25.13      | 12.97  | 38.10     | 54.00     | -15.90 | Average       |
| 17355.00 | 33.25      | 26.34  | 59.59     | 68.20     | -8.61  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 168 / 193  
Rev.: 02

|                |                     |              |              |
|----------------|---------------------|--------------|--------------|
| Project No     | : TM-2412000476P    | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11a_Band4_CH0 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5825 MHz          | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX                | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                 | Test Chamber | : 966A       |
| Setting        | : 28                |              |              |

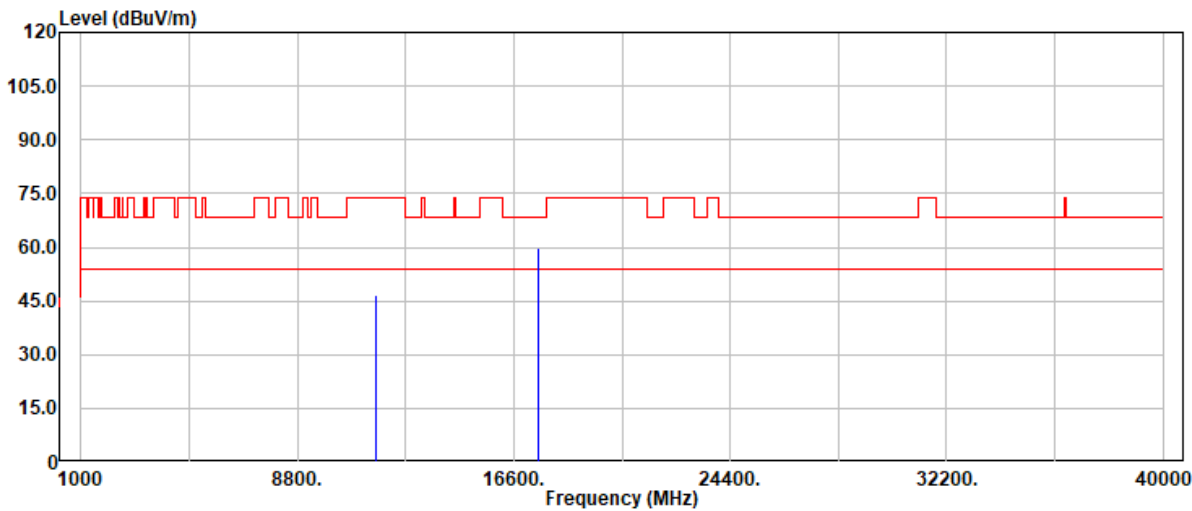


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11650.00 | 33.66      | 13.09  | 46.75     | 74.00     | -27.25 | Peak          |
| 11650.00 | 25.04      | 13.09  | 38.13     | 54.00     | -15.87 | Average       |
| 17475.00 | 33.71      | 25.89  | 59.60     | 68.20     | -8.60  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 169 / 193  
Rev.: 02

|                |                     |              |              |
|----------------|---------------------|--------------|--------------|
| Project No     | : TM-2412000476P    | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11a_Band4_CH0 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5825 MHz          | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX                | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                 | Test Chamber | : 966A       |
| Setting        | : 28                |              |              |

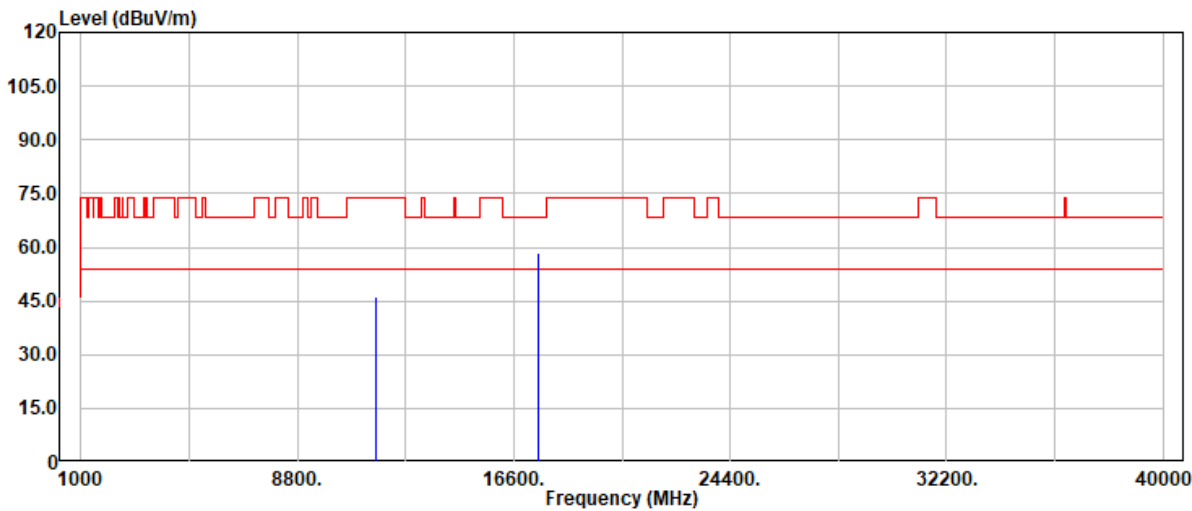


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11650.00 | 33.12      | 13.09  | 46.21     | 74.00     | -27.79 | Peak          |
| 11650.00 | 25.17      | 13.09  | 38.26     | 54.00     | -15.74 | Average       |
| 17475.00 | 32.69      | 25.89  | 58.58     | 68.20     | -9.62  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 170 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5745 MHz        | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 25              |              |              |

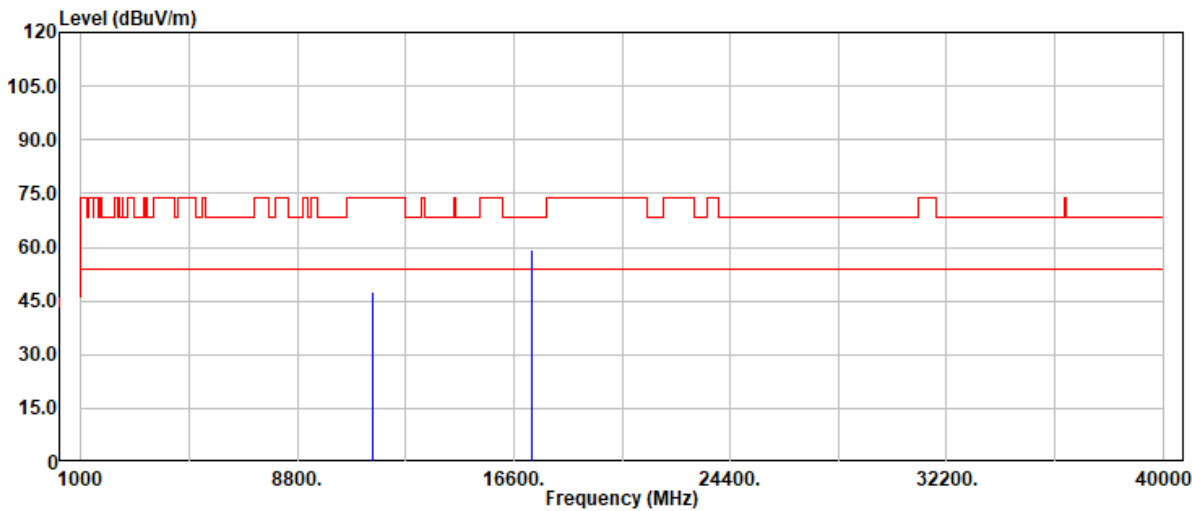


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11490.00 | 34.58      | 12.94  | 47.52     | 74.00     | -26.48 | Peak          |
| 11490.00 | 25.03      | 12.94  | 37.97     | 54.00     | -16.03 | Average       |
| 17235.00 | 33.04      | 26.41  | 59.45     | 68.20     | -8.75  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 171 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5745 MHz        | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 25              |              |              |

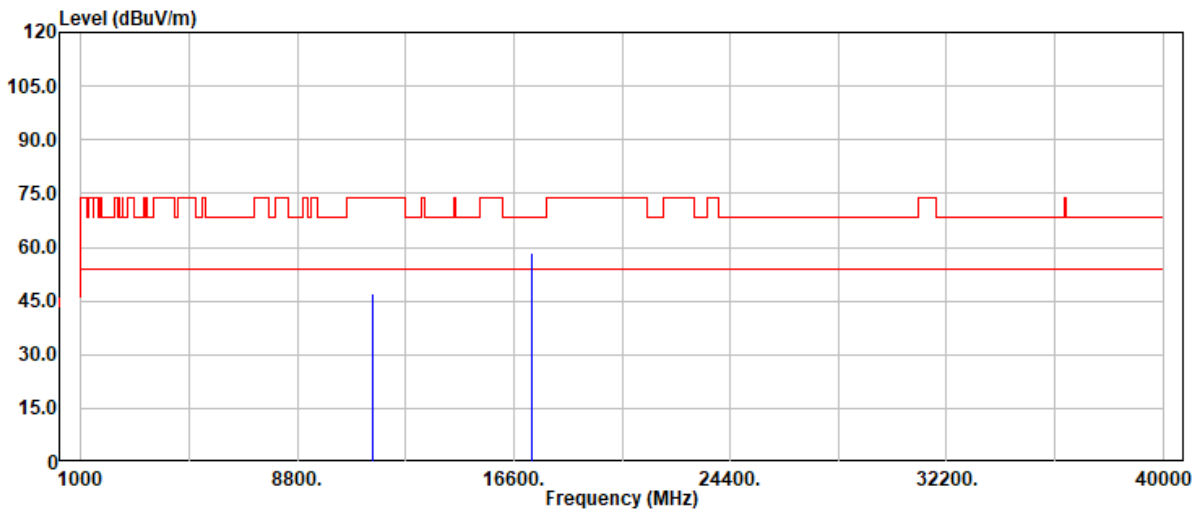


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11490.00 | 34.09      | 12.94  | 47.03     | 74.00     | -26.97 | Peak          |
| 11490.00 | 25.18      | 12.94  | 38.12     | 54.00     | -15.88 | Average       |
| 17235.00 | 31.83      | 26.41  | 58.24     | 68.20     | -9.96  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 172 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5785 MHz        | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 25              |              |              |

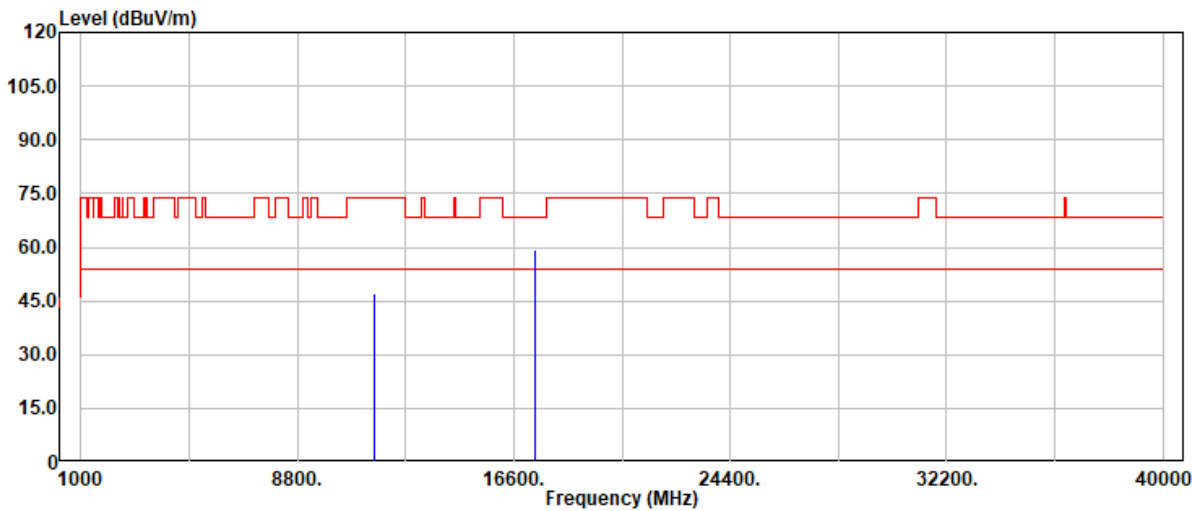

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11570.00 | 34.23      | 12.97  | 47.20     | 74.00     | -26.80 | Peak          |
| 11570.00 | 25.28      | 12.97  | 38.25     | 54.00     | -15.75 | Average       |
| 17355.00 | 33.04      | 26.34  | 59.38     | 68.20     | -8.82  | Peak          |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 173 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5785 MHz        | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 25              |              |              |

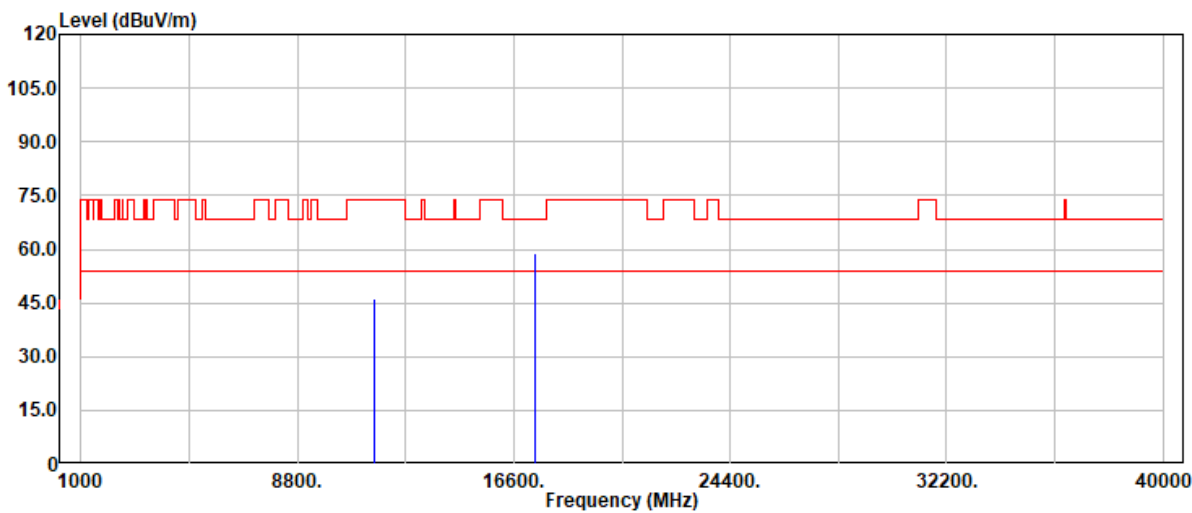

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11570.00 | 33.19      | 12.97  | 46.16     | 74.00     | -27.84 | Peak          |
| 11570.00 | 24.99      | 12.97  | 37.96     | 54.00     | -16.04 | Average       |
| 17355.00 | 32.56      | 26.34  | 58.90     | 68.20     | -9.30  | Peak          |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 174 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11n20\_Band4  
Frequency : 5825 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 25

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

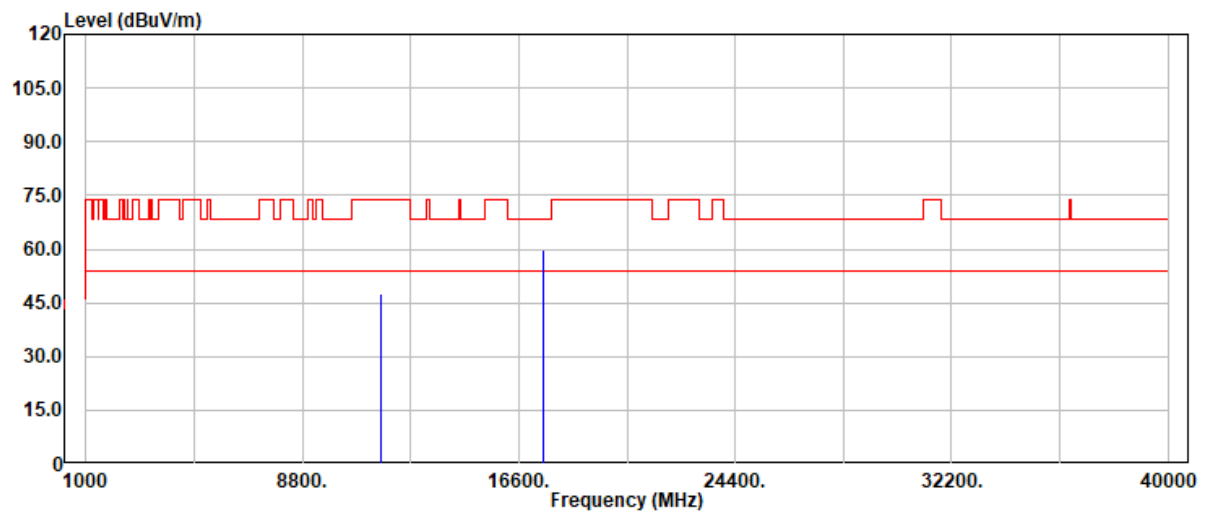


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11650.00 | 34.47      | 13.09  | 47.56     | 74.00     | -26.44 | Peak          |
| 11650.00 | 26.36      | 13.09  | 39.45     | 54.00     | -14.55 | Average       |
| 17475.00 | 34.02      | 25.89  | 59.91     | 68.20     | -8.29  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 175 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5825 MHz        | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 25              |              |              |

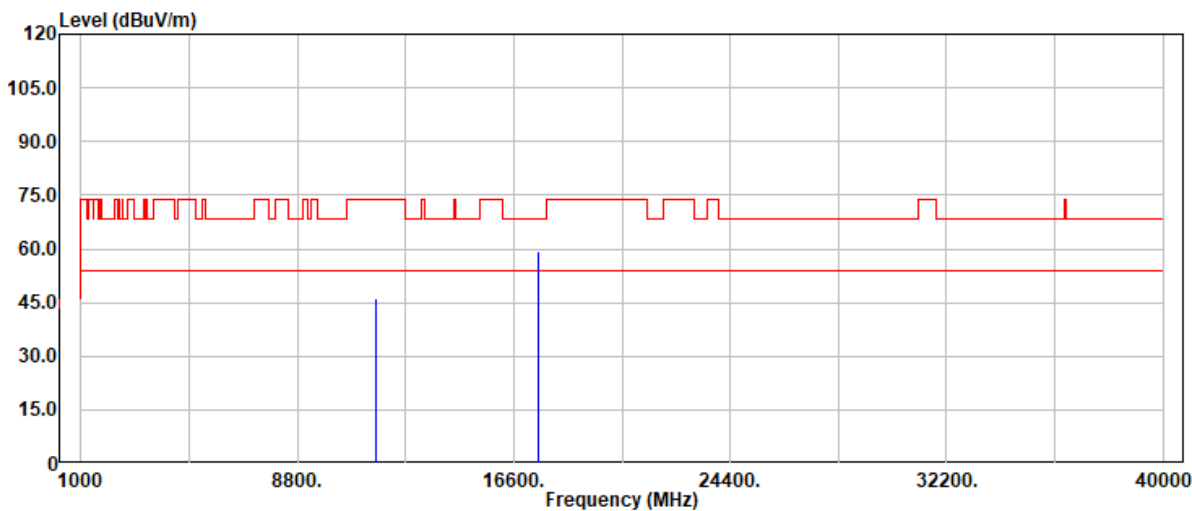


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11650.00 | 32.96      | 13.09  | 46.05     | 74.00     | -27.95 | Peak          |
| 11650.00 | 25.04      | 13.09  | 38.13     | 54.00     | -15.87 | Average       |
| 17475.00 | 33.27      | 25.89  | 59.16     | 68.20     | -9.04  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 176 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5755 MHz        | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 24              |              |              |

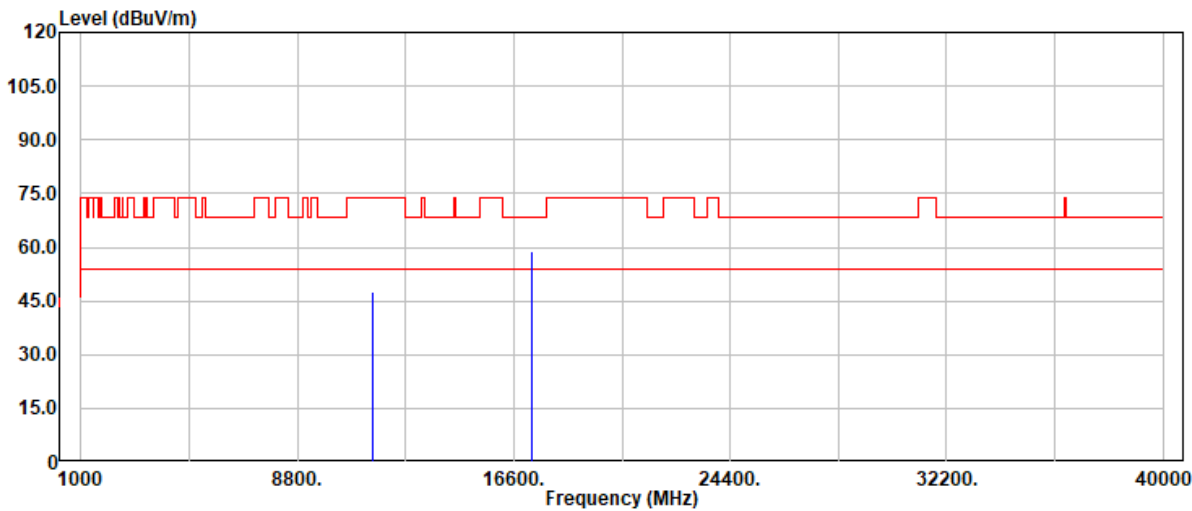


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11510.00 | 34.89      | 12.88  | 47.77     | 74.00     | -26.23 | Peak          |
| 11510.00 | 25.00      | 12.88  | 37.88     | 54.00     | -16.12 | Average       |
| 17265.00 | 32.37      | 26.52  | 58.89     | 68.20     | -9.31  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 177 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5755 MHz        | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 24              |              |              |

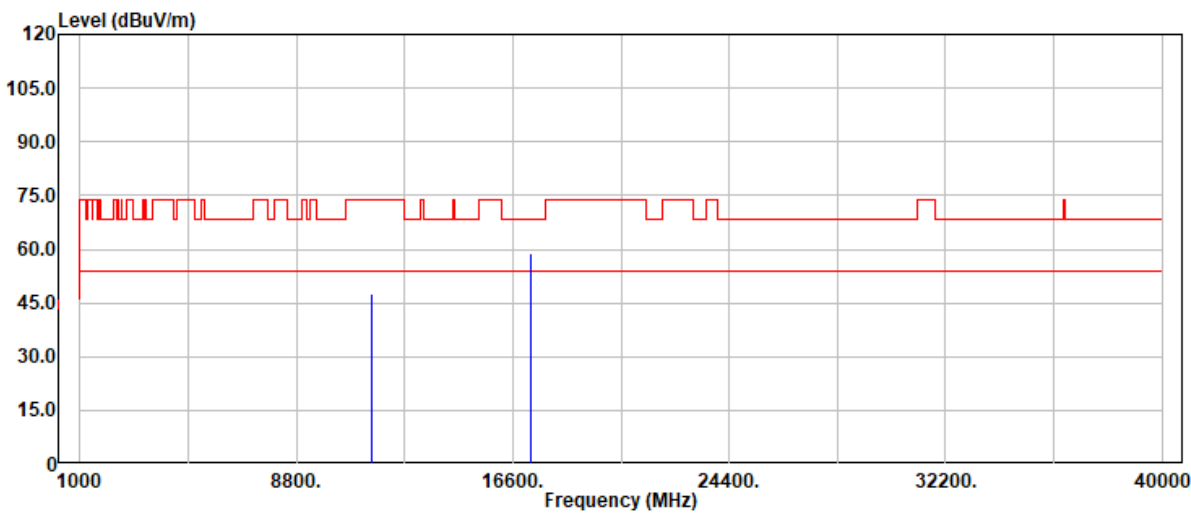

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11510.00 | 34.59      | 12.88  | 47.47     | 74.00     | -26.53 | Peak          |
| 11510.00 | 24.02      | 12.88  | 36.90     | 54.00     | -17.10 | Average       |
| 17265.00 | 32.29      | 26.52  | 58.81     | 68.20     | -9.39  | Peak          |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 178 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11n40\_Band4  
Frequency : 5795 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 23

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

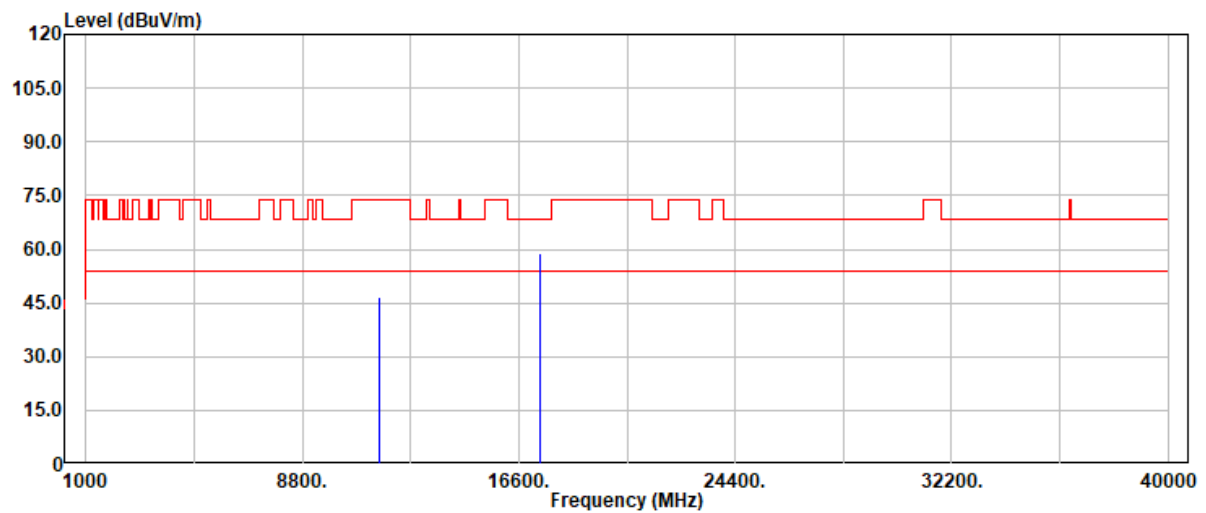


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11590.00 | 33.87      | 12.98  | 46.85     | 74.00     | -27.15 | Peak          |
| 11590.00 | 25.14      | 12.98  | 38.12     | 54.00     | -15.88 | Average       |
| 17385.00 | 32.45      | 26.29  | 58.74     | 68.20     | -9.46  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 179 / 193  
Rev.: 02

|                |                   |              |              |
|----------------|-------------------|--------------|--------------|
| Project No     | : TM-2412000476P  | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11n40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5795 MHz        | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX              | Engineer     | : Tony.Chao  |
| EUT Pol        | : H               | Test Chamber | : 966A       |
| Setting        | : 23              |              |              |

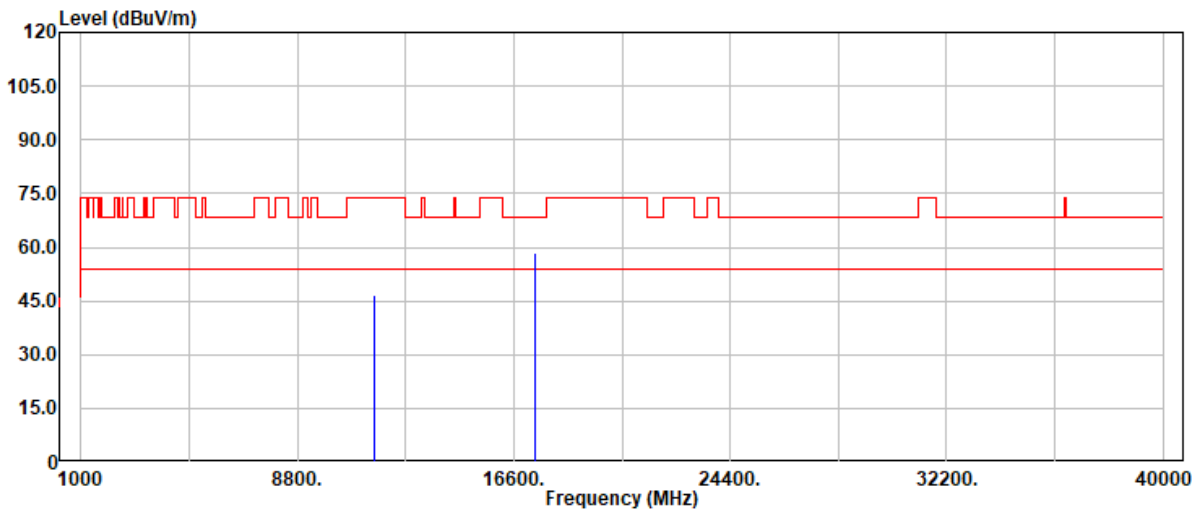

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11590.00 | 33.55      | 12.98  | 46.53     | 74.00     | -27.47 | Peak          |
| 11590.00 | 24.97      | 12.98  | 37.95     | 54.00     | -16.05 | Average       |
| 17385.00 | 32.19      | 26.29  | 58.48     | 68.20     | -9.72  | Peak          |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 180 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ac80\_Band4  
Frequency : 5775 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 21

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

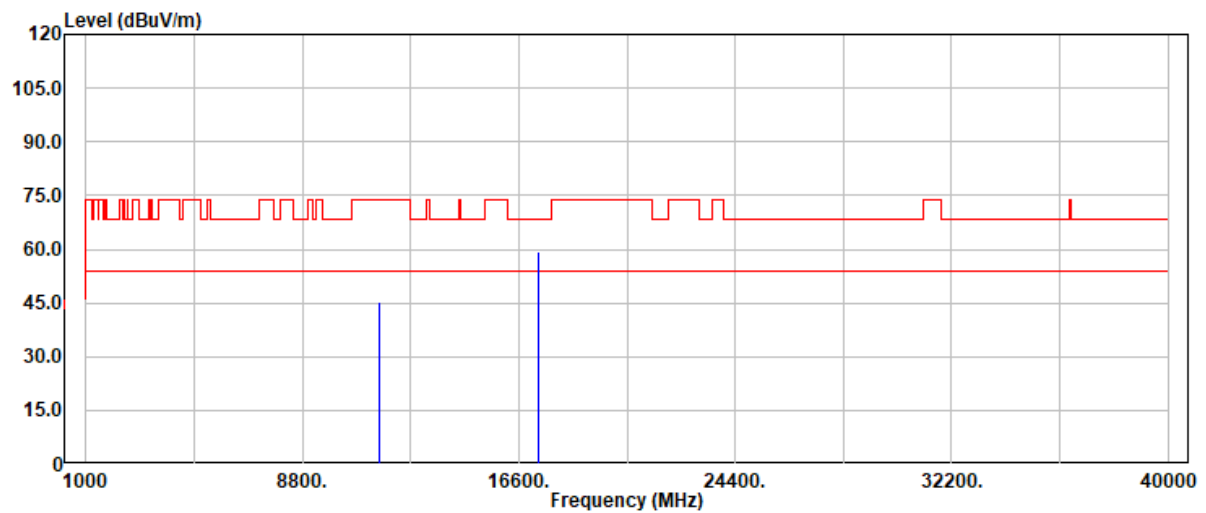

| Freq     | Read  | Factor | Actual | Limit  | Margin | Detector |
|----------|-------|--------|--------|--------|--------|----------|
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 11550.00 | 32.51 | 12.96  | 45.47  | 74.00  | -28.53 | Peak     |
| 11550.00 | 24.91 | 12.96  | 37.87  | 54.00  | -16.13 | Average  |
| 17325.00 | 32.71 | 26.49  | 59.20  | 68.20  | -9.00  | Peak     |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 181 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ac80\_Band4  
Frequency : 5775 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 21

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

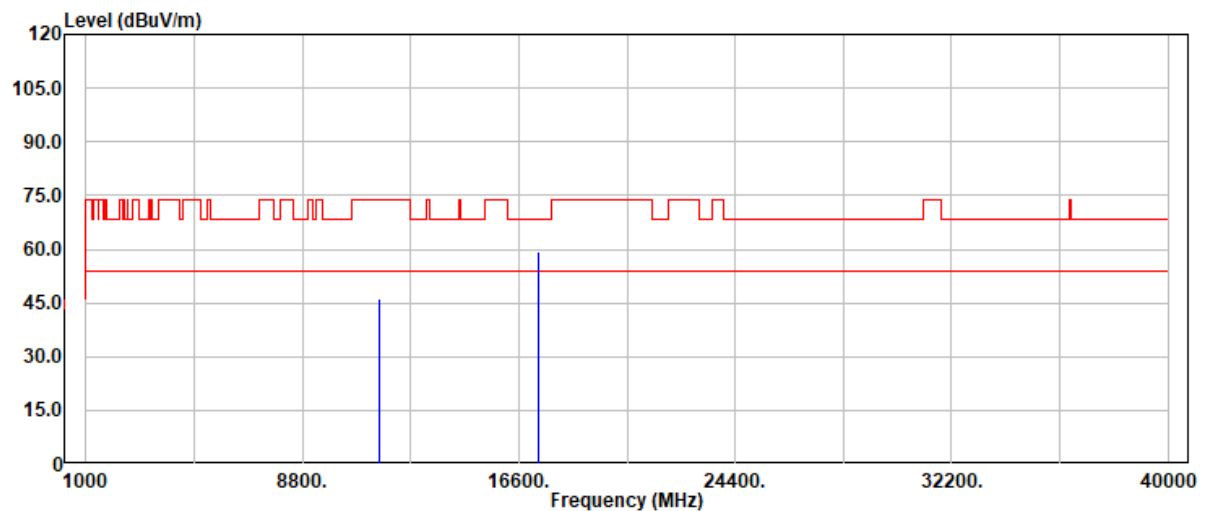

| Freq     | Read  | Factor | Actual | Limit  | Margin | Detector |
|----------|-------|--------|--------|--------|--------|----------|
| -----    | ----- | -----  | -----  | -----  | -----  | -----    |
| MHz      | dBuV  | dB     | dBuV/m | dBuV/m | dB     | PK/QP/AV |
| 11550.00 | 33.21 | 12.96  | 46.17  | 74.00  | -27.83 | Peak     |
| 11550.00 | 25.11 | 12.96  | 38.07  | 54.00  | -15.93 | Average  |
| 17325.00 | 32.60 | 26.49  | 59.09  | 68.20  | -9.11  | Peak     |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 182 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax20\_Band4  
Frequency : 5745 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 25

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : VERTICAL  
Engineer : Tony.Chao  
Test Chamber : 966A

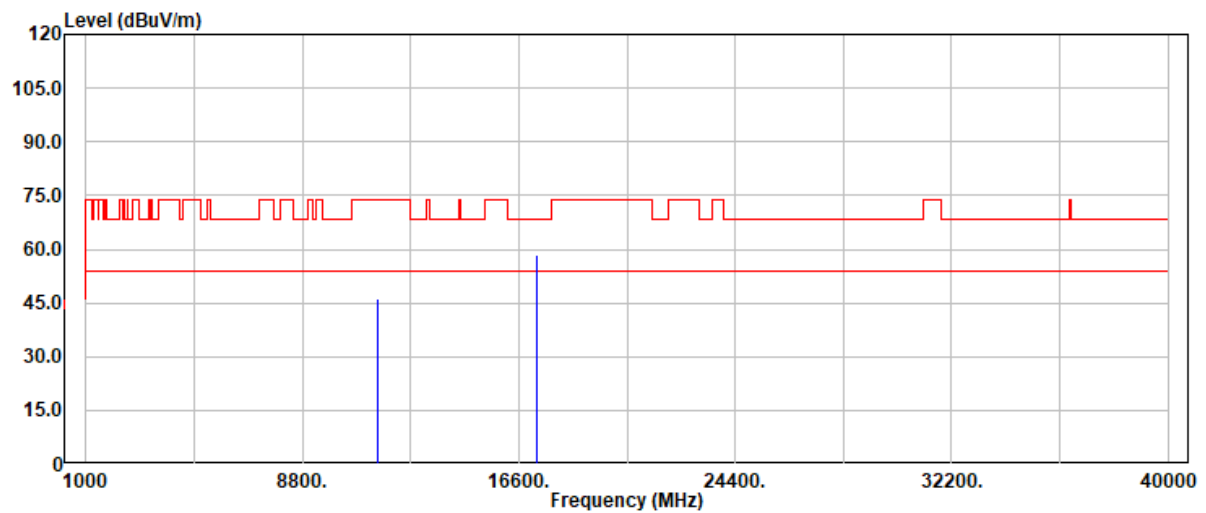


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11490.00 | 33.47      | 12.94  | 46.41     | 74.00     | -27.59 | Peak          |
| 11490.00 | 25.04      | 12.94  | 37.98     | 54.00     | -16.02 | Average       |
| 17235.00 | 32.06      | 26.41  | 58.47     | 68.20     | -9.73  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 183 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5745 MHz         | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 25               |              |              |

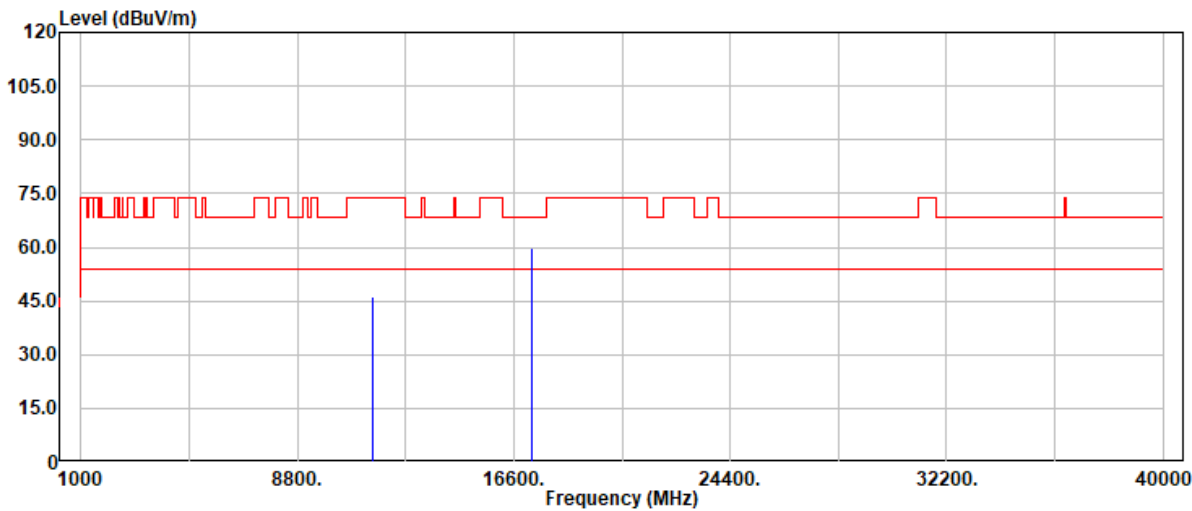


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11490.00 | 33.26      | 12.94  | 46.20     | 74.00     | -27.80 | Peak          |
| 11490.00 | 25.09      | 12.94  | 38.03     | 54.00     | -15.97 | Average       |
| 17235.00 | 33.14      | 26.41  | 59.55     | 68.20     | -8.65  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 184 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5785 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 25               |              |              |

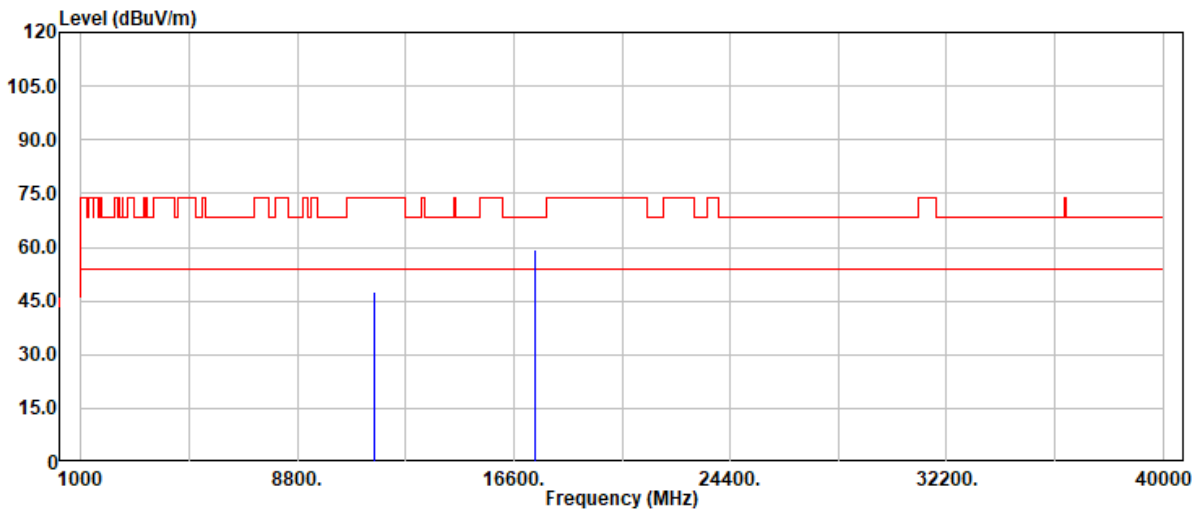


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11570.00 | 34.75      | 12.97  | 47.72     | 74.00     | -26.28 | Peak          |
| 11570.00 | 25.02      | 12.97  | 37.99     | 54.00     | -16.01 | Average       |
| 17355.00 | 32.96      | 26.34  | 59.30     | 68.20     | -8.90  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 185 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5785 MHz         | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 25               |              |              |

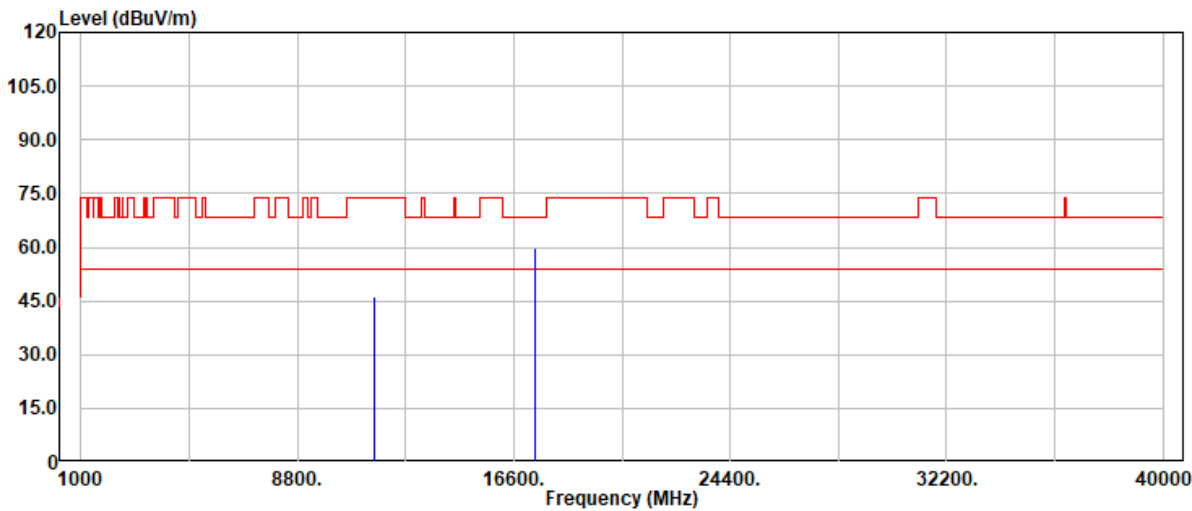


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11570.00 | 33.26      | 12.97  | 46.23     | 74.00     | -27.77 | Peak          |
| 11570.00 | 24.97      | 12.97  | 37.94     | 54.00     | -16.06 | Average       |
| 17355.00 | 33.27      | 26.34  | 59.61     | 68.20     | -8.59  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 186 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax20_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5825 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 25               |              |              |

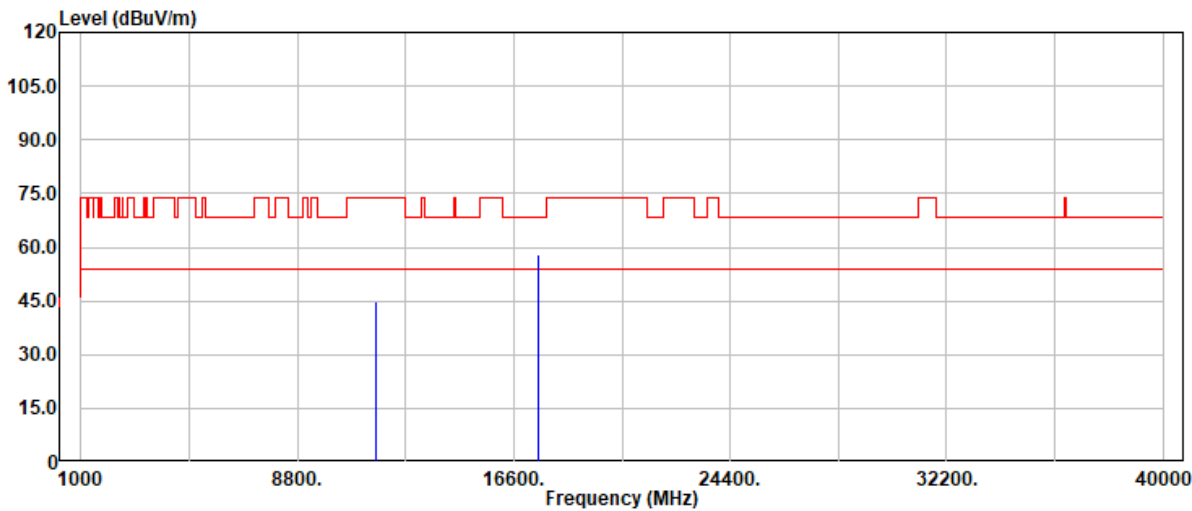

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11650.00 | 31.85      | 13.09  | 44.94     | 74.00     | -29.06 | Peak          |
| 11650.00 | 25.44      | 13.09  | 38.53     | 54.00     | -15.47 | Average       |
| 17475.00 | 31.90      | 25.89  | 57.79     | 68.20     | -10.41 | Peak          |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 187 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax20\_Band4  
Frequency : 5825 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 25

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

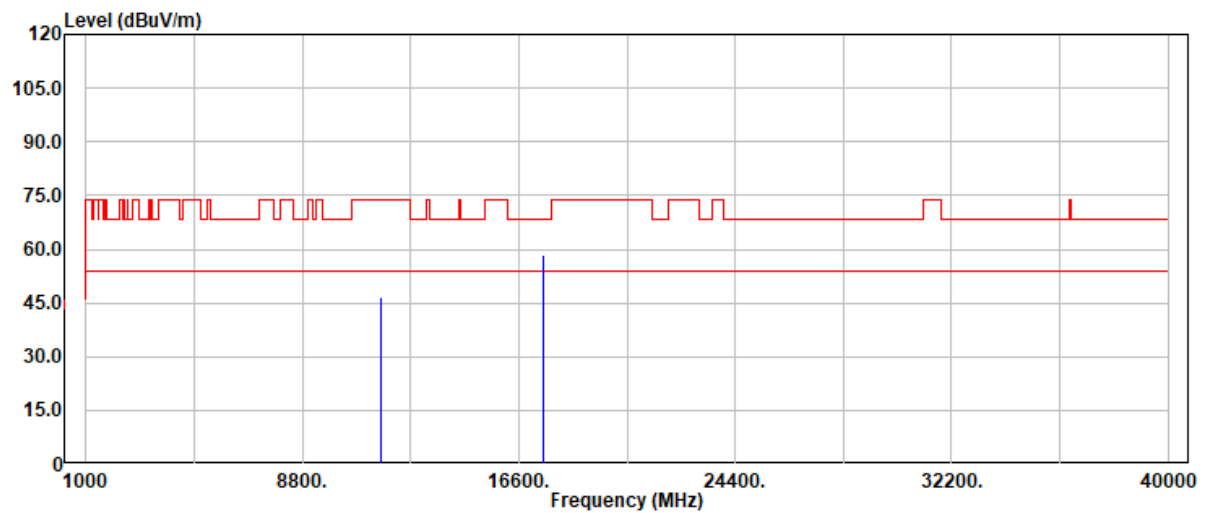


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11650.00 | 33.78      | 13.09  | 46.87     | 74.00     | -27.13 | Peak          |
| 11650.00 | 25.27      | 13.09  | 38.36     | 54.00     | -15.64 | Average       |
| 17475.00 | 32.74      | 25.89  | 58.63     | 68.20     | -9.57  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 188 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5755 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 24               |              |              |

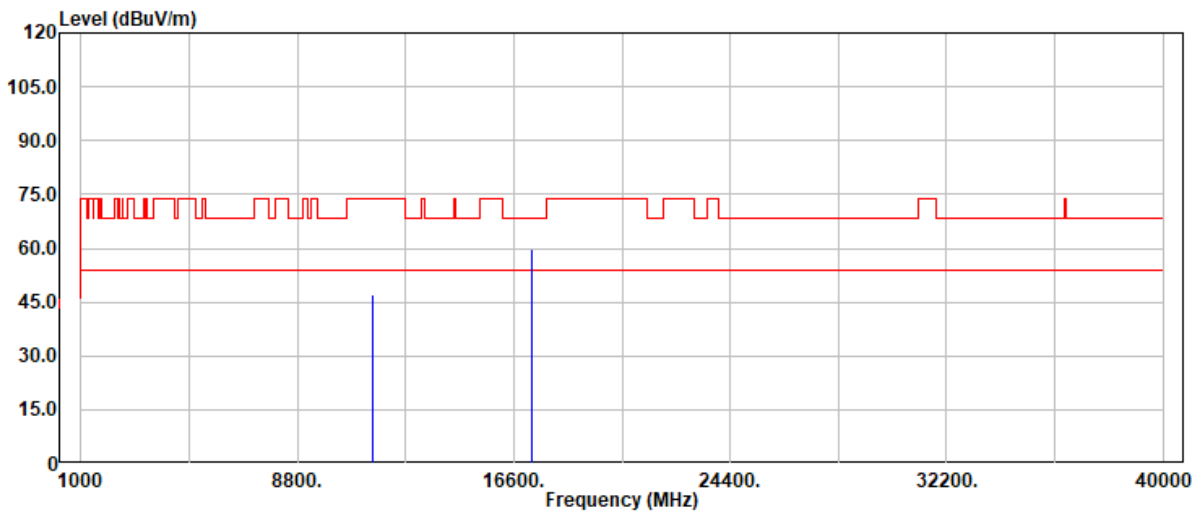

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11510.00 | 34.18      | 12.88  | 47.06     | 74.00     | -26.94 | Peak          |
| 11510.00 | 25.11      | 12.88  | 37.99     | 54.00     | -16.01 | Average       |
| 17265.00 | 33.03      | 26.52  | 59.55     | 68.20     | -8.65  | Peak          |






Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 189 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5755 MHz         | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 24               |              |              |

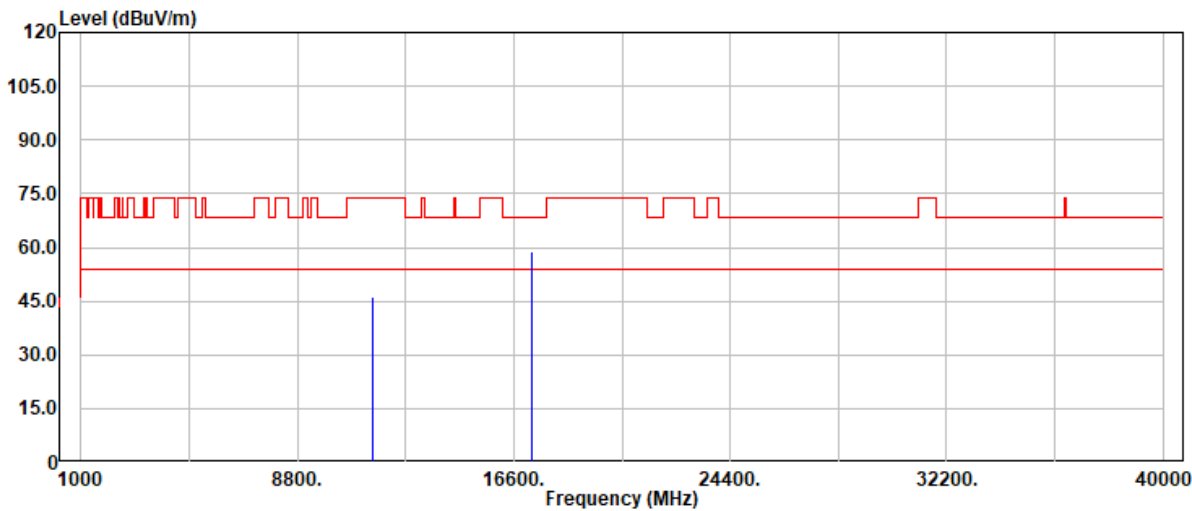


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11510.00 | 33.46      | 12.88  | 46.34     | 74.00     | -27.66 | Peak          |
| 11510.00 | 24.83      | 12.88  | 37.71     | 54.00     | -16.29 | Average       |
| 17265.00 | 32.14      | 26.52  | 58.66     | 68.20     | -9.54  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 190 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax40_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5795 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 23               |              |              |

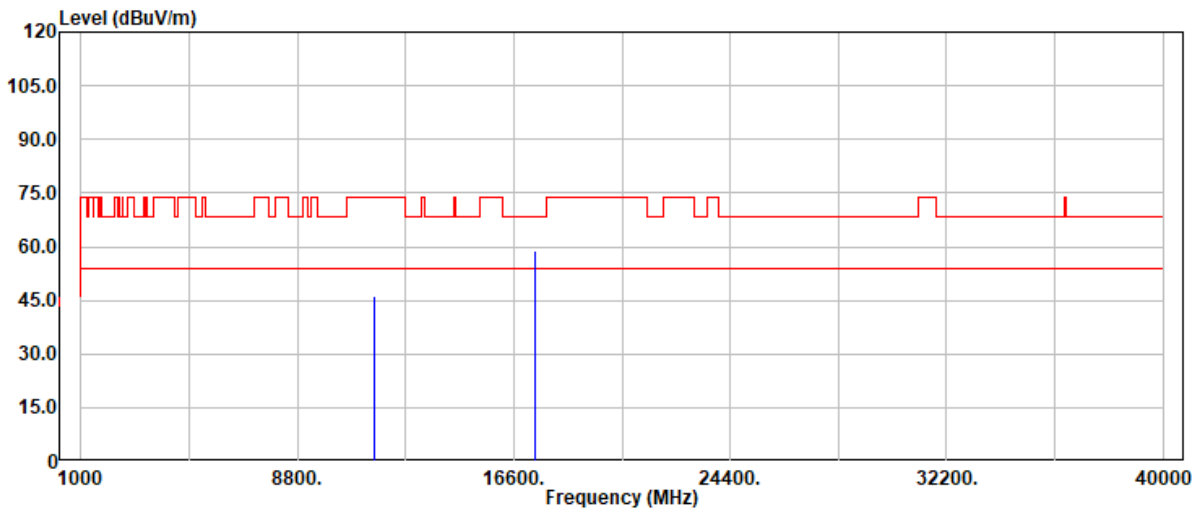

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11590.00 | 33.20      | 12.98  | 46.18     | 74.00     | -27.82 | Peak          |
| 11590.00 | 25.45      | 12.98  | 38.43     | 54.00     | -15.57 | Average       |
| 17385.00 | 32.39      | 26.29  | 58.68     | 68.20     | -9.52  | Peak          |




Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 191 / 193  
Rev.: 02

Project No : TM-2412000476P  
Operation Band : 802.11ax40\_Band4  
Frequency : 5795 MHz  
Operation Mode : TX  
EUT Pol : H  
Setting : 23

Test Date : 2025-02-07  
Temp./Humi. : 24.4/59  
Antenna Pol. : HORIZONTAL  
Engineer : Tony.Chao  
Test Chamber : 966A

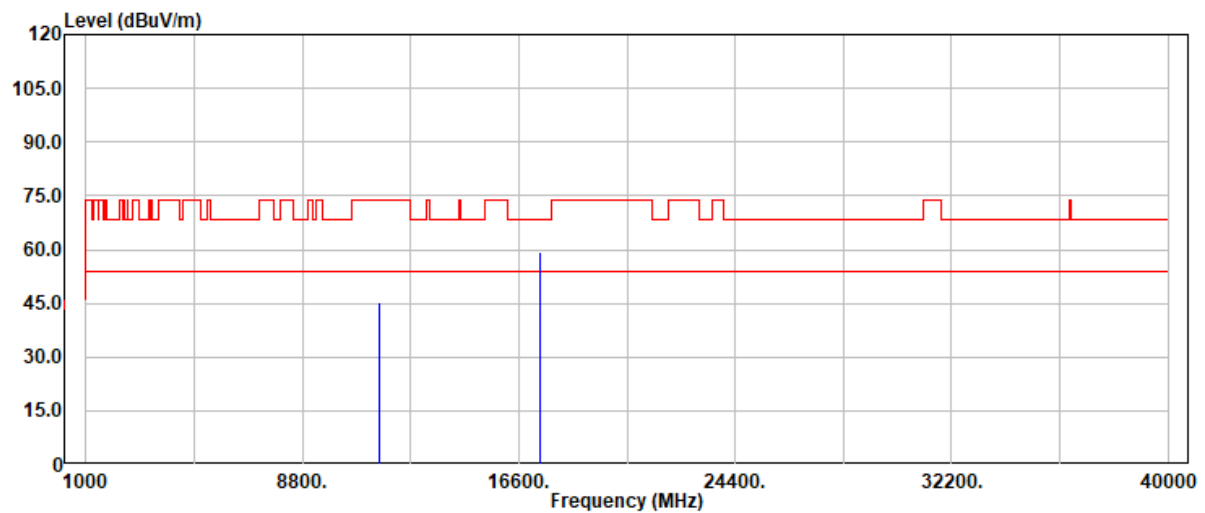


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11590.00 | 32.28      | 12.98  | 45.26     | 74.00     | -28.74 | Peak          |
| 11590.00 | 24.79      | 12.98  | 37.77     | 54.00     | -16.23 | Average       |
| 17385.00 | 32.83      | 26.29  | 59.12     | 68.20     | -9.08  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 192 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax80_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5775 MHz         | Antenna Pol. | : VERTICAL   |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 21               |              |              |

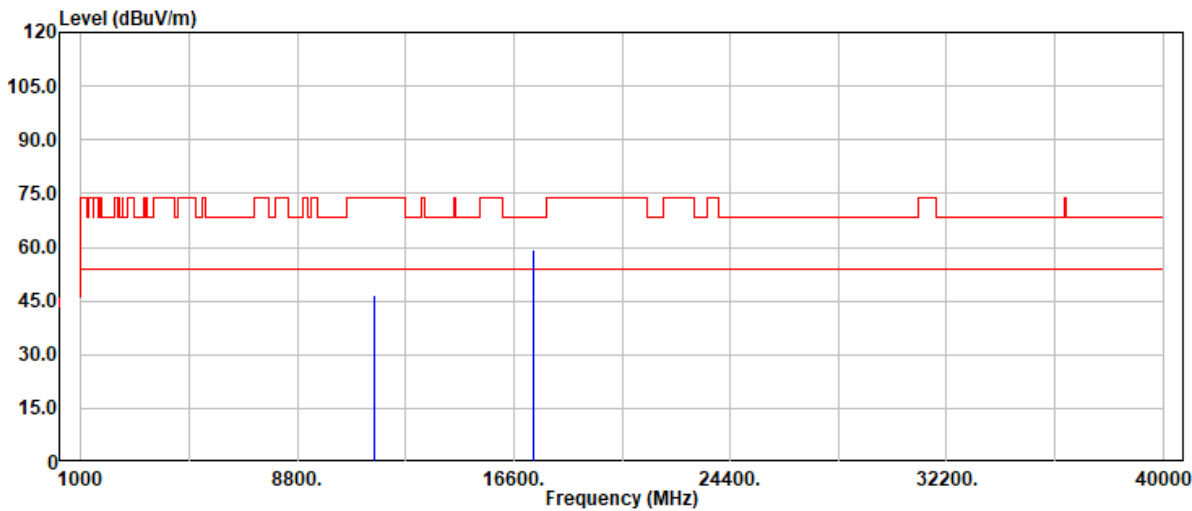


| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11550.00 | 33.49      | 12.96  | 46.45     | 74.00     | -27.55 | Peak          |
| 11550.00 | 25.02      | 12.96  | 37.98     | 54.00     | -16.02 | Average       |
| 17325.00 | 33.03      | 26.49  | 59.52     | 68.20     | -8.68  | Peak          |



Project No: TM-2412000476P  
Report No.: TMWK2412004834KR

Page: 193 / 193  
Rev.: 02

|                |                    |              |              |
|----------------|--------------------|--------------|--------------|
| Project No     | : TM-2412000476P   | Test Date    | : 2025-02-07 |
| Operation Band | : 802.11ax80_Band4 | Temp./Humi.  | : 24.4/59    |
| Frequency      | : 5775 MHz         | Antenna Pol. | : HORIZONTAL |
| Operation Mode | : TX               | Engineer     | : Tony.Chao  |
| EUT Pol        | : H                | Test Chamber | : 966A       |
| Setting        | : 21               |              |              |

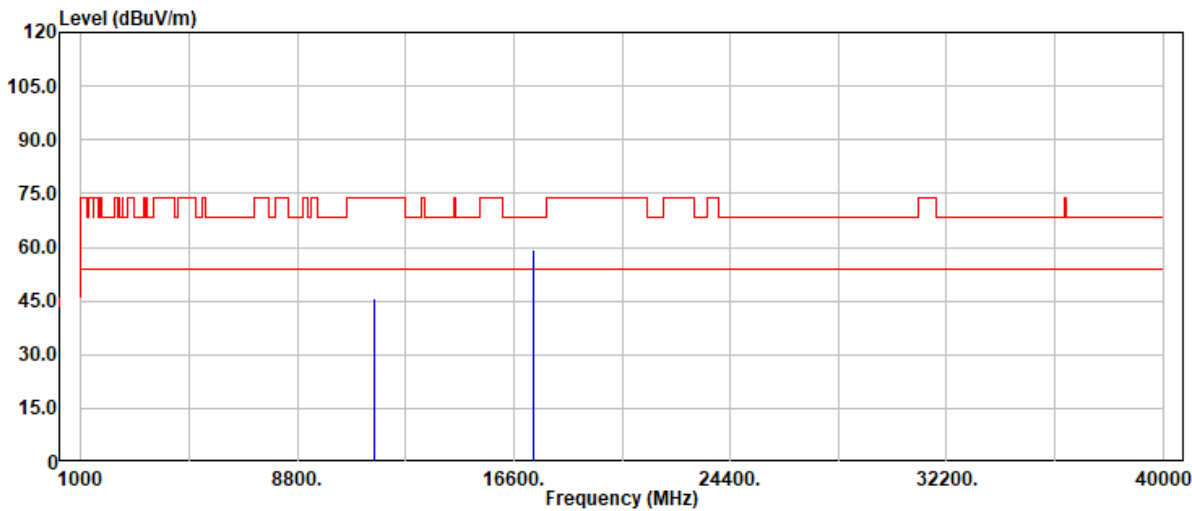

| Freq     | Read Level | Factor | Actual FS | Limit @3m | Margin | Detector Mode |
|----------|------------|--------|-----------|-----------|--------|---------------|
| -----    | -----      | -----  | -----     | -----     | -----  | -----         |
| MHz      | dBuV       | dB     | dBuV/m    | dBuV/m    | dB     | PK/QP/AV      |
| 11550.00 | 32.87      | 12.96  | 45.83     | 74.00     | -28.17 | Peak          |
| 11550.00 | 25.13      | 12.96  | 38.09     | 54.00     | -15.91 | Average       |
| 17325.00 | 32.99      | 26.49  | 59.48     | 68.20     | -8.72  | Peak          |

--End of Test Report--